

# Garbage Disposal Wireless Switch Kit

WEBANG

Cat.No.WWS15.WWS15-DC (15A-125VAC/CA)

Cat.No.WWS20.WWS20-DC(20A-125VAC/CA)

DC Rated: 9V/1.5A

## WARNINGS

- **TO AVOID FIRE, SHOCK OR DEATH, TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!**
- **TO AVOID RISK OF ELECTRIC SHOCK, ALL NON-GFCI RECEPTACLES MUST BE GFCI PROTECTED.**
- **IF WATER ENTERS THE ASSEMBLY, TURN POWER OFF AT THE CIRCUIT BREAKER and replace the unit immediately.**



## CAUTIONS

- Install and/or use in accordance with appropriate electrical codes and regulations.
- Use only the electrical mounting box provided.
- Use indoors only. Not for use in wet locations, such as kitchen or bathroom countertops.
- For surfaces greater than 2 1/4" thick. (5.72 cm), use the overmount installation.
- If you are unsure about any part of these instructions, consult an electrician.
- Use this device with **copper or copper clad wire only**.



## INSTALLATION INSTRUCTIONS

ENGLISH




### Includes:

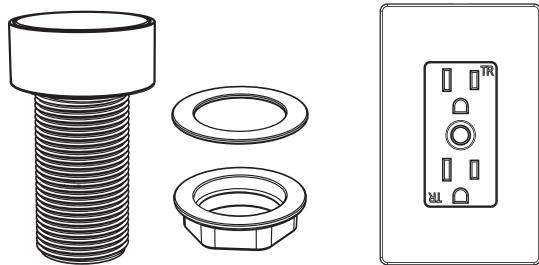

### Product Size

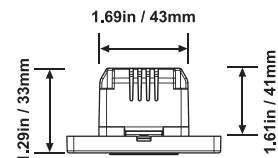

Also includes one of the following assembly lids

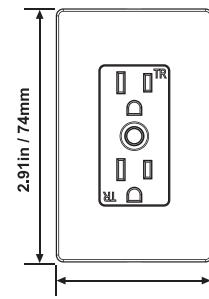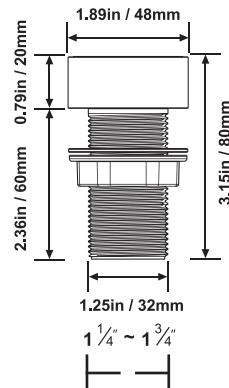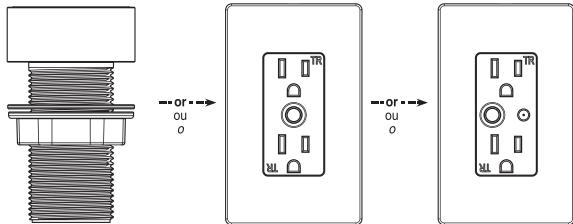

Pre-Drilled Hole Size Requirement.  
Between 1 1/4" and 1 3/4"



## INSTALLATION

1. **WARNING: TO AVOID FIRE, SHOCK, OR DEATH; TURN OFF POWER AT CIRCUIT BREAKER OR FUSE AND TEST THAT THE POWER IS OFF BEFORE WIRING!**

2. This device is to be installed in a wall box measuring at least 3" x 2" x 2 1/2" (standard single gang electrical wall box) and wired in accordance with NEC article 314 box fill requirements.


3. Connect wires per WIRING DIAGRAM as follows:  
**NOTE:** Back and Side wire terminals accept #14-#12 AWG copper or copper clad wires.

4a. **To Side Wire (if more than one wire is required on a terminal, you cannot side wire and must use the backwire option):**  
Remove insulation from each circuit conductor per strip gage on device [approx. 3/4" (1.9 cm)]. Loop wires clockwise 3/4 turn around terminal screws. FIRMLY tighten screws over wire loop.

4b. **To Back Wire:** Remove insulation from each circuit conductor [approx. 1/2" (1.3 cm)]. Insert straight wires under clamps next to appropriate terminal screws. Tighten screws FIRMLY.

5. Mount device in wall box with screws provided and mount wallplate.

6. Restore power at circuit breaker or fuse. **Installation is complete.**

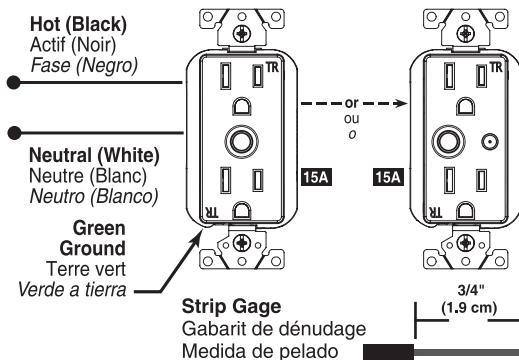

## FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

## FCC Radiation Exposure Statement:

The equipment complies with FCC Radiation exposure limits set forth for uncontrolled environment. This equipment should be installed and operated with **minimum distance 20cm** between the radiator and your body.