

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	23.38	PASS
EGPRS1900 1 Slot	661	1880	22.41	PASS
EGPRS1900 1 Slot	810	1909.8	22.02	PASS
EGPRS1900 2 Slot	512	1850.2	23.11	PASS
EGPRS1900 2 Slot	661	1880	22.50	PASS
EGPRS1900 2 Slot	810	1909.8	21.99	PASS
EGPRS1900 3 Slot	512	1850.2	21.67	PASS
EGPRS1900 3 Slot	661	1880	21.53	PASS
EGPRS1900 3 Slot	810	1909.8	20.84	PASS
EGPRS1900 4 Slot	512	1850.2	20.55	PASS
EGPRS1900 4 Slot	661	1880	20.06	PASS
EGPRS1900 4 Slot	810	1909.8	19.50	PASS
EGPRS850 1 Slot	128	824.2	26.59	PASS
EGPRS850 1 Slot	189	836.4	26.40	PASS
EGPRS850 1 Slot	251	848.8	26.76	PASS
EGPRS850 2 Slot	128	824.2	25.69	PASS
EGPRS850 2 Slot	189	836.4	25.84	PASS
EGPRS850 2 Slot	251	848.8	25.35	PASS
EGPRS850 3 Slot	128	824.2	23.22	PASS
EGPRS850 3 Slot	189	836.4	23.66	PASS
EGPRS850 3 Slot	251	848.8	23.19	PASS
EGPRS850 4 Slot	128	824.2	22.41	PASS
EGPRS850 4 Slot	189	836.4	22.05	PASS
EGPRS850 4 Slot	251	848.8	21.96	PASS
GPRS1900 1 Slot	512	1850.2	25.84	PASS
GPRS1900 1 Slot	661	1880	25.61	PASS
GPRS1900 1 Slot	810	1909.8	25.18	PASS
GPRS1900 2 Slot	512	1850.2	25.29	PASS
GPRS1900 2 Slot	661	1880	25.03	PASS
GPRS1900 2 Slot	810	1909.8	24.51	PASS
GPRS1900 3 Slot	512	1850.2	24.16	PASS
GPRS1900 3 Slot	661	1880	23.51	PASS
GPRS1900 3 Slot	810	1909.8	22.82	PASS
GPRS1900 4 Slot	512	1850.2	23.12	PASS
GPRS1900 4 Slot	661	1880	22.78	PASS
GPRS1900 4 Slot	810	1909.8	22.03	PASS
GPRS850 1 Slot	128	824.2	32.36	PASS
GPRS850 1 Slot	189	836.4	32.32	PASS
GPRS850 1 Slot	251	848.8	32.29	PASS
GPRS850 2 Slot	128	824.2	32.11	PASS
GPRS850 2 Slot	189	836.4	32.09	PASS

GPRS850 2 Slot	251	848.8	31.69	PASS
GPRS850 3 Slot	128	824.2	29.87	PASS
GPRS850 3 Slot	189	836.4	29.83	PASS
GPRS850 3 Slot	251	848.8	29.69	PASS
GPRS850 4 Slot	128	824.2	28.79	PASS
GPRS850 4 Slot	189	836.4	28.73	PASS
GPRS850 4 Slot	251	848.8	28.55	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	5.37	13	PASS
EGPRS1900	661	1880	5.73	13	PASS
EGPRS1900	810	1909.8	5.57	13	PASS
EGPRS850	128	824.2	8.27	13	PASS
EGPRS850	189	836.4	7.98	13	PASS
EGPRS850	251	848.8	8.19	13	PASS


EGPRS1900 Channel=512

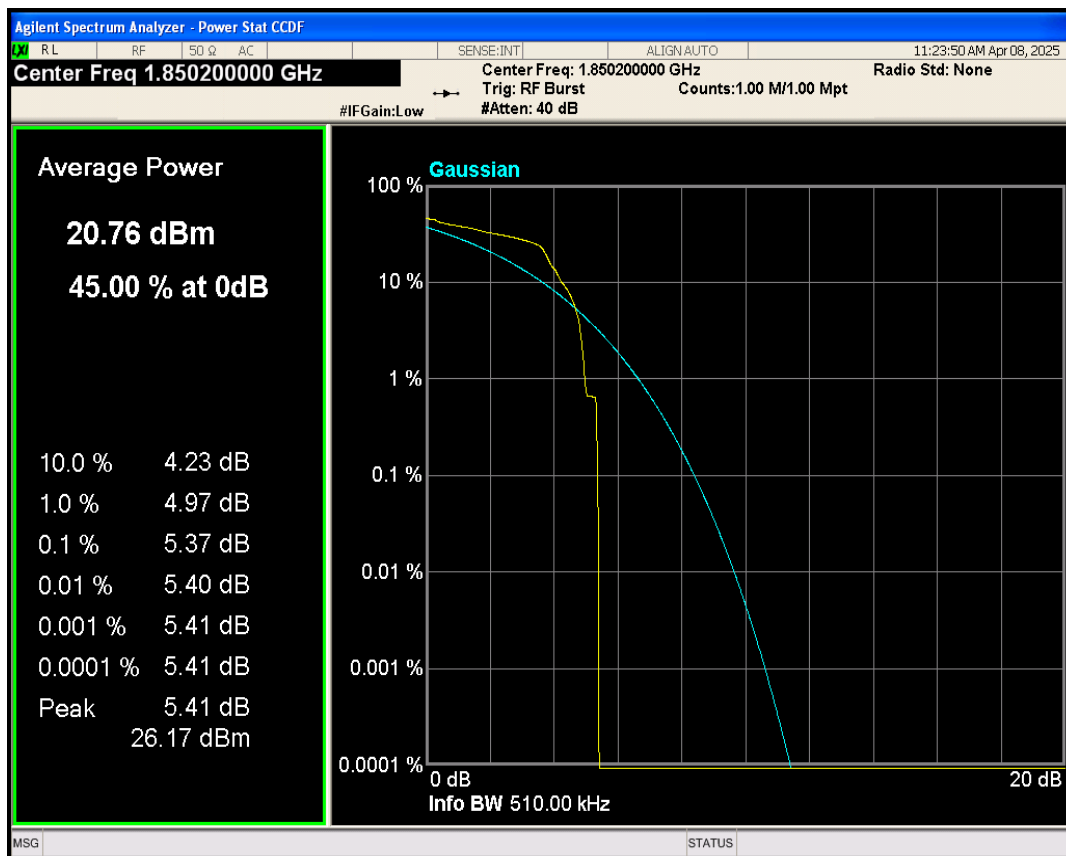


EGPRS1900 Channel=661

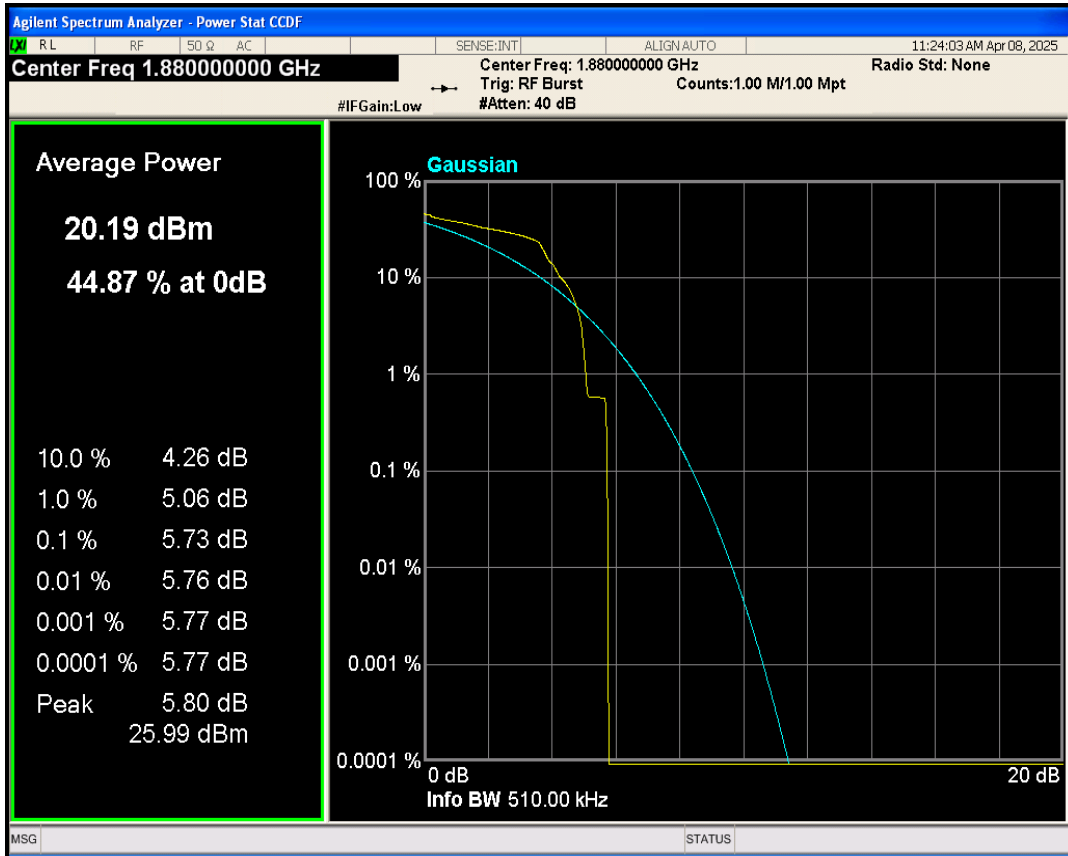


EGPRS1900 Channel=810

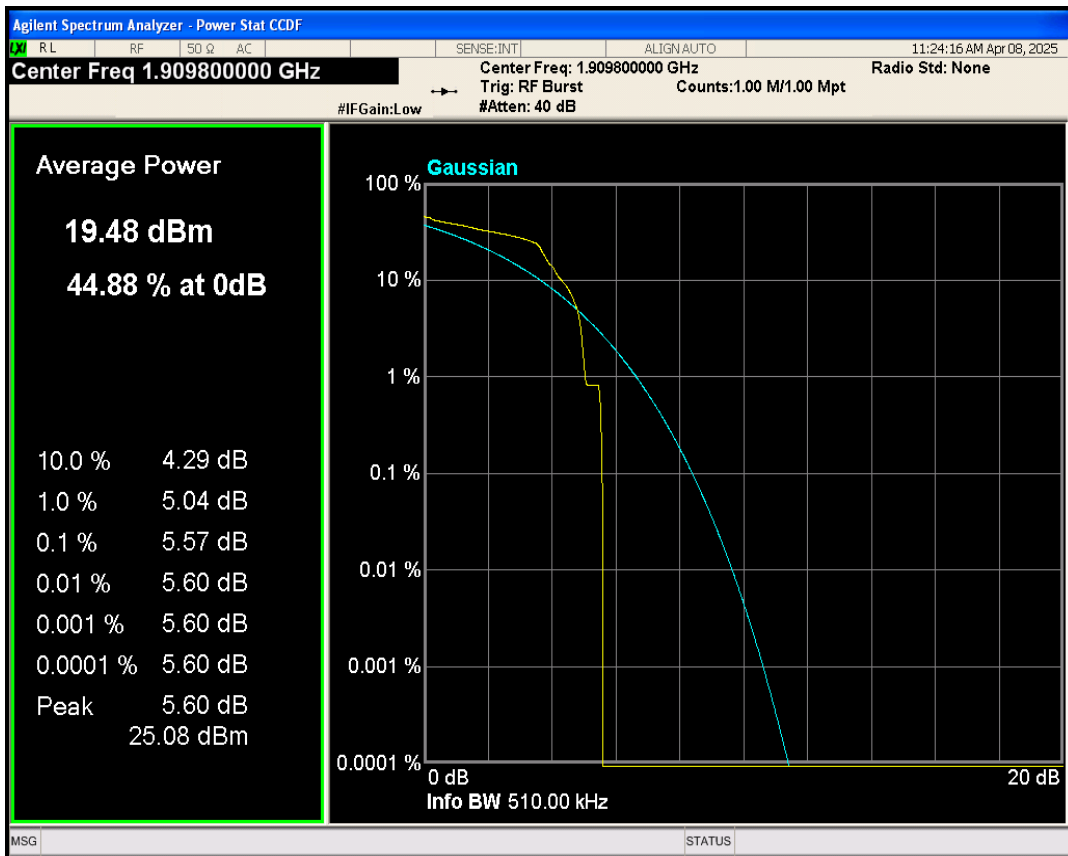


EGPRS850 Channel=128

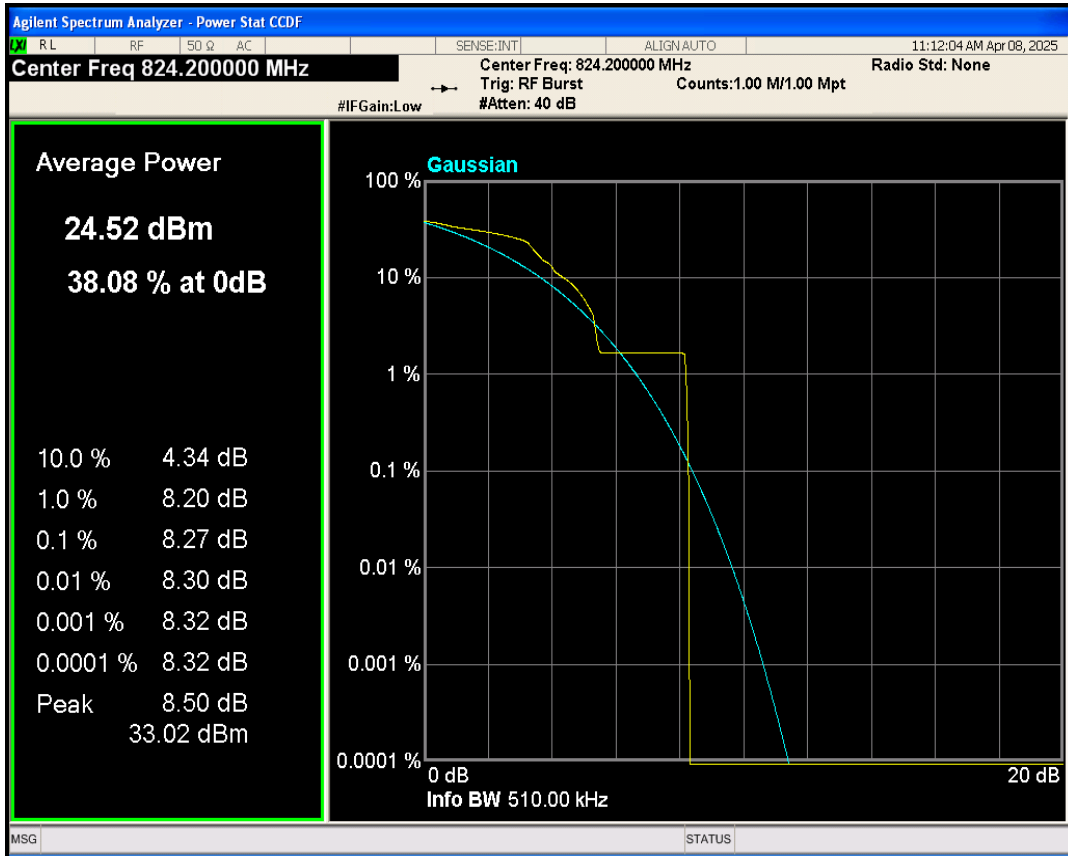

EGPRS850 Channel=189

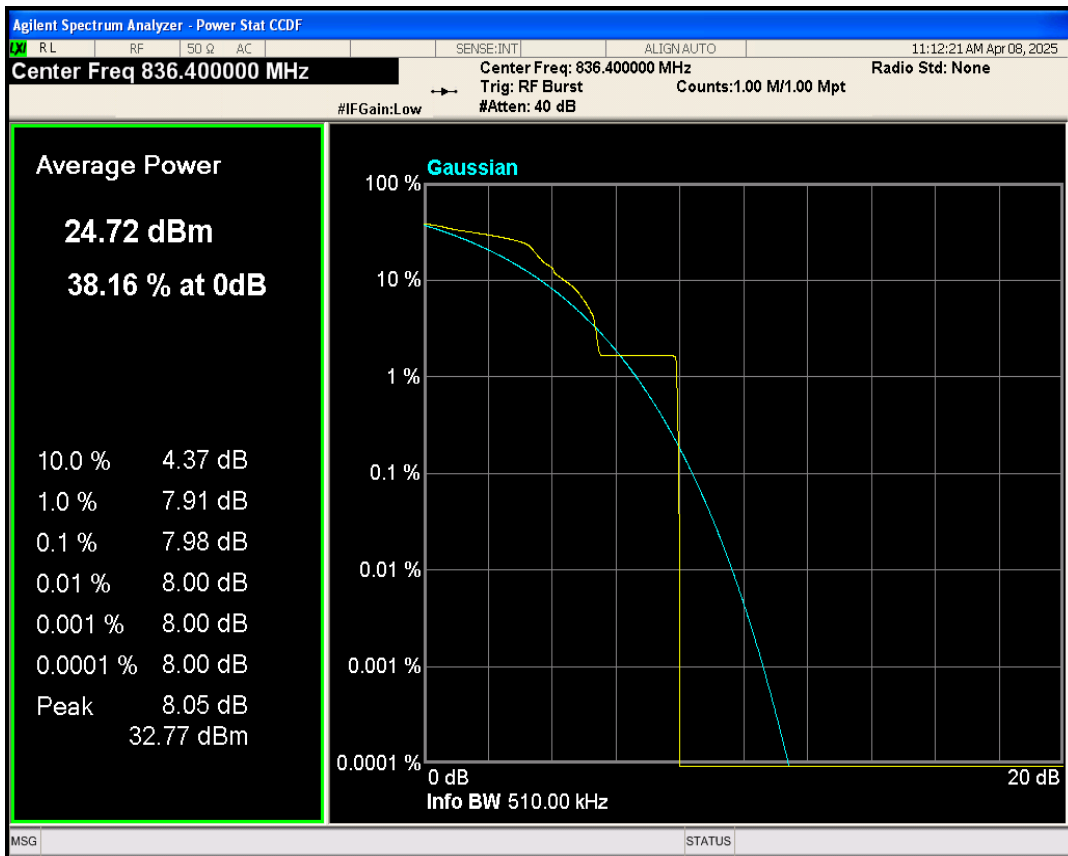


EGPRS850 Channel=251

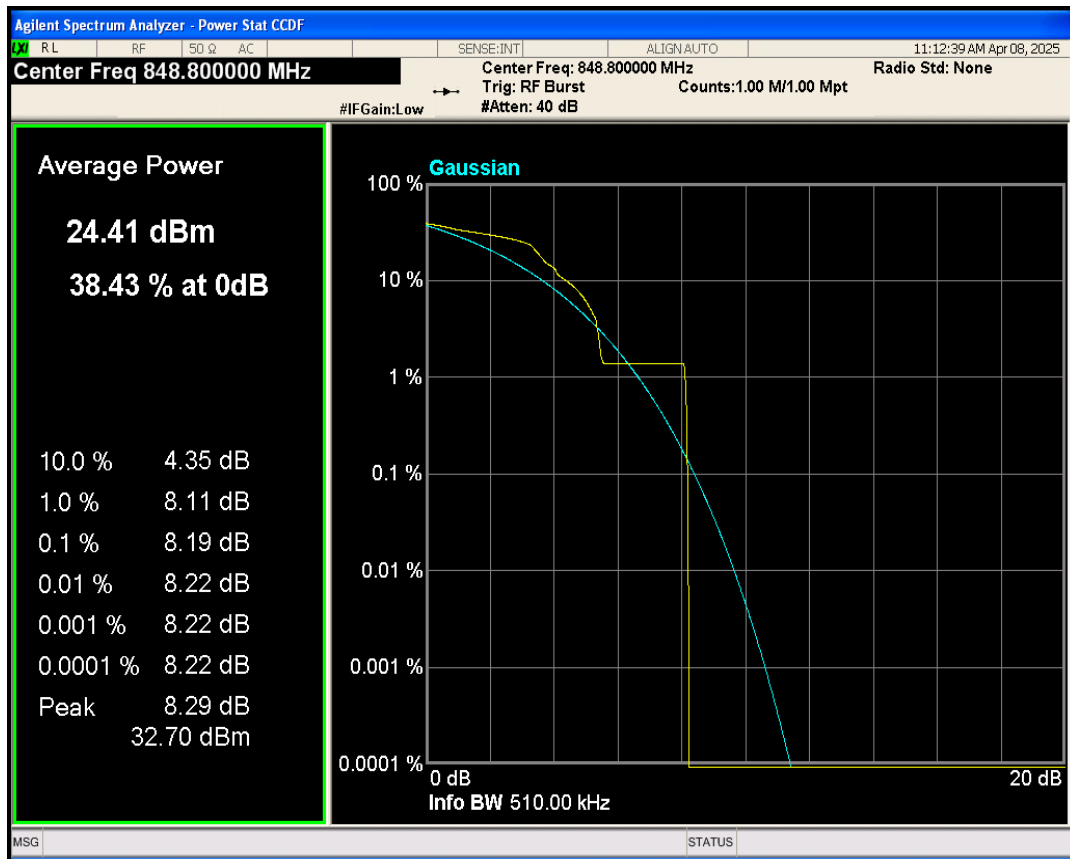


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	250.518	327.717	PASS
EGPRS1900	661	1880	255.920	328.204	PASS
EGPRS1900	810	1909.8	258.677	318.889	PASS
EGPRS850	128	824.2	234.601	301.265	PASS
EGPRS850	189	836.4	237.462	306.690	PASS
EGPRS850	251	848.8	238.431	315.454	PASS


EGPRS1900 Channel=512

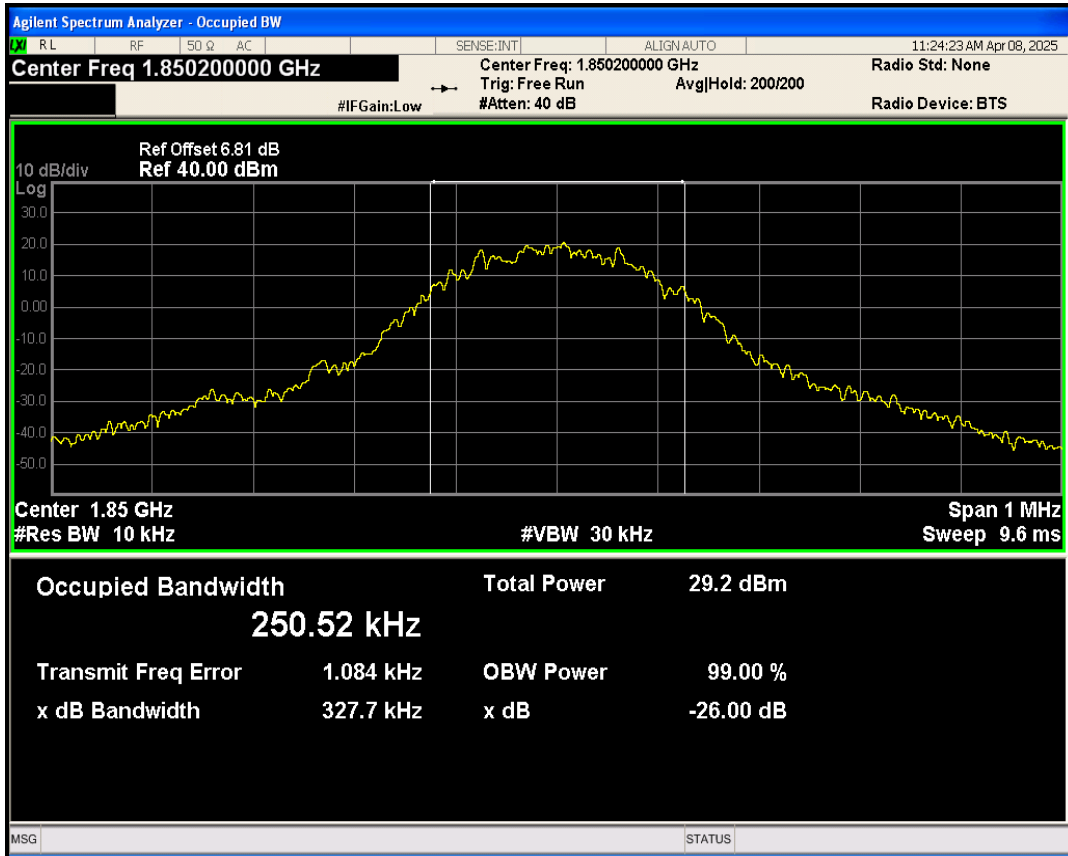


EGPRS1900 Channel=661

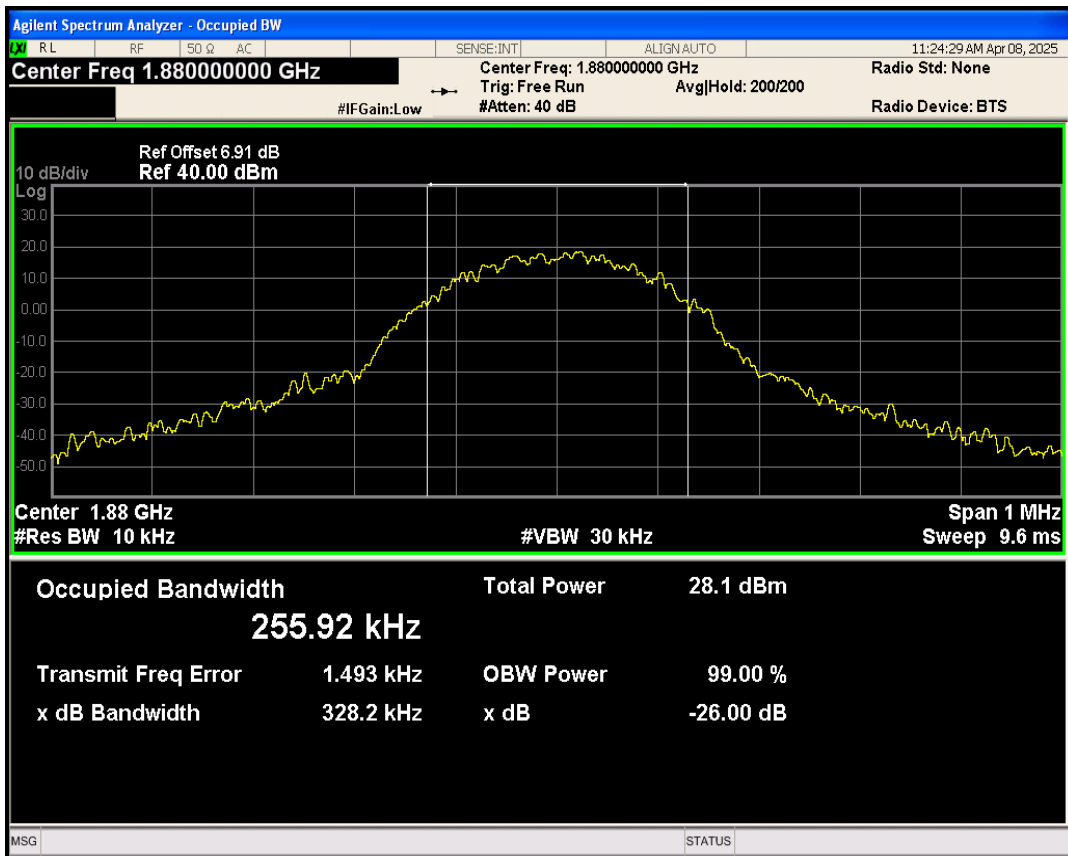


EGPRS1900 Channel=810

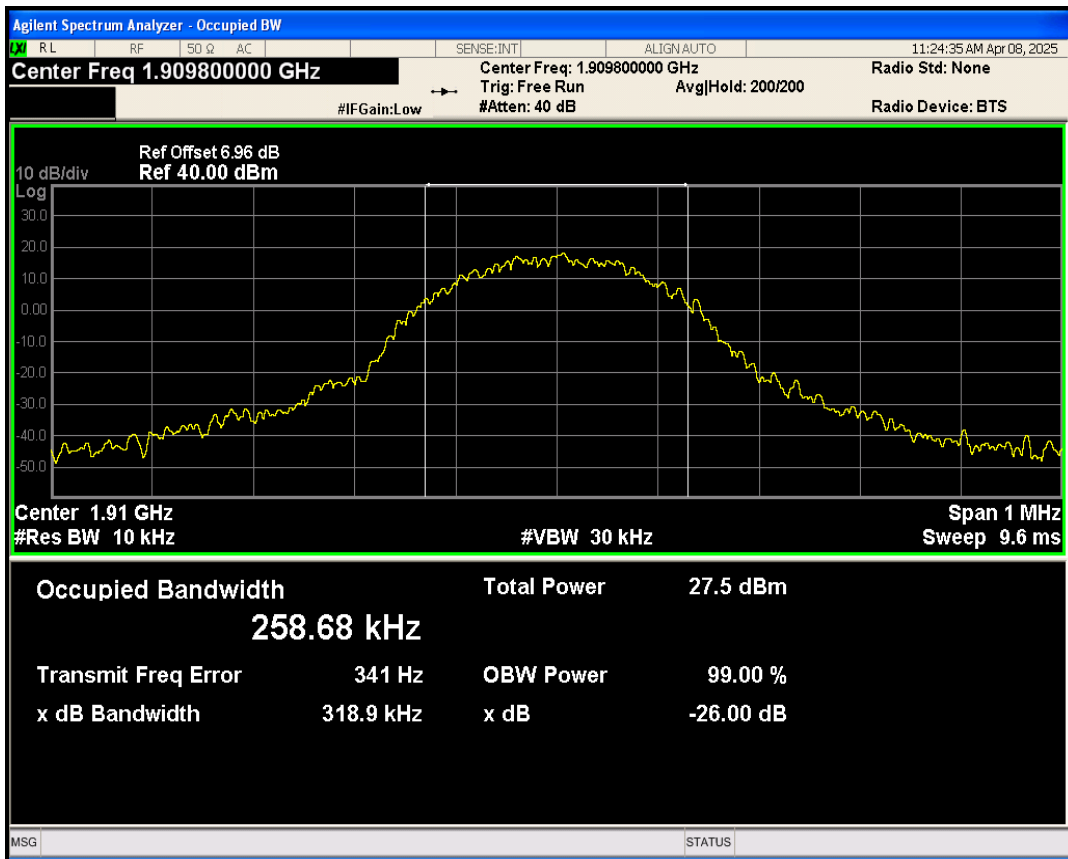


EGPRS850 Channel=128

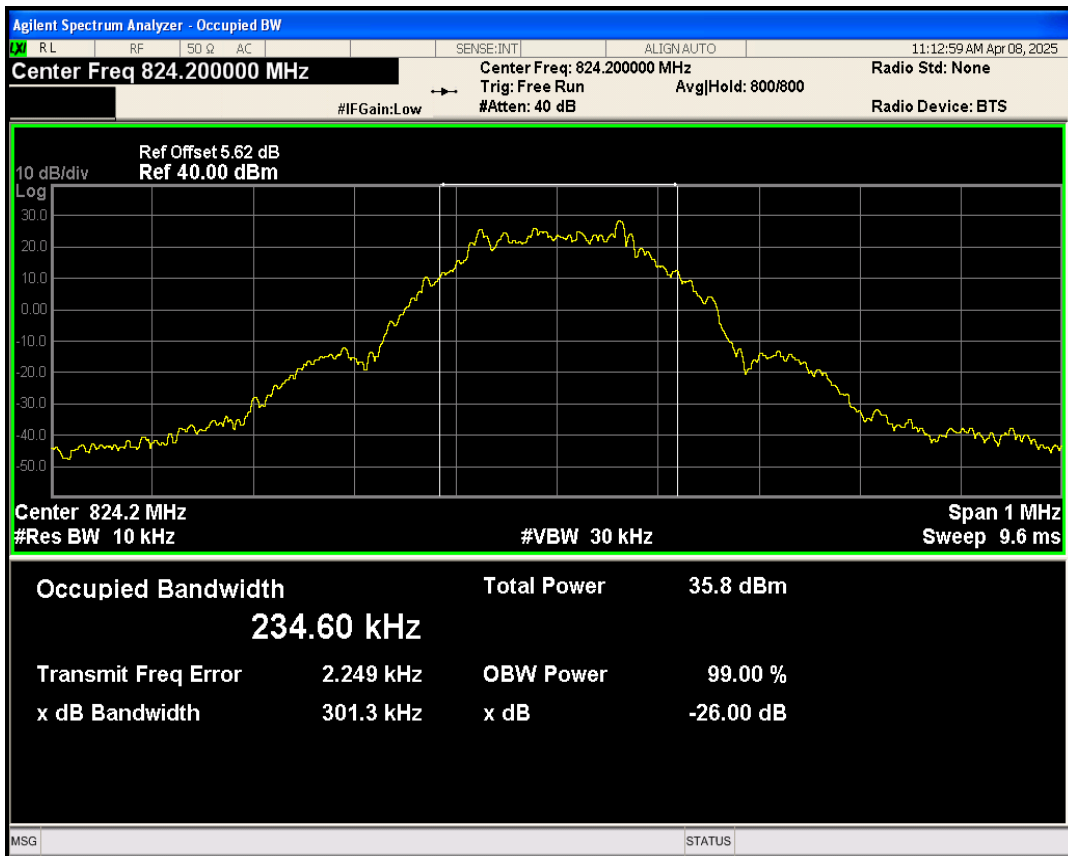

EGPRS850 Channel=189

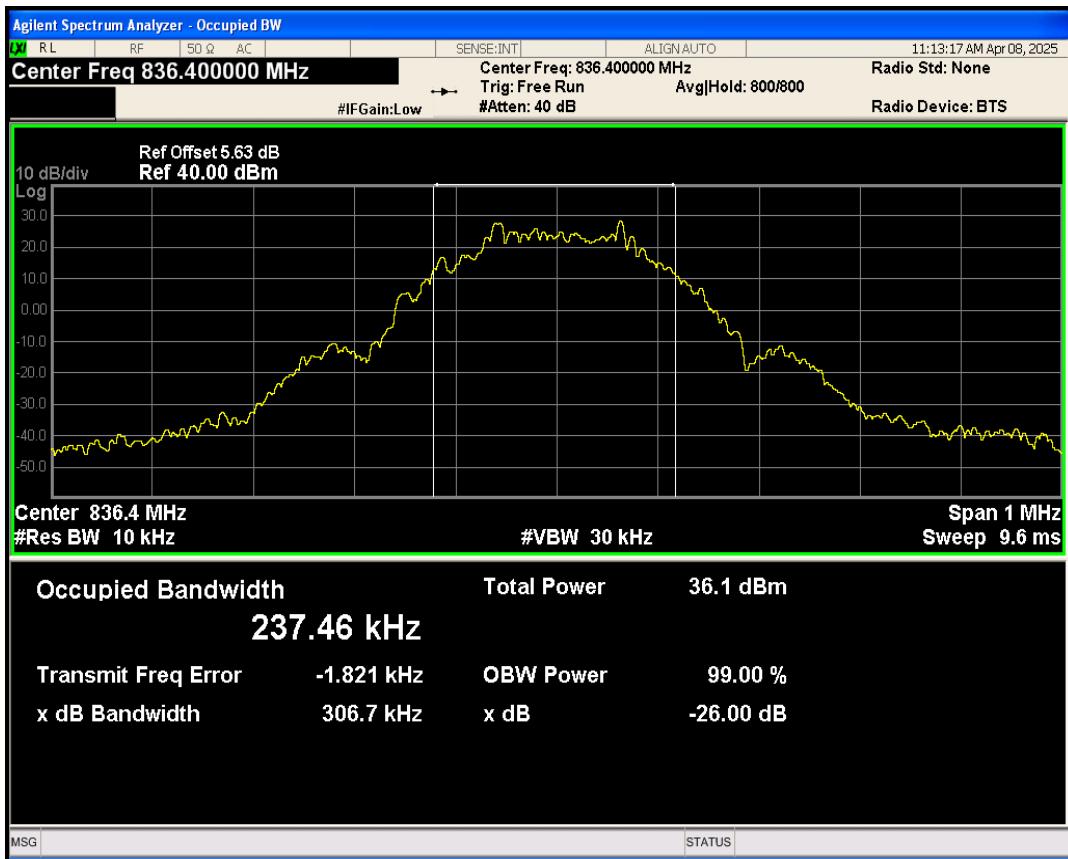


EGPRS850 Channel=251

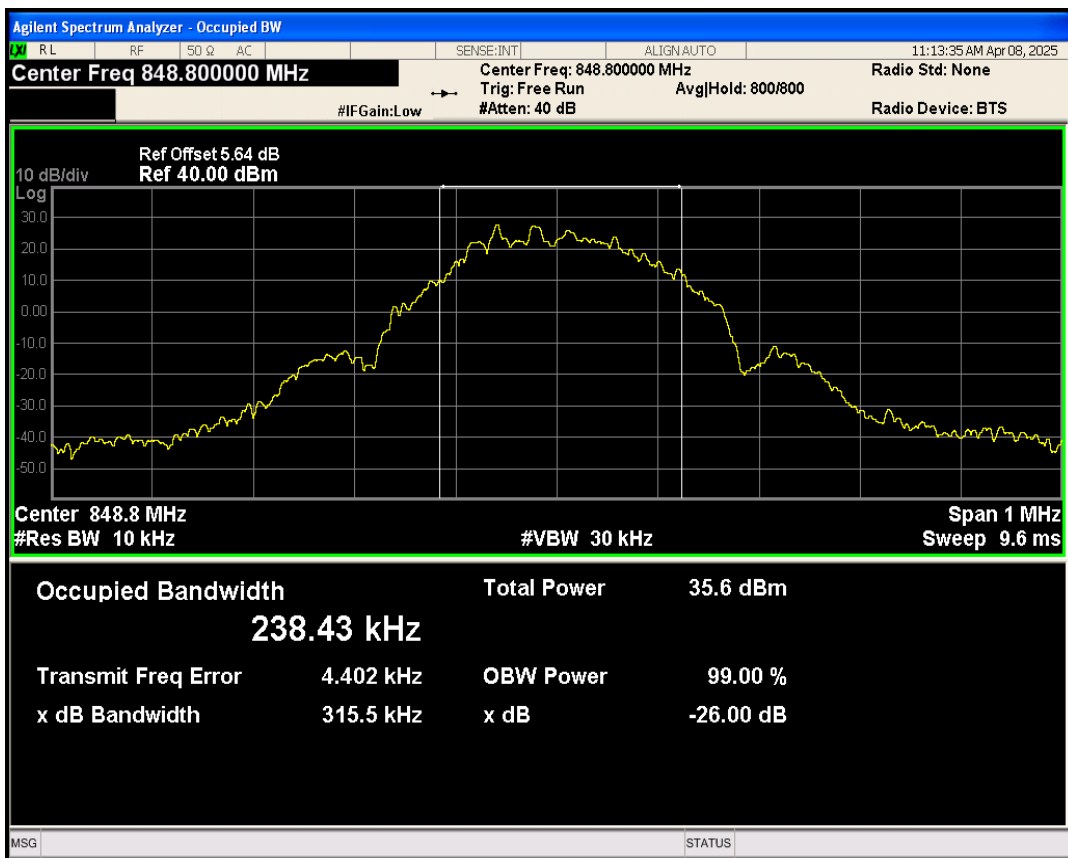


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.99	-37.82	-13	PASS
EGPRS1900	810	1909.8	1910.00	-40.78	-13	PASS
EGPRS850	128	824.2	823.99	-33.54	-13	PASS
EGPRS850	251	848.8	849.03	-34.76	-13	PASS


EGPRS1900 Channel=512

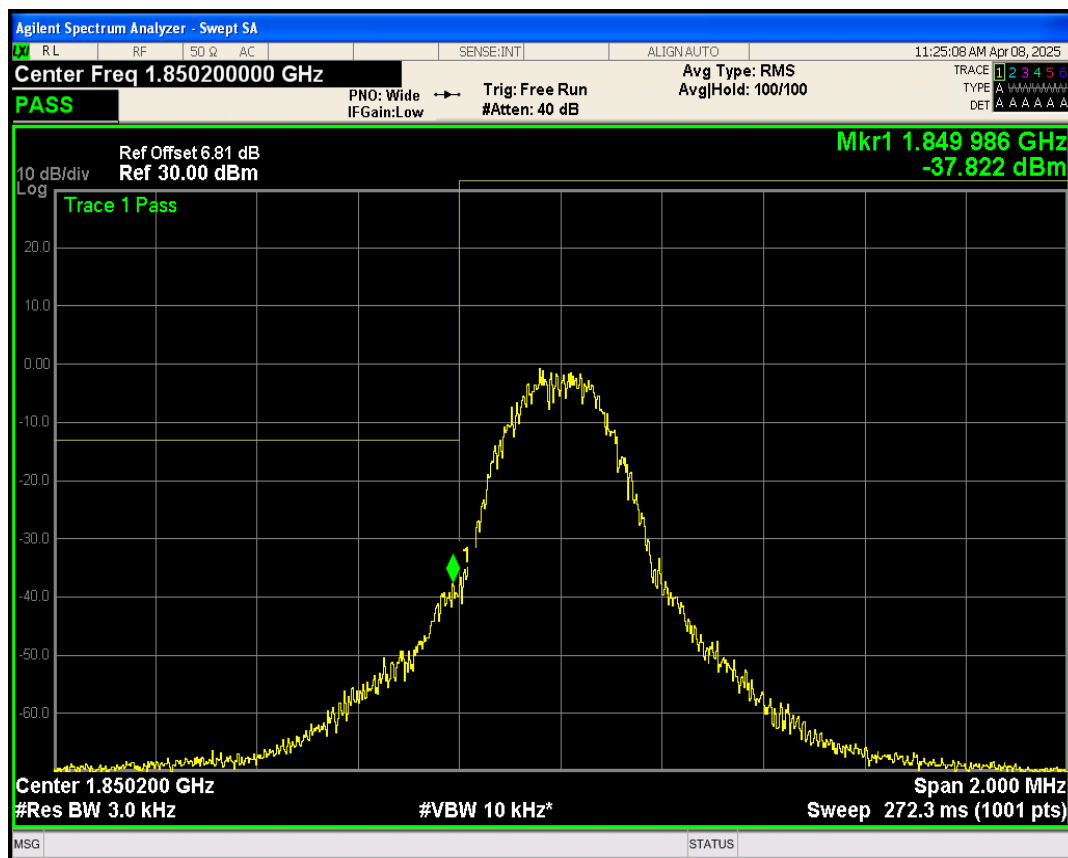


EGPRS1900 Channel=810

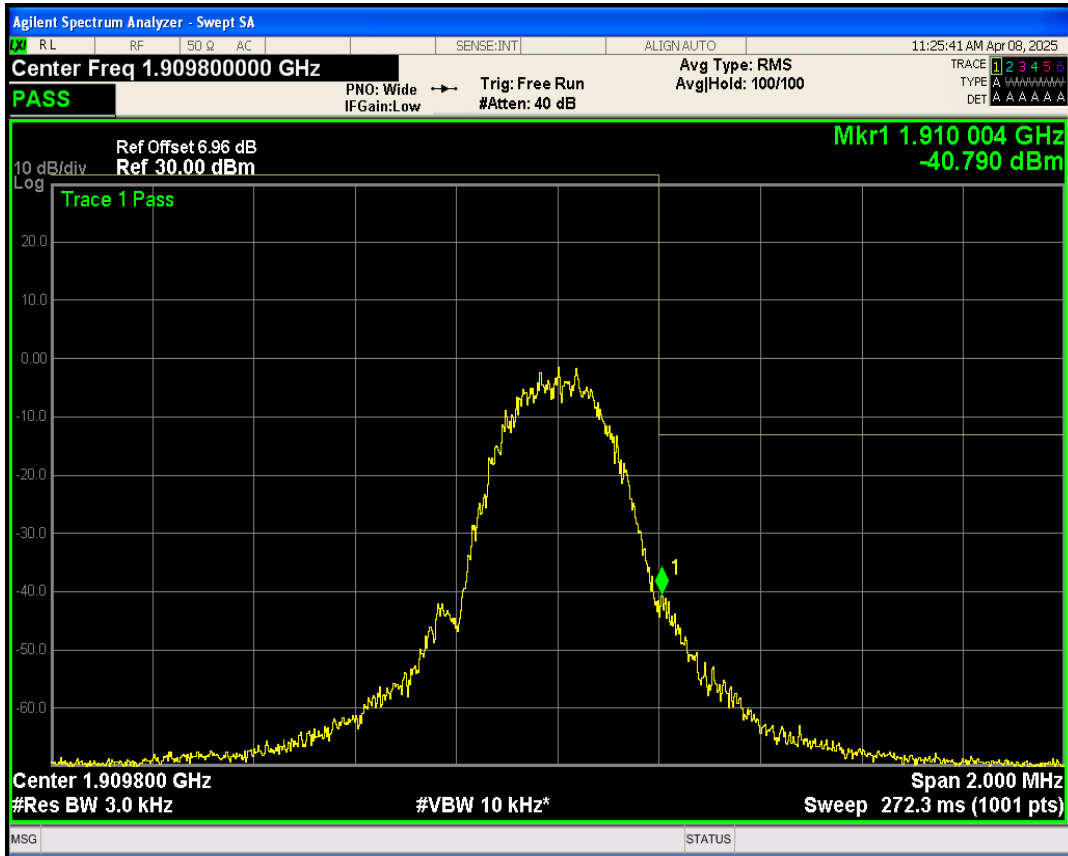

EGPRS850 Channel=128

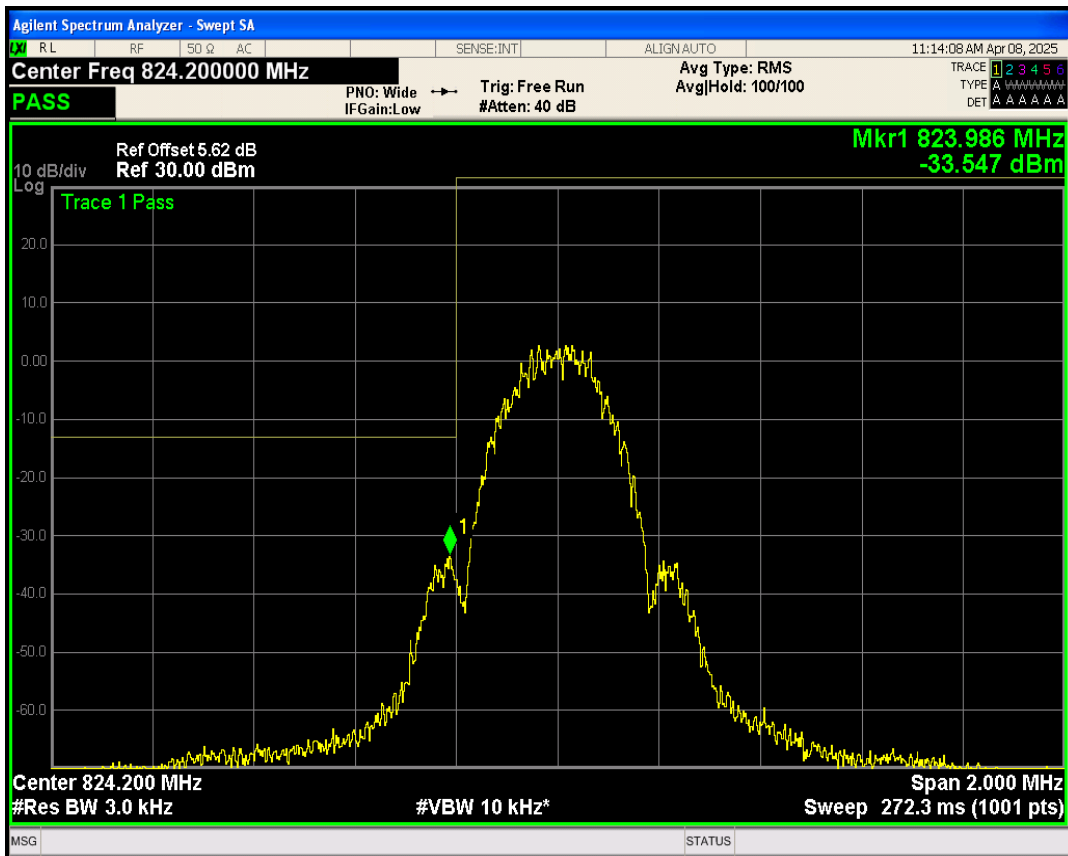


EGPRS850 Channel=251

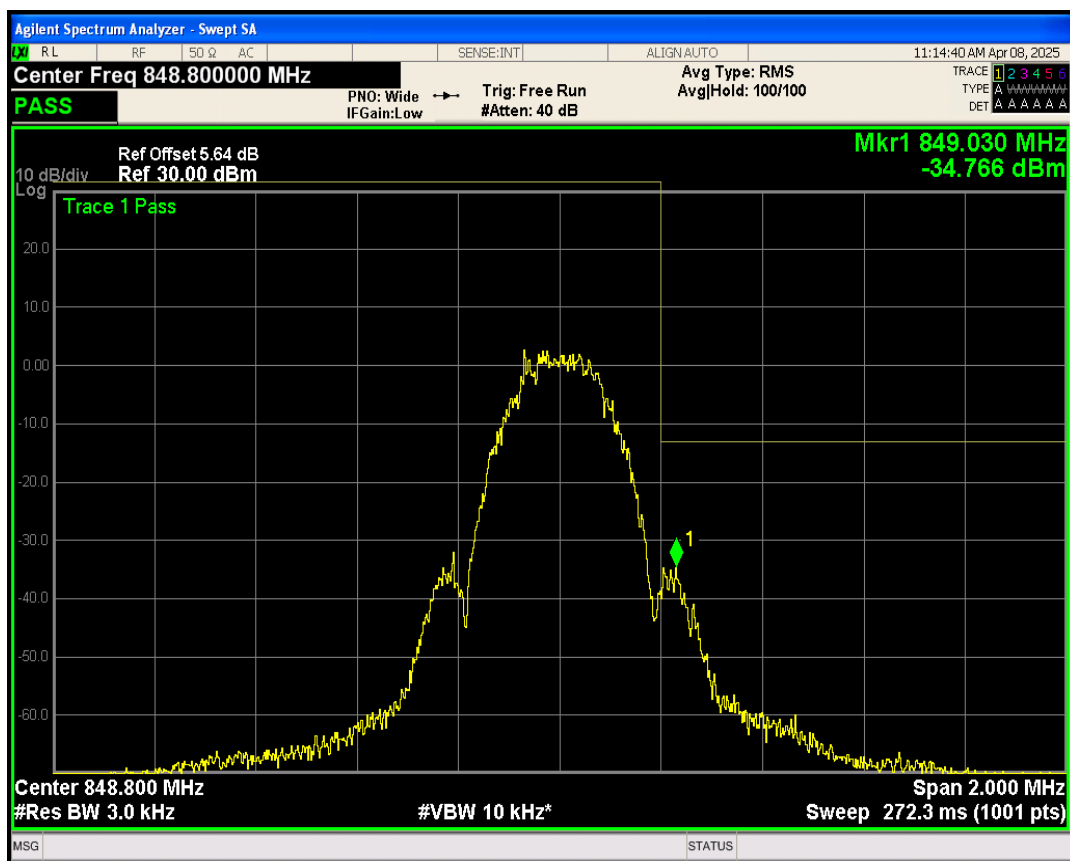


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25567.59	-21.06	-13	PASS
EGPRS1900	661	1880	25738.33	-21.31	-13	PASS
EGPRS1900	810	1909.8	25997.73	-20.82	-13	PASS
EGPRS850	128	824.2	25590.76	-21.46	-13	PASS
EGPRS850	189	836.4	25263.19	-20.89	-13	PASS
EGPRS850	251	848.8	25479.58	-21.73	-13	PASS


EGPRS1900 Channel=512

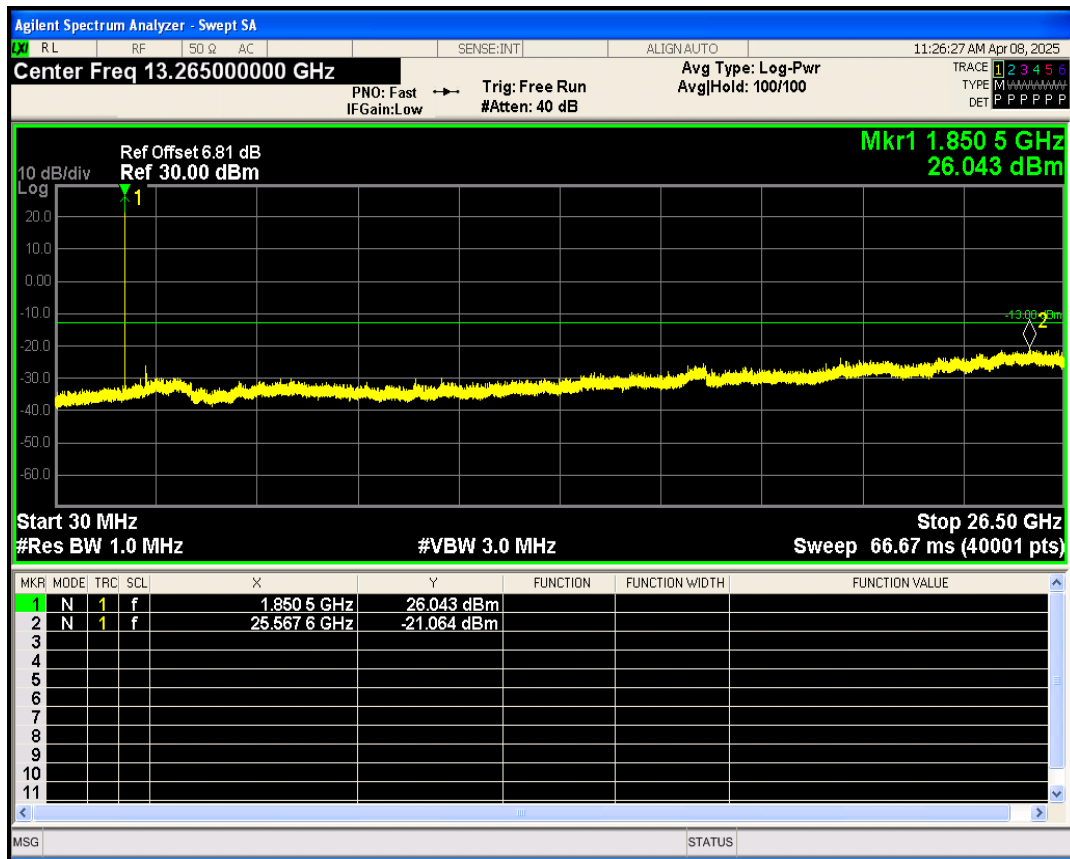


EGPRS1900 Channel=661

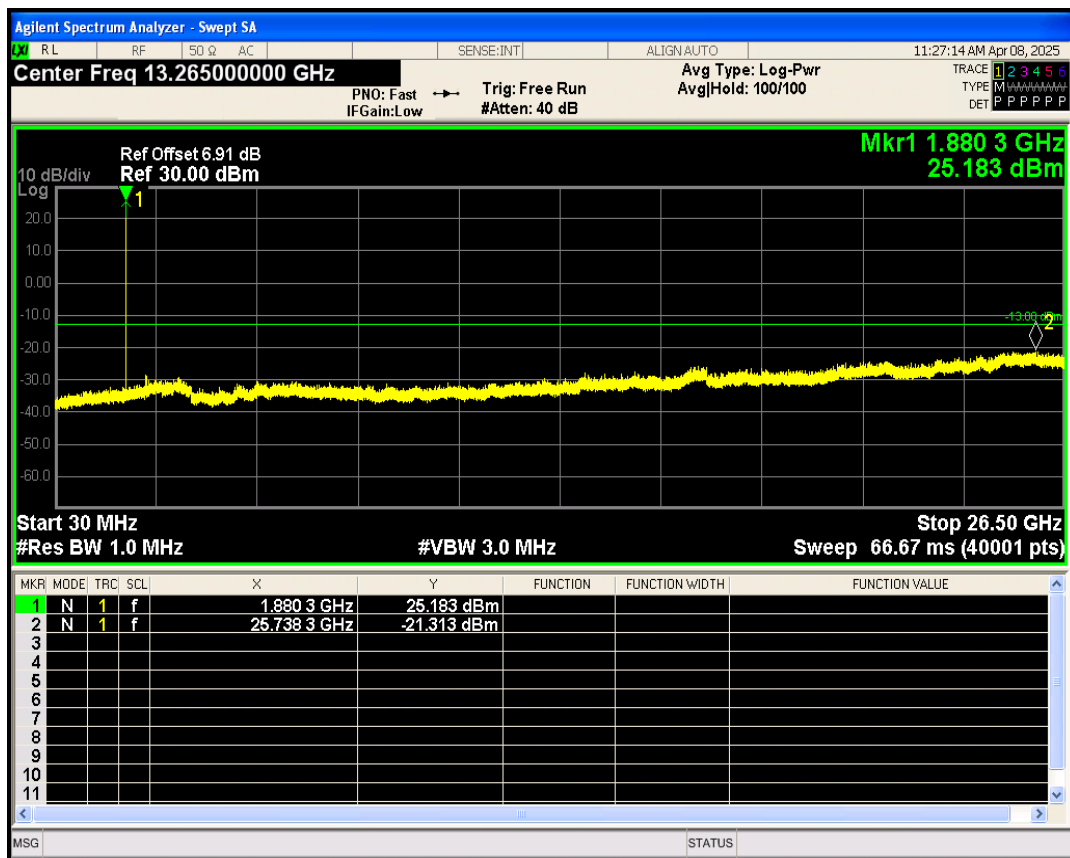


EGPRS1900 Channel=810

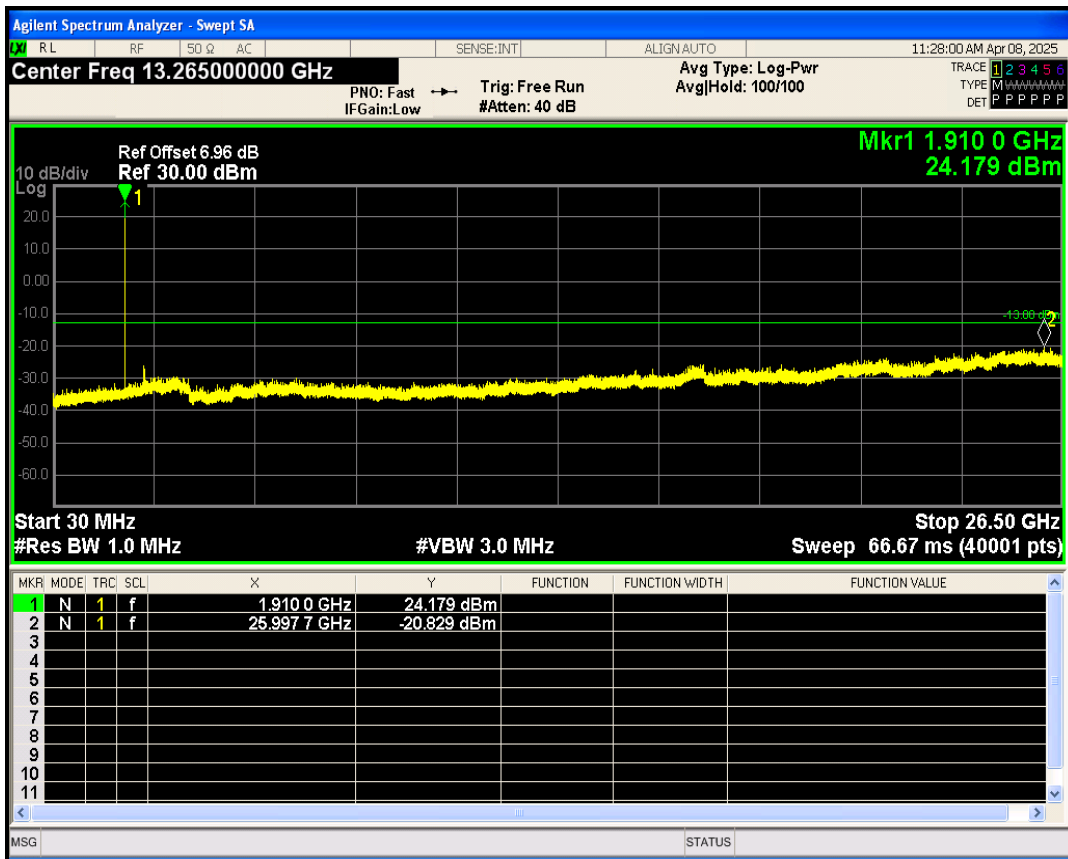


EGPRS850 Channel=128

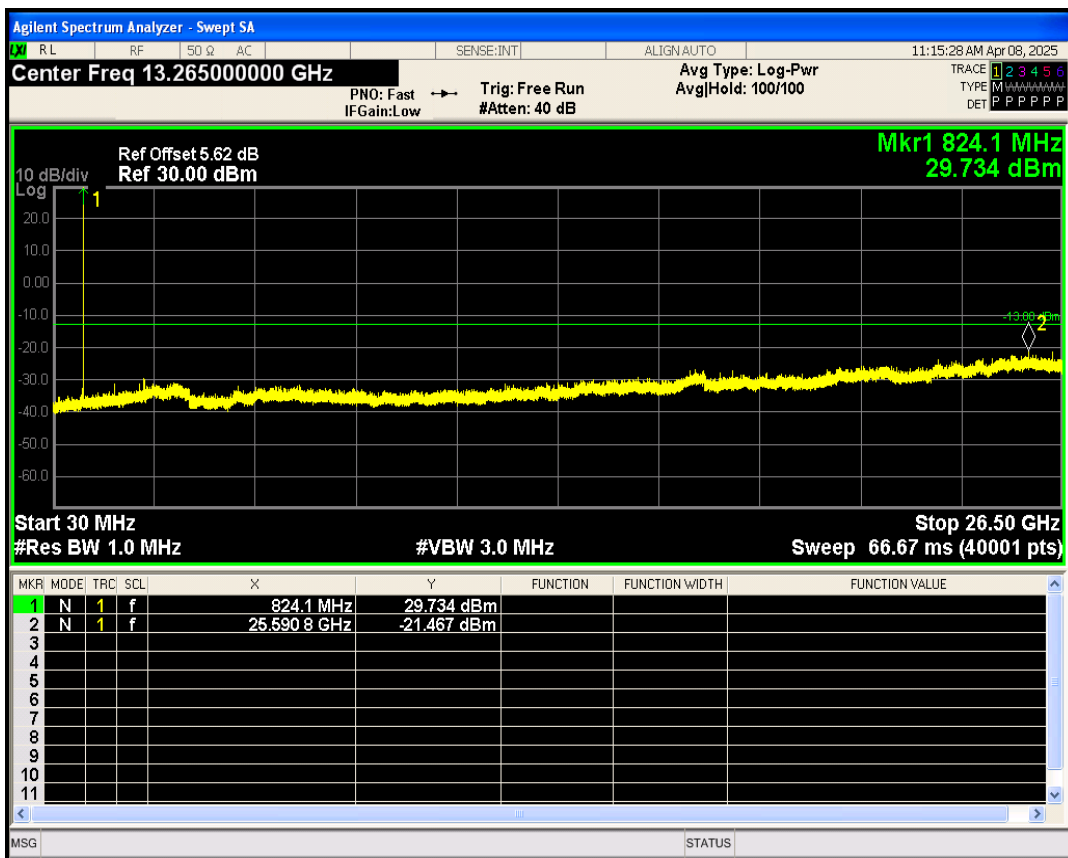

EGPRS850 Channel=189

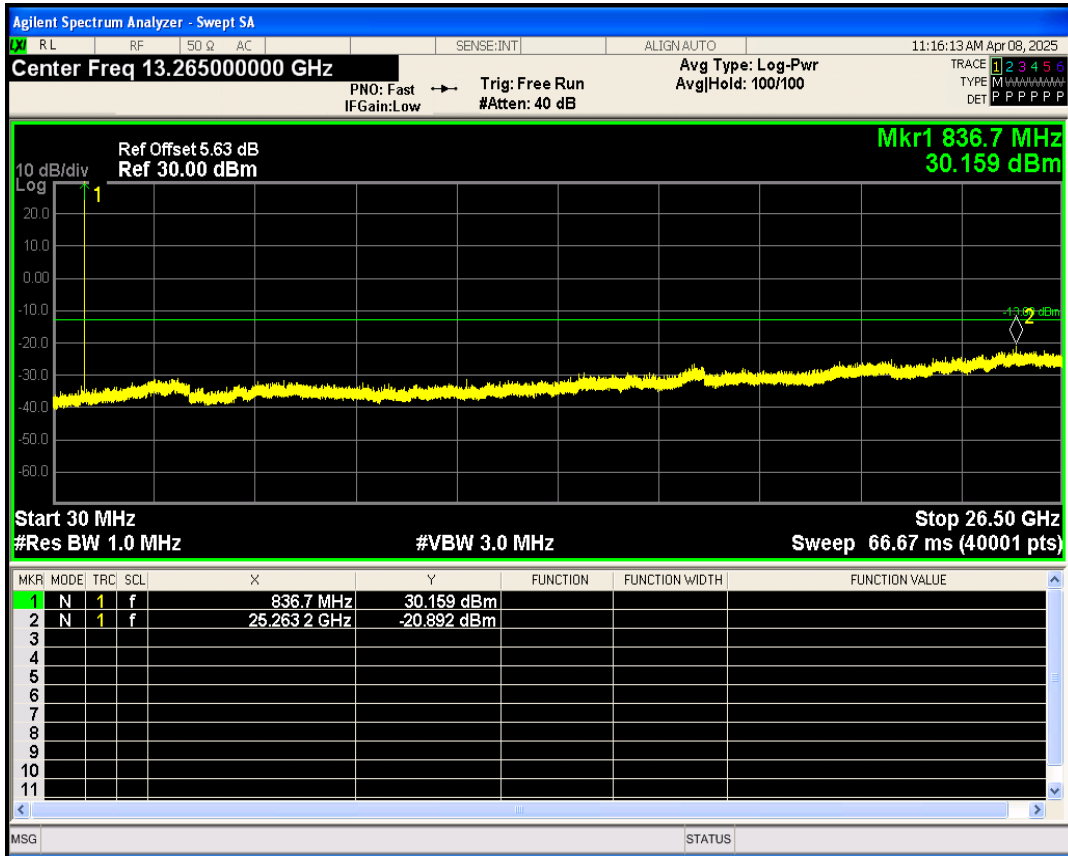


EGPRS850 Channel=251

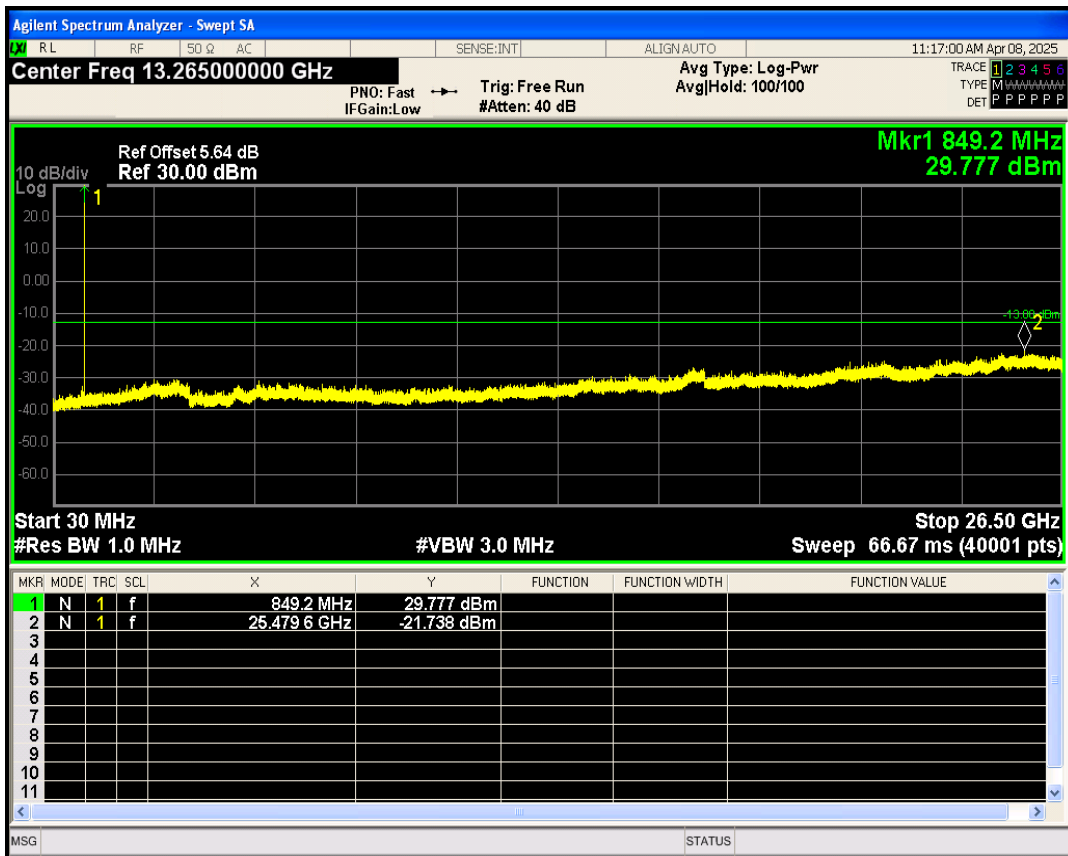


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.70	13	PASS
GPRS1900	661	1880	2.70	13	PASS
GPRS1900	810	1909.8	2.72	13	PASS
GPRS850	128	824.2	2.71	13	PASS
GPRS850	189	836.4	2.69	13	PASS
GPRS850	251	848.8	2.69	13	PASS


GPRS1900 Channel=512

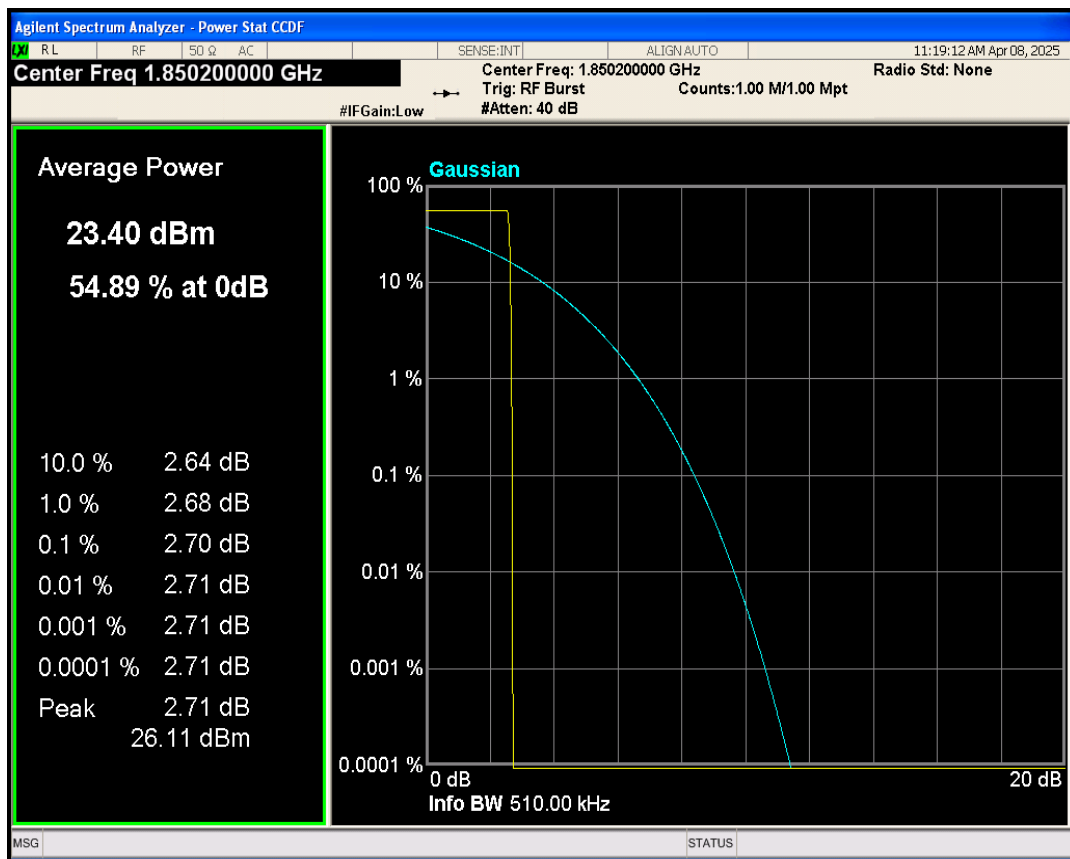


GPRS1900 Channel=661

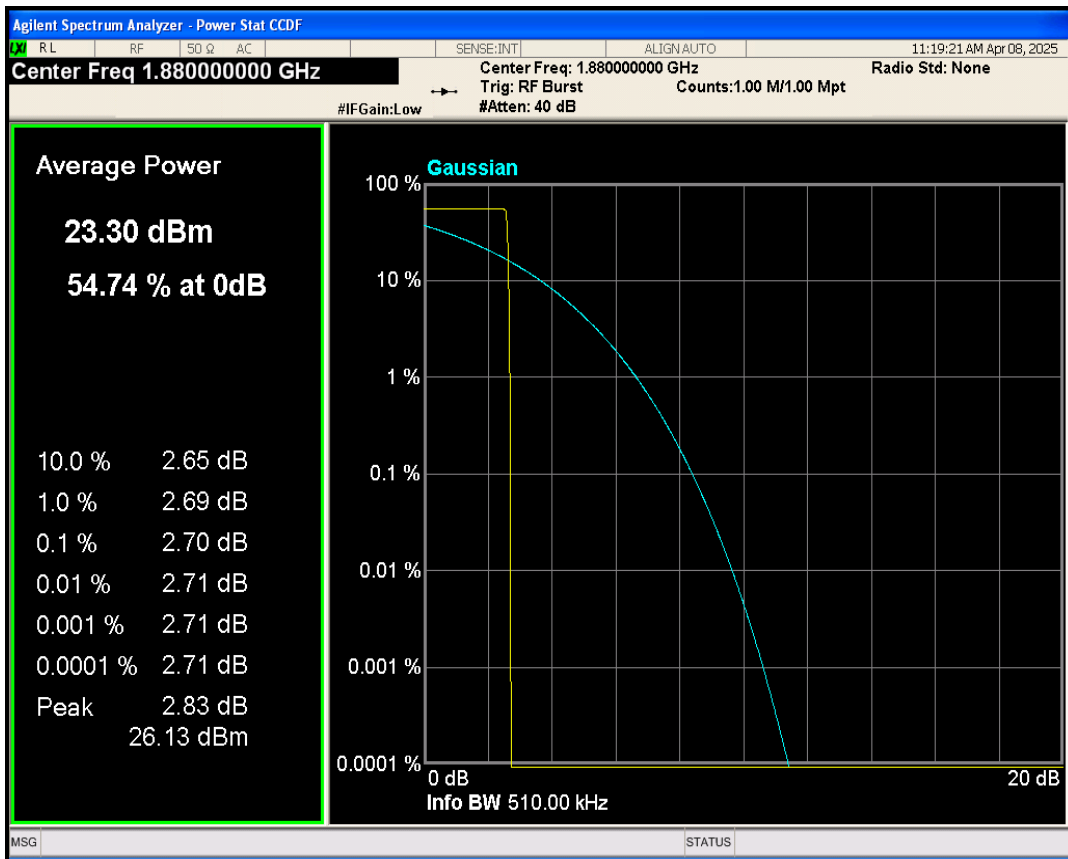


GPRS1900 Channel=810

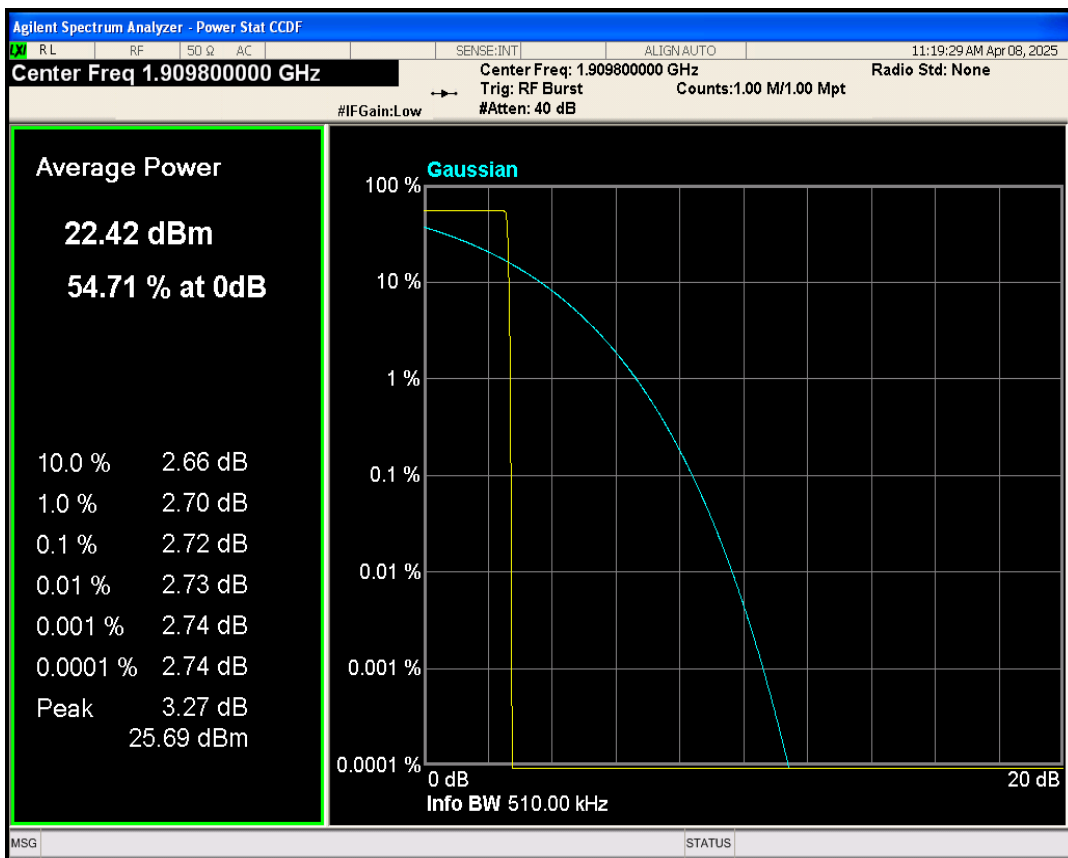


GPRS850 Channel=128

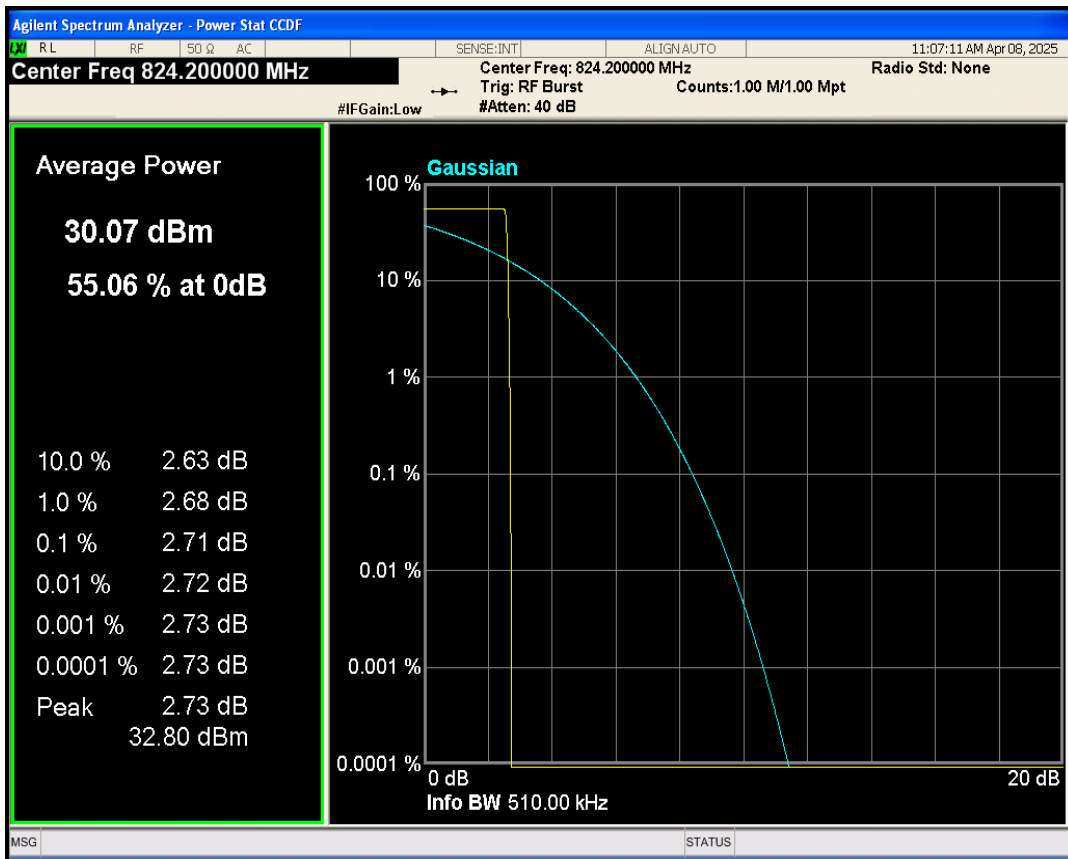

GPRS850 Channel=189

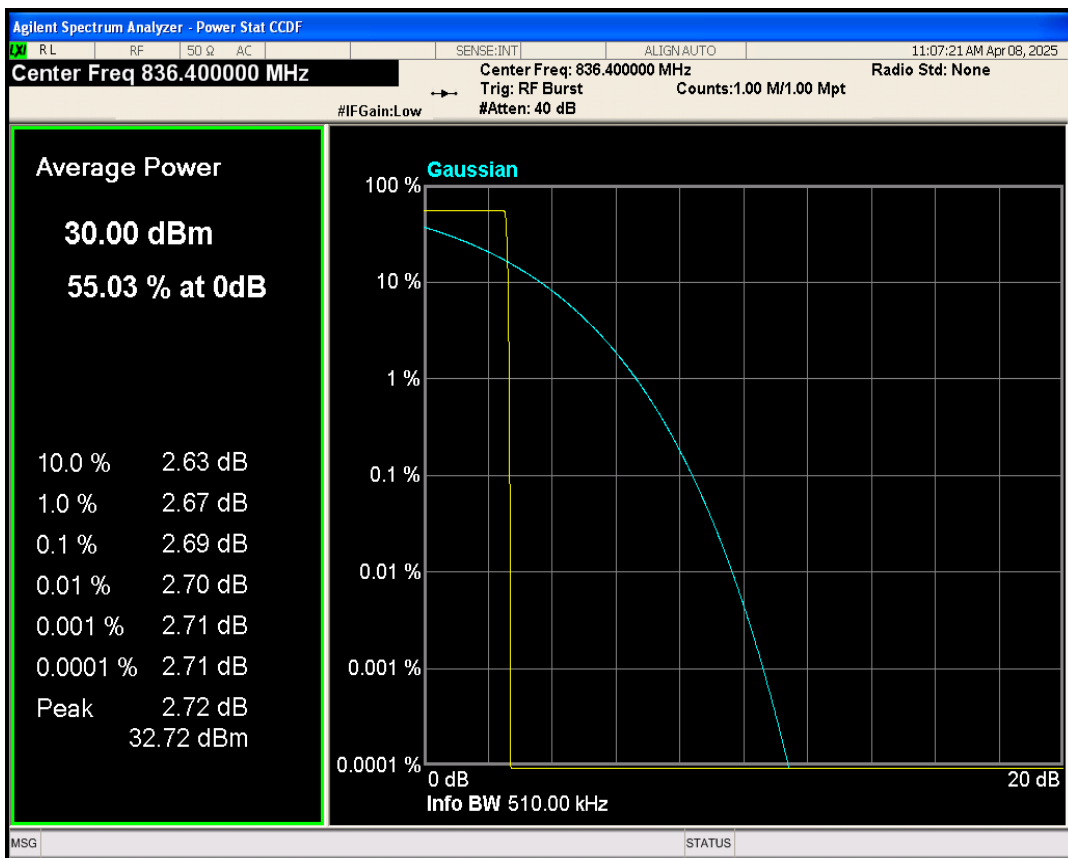


GPRS850 Channel=251

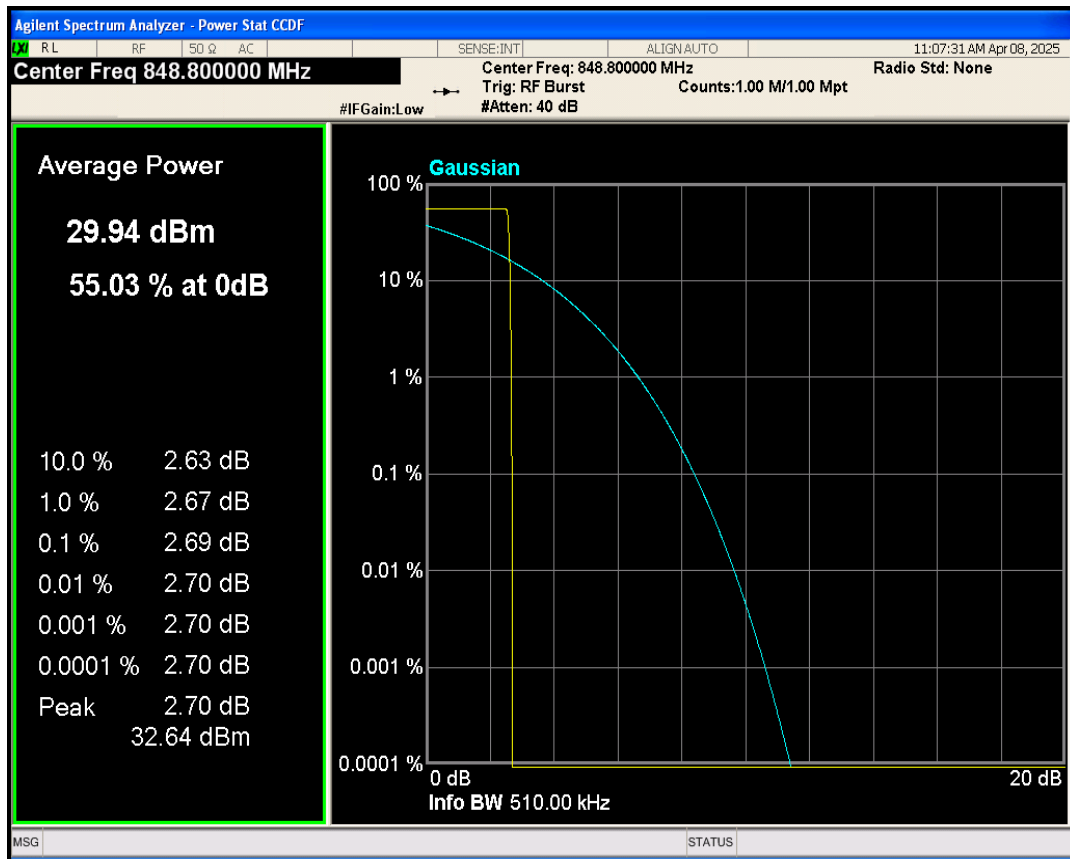


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	244.216	316.414	PASS
GPRS1900	661	1880	238.156	309.995	PASS
GPRS1900	810	1909.8	245.744	313.168	PASS
GPRS850	128	824.2	248.105	313.452	PASS
GPRS850	189	836.4	242.950	308.718	PASS
GPRS850	251	848.8	247.223	312.657	PASS


GPRS1900 Channel=512

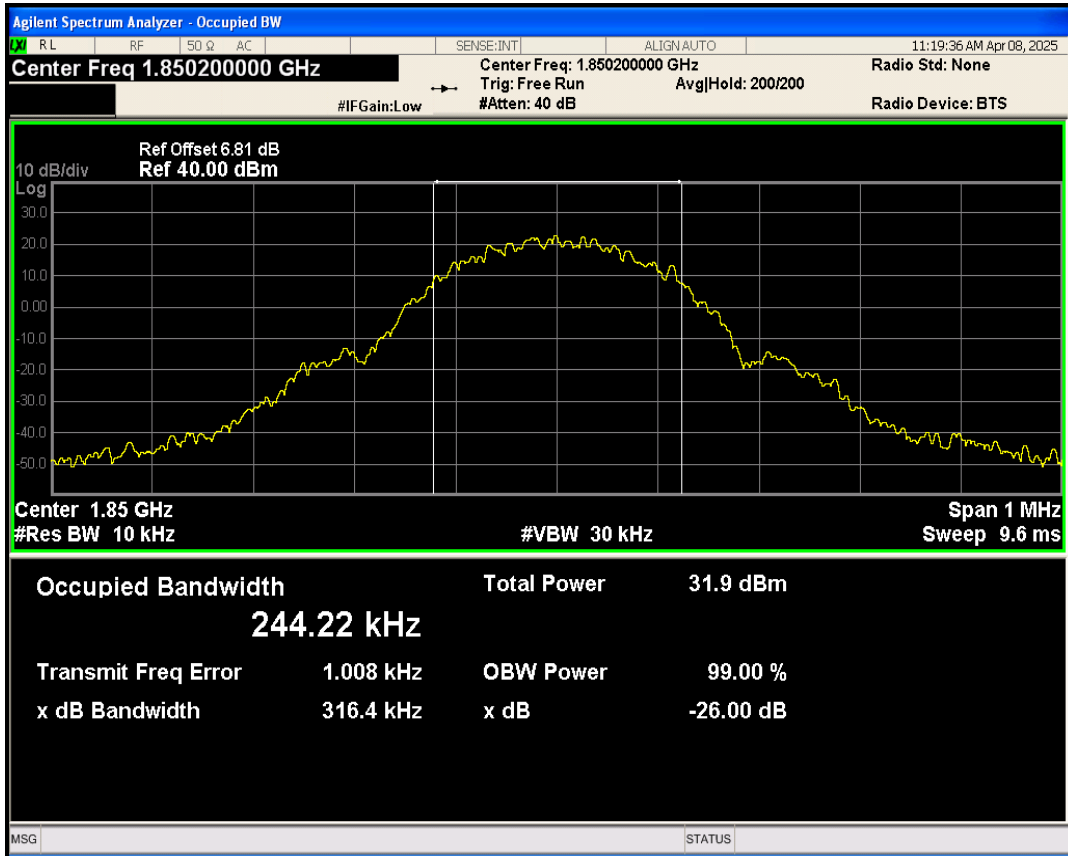


GPRS1900 Channel=661

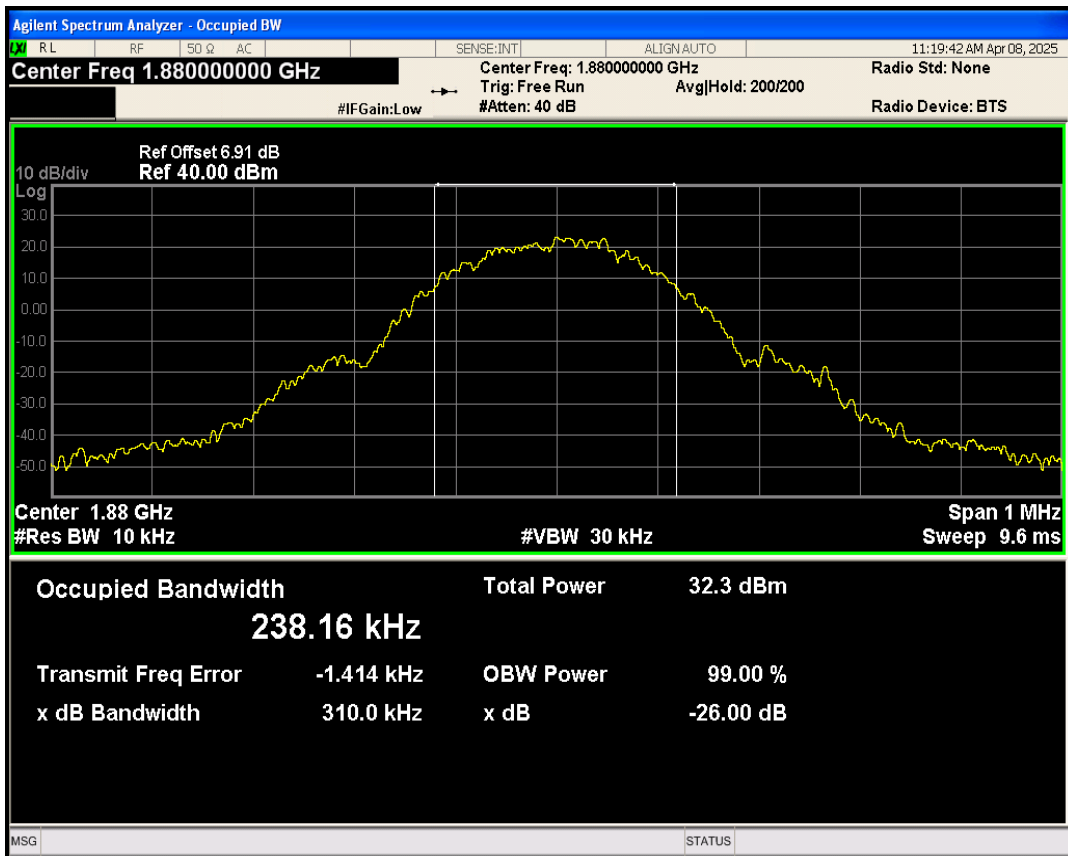


GPRS1900 Channel=810

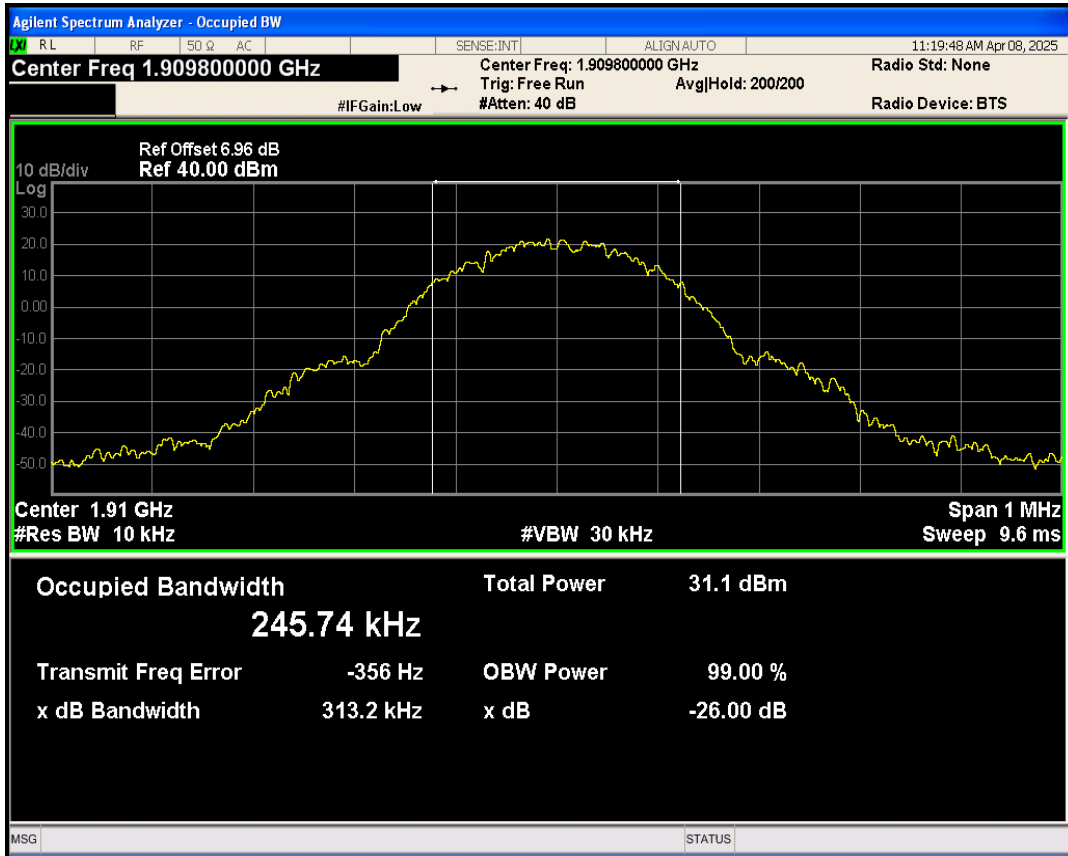


GPRS850 Channel=128

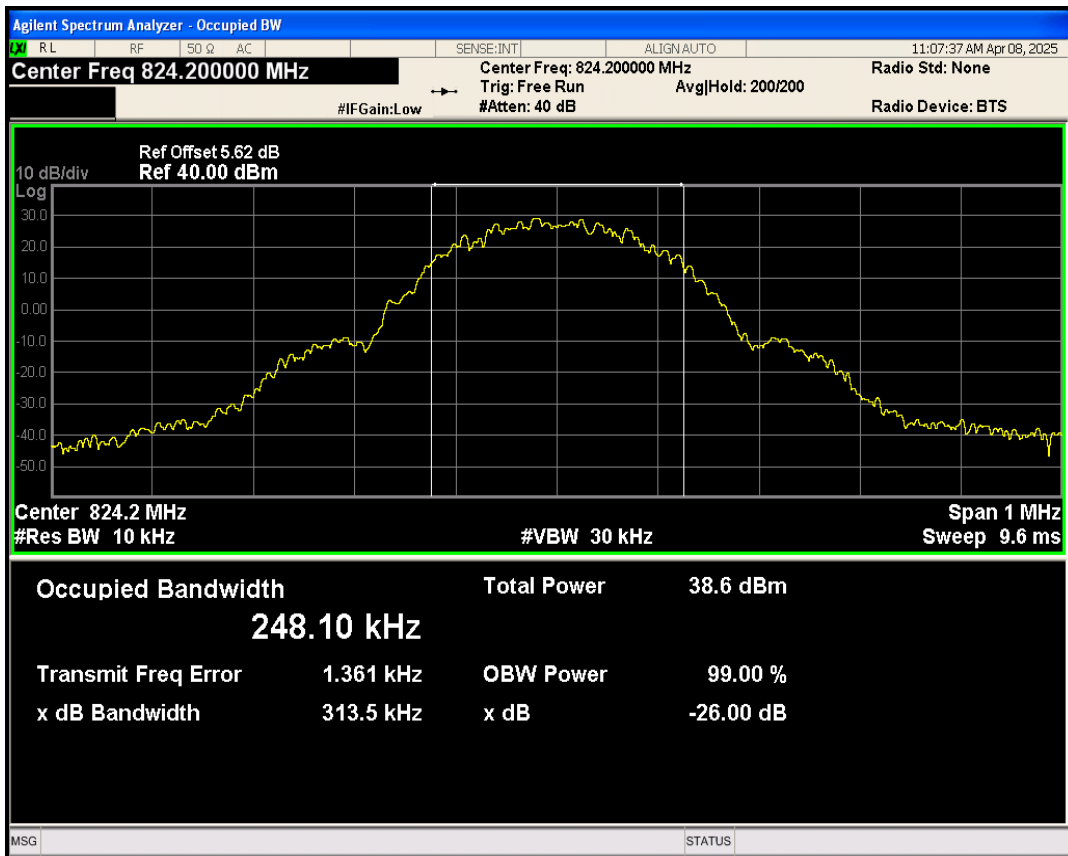

GPRS850 Channel=189

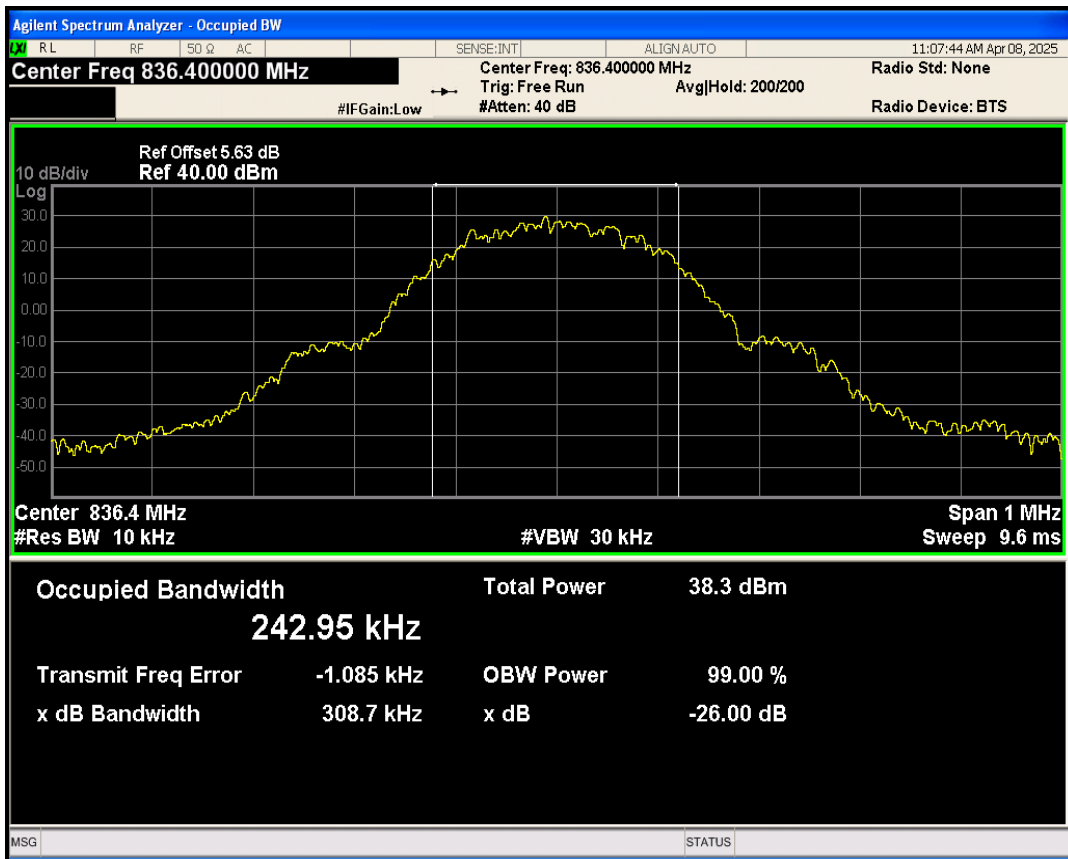


GPRS850 Channel=251

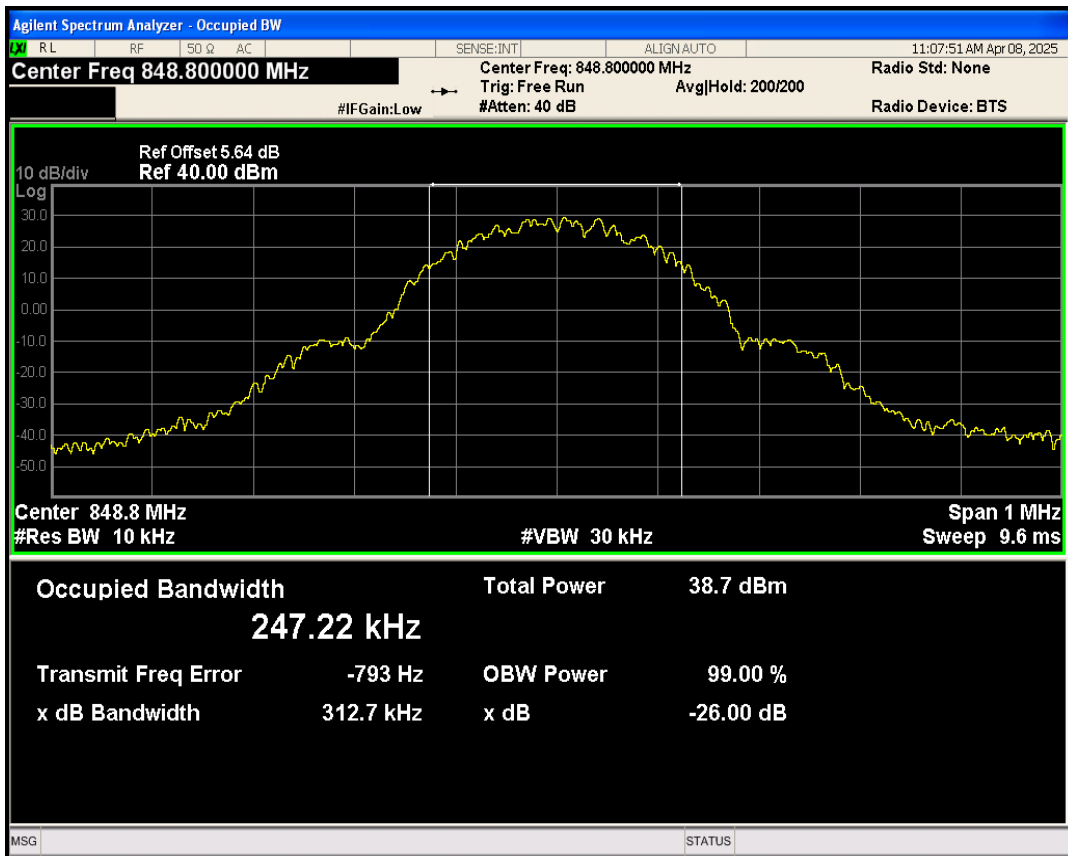


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.98	-34.41	-13	PASS
GPRS1900	810	1909.8	1910.01	-34.81	-13	PASS
GPRS850	128	824.2	823.98	-27.35	-13	PASS
GPRS850	251	848.8	849.02	-28.00	-13	PASS


GPRS1900 Channel=512

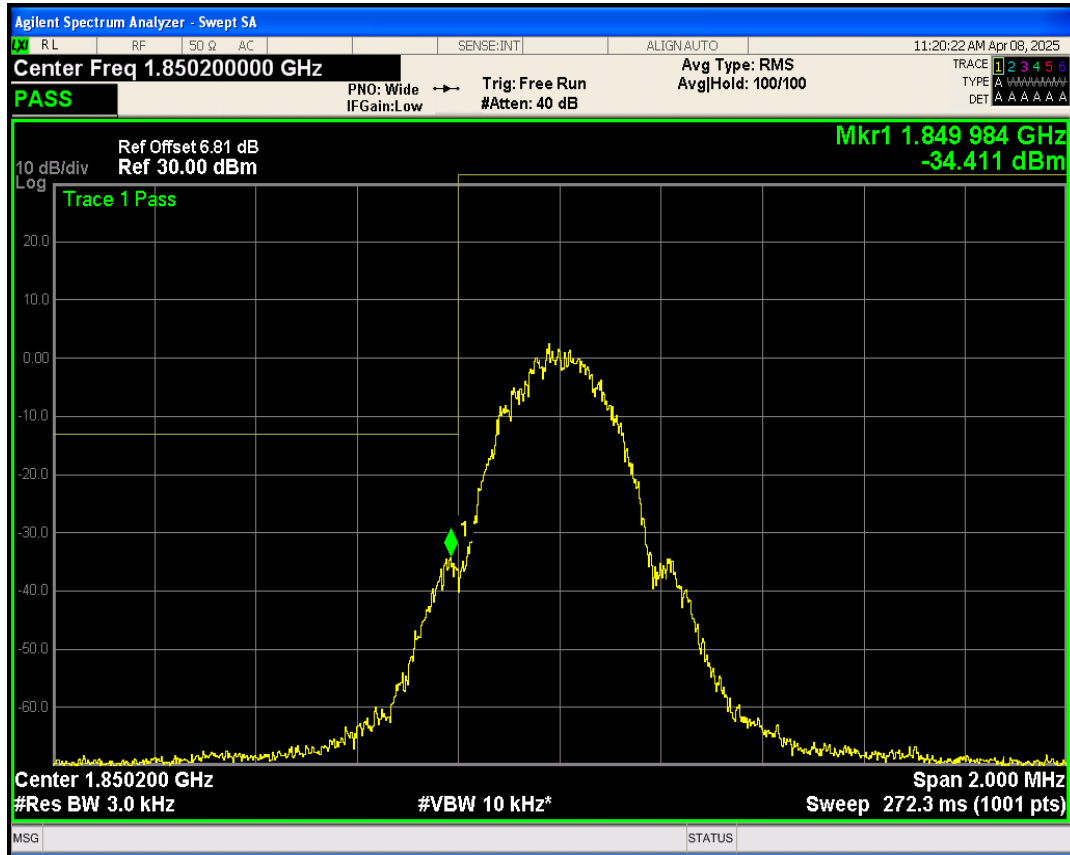


GPRS1900 Channel=810

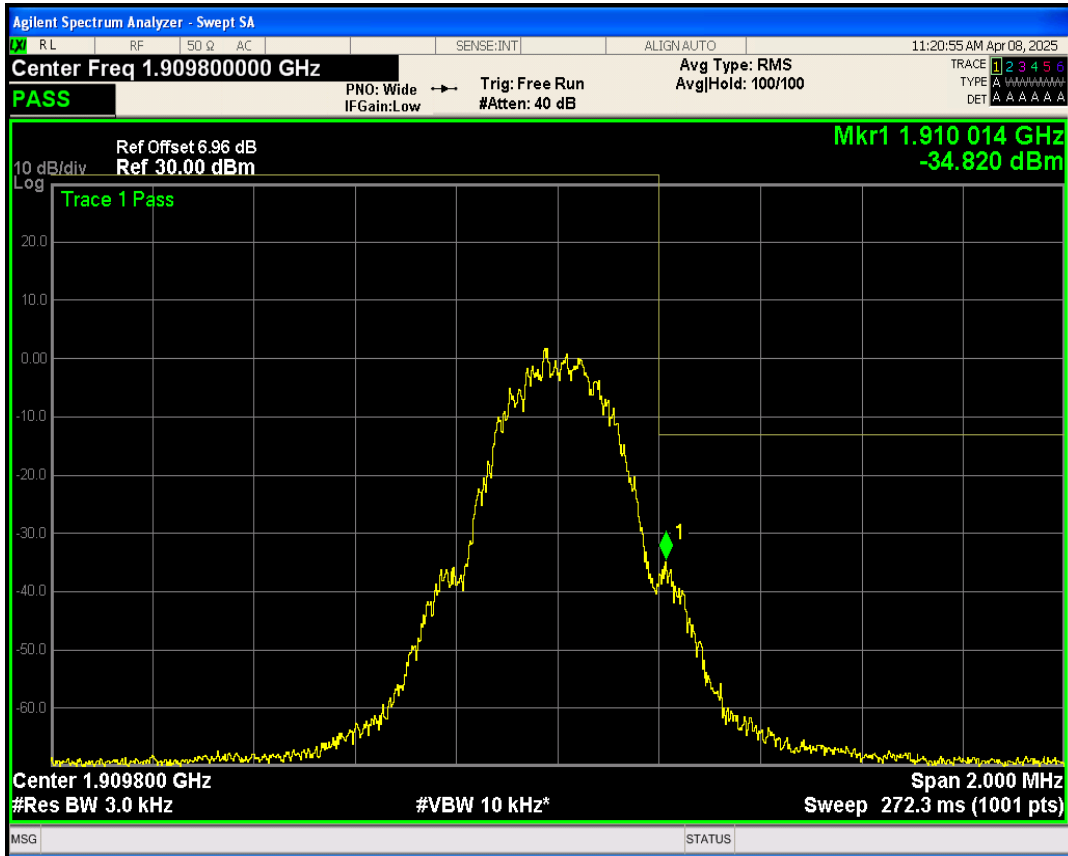

GPRS850 Channel=128

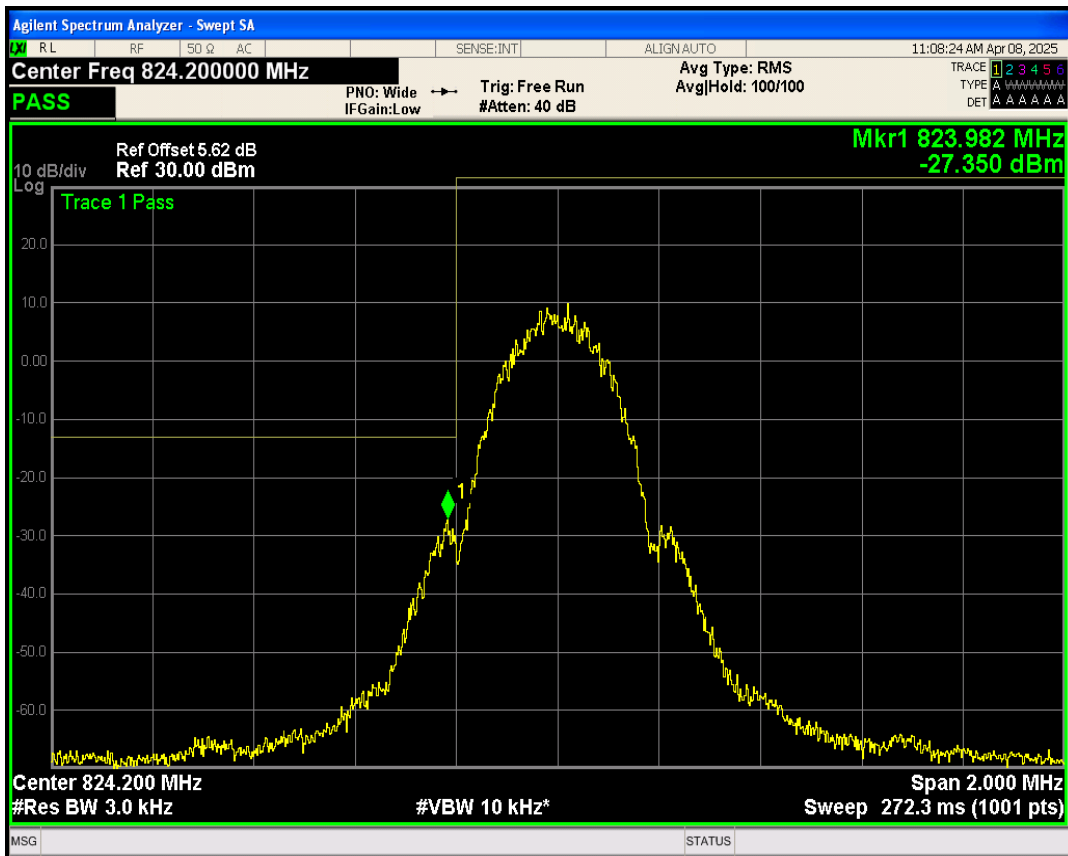


GPRS850 Channel=251

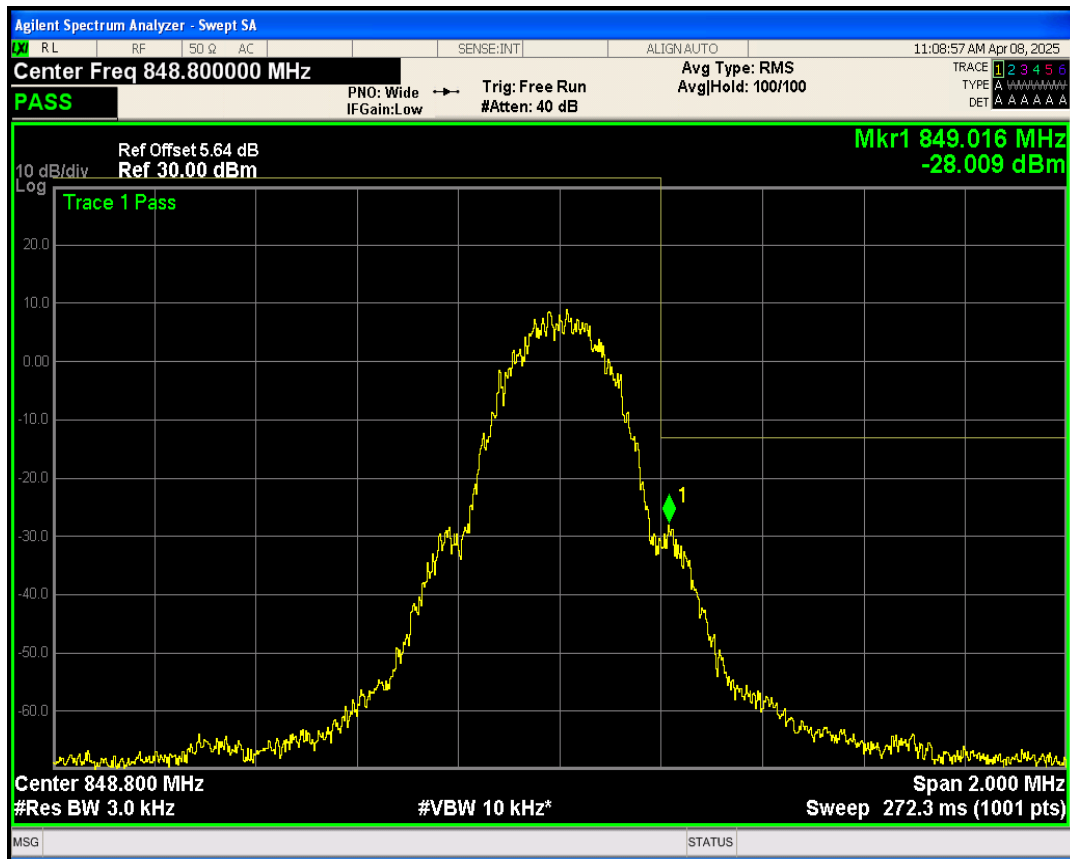


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25437.23	-21.02	-13	PASS
GPRS1900	661	1880	25402.16	-20.44	-13	PASS
GPRS1900	810	1909.8	25204.29	-20.48	-13	PASS
GPRS850	128	824.2	25602.67	-21.31	-13	PASS
GPRS850	189	836.4	25271.13	-21.33	-13	PASS
GPRS850	251	848.8	25633.77	-21.96	-13	PASS


GPRS1900 Channel=512

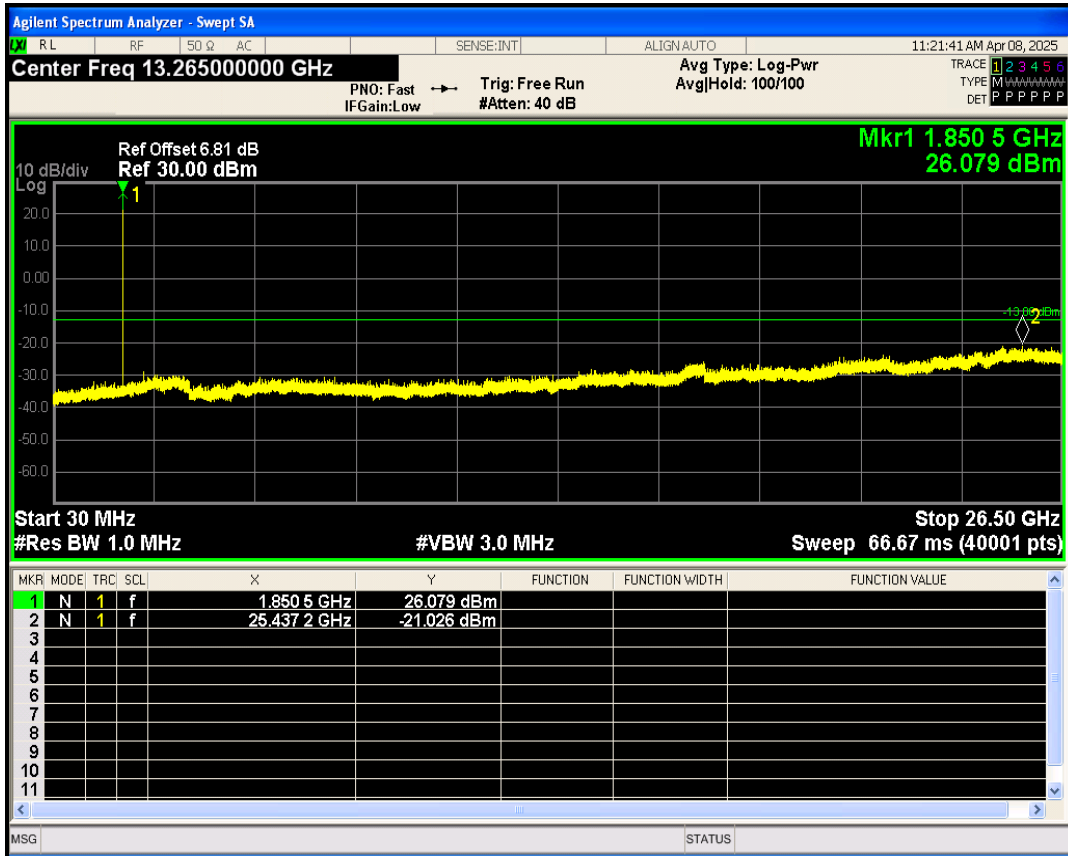


GPRS1900 Channel=661

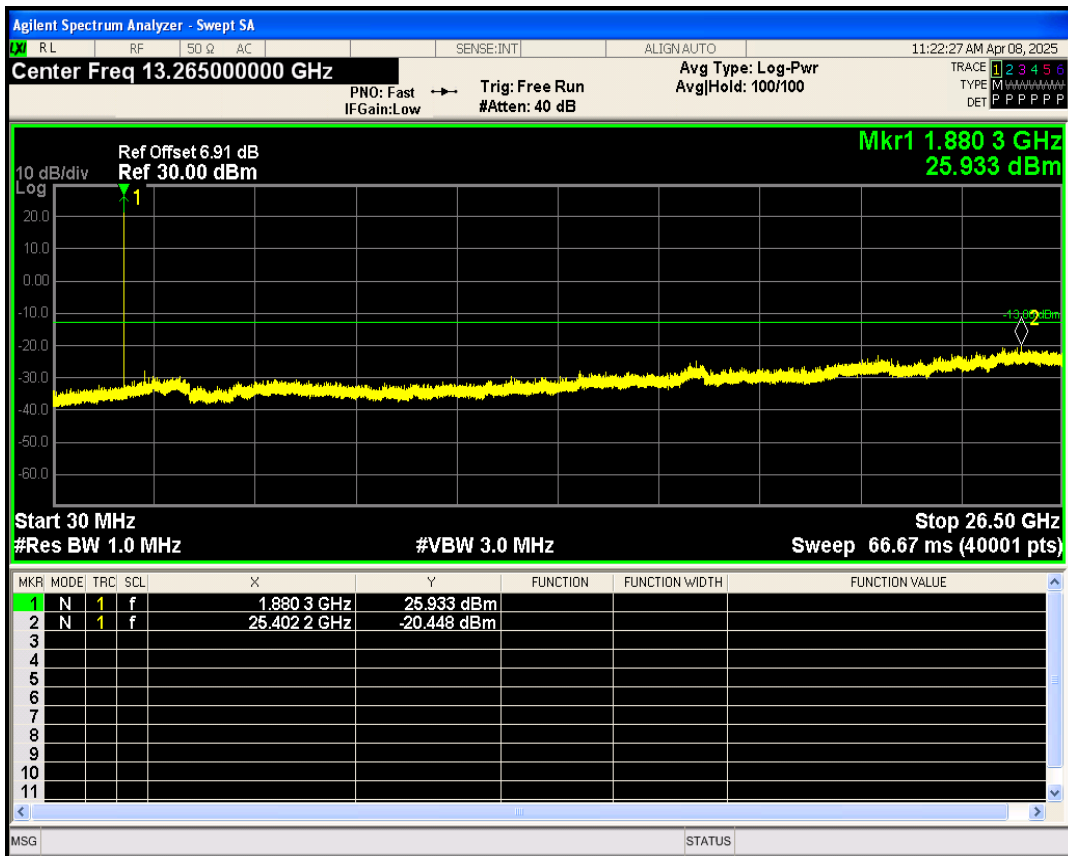


GPRS1900 Channel=810

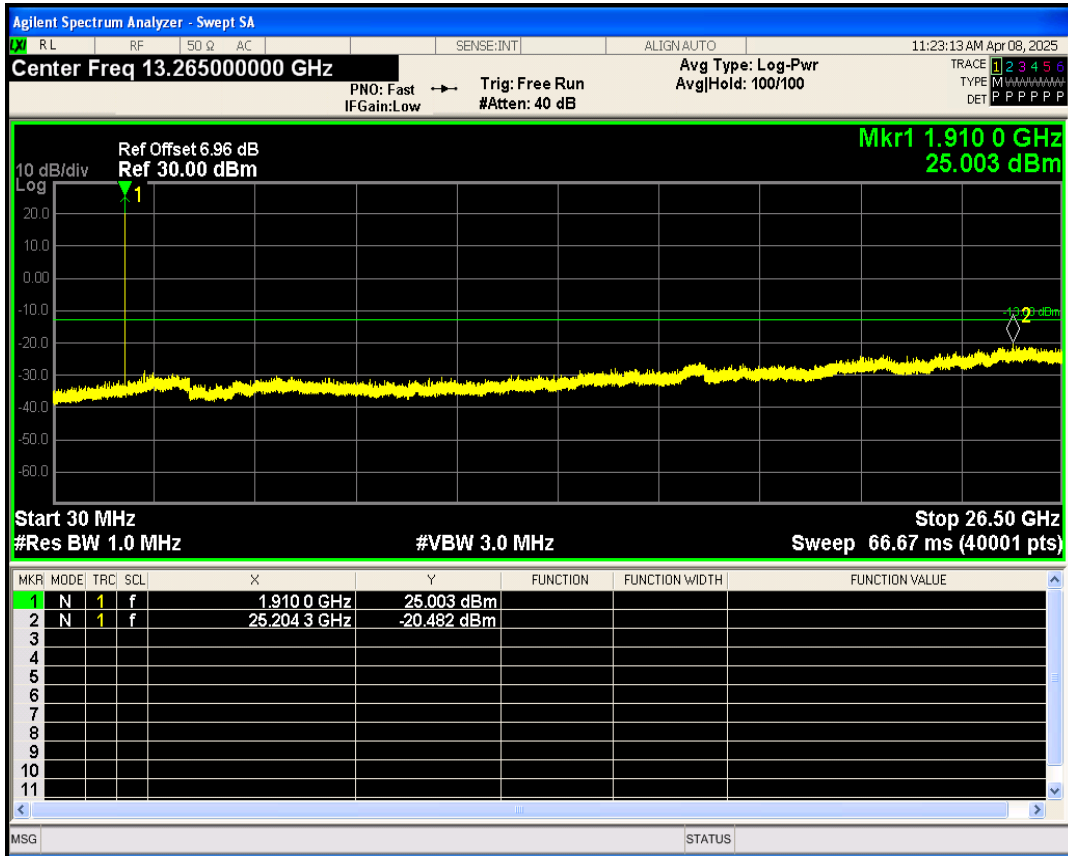

GPRS850 Channel=128

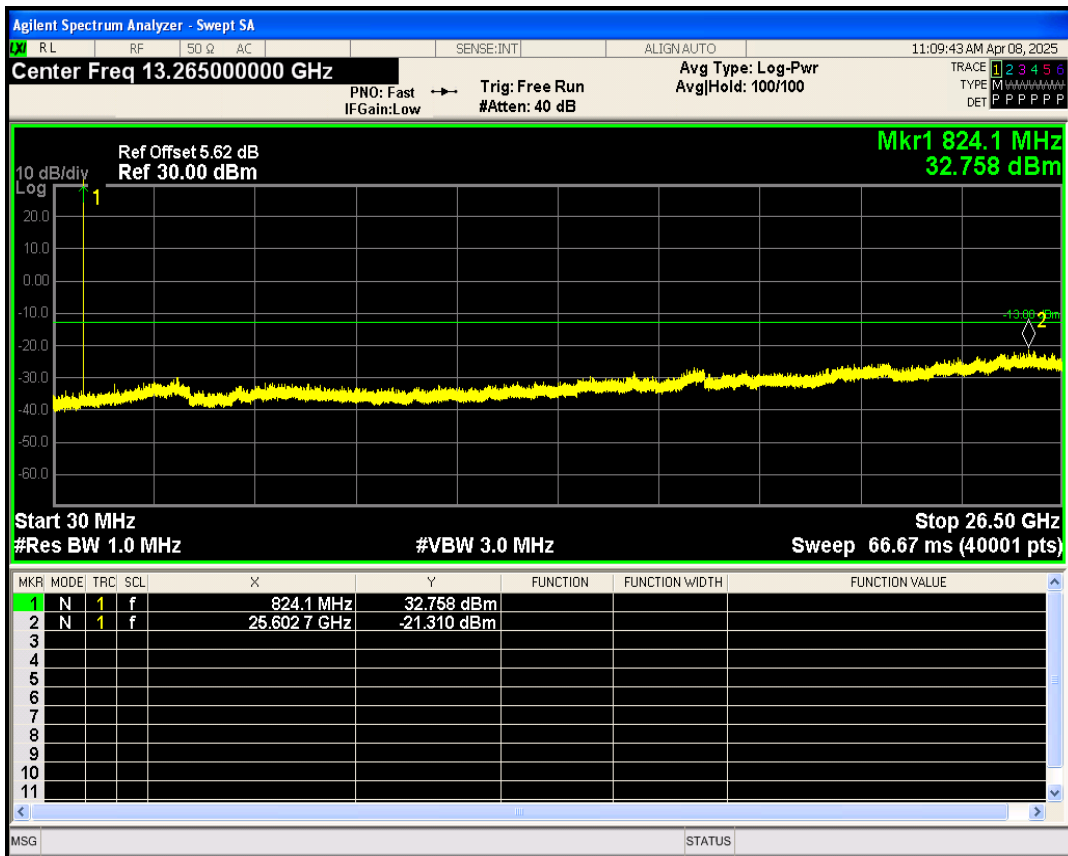

GPRS850 Channel=189

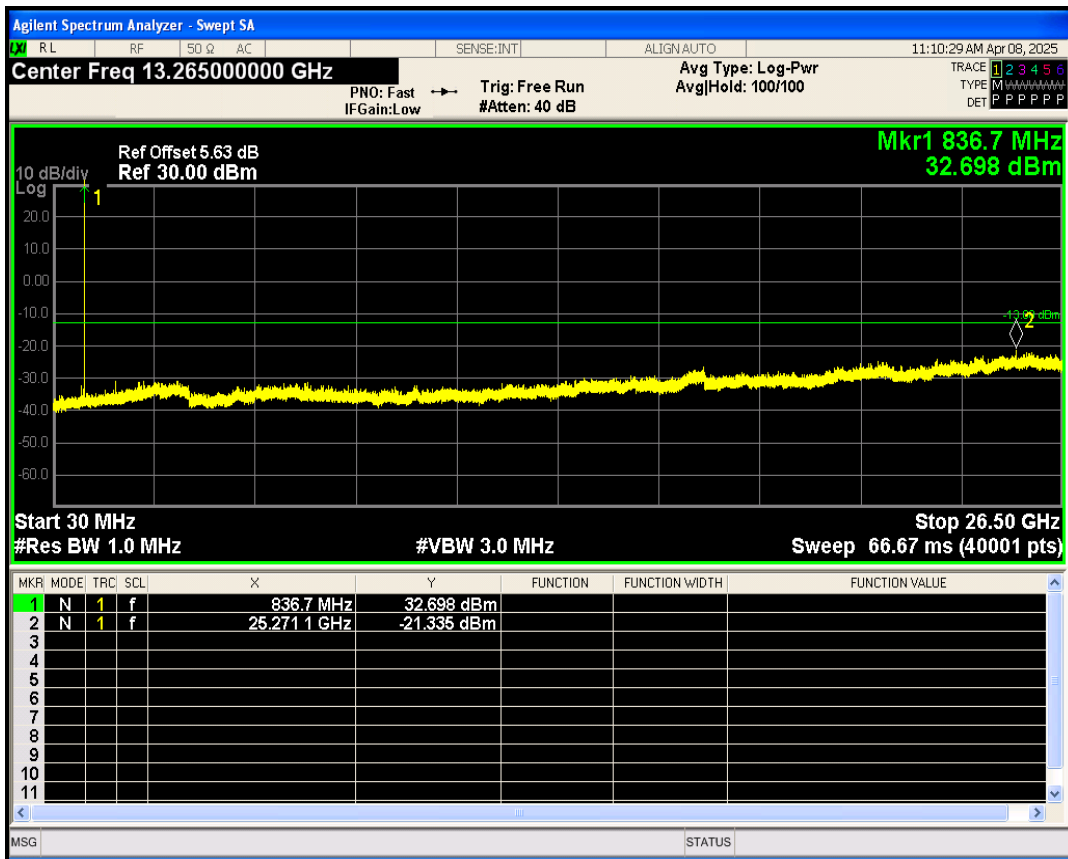

GPRS850 Channel=251

