






**Questions, problems, missing parts?**

Before returning to your retailer, call our customer service at 1-800-887-6326  
 Monday – Friday 9:00 a.m. – 5:00 p.m. CST

**PACKAGE CONTENTS**

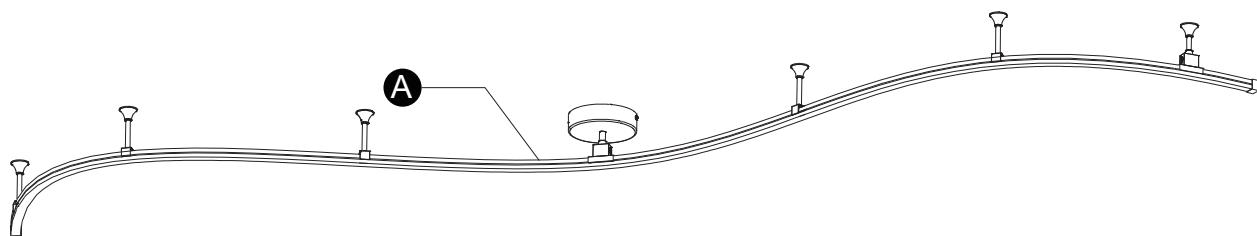

**HARDWARE CONTENTS** Note: Hardware not shown actual size.

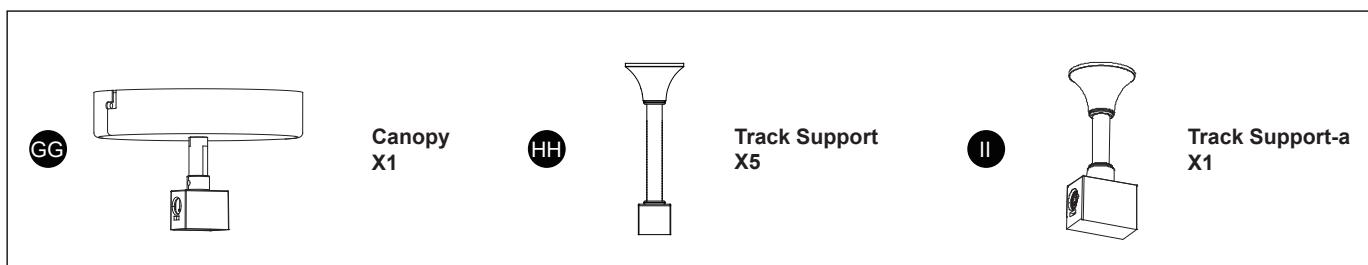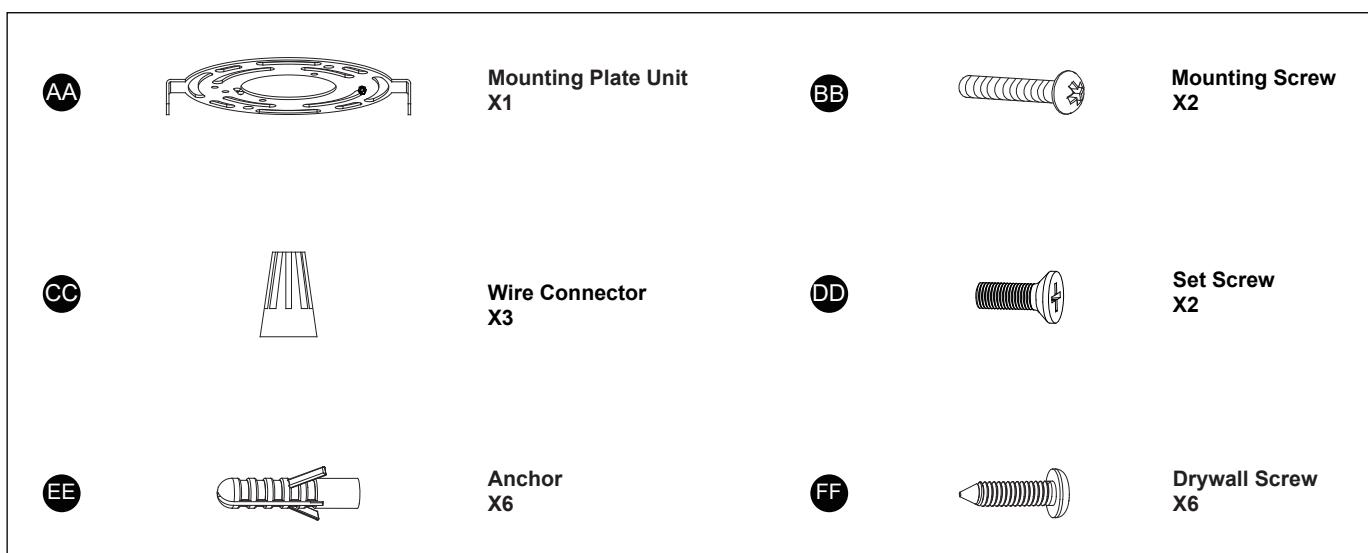

## **⚠ SAFETY INFORMATION**

Please read and understand this entire manual before attempting to assemble, operate or install the product.

### **WARNING**

- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
- LED electronics can be damaged by electro static discharge (ESD) shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.

### **CAUTION**

- All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.
- Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
- Do not connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. If you are not sure your lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician for information with regards to proper grounding methods as required by the local electrical code in your area.

If you are unfamiliar with electrical installations, it is recommended you have a qualified electrician for your installations.

## **PREPARATION**


Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Tools Required for Assembly (not included): Slotted Screwdriver, Phillips Screwdriver, Pliers, Electrical Tape, Wire Cutters, Safety Glasses, Ladder.


## **ASSEMBLY INSTRUCTIONS**

Turn off the power at the fuse or circuit box.

1. Unscrew the two set screws (DD), remove the canopy (GG) from the mounting plate unit (AA).

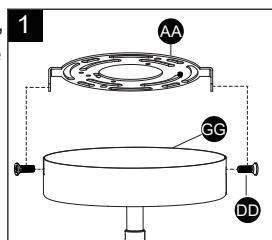


2. Attach mounting plate unit (AA) to the outlet box using two mounting screws (BB).

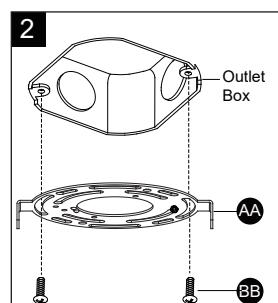

3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (CC) as follows:



- Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
- Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
- Attach the fixture ground wire (bare wire) to the mounting plate unit (AA) with the green ground screw, then depending on local code, connect it to the house ground wire with the wire connector (CC).

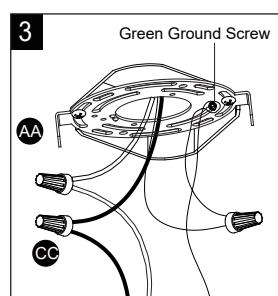

Carefully put all of the wires back into the outlet box.

## ASSEMBLY INSTRUCTIONS FOR TRACK SUPPORT

4. This fixture has two power connector can get power. Before intall the canopy (GG), please chose the power connector you preferred and design the positions of the track support-a (II) and track supports (HH).

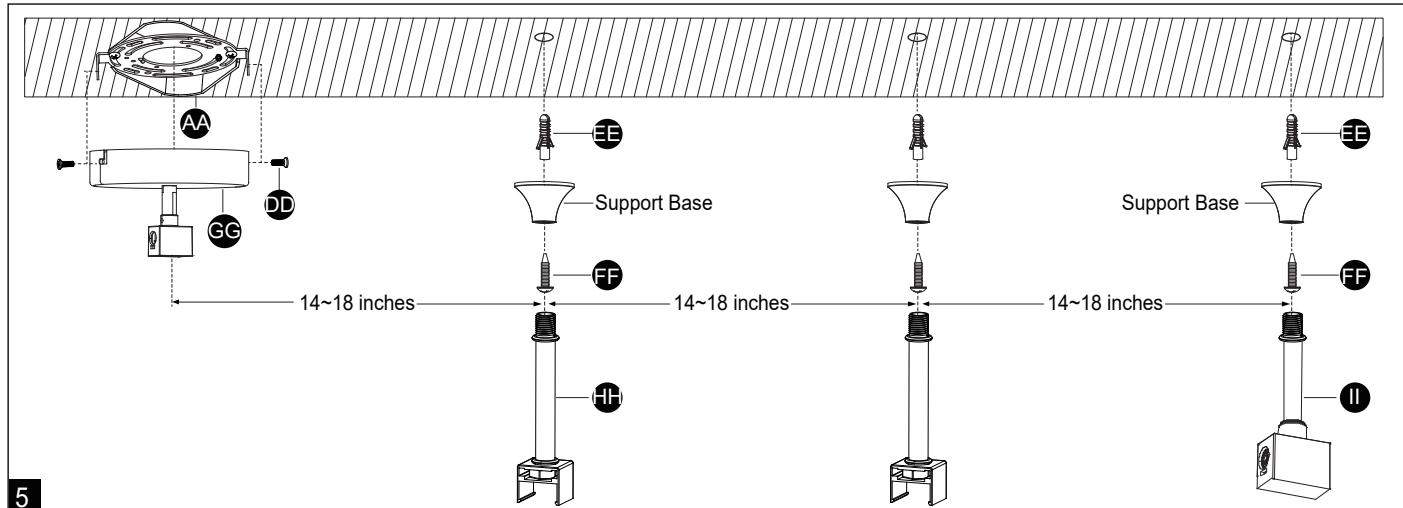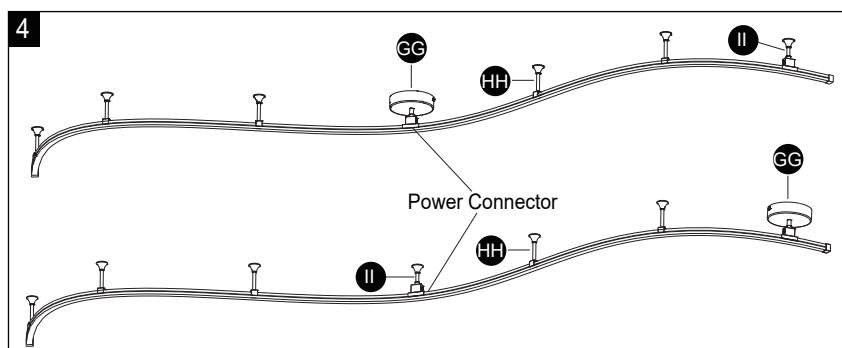

5. a. Attach the canopy (GG) to the mounting plate unit (AA) by using two set screws (DD).


**Note: Ensure that power connector-a and power connector are in the same direction.**

b. Mark six desired positions and drill them on the ceiling for the track supports on the side of the canopy (GG).

**Note: The distance between each track support and the canopy is 14 ~ 18 inches. So the track could be bent to a wonderful arc.**

c. Attach two anchors (EE) to the drilled positions.

Unscrew the support bases from the track supports (B), then attach support bases onto the ceiling by threading drywall screws (FF) into the pre-tightened anchors (EE). Screw the track supports (HH) track support-a (II) to the support bases.

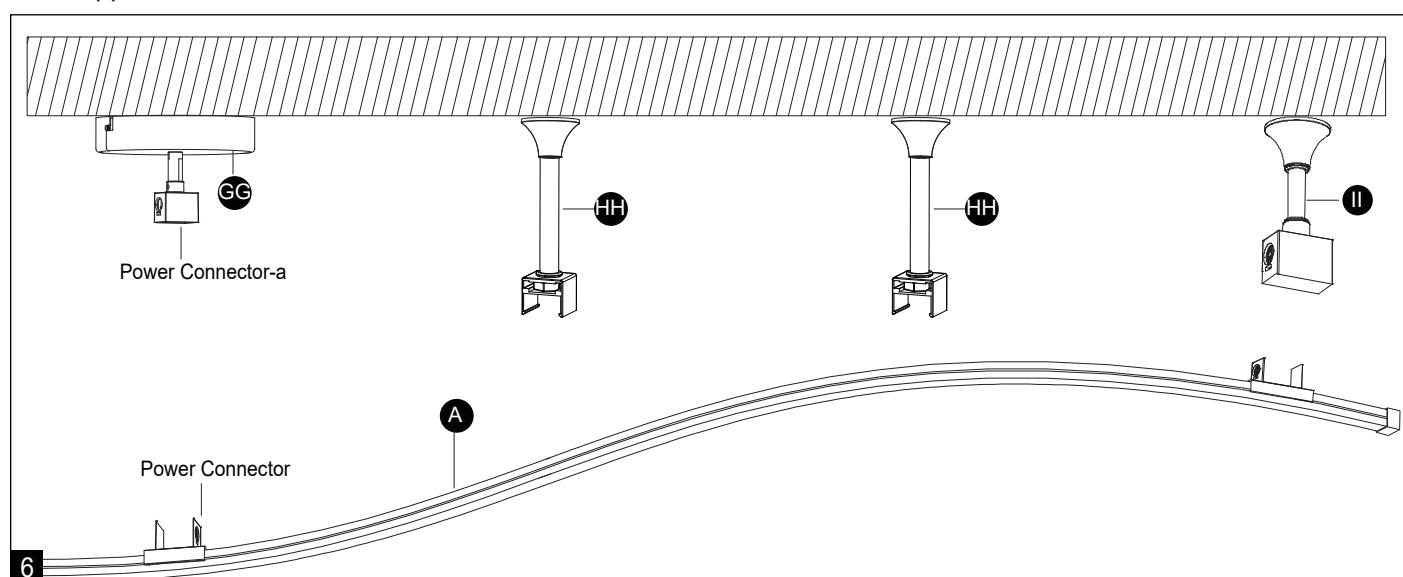

6. Insert the track (A) to the clamps of the track support-a (II), track supports (HH) and canopy (GG).

Turn on the power at the fuse or circuit box.

The White Light of this fixture will turn on when the power is turned on, if you need to enter the RGB / Dynamic / Music Mode, please download and install "Smart Life" or "Tuya Smart" by your phone to operate.

# REGISTRATION / LOGIN / PASSWORD RETRIEVAL


Setting for single light through mobile device (Take iOS for example as below. Android will be slightly different).

## Before you start

1. Download the Smart Life APP  from the Apple App Store or Android Google play store.

### Registration


If you do not have the app account, you may choose to register. The registration process is described on this page and the next. Click "Agree" to proceed to the registration page.

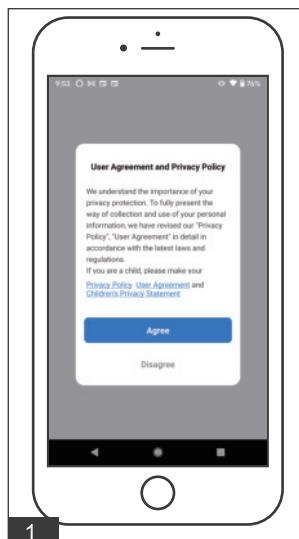

2. Click "Sign up" to enter the next page shown in Fig.3.



3. The system will identify automatically the country/region you are in, or you may choose to select manually a country/region. Enter your email and click "Get Verification Code", and enter the verification code you received. Then enter the password and click "Completed" to finish registration, as shown in Fig.3, Fig.3a, Fig.3b.

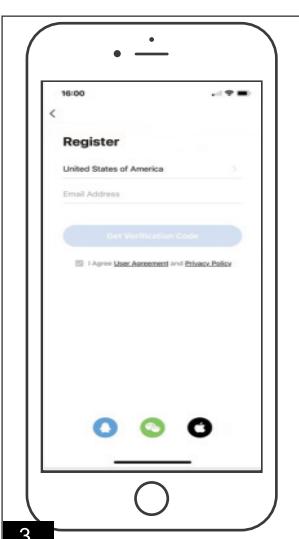



## Account ID + Password Login

If you already have an app account, click "Log in" to proceed to the login page.

- a. The system will identify automatically the country / region you are in, or you may also choose to select manually a country / region.
- b. Enter the email you have registered and enter the password in to log in.

## Smart Life Login.

1. Enter the email you have registered and enter the password into log in as shown in Fig.1, Fig.1a.

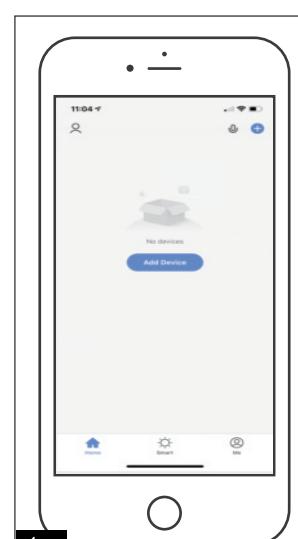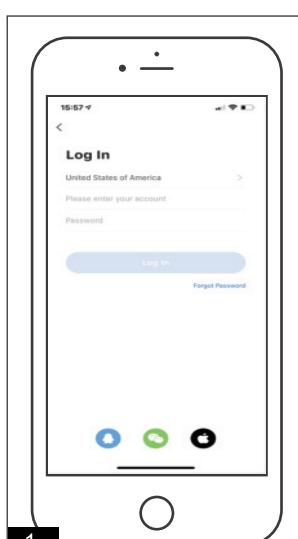


# USER GUIDE

The Smart Life app supports two configurations: Add Manually mode, Auto scan search device mode. Turn on Bluetooth and connect to 2.4GHz Wi-Fi before connecting lights with the APP.


## Auto Scan

Please make sure the lamplight on the smart device is flashing rapidly, if the lamplight is not flashing rapidly, you can use the wall switch by off-on-off-on-off-on to make it flash state.

1. Click "+" and "Add Device" at the top right corner of the App home page shown in Fig.1, and enter the next page shown in Fig.2.

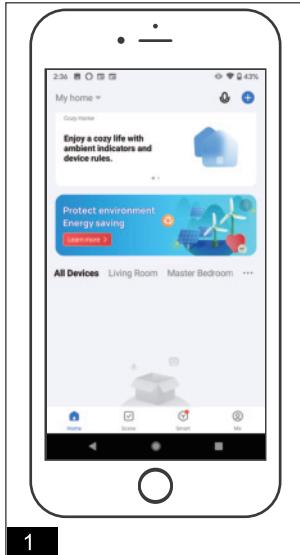


2. Click "Add" to enter the next page shown in Fig3.

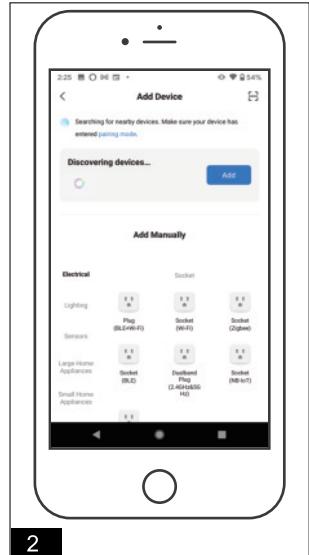


3. Enter the Wi-Fi account and password and click "Next" to enter the next page shown in Fig.4.

**Note: The Wi-Fi account and password in the APP must be the same as on the mobile phone.**

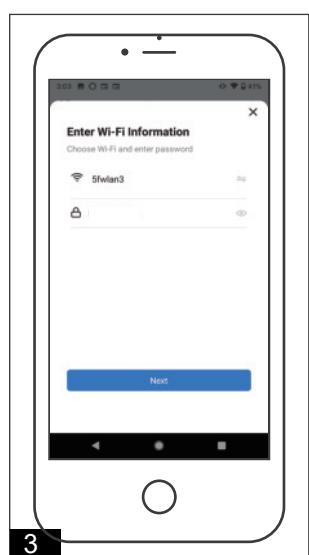


# USER GUIDE (continued)

5. Entry the page and Click "Done" to complete connecting as shown in Fig.5, Fig.5a, Fig.5b, Fig.5c.

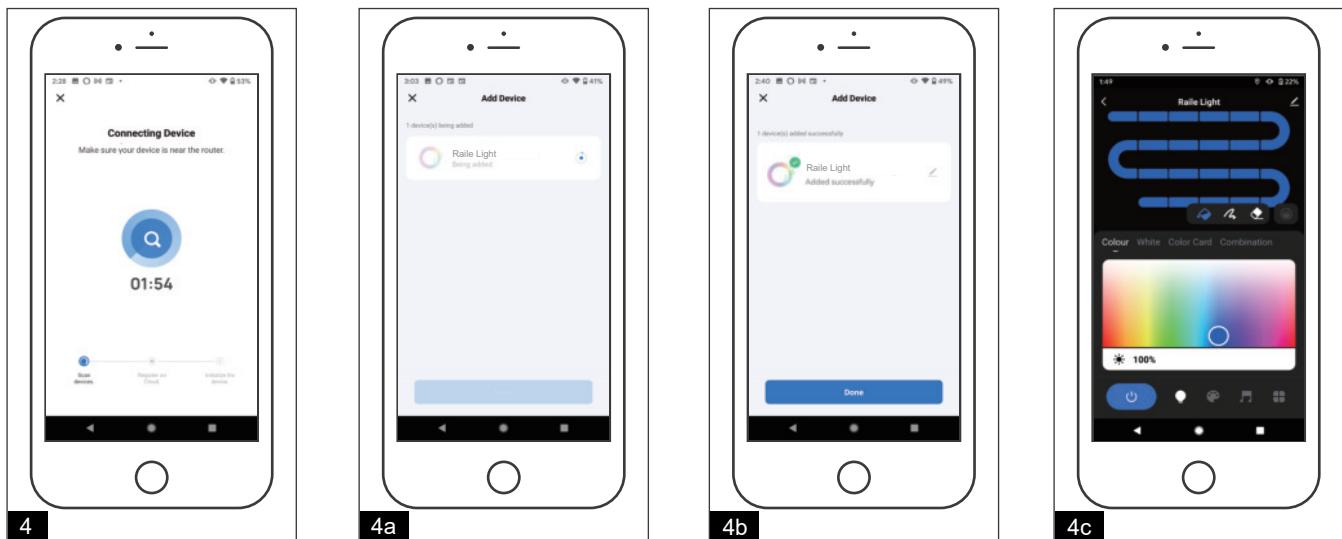

## Add Manually mode

1. Click "+" and "Add Device" at the top right corner of the App home page upper right corner and enter the next page shown in Fig.2.

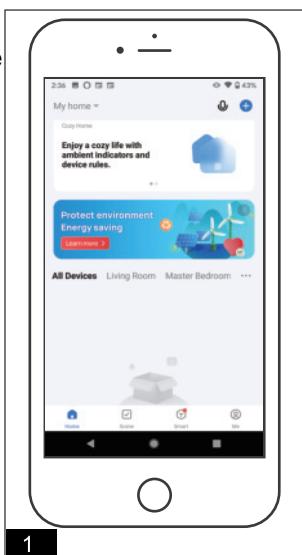


2. Click "Lighting" to enter the next page shown in Fig3.



3. Click "Light Source (BLE+Wi-Fi)" to enter the next page shown in Fig.4.




4. Click "Confirm the lamplight is blinking or breathing" to enter the next page shown in Fig.5.

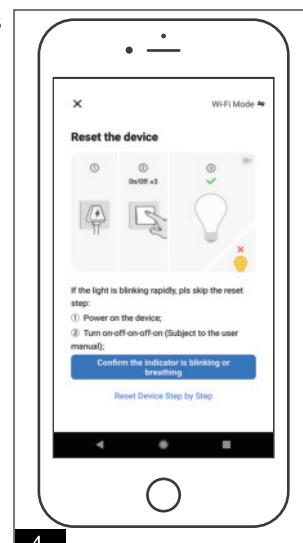

## USER GUIDE (continued)


5. Select the Wi-Fi in your home, enter the Wi-Fi password shown in Fig.5. Click "Next" to enter the next page shown in Fig.6.

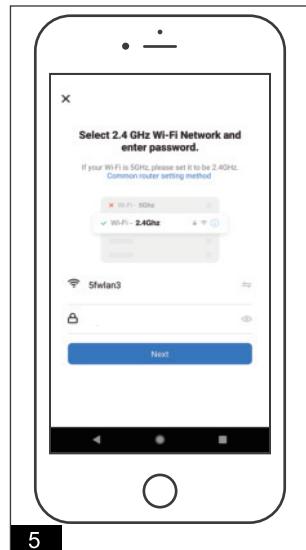


6. As shown in Fig.6.



7. As shown in Fig.7.

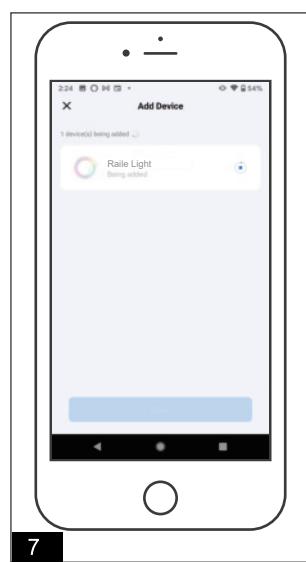

8. Click "Done" to complete the connecting as shown in Fig.8 and Fig.8a.

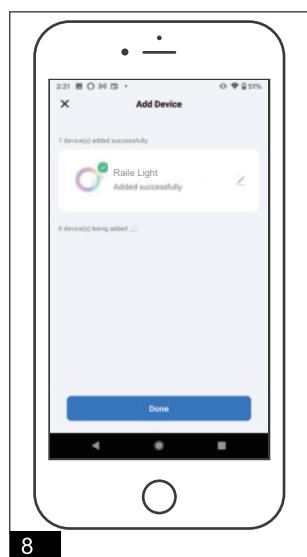

# USER GUIDE (continued)

## APP Function Introduction


### Static Mode

#### Control Device

After the device is successfully connected, the paired device will be displayed on the main interface. Click to enter the corresponding control interface.

#### Note:


1. When device is online, it supports quick operations.
2. When the device is offline, "offline" is displayed. At this time, the device cannot be operated. At this time, you can check whether the device has been successfully powered on.

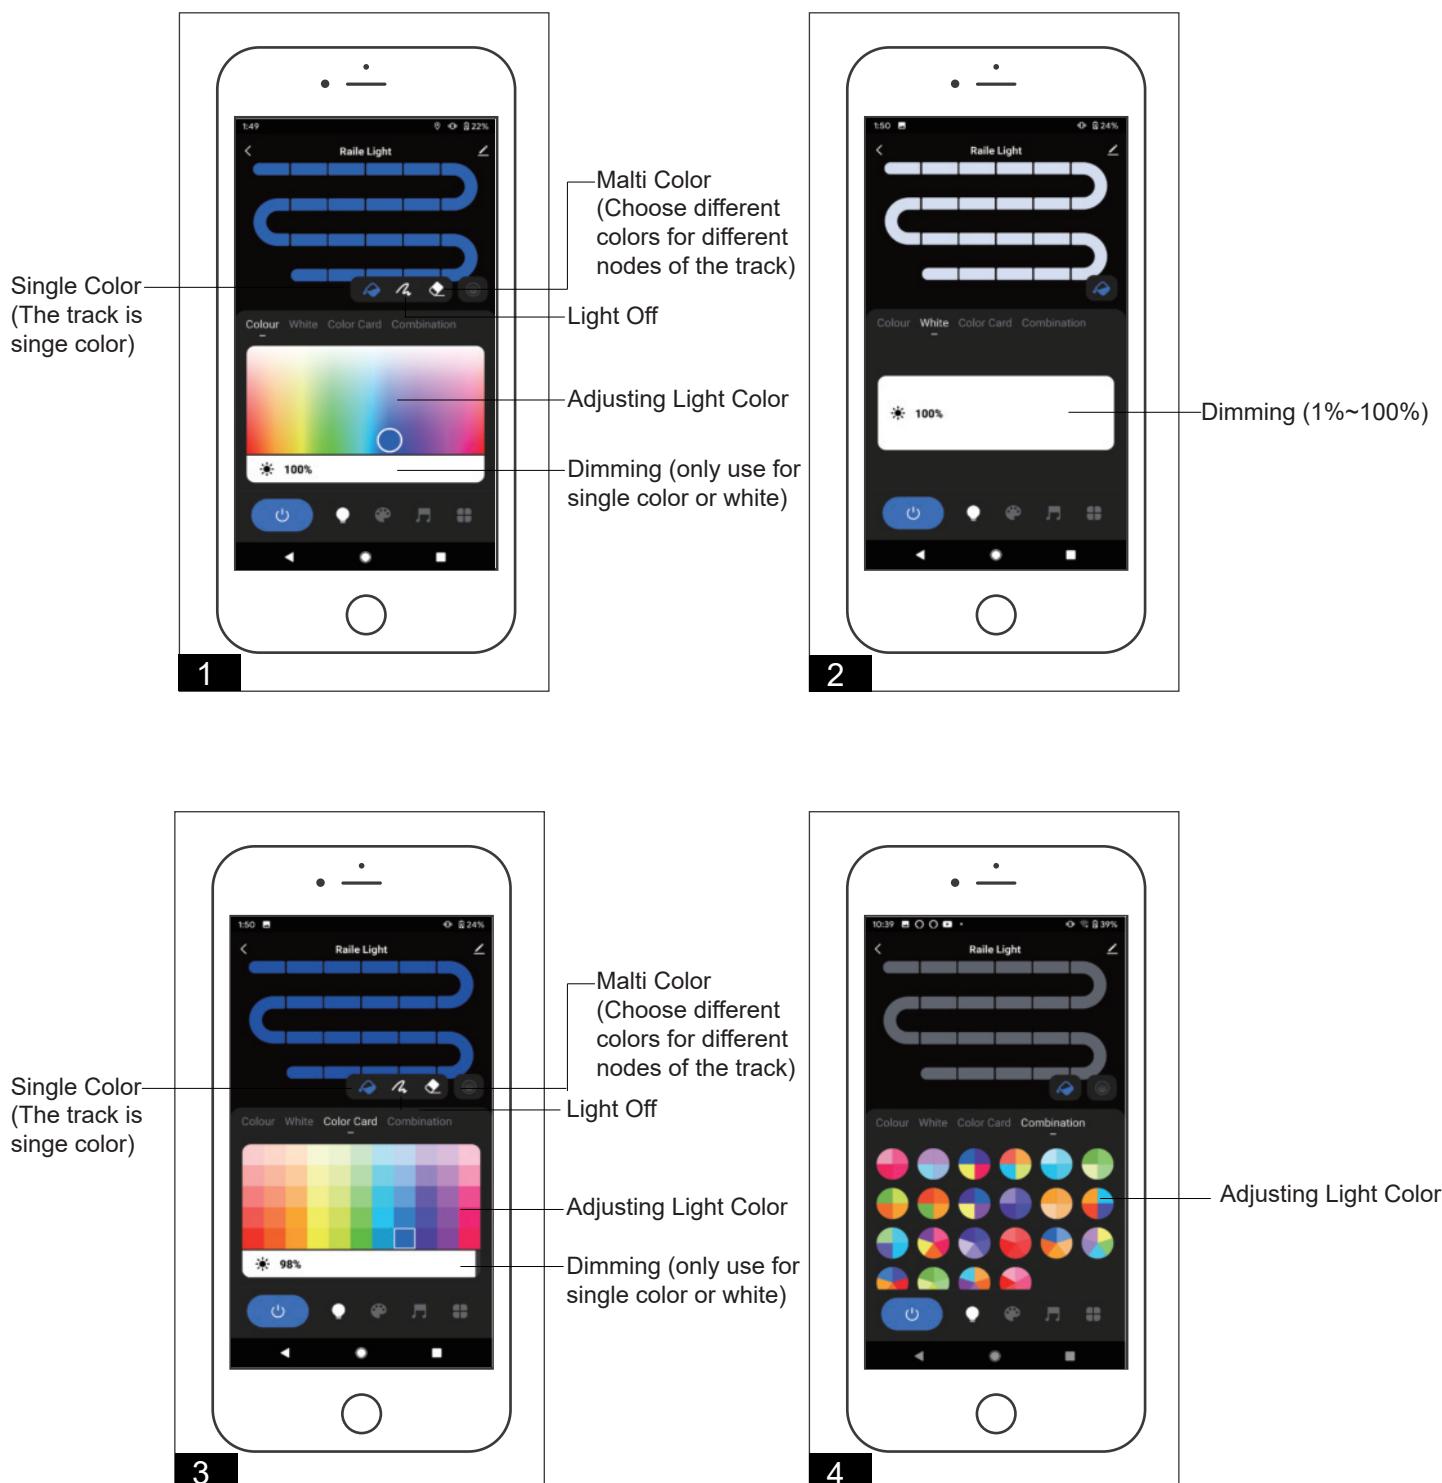


## LED Strip Light Dynamic Mode

You can select a favorite dynamic effect from the scene interface, or "DIY" your desired dynamic effect.


1. Click "Add+" in the top right corner to enter custom scene.

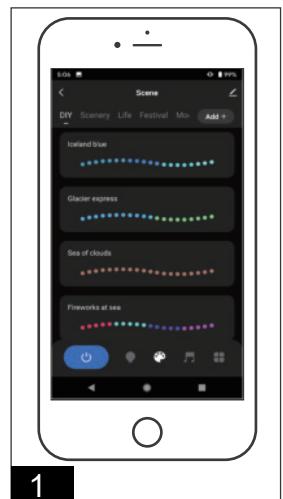

2. You can add / delete / modify the color displayed and change the speed of color switching and brightness.

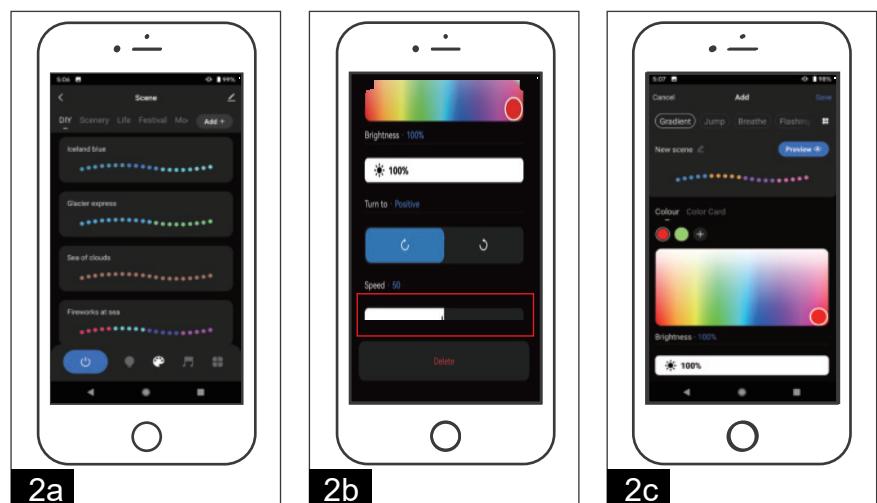

3. After you click "Save", you can see the saved dynamic effects in the scene interface.

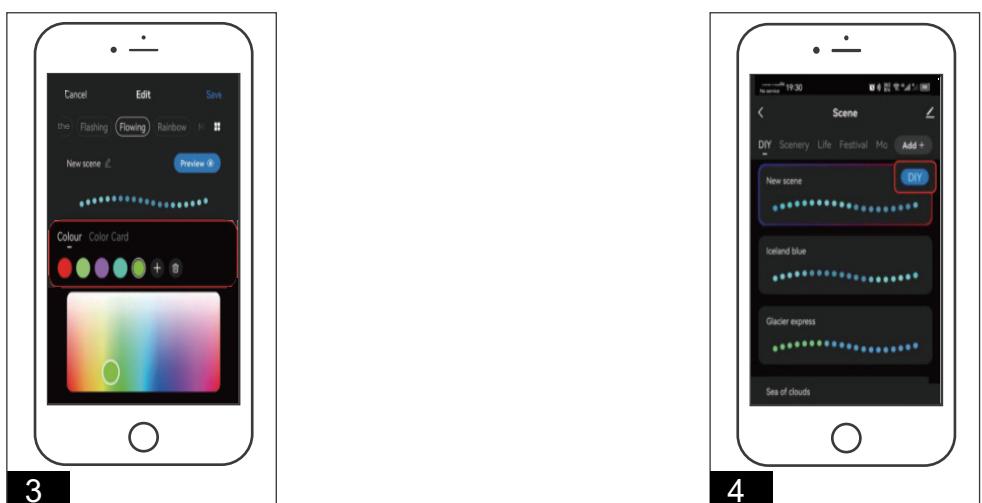


## LED Track Light Sync to Music Function


Enter the music mode and use any device to play music. The led track light will synchronize with the music.

### Note:


5. Click "■" at the top right bottom of the interface to enter custom scene.

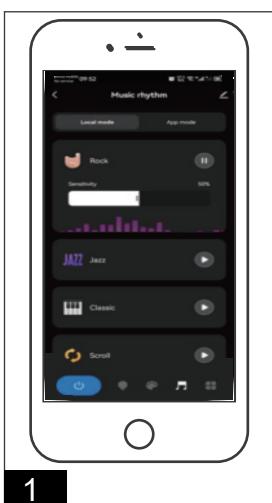



2. You can select the phone mode or local microphone mode according to different use needs.

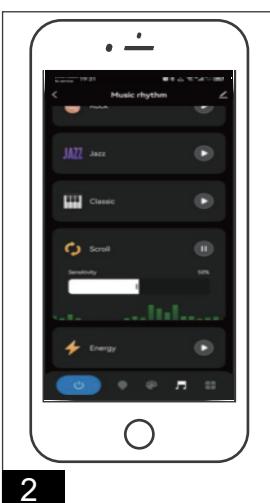

3. You can click your favorite scene mode to let the led track light show different music rhythm effects.

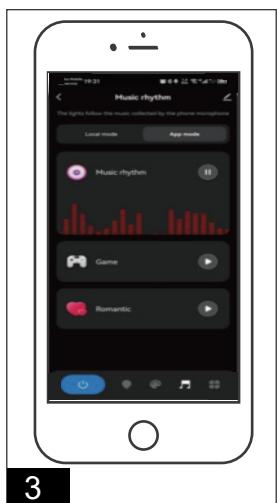


### Other Mode

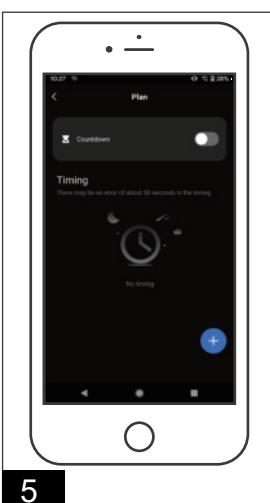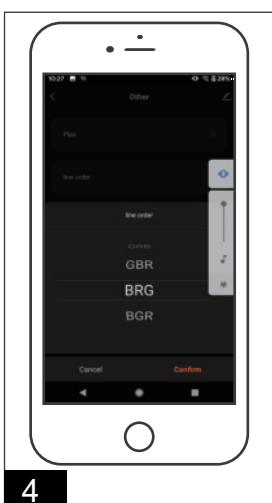

The following parts are available for reorder if damaged or missing. Call our toll free at 1-800-887-6326

#### Spare Parts List:

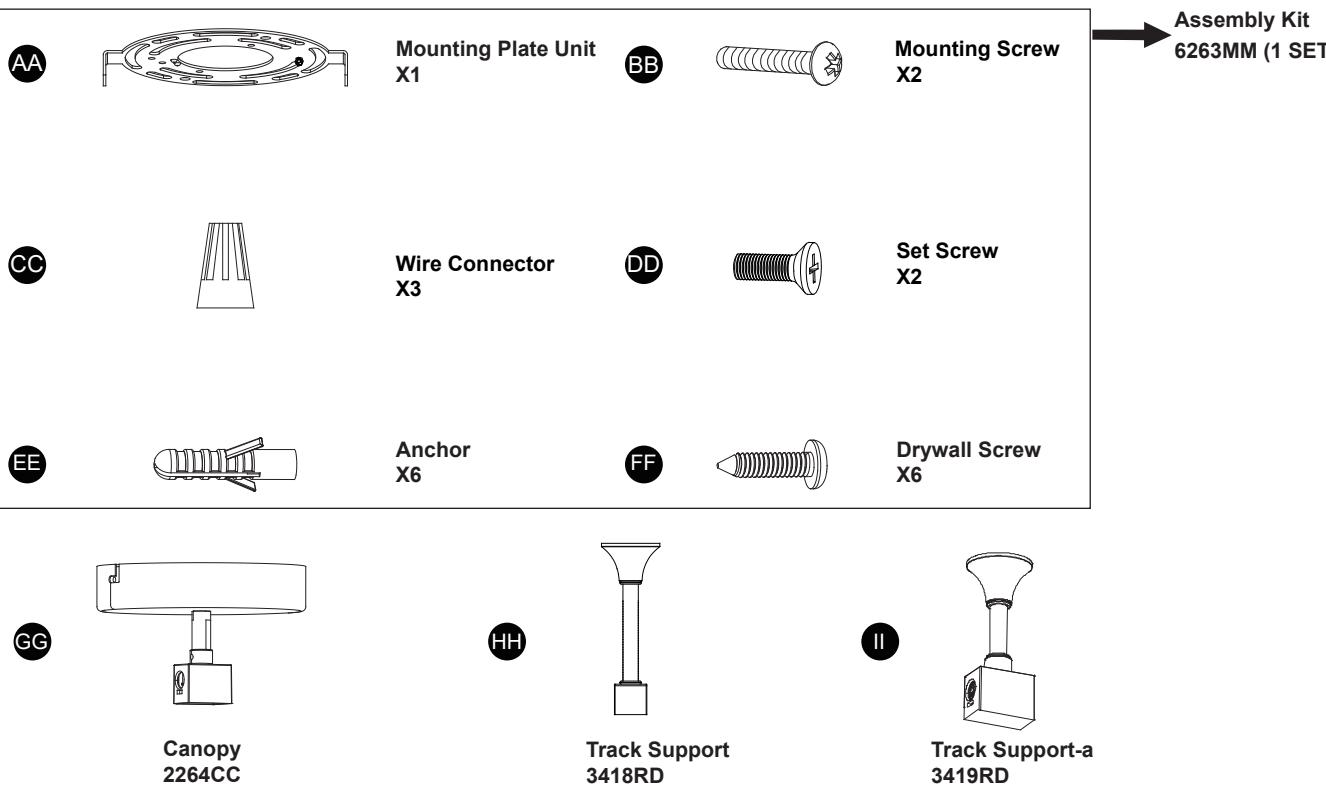

## CARE AND MAINTENANCE

- To clean, turn off and wipe with a damp, non-abrasive cloth.

## TROUBLESHOOTING

### 1) The light does not work:

- a) Check that the connection between the adapter and the rail is correct.
- b) Check whether the power connected to the track rail power connecting device.
- c) Check to see if the lights are turned off with the APP.

**Caution: Make sure main power is turned off before serving this fixture.**

**If unable to fix any of the above issues, please consult a certified electrician.**

**FIVE-YEAR LIMITED WARRANTY:** If, during normal use, this PATRIOT LIGHTING® lighting fixture breaks or fails due to a defect in material workmanship within five (5) years from the date of original purchase, simply bring this lighting fixture with the original sales receipt back to your nearest MENARDS® retail store. At its discretion, PATRIOT LIGHTING® agrees to have the product or any defective part(s) repaired or replaced with the same or similar PATRIOT LIGHTING® product or part free of charge, within the stated warranty period, when returned by the original purchaser with original sales receipt. This warranty; (1) excludes expendable parts including but not limited to light bulbs; (2) does not cover damage that has resulted from abuse or misuse; and (3) does not cover any losses, labor, injuries to persons/property or costs. This warranty does give you specific legal rights and you may have other rights, which vary from state to state.



### Questions, problems, missing parts?

Before returning to your retailer, call our customer service at 1-800-887-6326  
Monday – Friday 9:00 a.m. – 5:00 p.m. CST

## **FCC Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.