

DFS Test Report

Applicant : Righ, Inc.
Product Name : Cleo 7
Trade Name : Righ, Inc.
Model Number : PC1A
Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013
Received Date : May 08, 2025
Test Period : Jun. 19, 2025 ~ Jun. 24, 2025
Issued Date : Sep. 12, 2025

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Sep. 12, 2025	Initial Issue	Emma Chao

Verification of Compliance

Applicant : Righ, Inc.

Product Name : Cleo 7

Trade Name : Righ, Inc.

Model Number : PC1A

FCC ID : 2BH36-PC1A

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Issued By : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : _____

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation	9
3.2.	EUT Test Step	9
3.3.	Test Instruments	9
4	Dynamic Frequency Selection	10
4.1.	Limits	10
4.2.	Test and Measurement System	14
5	Test Results	16
5.1.	Radar Waveforms and Traffic	16
5.2.	Channel Loading	32
5.3.	Channel Availability Check Time.....	36
5.4.	Channel Move Time and Channel Closing Transmission Time.....	39
5.5.	Non-Occupancy Period	41
5.6.	U-NII Detection Bandwidth	42
5.7.	Statistical Performance check	45

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	Non-Associated Test	N/A	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)

Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Applicant	Righ, Inc. 3200 Ash St, Palo Alto, CA 94306, USA		
Product Name	Cleo 7		
Trade Name	Righ, Inc.		
Model Number	PC1A		
FCC ID	2BH36-PC1A		
Operate Frequency	Frequency Band		Frequency Range (MHz)
	802.11a	U-NII Band 2-A	5260 – 5320
		U-NII Band 2-C	5500 – 5700
		Straddle band	5720
	802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20/ 802.11be EHT20	U-NII Band 2-A	5260 – 5320
		U-NII Band 2-C	5500 – 5700
		Straddle band	5720
	802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40/ 802.11be EHT40	U-NII Band 2-A	5270 – 5310
		U-NII Band 2-C	5510 – 5670
		Straddle band	5710
	802.11ac VHT80/ 802.11ax HE80/ 802.11be EHT80	U-NII Band 2-A	5290
		U-NII Band 2-C	5530 – 5610
		Straddle band	5690
	802.11ac VHT160/ 802.11ax HE160/ 802.11be EHT160	U-NII Band 2-A	5250
		U-NII Band 2-C	5570
Modulation Type	OFDM/OFDMA		
Antenna Delivery	2TX (CDD/Beamforming on)		
Operate Temp. Range	0 ~ +40 °C		
EUT Power Rating	AC 100-240 V, 50-60 Hz, 0.6 A		

Antenna information				
Type	Antenna		Frequency	Max. Gain (dBi)
PIFA Antenna	5G0	ANT-0	U-NII Band 2-A	-0.1
			U-NII Band 2-C	1.7
	5G1	ANT-1	U-NII Band 2-A	1.5
			U-NII Band 2-C	4.3

Testing Sample No.	
Test Item	Sample Number
Conducted	C255112_A004

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point (point-to-point)	
	☐ Outdoor access point (point-to-multipoint)	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☐ Client without radar detection	
	☐ Ad-Hoc	
	☒ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11be EHT20
802.11be EHT40
802.11be EHT80
802.11be EHT160

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

Test Period: Jun. 19 , 2025 ~ Jun. 24 , 2025

Testing Engineer: Sandy Yang

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460164	Mar. 4, 2025	1 year
☒	Signal Generator	R&S	SMM100A	101740	Jan. 21, 2025	1 year

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection	
Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues	
Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

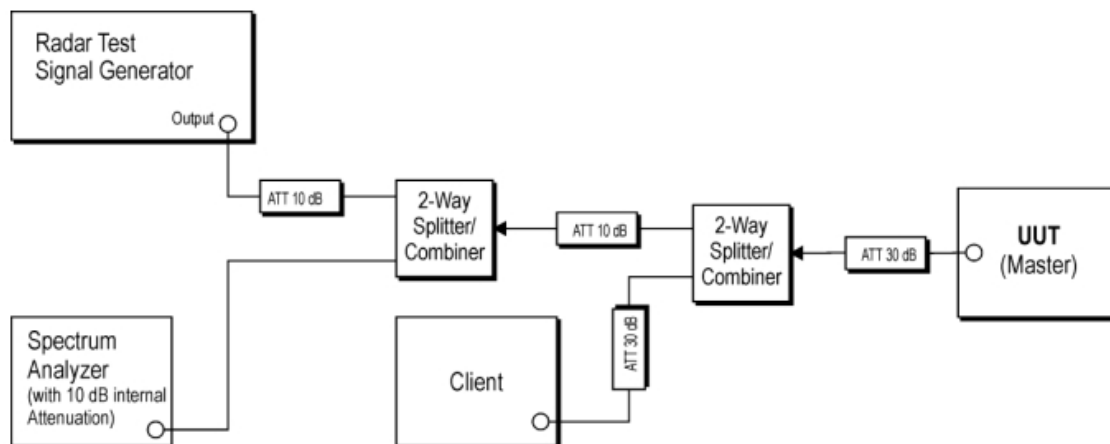

Tested System Details

The types for all equipment's, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Cleo 7	Righ, Inc	PC1A	FCC : 2BH36-PC1A

4.2.2. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.3. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm). The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.

The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.4. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results

5.1. Radar Waveforms and Traffic




802.11be EHT20_ 5300 MHz

Short Pulse Radar
Type 2

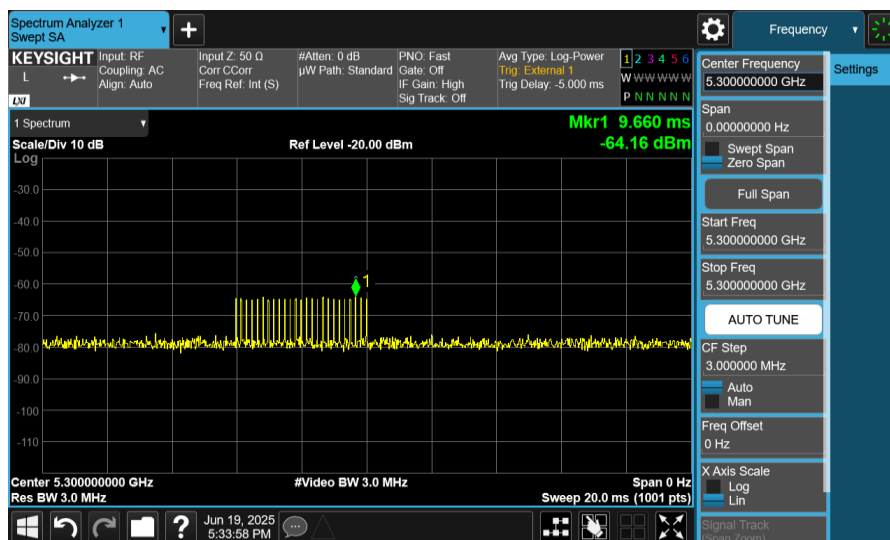


Short Pulse Radar
Type 3

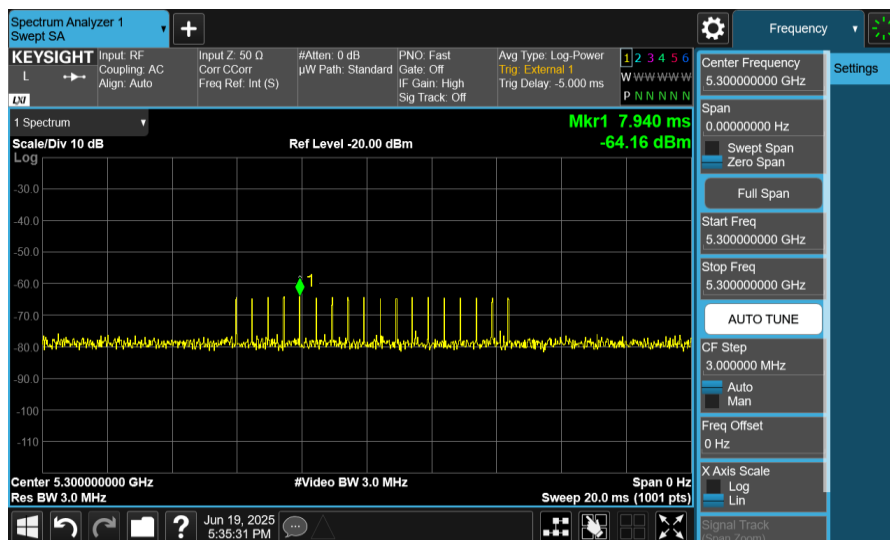



802.11be EHT20_ 5300 MHz

Short Pulse Radar
Type 4

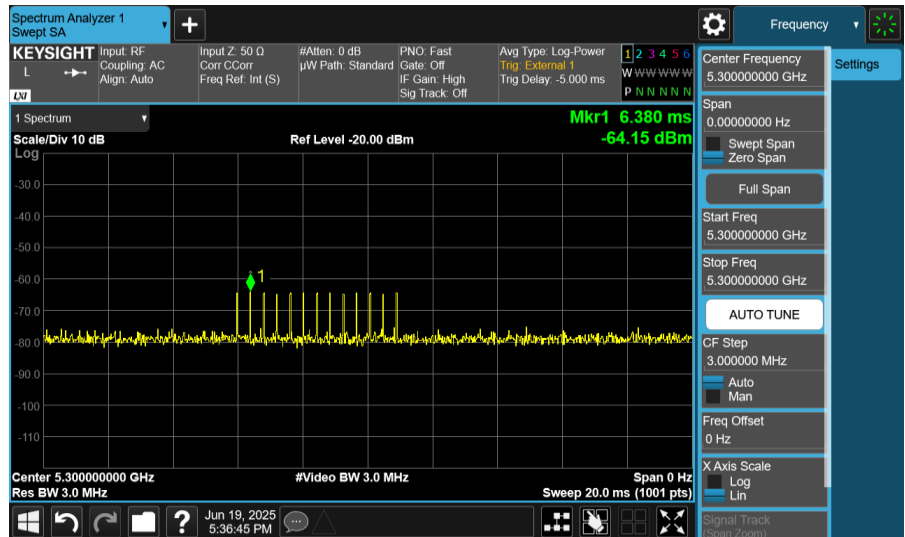


Long Pulse Radar
Type 5

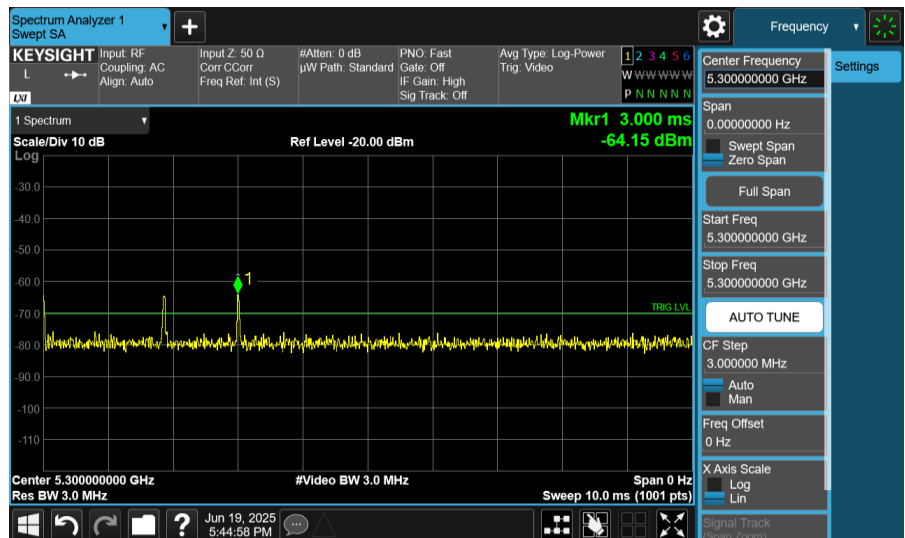

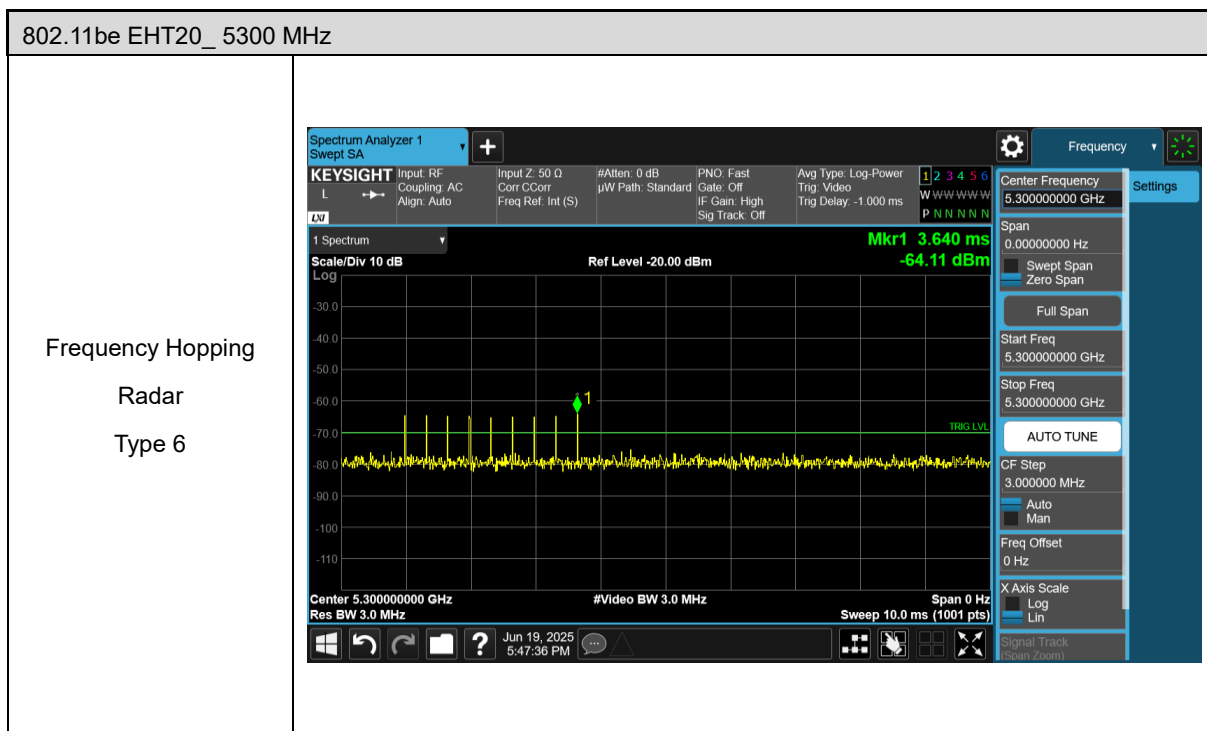


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 0

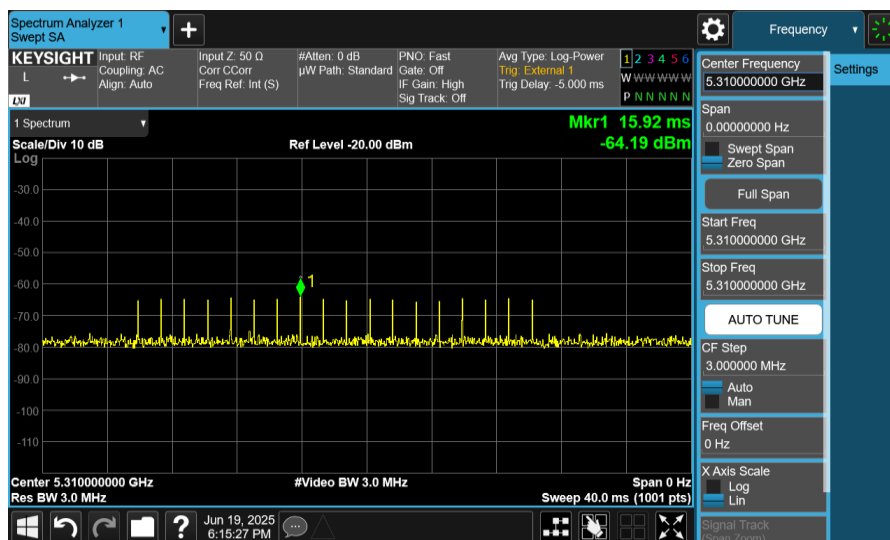


Short Pulse Radar
Type 1

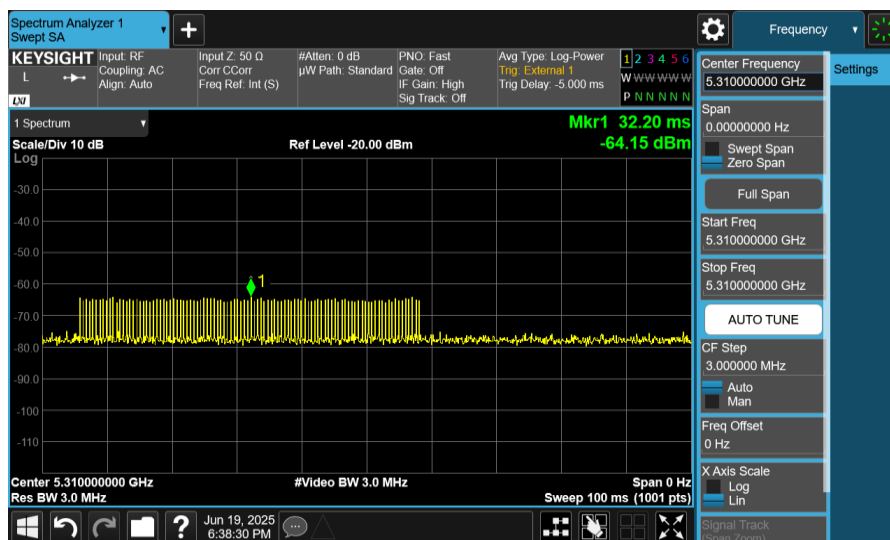


802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 2

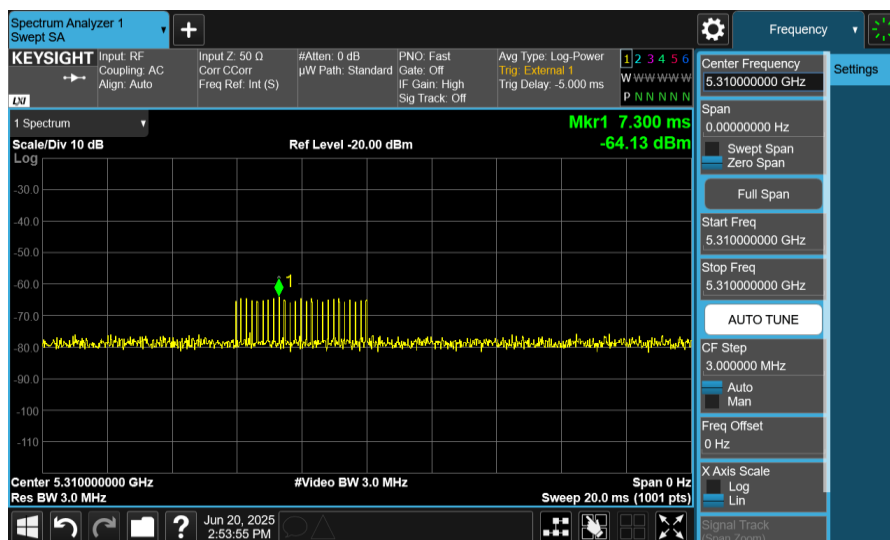


Short Pulse Radar
Type 3

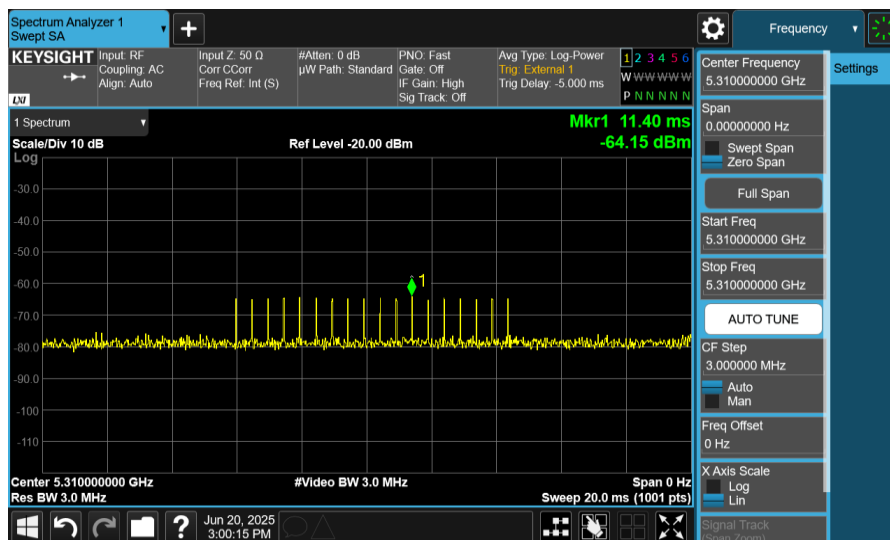



802.11be EHT40_ 5310 MHz

Short Pulse Radar
Type 4

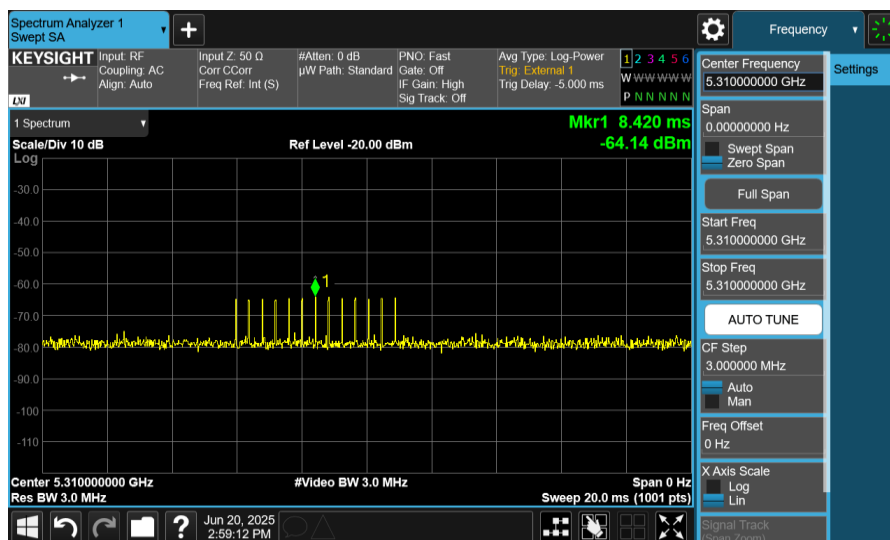


Long Pulse Radar
Type 5

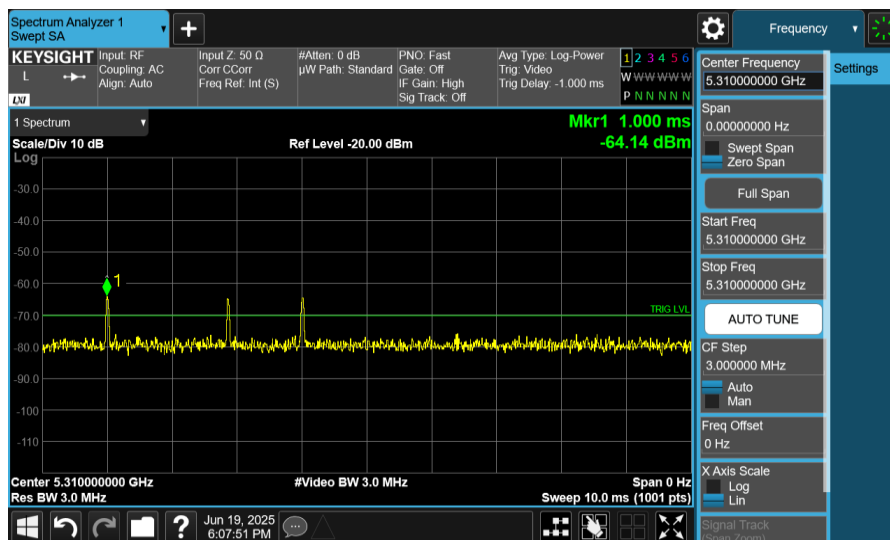

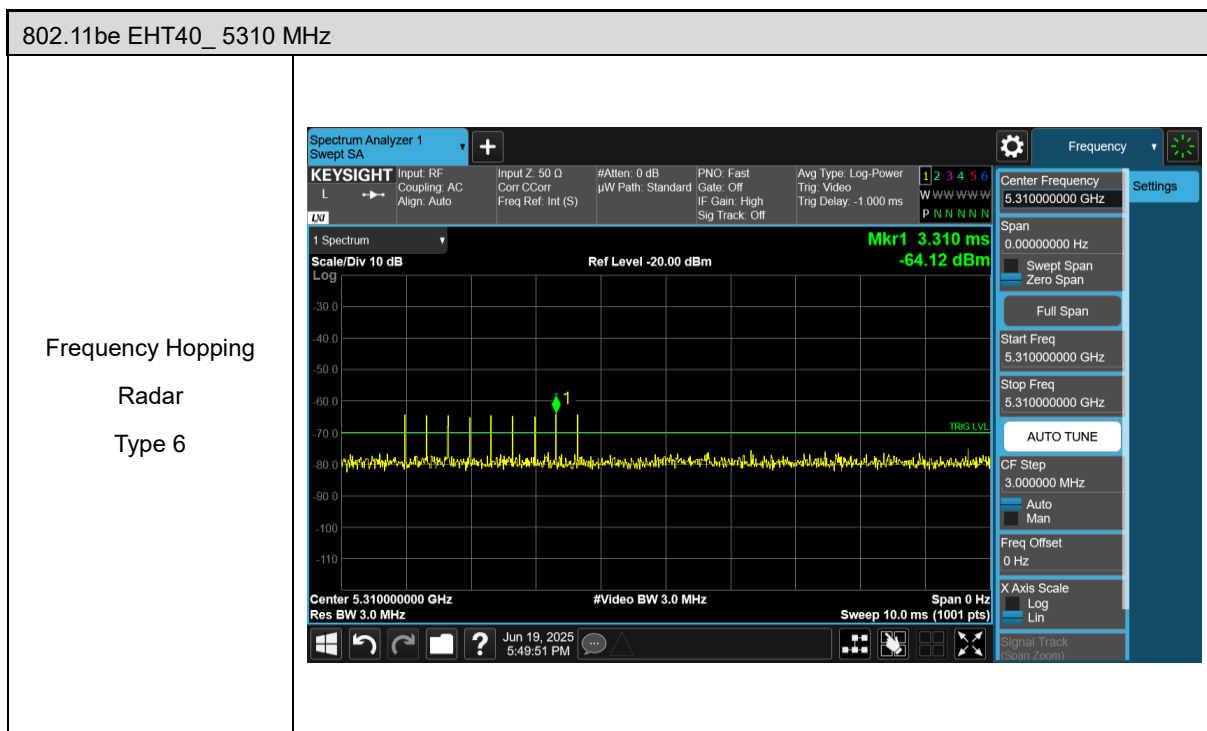


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 0

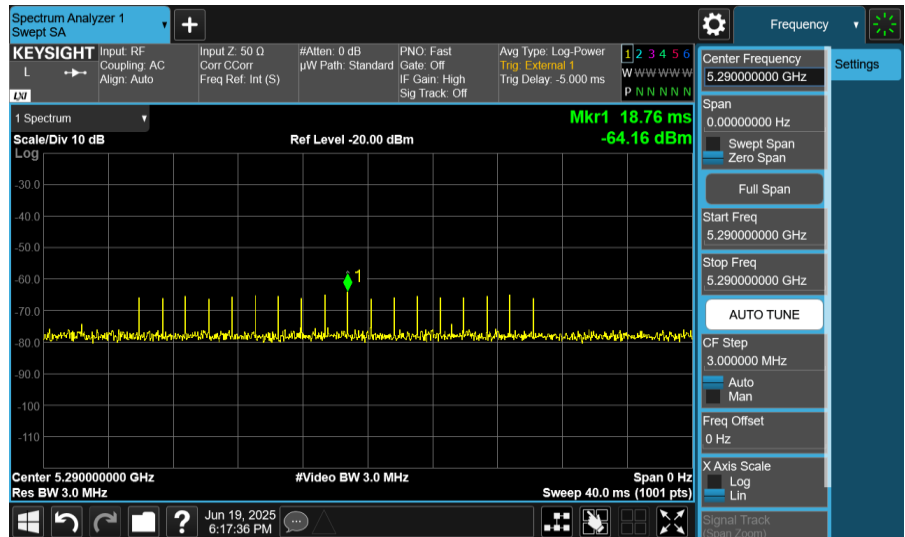


Short Pulse Radar
Type 1

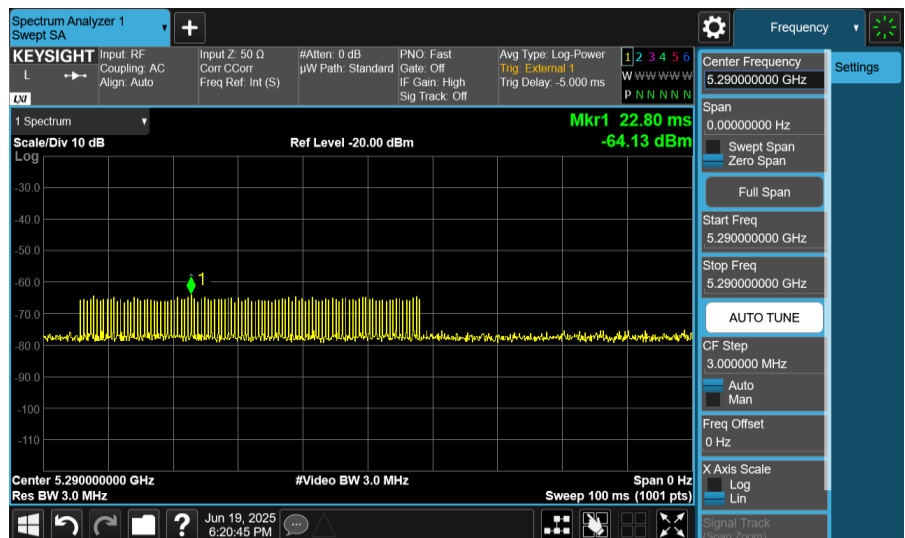


802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 2

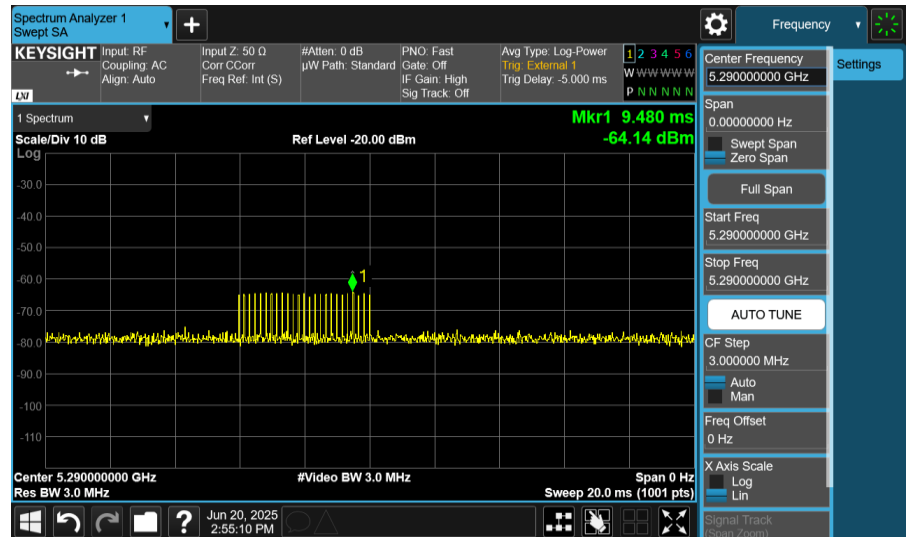


Short Pulse Radar
Type 3

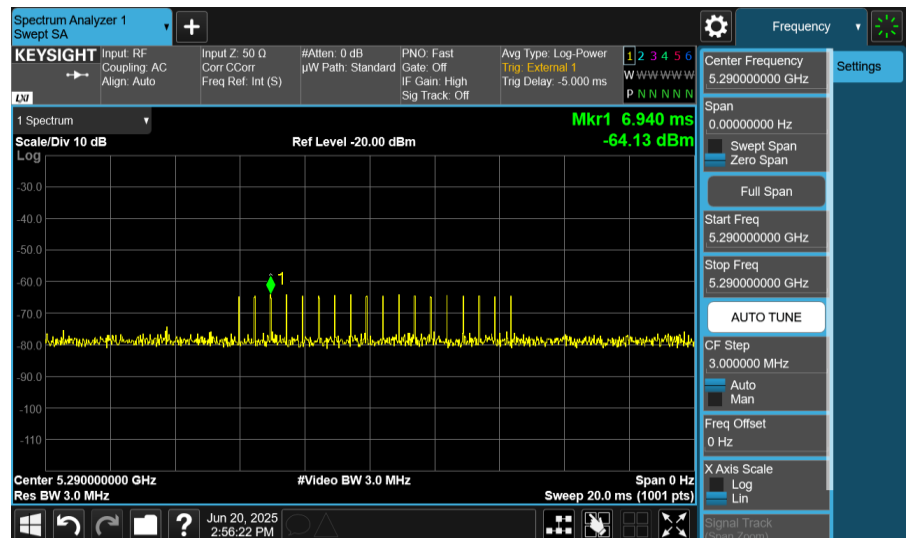



802.11be EHT80_ 5290 MHz

Short Pulse Radar
Type 4

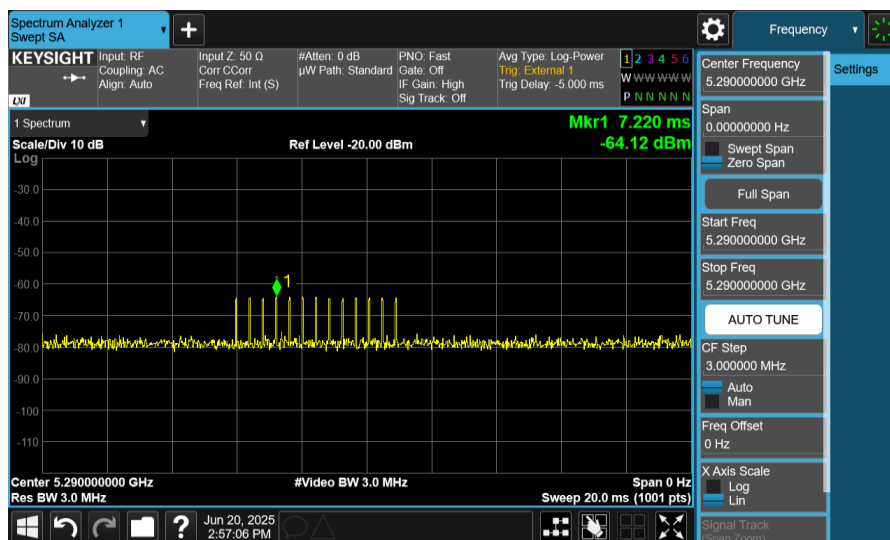


Long Pulse Radar
Type 5

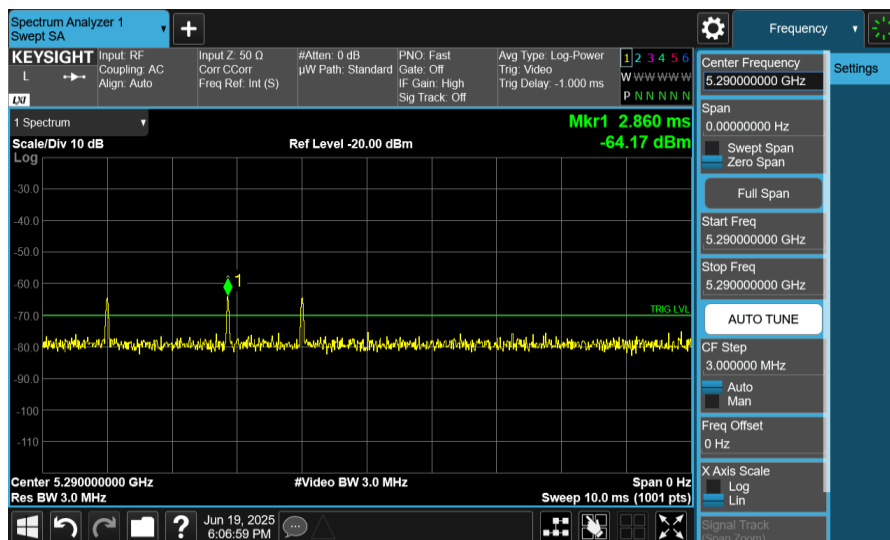

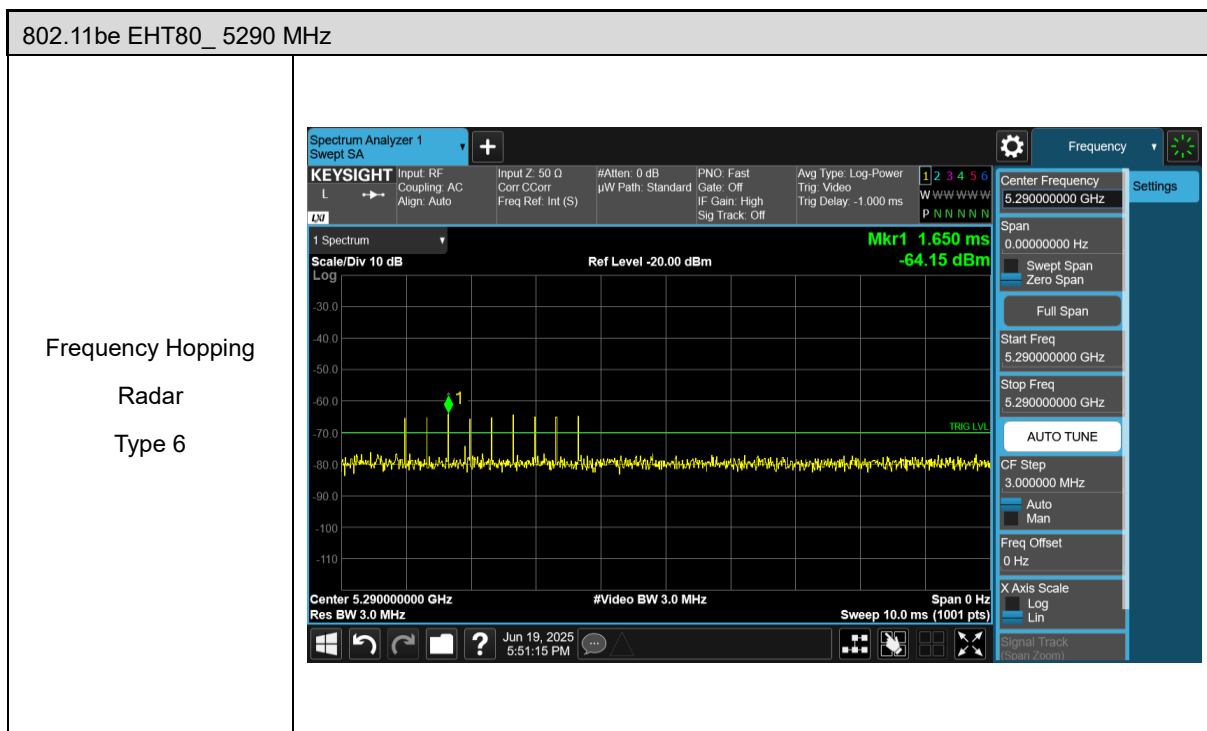


802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 0

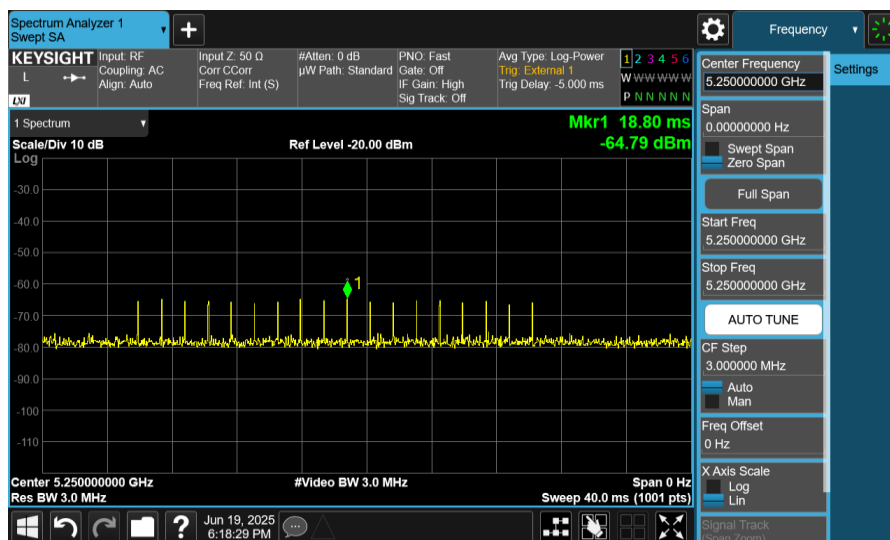


Short Pulse Radar
Type 1

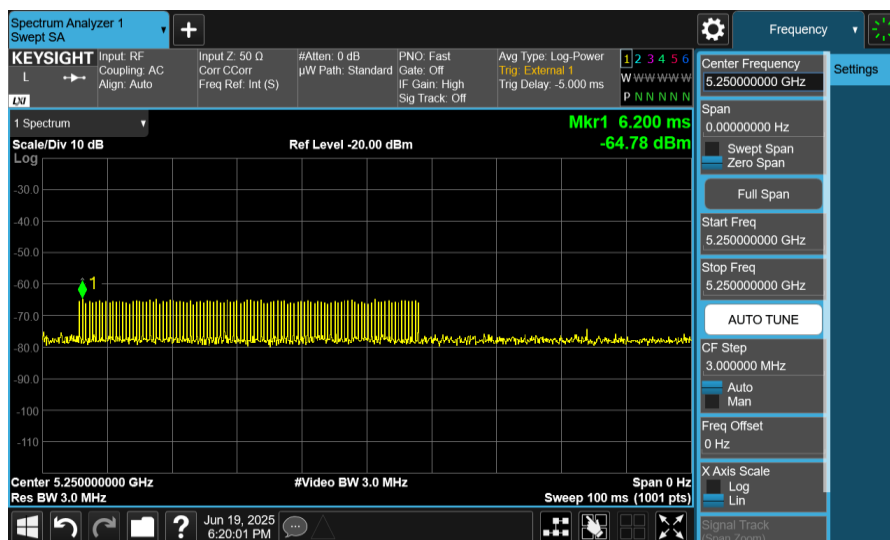


802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 2

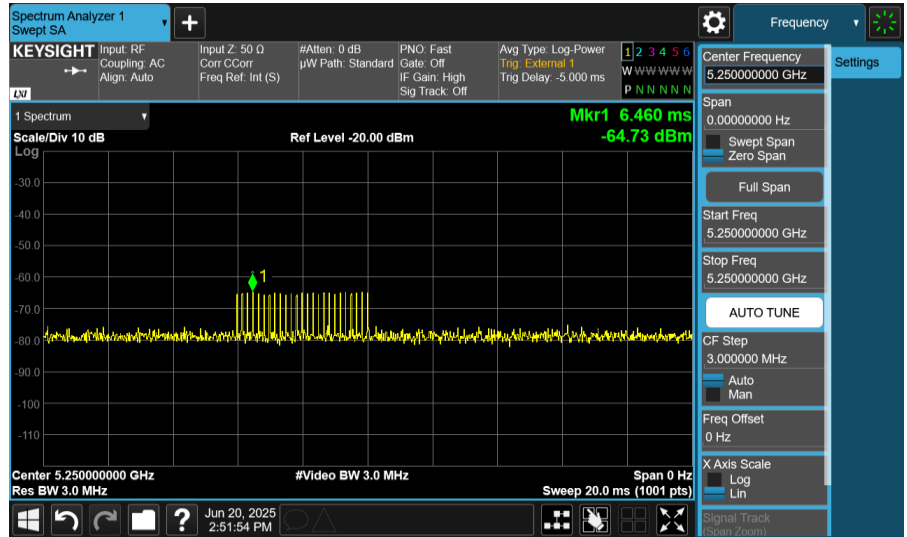


Short Pulse Radar
Type 3

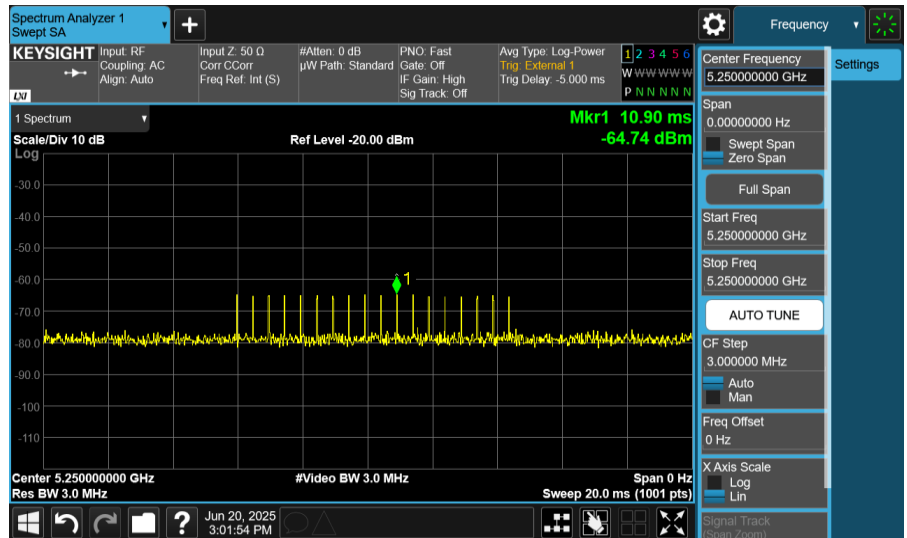


802.11be EHT160_ 5250 MHz

Short Pulse Radar
Type 4

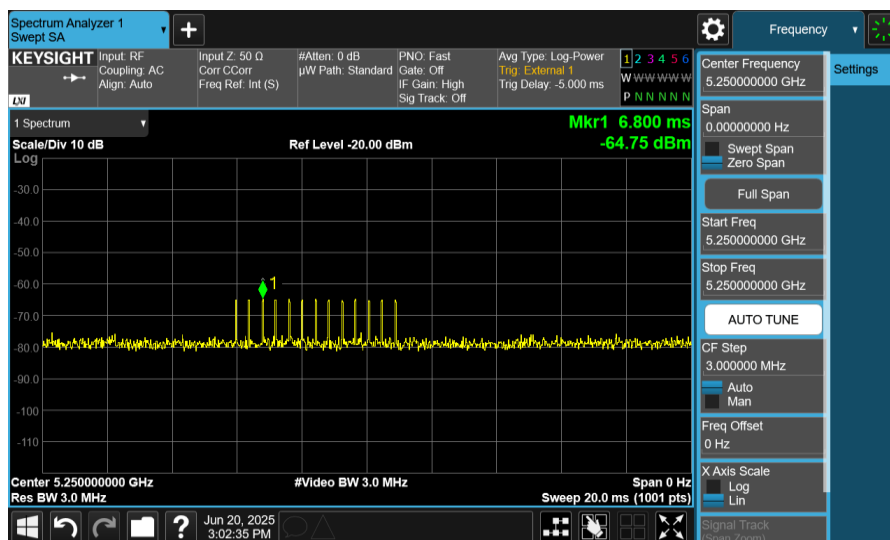


Long Pulse Radar
Type 5

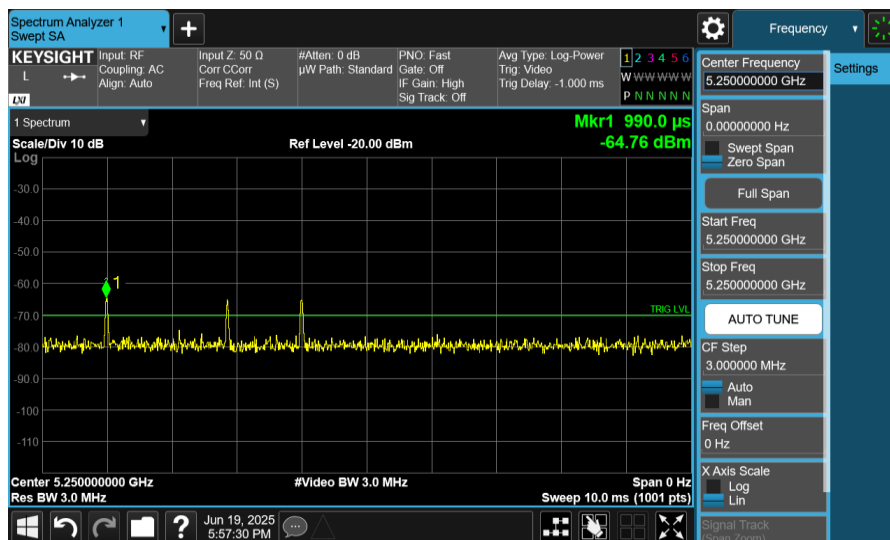


802.11be EHT160_ 5250 MHz

Frequency Hopping
Radar
Type 6

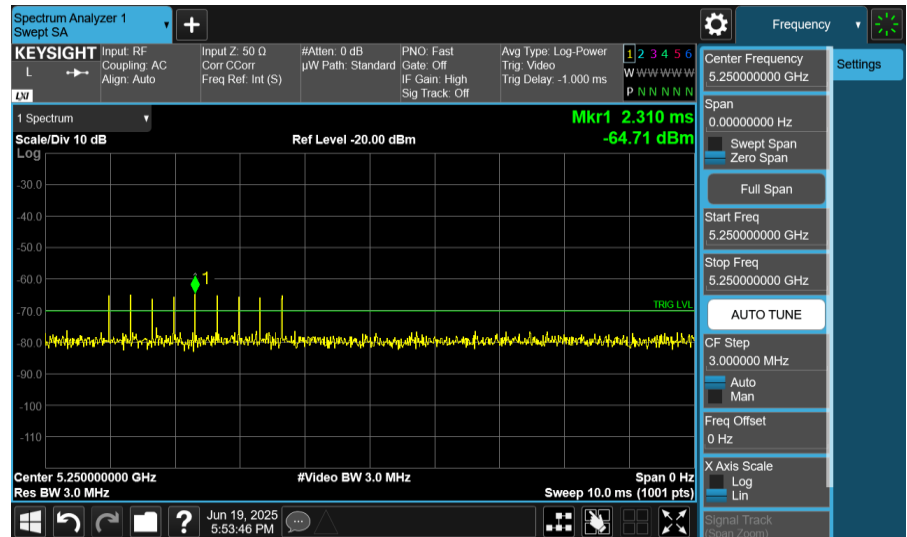


802.11be EHT160_ 5250 MHz


Traffic

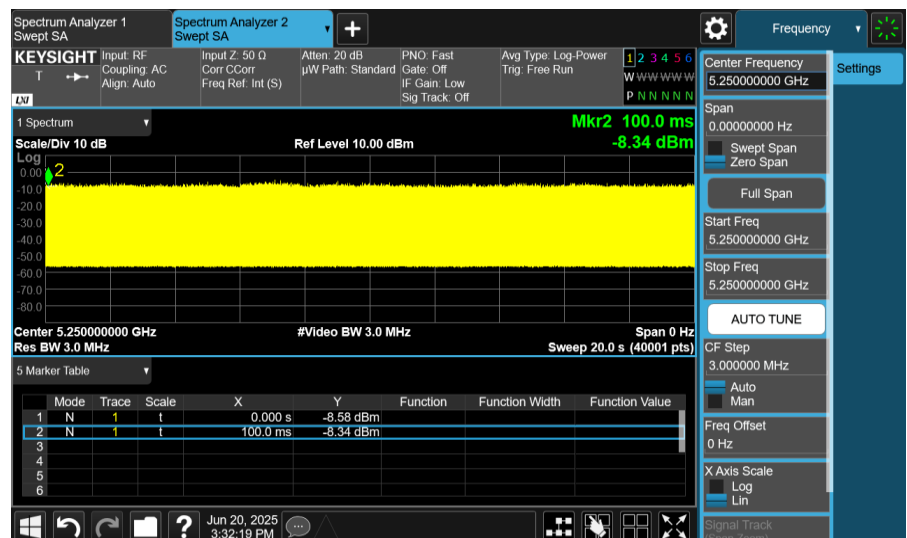



5.2. Channel Loading

■ Duty cycle $\geq 17\%$

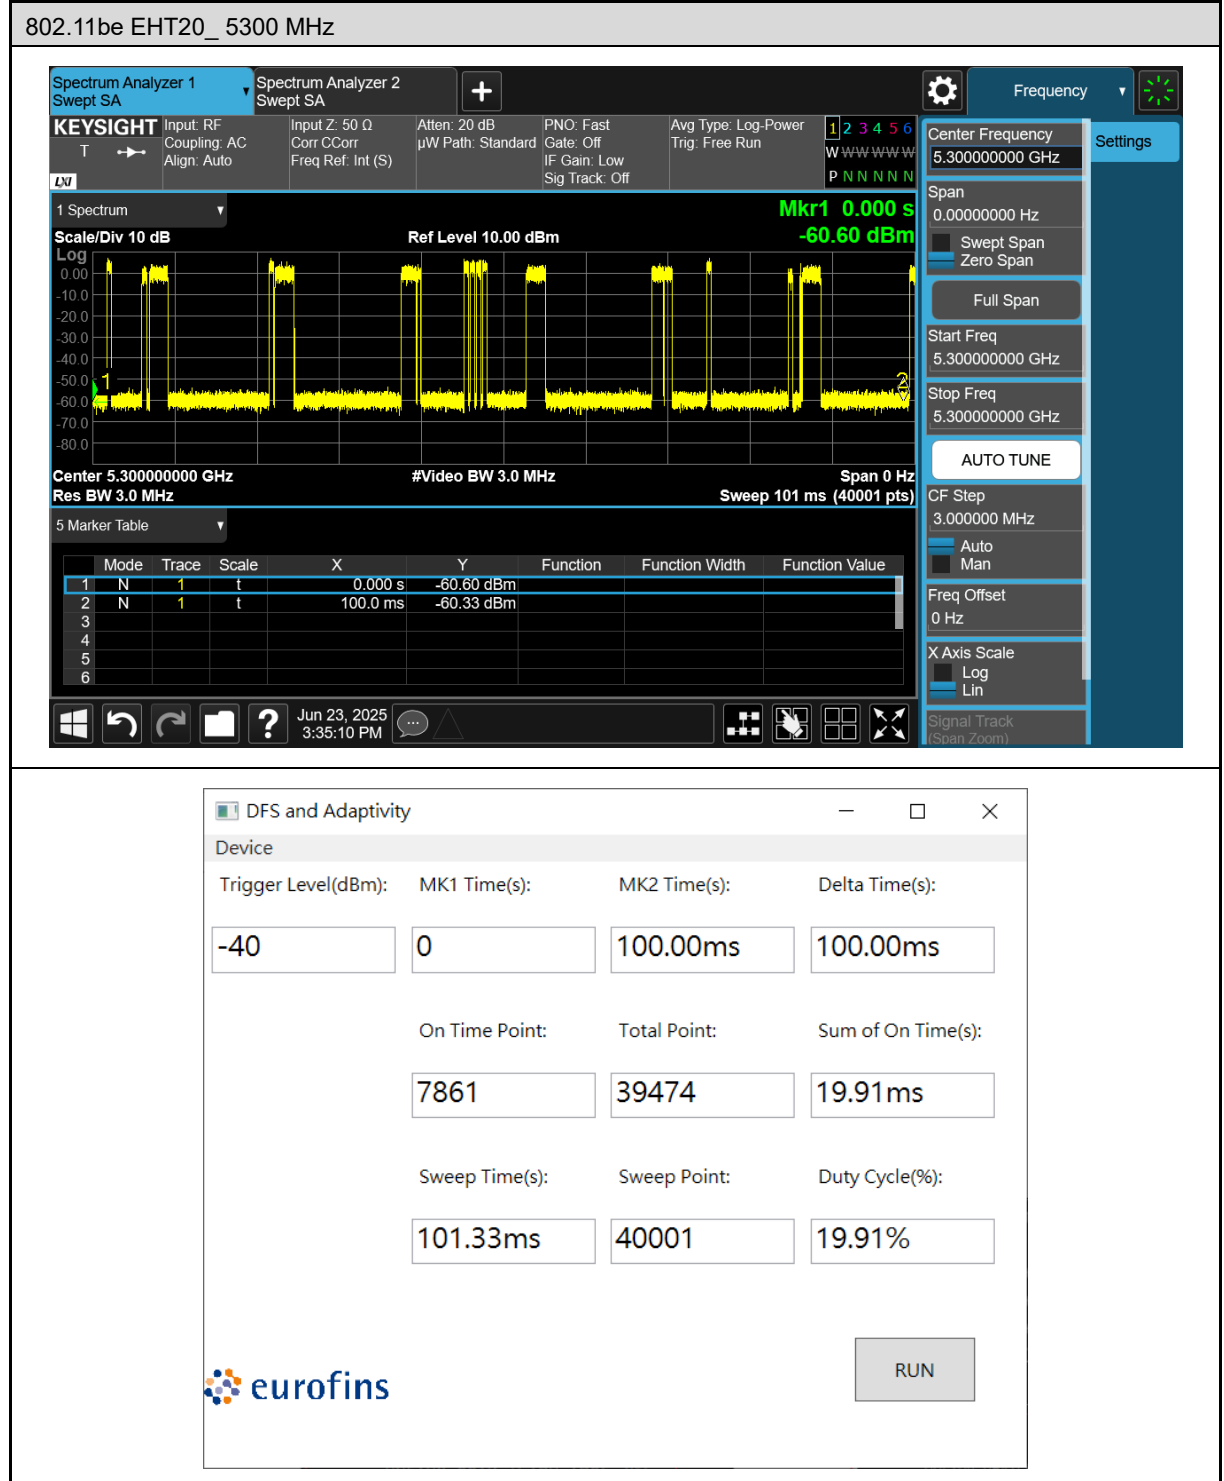

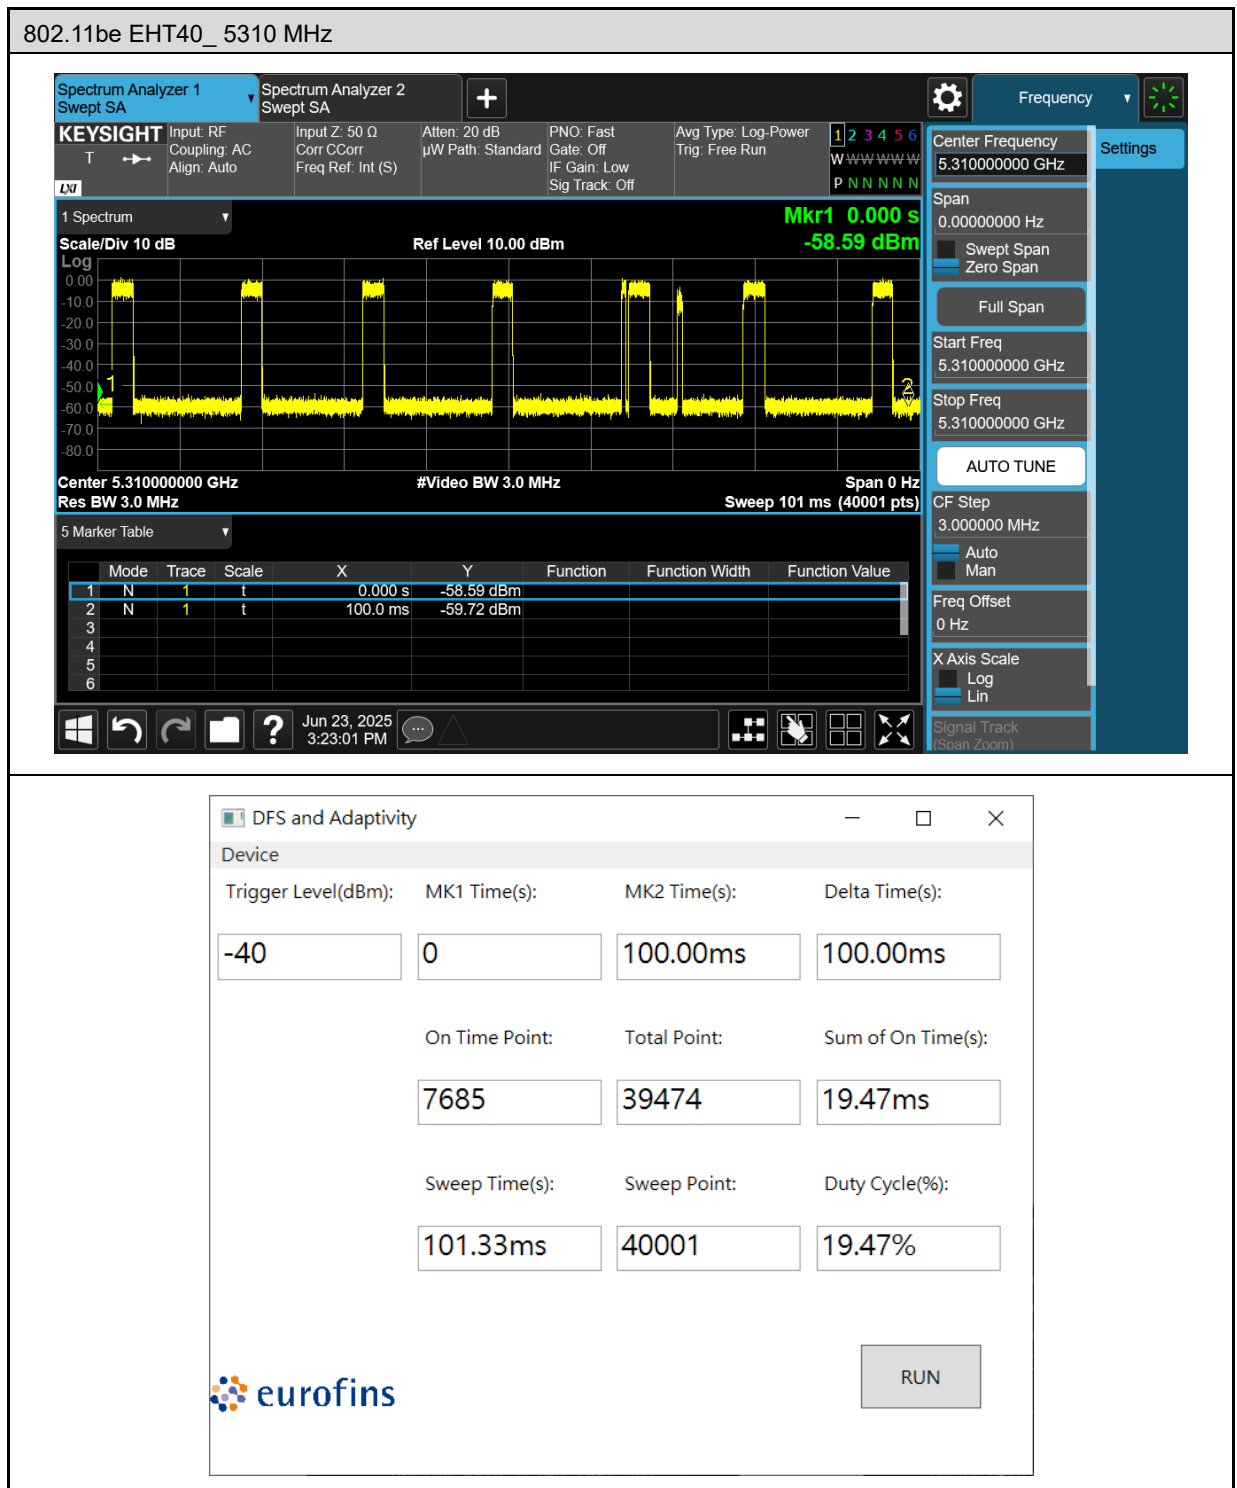

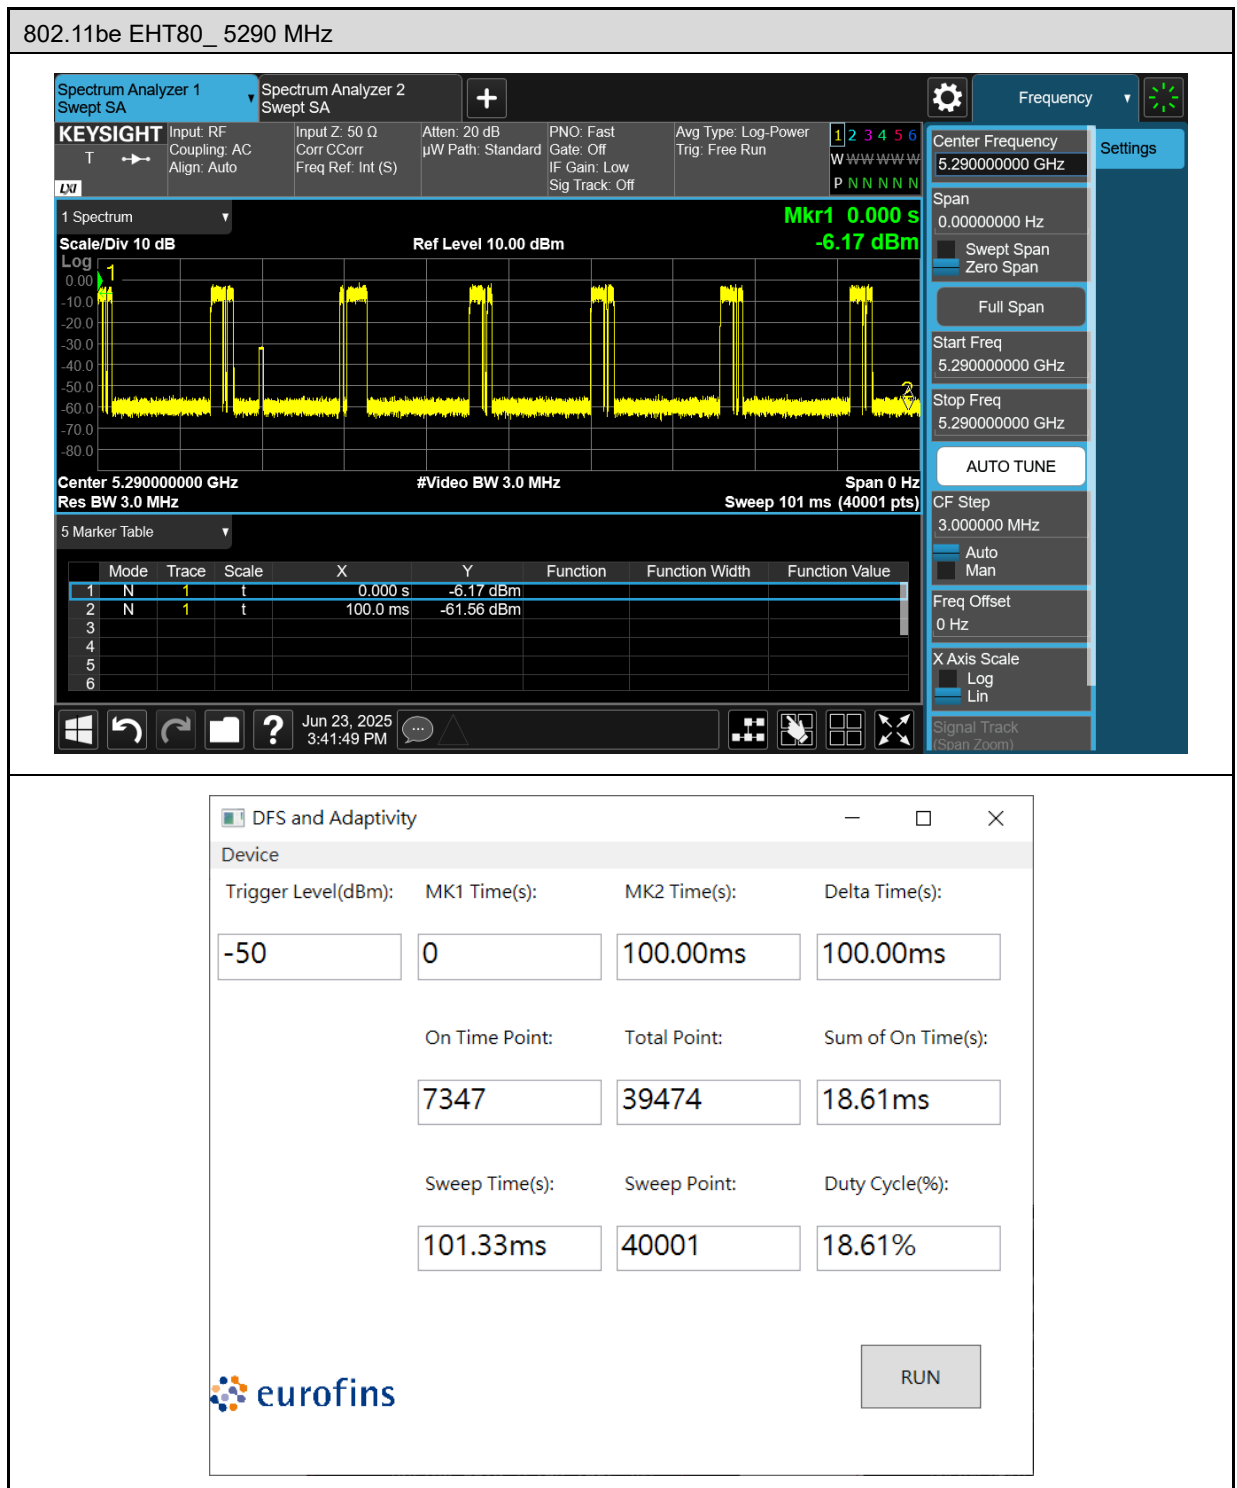

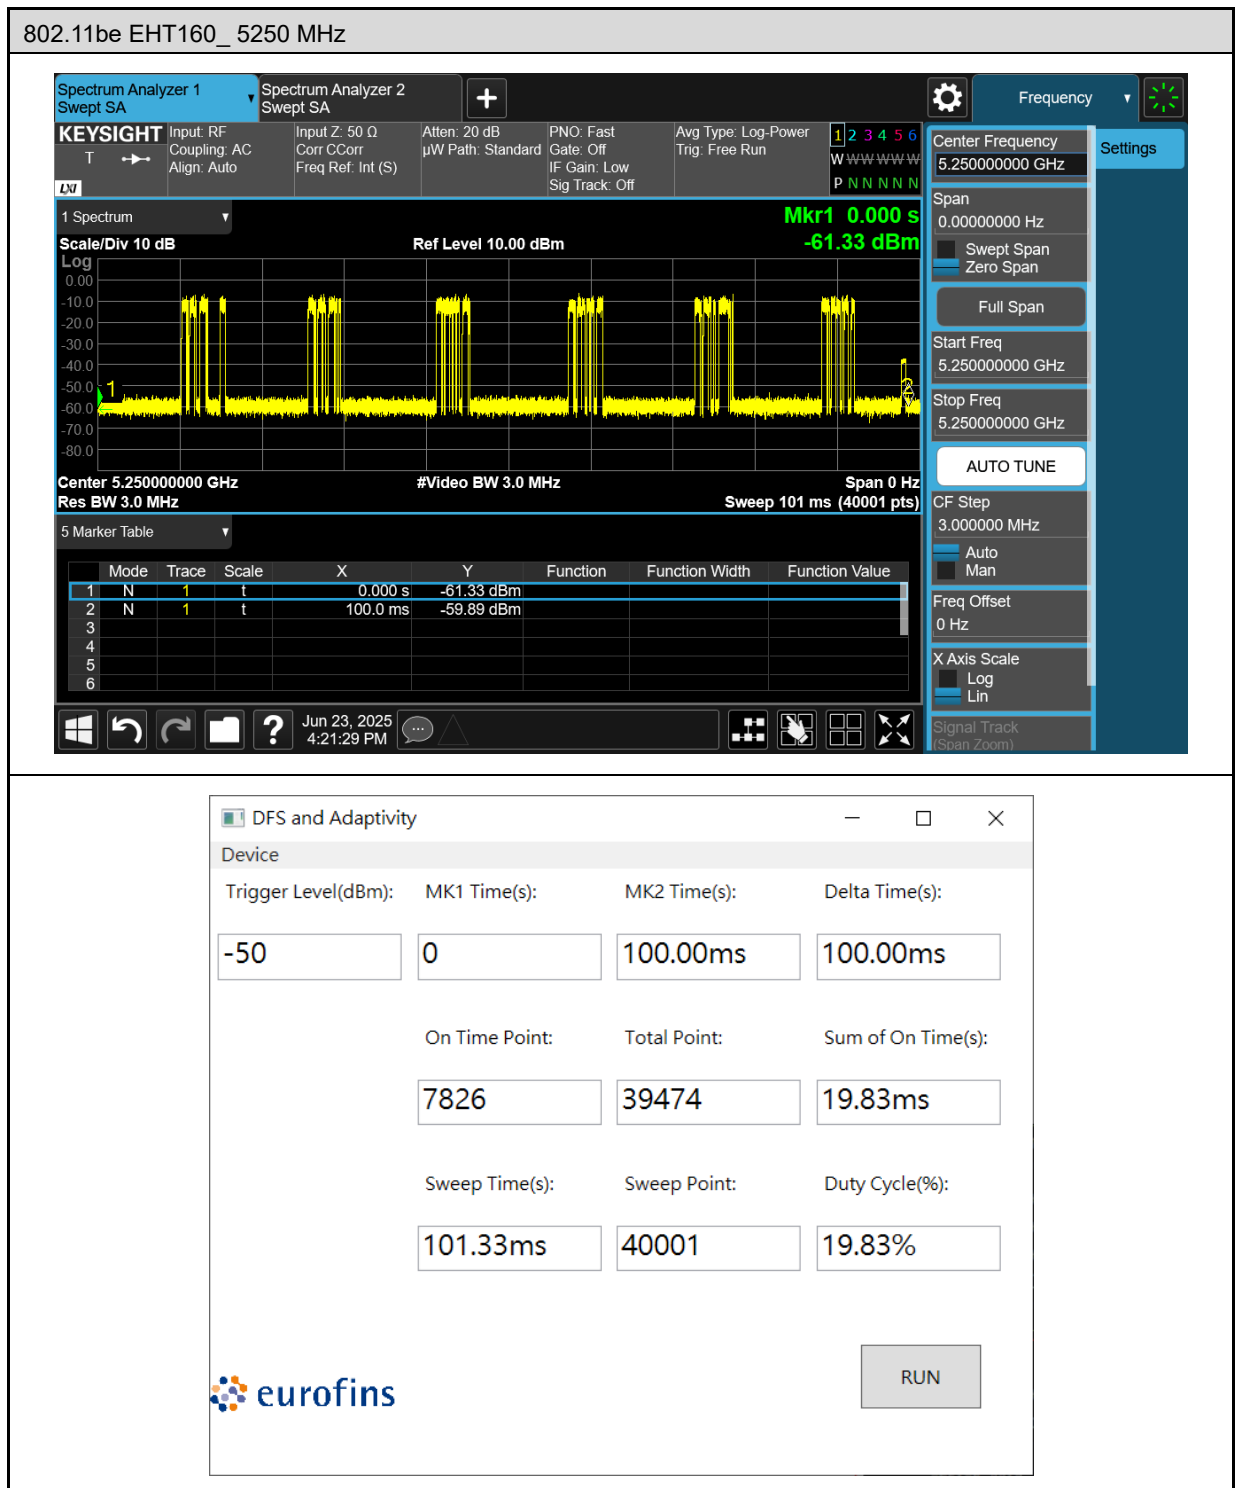

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.


The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results


Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel

802.11be EHT160_ 5250 MHz

Initial Channel
Availability Check

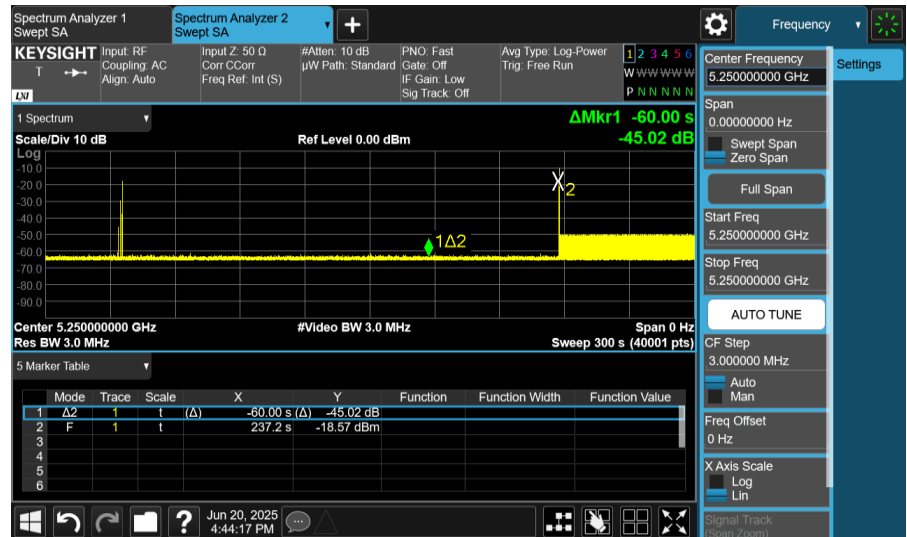


Initial Channel
Availability Check
Begin

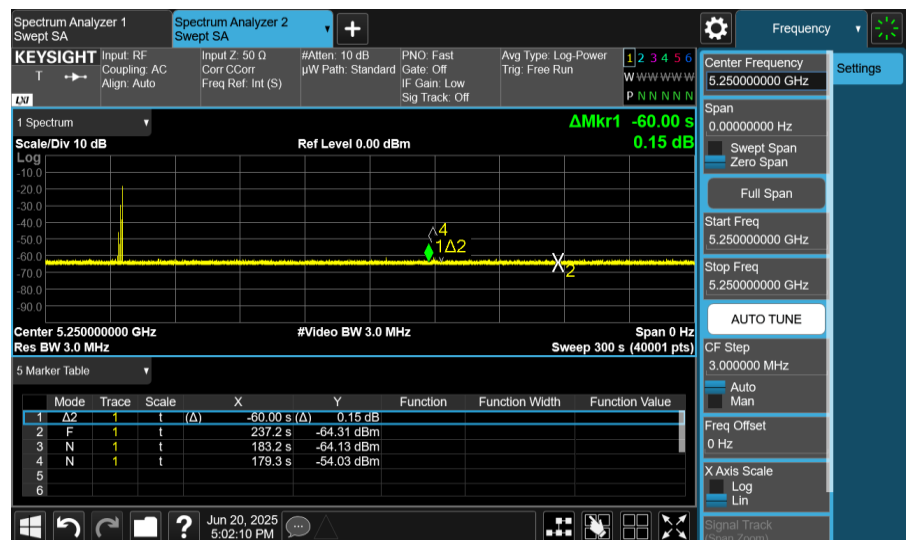

802.11be EHT160_ 5250 MHz

Initial Channel
Availability Check
End

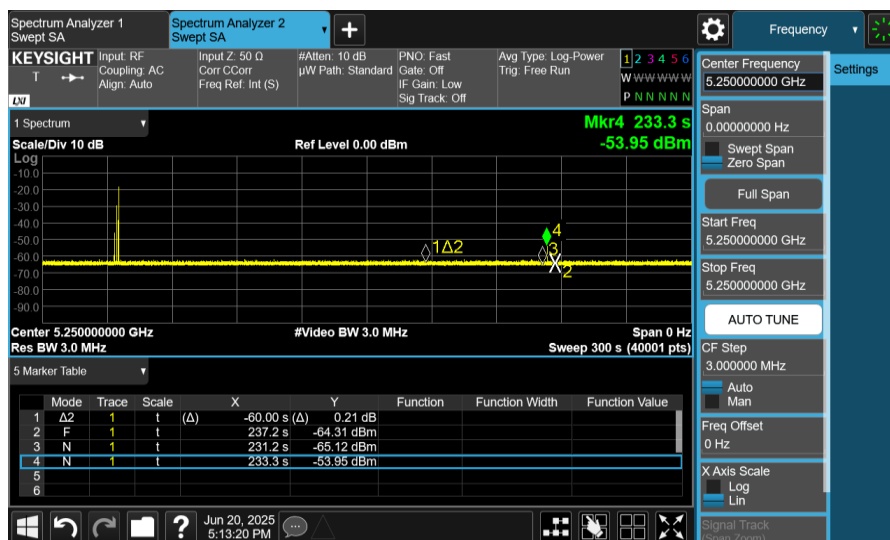

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


■ Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)	Limit (sec)
		Master	
5250	Type 0	519.0	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
		Master	
5250	Type 0	30.5	60

802.11be EHT160_ 5250 MHz

Channel Move and
Closing Time

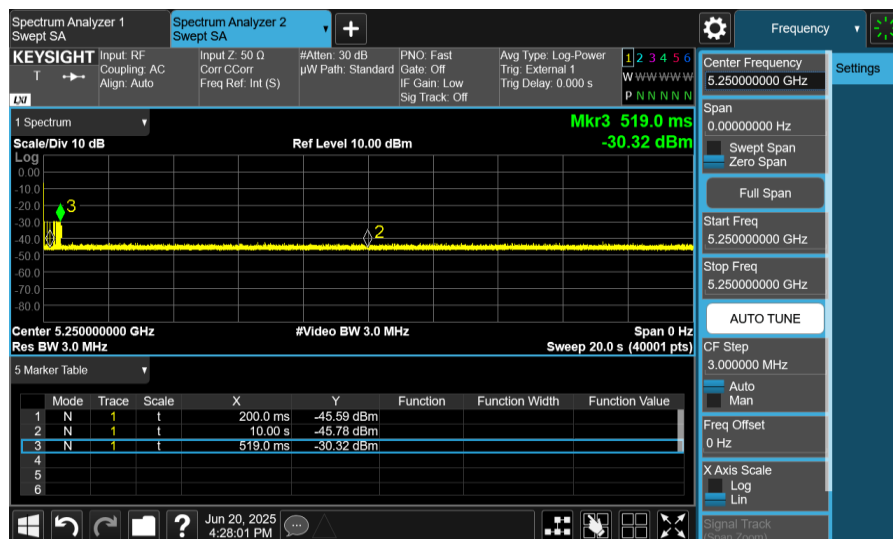

DFS and Adaptivity

Device


Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-40	200.00ms	10000.00ms	9800.00ms

On Time Point:	Total Point:	Sum of On Time(s):
61	19600	30.50ms

Sweep Time(s):	Sweep Point:	Duty Cycle(%)
20000.00ms	40001	0.31%

RUN

5.5. Non-Occupancy Period

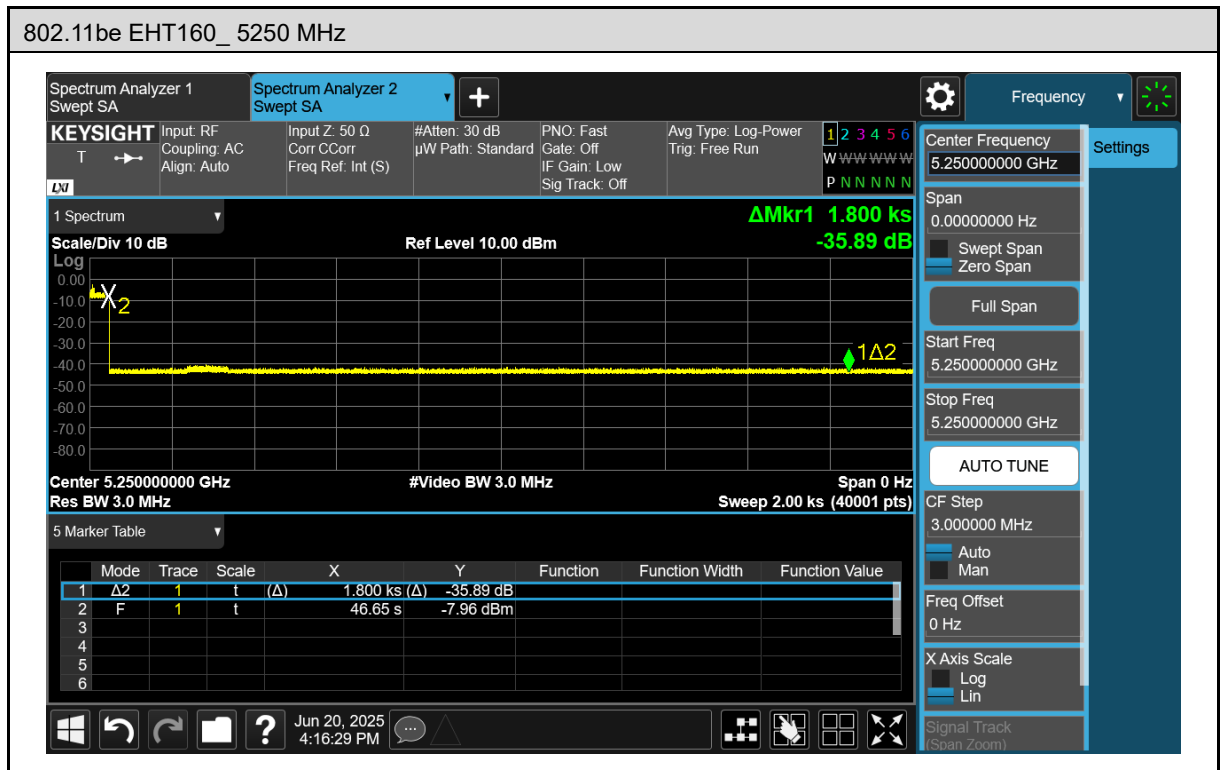

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results


Test Mode						
802.11be EHT20						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	18.94	105.60	≥ 100



Test Mode						
802.11be EHT40						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5530	5570	40	37.76	105.93	≥ 100

Test Mode						
802.11be EHT80						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	77.445	103.30	≥ 100

Test Mode						
802.11be EHT160						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5250	5250	5330	80	77.579	103.12	≥ 100

■ Test Graphs

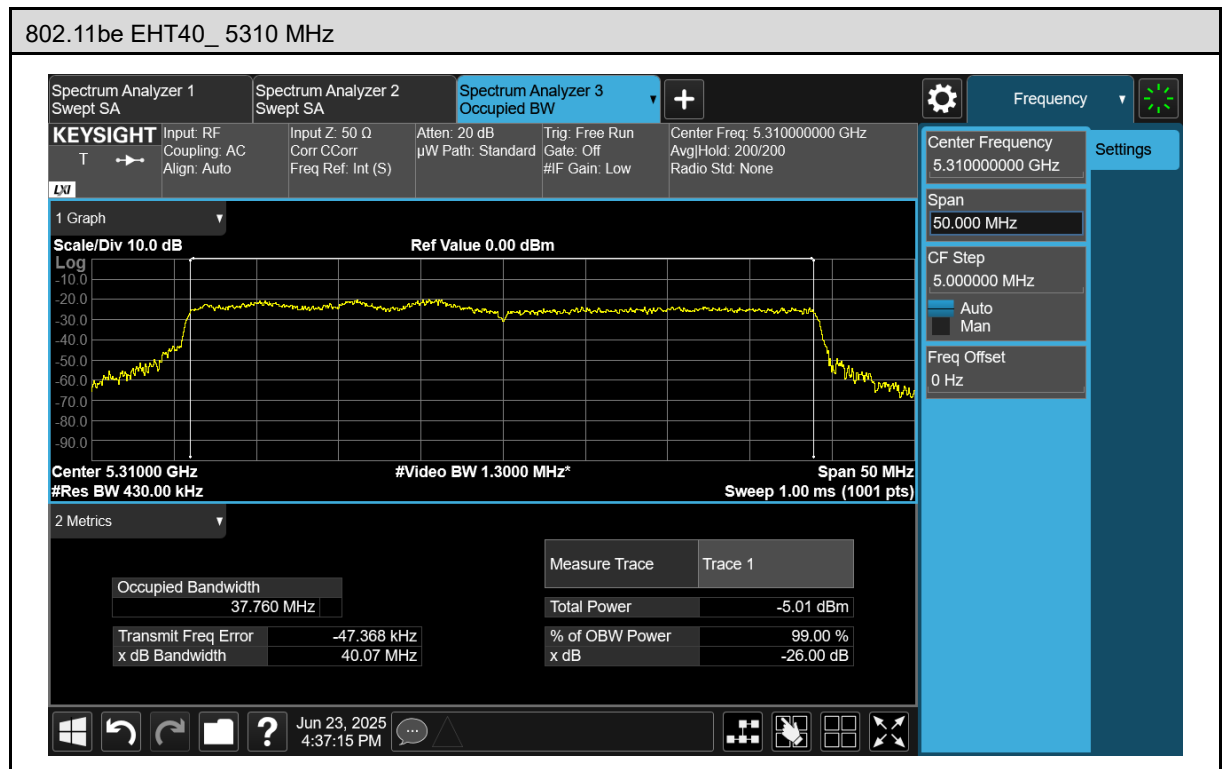

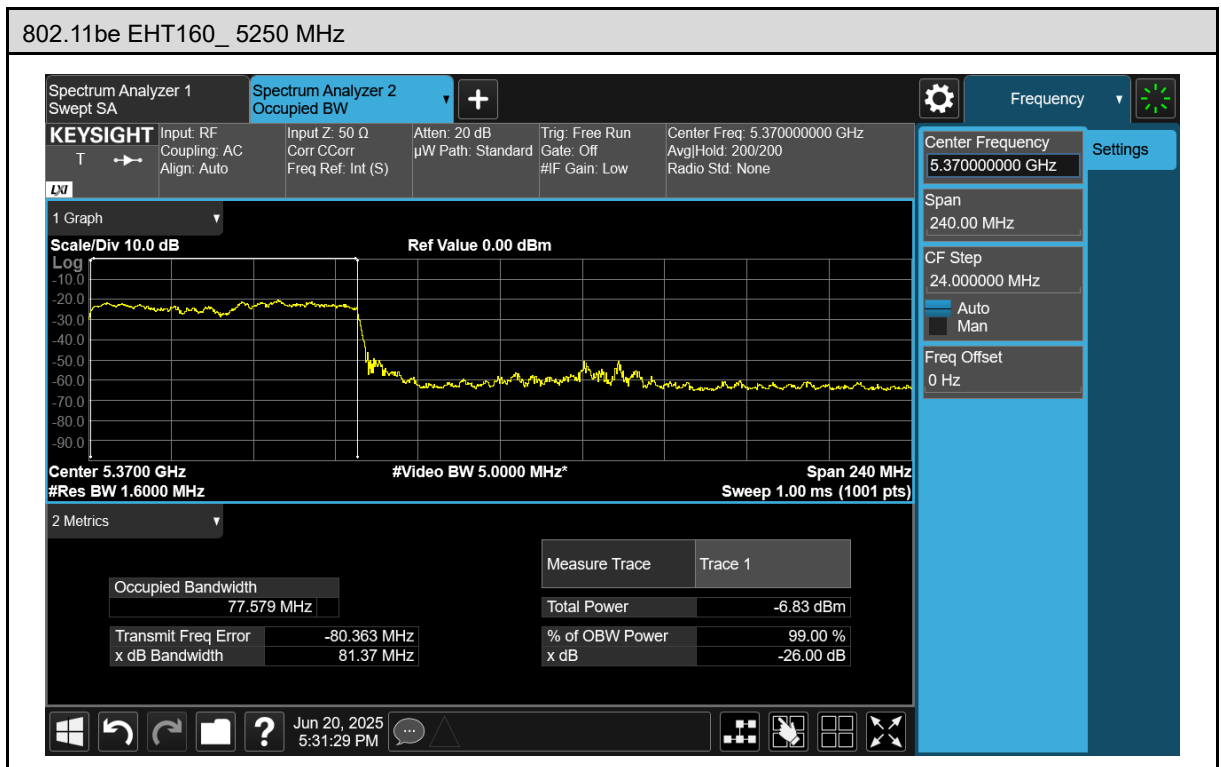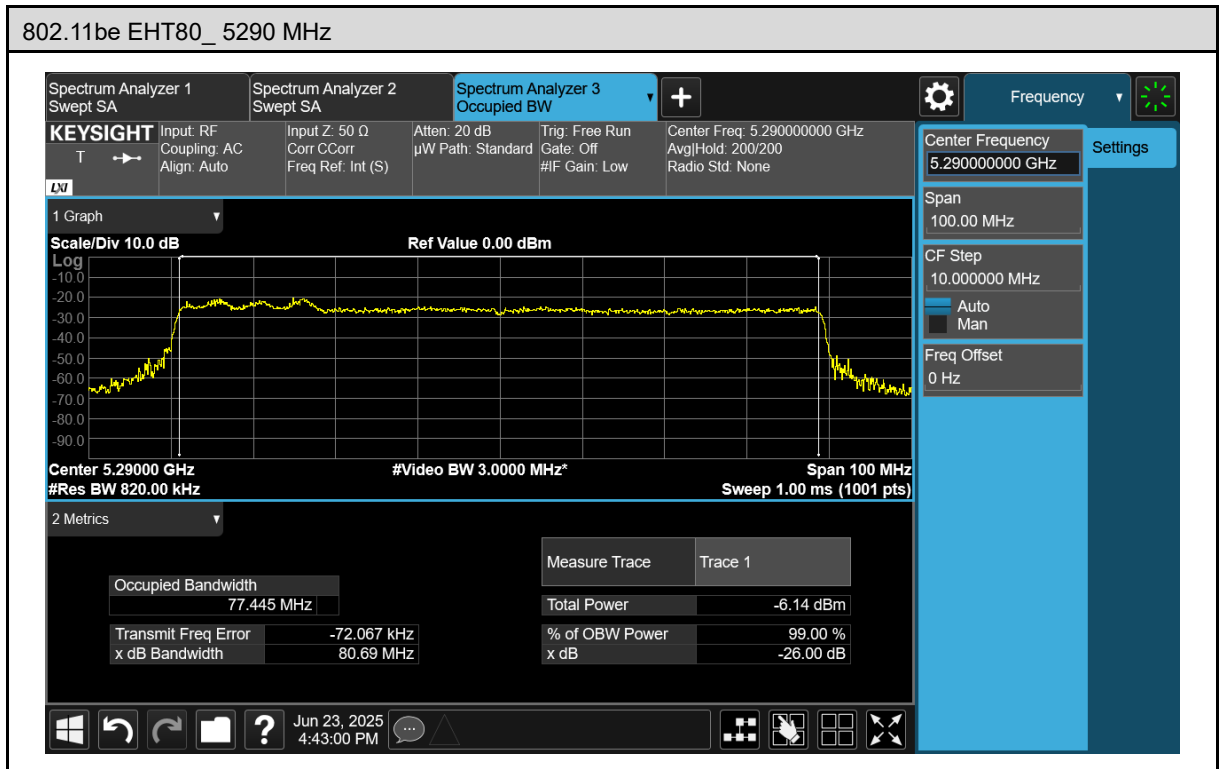

5.7. Statistical Performance check

■ Test Results

Test Mode		802.11be EHT20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	26	4	86.67%	≥ 60 %
	Type2	Random	Random	27	3	90.00%	≥ 60 %
	Type3	Random	Random	25	5	83.33%	≥ 60 %
	Type4	Random	Random	28	2	93.33%	≥ 60 %
	Type1~4					88.33%	≥ 80 %
	Type5	Random	Random	25	5	83.33%	≥ 80 %
	Type6	Hopping	1	26	4	86.67%	≥ 70 %

Test Mode		802.11be EHT40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	28	2	93.33%	≥ 60 %
	Type2	Random	Random	26	4	86.67%	≥ 60 %
	Type3	Random	Random	25	5	83.33%	≥ 60 %
	Type4	Random	Random	25	5	83.33%	≥ 60 %
	Type1~4					86.67%	≥ 80 %
	Type5	Random	Random	27	3	90.00%	≥ 80 %
	Type6	Hopping	1	26	4	86.67%	≥ 70 %

Test Mode		802.11be EHT80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	27	3	90.00%	≥ 60 %
	Type2	Random	Random	26	4	86.67%	≥ 60 %
	Type3	Random	Random	25	5	83.33%	≥ 60 %
	Type4	Random	Random	25	5	83.33%	≥ 60 %
	Type1~4					85.83%	≥ 80 %
	Type5	Random	Random	28	2	93.33%	≥ 80 %
	Type6	Hopping	1	27	3	90.00%	≥ 70 %

Test Mode		802.11be EHT160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	29	1	96.67%	≥ 60 %
	Type2	Random	Random	26	4	86.67%	≥ 60 %
	Type3	Random	Random	27	3	90.00%	≥ 60 %
	Type4	Random	Random	28	2	93.33%	≥ 60 %
	Type1~4					91.67%	≥ 80 %
	Type5	Random	Random	27	3	90.00%	≥ 80 %
	Type6	Hopping	1	28	2	93.33%	≥ 70 %

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	678	78	1475	1
2	5300	1	918	58	1089	1
3	5300	1	938	57	1066	0
4	5300	1	578	92	1730	1
5	5300	1	818	65	1222	1
6	5300	1	818	65	1222	1
7	5300	1	558	95	1792	1
8	5300	1	818	65	1222	1
9	5300	1	898	59	1114	1
10	5300	1	918	58	1089	1
11	5300	1	538	99	1859	1
12	5300	1	898	59	1114	0
13	5300	1	618	86	1618	1
14	5300	1	658	81	1520	1
15	5300	1	718	74	1393	1
16	5300	1	1605	33	623	1
17	5300	1	2104	26	475	1
18	5300	1	754	70	1326	1
19	5300	1	1528	35	654	1
20	5300	1	1343	40	745	1
21	5300	1	769	69	1300	0
22	5300	1	1496	36	668	1
23	5300	1	2123	25	471	1
24	5300	1	1148	46	871	1
25	5300	1	2999	18	333	1
26	5300	1	1037	51	964	1
27	5300	1	2429	22	412	0
28	5300	1	2036	26	491	1
29	5300	1	784	68	1276	1
30	5300	1	2676	20	374	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	3.30	150.90	28	6627	1
2	5300	3.00	190.80	24	5241	1
3	5300	2.00	184.60	25	5417	0
4	5300	4.70	176.90	28	5653	1
5	5300	4.80	152.70	25	6549	1
6	5300	1.30	208.30	25	4801	1
7	5300	3.60	185.80	26	5382	0
8	5300	3.40	194.90	27	5131	1
9	5300	4.70	200.00	23	5000	1
10	5300	2.10	172.20	27	5807	1
11	5300	1.70	188.80	28	5297	1
12	5300	2.30	179.80	26	5562	1
13	5300	1.70	155.40	26	6435	1
14	5300	1.60	188.70	26	5299	1
15	5300	3.20	212.00	26	4717	1
16	5300	4.30	156.40	24	6394	1
17	5300	3.90	192.80	29	5187	1
18	5300	2.00	180.00	29	5556	1
19	5300	1.00	152.70	23	6549	1
20	5300	2.70	185.30	26	5397	0
21	5300	4.70	169.00	23	5917	1
22	5300	3.10	216.60	27	4617	1
23	5300	4.10	194.00	28	5155	1
24	5300	3.60	156.20	26	6402	1
25	5300	4.10	198.60	26	5035	1
26	5300	1.10	190.10	27	5260	1
27	5300	3.20	222.10	25	4502	1
28	5300	2.80	211.90	28	4719	1
29	5300	2.40	159.40	29	6274	1
30	5300	4.70	195.40	25	5118	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	8.10	428.70	18	2332.63	1
2	5300	8.00	356.00	17	2808.99	1
3	5300	9.00	273.70	17	3653.64	1
4	5300	6.80	438.60	16	2279.98	0
5	5300	9.30	303.10	16	3299.24	1
6	5300	6.40	285.90	18	3497.73	1
7	5300	6.30	288.20	16	3469.81	0
8	5300	6.50	406.80	17	2458.21	0
9	5300	7.10	269.80	18	3706.45	1
10	5300	8.90	359.80	16	2779.32	1
11	5300	8.30	431.50	17	2317.50	1
12	5300	6.10	402.70	16	2483.24	1
13	5300	7.10	427.70	16	2338.09	0
14	5300	8.80	229.20	16	4363.00	1
15	5300	6.10	397.00	16	2518.89	1
16	5300	8.70	498.60	16	2005.62	1
17	5300	8.90	317.30	18	3151.59	1
18	5300	6.40	457.50	16	2185.79	1
19	5300	8.70	329.40	17	3035.82	1
20	5300	6.30	265.80	16	3762.23	1
21	5300	7.60	486.00	17	2057.61	1
22	5300	10.00	488.50	18	2047.08	1
23	5300	6.60	390.10	16	2563.45	1
24	5300	8.10	469.80	18	2128.57	1
25	5300	7.70	464.00	16	2155.17	1
26	5300	7.50	259.00	18	3861.00	1
27	5300	8.30	256.10	18	3904.72	1
28	5300	7.50	365.50	18	2735.98	0
29	5300	8.70	226.20	16	4420.87	1
30	5300	7.40	492.60	16	2030.04	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	14.00	384.40	15	2601	1
2	5300	12.60	363.10	14	2754	1
3	5300	19.30	295.70	15	3382	1
4	5300	18.70	302.00	15	3311	1
5	5300	16.20	414.60	15	2412	1
6	5300	18.00	495.50	12	2018	1
7	5300	13.30	248.90	16	4018	1
8	5300	12.70	335.40	13	2982	1
9	5300	18.90	499.70	15	2001	1
10	5300	18.40	354.10	16	2824	1
11	5300	15.00	497.50	16	2010	1
12	5300	19.90	282.90	12	3535	0
13	5300	11.50	405.60	13	2465	1
14	5300	15.00	333.40	15	2999	1
15	5300	19.30	398.30	14	2511	1
16	5300	15.30	257.20	13	3888	1
17	5300	14.30	288.90	12	3461	1
18	5300	16.30	216.00	15	4630	1
19	5300	14.90	291.10	16	3435	1
20	5300	19.20	413.80	13	2417	1
21	5300	18.10	456.40	13	2191	1
22	5300	13.40	369.20	12	2709	1
23	5300	13.60	215.40	14	4643	0
24	5300	15.30	274.10	13	3648	1
25	5300	15.50	385.40	13	2595	1
26	5300	14.70	423.40	12	2362	1
27	5300	18.90	485.70	16	2059	1
28	5300	17.40	477.40	13	2095	1
29	5300	14.70	469.00	13	2132	1
30	5300	13.20	310.50	12	3221	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5295.5	1	62.7	13	1654.8	1	1
	5296.5	2	92.0	15	1112.5	1	
	5296.5	3	85.0	16	1799.1	3	
	5292.5	4	83.2	6	1613.3	1	
	5294.5	5	83.3	9	1958.4	2	
	5295.5	6	61.8	12	1696.3	1	
	5292.5	7	63.3	5	1187.3	3	
	5293.5	8	85.7	8	1580.8	2	
	5296.5	9	50.2	15	1608.8	1	
	5293.5	10	54.1	7	1774.5	2	
	5294.5	11	58.1	10	1398.5	2	
2	5297.5	1	88.1	17	1582.2	3	1
	5296.5	2	51.0	16	1656.1	2	
	5294.5	3	98.9	10	1412.9	3	
	5292.5	4	85.6	5	1739.7	1	
	5293.5	5	61.5	8	1813.6	3	
	5295.5	6	71.5	12	1000.9	1	
	5293.5	7	94.3	8	1583.5	3	
	5295.5	8	51.8	12	1667.1	3	
	5298.5	9	93.6	19	1543.1	2	
	5295.5	10	69.9	13	1440.6	2	
	5293.5	11	87.5	8	1031.8	3	
	5296.5	12	66.4	15	1787.5	1	
3	5292.5	1	59.3	5	1154.2	1	1
	5296.5	2	61.5	14	1959.0	2	
	5292.5	3	73.4	6	1126.8	1	
	5292.5	4	67.8	6	1024.4	1	
	5294.5	5	77.8	9	1250.5	1	
	5297.5	6	84.3	18	1526.6	1	
	5297.5	7	86.0	17	1208.0	2	
	5295.5	8	58.7	13	1154.7	1	
	5296.5	9	97.2	16	1402.4	2	
	5297.5	10	96.3	18	1720.7	2	
	5297.5	11	58.3	17	1628.3	1	
	5294.5	12	92.6	9	1976.0	3	
	5297.5	13	72.1	18	1423.9	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5294.5	1	66.2	10	1948.4	1	1
	5293.5	2	92.9	7	1015.2	2	
	5295.5	3	55.2	12	1993.7	3	
	5296.5	4	99.1	16	1324.3	3	
	5292.5	5	64.8	6	1571.0	1	
	5292.5	6	97.3	6	1710.5	1	
	5292.5	7	73.0	6	1320.2	1	
	5294.5	8	68.5	10	1510.6	3	
	5297.5	9	73.7	17	1186.1	3	
5	5297.5	1	86.4	17	1940.4	1	1
	5294.5	2	93.1	11	1897.9	1	
	5298.5	3	95.8	19	1372.4	2	
	5295.5	4	68.1	13	1543.4	1	
	5297.5	5	85.9	18	1997.2	1	
	5295.5	6	71.8	13	1412.9	3	
	5298.5	7	76.2	19	1720.0	2	
	5298.5	8	89.0	19	1767.4	3	
	5296.5	9	83.7	15	1086.5	2	
	5296.5	10	81.7	16	1940.0	3	
	5294.5	11	79.7	9	1077.6	1	
	5293.5	12	99.7	7	1521.0	1	
	5297.5	13	60.5	18	1818.7	3	
	5296.5	14	65.2	16	1030.6	1	
	5296.5	15	60.8	15	1323.4	3	
6	5297.5	1	55.2	18	1674.0	3	1
	5295.5	2	81.5	13	1000.5	2	
	5294.5	3	57.0	11	1318.4	1	
	5293.5	4	86.6	7	1991.9	2	
	5297.5	5	99.1	17	1605.8	3	
	5298.5	6	55.3	20	1419.5	2	
	5297.5	7	72.3	17	1212.4	3	
	5298.5	8	69.4	20	1795.3	1	
	5297.5	9	95.7	18	1887.3	2	
	5293.5	10	89.9	7	1543.8	3	
	5295.5	11	56.4	12	1661.4	3	
	5295.5	12	52.2	12	1518.9	2	
	5292.5	13	89.3	6	1387.9	3	
	5296.5	14	95.7	14	1585.8	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5293.5	1	55.9	7	1697.0	3	1
	5294.5	2	93.3	11	1934.0	1	
	5294.5	3	81.8	10	1959.8	2	
	5295.5	4	94.9	13	1866.6	3	
	5294.5	5	92.5	9	1174.3	1	
	5292.5	6	89.0	6	1359.5	3	
	5294.5	7	53.5	10	1587.1	3	
	5297.5	8	66.1	18	1593.4	1	
	5295.5	9	54.6	12	1887.8	1	
	5294.5	10	69.4	11	1123.5	2	
	5298.5	11	82.5	20	1194.8	1	
	5298.5	12	64.8	19	1118.9	3	
	5296.5	13	53.8	16	1011.0	3	
	5293.5	14	71.8	7	1118.6	1	
	5295.5	15	96.9	13	1178.5	2	
	5298.5	16	77.8	19	1528.5	1	
	5293.5	17	56.9	8	1516.8	2	
8	5295.5	1	76.8	12	1001.2	3	1
	5296.5	2	96.2	14	1528.9	1	
	5296.5	3	59.5	16	1895.0	3	
	5296.5	4	88.7	16	1039.7	1	
	5298.5	5	84.6	19	1825.3	3	
	5294.5	6	54.0	9	1785.4	2	
	5294.5	7	52.2	9	1088.5	1	
	5295.5	8	68.1	13	1806.3	2	
	5294.5	9	91.9	10	1760.0	2	
	5293.5	10	77.6	8	1499.2	2	
	5296.5	11	99.1	15	1541.9	1	
	5297.5	12	74.7	17	1516.6	1	
	5298.5	13	73.7	19	1013.2	1	
	5293.5	14	89.7	8	1349.2	1	
	5296.5	15	75.9	16	1106.6	3	
	5296.5	16	53.4	16	1609.6	1	
	5292.5	17	79.6	5	1918.0	2	
	5297.5	18	87.2	18	1180.7	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5294.5	1	68.5	10	1064.1	2	1
	5293.5	2	63.2	7	1658.9	3	
	5296.5	3	64.2	14	1603.2	2	
	5294.5	4	92.3	9	1416.7	3	
	5294.5	5	99.8	9	1448.9	1	
	5296.5	6	88.5	14	1758.2	1	
	5295.5	7	97.2	12	1399.5	1	
	5296.5	8	83.5	16	1122.8	3	
	5294.5	9	80.0	10	1277.9	1	
	5298.5	10	78.0	19	1737.9	3	
	5296.5	11	94.6	15	1317.7	1	
	5297.5	12	65.7	17	1930.5	2	
	5292.5	13	85.7	5	1790.3	2	
	5293.5	14	73.5	7	1910.8	3	
	5294.5	15	93.4	11	1581.8	2	
	5297.5	16	57.2	18	1648.3	2	
	5295.5	17	51.2	13	1485.7	1	
	5298.5	18	93.2	19	1873.2	1	
	5295.5	19	82.5	13	1493.1	3	
10	5293.5	1	95.8	7	1270.8	3	1
	5292.5	2	81.2	6	1187.3	3	
	5297.5	3	80.8	18	1473.1	3	
	5293.5	4	92.3	7	1227.4	2	
	5295.5	5	81.8	12	1422.0	3	
	5297.5	6	74.8	17	1932.9	3	
	5294.5	7	70.4	10	1128.2	3	
	5292.5	8	61.6	6	1210.7	3	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	91.7	9	1416.1	1	1
	5300	2	91.6	16	1994.1	1	
	5300	3	51.3	16	1619.9	2	
	5300	4	70.3	16	1836.8	3	
	5300	5	85.5	12	1790.8	2	
	5300	6	67.7	12	1872.6	3	
	5300	7	93.7	9	1887.5	1	
	5300	8	87.3	8	1169.6	1	
	5300	9	50.2	18	1864.9	1	
	5300	10	61.8	9	1271.9	3	
	5300	11	88.1	10	1753.1	1	
	5300	12	94.0	19	1445.5	2	
	5300	13	75.5	16	1620.5	2	
	5300	14	56.9	10	1715.8	2	
	5300	15	50.1	16	1994.2	2	
	5300	16	89.2	12	1850.2	3	
12	5300	1	98.4	19	1486.4	2	1
	5300	2	73.2	16	1514.0	2	
	5300	3	90.4	12	1996.1	2	
	5300	4	52.7	16	1177.3	1	
	5300	5	78.5	11	1215.8	3	
	5300	6	97.6	13	1551.7	1	
	5300	7	86.4	14	1985.1	2	
	5300	8	74.8	12	1750.6	2	
	5300	9	72.0	15	1223.8	2	
	5300	10	51.9	6	1288.6	3	
	5300	11	95.9	12	1708.9	1	
	5300	12	51.7	6	1319.5	3	
	5300	13	57.0	16	1659.4	2	
	5300	14	63.2	7	1686.2	3	
	5300	15	68.1	6	1515.8	3	
	5300	16	54.6	8	1184.9	1	
	5300	17	86.6	10	1020.7	3	
	5300	18	77.2	12	1785.3	2	
	5300	19	64.7	6	1163.6	2	
	5300	20	81.6	14	1179.5	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	77.5	5	1099.6	1	1
	5300	2	54.6	14	1072.9	2	
	5300	3	69.8	14	1930.1	1	
	5300	4	52.3	14	1174.4	2	
	5300	5	71.7	6	1133.7	1	
	5300	6	80.5	13	1232.8	2	
	5300	7	94.7	9	1680.6	2	
	5300	8	90.3	15	1073.4	1	
	5300	9	75.8	18	1230.1	3	
	5300	10	54.7	17	1995.9	3	
14	5300	1	68.2	9	1525.1	1	1
	5300	2	85.9	12	1306.7	1	
	5300	3	55.0	7	1895.3	2	
	5300	4	82.1	11	1965.7	2	
	5300	5	58.8	6	1811.9	3	
	5300	6	76.4	10	1600.7	3	
	5300	7	95.7	9	1937.1	2	
	5300	8	61.5	7	1840.6	2	
	5300	9	59.6	17	1458.0	1	
	5300	10	92.7	16	1678.8	3	
	5300	11	71.2	20	1437.6	3	
	5300	12	61.5	17	1257.8	3	
	5300	13	63.4	6	1956.3	2	
	5300	14	57.2	19	1131.6	1	
	5300	15	82.3	6	1972.1	3	
	5300	16	90.0	11	1414.3	3	
	5300	17	79.5	15	1285.8	3	
	5300	18	76.9	18	1080.7	3	
	5300	19	51.6	12	1794.5	1	
	5300	20	50.7	10	1936.0	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	54.4	5	1079.3	1	0
	5300	2	51.4	8	1243.0	3	
	5300	3	88.3	11	1386.2	1	
	5300	4	54.4	13	1694.5	2	
	5300	5	62.4	10	1544.7	3	
	5300	6	59.4	16	1754.0	2	
	5300	7	71.7	8	1341.0	3	
	5300	8	54.7	6	1034.4	2	
	5300	9	81.2	16	1601.4	1	
	5300	10	97.9	15	1281.3	1	
	5300	11	99.9	16	1702.5	3	
	5300	12	89.2	14	1528.4	1	
	5300	13	59.1	16	1795.6	2	
	5300	14	97.0	8	1566.3	1	
	5300	15	67.5	6	1450.4	2	
	5300	16	74.8	6	1822.8	2	
	5300	17	73.8	12	1249.2	2	
	5300	18	88.5	10	1038.1	2	
	5300	19	63.0	19	1806.6	2	
16	5300	1	51.6	5	1982.3	1	1
	5300	2	97.1	6	1639.3	3	
	5300	3	99.6	6	1608.7	2	
	5300	4	63.7	19	1852.1	3	
	5300	5	53.2	11	1787.7	1	
	5300	6	94.8	19	1521.5	1	
	5300	7	69.4	15	1664.5	2	
	5300	8	86.8	11	1206.7	2	
	5300	9	72.5	9	1721.0	2	
	5300	10	89.7	12	1580.6	2	
	5300	11	62.9	7	1131.6	1	
	5300	12	99.0	14	1897.7	3	
	5300	13	56.0	17	1900.2	1	
	5300	14	54.2	18	1612.4	3	
	5300	15	89.3	10	1500.8	3	
	5300	16	67.3	18	1650.5	2	
	5300	17	83.2	12	1552.6	1	
	5300	18	57.5	6	1749.6	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	52.3	11	1090.2	2	1
	5300	2	53.2	16	1792.2	2	
	5300	3	86.8	9	1649.2	2	
	5300	4	59.8	20	1216.4	3	
	5300	5	63.6	8	1322.1	1	
	5300	6	94.2	15	1570.6	1	
	5300	7	56.4	6	1419.5	1	
	5300	8	64.6	19	1070.1	3	
	5300	9	53.6	20	1834.6	1	
	5300	10	81.3	16	1324.2	1	
	5300	11	99.3	20	1647.9	2	
	5300	12	73.1	9	1617.9	1	
	5300	13	87.4	18	1362.3	1	
	5300	14	90.1	13	1741.6	2	
	5300	15	51.9	9	1101.3	3	
	5300	16	84.0	12	1995.1	1	
	5300	17	80.2	12	1389.4	1	
18	5300	1	80.5	17	1616.7	1	1
	5300	2	56.6	10	1056.2	1	
	5300	3	52.9	17	1257.3	3	
	5300	4	61.9	5	1502.8	1	
	5300	5	73.7	18	1313.4	3	
	5300	6	74.5	12	1838.8	3	
	5300	7	82.1	16	1076.3	1	
	5300	8	84.6	10	1473.8	1	
	5300	9	64.6	8	1862.9	2	
	5300	10	84.3	11	1482.5	2	
	5300	11	65.8	10	1991.4	2	
	5300	12	61.4	18	1576.6	2	
	5300	13	76.7	16	1281.8	3	
	5300	14	86.0	10	1753.1	2	
	5300	15	77.3	7	1935.3	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	59.6	17	1199.0	1	0
	5300	2	80.0	10	1130.9	2	
	5300	3	57.9	6	1118.1	2	
	5300	4	83.8	18	1364.2	2	
	5300	5	85.5	7	1181.1	1	
	5300	6	66.7	8	1613.9	1	
	5300	7	85.4	18	1287.0	1	
	5300	8	90.4	19	1704.5	1	
	5300	9	51.4	5	1453.0	1	
	5300	10	95.9	17	1542.5	3	
	5300	11	88.3	20	1547.1	1	
	5300	12	78.2	14	1171.8	3	
	5300	13	77.6	6	1288.7	1	
	5300	14	91.9	6	1752.2	3	
20	5300	1	57.4	13	1430.4	3	1
	5300	2	57.3	14	1724.1	2	
	5300	3	63.7	5	1496.1	3	
	5300	4	91.8	7	1964.6	3	
	5300	5	78.8	20	1589.6	1	
	5300	6	91.2	20	1743.1	2	
	5300	7	84.4	14	1469.5	1	
	5300	8	62.9	17	1350.9	1	
	5300	9	52.7	18	1367.3	2	
	5300	10	68.1	6	1816.7	2	
21	5302.5	1	82.0	17	1144.5	2	0
	5306.5	2	85.1	7	1619.5	1	
	5305.5	3	73.0	11	1066.9	3	
	5302.5	4	97.9	18	1852.9	3	
	5303.5	5	99.4	16	1006.5	2	
	5301.5	6	52.4	20	1297.0	1	
	5305.5	7	97.8	11	1113.9	3	
	5307.5	8	52.0	6	1223.1	2	
	5302.5	9	61.3	17	1210.6	3	
	5302.5	10	52.7	18	1911.9	1	
	5303.5	11	86.5	14	1176.7	1	
	5301.5	12	78.7	19	1319.4	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5304.5	1	72.6	12	1519.2	3	1
	5302.5	2	59.5	17	1464.1	3	
	5302.5	3	82.5	17	1415.5	2	
	5301.5	4	81.7	20	1576.9	1	
	5307.5	5	60.3	5	1464.3	2	
	5304.5	6	67.2	13	1395.8	2	
	5303.5	7	90.3	16	1564.4	3	
	5304.5	8	68.5	13	1353.5	2	
	5302.5	9	55.9	18	1989.8	3	
23	5305.5	1	69.3	9	1864.2	1	1
	5305.5	2	59.6	11	1203.1	1	
	5303.5	3	72.5	15	1530.1	1	
	5303.5	4	64.7	14	1432.3	1	
	5305.5	5	91.1	11	1200.1	2	
	5301.5	6	68.9	20	1570.9	3	
	5303.5	7	84.1	16	1738.8	2	
	5303.5	8	73.4	16	1828.5	2	
	5303.5	9	88.2	14	1192.4	2	
	5303.5	10	84.8	15	1451.6	1	
	5303.5	11	63.6	15	1892.8	2	
	5303.5	12	88.7	14	1102.1	1	
	5302.5	13	52.3	17	1827.7	3	
	5307.5	14	62.6	6	1059.4	1	
	5306.5	15	84.8	7	1588.6	2	
24	5303.5	1	83.8	15	1519.3	2	0
	5304.5	2	63.6	13	1720.6	2	
	5305.5	3	60.4	9	1731.7	2	
	5305.5	4	80.4	9	1068.1	1	
	5303.5	5	58.5	14	1898.7	1	
	5305.5	6	75.8	10	1039.7	3	
	5306.5	0	65.6	8	1816.5	2	
	5303.5	8	72.6	14	1010.0	2	
	5305.5	9	90.8	9	1274.2	3	
	5303.5	10	66.3	14	1208.0	3	
	5303.5	11	97.7	15	1702.0	2	
	5306.5	12	81.7	8	1796.5	1	
	5301.5	13	58.3	19	1782.3	1	
	5304.5	14	74.4	12	1494.0	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5302.5	1	72.3	18	1188.8	2	1
	5303.5	2	61.3	16	1164.3	2	
	5306.5	3	94.9	8	1296.3	3	
	5306.5	4	61.8	8	1549.2	3	
	5304.5	5	95.1	12	1516.4	1	
	5304.5	6	96.7	13	1712.6	3	
	5303.5	7	89.6	15	1524.2	1	
	5301.5	8	56.2	20	1848.9	1	
	5304.5	9	65.7	13	1517.1	2	
	5303.5	10	75.0	16	1316.0	2	
	5305.5	11	50.6	9	1660.5	1	
	5301.5	12	89.5	19	1615.0	1	
	5307.5	13	82.7	6	1684.1	3	
	5303.5	14	70.5	14	1105.3	3	
	5305.5	15	66.7	11	1359.6	3	
	5305.5	16	69.0	9	1133.8	1	
	5306.5	17	64.4	7	1943.8	3	
	5303.5	18	97.7	15	1161.5	3	
26	5304.5	1	63.3	12	1180.5	2	1
	5304.5	2	85.6	13	1734.4	1	
	5303.5	3	83.8	14	1914.4	3	
	5302.5	4	75.5	17	1763.8	2	
	5302.5	5	55.4	17	1349.2	1	
	5305.5	6	66.7	10	1639.6	1	
	5303.5	7	74.8	14	1155.4	1	
	5304.5	8	60.0	12	1417.4	2	
	5305.5	9	84.2	11	1327.8	3	
	5303.5	10	75.3	15	1705.9	3	
	5303.5	11	51.4	15	1812.1	3	
	5301.5	12	78.6	19	1390.5	3	
	5306.5	13	91.7	7	1512.5	1	
	5303.5	14	93.3	16	1795.7	1	
	5306.5	15	88.7	8	1259.9	1	
	5305.5	16	92.3	11	1326.6	1	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5302.5	1	71.4	17	1601.2	3	1
	5305.5	2	51.5	11	1405.9	2	
	5303.5	3	87.5	16	1187.1	1	
	5303.5	4	84.5	16	1990.7	3	
	5303.5	5	75.5	15	1452.1	3	
	5303.5	6	70.8	14	1945.7	1	
	5305.5	7	77.9	10	1600.9	2	
	5302.5	8	60.4	17	1694.0	3	
	5305.5	9	81.4	11	1065.9	3	
	5303.5	10	82.7	16	1772.5	3	
	5307.5	11	51.1	6	1470.5	1	
	5307.5	12	69.3	5	1845.9	1	
	5302.5	13	51.8	18	1858.6	1	
	5307.5	14	70.9	5	1985.7	3	
	5305.5	15	92.3	9	1212.5	2	
	5301.5	16	51.0	19	1380.5	2	
	5303.5	17	95.8	16	1534.6	3	
	5306.5	18	94.8	7	1397.7	2	
	5304.5	19	62.3	13	1025.9	2	
	5305.5	20	69.8	11	1990.2	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5307.5	1	53.1	6	1762.2	1	1
	5302.5	2	89.3	18	1762.8	2	
	5301.5	3	93.1	19	1021.3	1	
	5305.5	4	77.5	11	1519.4	2	
	5305.5	5	69.6	9	1050.4	2	
	5306.5	6	60.6	8	1265.9	2	
	5306.5	7	60.1	7	1467.5	3	
	5306.5	8	72.9	8	1352.6	1	
	5303.5	9	63.6	14	1019.2	3	
	5301.5	10	79.9	20	1398.2	3	
	5305.5	11	62.6	10	1411.7	2	
	5301.5	12	89.7	20	1043.6	3	
	5304.5	13	70.2	12	1517.8	2	
	5302.5	14	62.1	17	1283.9	1	
	5302.5	15	92.6	18	1418.5	1	
	5303.5	16	56.6	15	1692.8	2	
	5307.5	17	94.2	6	1908.2	3	
	5303.5	18	56.8	16	1233.3	1	
	5304.5	19	90.2	13	1501.3	2	
	5306.5	20	73.9	7	1814.7	2	

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5307.5	1	63.3	6	1642.7	2	0
	5306.5	2	55.9	7	1817.0	3	
	5304.5	3	80.8	12	1008.9	3	
	5306.5	4	77.1	7	1453.7	1	
	5303.5	5	76.8	14	1674.5	1	
	5305.5	6	53.6	10	1530.9	1	
	5303.5	7	73.5	14	1101.8	3	
	5303.5	8	50.8	15	1494.2	3	
	5305.5	9	88.7	9	1670.7	2	
	5303.5	10	51.4	16	1405.1	3	
	5306.5	11	76.2	7	1217.9	2	
	5304.5	12	75.4	13	1018.0	1	
	5303.5	13	54.3	14	1987.7	3	
	5304.5	14	64.4	12	1829.8	2	
	5302.5	15	97.0	18	1994.9	3	
	5304.5	16	86.0	13	1141.2	2	
	5305.5	17	99.9	9	1727.9	1	
30	5305.5	1	60.4	10	1771.0	2	1
	5303.5	2	87.8	15	1056.8	2	
	5304.5	3	96.1	12	1960.8	2	
	5304.5	4	50.9	12	1233.6	3	
	5303.5	5	61.9	14	1462.5	1	
	5306.5	6	98.0	8	1762.1	3	
	5306.5	7	89.8	8	1127.2	3	
	5301.5	8	63.4	19	1898.2	3	
	5306.5	9	81.6	8	1411.1	1	
	5301.5	10	77.5	20	1053.6	2	
	5306.5	11	76.4	8	1875.5	1	
	5301.5	12	86.7	19	1035.7	3	
	5307.5	13	61.4	5	1201.7	1	
	5305.5	14	64.0	10	1419.5	2	
Detection Percentage (%)							83.33

Test Mode		802.11be EHT20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5300	1	333	9	0.333	300	1
2	5300	1	333	9	0.333	300	0
3	5300	1	333	9	0.333	300	1
4	5300	1	333	9	0.333	300	1
5	5300	1	333	9	0.333	300	1
6	5300	1	333	9	0.333	300	1
7	5300	1	333	9	0.333	300	0
8	5300	1	333	9	0.333	300	1
9	5300	1	333	9	0.333	300	1
10	5300	1	333	9	0.333	300	1
11	5300	1	333	9	0.333	300	1
12	5300	1	333	9	0.333	300	1
13	5300	1	333	9	0.333	300	0
14	5300	1	333	9	0.333	300	1
15	5300	1	333	9	0.333	300	1
16	5300	1	333	9	0.333	300	1
17	5300	1	333	9	0.333	300	1
18	5300	1	333	9	0.333	300	1
19	5300	1	333	9	0.333	300	1
20	5300	1	333	9	0.333	300	1
21	5300	1	333	9	0.333	300	1
22	5300	1	333	9	0.333	300	0
23	5300	1	333	9	0.333	300	1
24	5300	1	333	9	0.333	300	1
25	5300	1	333	9	0.333	300	1
26	5300	1	333	9	0.333	300	1
27	5300	1	333	9	0.333	300	1
28	5300	1	333	9	0.333	300	1
29	5300	1	333	9	0.333	300	1
30	5300	1	333	9	0.333	300	1
Detection Percentage (%)							86.67

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	518	102	1931	1
2	5310	1	3066	18	326	1
3	5310	1	778	68	1285	1
4	5310	1	918	58	1089	1
5	5310	1	858	62	1166	1
6	5310	1	538	99	1859	1
7	5310	1	718	74	1393	1
8	5310	1	758	70	1319	1
9	5310	1	858	62	1166	1
10	5310	1	638	83	1567	1
11	5310	1	538	99	1859	1
12	5310	1	518	102	1931	1
13	5310	1	698	76	1433	0
14	5310	1	938	57	1066	1
15	5310	1	618	86	1618	1
16	5310	1	649	82	1541	1
17	5310	1	2517	21	397	1
18	5310	1	2369	23	422	0
19	5310	1	1076	50	929	1
20	5310	1	2238	24	447	1
21	5310	1	1308	41	765	1
22	5310	1	2032	26	492	1
23	5310	1	933	57	1072	1
24	5310	1	951	56	1052	1
25	5310	1	1516	35	660	1
26	5310	1	1658	32	603	1
27	5310	1	1378	39	726	1
28	5310	1	1050	51	952	1
29	5310	1	1398	38	715	1
30	5310	1	2609	21	383	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1.20	173.20	27	5774	1
2	5310	2.10	178.10	26	5615	1
3	5310	3.20	226.40	24	4417	1
4	5310	4.80	219.00	26	4566	1
5	5310	3.40	226.10	29	4423	1
6	5310	1.90	225.10	28	4442	0
7	5310	2.70	152.60	28	6553	1
8	5310	1.10	202.40	26	4941	1
9	5310	1.70	181.60	25	5507	1
10	5310	4.50	168.10	24	5949	1
11	5310	1.30	150.30	23	6653	0
12	5310	3.80	163.80	24	6105	1
13	5310	4.80	210.20	24	4757	1
14	5310	4.80	200.40	25	4990	1
15	5310	4.60	158.50	23	6309	1
16	5310	1.50	151.40	27	6605	1
17	5310	2.60	160.00	24	6250	0
18	5310	2.10	202.30	25	4943	1
19	5310	1.80	206.20	25	4850	1
20	5310	4.30	193.10	24	5179	1
21	5310	4.20	155.70	24	6423	1
22	5310	1.30	218.00	25	4587	1
23	5310	1.80	177.90	25	5621	1
24	5310	3.00	203.90	25	4904	0
25	5310	2.90	221.10	23	4523	1
26	5310	4.80	222.60	27	4492	1
27	5310	3.90	178.20	25	5612	1
28	5310	2.40	212.60	29	4704	1
29	5310	4.90	182.90	26	5467	1
30	5310	4.60	191.60	29	5219	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	7.70	380.10	17	2630.89	1
2	5310	8.80	247.90	18	4033.88	1
3	5310	7.70	406.40	17	2460.63	1
4	5310	10.00	354.50	18	2820.87	0
5	5310	9.70	492.00	18	2032.52	1
6	5310	6.10	225.60	16	4432.62	1
7	5310	9.90	315.20	16	3172.59	1
8	5310	7.00	442.90	16	2257.85	1
9	5310	8.60	457.30	17	2186.75	0
10	5310	8.40	457.00	18	2188.18	1
11	5310	6.50	343.00	16	2915.45	1
12	5310	7.90	343.80	18	2908.67	0
13	5310	7.70	388.00	18	2577.32	1
14	5310	9.50	320.10	17	3124.02	1
15	5310	7.30	370.70	18	2697.60	1
16	5310	6.10	434.80	18	2299.91	1
17	5310	6.80	461.50	16	2166.85	1
18	5310	7.50	434.60	17	2300.97	0
19	5310	9.60	256.80	16	3894.08	1
20	5310	6.80	276.10	16	3621.88	0
21	5310	7.20	365.30	16	2737.48	1
22	5310	6.30	313.20	18	3192.85	1
23	5310	8.80	415.70	16	2405.58	1
24	5310	7.40	334.10	16	2993.12	1
25	5310	7.90	349.20	18	2863.69	1
26	5310	9.50	402.60	18	2483.85	1
27	5310	7.90	280.50	17	3565.06	1
28	5310	8.10	257.60	18	3881.99	1
29	5310	7.60	402.80	16	2482.62	1
30	5310	8.10	338.20	18	2956.83	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	11.30	317.60	13	3149	1
2	5310	13.60	227.20	13	4401	0
3	5310	11.70	205.40	13	4869	1
4	5310	13.90	493.30	16	2027	0
5	5310	14.60	214.30	16	4666	1
6	5310	17.20	494.50	13	2022	1
7	5310	16.60	215.50	16	4640	1
8	5310	14.40	465.00	12	2151	1
9	5310	18.50	484.80	12	2063	1
10	5310	17.80	343.60	16	2910	1
11	5310	13.20	360.30	13	2775	1
12	5310	12.90	325.00	14	3077	0
13	5310	16.80	463.30	12	2158	1
14	5310	17.20	240.20	12	4163	1
15	5310	13.60	341.20	12	2931	1
16	5310	15.60	333.80	12	2996	0
17	5310	19.40	236.80	14	4223	1
18	5310	12.50	425.70	12	2349	1
19	5310	17.60	352.00	13	2841	1
20	5310	17.30	272.90	16	3664	1
21	5310	20.00	418.50	12	2389	1
22	5310	12.30	490.00	14	2041	0
23	5310	18.90	302.00	14	3311	1
24	5310	14.40	310.70	14	3219	1
25	5310	13.40	222.40	14	4496	1
26	5310	17.30	217.80	13	4591	1
27	5310	16.10	444.10	12	2252	1
28	5310	13.00	422.60	16	2366	1
29	5310	19.80	332.50	14	3008	1
30	5310	15.90	468.80	14	2133	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5297	1	96.1	16	1753.7	3	1
	5295	2	82.9	10	1032.2	2	
	5293	3	91.6	6	1323.5	2	
	5296	4	69.2	12	1190.1	2	
	5298	5	99.4	18	1019.9	2	
	5298	6	75.0	17	1449.2	3	
	5298	7	61.8	18	1735.3	2	
	5296	8	70.3	12	1860.7	2	
	5298	9	56.3	18	1553.2	3	
	5297	10	65.6	15	1389.2	1	
	5296	11	78.3	12	1908.6	3	
2	5295	1	96.6	11	1461.6	3	1
	5293	2	99.8	6	1496.0	2	
	5296	3	88.7	12	1860.9	3	
	5294	4	53.4	8	1547.1	2	
	5294	5	94.3	8	1574.5	3	
	5299	6	89.1	20	1077.5	2	
	5297	7	66.8	15	1512.4	3	
	5296	8	51.7	12	1249.1	2	
	5298	9	64.1	17	1273.4	2	
	5293	10	91.5	5	1996.2	3	
	5298	11	73.7	17	1178.1	2	
	5295	12	93.3	10	1426.5	1	
	5294	1	75.4	8	1518.3	2	1
3	5295	2	63.1	9	1301.3	3	
	5296	3	78.2	12	1332.4	3	
	5297	4	58.2	15	1339.4	2	
	5293	5	98.5	6	1257.0	1	
	5297	6	78.7	16	1145.3	1	
	5295	7	59.3	10	1689.7	3	
	5296	8	99.2	12	1092.9	1	
	5296	9	77.8	12	1705.6	1	
	5297	10	67.8	15	1947.9	3	
	5297	11	71.2	14	1714.6	3	
	5299	12	88.1	19	1611.3	1	
	5299	13	77.1	19	1590.8	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5296	1	98.5	13	1198.6	1	1
	5295	2	82.2	11	1190.8	2	
	5295	3	75.9	10	1992.4	2	
	5294	4	88.4	8	1575.5	2	
	5296	5	76.6	13	1701.7	3	
	5294	6	73.5	8	1027.4	1	
	5295	7	64.7	9	1220.4	2	
	5294	8	75.1	7	1855.7	2	
	5295	9	89.7	9	1624.9	2	
5	5293	1	94.6	5	1548.9	1	1
	5297	2	78.7	16	1399.2	3	
	5297	3	99.5	15	1847.6	2	
	5299	4	68.2	19	1892.3	3	
	5295	5	78.9	9	1902.4	2	
	5297	6	91.2	15	1651.8	2	
	5293	7	90.5	6	1210.4	2	
	5297	8	69.2	14	1312.9	2	
	5298	9	51.7	18	1820.4	3	
	5299	10	81.4	19	1075.5	3	
	5297	11	93.7	15	1278.9	3	
	5296	12	93.2	12	1733.3	1	
	5297	13	89.0	14	1510.1	3	
	5296	14	87.3	12	1201.3	2	
	5296	15	74.5	12	1860.3	1	
6	5297	1	94.1	15	1175.3	3	1
	5294	2	64.6	7	1582.7	1	
	5299	3	97.1	19	1200.7	3	
	5297	4	87.1	16	1295.2	2	
	5294	5	99.2	7	1722.0	3	
	5297	6	54.2	15	1432.8	1	
	5296	7	94.9	12	1036.0	2	
	5293	8	93.9	5	1891.6	3	
	5296	9	79.3	13	1925.6	2	
	5296	10	95.6	12	1555.4	1	
	5293	11	66.9	6	1963.2	3	
	5295	12	59.7	9	1504.5	3	
	5298	13	98.2	18	1018.9	1	
	5299	14	89.3	19	1405.1	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5295	1	54.2	9	1735.4	3	1
	5294	2	78.0	8	1281.0	1	
	5299	3	87.3	19	1901.1	3	
	5298	4	71.5	17	1087.6	2	
	5299	5	58.9	19	1937.0	3	
	5294	6	62.9	8	1038.8	2	
	5293	7	79.3	6	1199.3	2	
	5296	8	80.0	12	1412.4	2	
	5298	9	55.7	18	1207.7	3	
	5298	10	71.3	17	1743.1	1	
	5297	11	56.1	14	1399.6	2	
	5297	12	58.7	16	1395.5	1	
	5294	13	53.5	7	1114.5	2	
	5295	14	55.6	11	1260.3	3	
	5293	15	76.9	5	1298.9	2	
	5293	16	58.7	6	1126.6	2	
	5297	17	80.9	16	1926.0	2	
8	5298	1	53.3	18	1808.9	1	1
	5295	2	59.6	9	1206.9	3	
	5297	3	73.4	15	1354.7	3	
	5297	4	51.7	14	1110.0	1	
	5294	5	66.9	7	1255.8	3	
	5295	6	56.9	10	1451.5	3	
	5296	7	88.9	12	1669.7	2	
	5298	8	88.7	18	1905.8	3	
	5299	9	65.6	19	1535.8	3	
	5299	10	55.4	19	1571.7	1	
	5297	11	67.9	16	1295.5	1	
	5297	12	69.2	16	1401.7	1	
	5297	13	51.9	14	1245.1	2	
	5294	14	73.7	8	1759.1	3	
	5296	15	80.1	12	1118.6	2	
	5299	16	95.1	20	1747.8	1	
	5294	17	73.3	7	1555.0	1	
	5294	18	87.0	8	1201.9	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5295	1	52.2	10	1262.6	2	1
	5299	2	61.7	19	1994.4	3	
	5299	3	86.9	19	1102.9	3	
	5298	4	88.0	17	1139.7	3	
	5295	5	96.0	9	1323.6	2	
	5293	6	95.4	6	1205.5	3	
	5298	7	91.8	18	1825.0	3	
	5298	8	88.6	17	1851.8	3	
	5297	9	91.4	16	1647.5	1	
	5297	10	75.0	15	1417.3	3	
	5295	11	66.8	11	1086.7	3	
	5295	12	96.4	9	1785.8	3	
	5295	13	61.3	11	1677.0	1	
	5296	14	53.0	13	1963.6	1	
	5298	15	82.2	18	1852.5	3	
	5297	16	51.6	15	1118.7	2	
	5293	17	72.6	6	1558.6	3	
	5297	18	55.0	15	1471.4	2	
	5294	19	96.7	8	1320.9	2	
10	5296	1	82.2	12	1253.7	1	1
	5296	2	98.3	12	1646.8	3	
	5296	3	95.8	12	1781.1	2	
	5293	4	78.3	6	1065.7	2	
	5297	5	82.5	16	1900.9	1	
	5297	6	54.0	14	1940.3	1	
	5297	7	86.1	16	1887.5	3	
	5298	8	66.2	17	1486.9	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	79.0	5	1397.6	1	0
	5310	2	88.6	19	1468.9	1	
	5310	3	89.2	11	1132.8	1	
	5310	4	83.6	17	1975.2	2	
	5310	5	67.7	9	1129.8	2	
	5310	6	76.7	15	1260.3	2	
	5310	7	84.1	8	1936.1	2	
	5310	8	53.4	15	1846.7	3	
	5310	9	90.2	6	1145.9	2	
	5310	10	84.5	10	1430.5	3	
	5310	11	76.2	12	1812.2	1	
	5310	12	81.0	16	1709.2	2	
	5310	13	61.0	16	1917.8	2	
	5310	14	57.1	18	1008.8	3	
	5310	15	86.1	6	1583.4	3	
	5310	16	73.6	15	1235.7	3	
12	5310	1	97.2	10	1798.7	2	0
	5310	2	100.0	18	1407.8	1	
	5310	3	95.2	9	1099.0	2	
	5310	4	69.1	6	1581.0	1	
	5310	5	58.3	20	1037.2	1	
	5310	6	85.4	13	1567.5	1	
	5310	7	68.8	8	1156.4	3	
	5310	8	65.9	9	1291.3	3	
	5310	9	70.1	19	1595.2	3	
	5310	10	62.6	14	1866.3	3	
	5310	11	58.3	18	1125.6	1	
	5310	12	50.2	13	1743.4	3	
	5310	13	69.7	13	1494.2	3	
	5310	14	54.2	17	1124.3	2	
	5310	15	90.6	14	1894.8	1	
	5310	16	57.7	12	1711.4	3	
	5310	17	92.9	13	1288.9	3	
	5310	18	98.4	18	1305.3	3	
	5310	19	52.0	9	1266.6	2	
	5310	20	96.3	17	1399.2	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	98.2	11	1529.4	2	1
	5310	2	56.9	18	1796.1	1	
	5310	3	78.5	12	1585.8	3	
	5310	4	68.2	16	1910.9	3	
	5310	5	51.3	18	1021.3	2	
	5310	6	89.9	19	1924.2	3	
	5310	7	77.3	18	1270.2	1	
	5310	8	94.0	17	1218.8	1	
	5310	9	57.9	11	1351.9	3	
	5310	10	91.7	10	1247.3	2	
14	5310	1	74.4	5	1953.1	1	1
	5310	2	67.6	10	1885.4	1	
	5310	3	63.1	12	1883.2	1	
	5310	4	66.8	18	1028.6	3	
	5310	5	63.3	15	1243.3	2	
	5310	6	93.6	12	1909.6	1	
	5310	7	59.1	9	1804.3	2	
	5310	8	67.5	6	1796.5	3	
	5310	9	96.0	5	1922.9	3	
	5310	10	53.6	10	1155.7	1	
	5310	11	72.3	5	1202.3	2	
	5310	12	77.4	16	1525.7	1	
	5310	13	90.0	9	1106.6	1	
	5310	14	96.8	19	1395.2	3	
	5310	15	73.0	13	1876.3	2	
	5310	16	99.8	12	1522.6	3	
	5310	17	63.5	13	1662.3	3	
	5310	18	88.1	16	1788.4	1	
	5310	19	56.4	10	1028.0	2	
	5310	20	65.8	10	1404.8	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	90.5	18	1234.5	3	1
	5310	2	78.3	16	1179.6	2	
	5310	3	85.3	13	1193.1	2	
	5310	4	96.5	18	1195.5	3	
	5310	5	77.4	8	1338.8	1	
	5310	6	82.6	20	1202.3	2	
	5310	7	81.9	13	1912.2	1	
	5310	8	75.5	5	1278.7	2	
	5310	9	51.5	14	1612.5	1	
	5310	10	85.1	14	1355.5	3	
	5310	11	66.4	9	1505.0	1	
	5310	12	93.5	8	1358.8	1	
	5310	13	57.2	11	1774.8	3	
	5310	14	82.5	12	1075.1	3	
	5310	15	88.9	11	1566.1	1	
	5310	16	64.9	10	1591.7	2	
	5310	17	88.6	5	1913.9	2	
	5310	18	81.4	9	1377.1	1	
	5310	19	58.8	12	1469.7	3	
16	5310	1	83.4	13	1277.6	2	1
	5310	2	86.0	17	1246.1	3	
	5310	3	79.6	10	1166.7	2	
	5310	4	56.8	16	1381.9	1	
	5310	5	95.4	7	1379.0	2	
	5310	6	75.0	6	1477.1	2	
	5310	7	78.5	16	1919.4	2	
	5310	8	94.7	20	1173.7	3	
	5310	9	69.5	9	1896.1	3	
	5310	10	89.0	6	1915.8	3	
	5310	11	73.7	13	1922.8	3	
	5310	12	56.5	14	1019.0	3	
	5310	13	64.3	14	1760.7	2	
	5310	14	63.9	7	1551.3	3	
	5310	15	53.9	10	1440.5	3	
	5310	16	63.2	9	1415.3	1	
	5310	17	99.0	8	1766.1	1	
	5310	18	61.6	17	1962.2	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5310	1	88.3	17	1955.6	2	0
	5310	2	89.3	12	1592.2	3	
	5310	3	96.4	12	1827.8	3	
	5310	4	70.8	10	1105.7	2	
	5310	5	78.7	7	1759.7	3	
	5310	6	71.0	11	1029.5	1	
	5310	7	85.2	18	1208.0	3	
	5310	8	67.4	20	1412.4	1	
	5310	9	82.2	12	1330.2	1	
	5310	10	64.5	15	1090.6	1	
	5310	11	69.5	12	1071.6	1	
	5310	12	70.0	6	1460.9	2	
	5310	13	86.4	19	1120.0	1	
	5310	14	85.6	11	1493.9	1	
	5310	15	58.5	12	1198.6	2	
	5310	16	92.2	19	1140.5	3	
	5310	17	68.4	6	1344.5	3	
18	5310	1	94.4	5	1765.8	2	1
	5310	2	97.8	10	1668.2	1	
	5310	3	52.6	17	1084.3	2	
	5310	4	61.6	6	1894.6	2	
	5310	5	55.5	17	1642.4	2	
	5310	6	91.1	10	1605.8	1	
	5310	7	65.3	7	1228.6	2	
	5310	8	57.9	10	1032.3	3	
	5310	9	95.3	9	1000.6	3	
	5310	10	65.9	20	1536.6	2	
	5310	11	91.7	9	1486.1	1	
	5310	12	55.2	13	1985.8	3	
	5310	13	63.8	9	1041.2	1	
	5310	14	65.1	20	1446.8	3	
	5310	15	76.0	7	1411.6	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	67.6	16	1433.0	1	1
	5310	2	65.9	8	1539.4	3	
	5310	3	80.1	12	1203.0	1	
	5310	4	51.2	18	1967.6	3	
	5310	5	63.0	18	1860.6	2	
	5310	6	82.5	16	1000.2	2	
	5310	7	73.2	16	1585.8	3	
	5310	8	51.4	14	1016.9	1	
	5310	9	65.1	16	1181.6	2	
	5310	10	91.9	15	1281.1	3	
	5310	11	92.7	17	1822.4	2	
	5310	12	74.9	7	1241.0	2	
	5310	13	86.6	19	1592.0	1	
	5310	14	98.8	9	1100.9	1	
20	5310	1	86.9	9	1690.4	2	1
	5310	2	51.5	9	1023.4	1	
	5310	3	92.7	6	1946.5	2	
	5310	4	70.0	13	1767.4	2	
	5310	5	95.9	9	1311.0	1	
	5310	6	68.5	14	1626.6	3	
	5310	7	58.5	15	1325.2	2	
	5310	8	74.1	18	1485.7	2	
	5310	9	64.3	5	1585.3	2	
	5310	10	57.1	16	1297.8	3	
21	5325	1	92.3	9	1459.4	3	1
	5327	2	81.7	6	1552.5	3	
	5322	3	82.8	18	1875.6	2	
	5326	4	78.4	7	1231.9	3	
	5326	5	94.7	7	1746.6	1	
	5327	6	82.7	5	1081.5	1	
	5325	7	83.0	11	1108.7	3	
	5321	8	92.1	19	1663.6	3	
	5324	9	88.5	13	1626.5	2	
	5326	10	95.9	8	1225.7	2	
	5323	11	66.5	14	1705.0	2	
	5326	12	54.9	7	1563.0	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5325	1	67.0	10	1595.8	3	1
	5323	2	77.6	14	1012.4	1	
	5324	3	62.1	12	1539.5	1	
	5324	4	81.2	12	1586.4	1	
	5323	5	59.3	15	1817.2	2	
	5321	6	66.9	20	1211.1	1	
	5324	7	69.9	13	1996.1	1	
	5325	8	73.6	11	1572.0	3	
	5325	9	63.8	10	1397.3	2	
23	5327	1	70.3	5	1322.9	1	1
	5324	2	76.7	12	1774.2	1	
	5325	3	96.9	11	1203.3	3	
	5321	4	54.2	19	1174.9	3	
	5327	5	75.8	6	1667.3	1	
	5324	6	65.8	13	1398.7	1	
	5325	7	91.7	9	1515.3	3	
	5323	8	98.1	15	1669.5	1	
	5323	9	63.5	15	1122.5	2	
	5323	10	65.3	14	1905.6	2	
	5326	11	59.4	7	1928.8	3	
	5326	12	58.0	8	1197.8	2	
	5325	13	78.7	10	1414.1	1	
	5323	14	59.9	15	1602.7	3	
	5322	15	96.2	18	1324.4	3	
24	5321	1	73.3	20	1001.6	3	1
	5324	2	79.7	12	1356.6	1	
	5325	3	62.3	9	1575.8	1	
	5322	4	91.4	18	1527.0	2	
	5327	5	80.0	5	1918.1	2	
	5325	6	69.1	9	1048.1	1	
	5325	7	73.7	9	1031.8	3	
	5327	8	70.6	6	1464.5	3	
	5327	9	95.8	6	1142.7	1	
	5324	10	60.0	12	1660.5	1	
	5325	11	96.0	11	1365.2	2	
	5322	12	80.8	17	1007.4	1	
	5326	13	82.3	8	1028.4	1	
	5321	14	81.1	19	1585.9	1	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5323	1	95.0	15	1789.4	1	1
	5327	2	69.7	6	1614.5	3	
	5327	3	88.2	6	1778.5	3	
	5323	4	90.1	14	1934.0	3	
	5322	5	95.1	18	1607.6	3	
	5326	6	60.7	7	1821.5	1	
	5327	7	93.0	6	1096.4	2	
	5326	8	71.4	8	1995.3	1	
	5321	9	83.1	20	1130.1	1	
	5322	10	92.0	18	1648.7	1	
	5327	11	73.3	6	1801.3	1	
	5323	12	68.1	15	1753.8	2	
	5327	13	83.1	6	1586.5	1	
	5323	14	96.4	14	1589.5	3	
	5325	15	99.1	11	1250.2	2	
	5327	16	67.5	6	1343.1	1	
	5323	17	50.9	16	1224.7	1	
	5325	18	83.1	9	1260.6	2	
26	5323	1	70.9	15	1046.8	1	1
	5325	2	85.5	11	1580.8	2	
	5322	3	88.4	17	1391.3	2	
	5327	4	87.6	6	1946.9	2	
	5323	5	83.8	16	1088.5	3	
	5323	6	90.9	15	1541.3	1	
	5325	7	80.1	10	1964.2	2	
	5327	8	83.7	5	1786.1	3	
	5322	9	57.8	17	1382.3	2	
	5327	10	72.1	5	1590.3	2	
	5327	11	67.7	6	1210.2	1	
	5322	12	81.4	17	1255.8	3	
	5323	13	71.8	14	1631.3	2	
	5322	14	87.8	18	1282.4	3	
	5327	15	78.5	6	1791.3	3	
	5324	16	64.4	12	1501.6	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5322	1	78.5	18	1418.1	1	1
	5326	2	68.8	7	1775.6	3	
	5327	3	68.3	6	1731.8	3	
	5325	4	73.4	11	1328.0	1	
	5322	5	95.6	17	1108.6	1	
	5323	6	82.0	14	1526.0	2	
	5325	7	75.7	11	1112.4	1	
	5323	8	95.1	16	1020.3	2	
	5323	9	90.0	15	1770.8	2	
	5327	10	90.3	6	1160.0	1	
	5323	11	91.6	14	1565.0	2	
	5322	12	70.5	18	1171.6	1	
	5325	13	60.9	9	1155.9	3	
	5322	14	59.1	17	1482.1	1	
	5323	15	63.2	14	1300.7	3	
	5321	16	68.3	20	1162.4	3	
	5322	17	50.9	18	1278.7	1	
	5327	18	59.6	6	1966.7	2	
	5321	19	96.0	19	1867.6	2	
	5323	20	79.6	16	1395.4	2	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5327	1	79.1	6	1605.0	3	1
	5327	2	55.9	6	1709.1	3	
	5323	3	99.2	14	1831.4	3	
	5323	4	81.2	16	1372.7	3	
	5321	5	54.0	19	1236.5	2	
	5326	6	64.0	8	1684.3	3	
	5326	7	54.9	7	1631.0	2	
	5323	8	54.7	15	1755.0	2	
	5322	9	74.8	17	1062.3	3	
	5323	10	92.1	15	1551.4	2	
	5323	11	78.0	15	1591.5	2	
	5324	12	99.3	13	1238.2	2	
	5321	13	59.0	19	1053.6	1	
	5327	14	85.4	5	1919.4	2	
	5322	15	87.9	18	1287.2	1	
	5321	16	54.9	20	1394.1	2	
	5321	17	51.3	19	1284.2	3	
	5323	18	71.9	15	1305.1	3	
	5323	19	74.7	15	1422.0	2	
	5321	20	77.6	19	1719.9	3	

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5326	1	97.7	8	1072.5	1	1
	5321	2	92.7	19	1646.2	3	
	5325	3	77.1	11	1259.4	3	
	5325	4	57.5	11	1437.5	3	
	5326	5	95.9	8	1435.0	2	
	5325	6	91.5	9	1604.4	3	
	5323	7	59.4	15	1420.0	3	
	5322	8	62.3	17	1122.6	3	
	5325	9	67.2	9	1636.0	2	
	5325	10	81.5	10	1889.9	1	
	5321	11	82.0	19	1502.0	1	
	5326	12	68.4	8	1311.7	2	
	5325	13	84.2	9	1211.2	2	
	5326	14	71.7	8	1448.5	3	
	5326	15	95.9	8	1091.0	1	
	5326	16	51.1	7	1481.0	2	
	5323	17	98.4	15	1898.1	1	
30	5326	1	91.3	8	1920.9	3	1
	5326	2	57.9	7	1737.5	3	
	5323	3	68.3	16	1682.0	1	
	5325	4	75.7	10	1975.7	2	
	5325	5	87.7	9	1116.3	2	
	5322	6	87.4	17	1042.1	2	
	5325	7	97.7	10	1885.7	1	
	5327	8	96.4	6	1495.3	2	
	5324	9	68.8	13	1784.2	1	
	5323	10	80.2	16	1038.2	1	
	5322	11	85.1	18	1541.9	3	
	5321	12	52.9	19	1365.3	2	
	5322	13	87.4	17	1374.6	2	
	5325	14	82.2	9	1341.1	3	
Detection Percentage (%)							90.00

Test Mode		802.11be EHT40					
Frequency		5310 MHz					
Radar Signal		Type 6					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5310	1	333	9	0.333	300	1
2	5310	1	333	9	0.333	300	1
3	5310	1	333	9	0.333	300	0
4	5310	1	333	9	0.333	300	1
5	5310	1	333	9	0.333	300	1
6	5310	1	333	9	0.333	300	1
7	5310	1	333	9	0.333	300	1
8	5310	1	333	9	0.333	300	0
9	5310	1	333	9	0.333	300	1
10	5310	1	333	9	0.333	300	1
11	5310	1	333	9	0.333	300	1
12	5310	1	333	9	0.333	300	1
13	5310	1	333	9	0.333	300	0
14	5310	1	333	9	0.333	300	1
15	5310	1	333	9	0.333	300	1
16	5310	1	333	9	0.333	300	1
17	5310	1	333	9	0.333	300	1
18	5310	1	333	9	0.333	300	1
19	5310	1	333	9	0.333	300	0
20	5310	1	333	9	0.333	300	1
21	5310	1	333	9	0.333	300	1
22	5310	1	333	9	0.333	300	1
23	5310	1	333	9	0.333	300	1
24	5310	1	333	9	0.333	300	1
25	5310	1	333	9	0.333	300	1
26	5310	1	333	9	0.333	300	1
27	5310	1	333	9	0.333	300	1
28	5310	1	333	9	0.333	300	1
29	5310	1	333	9	0.333	300	1
30	5310	1	333	9	0.333	300	1
Detection Percentage (%)							86.67

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	838	63	1193	1
2	5290	1	778	68	1285	1
3	5290	1	698	76	1433	1
4	5290	1	778	68	1285	1
5	5290	1	738	72	1355	1
6	5290	1	538	99	1859	1
7	5290	1	618	86	1618	1
8	5290	1	798	67	1253	1
9	5290	1	758	70	1319	1
10	5290	1	778	68	1285	1
11	5290	1	718	74	1393	1
12	5290	1	858	62	1166	0
13	5290	1	718	74	1393	1
14	5290	1	758	70	1319	1
15	5290	1	718	74	1393	1
16	5290	1	1279	42	782	1
17	5290	1	2285	24	438	1
18	5290	1	1328	40	753	0
19	5290	1	2699	20	371	1
20	5290	1	2391	23	418	1
21	5290	1	1742	31	574	1
22	5290	1	1299	41	770	1
23	5290	1	630	84	1587	1
24	5290	1	2666	20	375	1
25	5290	1	771	69	1297	1
26	5290	1	1761	30	568	0
27	5290	1	1821	29	549	1
28	5290	1	1557	34	642	1
29	5290	1	950	56	1053	1
30	5290	1	2229	24	449	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	4.90	166.70	25	5999	1
2	5290	4.80	155.80	23	6418	1
3	5290	2.80	195.90	27	5105	1
4	5290	2.20	180.90	26	5528	1
5	5290	2.30	178.70	23	5596	1
6	5290	3.70	201.60	28	4960	0
7	5290	3.80	180.30	27	5546	0
8	5290	3.80	153.10	28	6532	1
9	5290	3.10	228.40	27	4378	1
10	5290	3.10	151.10	29	6618	1
11	5290	2.70	150.90	29	6627	1
12	5290	1.00	178.40	23	5605	1
13	5290	4.80	196.90	28	5079	1
14	5290	3.90	158.80	28	6297	1
15	5290	4.60	172.50	29	5797	1
16	5290	1.00	191.00	23	5236	0
17	5290	4.90	208.90	26	4787	1
18	5290	2.00	174.10	27	5744	1
19	5290	1.90	205.40	29	4869	1
20	5290	3.40	192.90	25	5184	1
21	5290	4.60	184.50	25	5420	1
22	5290	3.10	182.10	26	5491	1
23	5290	2.30	182.50	28	5479	1
24	5290	2.30	207.20	28	4826	1
25	5290	3.80	221.50	24	4515	1
26	5290	2.50	204.20	29	4897	1
27	5290	1.20	157.90	29	6333	0
28	5290	3.50	196.60	26	5086	1
29	5290	1.30	218.20	28	4583	1
30	5290	5.00	164.00	27	6098	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	6.70	392.60	17	2547.12	1
2	5290	10.00	224.70	18	4450.38	1
3	5290	9.60	305.30	18	3275.47	0
4	5290	9.10	488.00	16	2049.18	1
5	5290	9.20	384.60	18	2600.10	1
6	5290	6.20	482.10	17	2074.26	0
7	5290	7.10	227.00	18	4405.29	1
8	5290	7.90	229.50	16	4357.30	1
9	5290	8.30	251.60	18	3974.56	1
10	5290	7.00	437.30	16	2286.76	1
11	5290	9.10	248.90	18	4017.68	1
12	5290	9.60	288.20	17	3469.81	0
13	5290	8.50	204.50	18	4889.98	1
14	5290	7.60	492.20	17	2031.69	1
15	5290	10.00	287.60	17	3477.05	1
16	5290	9.00	413.70	17	2417.21	1
17	5290	9.60	450.30	18	2220.74	1
18	5290	8.70	282.50	16	3539.82	1
19	5290	8.30	380.50	18	2628.12	1
20	5290	6.80	454.40	18	2200.70	1
21	5290	9.20	450.70	18	2218.77	1
22	5290	6.80	350.50	16	2853.07	1
23	5290	6.10	445.70	18	2243.66	0
24	5290	9.90	435.10	16	2298.32	1
25	5290	9.80	324.40	16	3082.61	1
26	5290	6.50	351.90	16	2841.72	1
27	5290	7.60	475.30	17	2103.93	1
28	5290	8.90	483.70	17	2067.40	0
29	5290	7.00	311.00	16	3215.43	1
30	5290	7.10	372.60	17	2683.84	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	13.80	403.00	15	2481	1
2	5290	17.00	471.30	14	2122	1
3	5290	16.80	429.50	12	2328	0
4	5290	14.40	249.30	14	4011	1
5	5290	12.20	498.20	13	2007	0
6	5290	17.30	418.80	16	2388	1
7	5290	16.50	458.80	12	2180	1
8	5290	19.80	404.30	13	2473	0
9	5290	12.10	426.60	13	2344	1
10	5290	19.10	444.80	14	2248	1
11	5290	19.70	277.50	12	3604	1
12	5290	17.90	305.10	13	3278	1
13	5290	15.40	490.30	12	2040	0
14	5290	14.20	453.80	15	2204	1
15	5290	14.80	371.90	13	2689	1
16	5290	17.90	228.90	16	4369	1
17	5290	14.20	286.10	14	3495	1
18	5290	16.10	205.40	12	4869	1
19	5290	18.80	305.70	13	3271	1
20	5290	17.40	354.10	12	2824	1
21	5290	12.80	475.00	15	2105	0
22	5290	16.60	415.80	15	2405	1
23	5290	13.40	431.30	16	2319	1
24	5290	15.20	220.30	12	4539	1
25	5290	11.10	311.40	13	3211	1
26	5290	12.70	219.10	15	4564	1
27	5290	14.20	290.60	16	3441	1
28	5290	12.50	281.60	13	3551	1
29	5290	19.90	308.60	13	3240	1
30	5290	13.30	322.70	13	3099	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5256	1	93.5	12	1947.3	3	1
	5255	2	59.6	10	1055.7	1	
	5254	3	88.8	8	1511.4	1	
	5256	4	69.9	13	1817.7	1	
	5253	5	94.7	5	1917.0	1	
	5257	6	93.7	15	1469.3	3	
	5253	7	79.3	6	1487.9	3	
	5258	8	84.3	17	1098.9	3	
	5253	9	78.0	6	1217.9	3	
	5257	10	53.6	15	1510.9	1	
	5259	11	61.8	19	1815.1	1	
2	5255	1	58.0	10	1408.2	1	1
	5256	2	51.3	12	1460.1	1	
	5257	3	96.4	14	1715.8	3	
	5256	4	99.6	12	1764.9	1	
	5256	5	62.6	13	1349.3	3	
	5257	6	58.6	15	1104.6	1	
	5256	7	54.6	12	1631.0	1	
	5255	8	80.3	11	1399.6	1	
	5258	9	96.3	17	1411.1	2	
	5255	10	89.8	11	1313.3	1	
	5254	11	59.9	7	1681.0	3	
	5255	12	84.5	9	1466.4	2	
3	5256	1	97.1	13	1288.7	3	1
	5255	2	98.6	9	1047.5	2	
	5253	3	77.6	6	1079.9	3	
	5257	4	78.6	15	1796.6	2	
	5258	5	61.0	18	1814.4	2	
	5255	6	93.8	10	1369.3	1	
	5254	7	92.9	7	1295.9	2	
	5254	8	93.0	8	1280.3	1	
	5254	9	98.6	8	1399.9	2	
	5258	10	64.0	17	1162.3	2	
	5254	11	81.4	7	1343.2	2	
	5253	12	62.1	6	1446.1	1	
	5255	13	58.5	11	1061.1	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5255	1	78.6	11	1621.0	2	1
	5257	2	72.8	15	1757.1	2	
	5258	3	78.9	17	1638.4	2	
	5258	4	70.7	17	1578.6	2	
	5258	5	86.9	18	1337.2	2	
	5253	6	70.2	5	1505.0	1	
	5255	7	60.8	11	1871.8	2	
	5257	8	70.0	14	1145.6	2	
	5256	9	72.5	12	1150.6	3	
5	5255	1	89.7	10	1139.1	1	1
	5254	2	74.7	8	1422.1	3	
	5257	3	58.8	14	1648.0	3	
	5255	4	75.1	10	1983.9	1	
	5254	5	78.8	8	1593.4	1	
	5258	6	90.2	17	1275.9	1	
	5256	7	79.9	12	1579.7	1	
	5254	8	74.5	7	1825.4	2	
	5257	9	69.6	16	1346.0	1	
	5253	10	99.7	6	1256.7	1	
	5258	11	52.8	17	1784.6	1	
	5254	12	67.6	8	1026.7	3	
	5258	13	73.9	17	1293.1	2	
	5258	14	69.5	18	1814.0	2	
	5253	15	79.5	6	1404.5	3	
6	5255	1	64.1	11	1200.9	1	1
	5255	2	63.5	10	1436.7	1	
	5254	3	71.8	7	1124.7	2	
	5256	4	69.5	13	1393.3	1	
	5258	5	55.4	17	1450.2	3	
	5253	6	87.4	5	1618.2	3	
	5259	7	87.4	19	1836.0	1	
	5258	8	70.2	18	1304.0	1	
	5255	9	70.6	11	1096.4	3	
	5257	10	55.8	16	1437.7	2	
	5257	11	91.6	15	1594.2	3	
	5257	12	50.9	15	1659.5	2	
	5259	13	93.6	19	1820.4	2	
	5255	14	71.6	9	1612.0	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5255	1	58.2	11	1322.0	3	1
	5253	2	92.5	6	1799.4	1	
	5258	3	81.8	18	1432.7	1	
	5255	4	62.7	9	1832.9	2	
	5258	5	54.2	17	1162.1	1	
	5257	6	80.9	15	1259.3	3	
	5254	7	69.5	7	1978.0	2	
	5257	8	66.2	15	1702.5	2	
	5256	9	84.6	13	1804.1	1	
	5253	10	74.5	5	1269.0	1	
	5254	11	89.2	7	1097.0	2	
	5257	12	63.6	16	1989.3	1	
	5254	13	58.2	7	1872.4	1	
	5257	14	81.3	14	1044.4	3	
	5256	15	66.4	12	1746.1	3	
	5254	16	67.5	8	1554.4	3	
	5255	17	59.4	11	1464.1	2	
8	5255	1	75.3	10	1355.7	1	1
	5259	2	73.0	19	1156.4	2	
	5254	3	87.9	7	1639.8	3	
	5254	4	99.4	7	1422.8	1	
	5255	5	70.7	10	1060.6	3	
	5255	6	60.5	11	1224.0	3	
	5256	7	91.6	13	1680.3	3	
	5255	8	86.1	11	1686.5	1	
	5256	9	55.4	12	1259.3	1	
	5259	10	60.2	19	1168.7	1	
	5256	11	79.7	12	1975.0	1	
	5256	12	86.0	12	1833.8	2	
	5255	13	76.7	9	1688.4	3	
	5258	14	76.2	18	1891.4	1	
	5257	15	87.9	16	1773.1	3	
	5256	16	98.9	13	1757.0	3	
	5254	17	77.6	7	1050.8	1	
	5254	18	52.8	7	1540.4	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5257	1	85.2	16	1848.3	2	1
	5257	2	96.6	15	1639.7	2	
	5259	3	56.6	20	1395.9	3	
	5257	4	60.9	14	1603.5	1	
	5254	5	90.9	7	1310.9	2	
	5253	6	69.5	6	1499.2	1	
	5257	7	96.1	14	1276.4	3	
	5256	8	72.7	12	1164.7	1	
	5255	9	55.7	10	1953.5	1	
	5254	10	54.3	7	1483.0	2	
	5255	11	56.0	11	1262.2	2	
	5253	12	74.4	5	1613.4	2	
	5259	13	59.3	19	1384.7	2	
	5253	14	96.8	5	1721.4	2	
	5254	15	83.8	7	1894.9	1	
	5255	16	99.2	10	1479.1	2	
	5259	17	94.9	19	1946.9	2	
	5257	18	93.2	15	1741.9	3	
	5259	19	74.4	20	1681.9	1	
10	5253	1	53.8	6	1529.8	1	1
	5254	2	78.9	8	1834.3	2	
	5257	3	64.8	16	1866.6	1	
	5256	4	84.1	12	1157.5	1	
	5257	5	60.0	15	1342.5	3	
	5257	6	80.4	16	1127.7	2	
	5258	7	68.0	18	1170.9	1	
	5256	8	88.6	12	1906.6	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	73.2	19	1579.2	2	0
	5290	2	82.6	11	1260.2	2	
	5290	3	62.5	12	1944.7	2	
	5290	4	99.3	15	1188.9	3	
	5290	5	54.2	6	1281.4	1	
	5290	6	95.7	11	1925.7	2	
	5290	7	56.5	9	1378.8	2	
	5290	8	89.7	12	1996.1	2	
	5290	9	65.8	13	1742.1	2	
	5290	10	61.4	16	1237.5	1	
	5290	11	52.0	6	1231.9	1	
	5290	12	94.8	7	1702.9	1	
	5290	13	99.7	7	1373.4	1	
	5290	14	62.7	9	1876.6	3	
	5290	15	88.5	20	1836.2	1	
	5290	16	63.0	12	1352.2	1	
12	5290	1	87.5	18	1116.7	3	1
	5290	2	60.1	14	1717.5	2	
	5290	3	51.1	12	1173.9	2	
	5290	4	67.2	12	1697.1	1	
	5290	5	77.0	9	1821.1	2	
	5290	6	70.4	12	1751.5	1	
	5290	7	68.2	13	1420.6	1	
	5290	8	76.8	6	1104.7	3	
	5290	9	59.8	12	1023.0	2	
	5290	10	84.4	16	1120.1	1	
	5290	11	61.4	6	1141.3	2	
	5290	12	87.4	19	1965.5	1	
	5290	13	86.1	13	1945.5	3	
	5290	14	72.6	12	1305.0	3	
	5290	15	87.8	8	1186.1	3	
	5290	16	87.9	16	1944.7	3	
	5290	17	59.5	7	1360.9	2	
	5290	18	64.6	5	1664.7	1	
	5290	19	88.3	19	1996.3	1	
	5290	20	98.7	8	1601.3	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	58.9	13	1442.3	1	0
	5290	2	75.9	13	1525.6	1	
	5290	3	83.6	5	1116.4	3	
	5290	4	98.2	9	1126.8	3	
	5290	5	98.8	19	1372.8	2	
	5290	6	60.3	8	1627.7	3	
	5290	7	97.6	5	1932.0	1	
	5290	8	90.7	18	1590.2	3	
	5290	9	83.9	15	1823.4	3	
	5290	10	94.9	13	1524.9	3	
14	5290	1	50.4	15	1117.2	1	1
	5290	2	76.3	10	1115.3	3	
	5290	3	69.0	6	1588.7	2	
	5290	4	58.3	6	1511.1	1	
	5290	5	70.3	12	1286.5	3	
	5290	6	82.9	13	1520.3	2	
	5290	7	75.8	18	1007.9	3	
	5290	8	88.5	13	1342.0	2	
	5290	9	68.8	15	1412.0	2	
	5290	10	80.8	10	1292.5	2	
	5290	11	58.6	15	1120.5	2	
	5290	12	83.1	17	1167.4	2	
	5290	13	82.2	16	1351.3	1	
	5290	14	94.1	19	1389.1	2	
	5290	15	78.7	10	1213.3	1	
	5290	16	53.3	10	1066.4	1	
	5290	17	96.8	5	1028.7	3	
	5290	18	56.7	12	1752.7	1	
	5290	19	76.6	17	1503.5	2	
	5290	20	95.2	7	1839.1	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	80.3	17	1641.6	3	1
	5290	2	94.9	15	1960.6	2	
	5290	3	51.4	8	1817.4	2	
	5290	4	95.7	12	1813.0	1	
	5290	5	80.6	8	1026.6	1	
	5290	6	80.3	18	1592.2	3	
	5290	7	55.9	10	1326.5	3	
	5290	8	52.5	5	1390.9	3	
	5290	9	74.4	17	1146.9	3	
	5290	10	90.2	12	1362.4	1	
	5290	11	91.9	10	1832.9	2	
	5290	12	77.1	14	1798.6	1	
	5290	13	92.0	7	1232.5	1	
	5290	14	97.3	10	1109.4	1	
	5290	15	60.3	15	1792.7	2	
	5290	16	54.9	7	1879.7	2	
	5290	17	70.6	15	1392.7	3	
	5290	18	59.3	7	1589.6	3	
	5290	19	55.8	9	1292.6	1	
16	5290	1	53.9	15	1729.4	3	1
	5290	2	64.0	18	1718.7	2	
	5290	3	76.0	13	1999.4	1	
	5290	4	67.1	16	1350.6	2	
	5290	5	95.7	18	1307.7	1	
	5290	6	99.6	14	1813.6	3	
	5290	7	61.1	19	1600.3	3	
	5290	8	84.2	14	1834.2	3	
	5290	9	59.0	18	1052.3	2	
	5290	10	71.3	13	1040.6	2	
	5290	11	88.4	14	1510.5	2	
	5290	12	95.0	19	1225.3	2	
	5290	13	81.1	16	1455.0	3	
	5290	14	89.5	10	1413.2	2	
	5290	15	99.6	12	1646.0	3	
	5290	16	70.0	19	1889.9	3	
	5290	17	92.6	13	1951.3	1	
	5290	18	88.0	11	1460.2	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	70.5	18	1100.5	1	1
	5290	2	60.8	6	1534.6	3	
	5290	3	73.3	13	1439.4	3	
	5290	4	93.4	17	1813.9	3	
	5290	5	54.4	12	1396.7	1	
	5290	6	74.9	9	1291.5	2	
	5290	7	71.5	15	1581.6	1	
	5290	8	97.6	13	1530.7	1	
	5290	9	96.8	7	1532.9	1	
	5290	10	63.1	9	1877.3	2	
	5290	11	80.8	11	1756.1	3	
	5290	12	62.3	8	1152.2	1	
	5290	13	83.4	18	1947.7	1	
	5290	14	67.8	16	1617.5	1	
	5290	15	97.1	20	1312.5	1	
	5290	16	55.5	17	1375.9	2	
	5290	17	50.4	17	1649.3	1	
18	5290	1	89.9	19	1079.1	1	1
	5290	2	82.7	16	1831.2	3	
	5290	3	72.4	15	1451.2	3	
	5290	4	51.7	14	1965.8	2	
	5290	5	92.8	10	1049.2	2	
	5290	6	84.7	15	1682.3	2	
	5290	7	90.2	10	1708.5	1	
	5290	8	54.5	7	1358.4	2	
	5290	9	67.7	12	1859.9	2	
	5290	10	95.2	18	1524.5	3	
	5290	11	69.0	6	1400.7	2	
	5290	12	97.4	14	1455.4	3	
	5290	13	66.1	7	1702.3	3	
	5290	14	69.9	17	1404.7	3	
	5290	15	75.1	7	1353.5	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	63.6	16	1876.9	1	1
	5290	2	66.7	15	1104.3	3	
	5290	3	97.4	9	1498.9	2	
	5290	4	92.7	11	1092.4	3	
	5290	5	65.0	6	1866.8	2	
	5290	6	98.8	6	1588.9	3	
	5290	7	89.3	11	1371.9	3	
	5290	8	68.0	9	1606.4	3	
	5290	9	54.1	20	1285.7	2	
	5290	10	71.8	7	1481.2	2	
	5290	11	96.8	17	1006.5	1	
	5290	12	80.1	19	1193.1	2	
	5290	13	84.9	5	1982.6	2	
	5290	14	57.5	9	1295.1	3	
20	5290	1	57.5	10	1322.1	2	1
	5290	2	53.2	18	1034.9	1	
	5290	3	81.4	17	1516.0	1	
	5290	4	60.9	16	1276.9	2	
	5290	5	72.6	20	1892.7	3	
	5290	6	79.8	18	1694.0	3	
	5290	7	83.2	9	1120.4	1	
	5290	8	60.0	13	1417.2	1	
	5290	9	66.8	18	1579.2	3	
	5290	10	78.1	11	1463.8	2	
21	5324	1	54.8	13	1721.2	1	1
	5325	2	59.5	9	1646.0	1	
	5321	3	73.1	19	1475.7	2	
	5325	4	66.8	9	1374.9	1	
	5326	5	66.1	7	1479.7	2	
	5325	6	71.3	9	1137.6	3	
	5323	7	60.3	15	1618.9	1	
	5322	8	62.6	18	1600.3	2	
	5326	9	77.6	8	1658.4	3	
	5327	10	70.3	5	1571.5	1	
	5322	11	97.5	17	1162.4	3	
	5323	12	98.6	15	1264.7	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5324	1	78.6	13	1744.7	2	1
	5327	2	63.4	6	1348.1	1	
	5326	3	50.9	8	1476.1	2	
	5325	4	86.8	11	1292.4	2	
	5324	5	61.7	13	1998.4	1	
	5323	6	88.8	16	1674.0	1	
	5322	7	73.5	17	1000.5	3	
	5325	8	78.4	11	1149.8	1	
	5327	9	94.5	6	1153.6	2	
23	5324	1	79.8	12	1986.5	2	1
	5323	2	96.9	15	1544.6	2	
	5325	3	82.9	9	1431.1	2	
	5322	4	75.5	18	1541.9	1	
	5322	5	81.4	18	1188.5	1	
	5321	6	67.5	19	1967.9	3	
	5322	7	50.6	18	1977.9	2	
	5323	8	57.5	15	1153.0	3	
	5321	9	70.3	19	1192.5	2	
	5322	10	96.8	17	1062.7	2	
	5321	11	91.1	19	1908.8	3	
	5323	12	86.2	14	1755.9	2	
	5323	13	97.7	16	1800.5	1	
	5323	14	64.2	14	1651.4	2	
	5321	15	58.4	19	1091.0	3	
24	5326	1	97.8	8	1520.4	3	1
	5322	2	72.4	18	1084.5	2	
	5323	3	73.9	15	1980.0	2	
	5321	4	65.5	20	1796.4	3	
	5322	5	60.7	18	1923.4	2	
	5326	6	54.7	7	1314.1	1	
	5321	7	95.7	20	1602.8	1	
	5327	8	55.7	5	1773.2	2	
	5323	9	84.8	14	1932.1	3	
	5323	10	69.4	15	1746.7	1	
	5325	11	54.9	10	1730.7	1	
	5322	12	58.2	18	1898.4	3	
	5325	13	86.1	10	1333.5	3	
	5322	14	99.7	17	1036.8	2	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5325	1	60.7	9	1368.4	2	1
	5325	2	60.1	10	1986.5	3	
	5326	3	75.5	7	1974.5	2	
	5324	4	97.1	13	1307.8	2	
	5326	5	78.7	7	1266.3	1	
	5324	6	59.4	13	1856.1	3	
	5327	7	71.6	5	1543.5	1	
	5327	8	82.0	5	1507.1	2	
	5323	9	99.6	14	1410.2	2	
	5324	10	89.4	13	1604.4	3	
	5324	11	88.4	12	1893.0	2	
	5327	12	92.9	5	1466.7	3	
	5326	13	66.3	7	1645.2	2	
	5323	14	63.8	14	1184.4	2	
	5325	15	92.8	10	1374.1	2	
	5327	16	83.2	6	1534.9	1	
	5325	17	86.5	9	1581.0	2	
	5325	18	89.3	9	1726.3	3	
26	5327	1	55.8	5	1934.5	1	1
	5327	2	97.5	5	1414.5	3	
	5325	3	69.9	9	1024.9	2	
	5326	4	57.6	8	1535.4	1	
	5322	5	65.7	17	1302.4	1	
	5325	6	86.7	9	1577.6	2	
	5324	7	58.9	13	1259.5	1	
	5325	8	66.6	10	1382.1	2	
	5322	9	64.3	18	1626.8	3	
	5325	10	55.2	11	1109.8	2	
	5326	11	57.3	7	1012.1	1	
	5325	12	86.9	10	1640.6	1	
	5323	13	53.0	14	1854.3	1	
	5325	14	85.1	11	1990.7	3	
	5326	15	72.5	8	1291.4	1	
	5325	16	98.5	9	1519.2	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5324	1	65.0	12	1378.4	2	1
	5323	2	83.0	16	1546.3	3	
	5324	3	84.5	12	1999.5	1	
	5323	4	72.8	15	1969.5	2	
	5326	5	59.6	8	1704.3	3	
	5323	6	83.4	16	1120.1	3	
	5326	7	62.7	7	1934.4	1	
	5323	8	70.9	14	1204.4	1	
	5325	9	81.3	9	1595.7	1	
	5325	10	93.0	10	1052.5	2	
	5323	11	54.0	14	1371.5	1	
	5323	12	90.9	14	1088.5	1	
	5324	13	52.5	12	1092.8	2	
	5322	14	60.1	17	1283.4	1	
	5326	15	82.7	7	1477.9	3	
	5324	16	77.8	13	1935.1	3	
	5325	17	76.2	11	1881.1	3	
	5322	18	85.3	18	1813.9	1	
	5323	19	85.0	15	1970.0	2	
	5324	20	88.3	13	1258.3	1	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5323	1	86.0	16	1357.4	2	1
	5327	2	82.1	6	1429.4	1	
	5323	3	55.1	14	1499.6	2	
	5327	4	85.7	5	1733.2	1	
	5323	5	97.6	14	1072.3	3	
	5324	6	62.6	13	1642.7	1	
	5322	7	75.0	17	1510.5	2	
	5325	8	85.4	10	1136.6	1	
	5326	9	93.3	8	1293.5	2	
	5327	10	60.1	6	1707.1	2	
	5323	11	62.8	15	1171.9	2	
	5323	12	56.2	16	1957.8	2	
	5326	13	98.0	8	1836.6	1	
	5324	14	64.0	13	1222.6	3	
	5323	15	69.1	15	1288.4	1	
	5325	16	87.7	10	1342.6	1	
	5325	17	69.8	10	1455.3	2	
	5326	18	94.8	8	1207.9	2	
	5321	19	65.9	19	1086.2	3	
	5321	20	96.0	20	1593.8	3	

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5325	1	65.4	11	1185.4	2	1
	5321	2	90.6	19	1423.8	3	
	5321	3	80.7	20	1854.3	2	
	5321	4	53.8	20	1716.0	2	
	5323	5	53.0	14	1845.7	3	
	5326	6	56.8	7	1196.9	2	
	5326	7	82.0	8	1851.0	1	
	5324	8	81.7	12	1049.2	3	
	5322	9	84.4	18	1098.8	1	
	5325	10	61.8	9	1338.3	1	
	5326	11	82.4	8	1699.4	2	
	5325	12	92.1	10	1796.1	1	
	5321	13	95.6	20	1525.3	3	
	5326	14	90.8	8	1461.6	1	
	5322	15	53.0	17	1207.3	3	
	5325	16	56.7	9	1042.3	3	
	5327	17	91.3	5	1432.9	3	
30	5323	1	72.3	15	1830.5	2	1
	5327	2	55.3	5	1224.1	3	
	5326	3	73.1	7	1366.4	1	
	5321	4	89.7	19	1024.4	1	
	5323	5	84.3	15	1337.0	3	
	5325	6	77.5	11	1303.2	1	
	5322	7	81.4	17	1978.4	1	
	5327	8	59.5	6	1566.6	1	
	5322	9	92.6	18	1273.0	1	
	5326	10	81.2	8	1836.6	3	
	5322	11	68.5	17	1574.5	2	
	5327	12	79.0	6	1240.0	3	
	5325	13	94.0	9	1290.2	1	
	5326	14	92.0	8	1699.0	2	
Detection Percentage (%)							93.33

Test Mode		802.11be EHT80					
Frequency		5290 MHz					
Radar Signal		Type 6					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5290	1	333	9	0.333	300	1
2	5290	1	333	9	0.333	300	1
3	5290	1	333	9	0.333	300	1
4	5290	1	333	9	0.333	300	1
5	5290	1	333	9	0.333	300	1
6	5290	1	333	9	0.333	300	1
7	5290	1	333	9	0.333	300	1
8	5290	1	333	9	0.333	300	1
9	5290	1	333	9	0.333	300	1
10	5290	1	333	9	0.333	300	1
11	5290	1	333	9	0.333	300	1
12	5290	1	333	9	0.333	300	1
13	5290	1	333	9	0.333	300	0
14	5290	1	333	9	0.333	300	0
15	5290	1	333	9	0.333	300	1
16	5290	1	333	9	0.333	300	1
17	5290	1	333	9	0.333	300	1
18	5290	1	333	9	0.333	300	1
19	5290	1	333	9	0.333	300	1
20	5290	1	333	9	0.333	300	1
21	5290	1	333	9	0.333	300	1
22	5290	1	333	9	0.333	300	0
23	5290	1	333	9	0.333	300	1
24	5290	1	333	9	0.333	300	1
25	5290	1	333	9	0.333	300	1
26	5290	1	333	9	0.333	300	1
27	5290	1	333	9	0.333	300	1
28	5290	1	333	9	0.333	300	1
29	5290	1	333	9	0.333	300	1
30	5290	1	333	9	0.333	300	1
Detection Percentage (%)							90.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1	3066	18	326	1
2	5250	1	678	78	1475	1
3	5250	1	858	62	1166	1
4	5250	1	778	68	1285	1
5	5250	1	558	95	1792	1
6	5250	1	718	74	1393	1
7	5250	1	538	99	1859	1
8	5250	1	938	57	1066	1
9	5250	1	818	65	1222	1
10	5250	1	778	68	1285	1
11	5250	1	578	92	1730	1
12	5250	1	538	99	1859	0
13	5250	1	678	78	1475	1
14	5250	1	598	89	1672	1
15	5250	1	918	58	1089	1
16	5250	1	2423	22	413	1
17	5250	1	1024	52	977	1
18	5250	1	2129	25	470	1
19	5250	1	2732	20	366	1
20	5250	1	2525	21	396	1
21	5250	1	2743	20	365	1
22	5250	1	2945	18	340	1
23	5250	1	3009	18	332	1
24	5250	1	2166	25	462	1
25	5250	1	1797	30	556	1
26	5250	1	1786	30	560	1
27	5250	1	2927	19	342	1
28	5250	1	1367	39	732	1
29	5250	1	2200	24	455	1
30	5250	1	2670	20	375	1
Detection Percentage (%)						96.67

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1.60	210.90	27	4742	1
2	5250	3.10	216.30	27	4623	1
3	5250	1.50	222.30	24	4498	1
4	5250	2.70	191.60	28	5219	1
5	5250	2.40	183.10	25	5461	1
6	5250	4.00	203.10	26	4924	1
7	5250	2.10	196.10	23	5099	0
8	5250	3.40	179.40	26	5574	1
9	5250	3.20	170.00	23	5882	1
10	5250	1.50	151.60	23	6596	1
11	5250	2.20	211.30	25	4733	1
12	5250	4.80	175.40	26	5701	1
13	5250	2.00	205.70	26	4861	1
14	5250	5.00	192.50	23	5195	1
15	5250	3.00	151.60	28	6596	1
16	5250	3.70	225.10	29	4442	1
17	5250	3.90	224.20	25	4460	0
18	5250	2.80	209.20	23	4780	1
19	5250	4.40	203.80	27	4907	1
20	5250	4.30	223.80	25	4468	1
21	5250	3.60	152.40	29	6562	0
22	5250	1.40	193.40	25	5171	1
23	5250	2.10	221.20	29	4521	1
24	5250	4.40	182.10	29	5491	0
25	5250	3.30	188.00	29	5319	1
26	5250	4.50	154.00	29	6494	1
27	5250	1.70	155.40	24	6435	1
28	5250	1.10	158.80	24	6297	1
29	5250	3.80	217.50	23	4598	1
30	5250	3.20	178.20	25	5612	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	6.70	406.90	17	2457.61	1
2	5250	6.70	362.20	17	2760.91	1
3	5250	7.40	290.50	16	3442.34	1
4	5250	9.40	330.60	17	3024.80	1
5	5250	6.70	482.60	17	2072.11	1
6	5250	8.90	404.80	17	2470.36	1
7	5250	7.70	262.90	18	3803.73	1
8	5250	6.50	409.30	18	2443.20	0
9	5250	7.40	489.40	18	2043.32	1
10	5250	6.40	223.40	18	4476.28	1
11	5250	6.70	476.00	17	2100.84	1
12	5250	7.10	279.90	18	3572.70	1
13	5250	8.40	311.00	16	3215.43	0
14	5250	7.80	491.70	17	2033.76	1
15	5250	9.90	204.80	18	4882.81	1
16	5250	9.40	401.50	16	2490.66	1
17	5250	9.20	241.20	17	4145.94	1
18	5250	6.80	255.60	17	3912.36	0
19	5250	8.00	260.20	16	3843.20	1
20	5250	7.10	249.40	17	4009.62	1
21	5250	7.00	481.00	18	2079.00	1
22	5250	7.70	228.00	18	4385.96	1
23	5250	6.20	232.90	17	4293.69	1
24	5250	7.00	491.30	18	2035.42	1
25	5250	8.90	487.80	17	2050.02	1
26	5250	6.30	408.10	16	2450.38	1
27	5250	9.40	448.00	16	2232.14	1
28	5250	8.40	416.80	17	2399.23	1
29	5250	6.50	450.50	17	2219.76	1
30	5250	9.30	471.10	18	2122.69	1
Detection Percentage (%)						90.00

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	13.90	392.30	16	2549	1
2	5250	11.50	234.20	15	4270	1
3	5250	19.90	419.60	14	2383	1
4	5250	13.70	270.00	12	3704	0
5	5250	11.20	234.40	14	4266	1
6	5250	14.90	479.40	16	2086	1
7	5250	13.00	313.10	12	3194	1
8	5250	13.50	464.60	14	2152	1
9	5250	19.90	382.00	14	2618	1
10	5250	18.80	461.80	12	2165	1
11	5250	17.90	386.50	15	2587	1
12	5250	16.00	342.00	13	2924	1
13	5250	17.00	389.20	14	2569	1
14	5250	12.90	420.60	12	2378	1
15	5250	11.00	384.70	13	2599	0
16	5250	17.20	486.60	16	2055	1
17	5250	15.00	488.70	14	2046	1
18	5250	19.80	421.80	13	2371	1
19	5250	18.50	495.20	12	2019	1
20	5250	11.10	369.30	14	2708	1
21	5250	14.50	259.40	16	3855	1
22	5250	17.30	441.40	15	2266	1
23	5250	17.50	202.80	16	4931	1
24	5250	15.70	211.60	13	4726	1
25	5250	14.10	303.00	12	3300	1
26	5250	13.60	302.70	14	3304	1
27	5250	13.90	362.60	16	2758	1
28	5250	19.00	299.10	16	3343	1
29	5250	13.80	224.40	16	4456	1
30	5250	18.40	472.80	13	2115	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5214	1	91.3	8	1273.9	1	1
	5219	2	84.9	19	1260.9	2	
	5219	3	55.9	19	1563.1	2	
	5217	4	58.9	15	1498.1	2	
	5217	5	73.2	16	1187.8	3	
	5219	6	70.4	19	1404.4	2	
	5217	7	59.6	15	1564.0	3	
	5216	8	100.0	12	1735.1	3	
	5216	9	79.7	13	1559.4	2	
	5213	10	76.4	6	1410.1	2	
	5214	11	83.8	7	1723.3	1	
2	5216	1	82.9	13	1517.7	3	1
	5219	2	71.0	19	1829.5	3	
	5215	3	53.8	10	1134.6	1	
	5219	4	80.1	19	1047.6	3	
	5215	5	67.8	10	1026.9	2	
	5214	6	91.8	8	1800.0	1	
	5217	7	86.3	16	1658.8	1	
	5216	8	75.1	13	1092.5	1	
	5217	9	77.2	15	1738.3	1	
	5213	10	55.6	5	1382.5	2	
	5216	11	68.3	12	1796.6	2	
	5217	12	99.2	14	1846.6	1	
3	5218	1	67.7	18	1538.7	1	1
	5219	2	56.7	19	1396.5	1	
	5215	3	90.6	10	1399.4	3	
	5214	4	84.8	8	1861.2	3	
	5218	5	65.5	17	1628.4	1	
	5215	6	91.8	10	1742.9	2	
	5214	7	60.6	7	1356.5	1	
	5219	8	85.4	19	1382.9	2	
	5219	9	65.9	19	1950.0	3	
	5218	10	68.7	17	1673.9	2	
	5217	11	70.0	16	1573.8	3	
	5218	12	99.8	18	1634.2	2	
	5215	13	62.5	9	1538.8	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5217	1	90.6	14	1996.5	2	1
	5216	2	82.4	12	1899.0	3	
	5217	3	92.1	15	1755.5	1	
	5217	4	96.4	15	1740.5	2	
	5219	5	87.7	19	1679.1	1	
	5215	6	74.4	11	1024.0	1	
	5218	7	76.7	18	1809.8	2	
	5217	8	95.4	14	1967.1	2	
	5215	9	98.5	10	1486.3	3	
5	5214	1	91.1	8	1995.0	2	1
	5215	2	50.7	11	1739.8	3	
	5217	3	52.4	16	1590.2	1	
	5215	4	74.0	11	1035.4	1	
	5217	5	94.7	15	1417.1	2	
	5219	6	50.6	19	1774.8	2	
	5215	7	92.6	10	1929.7	3	
	5213	8	71.2	6	1930.4	2	
	5216	9	82.7	12	1490.3	3	
	5215	10	99.1	10	1322.2	1	
	5217	11	99.8	16	1627.9	1	
	5214	12	76.3	8	1120.7	1	
	5219	13	84.6	19	1567.1	1	
	5214	14	69.0	8	1931.2	2	
	5217	15	52.9	16	1590.7	3	
6	5219	1	66.5	19	1023.8	2	1
	5213	2	53.8	6	1708.5	1	
	5217	3	84.4	16	1382.3	2	
	5216	4	69.2	13	1152.0	2	
	5217	5	86.4	16	1857.5	1	
	5219	6	80.4	19	1021.0	3	
	5219	7	70.9	19	1147.5	2	
	5218	8	54.9	18	1536.2	2	
	5213	9	70.4	6	1060.0	2	
	5214	10	98.1	8	1697.0	2	
	5215	11	98.6	9	1112.0	3	
	5217	12	97.9	15	1762.4	1	
	5213	13	65.7	5	1697.2	2	
	5215	14	51.7	11	1748.3	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5213	1	72.6	6	1620.9	2	1
	5215	2	88.5	11	1893.8	1	
	5215	3	74.4	11	1894.8	3	
	5216	4	83.0	12	1887.2	3	
	5218	5	74.4	17	1885.2	2	
	5215	6	69.2	10	1071.6	2	
	5217	7	66.7	14	1842.4	2	
	5217	8	95.1	14	1930.3	2	
	5217	9	65.9	16	1912.7	3	
	5215	10	85.5	10	1708.6	1	
	5219	11	60.9	19	1618.2	3	
	5219	12	99.2	19	1477.4	1	
	5217	13	65.6	14	1120.2	2	
	5217	14	60.8	15	1833.7	2	
	5216	15	61.2	13	1095.0	3	
	5217	16	56.2	14	1302.4	2	
	5214	17	94.8	7	1161.7	3	
8	5216	1	62.9	12	1539.5	3	1
	5213	2	74.0	6	1507.1	3	
	5219	3	67.5	19	1652.8	1	
	5217	4	93.3	16	1472.4	3	
	5217	5	57.1	15	1849.4	3	
	5218	6	77.7	18	1346.8	3	
	5217	7	84.4	15	1148.7	1	
	5217	8	79.5	16	1466.0	2	
	5216	9	91.8	12	1781.6	2	
	5219	10	64.0	19	1632.6	1	
	5216	11	90.9	12	1034.5	3	
	5215	12	67.9	10	1492.3	3	
	5214	13	90.1	8	1715.3	2	
	5217	14	66.1	14	1292.2	3	
	5215	15	80.5	9	1680.8	1	
	5215	16	87.3	9	1917.1	3	
	5215	17	61.4	9	1853.2	2	
	5214	18	50.1	8	1455.1	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5213	1	79.6	6	1311.0	1	1
	5214	2	98.4	7	1384.7	2	
	5217	3	76.6	16	1930.7	1	
	5216	4	84.0	13	1837.5	3	
	5215	5	94.9	9	1267.1	3	
	5218	6	74.6	18	1722.4	2	
	5217	7	97.9	16	1210.8	1	
	5217	8	69.0	16	1486.6	1	
	5215	9	84.8	11	1485.2	3	
	5216	10	78.0	13	1487.0	1	
	5218	11	81.0	17	1637.3	2	
	5217	12	67.0	14	1752.5	2	
	5219	13	89.4	19	1805.1	3	
	5219	14	69.4	19	1768.7	3	
	5216	15	68.9	13	1348.4	2	
	5214	16	70.3	8	1506.4	3	
	5217	17	72.0	16	1449.2	2	
	5213	18	94.0	6	1846.5	3	
	5215	19	56.2	10	1043.2	3	
10	5216	1	69.7	12	1803.0	1	1
	5213	2	66.6	5	1174.3	3	
	5214	3	98.0	7	1507.2	1	
	5215	4	72.8	10	1822.1	2	
	5217	5	50.5	14	1437.1	1	
	5217	6	89.1	16	1970.3	2	
	5213	7	93.8	6	1200.2	1	
	5219	8	83.6	19	1429.0	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5250	1	84.2	17	1058.6	2	1
	5250	2	62.4	8	1070.5	2	
	5250	3	95.8	6	1466.9	3	
	5250	4	81.1	18	1107.1	3	
	5250	5	85.8	11	1925.2	3	
	5250	6	91.3	5	1343.0	1	
	5250	7	89.3	13	1562.9	2	
	5250	8	67.6	14	1941.9	1	
	5250	9	99.0	18	1482.9	3	
	5250	10	66.0	14	1478.2	1	
	5250	11	78.1	15	1959.3	1	
	5250	12	50.3	17	1196.0	2	
	5250	13	69.4	20	1223.7	1	
	5250	14	75.0	11	1622.4	1	
	5250	15	61.1	18	1978.9	1	
	5250	16	74.0	8	1433.9	1	
12	5250	1	71.6	11	1386.5	3	1
	5250	2	82.4	13	1742.7	3	
	5250	3	81.4	15	1710.9	3	
	5250	4	97.1	10	1407.5	2	
	5250	5	66.5	11	1199.9	3	
	5250	6	60.2	7	1482.1	2	
	5250	7	99.2	10	1115.8	2	
	5250	8	60.6	17	1769.4	2	
	5250	9	98.5	14	1579.0	1	
	5250	10	98.2	17	1637.4	2	
	5250	11	85.8	7	1260.7	2	
	5250	12	62.5	19	1623.7	2	
	5250	13	72.5	9	1764.7	1	
	5250	14	70.9	19	1574.4	2	
	5250	15	88.4	17	1813.8	1	
	5250	16	58.6	17	1573.7	2	
	5250	17	51.9	7	1402.6	3	
	5250	18	61.0	9	1680.5	3	
	5250	19	94.5	13	1474.9	2	
	5250	20	91.0	20	1229.0	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5250	1	54.2	17	1666.7	2	1
	5250	2	87.2	19	1151.1	2	
	5250	3	63.9	15	1348.2	2	
	5250	4	53.4	9	1113.8	3	
	5250	5	69.9	7	1738.9	2	
	5250	6	90.1	13	1591.5	3	
	5250	7	59.7	10	1453.0	3	
	5250	8	69.0	14	1888.9	2	
	5250	9	93.9	10	1163.0	2	
	5250	10	50.3	18	1322.1	2	
14	5250	1	58.0	14	1457.6	3	0
	5250	2	66.3	10	1943.0	1	
	5250	3	68.7	5	1714.0	1	
	5250	4	94.5	16	1905.1	3	
	5250	5	86.3	16	1875.6	2	
	5250	6	54.6	16	1668.3	2	
	5250	7	98.5	18	1074.2	1	
	5250	8	59.3	13	1730.9	2	
	5250	9	98.4	14	1156.0	1	
	5250	10	96.4	20	1336.7	1	
	5250	11	79.8	14	1951.5	2	
	5250	12	62.2	17	1542.7	3	
	5250	13	89.3	10	1300.6	3	
	5250	14	86.3	20	1054.6	3	
	5250	15	87.8	12	1906.5	1	
	5250	16	76.3	6	1816.8	2	
	5250	17	94.4	16	1900.3	1	
	5250	18	80.1	10	1492.9	2	
	5250	19	76.8	8	1603.6	2	
	5250	20	88.9	18	1769.6	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5250	1	69.2	8	1275.9	3	0
	5250	2	92.0	7	1218.5	1	
	5250	3	94.4	14	1938.0	3	
	5250	4	85.1	16	1217.7	1	
	5250	5	79.4	12	1137.8	3	
	5250	6	62.4	7	1575.4	3	
	5250	7	97.3	15	1021.4	2	
	5250	8	58.9	19	1747.7	2	
	5250	9	76.7	8	1264.4	2	
	5250	10	89.0	18	1741.5	3	
	5250	11	50.9	17	1492.0	1	
	5250	12	73.2	14	1379.7	2	
	5250	13	64.2	20	1509.7	2	
	5250	14	52.0	8	1003.8	2	
	5250	15	94.7	11	1354.1	1	
	5250	16	56.9	20	1176.5	2	
	5250	17	92.0	18	1995.1	1	
	5250	18	71.8	7	1200.8	1	
	5250	19	56.2	11	1492.1	3	
16	5250	1	95.2	20	1486.0	2	1
	5250	2	60.6	19	1594.5	3	
	5250	3	88.7	12	1825.9	1	
	5250	4	97.2	15	1773.7	2	
	5250	5	89.9	20	1660.8	2	
	5250	6	86.0	7	1712.8	1	
	5250	7	54.0	12	1450.1	2	
	5250	8	85.4	5	1633.1	3	
	5250	9	85.0	13	1893.7	3	
	5250	10	67.5	19	1092.0	3	
	5250	11	89.6	6	1435.3	3	
	5250	12	87.8	16	1433.1	2	
	5250	13	84.1	9	1366.7	2	
	5250	14	75.4	10	1509.7	1	
	5250	15	85.8	9	1320.0	1	
	5250	16	57.6	14	1233.5	3	
	5250	17	86.8	11	1150.7	3	
	5250	18	62.4	15	1627.1	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5250	1	57.2	16	1239.4	3	1
	5250	2	96.7	15	1544.8	1	
	5250	3	74.3	8	1669.2	1	
	5250	4	99.3	9	1597.3	3	
	5250	5	95.3	8	1100.8	1	
	5250	6	63.2	12	1828.6	2	
	5250	7	64.9	7	1212.1	3	
	5250	8	59.4	18	1555.8	1	
	5250	9	85.7	12	1257.5	2	
	5250	10	77.3	13	1853.9	2	
	5250	11	59.2	15	1884.5	3	
	5250	12	81.8	11	1370.8	3	
	5250	13	73.9	13	1530.0	2	
	5250	14	84.2	16	1814.1	1	
	5250	15	92.0	17	1536.4	3	
	5250	16	86.1	6	1305.4	2	
	5250	17	74.6	15	1009.3	2	
18	5250	1	83.4	5	1805.9	2	1
	5250	2	63.8	14	1733.1	3	
	5250	3	88.5	8	1514.1	3	
	5250	4	52.2	10	1917.4	2	
	5250	5	54.6	17	1275.2	2	
	5250	6	61.4	16	1185.3	1	
	5250	7	68.2	18	1808.7	3	
	5250	8	89.1	13	1682.3	1	
	5250	9	80.0	15	1850.0	1	
	5250	10	50.5	17	1665.8	3	
	5250	11	93.7	14	1546.7	3	
	5250	12	54.7	14	1694.7	2	
	5250	13	76.7	7	1400.1	3	
	5250	14	69.2	8	1785.5	3	
	5250	15	99.1	19	1931.2	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5250	1	52.4	14	1484.1	3	1
	5250	2	69.3	16	1962.1	2	
	5250	3	51.8	18	1853.5	3	
	5250	4	54.5	19	1848.7	2	
	5250	5	70.4	20	1881.9	1	
	5250	6	51.6	10	1643.0	2	
	5250	7	56.2	17	1204.7	2	
	5250	8	76.9	6	1938.8	1	
	5250	9	58.8	12	1819.9	2	
	5250	10	95.8	7	1438.7	3	
	5250	11	66.1	8	1583.5	3	
	5250	12	94.6	16	1017.8	1	
	5250	13	51.4	18	1790.6	2	
	5250	14	79.9	12	1389.2	3	
20	5250	1	50.7	7	1351.1	2	1
	5250	2	82.5	15	1800.5	3	
	5250	3	69.4	9	1263.4	2	
	5250	4	65.7	15	1078.3	1	
	5250	5	93.9	8	1034.9	1	
	5250	6	90.9	8	1775.8	2	
	5250	7	65.6	13	1987.6	2	
	5250	8	72.2	8	1639.8	2	
	5250	9	55.8	15	1740.6	3	
	5250	10	76.2	5	1305.6	3	
21	5285	1	69.7	10	1819.4	2	1
	5285	2	96.4	10	1868.4	1	
	5281	3	83.8	19	1166.6	2	
	5282	4	58.9	18	1028.8	2	
	5285	5	79.6	11	1434.6	1	
	5283	6	95.8	14	1434.7	3	
	5283	7	93.5	14	1985.7	2	
	5285	8	85.2	11	1840.5	3	
	5283	9	83.2	16	1895.6	3	
	5283	10	73.0	15	1168.6	2	
	5283	11	97.2	16	1938.7	1	
	5286	12	92.1	7	1981.8	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5284	1	59.4	13	1948.2	2	1
	5286	2	74.4	8	1406.3	3	
	5283	3	72.7	16	1689.2	3	
	5286	4	98.0	7	1122.8	2	
	5284	5	59.6	12	1885.3	1	
	5286	6	61.4	8	1680.6	1	
	5285	7	96.1	10	1178.0	3	
	5283	8	74.6	15	1710.9	3	
	5286	9	94.4	7	1211.2	1	
23	5283	1	73.2	15	1773.1	3	1
	5287	2	61.2	6	1351.4	2	
	5285	3	68.0	11	1261.6	3	
	5281	4	77.0	19	1024.6	2	
	5287	5	53.9	5	1792.8	1	
	5283	6	60.2	15	1078.8	3	
	5283	7	56.1	14	1647.6	2	
	5284	8	86.5	13	1273.8	1	
	5286	9	91.2	8	1110.6	3	
	5283	10	69.9	14	1367.6	2	
	5282	11	86.2	18	1951.9	3	
	5283	12	50.7	15	1146.0	1	
	5284	13	94.5	12	1941.3	1	
	5281	14	59.5	19	1855.1	1	
	5286	15	71.3	8	1276.7	2	
24	5285	1	88.0	9	1205.7	3	1
	5283	2	92.4	14	1167.3	2	
	5283	3	68.6	14	1306.1	2	
	5282	4	51.4	18	1688.1	2	
	5285	5	97.7	10	1924.1	2	
	5285	6	58.6	9	1367.7	2	
	5281	7	60.3	20	1699.0	1	
	5285	8	74.8	11	1948.3	3	
	5281	9	73.8	20	1202.7	2	
	5284	10	93.9	13	1070.9	1	
	5287	11	74.2	6	1897.7	1	
	5283	12	75.0	16	1565.8	1	
	5287	13	64.5	6	1885.4	3	
	5282	14	73.1	18	1353.6	1	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5282	1	61.9	17	1089.6	3	0
	5282	2	90.7	18	1520.0	1	
	5284	3	99.0	13	1122.2	1	
	5285	4	96.6	11	1426.1	3	
	5283	5	77.1	15	1604.7	3	
	5286	6	76.2	7	1973.7	2	
	5284	7	86.7	13	1703.9	2	
	5286	8	62.1	7	1736.3	3	
	5286	9	86.7	7	1820.2	1	
	5284	10	57.6	12	1963.3	1	
	5286	11	72.9	7	1607.3	2	
	5284	12	72.5	13	1138.1	3	
	5285	13	91.2	9	1589.4	3	
	5283	14	69.9	15	1535.0	2	
	5283	15	57.2	15	1773.4	2	
	5285	16	71.7	11	1957.7	1	
	5286	17	85.5	8	1232.6	2	
	5284	18	79.4	13	1582.0	3	
26	5286	1	68.5	8	1832.3	3	1
	5281	2	65.3	20	1960.7	3	
	5286	3	73.8	7	1744.4	3	
	5284	4	54.1	12	1383.8	2	
	5285	5	86.0	9	1518.3	2	
	5285	6	63.2	11	1726.4	2	
	5283	7	61.6	14	1078.0	1	
	5285	8	98.8	9	1749.8	3	
	5285	9	82.1	10	1629.6	3	
	5286	10	78.5	7	1221.1	1	
	5283	11	85.7	16	1908.4	3	
	5287	12	64.0	6	1462.8	2	
	5283	13	80.8	15	1946.8	1	
	5284	14	51.0	12	1774.2	1	
	5286	15	79.5	8	1698.4	3	
	5285	16	70.9	10	1651.2	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5284	1	64.5	13	1895.6	1	1
	5284	2	52.8	12	1678.9	1	
	5284	3	81.2	12	1294.5	3	
	5285	4	53.0	9	1012.8	2	
	5285	5	66.5	10	1007.8	2	
	5281	6	98.4	20	1069.1	1	
	5281	7	97.1	19	1655.6	1	
	5286	8	96.7	7	1889.3	3	
	5287	9	79.0	6	1322.9	1	
	5287	10	65.5	6	1071.7	1	
	5284	11	92.0	12	1611.8	1	
	5285	12	67.3	11	1273.9	2	
	5285	13	64.1	9	1787.3	1	
	5283	14	51.8	15	1951.3	2	
	5281	15	79.3	20	1193.8	2	
	5287	16	89.8	6	1785.1	3	
	5285	17	78.2	9	1071.5	3	
	5283	18	99.3	16	1601.6	2	
	5285	19	58.2	11	1869.0	1	
	5281	20	83.2	20	1082.9	3	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5283	1	92.9	16	1677.5	3	1
	5282	2	67.9	17	1305.7	3	
	5286	3	68.4	8	1838.6	2	
	5282	4	90.7	17	1540.2	3	
	5286	5	51.2	7	1318.5	3	
	5285	6	92.8	9	1108.2	1	
	5284	7	60.8	12	1221.5	1	
	5285	8	88.7	10	1296.8	2	
	5282	9	93.4	17	1567.5	1	
	5285	10	69.6	9	1765.2	1	
	5286	11	90.1	7	1175.3	2	
	5285	12	81.1	9	1898.5	1	
	5281	13	79.1	19	1403.4	3	
	5285	14	67.3	9	1186.1	2	
	5285	15	62.1	10	1670.9	2	
	5286	16	98.1	8	1151.1	3	
	5281	17	58.7	19	1906.3	1	
	5282	18	88.7	17	1461.5	3	
	5284	19	61.3	13	1100.9	1	
	5281	20	57.9	19	1995.9	2	

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5284	1	59.0	12	1405.2	3	1
	5286	2	96.7	7	1234.1	2	
	5281	3	72.8	20	1819.5	2	
	5283	4	69.1	14	1221.2	3	
	5285	5	65.5	10	1698.8	1	
	5284	6	93.9	13	1998.8	1	
	5282	7	95.5	17	1549.5	2	
	5285	8	69.8	9	1322.0	2	
	5286	9	71.5	8	1342.9	3	
	5285	10	89.7	10	1688.7	2	
	5283	11	52.2	14	1693.5	3	
	5284	12	60.0	12	1652.5	3	
	5284	13	66.3	12	1347.6	3	
	5283	14	80.2	14	1069.2	3	
	5285	15	56.7	10	1782.5	2	
	5286	16	77.5	7	1854.1	2	
	5284	17	72.5	13	1359.9	3	
30	5281	1	59.0	19	1599.1	3	1
	5285	2	68.7	10	1515.2	3	
	5285	3	84.0	11	1944.8	3	
	5282	4	57.1	18	1474.1	1	
	5283	5	55.2	16	1659.1	2	
	5285	6	85.3	10	1872.4	1	
	5282	7	73.2	17	1299.0	2	
	5282	8	85.9	18	1119.1	2	
	5284	9	68.4	12	1861.0	2	
	5283	10	58.7	14	1821.8	3	
	5285	11	82.5	11	1577.0	1	
	5283	12	86.2	16	1396.5	3	
	5283	13	64.7	16	1626.7	2	
	5287	14	90.9	5	1780.9	3	
Detection Percentage (%)							90.00

Test Mode		802.11be EHT160					
Frequency		5250 MHz					
Radar Signal		Type 6					
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5250	1	333	9	0.333	300	1
2	5250	1	333	9	0.333	300	1
3	5250	1	333	9	0.333	300	1
4	5250	1	333	9	0.333	300	1
5	5250	1	333	9	0.333	300	1
6	5250	1	333	9	0.333	300	1
7	5250	1	333	9	0.333	300	1
8	5250	1	333	9	0.333	300	1
9	5250	1	333	9	0.333	300	1
10	5250	1	333	9	0.333	300	1
11	5250	1	333	9	0.333	300	1
12	5250	1	333	9	0.333	300	1
13	5250	1	333	9	0.333	300	1
14	5250	1	333	9	0.333	300	1
15	5250	1	333	9	0.333	300	0
16	5250	1	333	9	0.333	300	1
17	5250	1	333	9	0.333	300	1
18	5250	1	333	9	0.333	300	1
19	5250	1	333	9	0.333	300	1
20	5250	1	333	9	0.333	300	1
21	5250	1	333	9	0.333	300	1
22	5250	1	333	9	0.333	300	1
23	5250	1	333	9	0.333	300	1
24	5250	1	333	9	0.333	300	1
25	5250	1	333	9	0.333	300	1
26	5250	1	333	9	0.333	300	1
27	5250	1	333	9	0.333	300	0
28	5250	1	333	9	0.333	300	1
29	5250	1	333	9	0.333	300	1
30	5250	1	333	9	0.333	300	1
Detection Percentage (%)							93.33

Bridge

Test Mode	802.11be EHT20						
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	28	2	93.33%	≥ 60%

Test Mode	802.11be EHT40						
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	26	4	86.67%	≥ 60%

Test Mode	802.11be EHT80						
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	25	5	83.33%	≥ 60%

Test Mode	802.11be EHT160						
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	27	3	90.00%	≥ 60%

Test Mode		802.11be EHT20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	818	65	1222	1
2	5300	1	818	65	1222	1
3	5300	1	898	59	1114	1
4	5300	1	578	92	1730	1
5	5300	1	938	57	1066	1
6	5300	1	3066	18	326	1
7	5300	1	678	78	1475	1
8	5300	1	738	72	1355	0
9	5300	1	838	63	1193	1
10	5300	1	738	72	1355	1
11	5300	1	838	63	1193	1
12	5300	1	598	89	1672	1
13	5300	1	838	63	1193	1
14	5300	1	618	86	1618	1
15	5300	1	938	57	1066	1
16	5300	1	1578	34	634	1
17	5300	1	2748	20	364	1
18	5300	1	2069	26	483	1
19	5300	1	2265	24	442	1
20	5300	1	2544	21	393	1
21	5300	1	1340	40	746	1
22	5300	1	2774	20	360	0
23	5300	1	1217	44	822	1
24	5300	1	1654	32	605	1
25	5300	1	1296	41	772	1
26	5300	1	2417	22	414	1
27	5300	1	800	66	1250	1
28	5300	1	622	85	1608	1
29	5300	1	821	65	1218	1
30	5300	1	1920	28	521	1
Detection Percentage (%)						93.33

Test Mode		802.11be EHT40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	898	59	1114	1
2	5310	1	538	99	1859	1
3	5310	1	578	92	1730	1
4	5310	1	618	86	1618	1
5	5310	1	778	68	1285	0
6	5310	1	798	67	1253	1
7	5310	1	3066	18	326	1
8	5310	1	738	72	1355	1
9	5310	1	778	68	1285	1
10	5310	1	878	61	1139	1
11	5310	1	518	102	1931	1
12	5310	1	898	59	1114	1
13	5310	1	618	86	1618	1
14	5310	1	538	99	1859	1
15	5310	1	638	83	1567	0
16	5310	1	997	53	1003	1
17	5310	1	2296	23	436	1
18	5310	1	2193	25	456	0
19	5310	1	812	65	1232	1
20	5310	1	1371	39	729	1
21	5310	1	2706	20	370	1
22	5310	1	1266	42	790	1
23	5310	1	2641	20	379	1
24	5310	1	2618	21	382	1
25	5310	1	1818	30	550	1
26	5310	1	2999	18	333	1
27	5310	1	2587	21	387	0
28	5310	1	2836	19	353	1
29	5310	1	2670	20	375	1
30	5310	1	1172	46	853	1
Detection Percentage (%)						86.67

Test Mode		802.11be EHT80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	3066	18	326	1
2	5290	1	838	63	1193	1
3	5290	1	938	57	1066	1
4	5290	1	738	72	1355	1
5	5290	1	818	65	1222	1
6	5290	1	898	59	1114	0
7	5290	1	878	61	1139	1
8	5290	1	678	78	1475	1
9	5290	1	658	81	1520	1
10	5290	1	878	61	1139	0
11	5290	1	778	68	1285	1
12	5290	1	558	95	1792	1
13	5290	1	618	86	1618	1
14	5290	1	778	68	1285	1
15	5290	1	618	86	1618	1
16	5290	1	1955	27	512	0
17	5290	1	2204	24	454	1
18	5290	1	1650	32	606	1
19	5290	1	873	61	1145	1
20	5290	1	2760	20	362	1
21	5290	1	1778	30	562	0
22	5290	1	623	85	1605	0
23	5290	1	3061	18	327	1
24	5290	1	859	62	1164	1
25	5290	1	1843	29	543	1
26	5290	1	2535	21	394	1
27	5290	1	1883	29	531	1
28	5290	1	1443	37	693	1
29	5290	1	1383	39	723	1
30	5290	1	2829	19	353	1
Detection Percentage (%)						83.33

Test Mode		802.11be EHT160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1	658	81	1520	1
2	5250	1	898	59	1114	1
3	5250	1	718	74	1393	1
4	5250	1	618	86	1618	1
5	5250	1	918	58	1089	1
6	5250	1	918	58	1089	1
7	5250	1	938	57	1066	1
8	5250	1	538	99	1859	1
9	5250	1	818	65	1222	1
10	5250	1	598	89	1672	1
11	5250	1	898	59	1114	1
12	5250	1	778	68	1285	1
13	5250	1	658	81	1520	1
14	5250	1	538	99	1859	1
15	5250	1	778	68	1285	0
16	5250	1	3061	18	327	1
17	5250	1	1833	29	546	1
18	5250	1	1836	29	545	1
19	5250	1	1174	45	852	0
20	5250	1	984	54	1016	1
21	5250	1	2428	22	412	1
22	5250	1	1914	28	522	1
23	5250	1	2128	25	470	1
24	5250	1	3006	18	333	1
25	5250	1	2316	23	432	1
26	5250	1	1629	33	614	0
27	5250	1	1246	43	803	1
28	5250	1	1915	28	522	1
29	5250	1	1890	28	529	1
30	5250	1	622	85	1608	1
Detection Percentage (%)						90.00

---END---