



FCC Radio Test Report

FCC ID: 2BH7FBE4800

This report concerns: Original Grant

Project No. : 2502G003
Equipment : BE4800 Dual-Band Wi-Fi 7 Router
Brand Name : tp-link
Test Model : Archer BE4800
Series Model : N/A
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Date of Receipt : Feb. 07, 2025
Date of Test : Feb. 07, 2025 ~ May 09, 2025
Issued Date : May 13, 2025
Report Version : R01
Test Sample : Engineering Sample No.: DG2025020741 for Power, AC Power Line Conducted Emissions and Radiated Emissions, DG2025020740 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by

:

Chella Zheng
Chella Zheng

Approved by

:

Chay Cai
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 TEST MODES	12
3.3 PARAMETERS OF TEST SOFTWARE	14
3.4 DUTY CYCLE	15
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	18
3.6 SUPPORT UNITS	18
3.7 CUSTOMER INFORMATION DESCRIPTION	18
4 . AC POWER LINE CONDUCTED EMISSIONS	19
4.1 LIMIT	19
4.2 TEST PROCEDURE	19
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	20
4.5 EUT OPERATION CONDITIONS	20
4.6 TEST RESULTS	20
5 . RADIATED EMISSIONS	21
5.1 LIMIT	21
5.2 TEST PROCEDURE	23
5.3 DEVIATION FROM TEST STANDARD	24
5.4 TEST SETUP	24
5.5 EUT OPERATION CONDITIONS	26
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	26
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	26
5.8 TEST RESULTS - ABOVE 1000 MHZ	26
6 . BANDWIDTH	27
6.1 LIMIT	27
6.2 TEST PROCEDURE	27

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	27
6.4 TEST SETUP	27
6.5 EUT OPERATION CONDITIONS	27
6.6 TEST RESULTS	27
7 . MAXIMUM E.I.R.P.	28
7.1 LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM STANDARD	28
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
8 . POWER SPECTRAL DENSITY (E.I.R.P.)	29
8.1 LIMIT	29
8.2 TEST PROCEDURE	29
8.3 DEVIATION FROM STANDARD	29
8.4 TEST SETUP	29
8.5 EUT OPERATION CONDITIONS	29
8.6 TEST RESULTS	29
9 . MEASUREMENT INSTRUMENTS LIST	30
10 . EUT TEST PHOTOS	33
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	39
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	42
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	47
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	50
APPENDIX E - BANDWIDTH	98
APPENDIX F - MAXIMUM E.I.R.P.	113
APPENDIX G - POWER SPECTRAL DENSITY (E.I.R.P.)	142

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2502G003	R00	Original Report.	Apr. 18, 2025	Invalid
BTL-FCCP-4-2502G003	R01	Revised report to address comments.	May 13, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 291074 D02 EMC Measurement v01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum e.i.r.p.	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density (e.i.r.p.)	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	-----	NOTE (5)	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) Device Type:
 - ☒ Indoor access point
 - ☐ Subordinate device (operating under the control of an indoor access point)
 - ☒ Client device (operating under the control of an indoor access point)
- (5) The item is declared by the manufacturer.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of

For Radiated emissions above 30MHz:

Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For others:

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB17 (3m)	CISPR	30MHz ~ 200MHz	V	4.22
		30MHz ~ 200MHz	H	3.46
		200MHz ~ 1,000MHz	V	5.02
		200MHz ~ 1,000MHz	H	4.22

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB17 (3m)	CISPR	1GHz ~ 6GHz	4.56
		6GHz ~ 18GHz	4.12

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-CB17 (1m)	CISPR	18 ~ 26.5 GHz	3.56
		26.5 ~ 40 GHz	3.54

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emission	23°C	50%	AC 120V/60Hz	Hayden Chen	Feb. 20, 2025
Radiated Emissions -9kHz to 30MHz	22°C	46%	AC 120V/60Hz	Hayden Chen	Feb. 19, 2025
Radiated Emissions -30MHz to 1000MHz	25°C	46%	AC 120V/60Hz	Calvin Wen	Mar. 01, 2025
Radiated Emissions -Above 1000 MHz	23-25°C	41-46%	AC 120V/60Hz	Calvin Wen	Feb. 15, 2025- Apr. 01, 2025
	23°C	47%	AC 120V/60Hz	Calvin Wen	Apr. 08, 2025
	23°C	48%	AC 120V/60Hz	Calvin Wen	May 09, 2025
Bandwidth	22°C	51%	AC 120V/60Hz	Arvin Tong	Mar. 03, 2025- Apr. 01, 2025
Maximum e.i.r.p.	23°C	48-53%	AC 120V/60Hz	Andrew Jiang Alex Yin	Feb. 19, 2025- May 06, 2025
Power Spectral Density (e.i.r.p.)	22°C	51%	AC 120V/60Hz	Arvin Tong	Mar. 03, 2025- Mar. 25, 2025
	21°C	50%	AC 120V/60Hz	Arvin Tong	May 08, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	BE4800 Dual-Band Wi-Fi 7 Router
Brand Name	tp-link
Test Model	Archer BE4800
Series Model	N/A
Model Difference(s)	N/A
Software Version	V1
Hardware Version	V1
Power Source	DC Voltage supplied from AC adapter. Model: T120200-2B1
Power Rating	I/P: 100-240V~ 50/60Hz 0.8A O/P: 12V $\overline{\text{---}}$ 2.0A
Operation Frequency Band(s)	UNII-4: 5850 MHz ~ 5895 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax/be: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 1733.4 Mbps IEEE 802.11ax: up to 2402 Mbps IEEE 802.11be: up to 4326 Mbps
Maximum e.i.r.p. (Indoor access point device)	IEEE 802.11be(EHT80): 34.89 dBm (3.0832 W)
Maximum e.i.r.p.(Client device)	IEEE 802.11ac(VHT80): 29.72 dBm (0.9376 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

UNII-3+UNII-4	
IEEE 802.11a / IEEE 802.11n(HT20) / IEEE 802.11ac(VHT20) / IEEE 802.11ax(HE20) / IEEE 802.11be(EHT20)	
Channel	Frequency (MHz)
169	5845

UNII-4	
IEEE 802.11a / IEEE 802.11n(HT20) / IEEE 802.11ac(VHT20) / IEEE 802.11ax(HE20) / IEEE 802.11be(EHT20)	
Channel	Frequency (MHz)
173	5865
177	5885

UNII-3+UNII-4	
IEEE 802.11n(HT40) / IEEE 802.11ac(VHT40) / IEEE 802.11ax(HE40) / IEEE 802.11be(EHT40)	
Channel	Frequency (MHz)
167	5835

UNII-4	
IEEE 802.11n(HT40) / IEEE 802.11ac(VHT40) / IEEE 802.11ax(HE40) / IEEE 802.11be(EHT40)	
Channel	Frequency (MHz)
175	5875

UNII-3+UNII-4	
IEEE 802.11ac(VHT80) / IEEE 802.11ax(HE80) / IEEE 802.11be(EHT80)	
Channel	Frequency (MHz)
171	5855

UNII-3+UNII-4	
IEEE 802.11ac(VHT160) / IEEE 802.11ax(HE160) / IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)
163	5815

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	tp-link	N/A	Dipole	weld	5.17
2	tp-link	N/A	Dipole	weld	6.61

Note:

- 1) This EUT supports CDD, and all antenna gains are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=6.61.
For power spectral density measurements, Directional gain= $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi.
So the Directional gain(each angle)= $10\log[(10^{4.89/20} + 10^{3.99/20})^2 / 2]$ dBi=7.46.
- 2) Beamforming Gain: 3 dB.

4. Table for Antenna Configuration:

Operating Mode	TX Mode	2TX
IEEE 802.11a		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ac(VHT160)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2)
IEEE 802.11ax(HE160)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT20)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT40)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT80)		V (Ant. 1 + Ant. 2)
IEEE 802.11be(EHT160)		V (Ant. 1 + Ant. 2)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 169/173/177
Mode 2	TX AC(VHT20) Mode Channel 169/173/177
Mode 3	TX AC(VHT40) Mode Channel 167/175
Mode 4	TX AC(VHT80) Mode Channel 171
Mode 5	TX AC(VHT160) Mode Channel 163
Mode 6	TX BE(EHT20) Mode Channel 169/173/177
Mode 7	TX BE(EHT40) Mode Channel 167/175
Mode 8	TX BE(EHT80) Mode Channel 171

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 8	TX BE(EHT80) Mode Channel 171

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 8	TX BE(EHT80) Mode Channel 171

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 169/173/177
Mode 2	TX AC(VHT20) Mode Channel 169/173/177
Mode 3	TX AC(VHT40) Mode Channel 167/175
Mode 4	TX AC(VHT80) Mode Channel 171
Mode 5	TX AC(VHT160) Mode Channel 163
Mode 6	TX BE(EHT20) Mode Channel 169/173/177
Mode 7	TX BE(EHT40) Mode Channel 167/175
Mode 8	TX BE(EHT80) Mode Channel 171
Mode 9	TX BE(EHT160) Mode Channel 163

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 169/173/177
Mode 2	TX AC(VHT20) Mode Channel 169/173/177
Mode 3	TX AC(VHT40) Mode Channel 167/175
Mode 4	TX AC(VHT80) Mode Channel 171
Mode 5	TX AC(VHT160) Mode Channel 163
Mode 6	TX BE(EHT20) Mode Channel 169/173/177
Mode 7	TX BE(EHT40) Mode Channel 167/175
Mode 8	TX BE(EHT80) Mode Channel 171
Mode 9	TX BE(EHT160) Mode Channel 163

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AC(VHT80) Mode Channel 171 is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.
- (6) The RF Output Power of the Beamforming mode will be lower than that of the Non Beamforming mode. Only Non Beamforming mode will be evaluated and recorded in the report.
- (7) EHT20/EHT40/EHT80/EHT160 covers HE20/HE40/HE80/HE160, due to same modulation (in full RU). The power setting for 802.11ax HE20/HE40/HE80/HE160 are the same or lower than 802.11be EHT20/EHT40/EHT80/EHT160.
- (8) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.
- (9) IEEE 802.11ax mode and IEEE 802.11be mode only support full RU, so only the full RU is evaluated and measured inside report.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-4 (Indoor access point device)			
Test Software Version	QPST		
Frequency (MHz)	5845	5865	5885
IEEE 802.11a	19.5	17	17
IEEE 802.11ac(VHT20)	20	18.5	18.5
IEEE 802.11be(EHT20)	21	18	18
Frequency (MHz)	5835	5875	
IEEE 802.11ac(VHT40)	23	21	
IEEE 802.11be(EHT40)	24	21	
Frequency (MHz)	5855		
IEEE 802.11ac(VHT80)	25		
IEEE 802.11be(EHT80)	25		
Frequency (MHz)	5815		
IEEE 802.11ac(VHT160)	16		
IEEE 802.11be(EHT160)	16.5		

UNII-4 (Client device)			
Test Software Version	QPST		
Frequency (MHz)	5845	5865	5885
IEEE 802.11a	15	15	15
IEEE 802.11ac(VHT20)	16	16	16
IEEE 802.11be(EHT20)	15.5	15	18
Frequency (MHz)	5835	5875	
IEEE 802.11ac(VHT40)	18.5	18.5	
IEEE 802.11be(EHT40)	19	19	
Frequency (MHz)	5855		
IEEE 802.11ac(VHT80)	20.5		
IEEE 802.11be(EHT80)	19		
Frequency (MHz)	5815		
IEEE 802.11ac(VHT160)	16		
IEEE 802.11be(EHT160)	16.5		

3.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

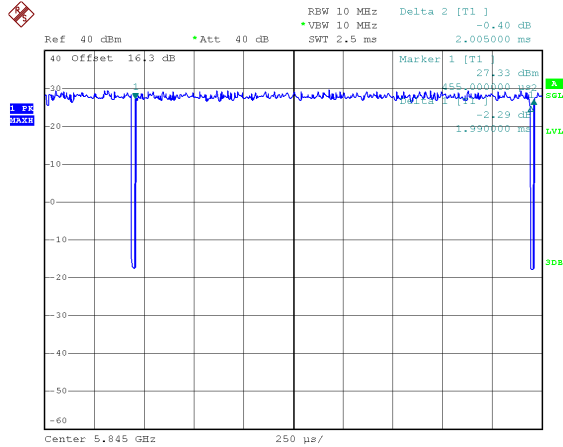

Date: 28.FEB.2025 13:43:39

Duty cycle = 1.990 ms / 2.005 ms = 99.2523%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$


IEEE 802.11ac(VHT20)

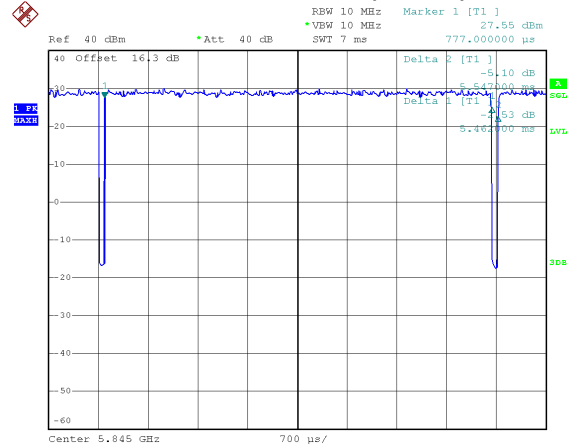

Date: 28.FEB.2025 13:46:27

Duty cycle = 5.462 ms / 5.547 ms = 98.468%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$


IEEE 802.11ac(VHT40)

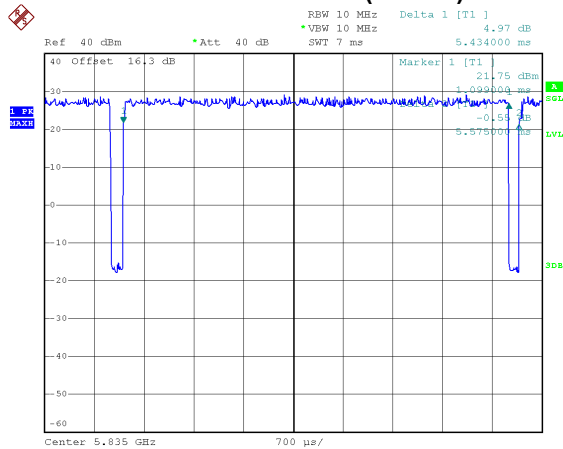

Date: 28.FEB.2025 13:49:36

Duty cycle = 5.434 ms / 5.575 ms = 97.471%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.11$


IEEE 802.11ac(VHT80)

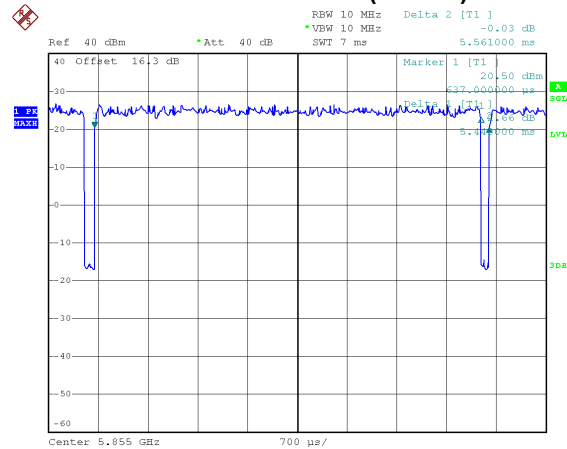

Date: 28.FEB.2025 13:52:14

Duty cycle = 5.443 ms / 5.561 ms = 97.878%
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.09$


IEEE 802.11ac(VHT160)

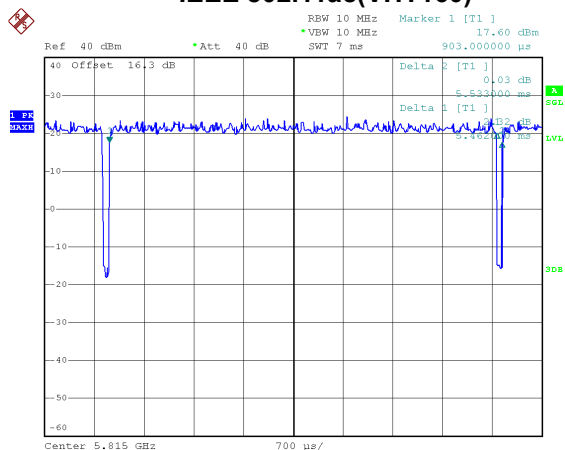

Date: 28.FEB.2025 13:54:49

Duty cycle = 5.462 ms / 5.533 ms = 98.717%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$


IEEE 802.11be(EHT20)

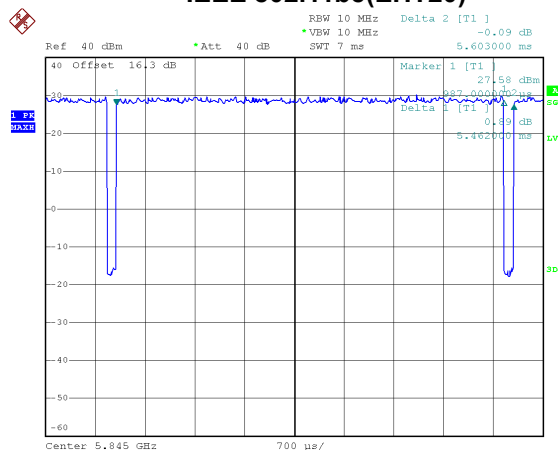

Date: 28.FEB.2025 13:48:14

Duty cycle = 5.462 ms / 5.603 ms = 97.483%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.11$


IEEE 802.11be(EHT40)

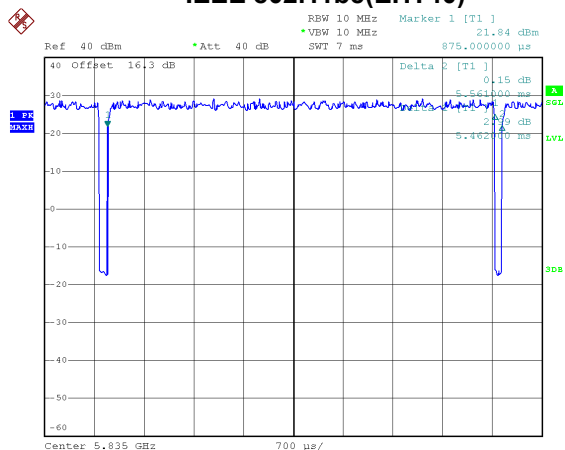

Date: 28.FEB.2025 13:50:32


Duty cycle = 5.462 ms / 5.561 ms = 98.220%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$

IEEE 802.11be(EHT80)

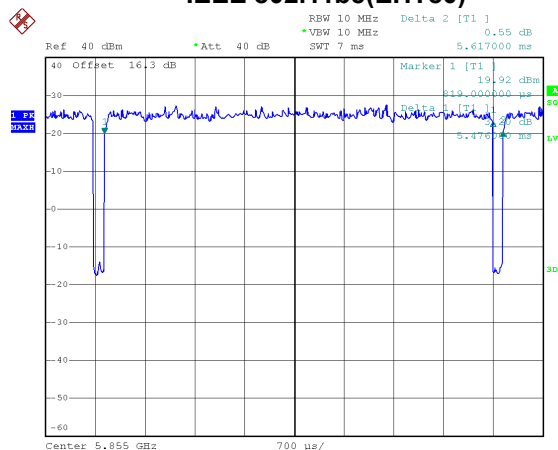

Date: 28.FEB.2025 13:53:35

Duty cycle = 5.476 ms / 5.617 ms = 97.490%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.11$

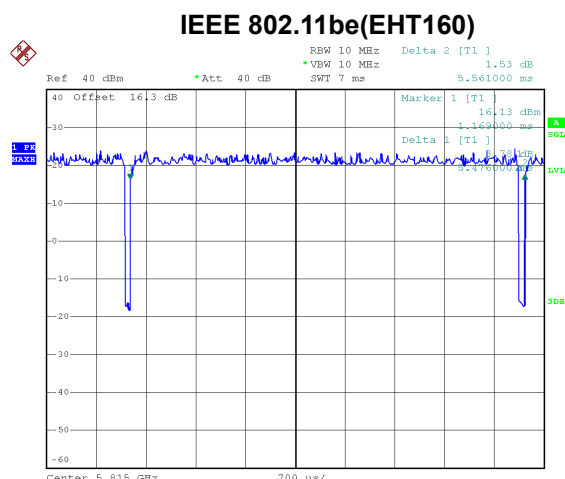

Date: 28.FEB.2025 13:55:32

Duty cycle = 5.476 ms / 5.561 ms = 98.471%
Duty Factor = 10 log(1 / Duty cycle) = 0.00

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 714 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 758 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1515 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3077 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 5405 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3125 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3125 Hz (Duty cycle < 98%).


For IEEE 802.11be(EHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3279 Hz (Duty cycle < 98%).

For IEEE 802.11be(EHT160):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3226 Hz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

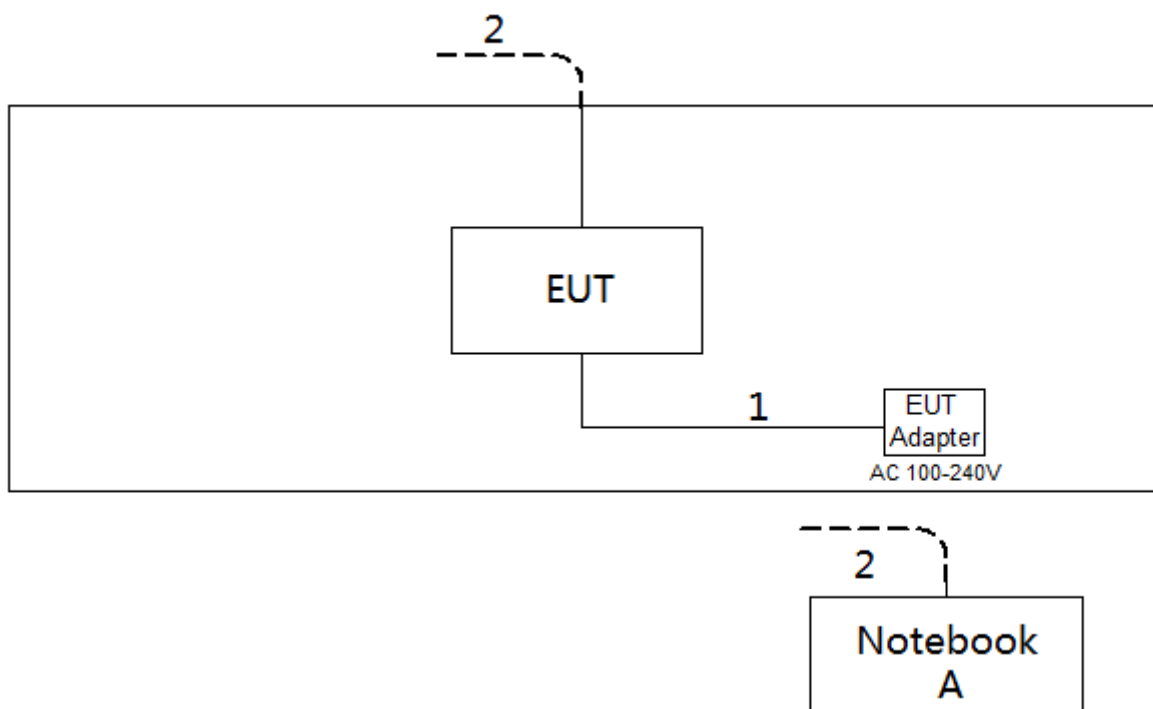

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Honor	14SER5 3500	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. Part of the cable losses (1dB) are provided by the manufacturer, while the other parts of the cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

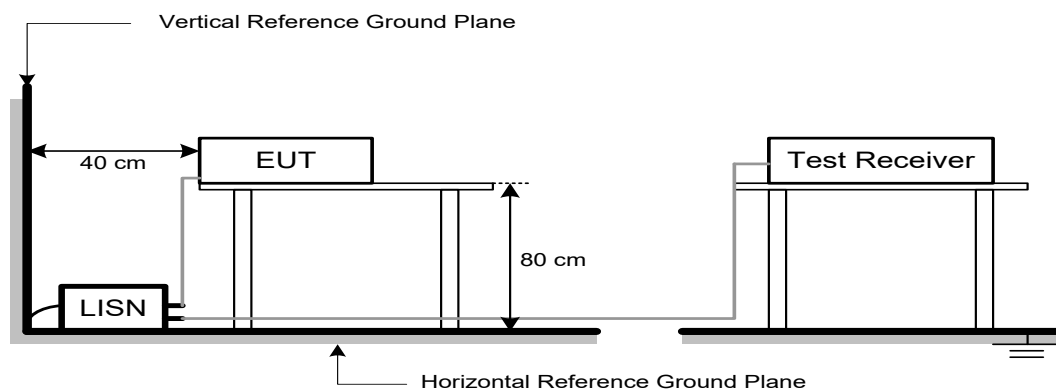

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5725-5850 NOTE (2)	15	110.2	119.7(Note 5)
	-7	88.2	97.7(Note 5)
	-5	90.2	99.7(Note 5)
	-27	68.2	77.7(Note 5)
	10	105.2	114.7(Note 5)
	15.6	110.8	120.3(Note 5)
	27	122.2	131.7(Note 5)

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(5)(i), for an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.

According to 15.407(b)(5)(ii), for a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz.

According to 15.407(b)(5)(iii), for a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

- (3) Unwanted emissions outside of restricted bands are measured with a RMS detector.
- (4) Band Edge measurements made below 5725 MHz are to be made with a Peak detector. Band Edge measurements above 5895 MHz are to be made with a RMS detector. Band Edge measurements above 5895 MHz should also include Peak plots to show compliance with 15.35(b) where the peak emissions must be limited to no more than 20 dB above the average limit.

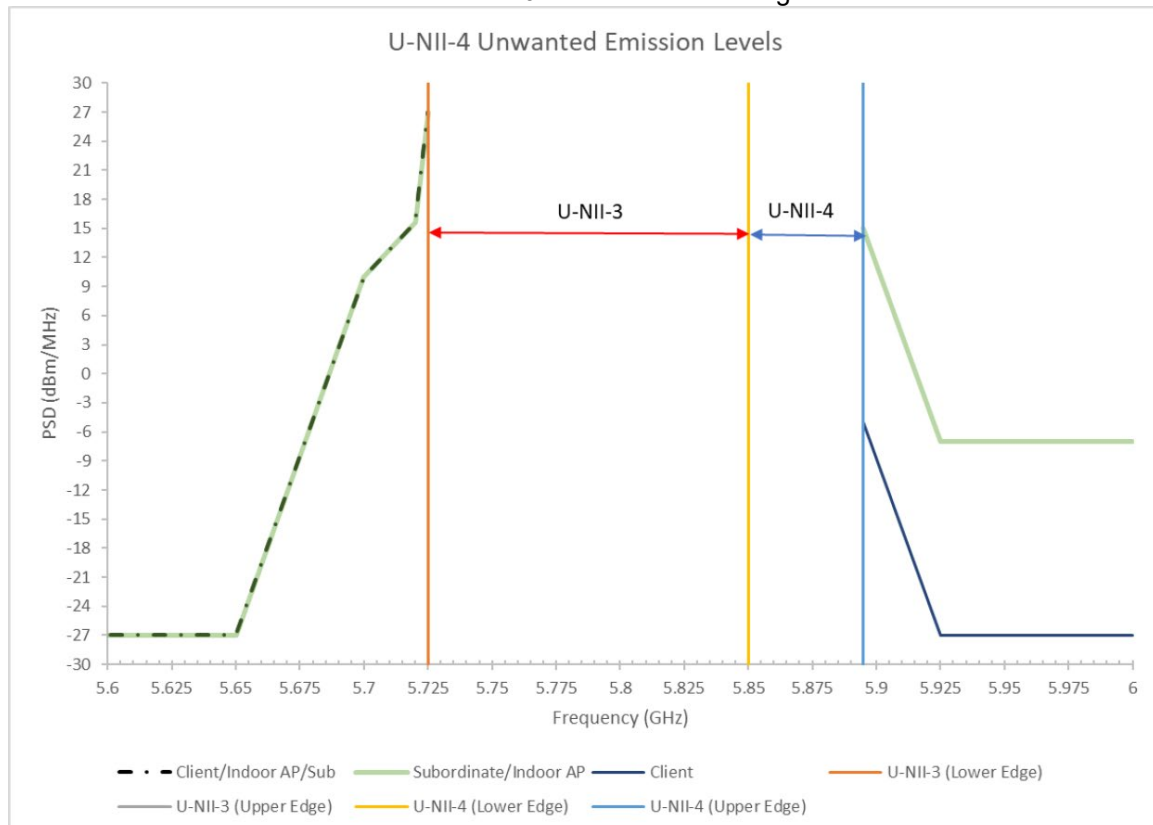

- (5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

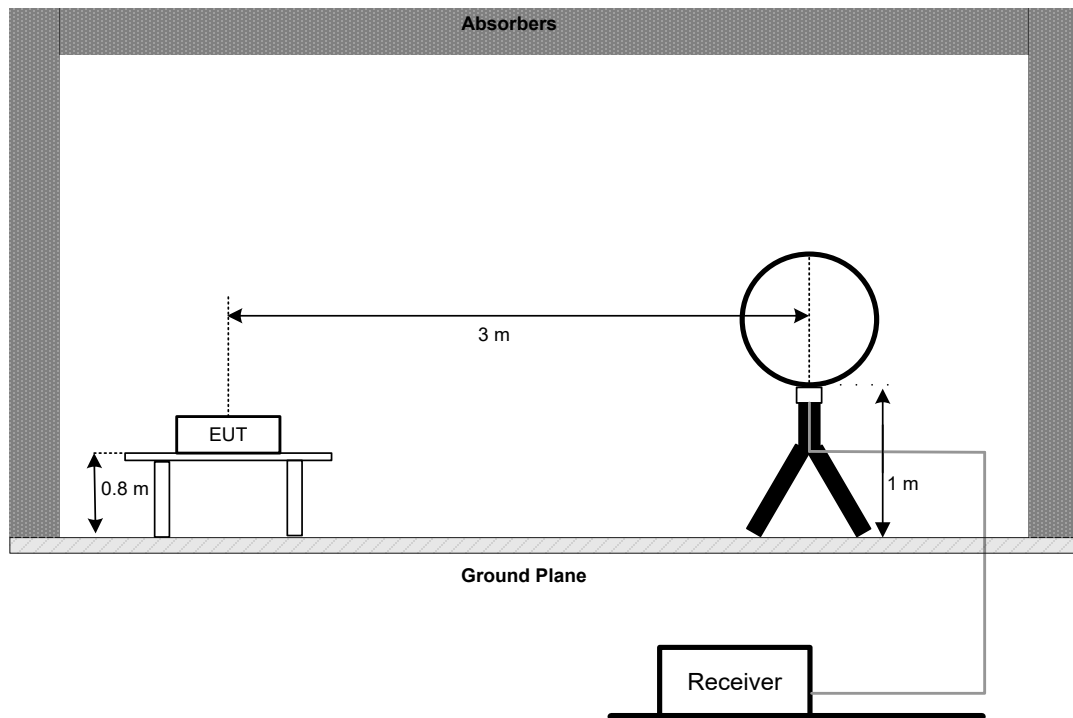


30 MHz to 1 GHz

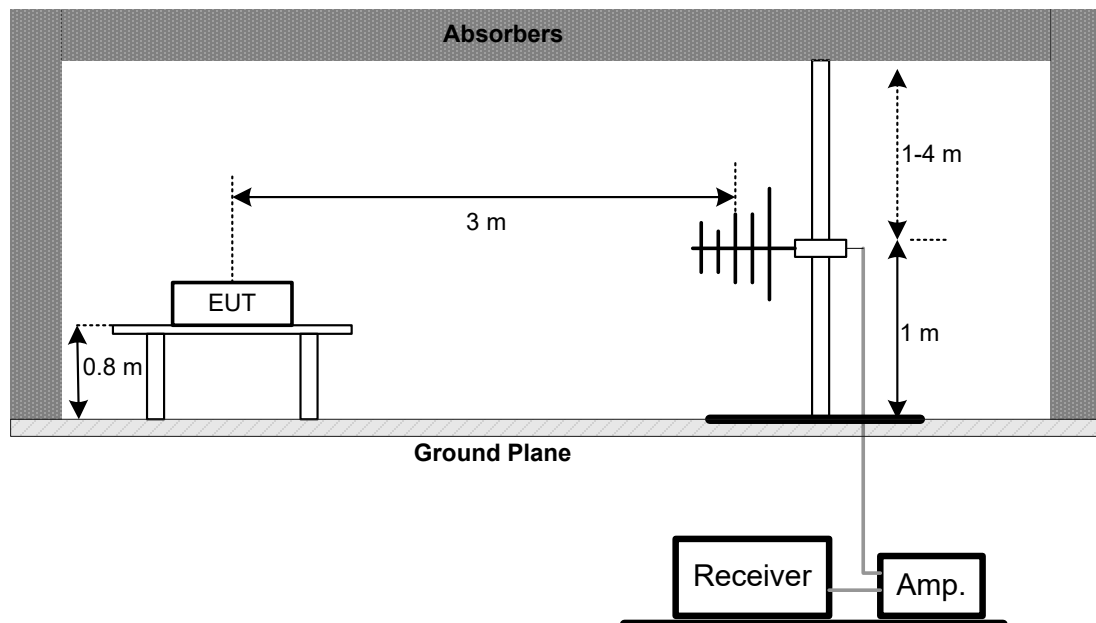

Above 1 GHz Band edge & Harmonic (1 GHz to 18 GHz)

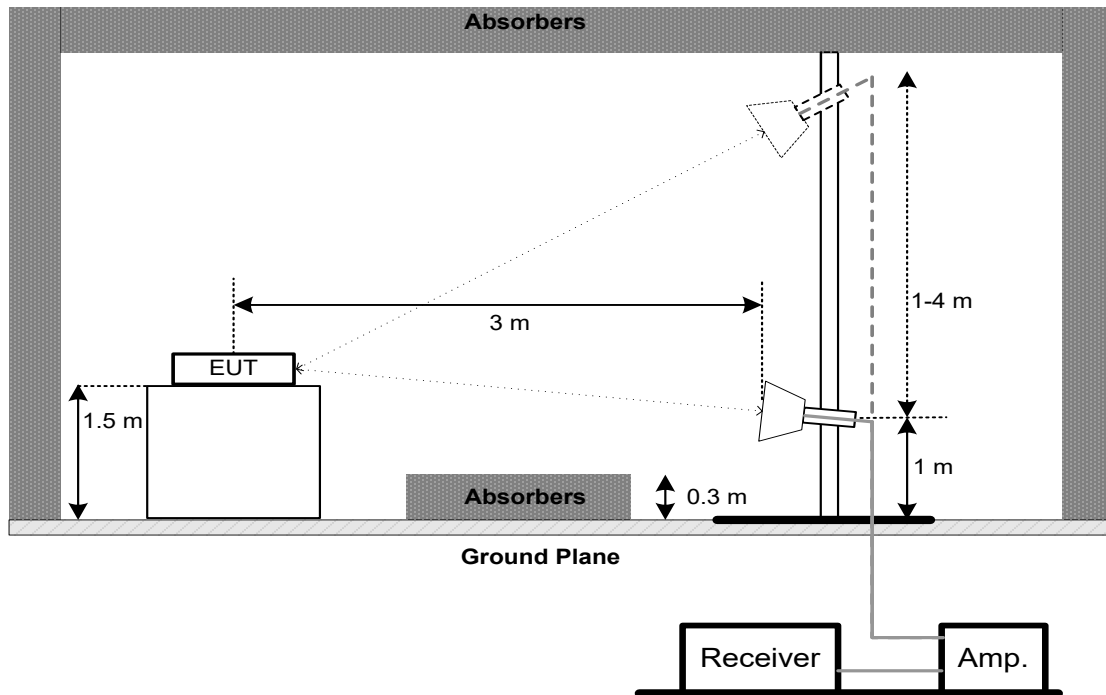

Harmonic (18 GHz to 40 GHz)

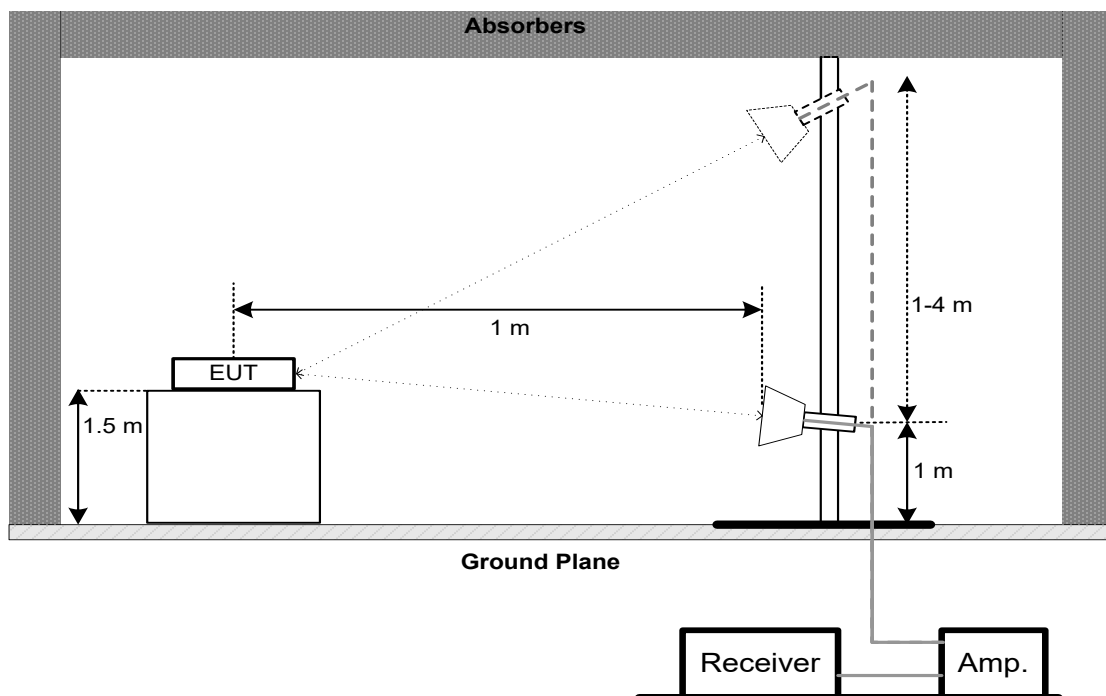

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBUV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(e)	6 dB Bandwidth	Minimum 500 kHz	5850-5895

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM E.I.R.P.

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum e.i.r.p.	Indoor Access Point 36 dBm	5850-5895
		Subordinate device operating under the control of an indoor access point 36 dBm	
		Client devices operating under the control of an indoor access point 30 dBm	


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

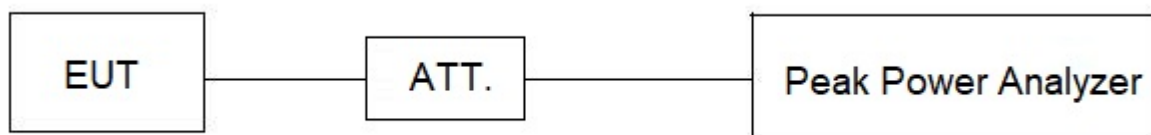

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY (E.I.R.P.)

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density (e.i.r.p.)	Indoor Access Point 20 dBm/MHz	5850-5895
		Subordinate device operating under the control of an indoor access point 20 dBm/MHz	
		Client devices operating under the control of an indoor access point 14 dBm/MHz	

8.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

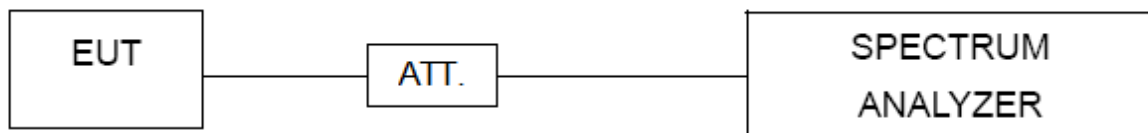

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 06, 2025
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1587	Apr. 25, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06010	Apr. 25, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980865	Oct. 29, 2025
4	Cable	RegalWay	LMR400-NMNM-2.5m	N/A	Jan. 07, 2026
5	Cable	RegalWay	LMR400-NMNM-7m	N/A	Jan. 07, 2026
6	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jan. 07, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	ETS	9*6*6	N/A	Jan. 02, 2026

Radiated Emissions - 1 GHz to 18GHz(CB17)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
2	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M-KJ	N/A	Jan. 07, 2026
3	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Jan. 07, 2026
4	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Jan. 07, 2026
5	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210510A18ES	Sep. 26, 2025
6	Preamplifier	EMC INSTRUMENT	EMC118A45SE	980878	Nov. 25, 2025
7	966 Chamber room	ETS	9*6*6	N/A	Jan. 03, 2026
8	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9969	N/A	May 31, 2025

Radiated Emissions - 1 GHz to 18GHz(CB18, Test Date: May 09, 2025)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Apr. 06, 2026
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Apr. 06, 2026
6	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Apr. 06, 2026
7	966 Chamber room	ETS	RFD-100 (SVSWR)	Q2179	Apr. 06, 2026
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9969	N/A	Oct. 29, 2025

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Oct. 29, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 07, 2026
3	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 07, 2026
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
5	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
6	966 Chamber room	ETS	9*6*6	N/A	Jan. 03, 2026
7	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Bandwidth & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Aug. 20, 2025
2	Spectrum Analyzer	R&S	FSP40	100185	May 31, 2025
3	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
4	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A


Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



10. EUT TEST PHOTOS



AC Power Line Conducted Emissions Test Photos

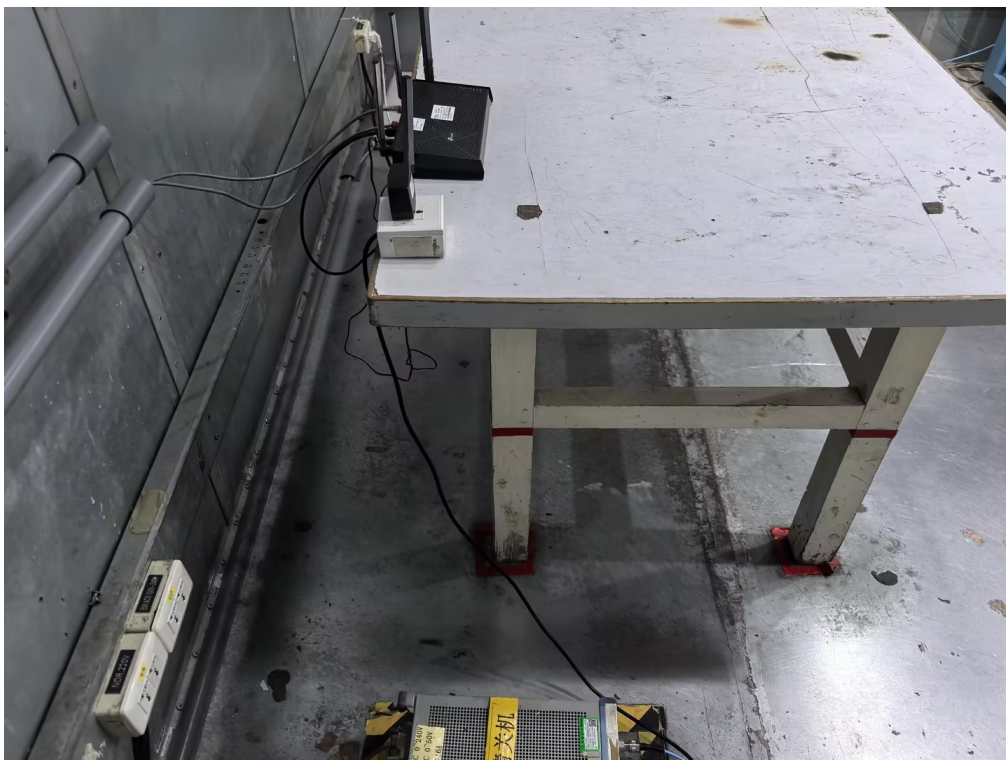

Radiated Emissions Test Photos



9 kHz to 30 MHz

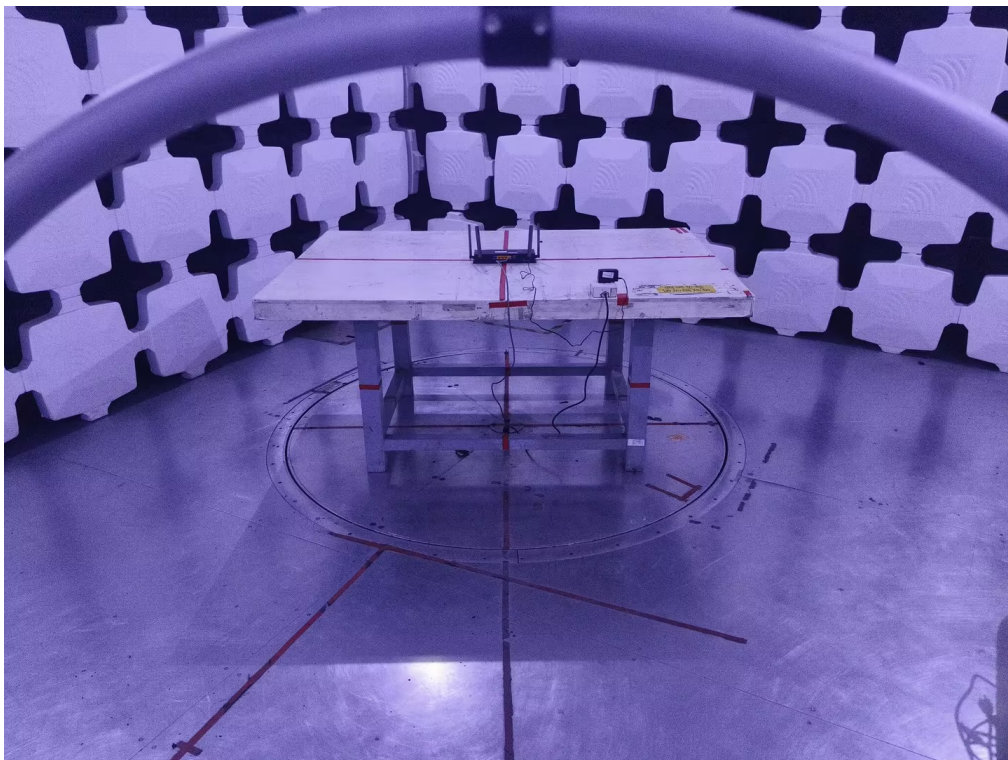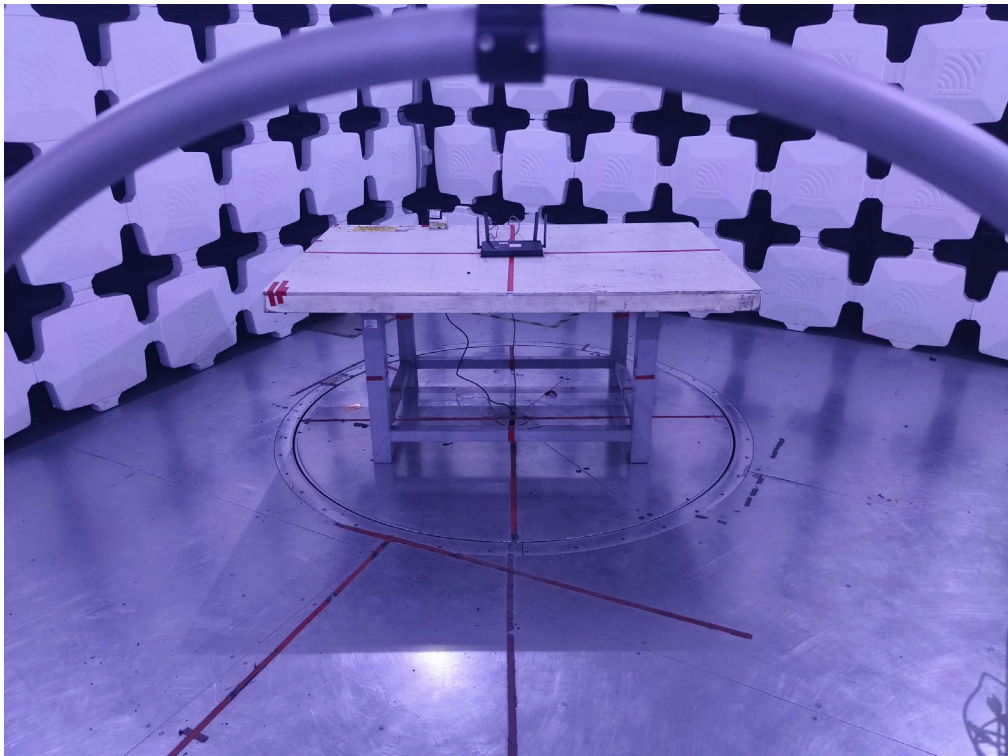


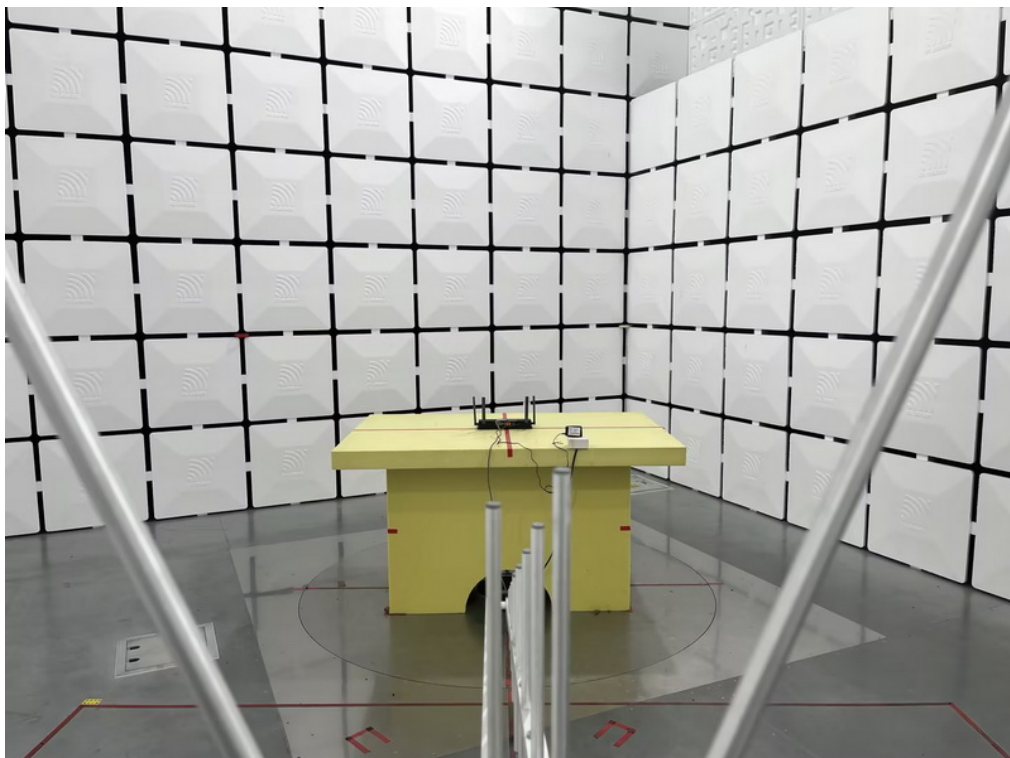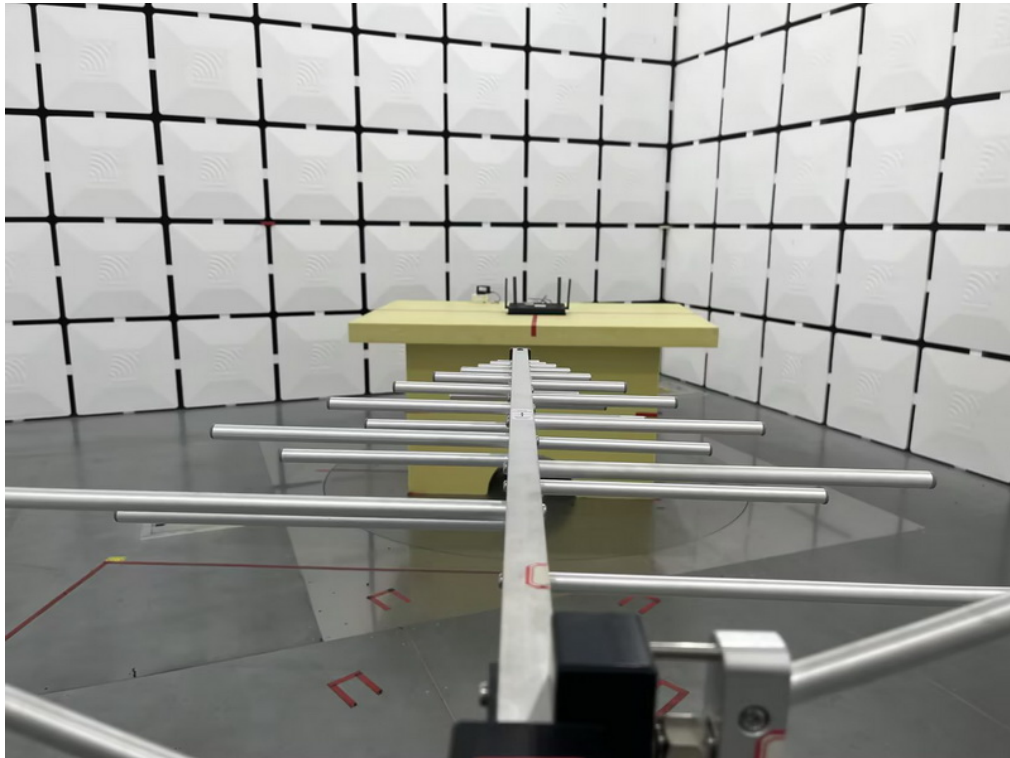Radiated Emissions Test Photos**30 MHz to 1 GHz**



Radiated Emissions Test Photos

1 GHz to 18 GHz

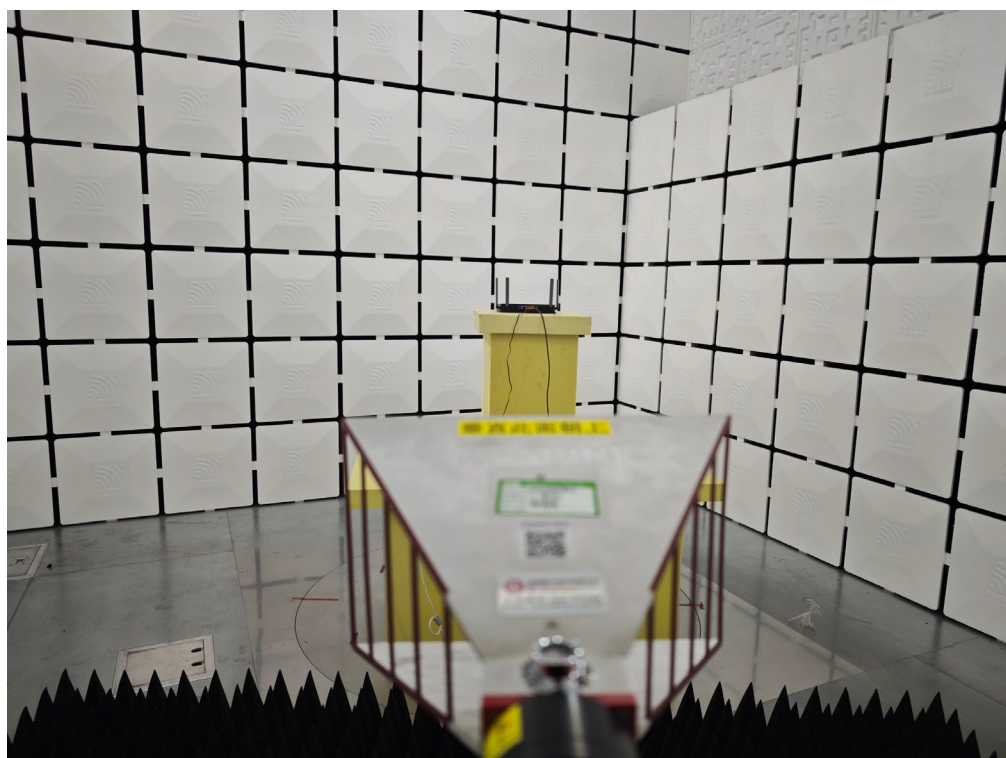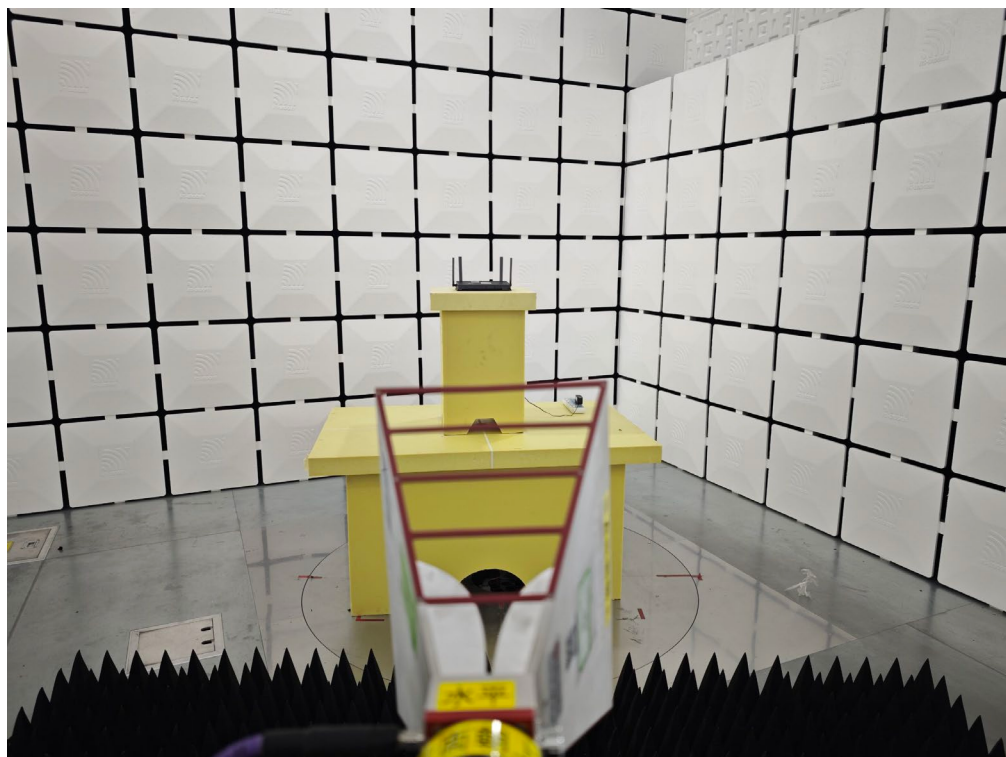

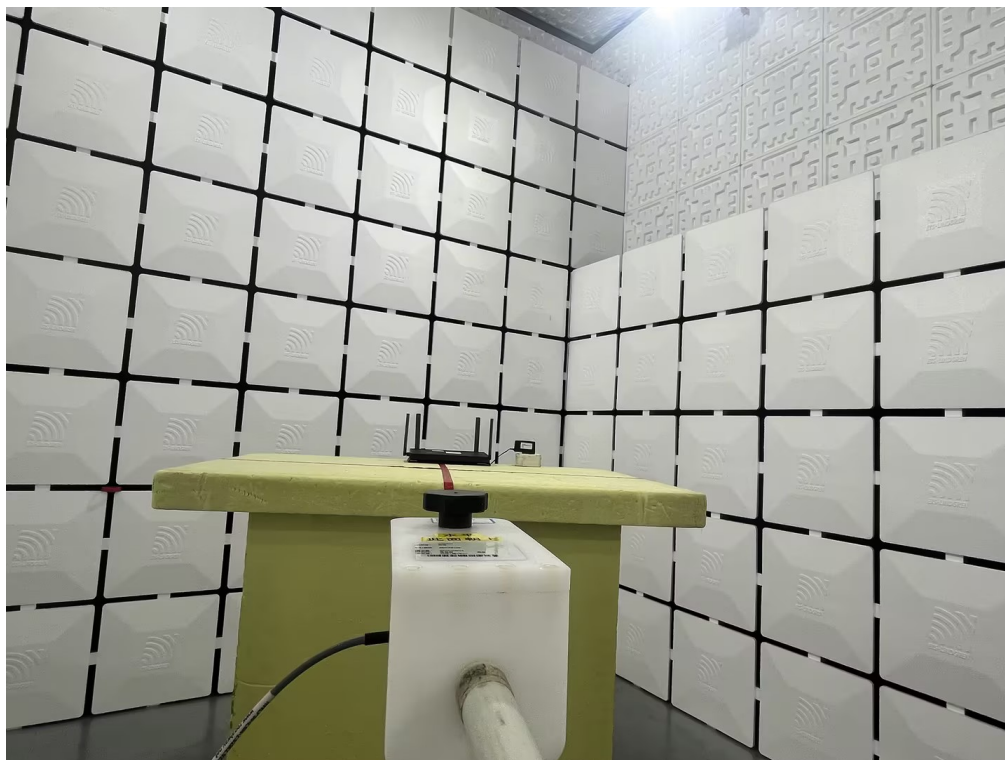
Radiated Emissions Test Photos**Above 18 GHz**

Conducted Test Photos

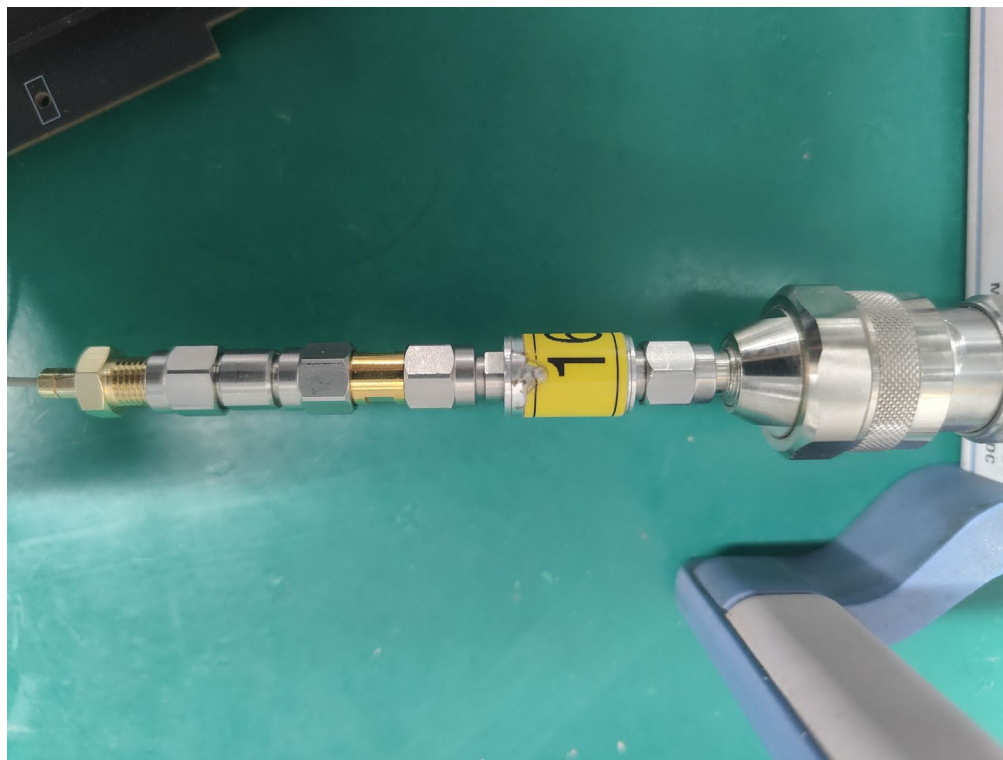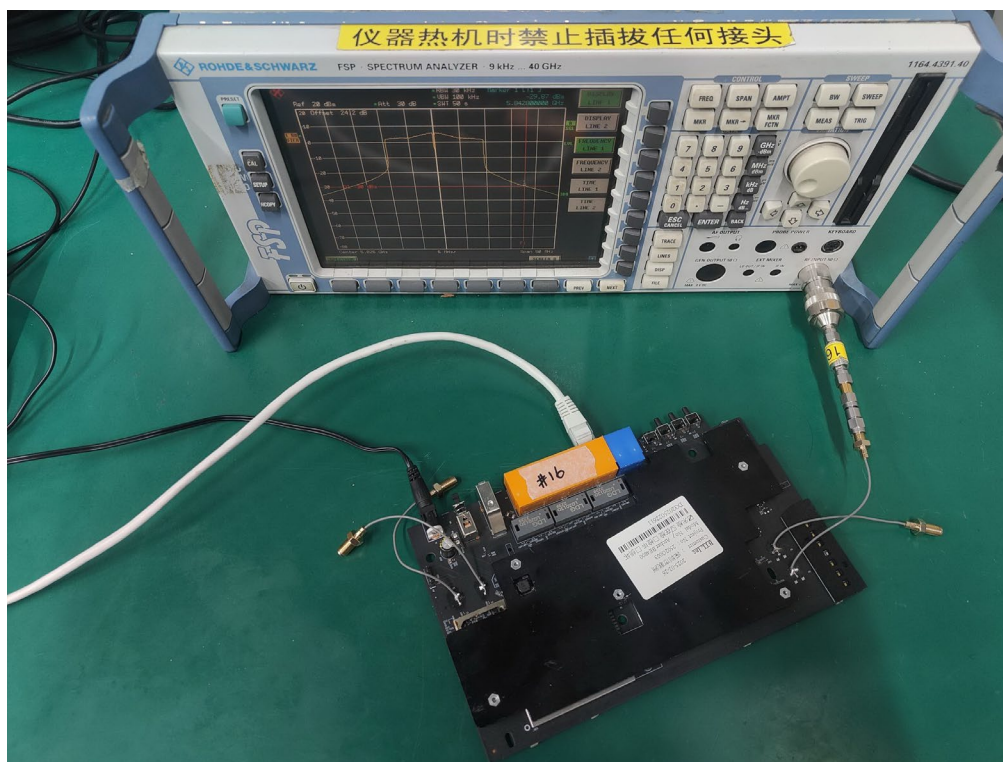

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX BE(EHT80) Mode Channel 171	Phase	Line
-----------	-------------------------------	-------	------

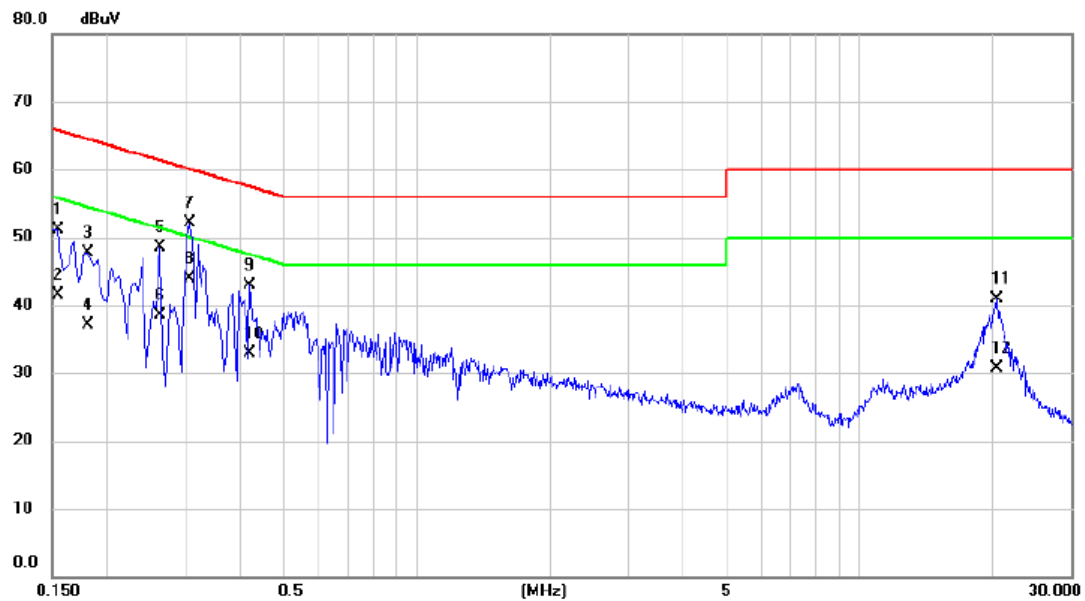


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1545	41.28	9.91	51.19	65.75	-14.56	QP	
2		0.1545	31.50	9.91	41.41	55.75	-14.34	AVG	
3		0.1815	37.82	9.92	47.74	64.42	-16.68	QP	
4		0.1815	27.20	9.92	37.12	54.42	-17.30	AVG	
5		0.2625	38.57	9.91	48.48	61.35	-12.87	QP	
6		0.2625	28.60	9.91	38.51	51.35	-12.84	AVG	
7		0.3075	42.19	9.92	52.11	60.04	-7.93	QP	
8	*	0.3075	33.90	9.92	43.82	50.04	-6.22	AVG	
9		0.4200	32.95	9.94	42.89	57.45	-14.56	QP	
10		0.4200	22.90	9.94	32.84	47.45	-14.61	AVG	
11		20.4315	25.66	15.20	40.86	60.00	-19.14	QP	
12		20.4315	15.60	15.20	30.80	50.00	-19.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Phase	Neutral
-----------	-------------------------------	-------	---------

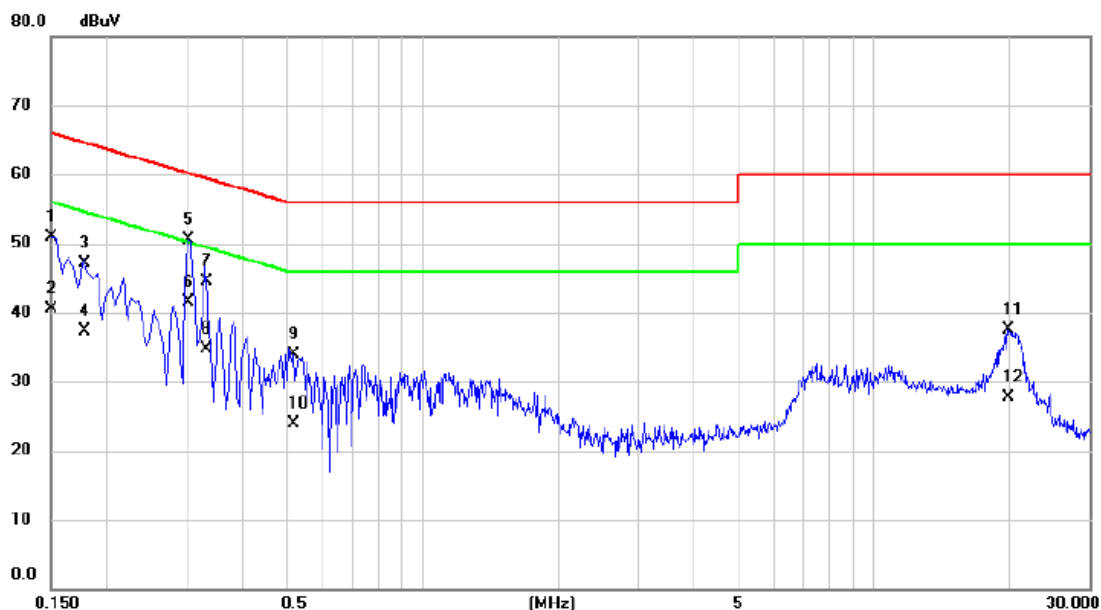


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	40.88	9.97	50.85	66.00	-15.15	QP	
2		0.1500	30.50	9.97	40.47	56.00	-15.53	AVG	
3		0.1787	37.18	9.97	47.15	64.55	-17.40	QP	
4		0.1787	27.40	9.97	37.37	54.55	-17.18	AVG	
5		0.3030	40.54	9.98	50.52	60.16	-9.64	QP	
6	*	0.3030	31.60	9.98	41.58	50.16	-8.58	AVG	
7		0.3321	34.53	9.98	44.51	59.40	-14.89	QP	
8		0.3321	24.80	9.98	34.78	49.40	-14.62	AVG	
9		0.5190	23.93	10.04	33.97	56.00	-22.03	QP	
10		0.5190	13.90	10.04	23.94	46.00	-22.06	AVG	
11		19.8150	22.42	15.02	37.44	60.00	-22.56	QP	
12		19.8150	12.60	15.02	27.62	50.00	-22.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

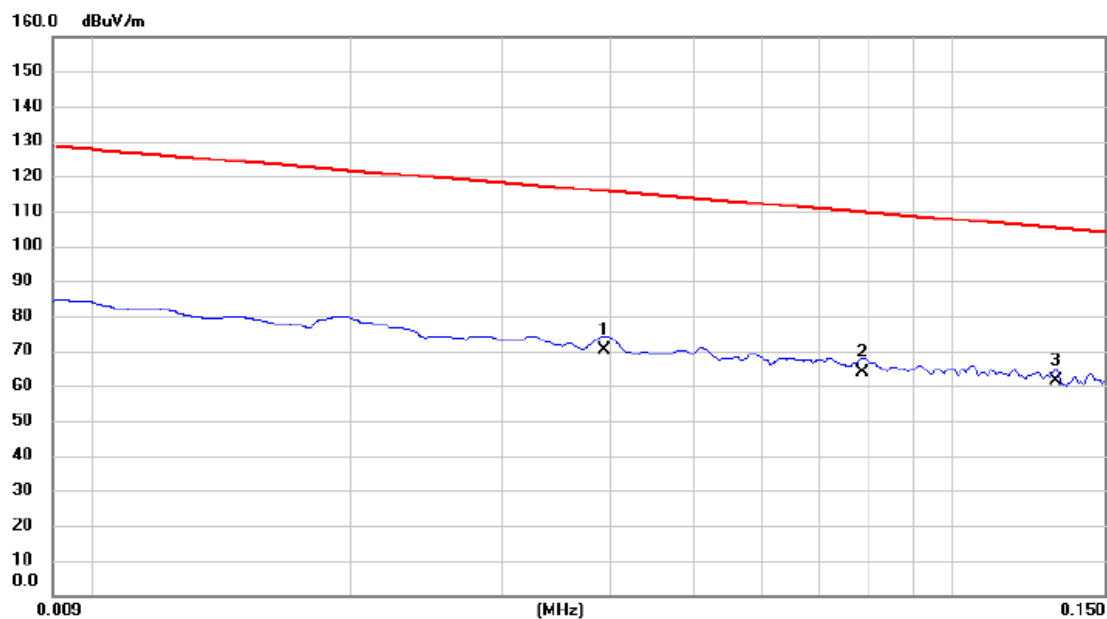


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0394	48.87	21.19	70.06	115.69	-45.63	AVG	
2		0.0786	42.63	21.34	63.97	109.70	-45.73	AVG	
3	*	0.1318	40.17	21.29	61.46	105.21	-43.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

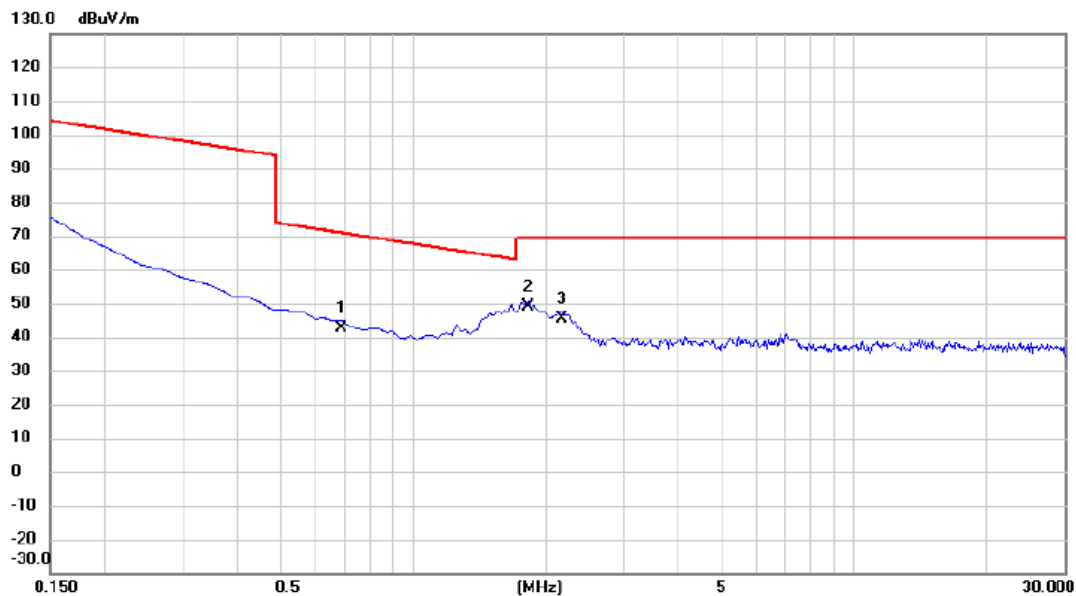


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.6873	21.64	21.12	42.76	70.86	-28.10	QP	
2	*	1.8216	27.91	21.13	49.04	69.54	-20.50	QP	
3		2.1798	24.32	21.11	45.43	69.54	-24.11	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

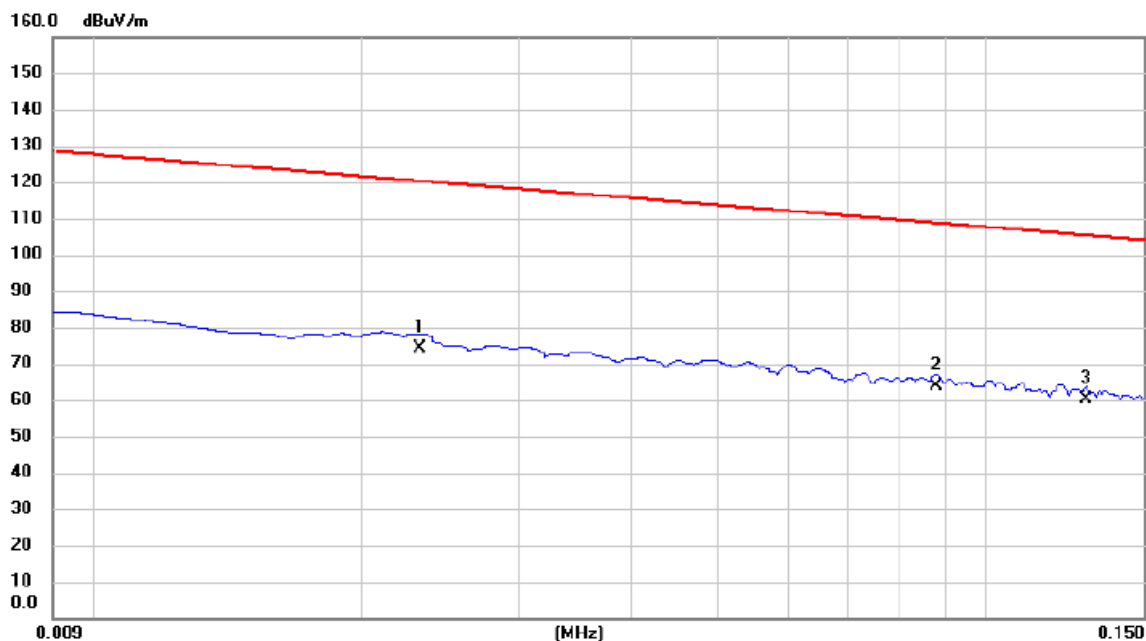


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0232	53.45	20.94	74.39	120.30	-45.91	AVG	
2	*	0.0878	42.63	21.34	63.97	108.73	-44.76	AVG	
3		0.1293	38.74	21.30	60.04	105.38	-45.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

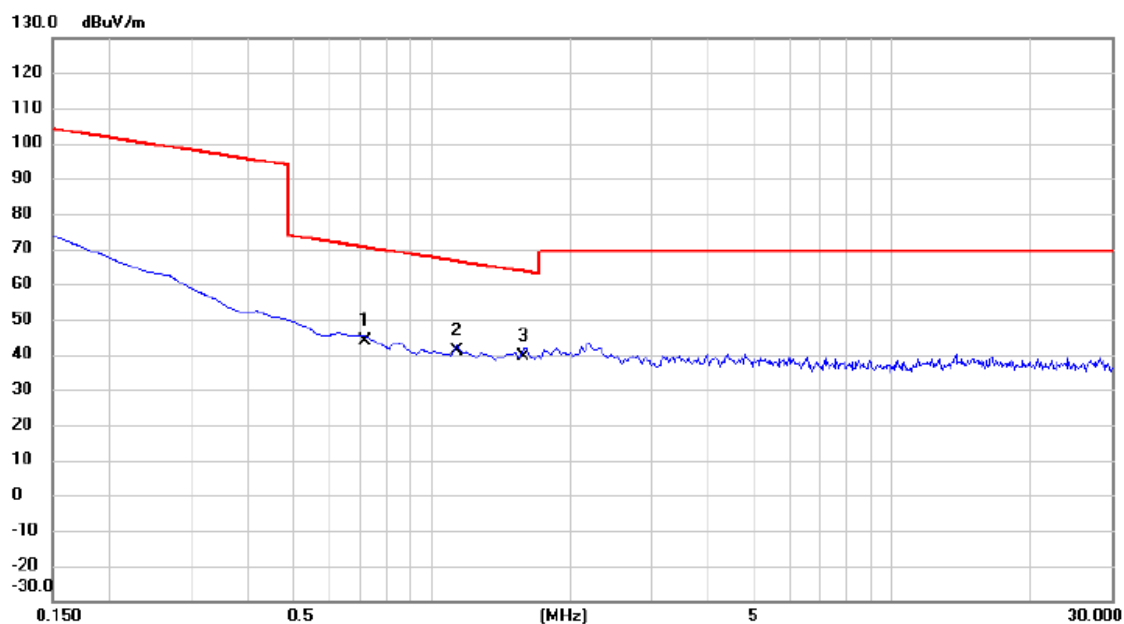

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	0.7171	22.61	21.13	43.74	70.49	-26.75	QP	
2	1.1350	19.74	21.19	40.93	66.50	-25.57	QP	
3 *	1.5827	18.43	21.15	39.58	63.62	-24.04	QP	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Vertical
-----------	-------------------------------	--------------	----------

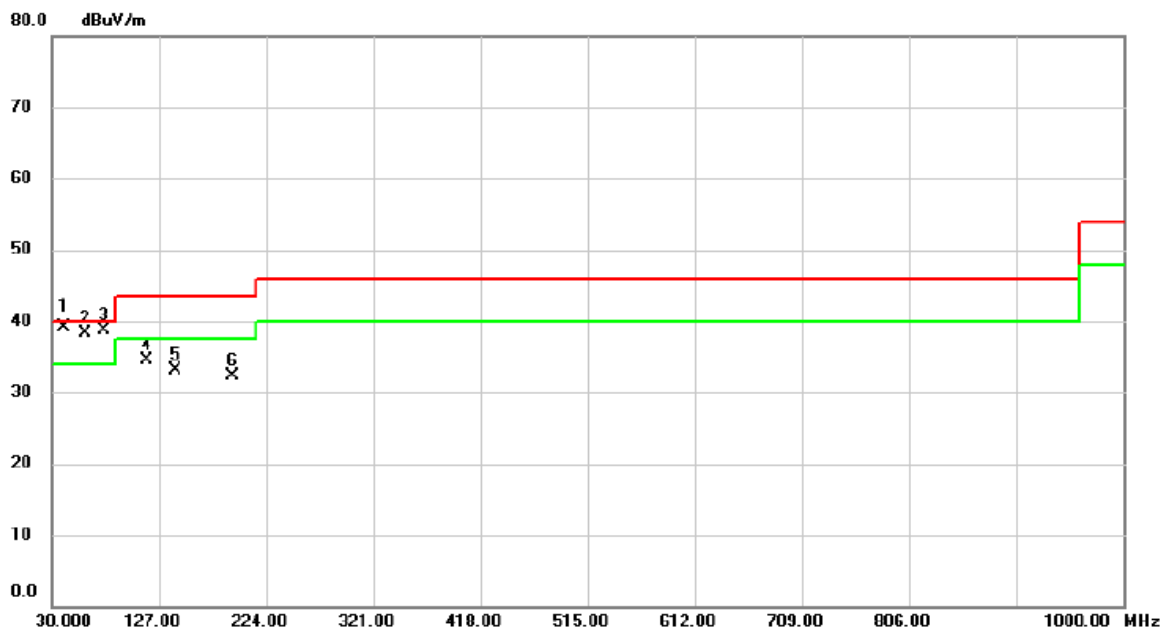


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40.670	50.94	-11.88	39.06	40.00	-0.94	QP	
2	!	60.070	50.21	-12.00	38.21	40.00	-1.79	peak	
3	!	77.530	54.04	-15.28	38.76	40.00	-1.24	peak	
4		116.330	48.38	-13.90	34.48	43.50	-9.02	peak	
5		141.550	44.99	-11.83	33.16	43.50	-10.34	peak	
6		192.960	46.57	-14.24	32.33	43.50	-11.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

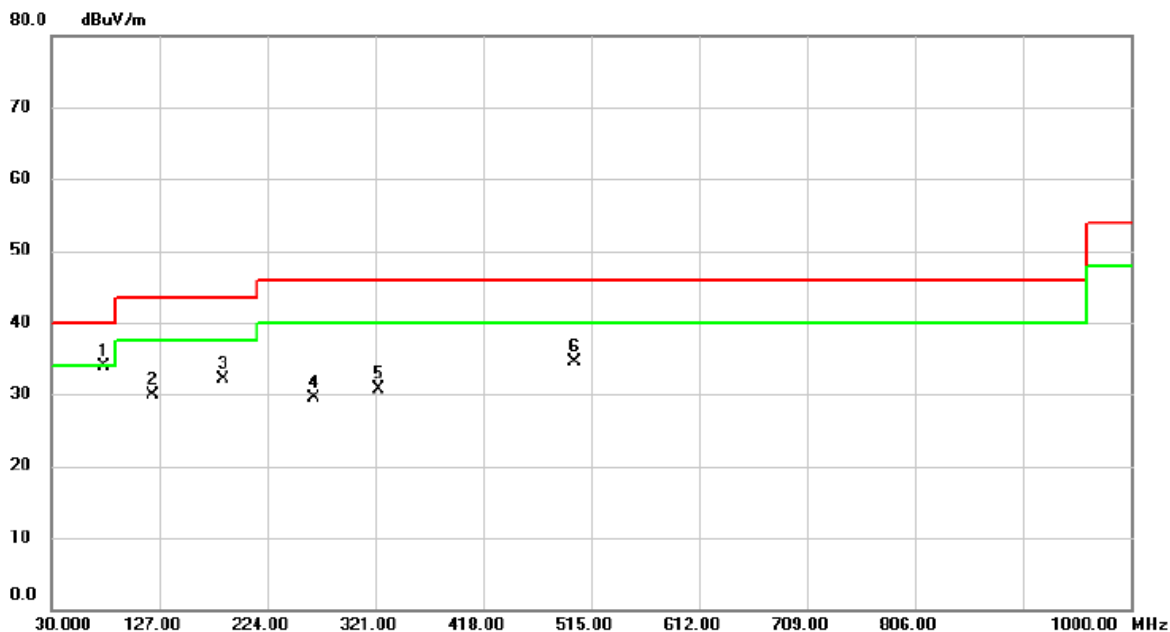

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	77.530	49.23	-15.28	33.95	40.00	-6.05	peak	
2		121.180	43.39	-13.48	29.91	43.50	-13.59	peak	
3		184.230	45.54	-13.43	32.11	43.50	-11.39	peak	
4		265.710	41.59	-12.12	29.47	46.00	-16.53	peak	
5		323.910	40.77	-10.14	30.63	46.00	-15.37	peak	
6		500.450	40.68	-6.23	34.45	46.00	-11.55	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

For Indoor access point device:

Test Mode	UNII-3+UNII-4_TX A Mode 5845 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

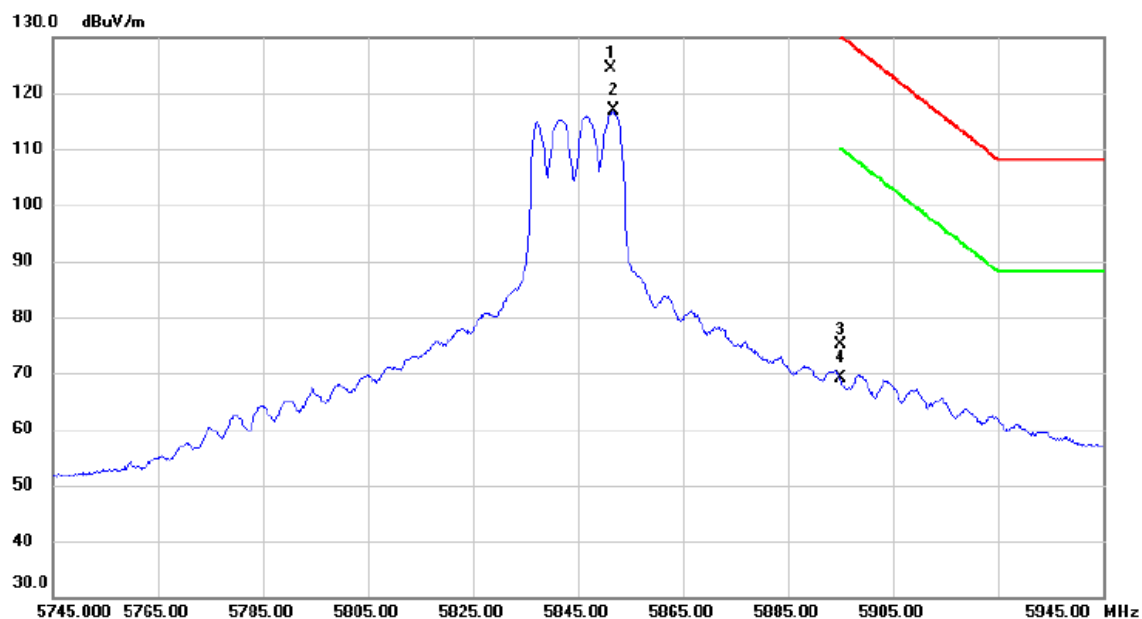


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5851.300	108.72	15.64	124.36			peak	
2	*	5851.800	101.15	15.64	116.79			AVG	
3		5895.000	59.35	15.75	75.10	130.20	-55.10	peak	
4		5895.000	53.30	15.75	69.05	110.20	-41.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX A Mode 5845 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

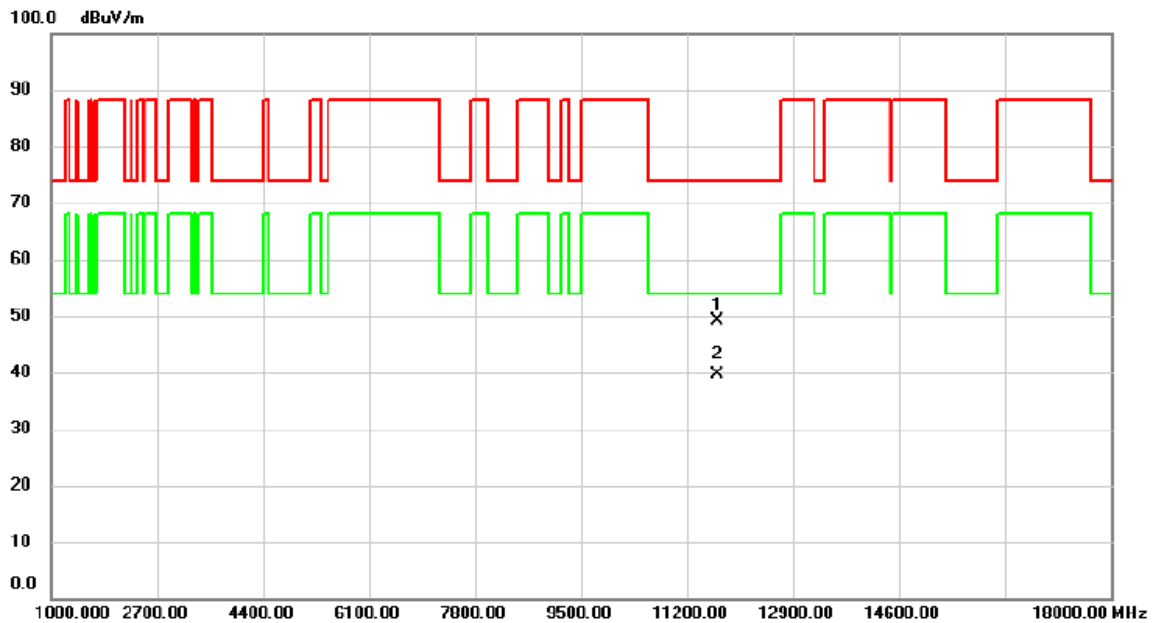


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11689.850	38.48	10.62	49.10	74.00	-24.90	peak	
2	*	11689.850	29.05	10.62	39.67	54.00	-14.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX A Mode 5865 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

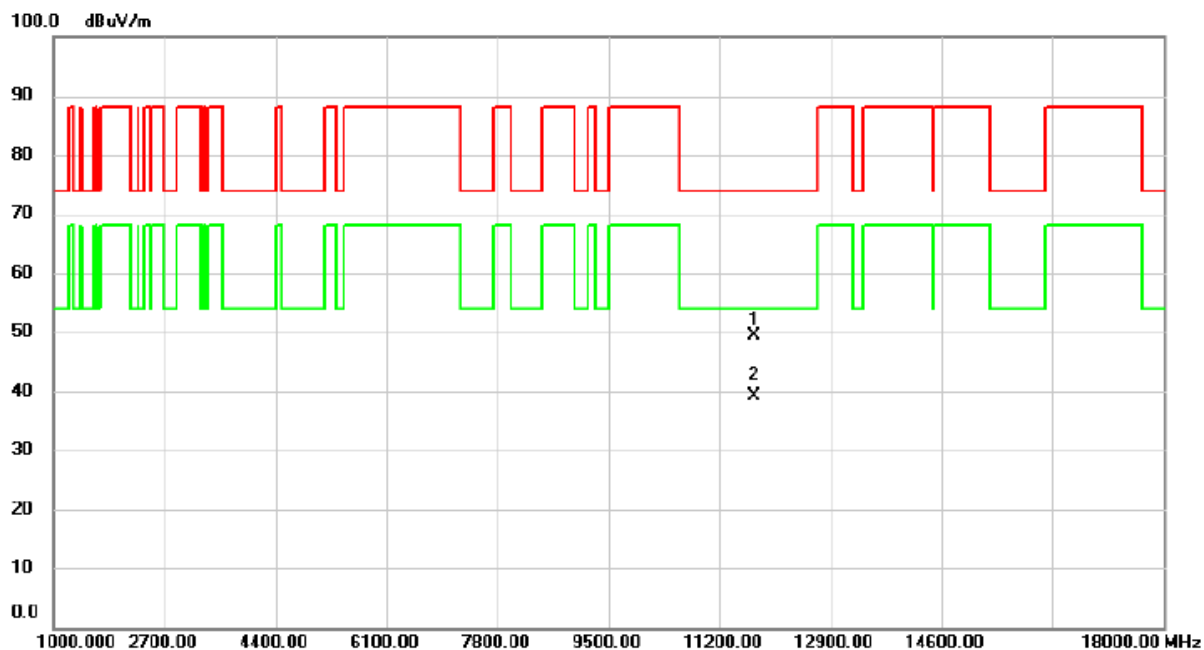


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11729.800	38.71	10.64	49.35	74.00	-24.65	peak	
2	*	11730.000	28.57	10.64	39.21	54.00	-14.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX A Mode 5885 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

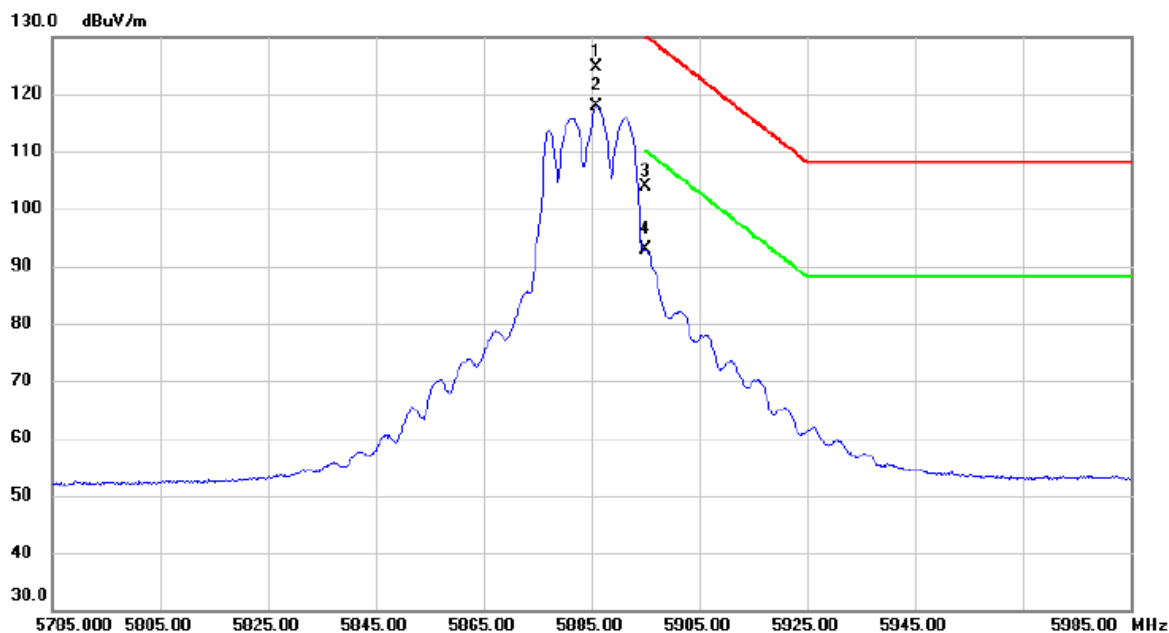


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5885.800	108.98	15.73	124.71			peak	
2	*	5885.800	102.19	15.73	117.92			AVG	
3		5895.000	88.16	15.75	103.91	130.20	-26.29	peak	
4		5895.000	77.14	15.75	92.89	110.20	-17.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX A Mode 5885 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

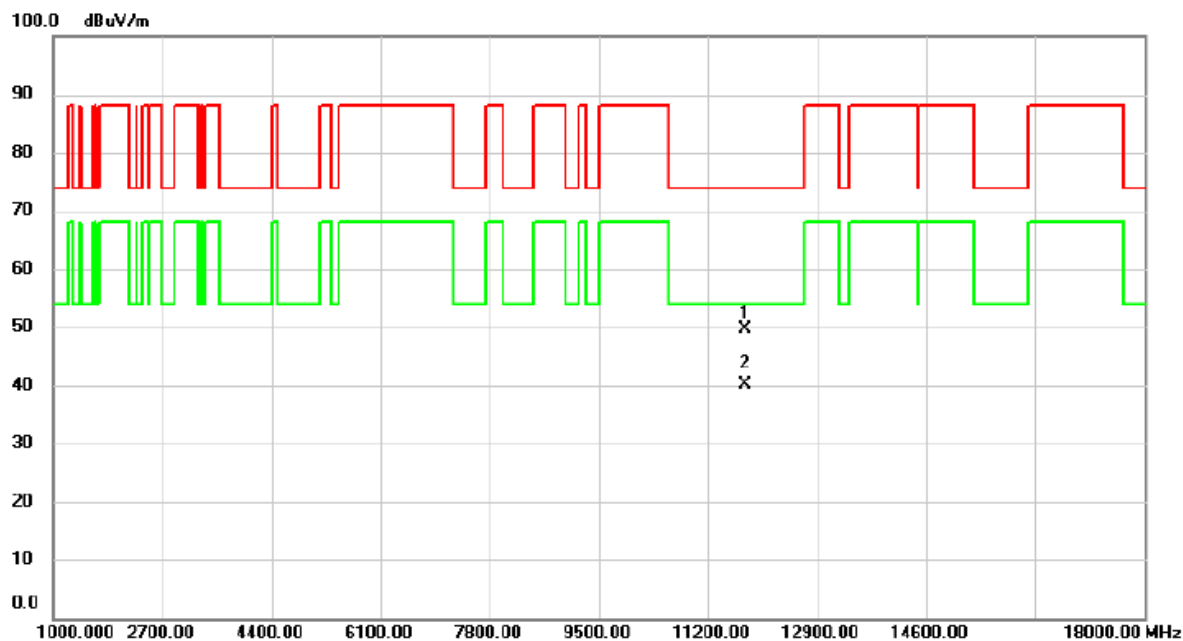


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11768.350	39.10	10.64	49.74	74.00	-24.26	peak	
2	*	11769.700	29.42	10.64	40.06	54.00	-13.94	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT20) Mode 5845 MHz	Polarization	Vertical
-----------	--	--------------	----------

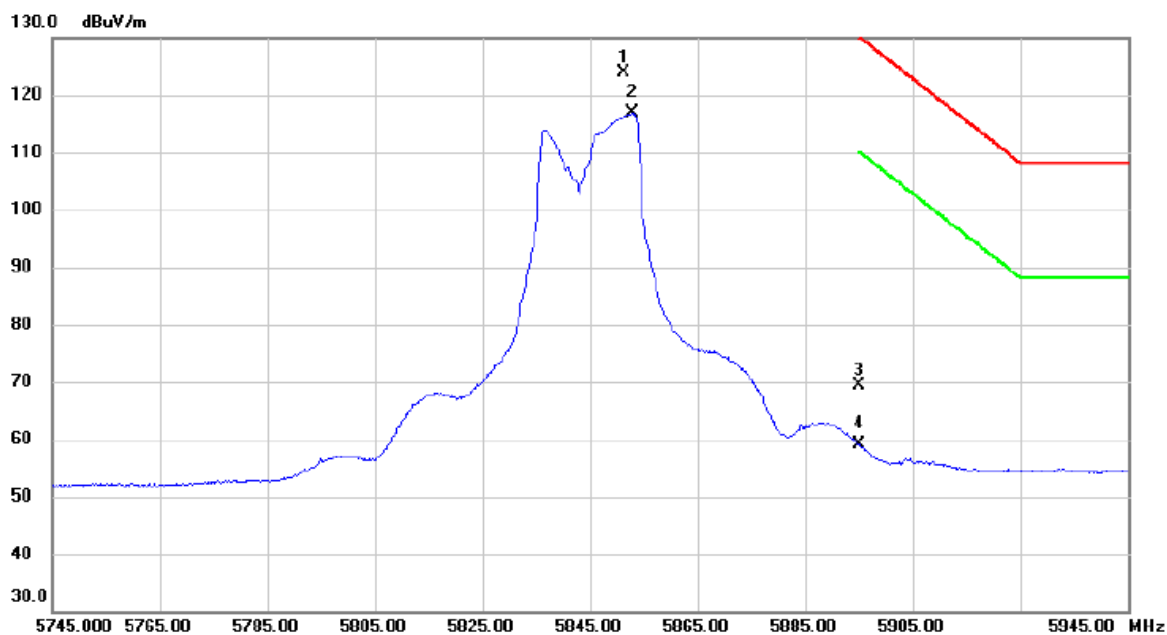


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5851.200	108.30	15.64	123.94			peak	
2	*	5852.800	101.20	15.64	116.84			AVG	
3		5895.000	53.74	15.75	69.49	130.20	-60.71	peak	
4		5895.000	43.36	15.75	59.11	110.20	-51.09	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT20) Mode 5845 MHz	Polarization	Vertical
-----------	--	--------------	----------

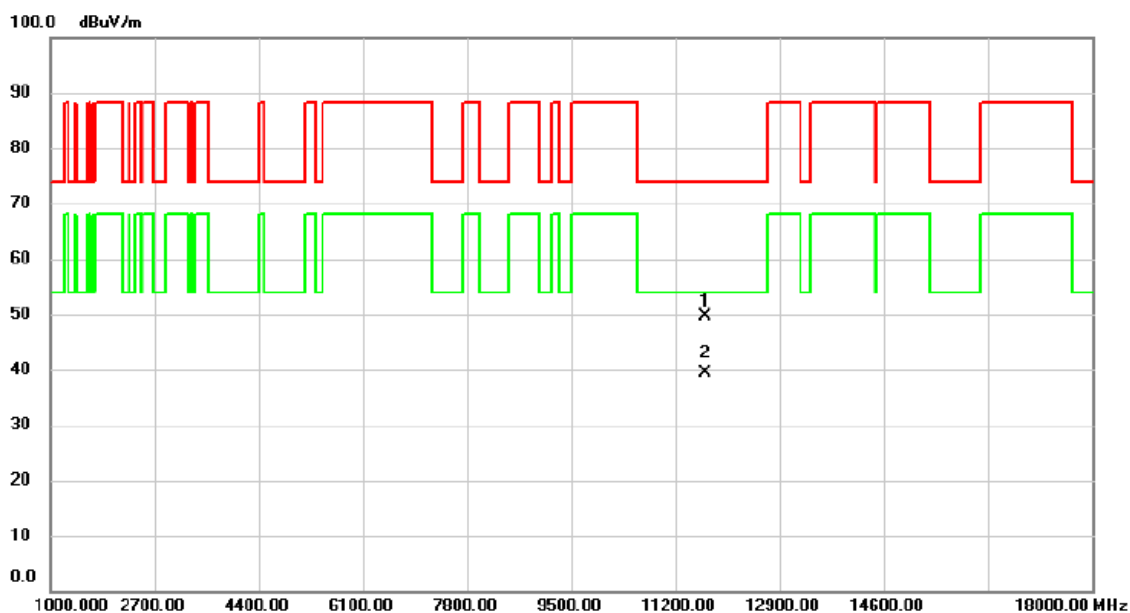


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11688.550	39.01	10.62	49.63	74.00	-24.37	peak	
2	*	11688.700	28.64	10.62	39.26	54.00	-14.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX AC(VHT20) Mode 5865 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

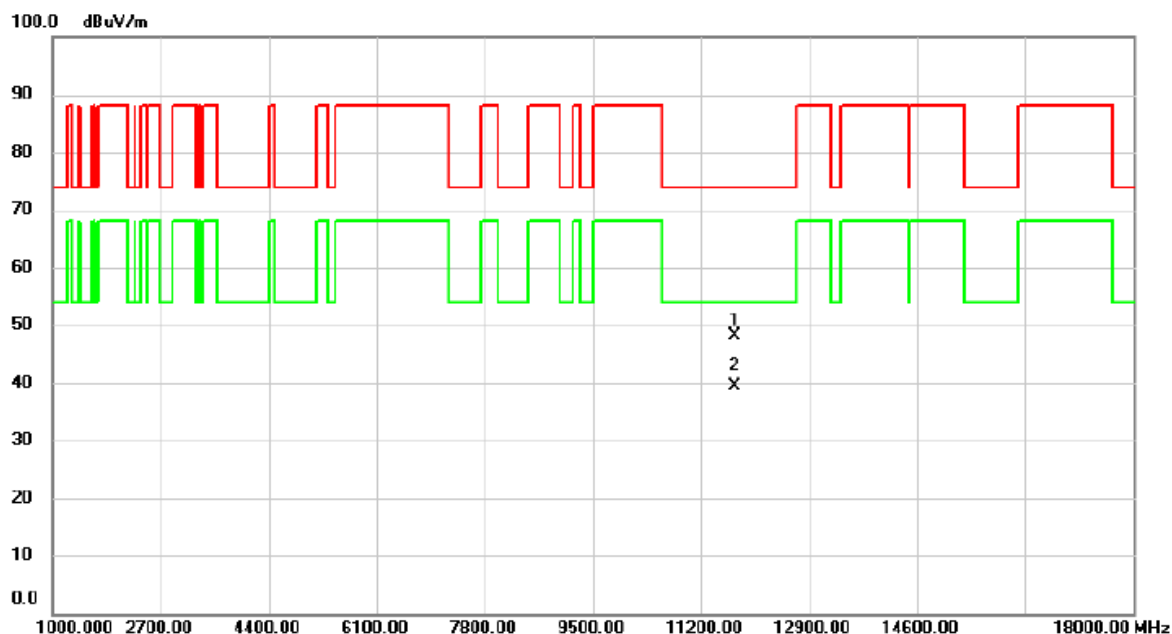


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11723.600	37.57	10.63	48.20	74.00	-25.80	peak	
2 *	11731.000	28.63	10.64	39.27	54.00	-14.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX AC(VHT20) Mode 5885 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

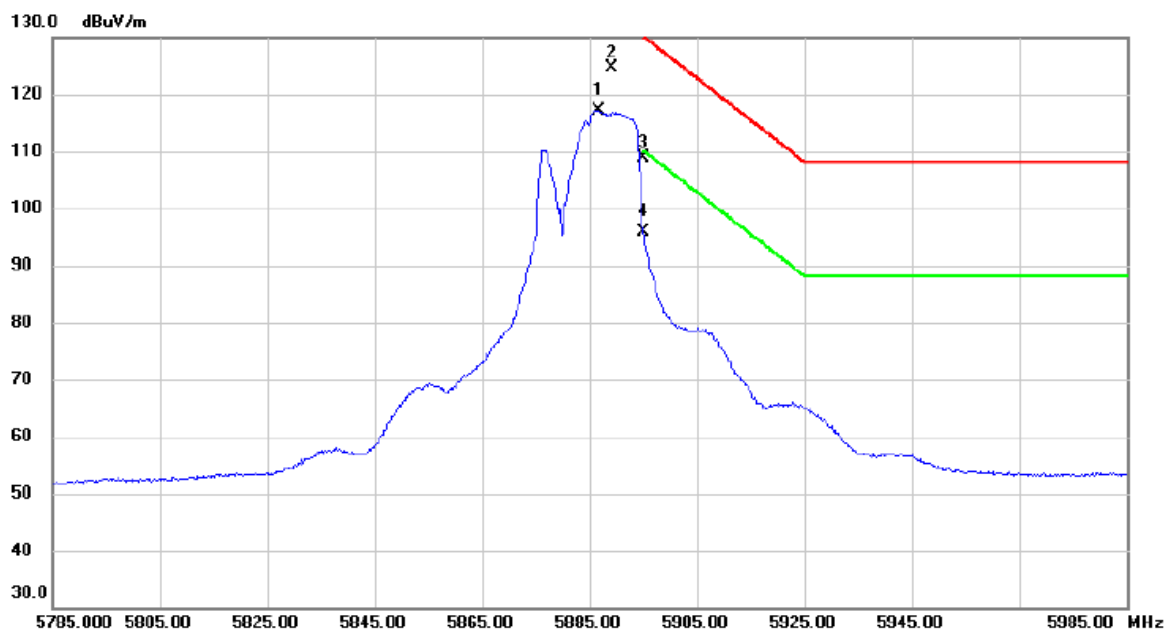


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5886.600	101.49	15.73	117.22			AVG	
2		5889.000	108.91	15.74	124.65			peak	
3		5895.000	93.21	15.75	108.96	130.20	-21.24	peak	
4		5895.000	80.09	15.75	95.84	110.20	-14.36	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX AC(VHT20) Mode 5885 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

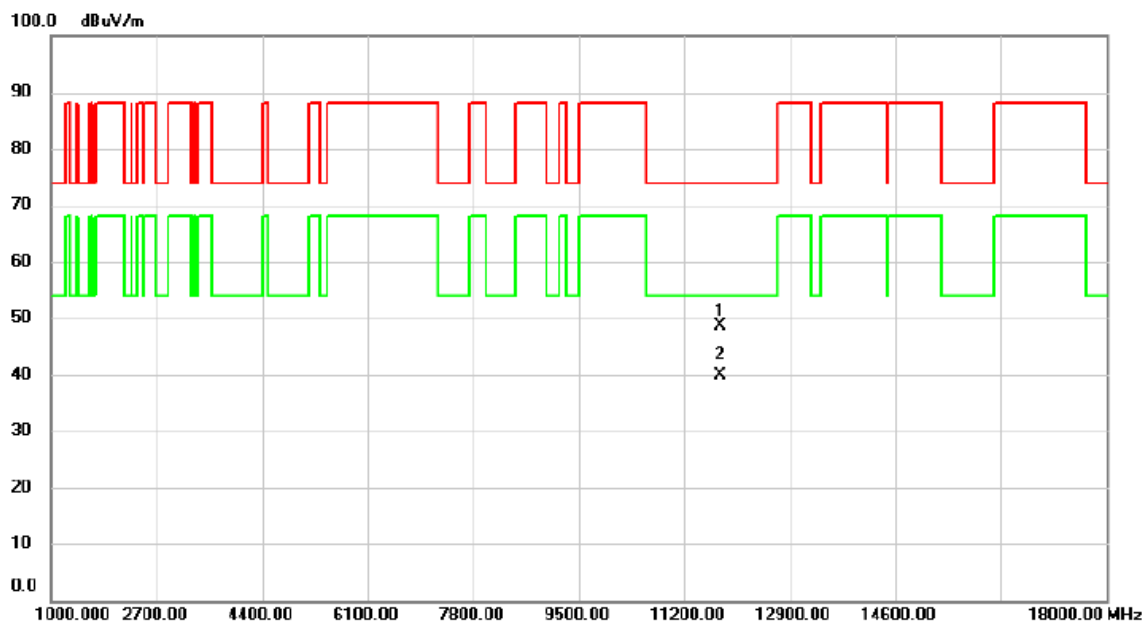

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11770.000	37.97	10.64	48.61	74.00	-25.39	peak	
2	*	11772.000	29.20	10.66	39.86	54.00	-14.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT40) Mode 5835 MHz	Polarization	Vertical
-----------	--	--------------	----------




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5838.200	98.86	15.61	114.47			AVG	
2		5839.000	106.21	15.61	121.82			peak	
3		5895.000	60.40	15.75	76.15	130.20	-54.05	peak	
4		5895.000	52.66	15.75	68.41	110.20	-41.79	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT40) Mode 5835 MHz	Polarization	Vertical
-----------	--	--------------	----------

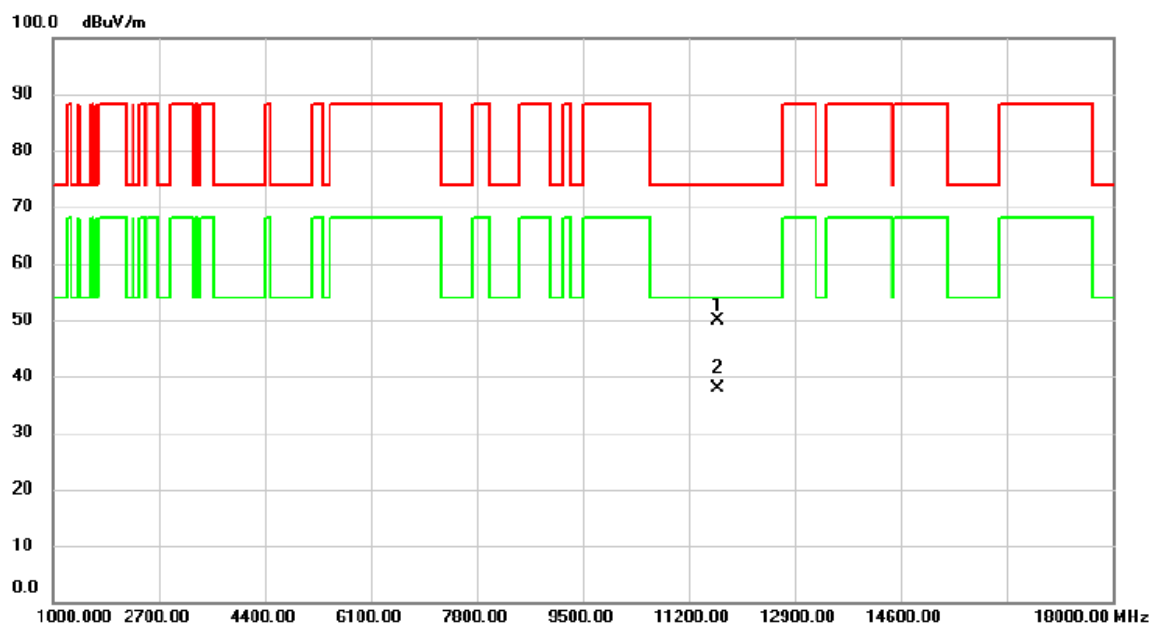


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11669.646	39.29	10.61	49.90	74.00	-24.10	peak	
2	*	11670.400	27.27	10.61	37.88	54.00	-16.12	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX AC(VHT40) Mode 5875 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

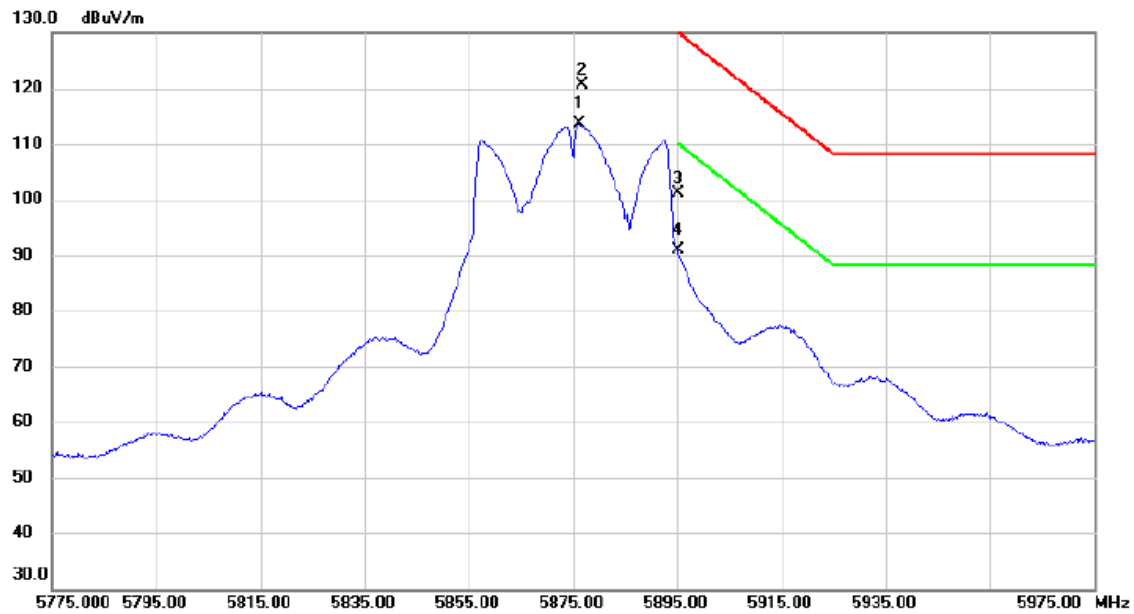


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5876.200	97.86	15.71	113.57			AVG	
2	5876.600	104.83	15.71	120.54			peak	
3	5895.000	85.31	15.75	101.06	130.20	-29.14	peak	
4	5895.000	75.03	15.75	90.78	110.20	-19.42	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX AC(VHT40) Mode 5875 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

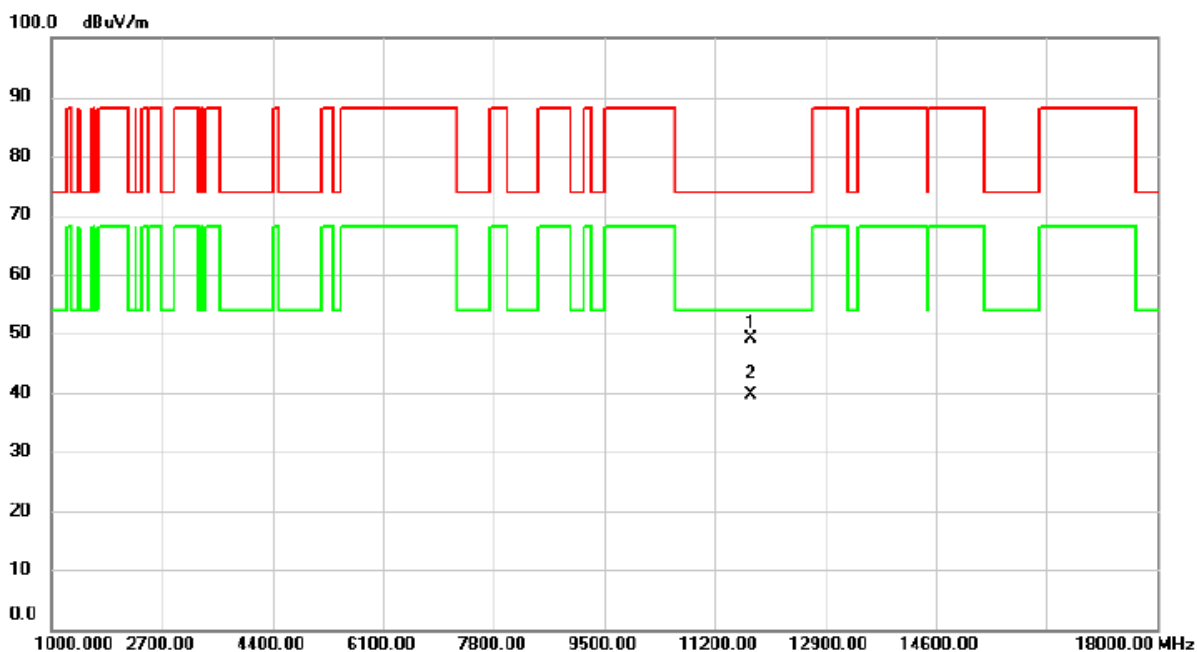


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11749.600	38.49	10.64	49.13	74.00	-24.87	peak	
2	*	11750.200	28.96	10.64	39.60	54.00	-14.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT80) Mode 5855 MHz	Polarization	Vertical
-----------	--	--------------	----------

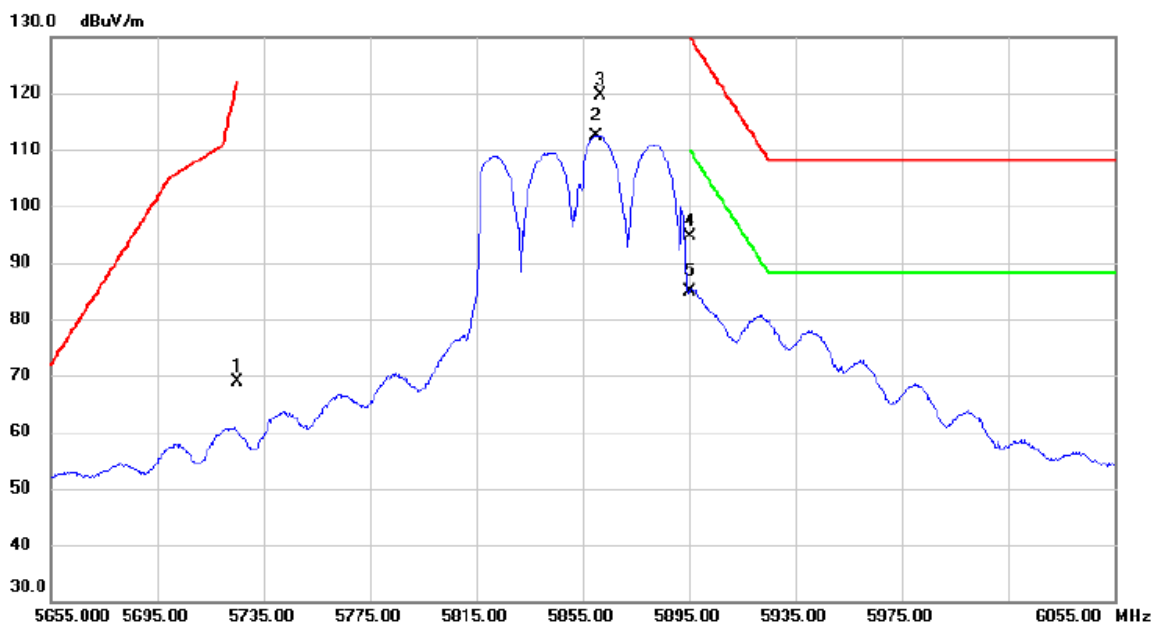


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT80) Mode 5855 MHz	Polarization	Vertical
-----------	--	--------------	----------

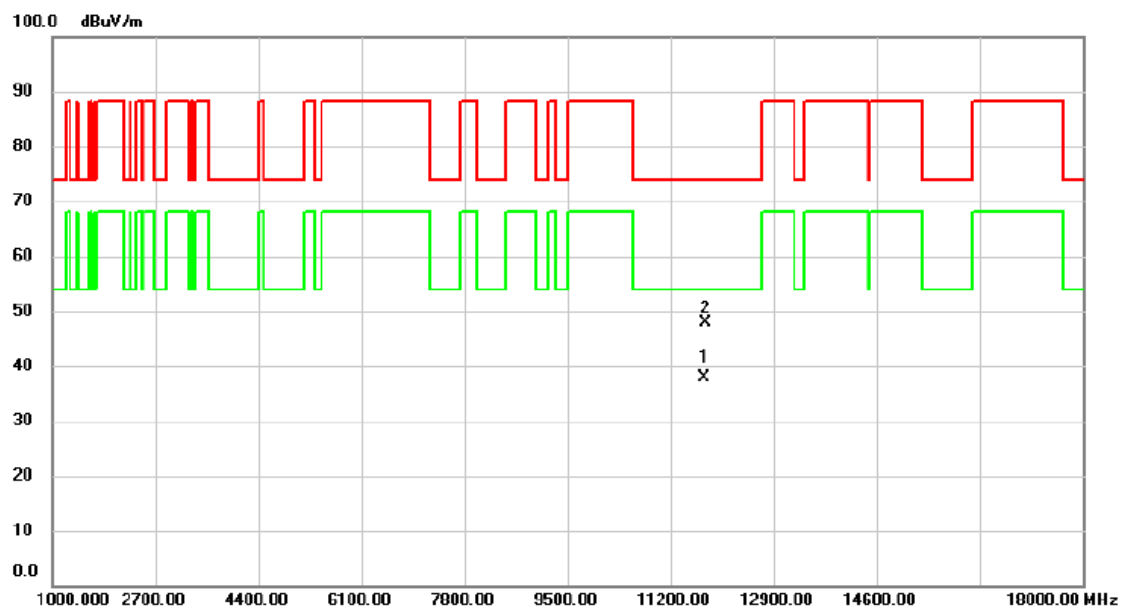


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11752.800	27.34	10.64	37.98	54.00	-16.02	AVG	
2		11767.000	37.28	10.64	47.92	74.00	-26.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT160) Mode 5815 MHz	Polarization	Vertical
-----------	---	--------------	----------

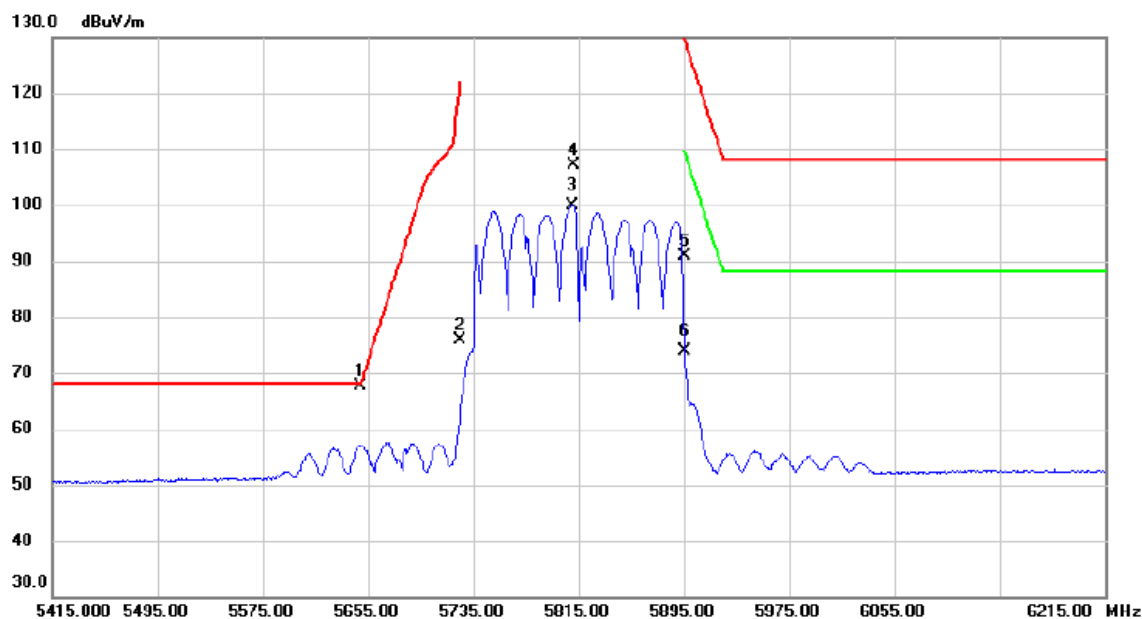


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5649.400	52.54	15.13	67.67	68.20	-0.53	peak	
2		5725.000	60.59	15.32	75.91	122.20	-46.29	peak	
3		5810.200	84.42	15.54	99.96			AVG	
4		5811.000	91.48	15.54	107.02			peak	
5		5895.000	75.20	15.75	90.95	130.20	-39.25	peak	
6		5895.000	58.16	15.75	73.91	110.20	-36.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT160) Mode 5815 MHz	Polarization	Vertical
-----------	---	--------------	----------

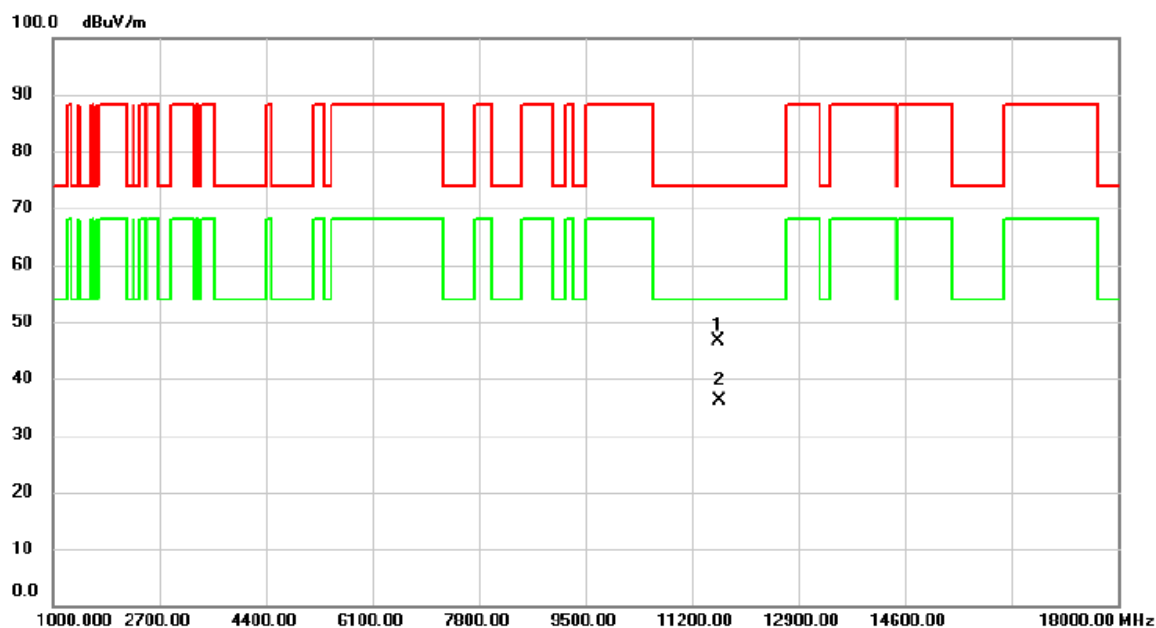


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11629.220	35.94	10.59	46.53	74.00	-27.47	peak	
2	*	11632.300	25.47	10.59	36.06	54.00	-17.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT20) Mode 5845 MHz	Polarization	Vertical
-----------	--	--------------	----------

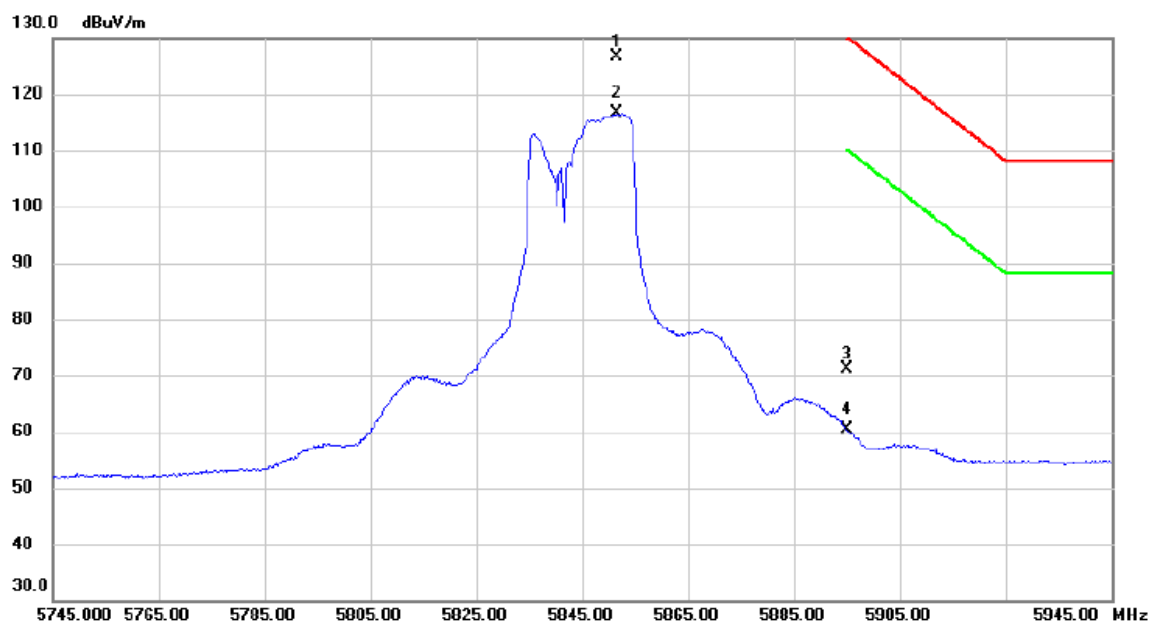


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5851.600	110.90	15.64	126.54			peak	
2	*	5851.600	100.92	15.64	116.56			AVG	
3		5895.000	55.44	15.75	71.19	130.20	-59.01	peak	
4		5895.000	44.71	15.75	60.46	110.20	-49.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT20) Mode 5845 MHz	Polarization	Vertical
-----------	--	--------------	----------

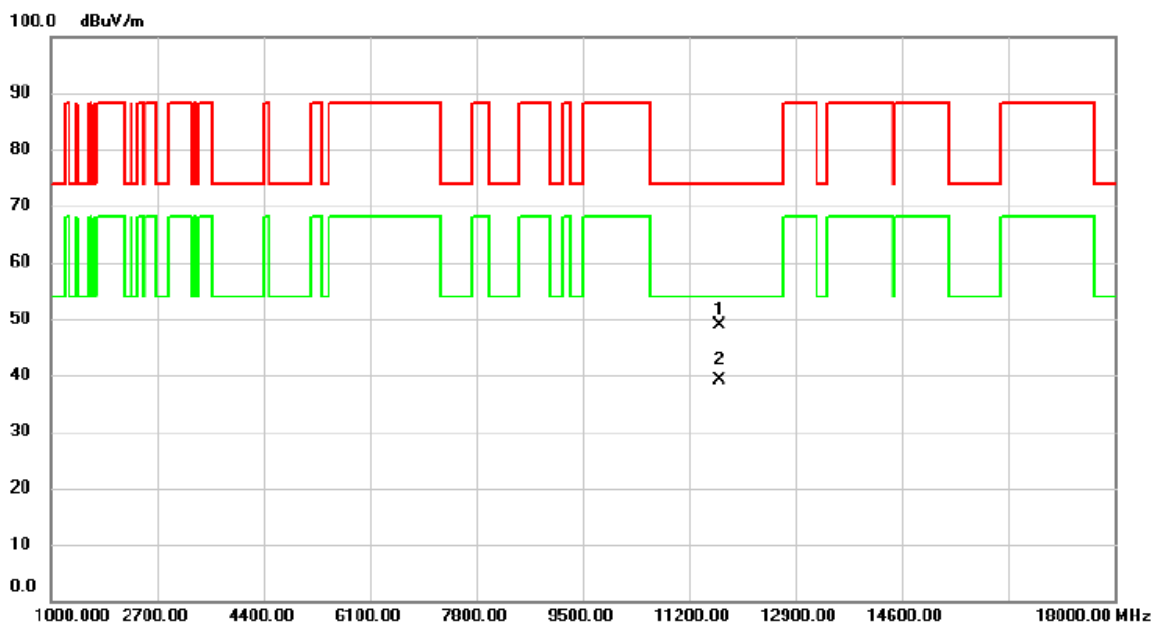


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11689.180	38.28	10.62	48.90	74.00	-25.10	peak	
2	*	11690.980	28.55	10.62	39.17	54.00	-14.83	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX BE(EHT20) Mode 5865 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

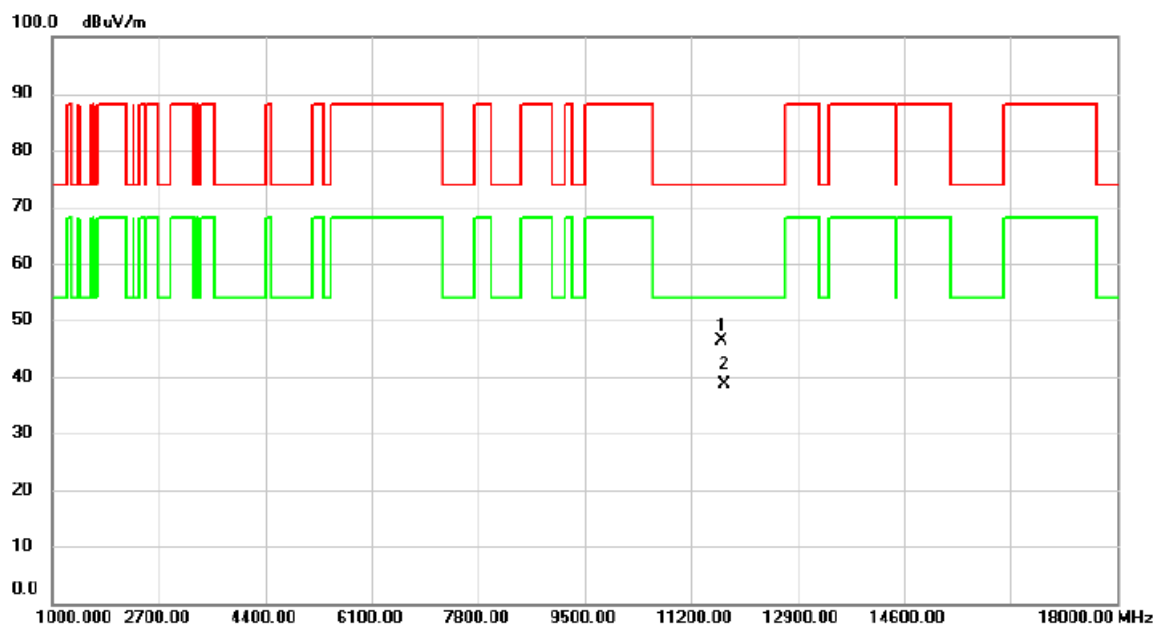


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11692.000	35.80	10.62	46.42	74.00	-27.58	peak	
2	*	11729.800	27.91	10.64	38.55	54.00	-15.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX BE(EHT20) Mode 5885 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

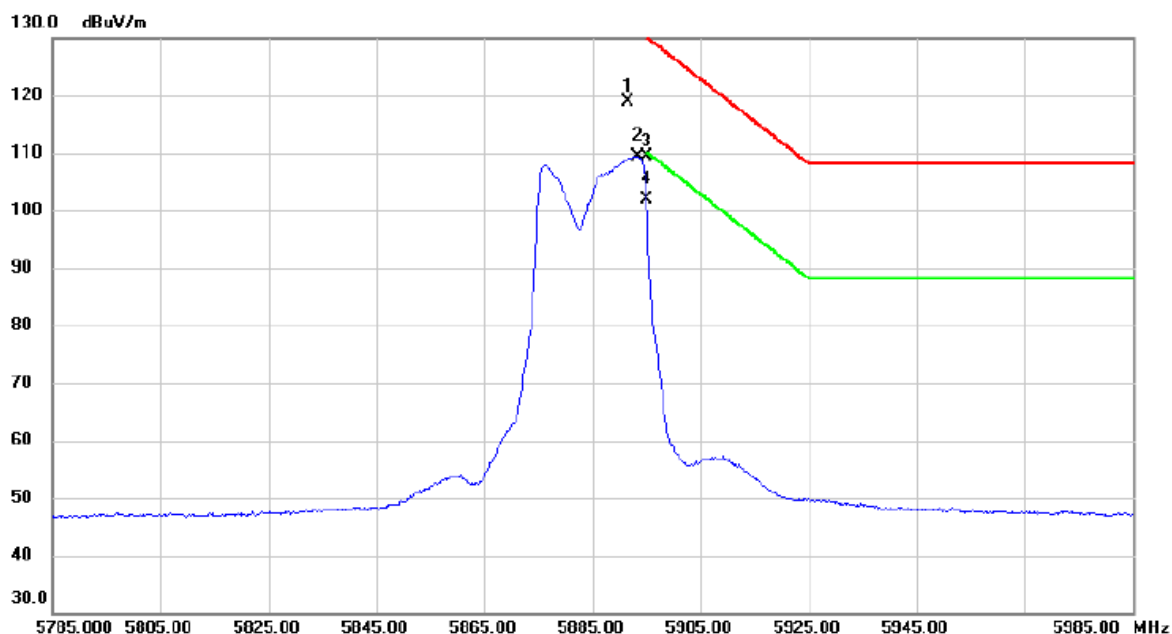


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5891.600	103.84	15.13	118.97			peak	No Limit
2	*	5893.400	94.35	15.13	109.48			AVG	No Limit
3		5895.000	94.33	15.15	109.48	130.20	-20.72	peak	
4		5895.000	86.74	15.15	101.89	110.20	-8.31	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX BE(EHT20) Mode 5885 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

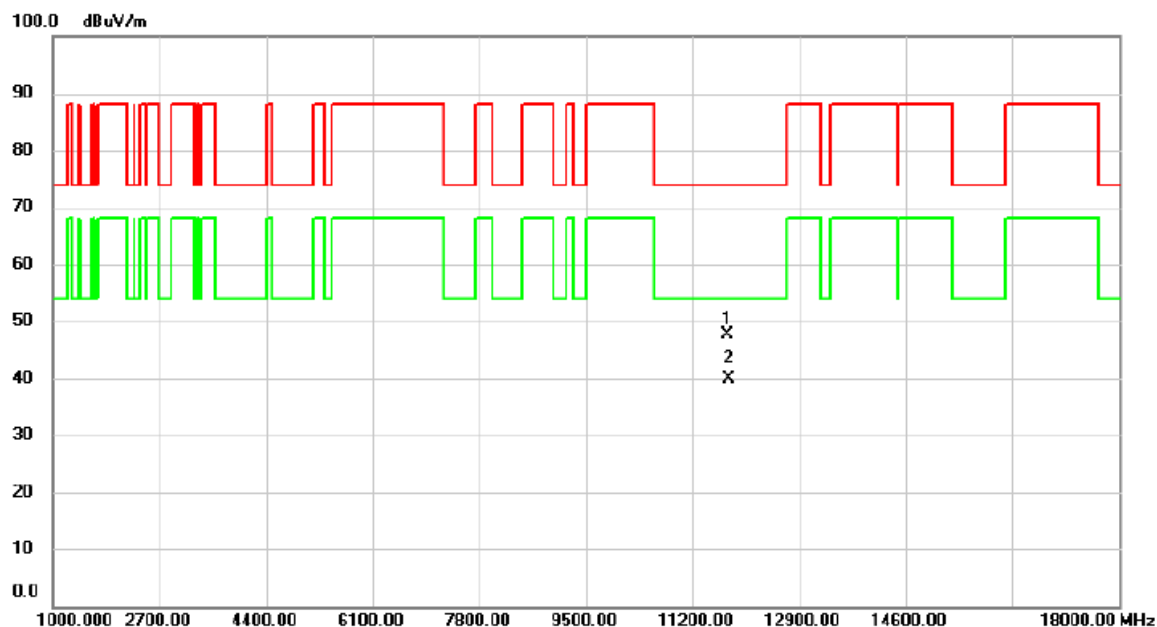


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11765.800	36.99	10.64	47.63	74.00	-26.37	peak	
2	*	11769.600	29.35	10.64	39.99	54.00	-14.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT40) Mode 5835 MHz	Polarization	Vertical
-----------	--	--------------	----------

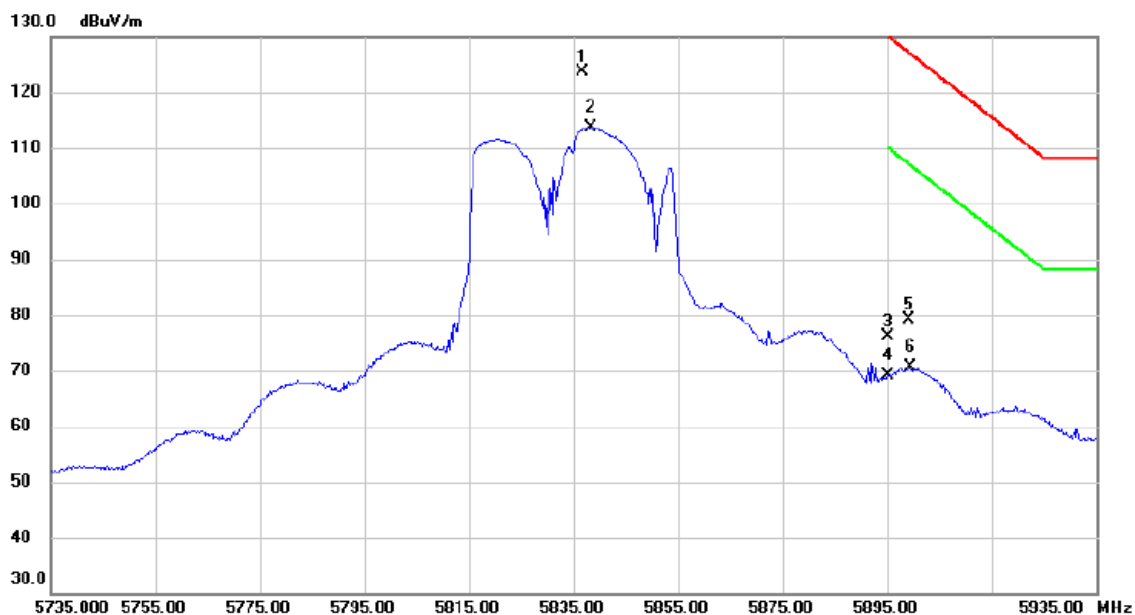


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5836.800	107.96	15.61	123.57			peak	
2		5838.400	98.01	15.61	113.62			AVG	
3		5895.000	60.39	15.75	76.14	130.20	-54.06	peak	
4		5895.000	53.31	15.75	69.06	110.20	-41.14	AVG	
5		5899.000	63.42	15.76	79.18	127.27	-48.09	peak	
6	*	5899.400	54.83	15.76	70.59	106.97	-36.38	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT40) Mode 5835 MHz	Polarization	Vertical
-----------	--	--------------	----------

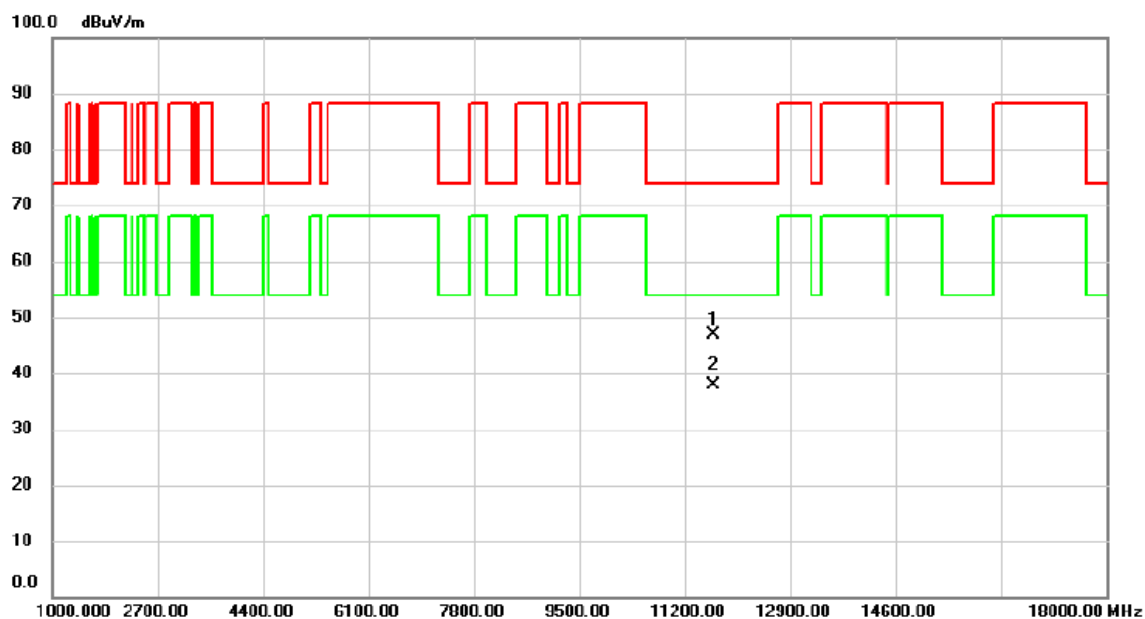


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11669.062	36.15	10.61	46.76	74.00	-27.24	peak	
2 *		11669.876	27.15	10.61	37.76	54.00	-16.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX BE(EHT40) Mode 5875 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

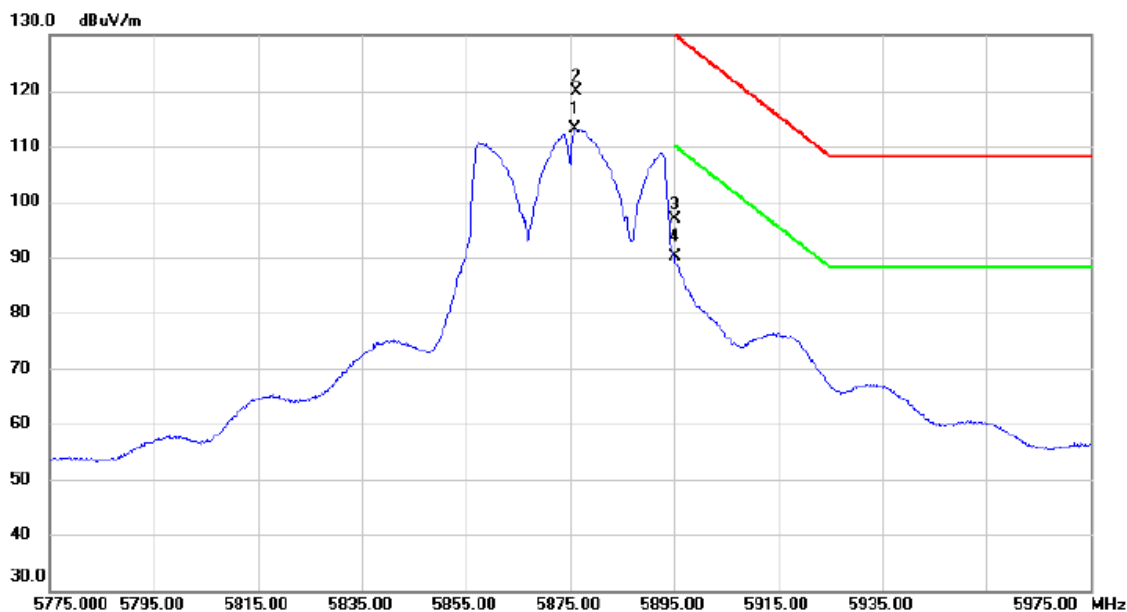


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5876.000	97.39	15.71	113.10			AVG	
2		5876.200	104.16	15.71	119.87			peak	
3		5895.000	81.20	15.75	96.95	130.20	-33.25	peak	
4		5895.000	74.49	15.75	90.24	110.20	-19.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX BE(EHT40) Mode 5875 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

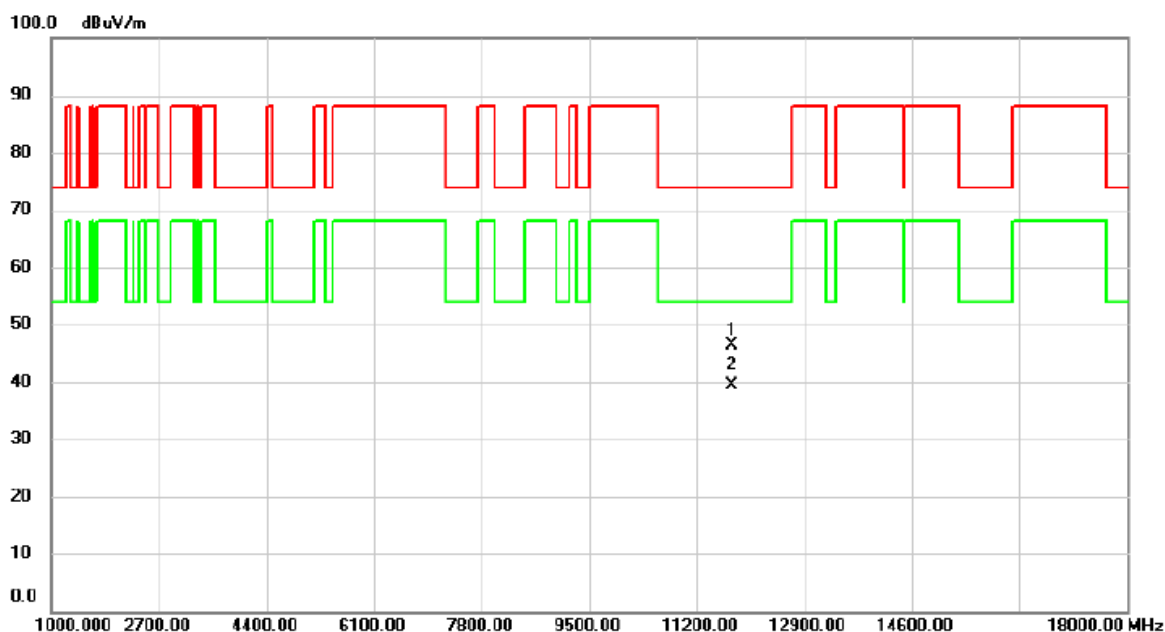


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11749.392	35.74	10.64	46.38	74.00	-27.62	peak	
2	*	11750.000	28.75	10.64	39.39	54.00	-14.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT80) Mode 5855 MHz	Polarization	Vertical
-----------	--	--------------	----------

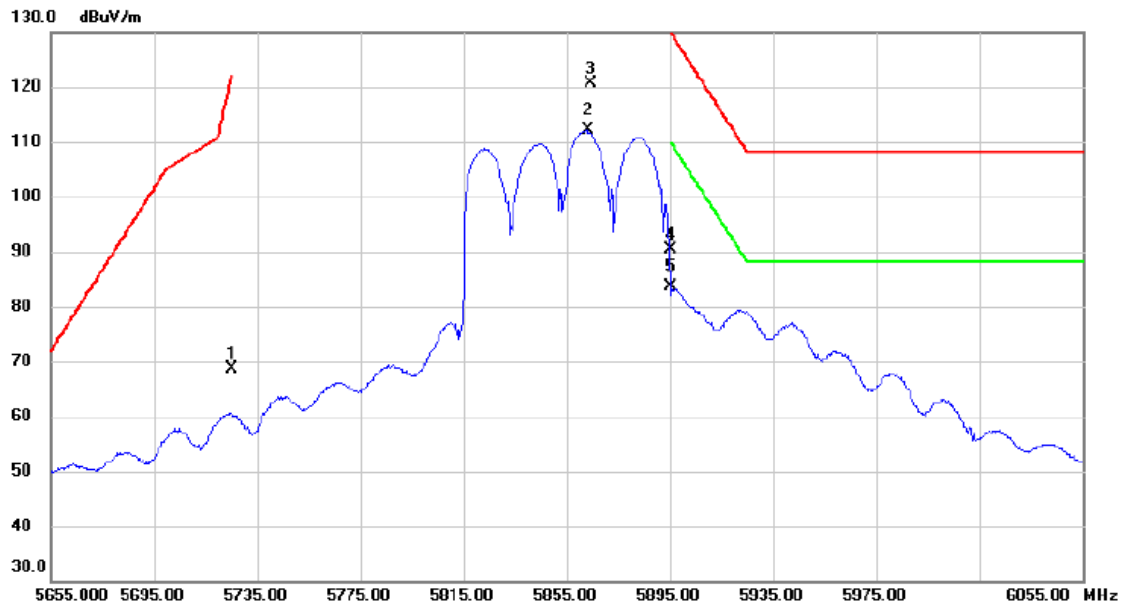


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5725.000	53.30	15.32	68.62	122.20	-53.58	peak	
2	*	5863.000	96.42	15.67	112.09			AVG	
3		5864.200	105.06	15.67	120.73			peak	
4		5895.000	74.74	15.75	90.49	130.20	-39.71	peak	
5		5895.000	67.84	15.75	83.59	110.20	-26.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT80) Mode 5855 MHz	Polarization	Vertical
-----------	--	--------------	----------

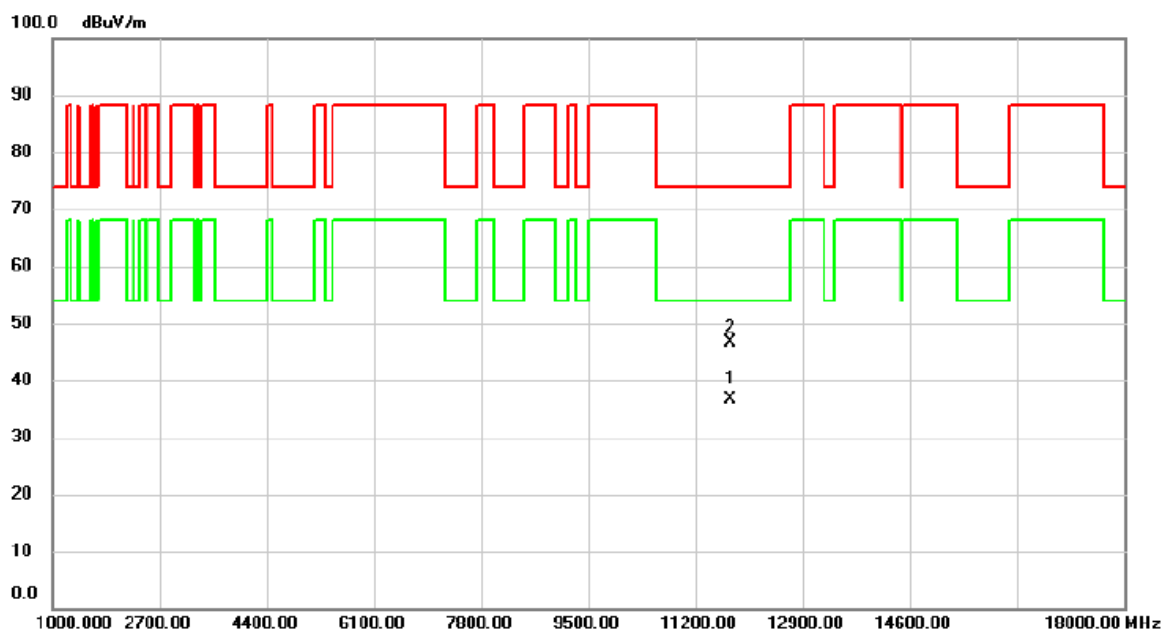


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11750.400	25.92	10.64	36.56	54.00	-17.44	AVG	
2		11750.414	36.08	10.64	46.72	74.00	-27.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT160) Mode 5815 MHz	Polarization	Vertical
-----------	---	--------------	----------

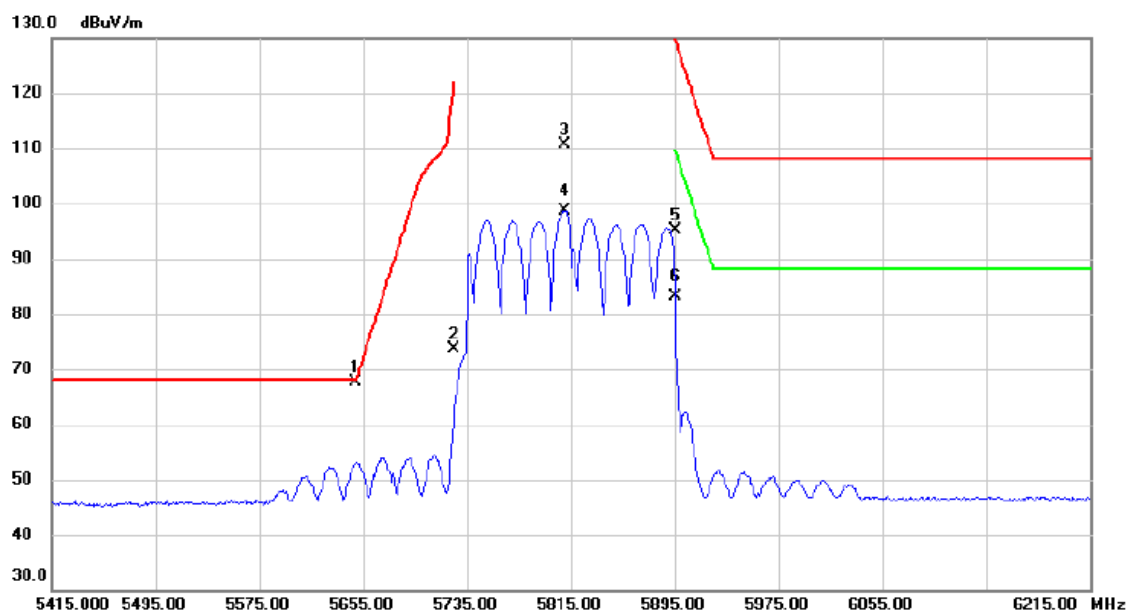


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5648.600	52.42	15.13	67.55	68.20	-0.65	peak	
2		5725.000	58.36	15.32	73.68	122.20	-48.52	peak	
3		5810.200	95.20	15.54	110.74			peak	
4		5810.200	83.11	15.54	98.65			AVG	
5		5895.000	79.38	15.75	95.13	130.20	-35.07	peak	
6		5895.000	67.30	15.75	83.05	110.20	-27.15	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT160) Mode 5815 MHz	Polarization	Vertical
-----------	---	--------------	----------

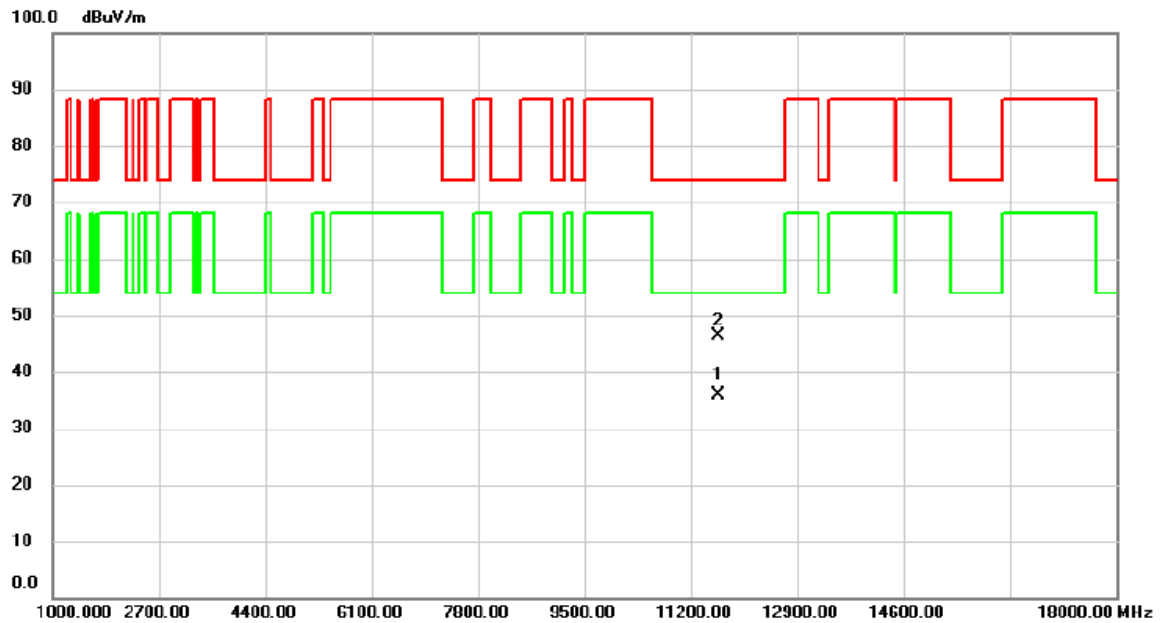


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11630.716	25.27	10.59	35.86	54.00	-18.14	AVG	
2		11630.790	35.75	10.59	46.34	74.00	-27.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Vertical
-----------	-------------------------------	--------------	----------

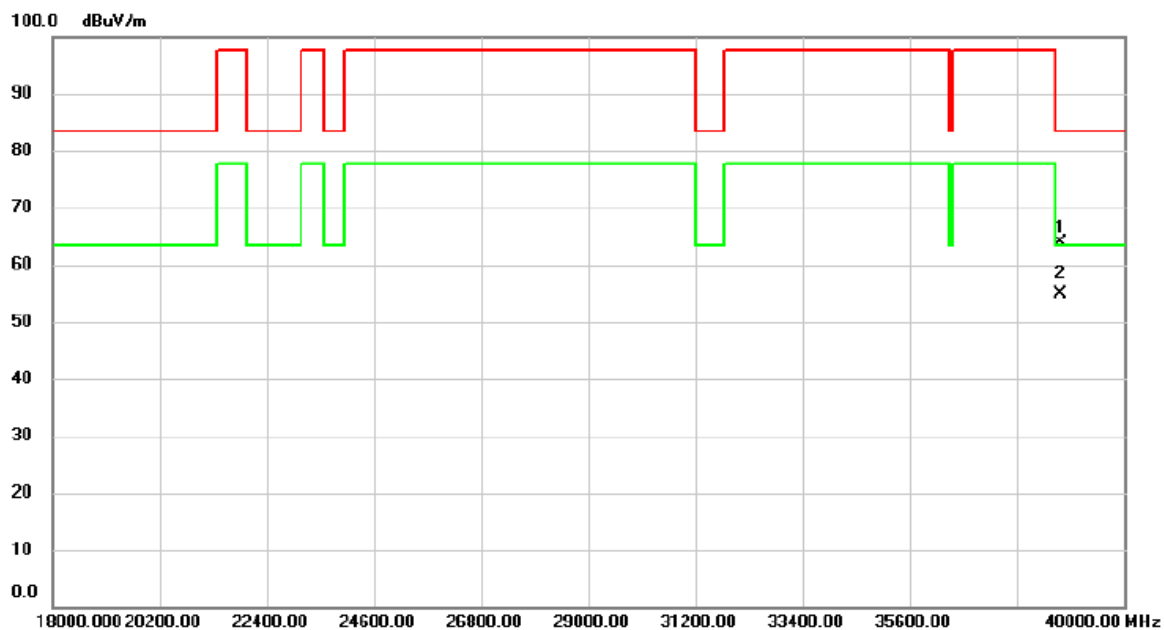


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38680.000	49.38	14.53	63.91	83.50	-19.59	peak	
2	*	38680.000	40.28	14.53	54.81	63.50	-8.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT80) Mode Channel 171	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

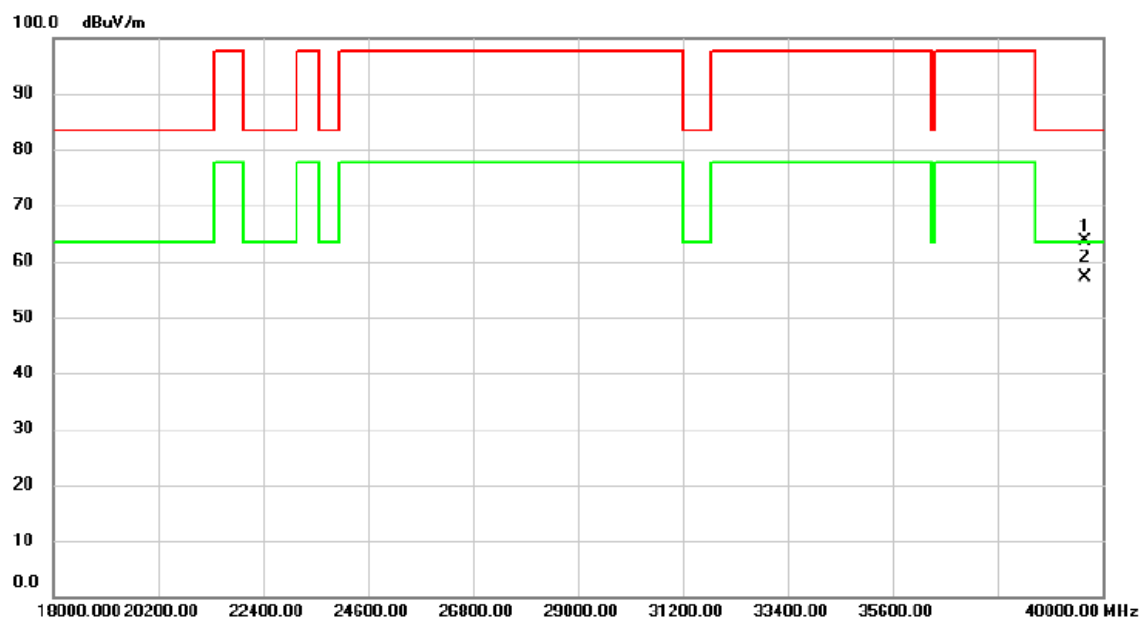


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39626.000	48.80	14.73	63.53	83.50	-19.97	peak	
2	*	39626.000	42.36	14.73	57.09	63.50	-6.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

For Client device:

Test Mode	UNII-3+UNII-4_TX A Mode 5845 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

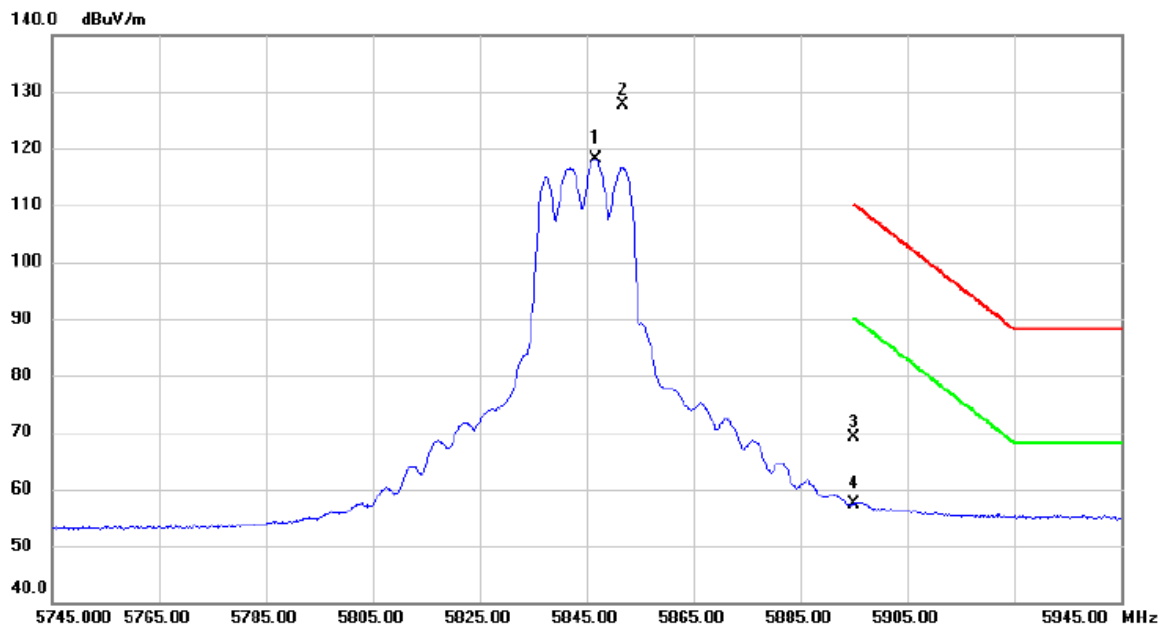


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5846.600	103.16	15.04	118.20			AVG	No Limit
2		5851.800	112.63	15.04	127.67			peak	No Limit
3		5895.000	53.97	15.15	69.12	110.20	-41.08	peak	
4		5895.000	42.21	15.15	57.36	90.20	-32.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX A Mode 5885 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

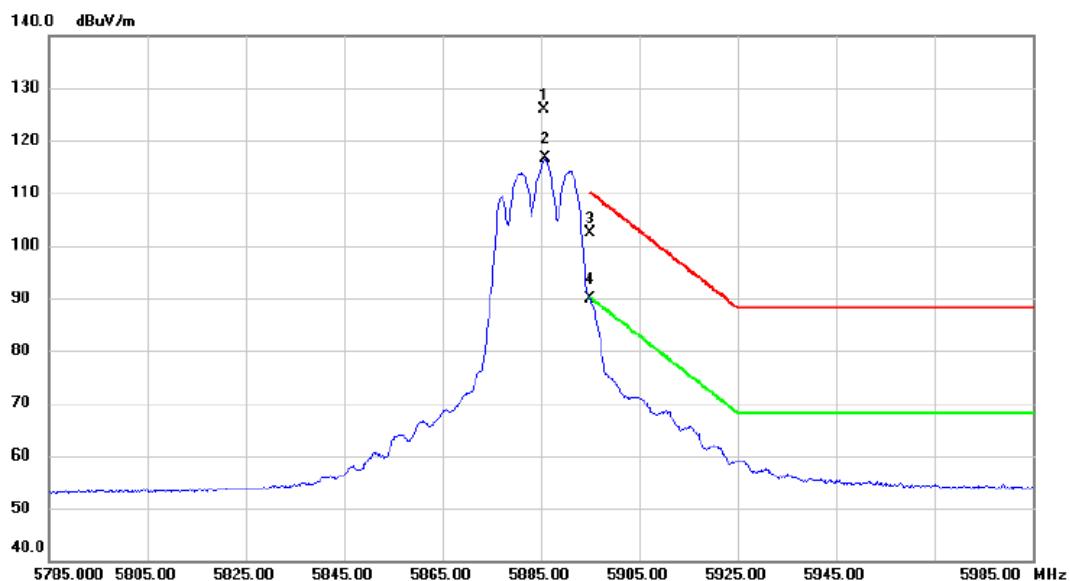


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5885.600	110.71	15.13	125.84			peak	No Limit
2	*	5886.000	101.39	15.13	116.52			AVG	No Limit
3		5895.000	87.22	15.15	102.37	110.20	-7.83	peak	
4		5895.000	74.81	15.15	89.96	90.20	-0.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT20) Mode 5845 MHz	Polarization	Vertical
-----------	--	--------------	----------

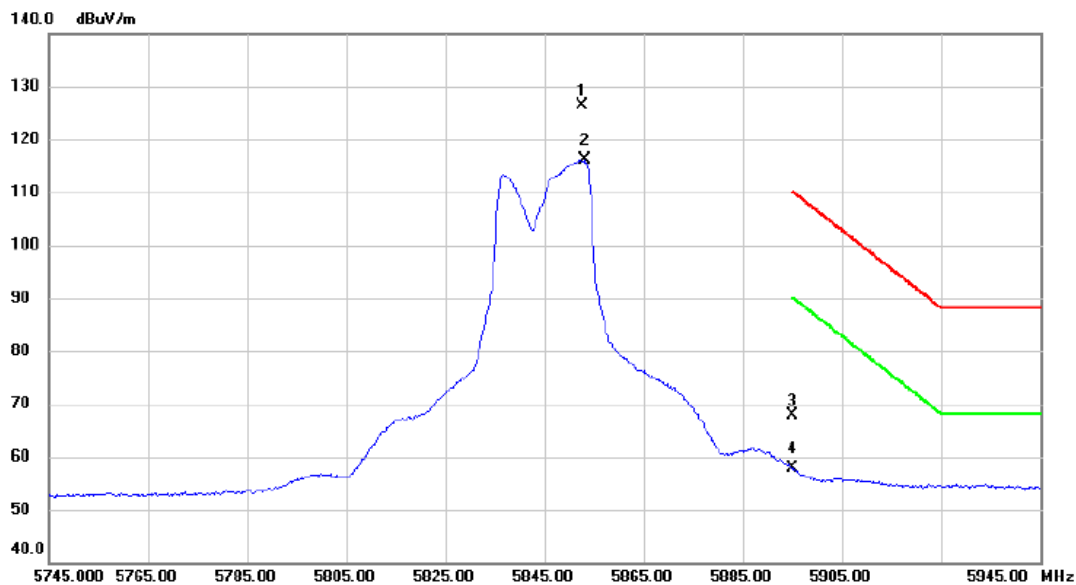


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5852.600	111.36	15.04	126.40			peak	No Limit
2	*	5853.000	101.05	15.05	116.10			AVG	No Limit
3		5895.000	52.79	15.15	67.94	110.20	-42.26	peak	
4		5895.000	42.68	15.15	57.83	90.20	-32.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX AC(VHT20) Mode 5885 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

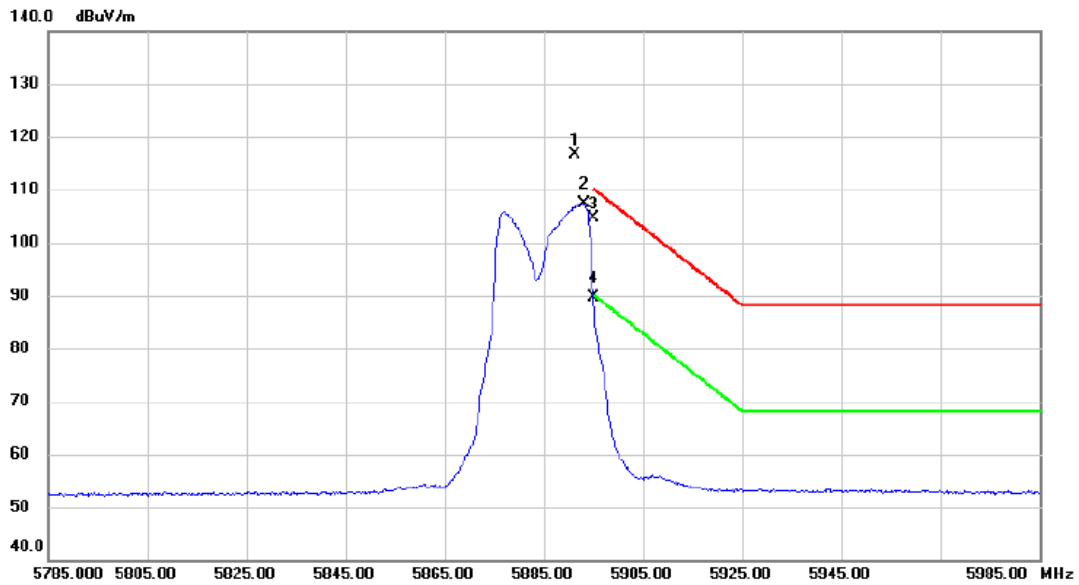


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5891.400	101.55	15.13	116.68			peak	No Limit
2	*	5893.000	92.30	15.13	107.43			AVG	No Limit
3		5895.000	89.43	15.15	104.58	110.20	-5.62	peak	
4		5895.000	74.37	15.15	89.52	90.20	-0.68	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT40) Mode 5835 MHz	Polarization	Vertical
-----------	--	--------------	----------

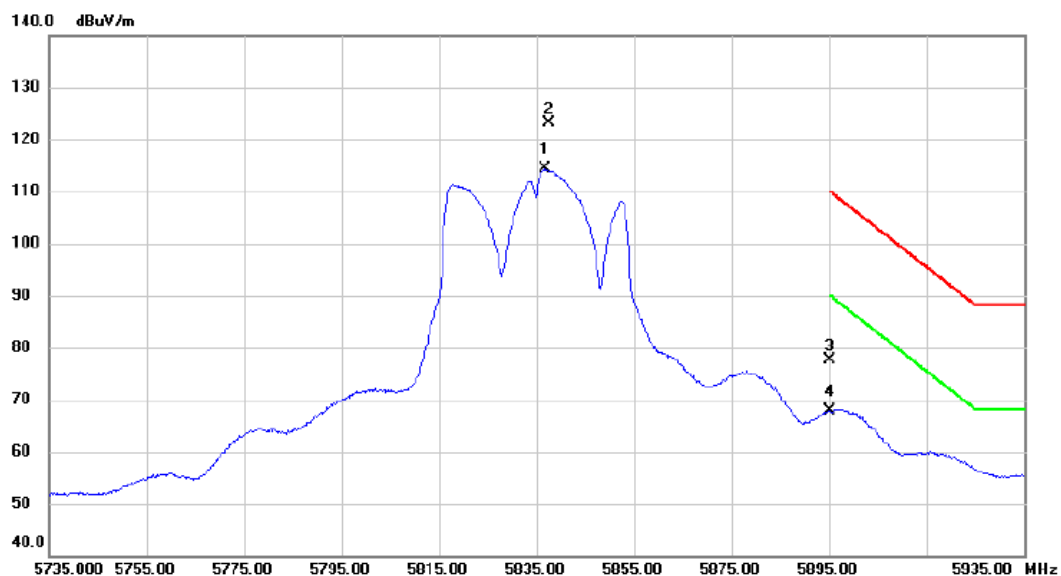


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5836.600	99.29	15.01	114.30			AVG	No Limit
2		5837.600	108.16	15.01	123.17			peak	No Limit
3		5895.000	62.47	15.15	77.62	110.20	-32.58	peak	
4		5895.000	52.75	15.15	67.90	90.20	-22.30	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX AC(VHT40) Mode 5875 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

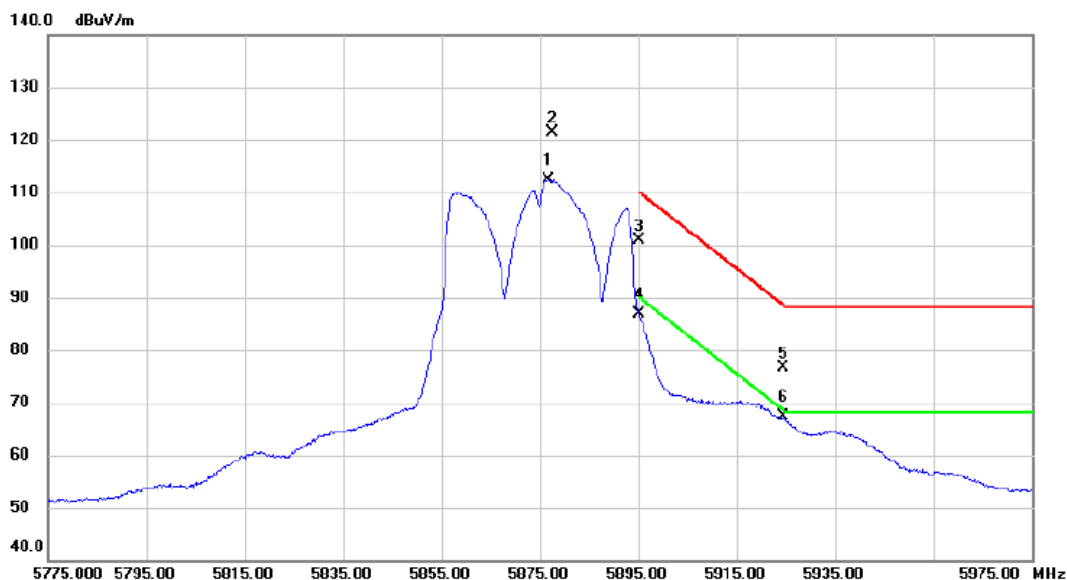


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5876.600	97.22	15.10	112.32			AVG	No Limit
2		5877.600	106.25	15.10	121.35			peak	No Limit
3		5895.000	85.66	15.15	100.81	110.20	-9.39	peak	
4		5895.000	71.76	15.15	86.91	90.20	-3.29	AVG	
5		5924.400	61.31	15.21	76.52	88.64	-12.12	peak	
6		5924.400	52.15	15.21	67.36	68.64	-1.28	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT80) Mode 5855 MHz	Polarization	Vertical
-----------	--	--------------	----------

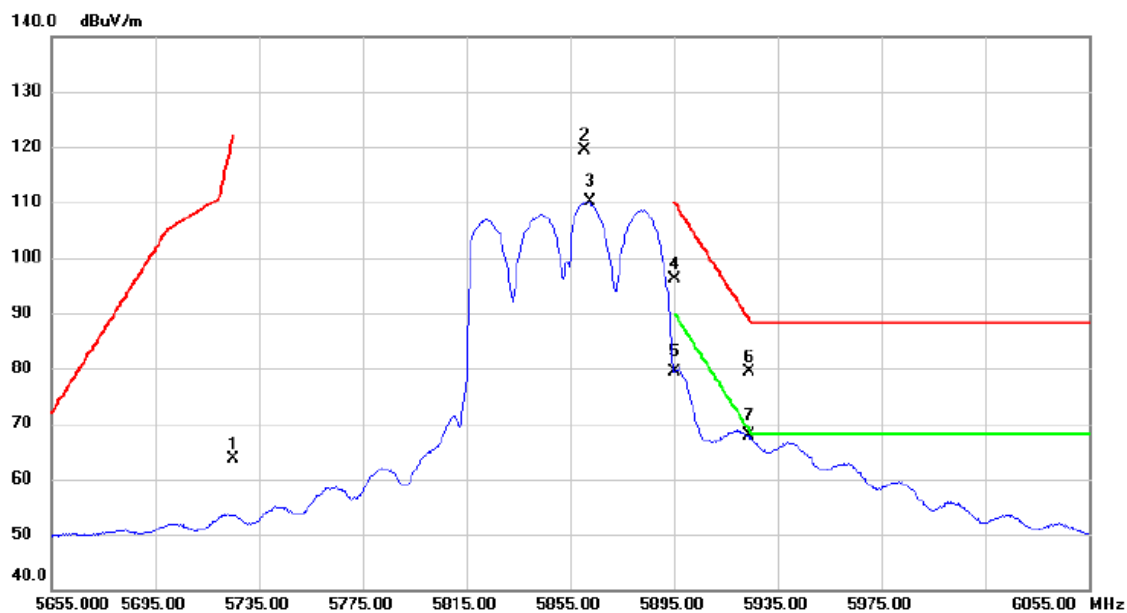


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5725.000	48.74	14.77	63.51	122.20	-58.69	peak	
2		5860.600	104.30	15.07	119.37			peak	No Limit
3		5862.600	94.95	15.07	110.02			AVG	No Limit
4		5895.000	80.91	15.15	96.06	110.20	-14.14	peak	
5		5895.000	64.16	15.15	79.31	90.20	-10.89	AVG	
6		5923.800	64.17	15.21	79.38	89.08	-9.70	peak	
7	*	5923.800	52.56	15.21	67.77	69.08	-1.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX AC(VHT160) Mode 5815 MHz	Polarization	Vertical
-----------	---	--------------	----------

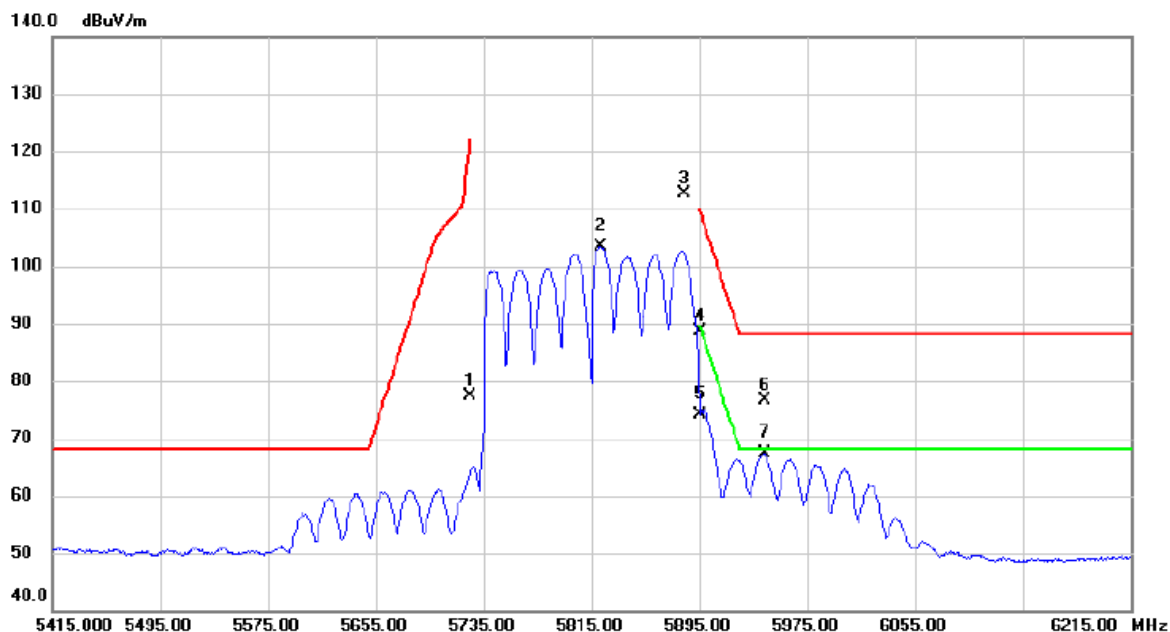


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5725.000	62.73	14.77	77.50	122.20	-44.70	peak	
2		5822.200	88.42	14.99	103.41			AVG	No Limit
3		5883.800	97.45	15.12	112.57			peak	No Limit
4		5895.000	73.53	15.15	88.68	110.20	-21.52	peak	
5		5895.000	58.97	15.15	74.12	90.20	-16.08	AVG	
6		5943.000	61.34	15.24	76.58	88.20	-11.62	peak	
7 *		5943.000	52.03	15.24	67.27	68.20	-0.93	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT20) Mode 5845 MHz	Polarization	Vertical
-----------	--	--------------	----------

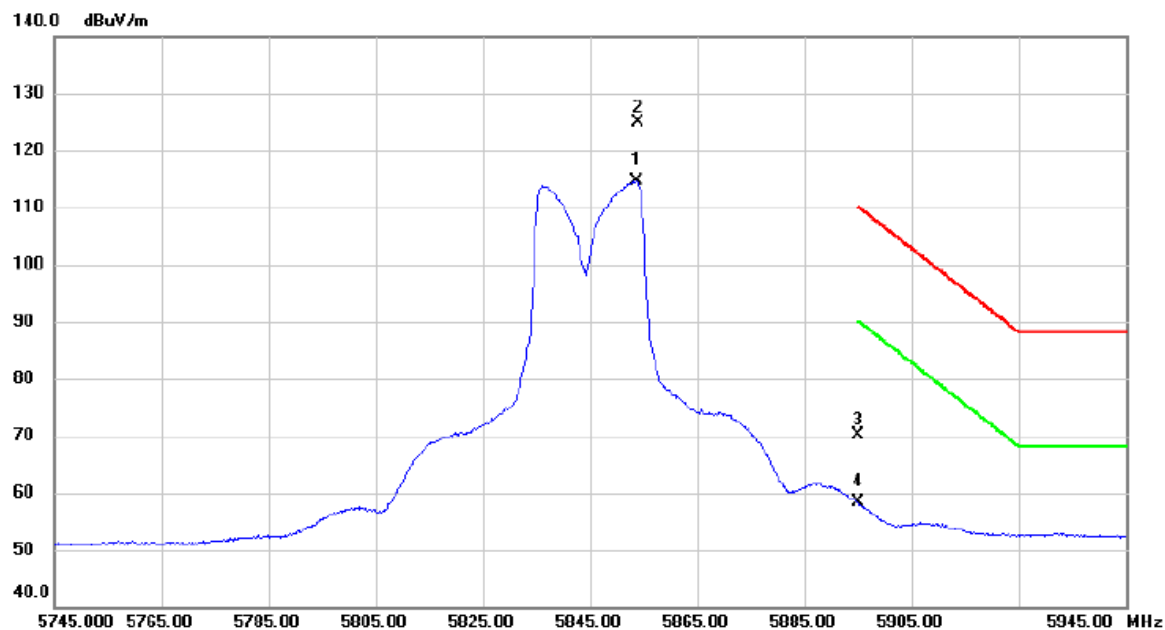


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5853.600	99.48	15.05	114.53			AVG	No Limit
2		5854.000	109.74	15.05	124.79			peak	No Limit
3		5895.000	55.06	15.15	70.21	110.20	-39.99	peak	
4		5895.000	43.28	15.15	58.43	90.20	-31.77	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX BE(EHT20) Mode 5885 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

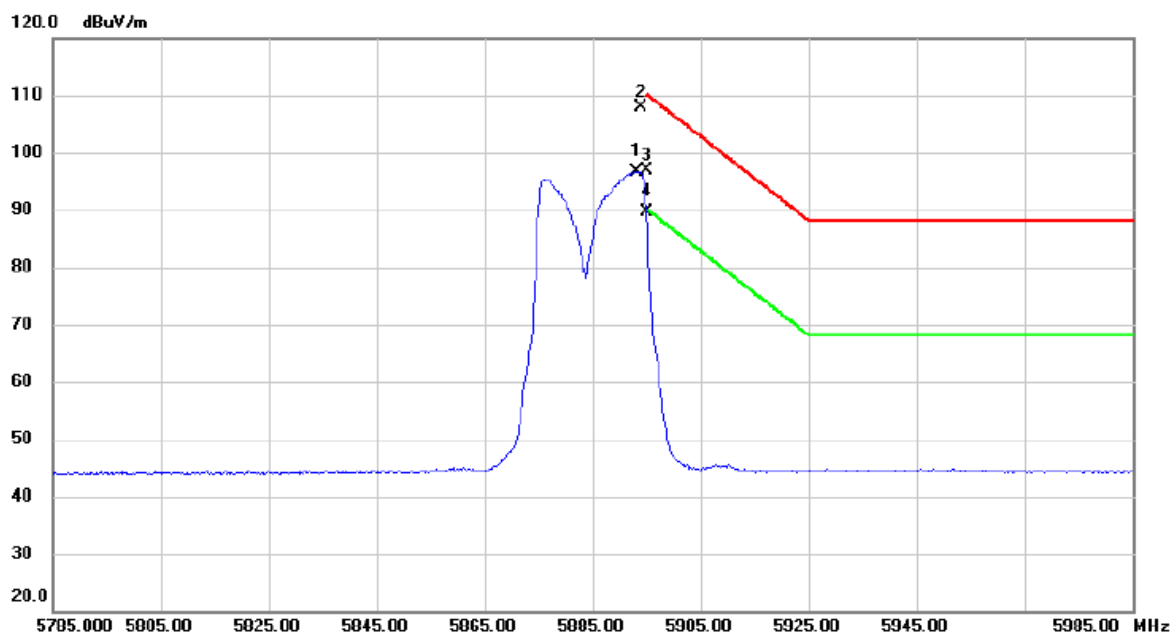


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5893.200	81.59	15.13	96.72			AVG	No Limit
2		5893.800	92.76	15.14	107.90			peak	No Limit
3		5895.000	81.64	15.15	96.79	110.20	-13.41	peak	
4		5895.000	74.50	15.15	89.65	90.20	-0.55	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT40) Mode 5835 MHz	Polarization	Vertical
-----------	--	--------------	----------

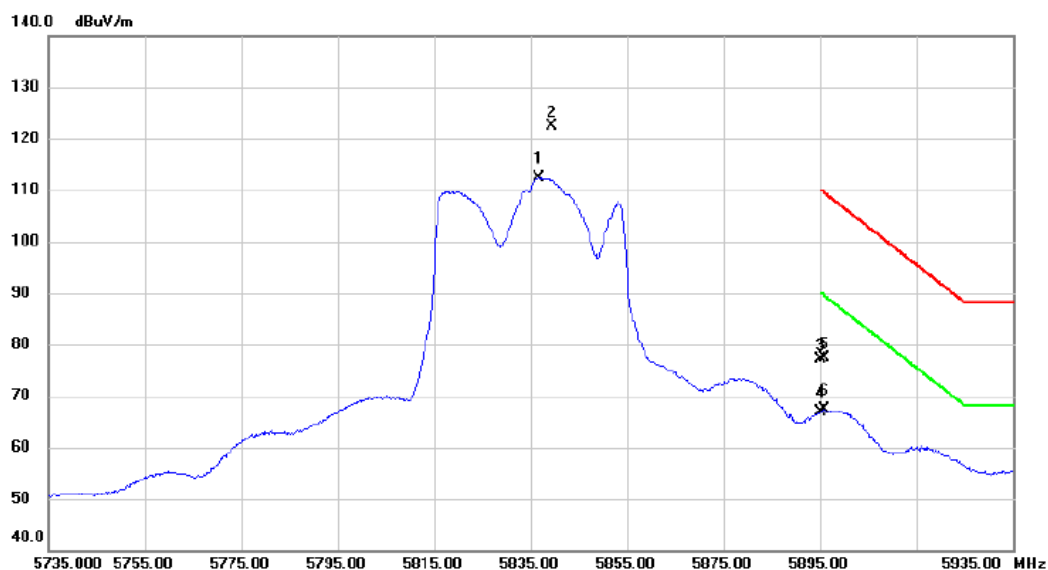


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5836.600	97.43	15.01	112.44			AVG	No Limit
2	5839.400	107.45	15.02	122.47			peak	No Limit
3	5895.000	61.93	15.15	77.08	110.20	-33.12	peak	
4	5895.000	51.80	15.15	66.95	90.20	-23.25	AVG	
5	5895.800	62.34	15.15	77.49	109.61	-32.12	peak	
6	5895.800	52.25	15.15	67.40	89.61	-22.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-4_TX BE(EHT40) Mode 5875 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

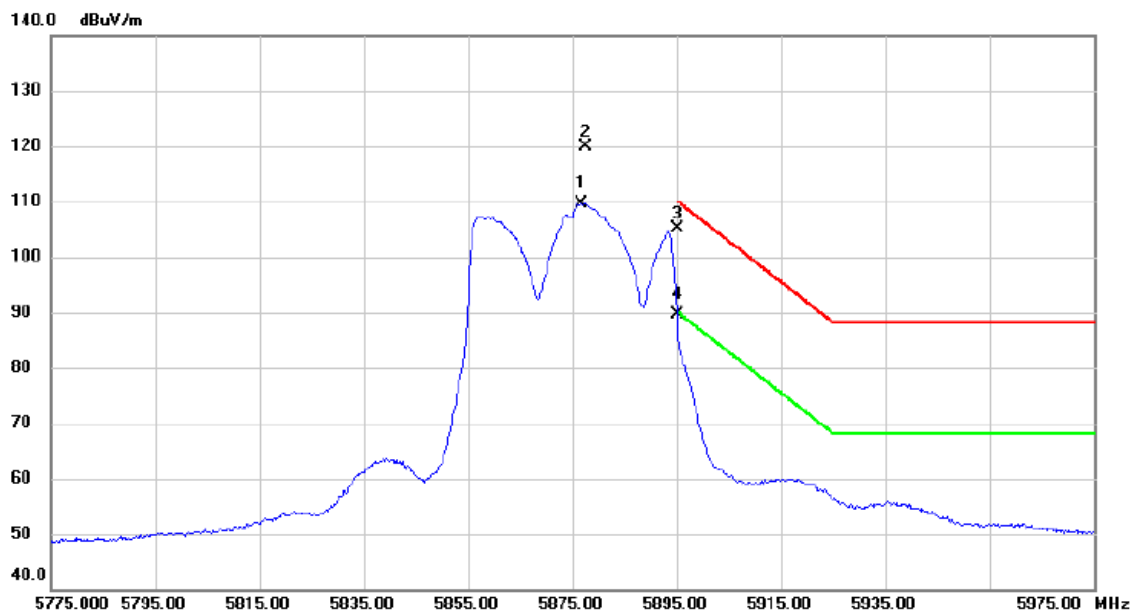


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5876.800	94.56	15.10	109.66			AVG	No Limit
2		5877.600	104.86	15.10	119.96			peak	No Limit
3		5895.000	90.08	15.15	105.23	110.20	-4.97	peak	
4		5895.000	74.51	15.15	89.66	90.20	-0.54	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT80) Mode 5855 MHz	Polarization	Vertical
-----------	--	--------------	----------

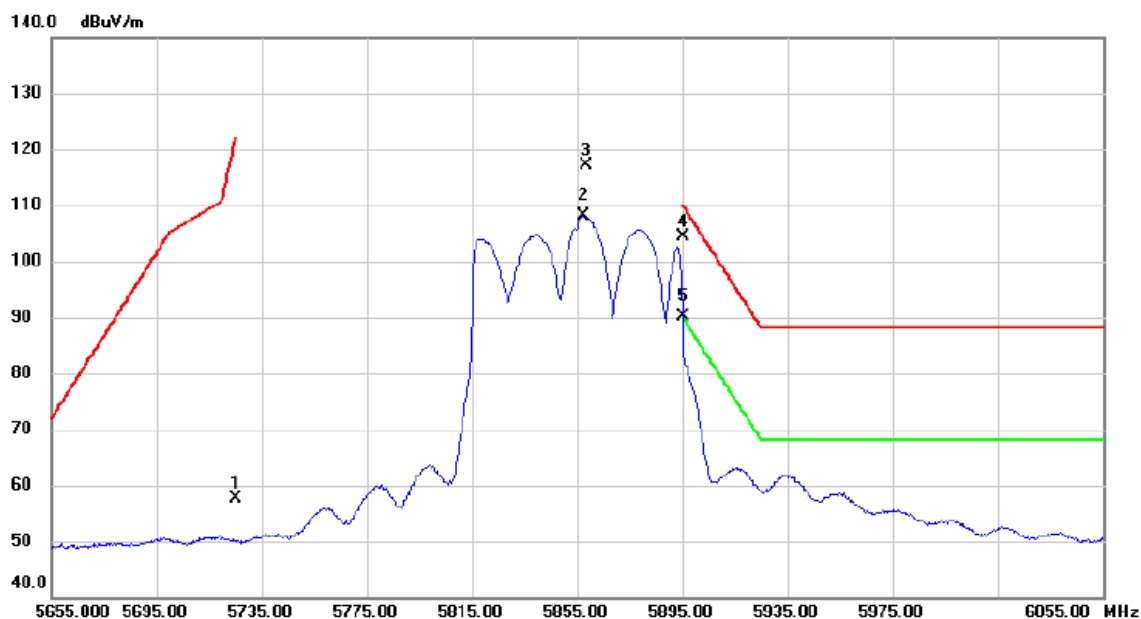


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5725.000	42.82	14.77	57.59	122.20	-64.61	peak	
2		5857.400	93.02	15.06	108.08			AVG	No Limit
3		5858.600	102.13	15.07	117.20			peak	No Limit
4		5895.000	89.15	15.15	104.30	110.20	-5.90	peak	
5 *		5895.000	74.87	15.15	90.02	90.20	-0.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3+UNII-4_TX BE(EHT160) Mode 5815 MHz	Polarization	Vertical
-----------	---	--------------	----------

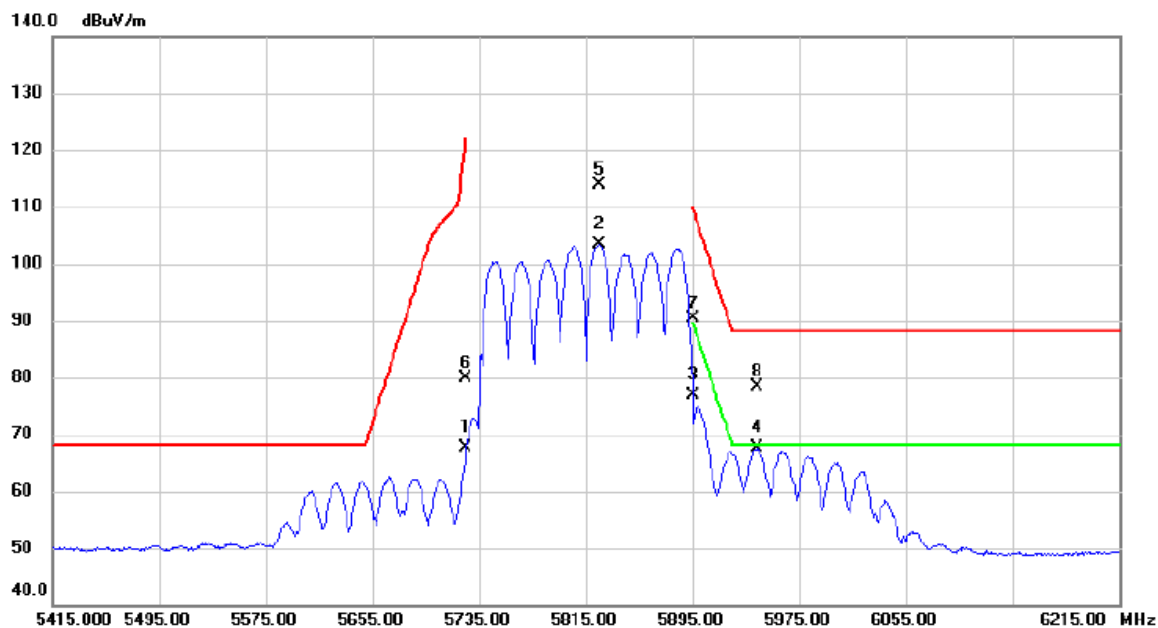

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5725.000	52.74	14.77	67.51	214.87	-147.36	AVG	
2		5825.400	88.35	14.99	103.34			AVG	No Limit
3		5895.000	61.82	15.15	76.97	90.20	-13.23	AVG	
4 *		5943.800	52.26	15.25	67.51	68.20	-0.69	AVG	
5		5825.400	98.87	14.99	113.86			peak	No Limit
6		5725.000	65.18	14.77	79.95	122.20	-42.25	peak	
7		5895.000	75.26	15.15	90.41	110.20	-19.79	peak	
8		5943.980	63.13	15.25	78.38	88.20	-9.82	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-3+UNII-4_TX A Mode
-----------	-------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
169	5845	17.790	20.400	0.5	Complies

CH169 6 dB Bandwidth

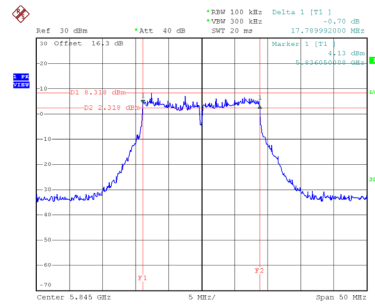

Date: 3.MAR.2025 17:25:22

99 % Occupied Bandwidth

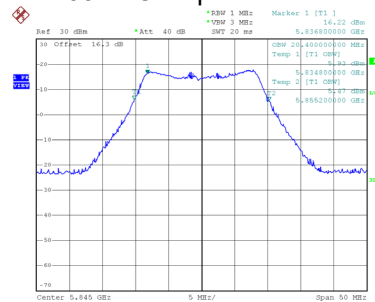


Date: 3.MAR.2025 17:24:44

Test Mode	UNII-4_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
173	5865	16.350	17.200	0.5	Complies
177	5885	16.000	17.100	0.5	Complies

CH173

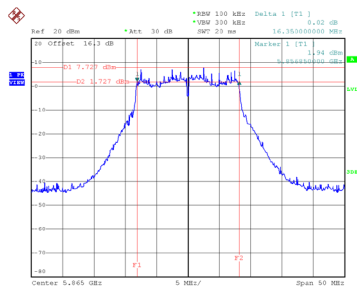


Date: 26.MAR.2025 02:27:13

CH177
6 dB Bandwidth

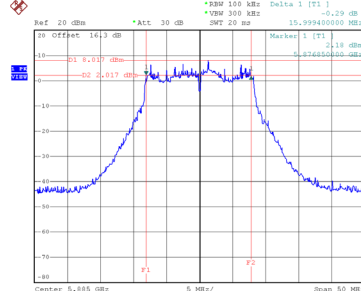


Date: 26.MAR.2025 02:40:10

99 % Occupied Bandwidth

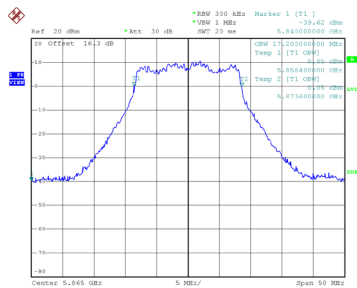

Date: 26.MAR.2025 02:28:36

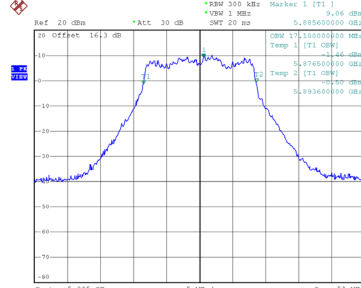


Date: 26.MAR.2025 02:36:34


Test Mode	UNII-3+UNII-4_TX AC(VHT20) Mode
-----------	---------------------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
169	5845	17.750	20.400	0.5	Complies

CH169 6 dB Bandwidth

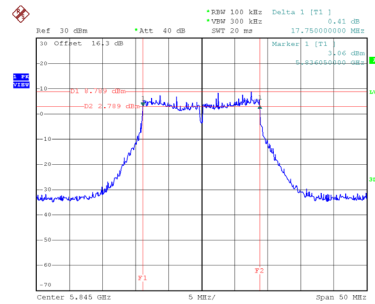


99 % Occupied Bandwidth

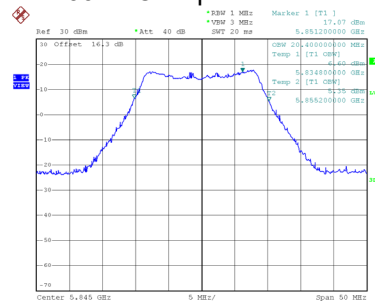

Test Mode	UNII-4_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
173	5865	17.700	18.500	0.5	Complies
177	5885	17.700	18.500	0.5	Complies

CH173

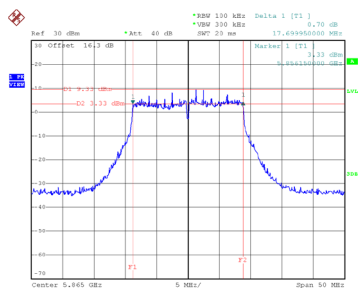


Date: 26.MAR.2025 02:44:53

CH177
6 dB Bandwidth

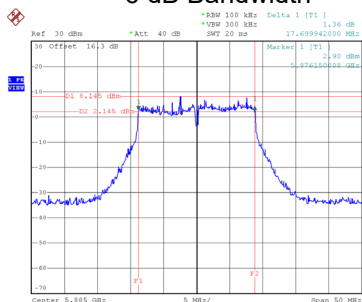


Date: 26.MAR.2025 02:46:54

99 % Occupied Bandwidth

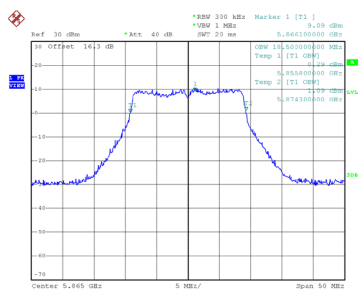

Date: 26.MAR.2025 02:44:41

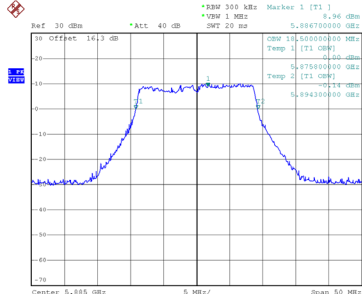


Date: 26.MAR.2025 02:45:24

Test Mode	UNII-3+UNII-4_TX AC(VHT40) Mode
-----------	---------------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
167	5835	34.190	37.000	0.5	Complies

CH167 6 dB Bandwidth

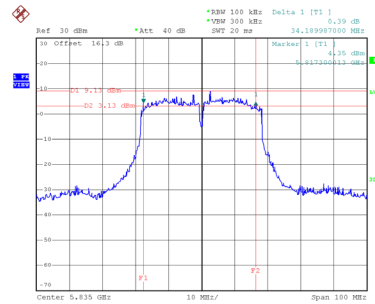

Date: 3.MAR.2025 17:33:10

99 % Occupied Bandwidth

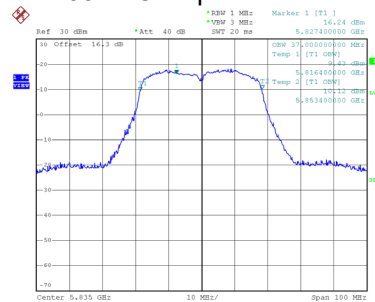


Date: 3.MAR.2025 17:32:23

Test Mode	UNII-4_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
175	5875	35.100	37.200	0.5	Complies

CH175 6 dB Bandwidth

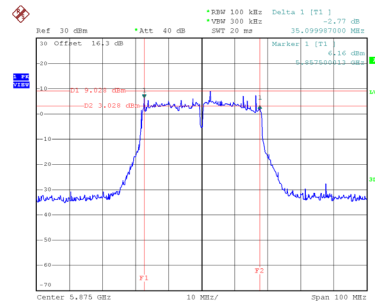

Date: 26.MAR.2025 02:56:07

99 % Occupied Bandwidth

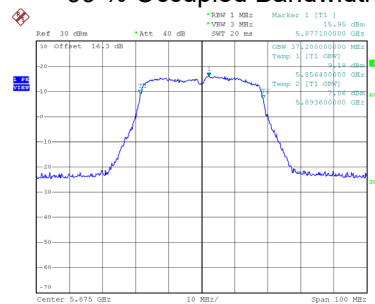


Date: 26.MAR.2025 02:53:38

Test Mode	UNII-3+UNII-4_TX AC(VHT80) Mode
-----------	---------------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
171	5855	74.800	77.600	0.5	Complies

CH171 6 dB Bandwidth

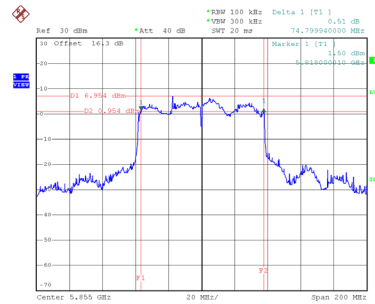

Date: 3.MAR.2025 17:35:06

99 % Occupied Bandwidth

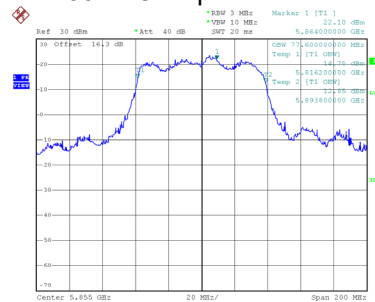

Date: 3.MAR.2025 17:34:18