


Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

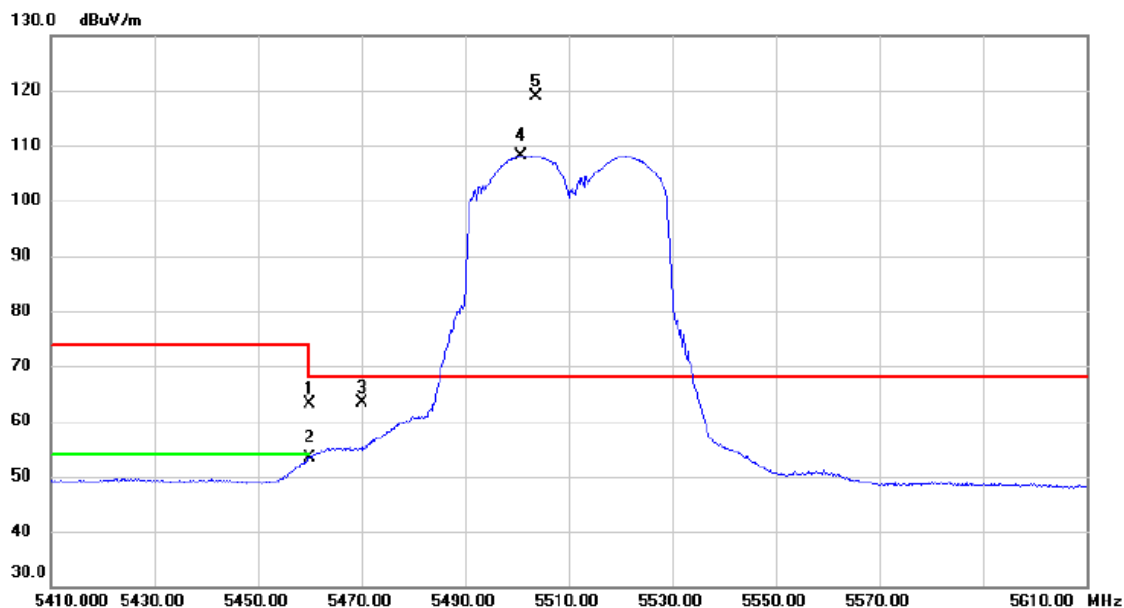


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	48.46	14.71	63.17	74.00	-10.83	peak	
2		5460.000	38.66	14.71	53.37	54.00	-0.63	AVG	
3		5470.000	48.59	14.73	63.32	68.20	-4.88	peak	
4	X	5500.800	93.39	14.75	108.14	68.20	39.94	AVG	No Limit
5	*	5503.800	104.21	14.76	118.97	68.20	50.77	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

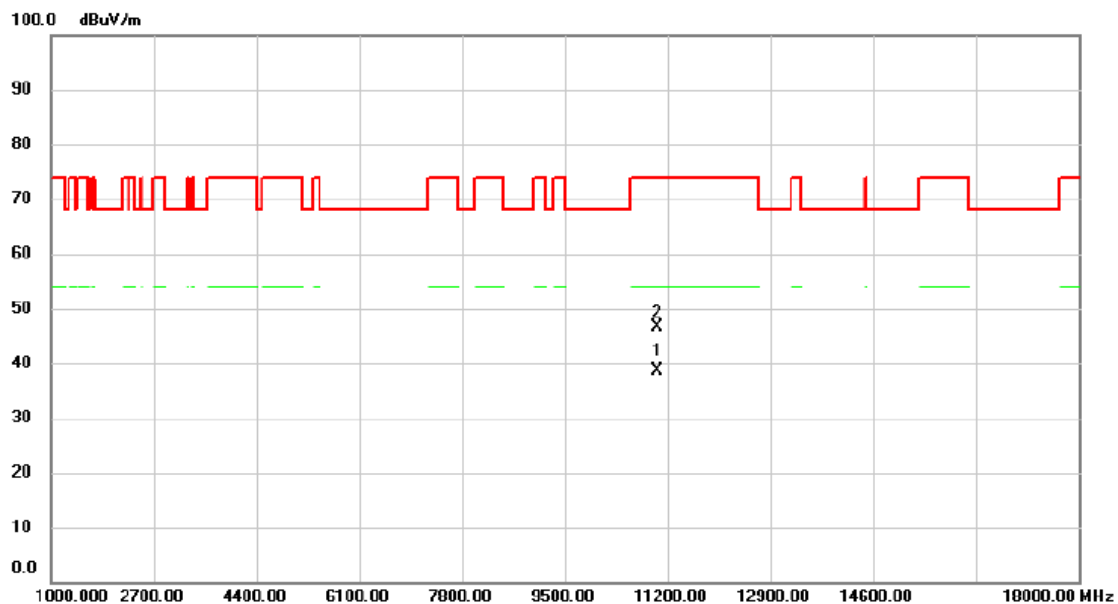


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11019.840	28.57	10.17	38.74	54.00	-15.26	AVG	
2		11019.960	36.53	10.17	46.70	74.00	-27.30	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

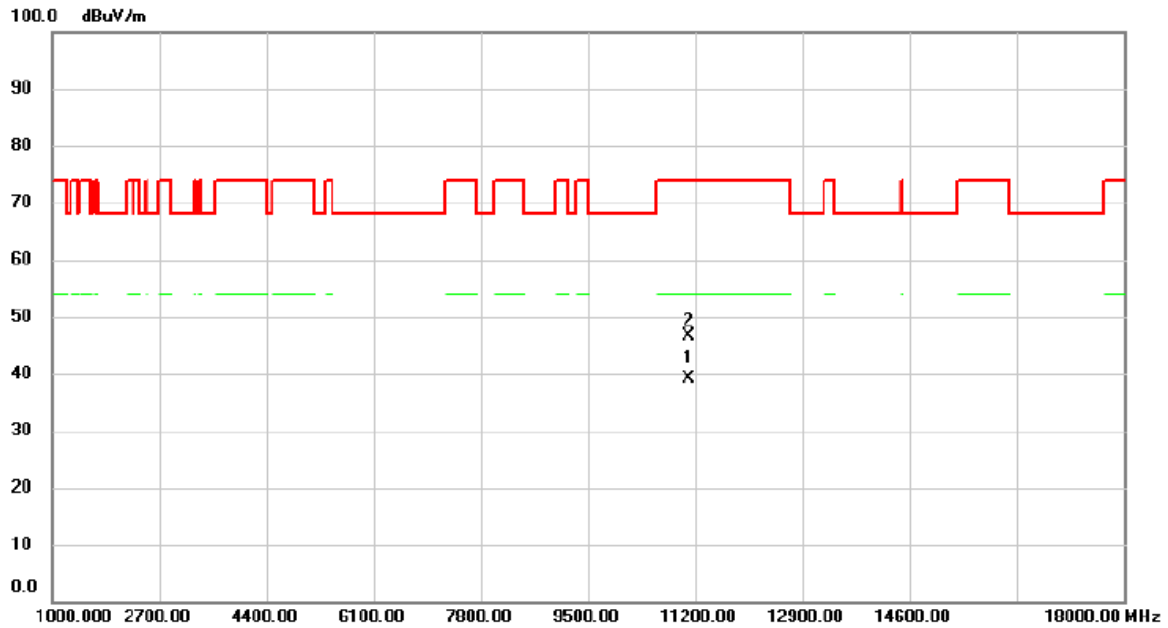


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11099.820	28.80	10.24	39.04	54.00	-14.96	AVG	
2		11099.920	36.44	10.24	46.68	74.00	-27.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

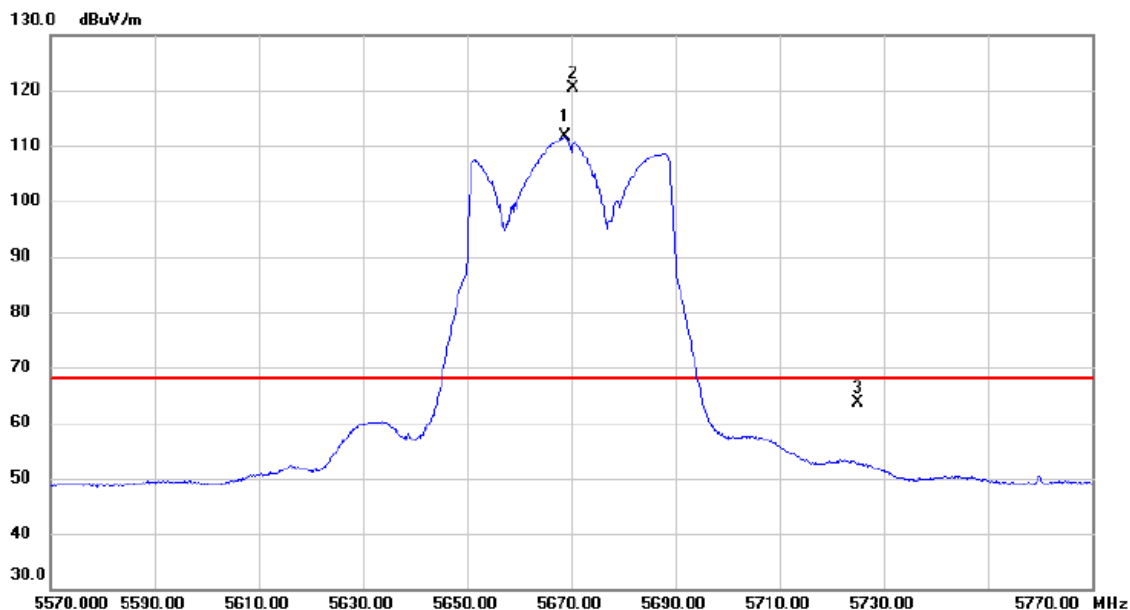


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5668.800	96.35	15.17	111.52	68.20	43.32	AVG	No Limit
2	*	5670.400	105.25	15.19	120.44	68.20	52.24	peak	No Limit
3		5725.000	48.30	15.32	63.62	68.20	-4.58	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

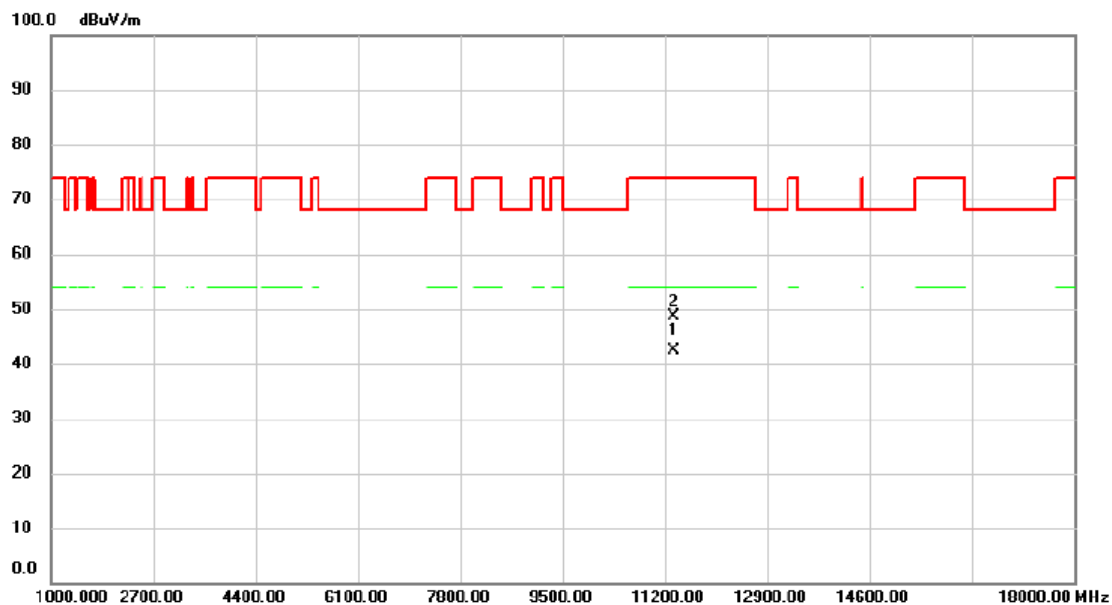


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11339.860	31.93	10.41	42.34	54.00	-11.66	AVG	
2		11340.040	38.12	10.41	48.53	74.00	-25.47	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

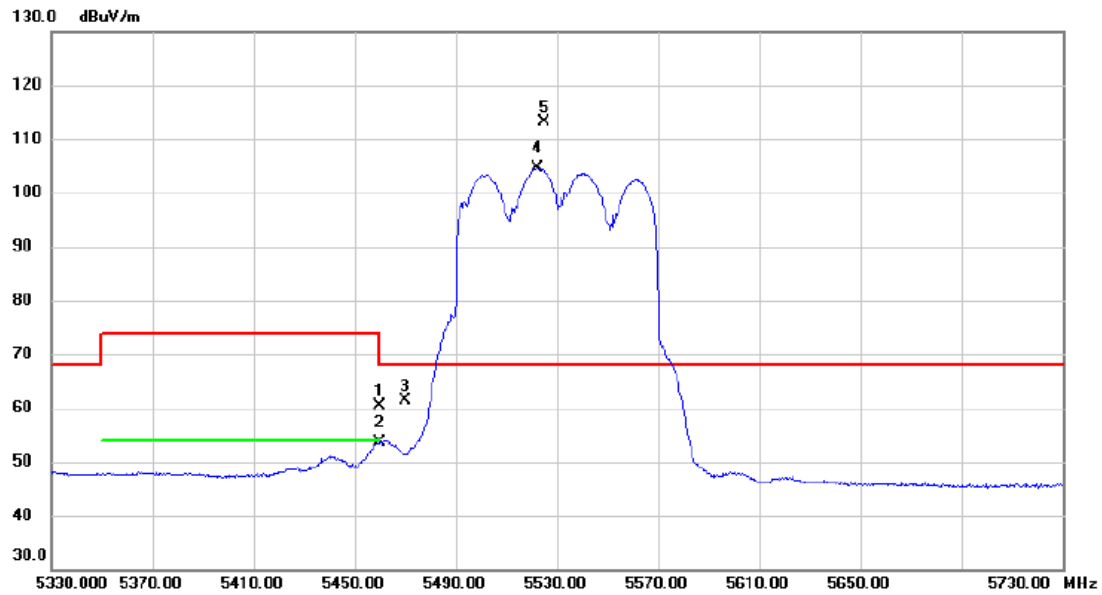


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	45.71	14.71	60.42	74.00	-13.58	peak	
2		5460.000	38.87	14.71	53.58	54.00	-0.42	AVG	
3		5470.000	46.68	14.73	61.41	68.20	-6.79	peak	
4	X	5522.400	89.75	14.80	104.55	68.20	36.35	AVG	No Limit
5	*	5524.800	98.25	14.81	113.06	68.20	44.86	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

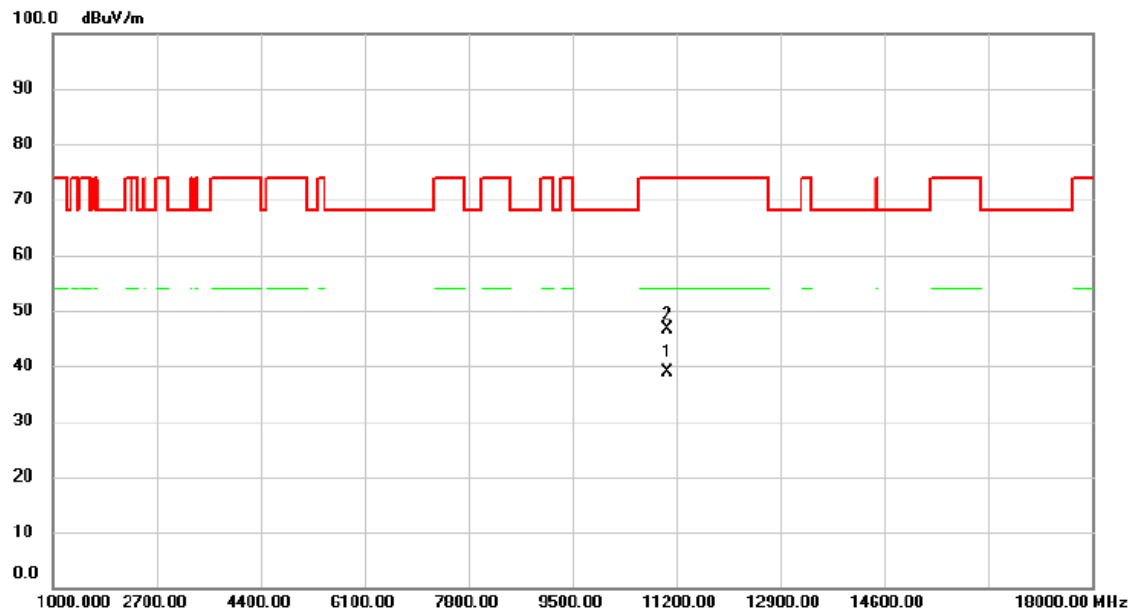


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11059.900	28.57	10.21	38.78	54.00	-15.22	AVG	
2		11059.940	36.46	10.21	46.67	74.00	-27.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

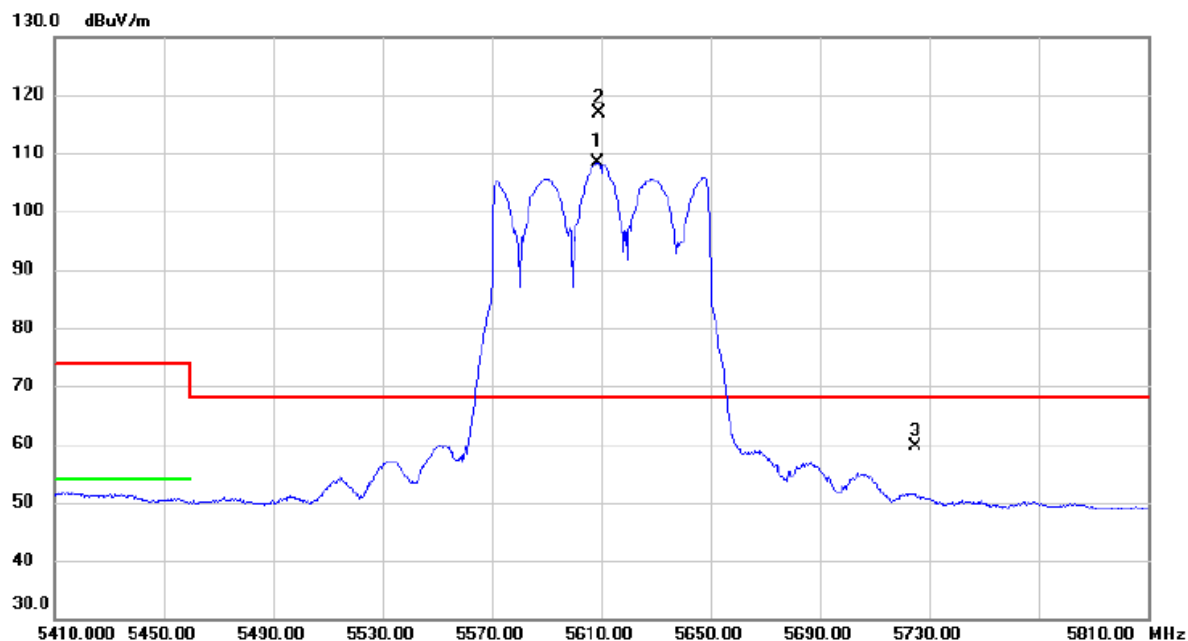


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5608.800	93.46	15.03	108.49	68.20	40.29	AVG	No Limit
2	*	5609.200	101.74	15.03	116.77	68.20	48.57	peak	No Limit
3		5725.000	44.31	15.32	59.63	68.20	-8.57	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

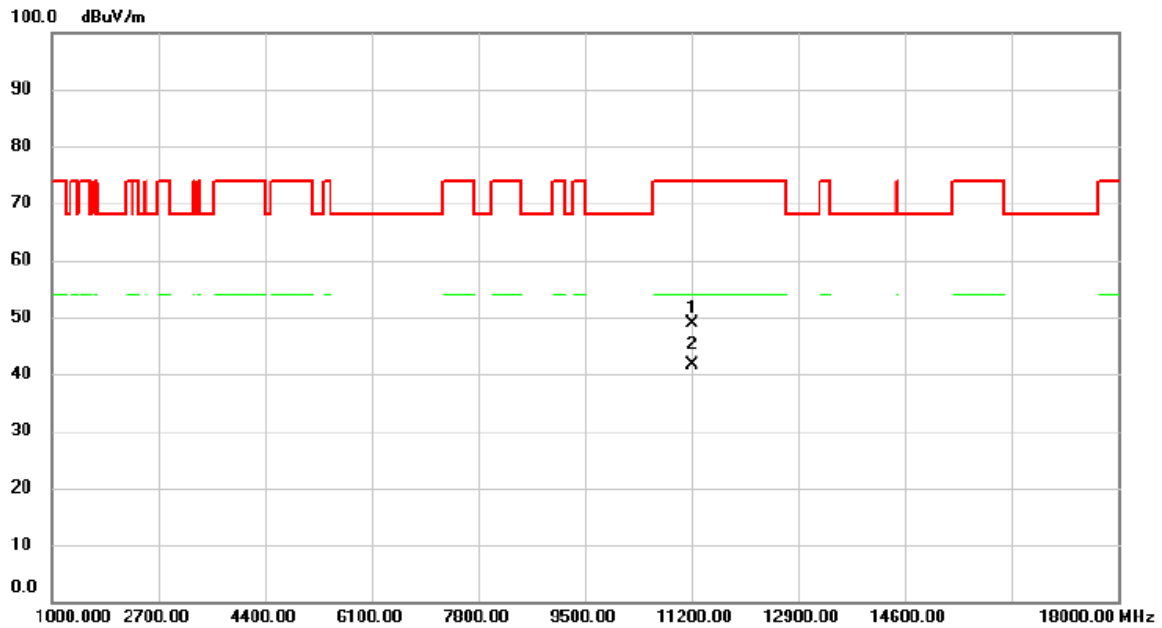


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11219.720	38.49	10.33	48.82	74.00	-25.18	peak	
2	*	11219.880	31.42	10.33	41.75	54.00	-12.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

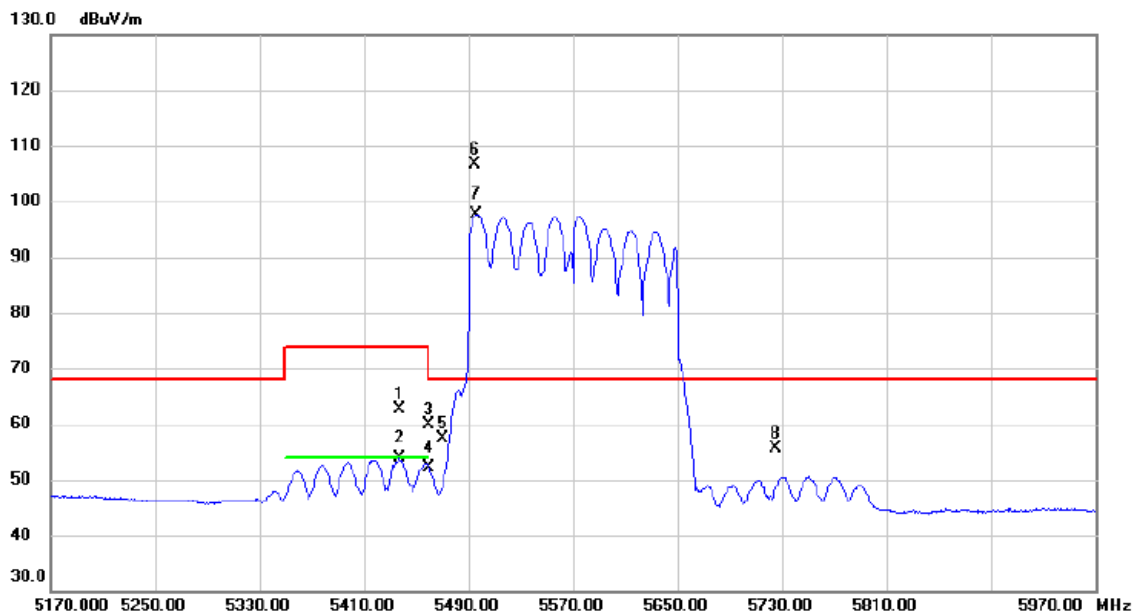


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5437.200	48.02	14.69	62.71	74.00	-11.29	peak	
2		5437.200	39.21	14.69	53.90	54.00	-0.10	AVG	
3		5460.000	45.21	14.71	59.92	74.00	-14.08	peak	
4		5460.000	37.34	14.71	52.05	54.00	-1.95	AVG	
5		5470.000	42.70	14.73	57.43	68.20	-10.77	peak	
6	*	5494.800	91.87	14.74	106.61	68.20	38.41	peak	No Limit
7	X	5496.400	82.96	14.75	97.71	68.20	29.51	AVG	No Limit
8		5725.000	40.38	15.32	55.70	68.20	-12.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

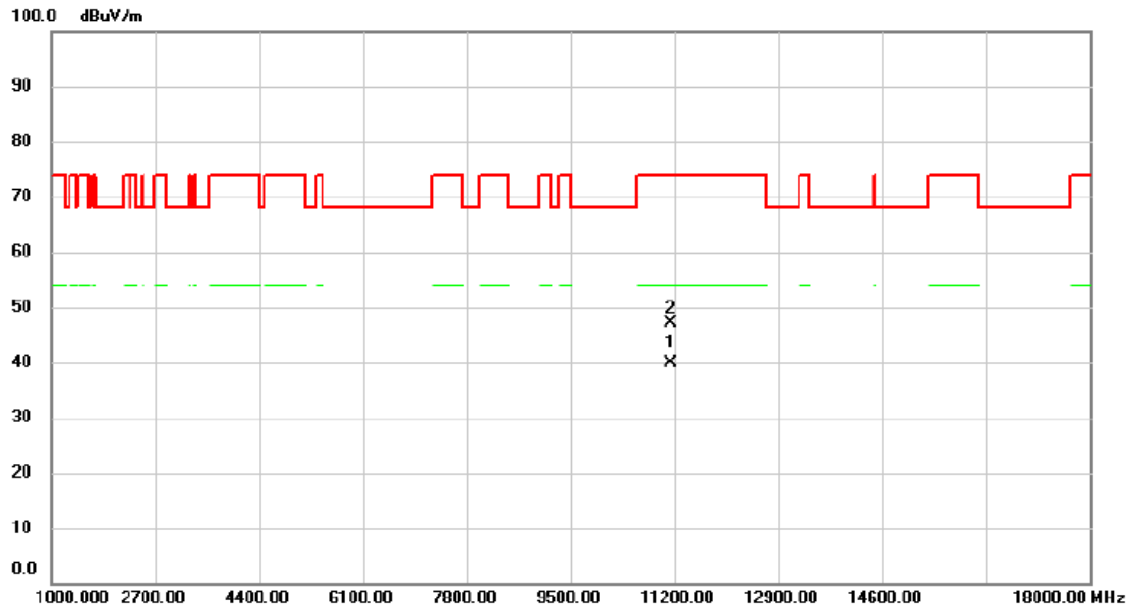


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11139.840	29.50	10.26	39.76	54.00	-14.24	AVG	
2		11140.160	36.76	10.26	47.02	74.00	-26.98	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT240) Mode 5650 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

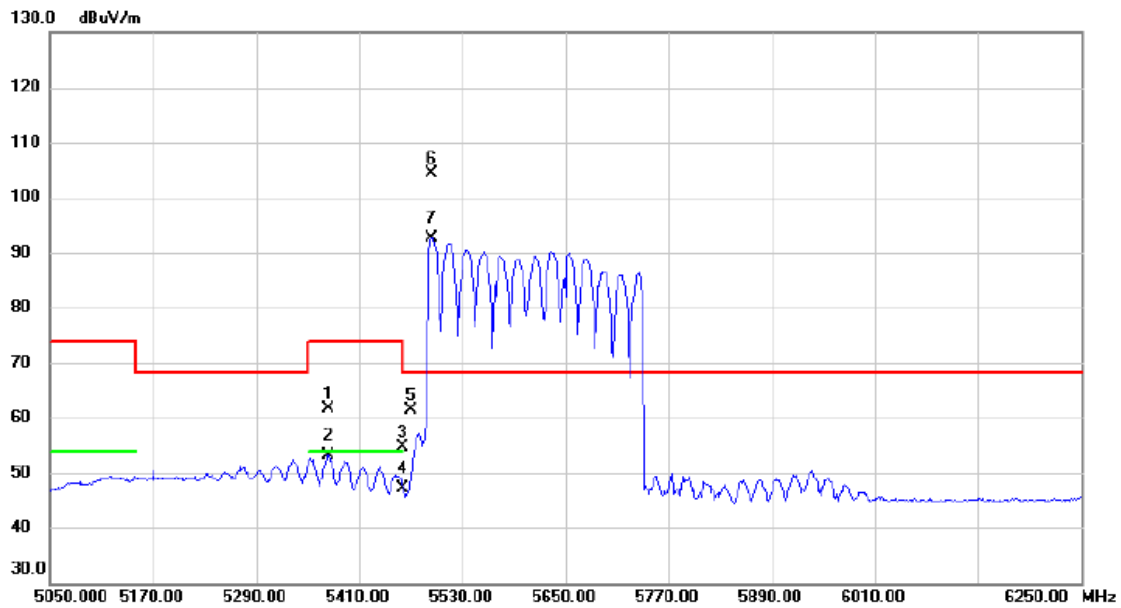


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5374.000	47.00	14.64	61.64	74.00	-12.36	peak	
2		5374.000	38.56	14.64	53.20	54.00	-0.80	AVG	
3		5460.000	40.03	14.71	54.74	74.00	-19.26	peak	
4		5460.000	32.42	14.71	47.13	54.00	-6.87	AVG	
5		5470.000	46.69	14.73	61.42	68.20	-6.78	peak	
6 *		5494.000	89.73	14.74	104.47	68.20	36.27	peak	No Limit
7 X		5494.000	77.99	14.74	92.73	68.20	24.53	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT240) Mode 5650 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

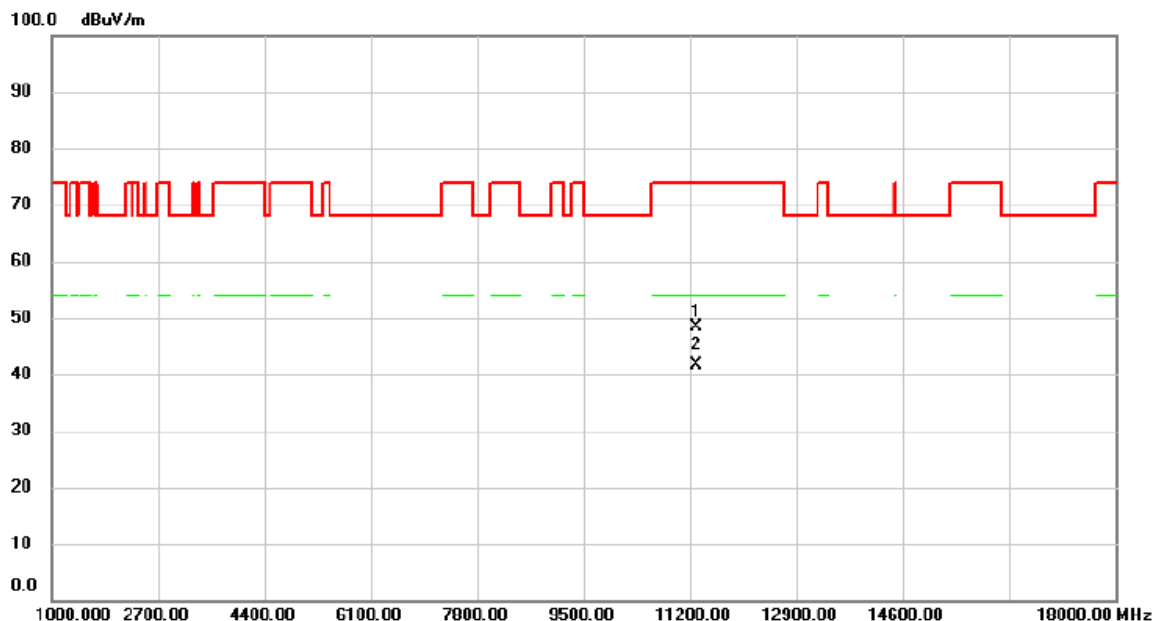


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11299.920	37.92	10.39	48.31	74.00	-25.69	peak	
2	*	11299.920	31.20	10.39	41.59	54.00	-12.41	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

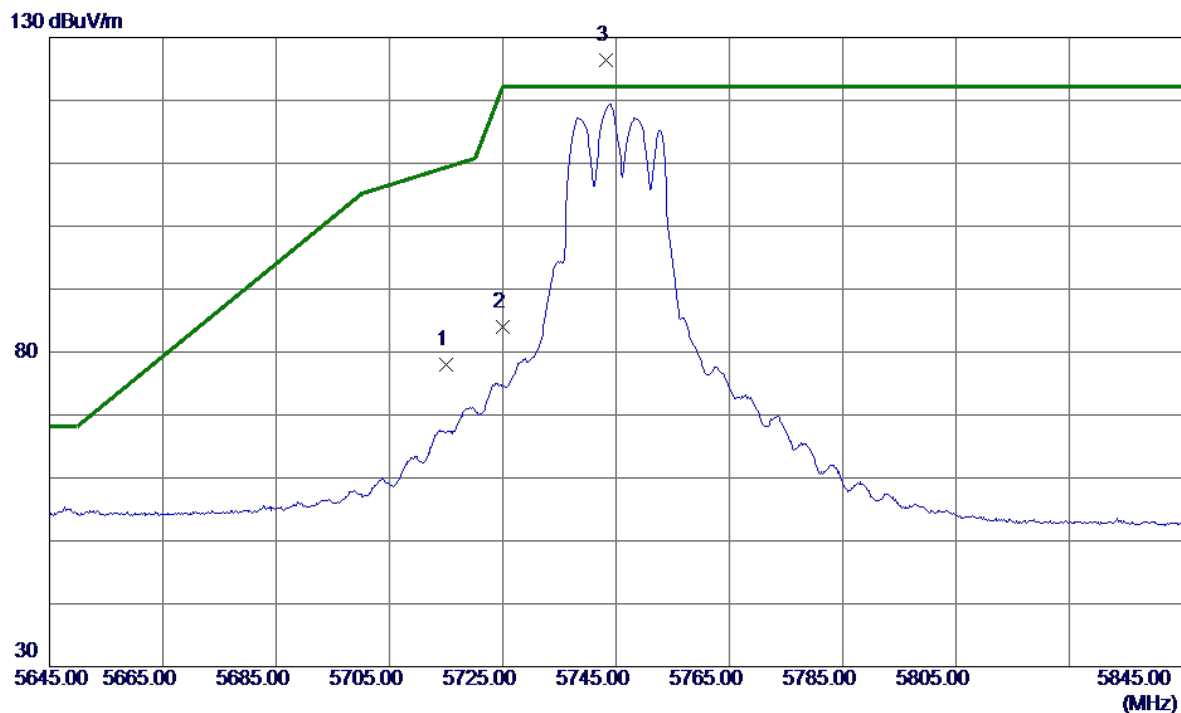


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	62.66	15.30	77.96	109.40	-31.44	Peak	
2	5725.0000	68.65	15.32	83.97	122.20	-38.23	Peak	
3 *	5743.2000	111.09	15.37	126.46	122.20	4.26	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

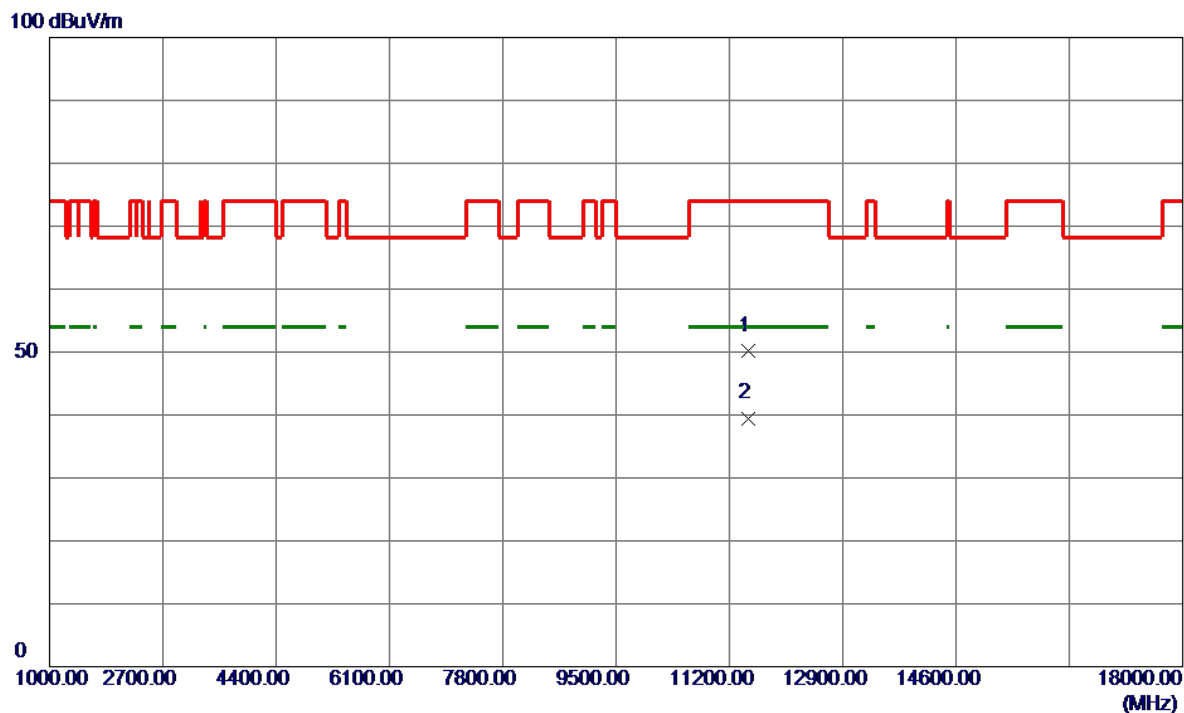


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.3200	39.62	10.53	50.15	74.00	-23.85	Peak	
2 *	11489.7200	28.97	10.53	39.50	54.00	-14.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

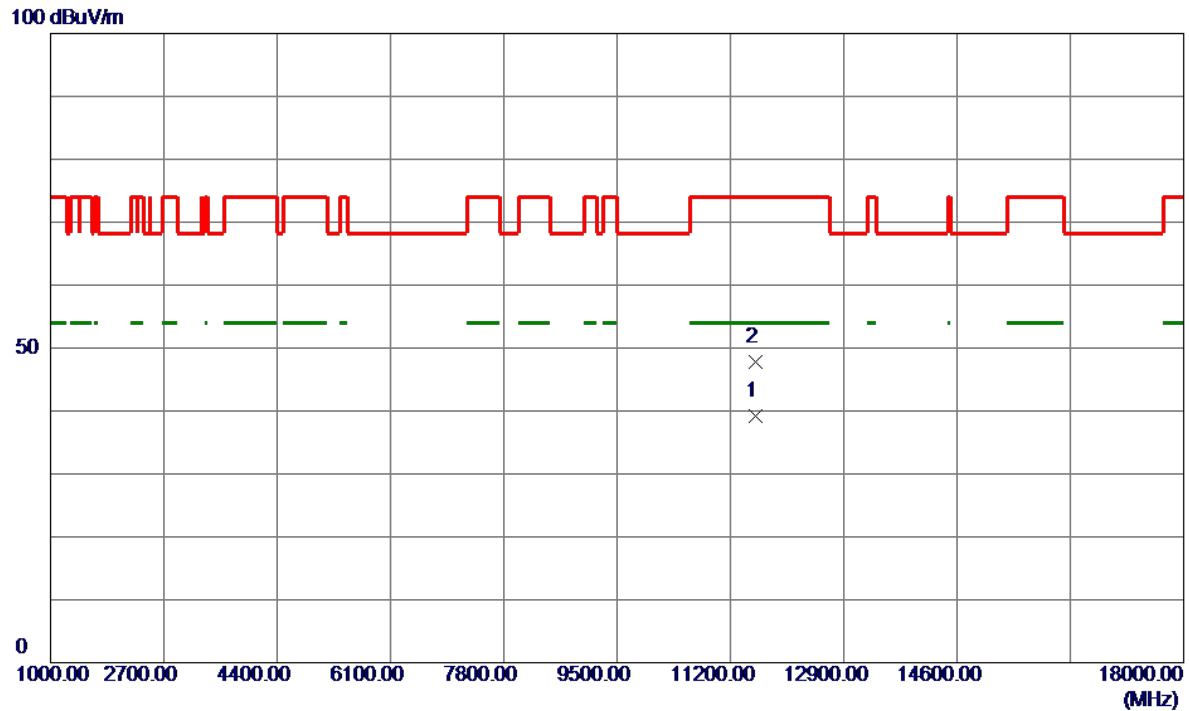


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0000	28.61	10.57	39.18	54.00	-14.82	AVG	
2	11574.8800	37.20	10.57	47.77	74.00	-26.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

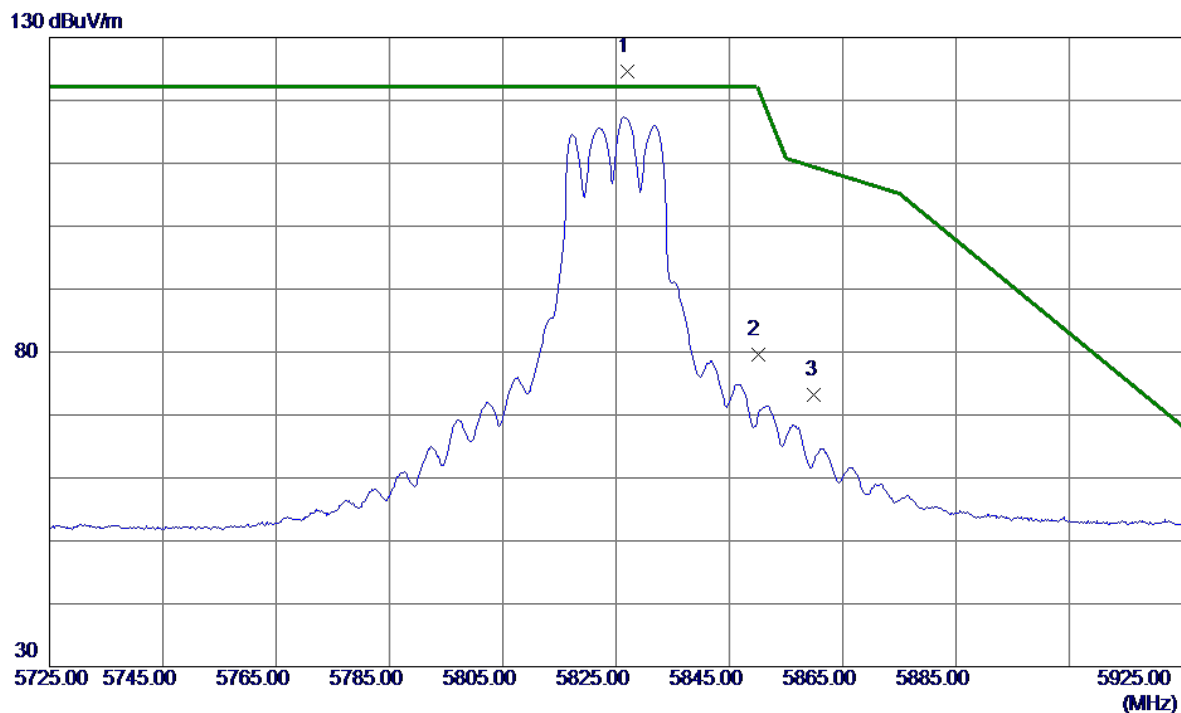


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5827.0000	108.93	15.58	124.51	122.20	2.31	Peak	No Limit
2	5850.0000	63.90	15.64	79.54	122.20	-42.66	Peak	
3	5860.0000	57.51	15.66	73.17	109.40	-36.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

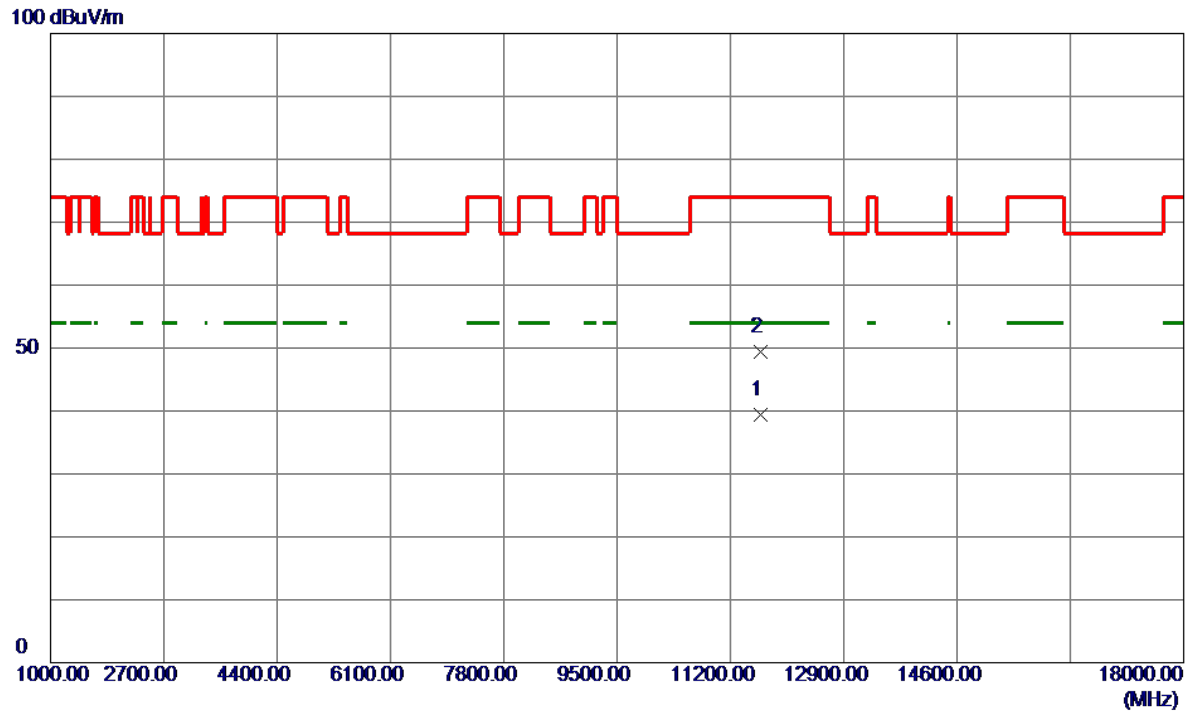


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.6400	28.83	10.60	39.43	54.00	-14.57	AVG	
2	11654.0800	38.79	10.60	49.39	74.00	-24.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

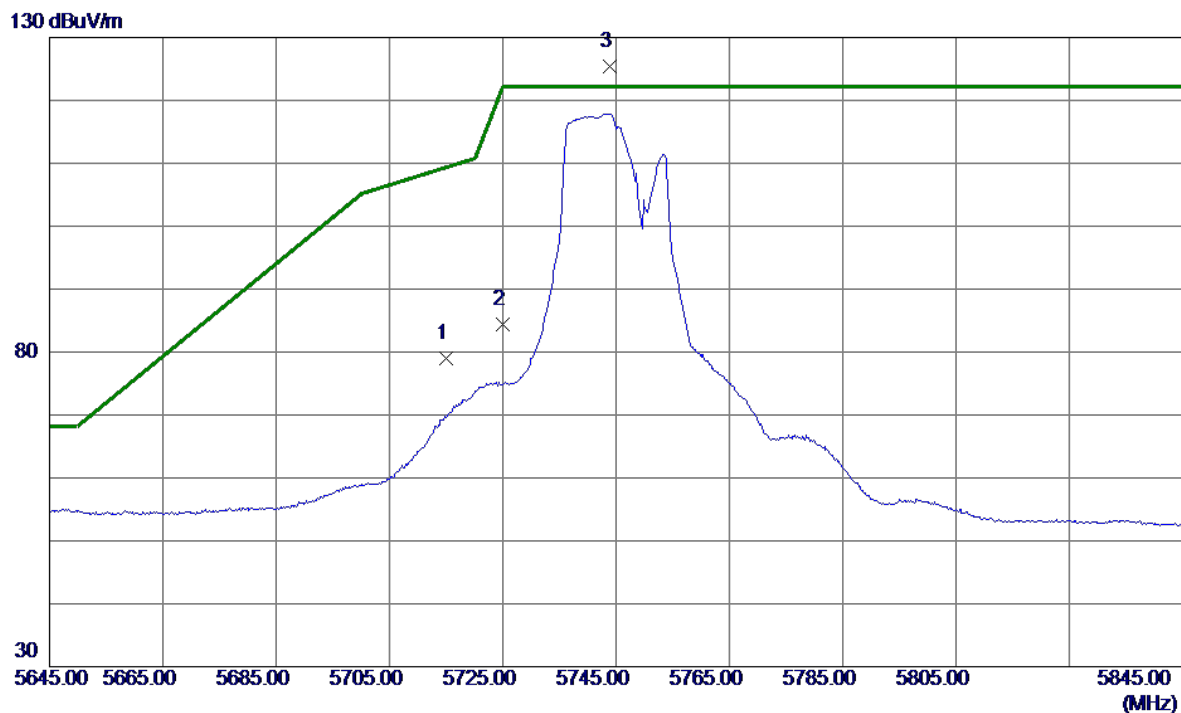


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	63.61	15.30	78.91	109.40	-30.49	Peak	
2	5725.0000	69.04	15.32	84.36	122.20	-37.84	Peak	
3 *	5743.8000	110.06	15.37	125.43	122.20	3.23	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

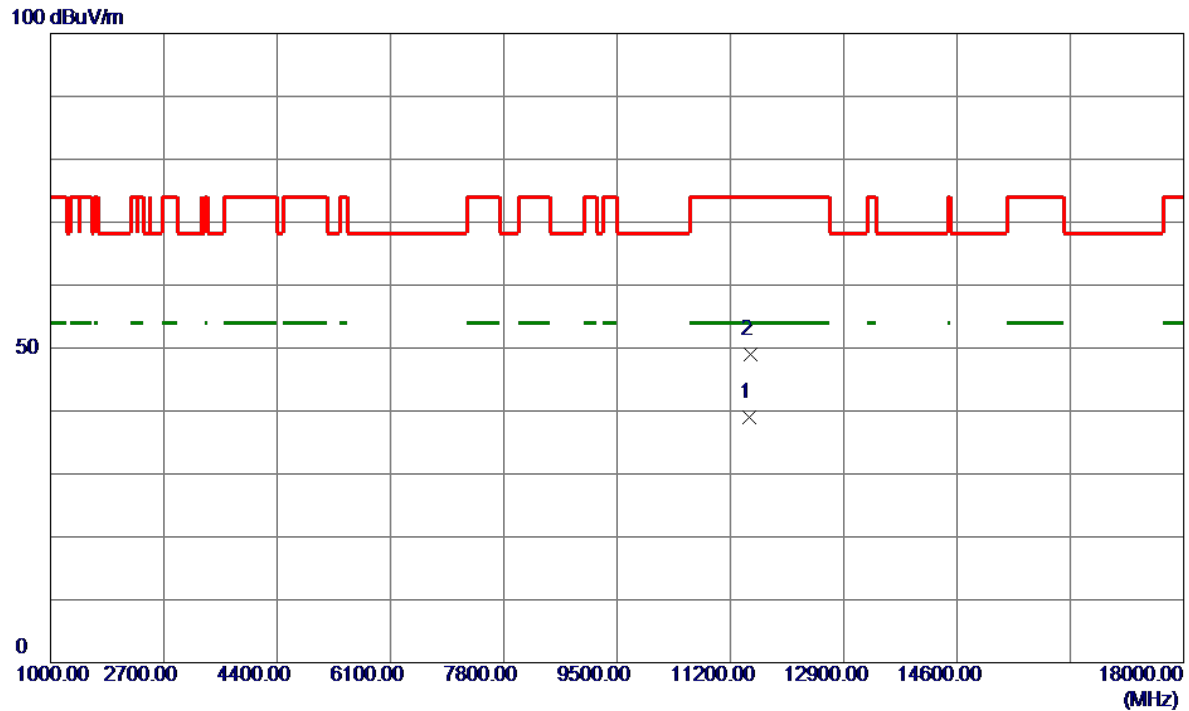


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11489.8800	28.55	10.53	39.08	54.00	-14.92	AVG	
2	11493.3600	38.42	10.53	48.95	74.00	-25.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

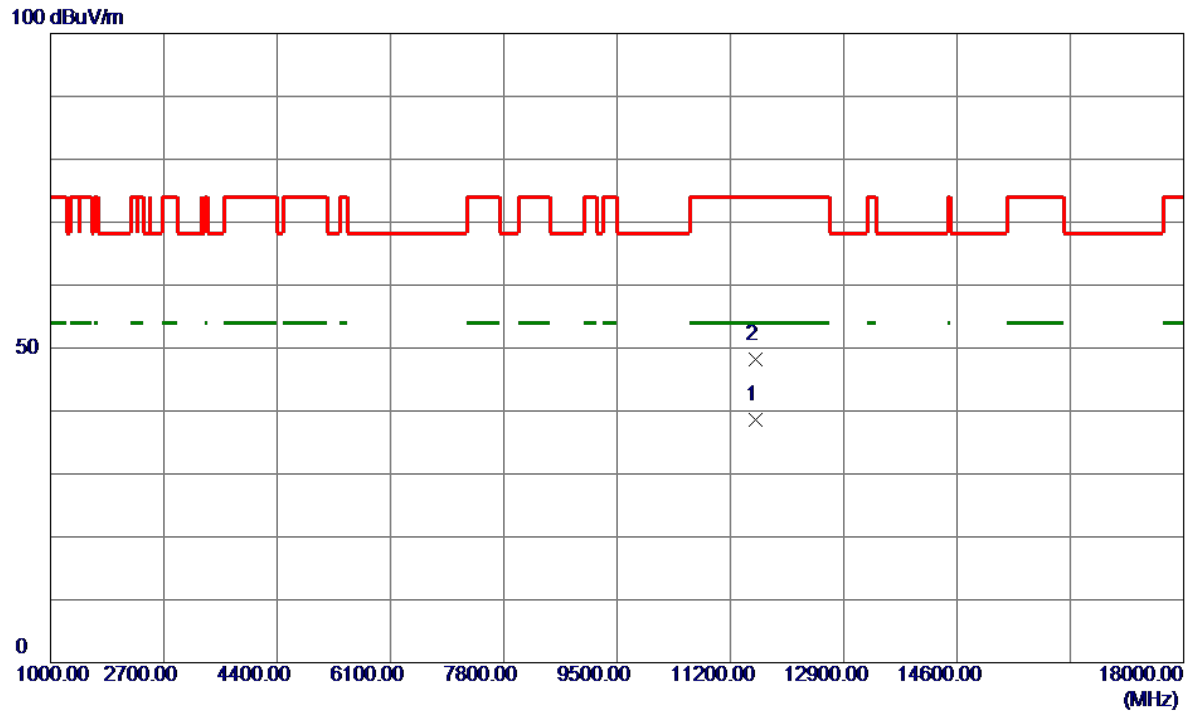


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11568.3500	28.10	10.57	38.67	54.00	-15.33	AVG	
2	11571.0000	37.65	10.57	48.22	74.00	-25.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

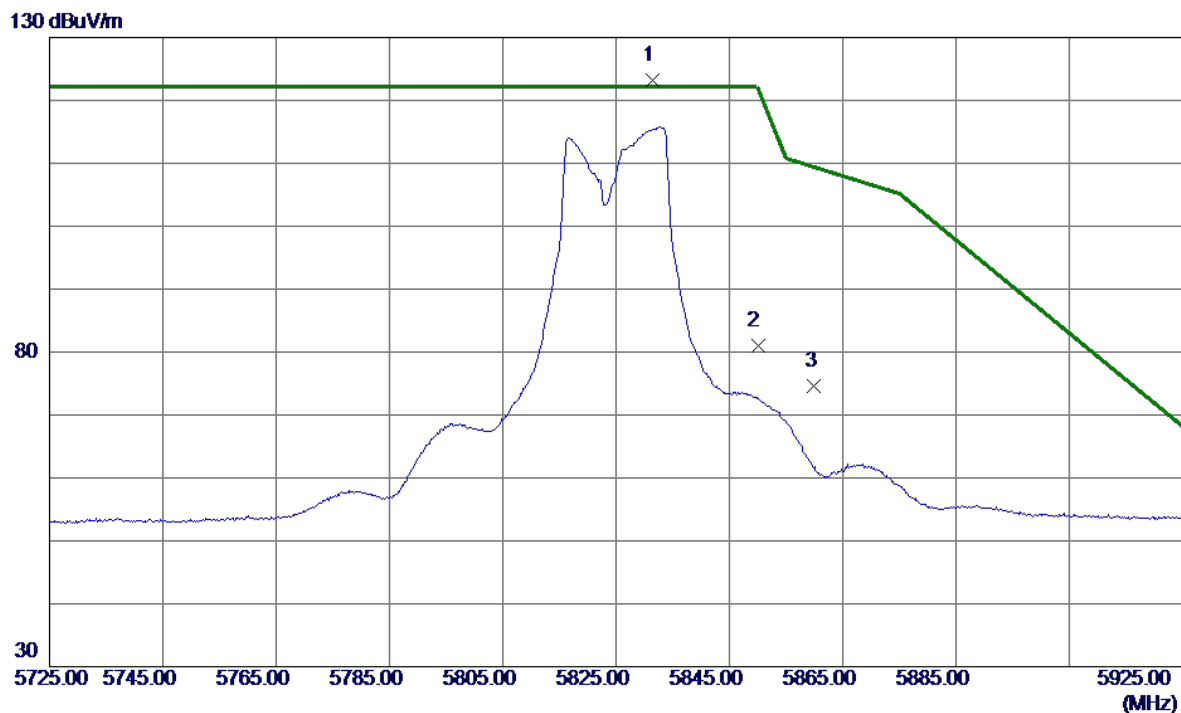


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5831.4000	107.69	15.59	123.28	122.20	1.08	Peak	No Limit
2	5850.0000	65.45	15.64	81.09	122.20	-41.11	Peak	
3	5860.0000	58.91	15.66	74.57	109.40	-34.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

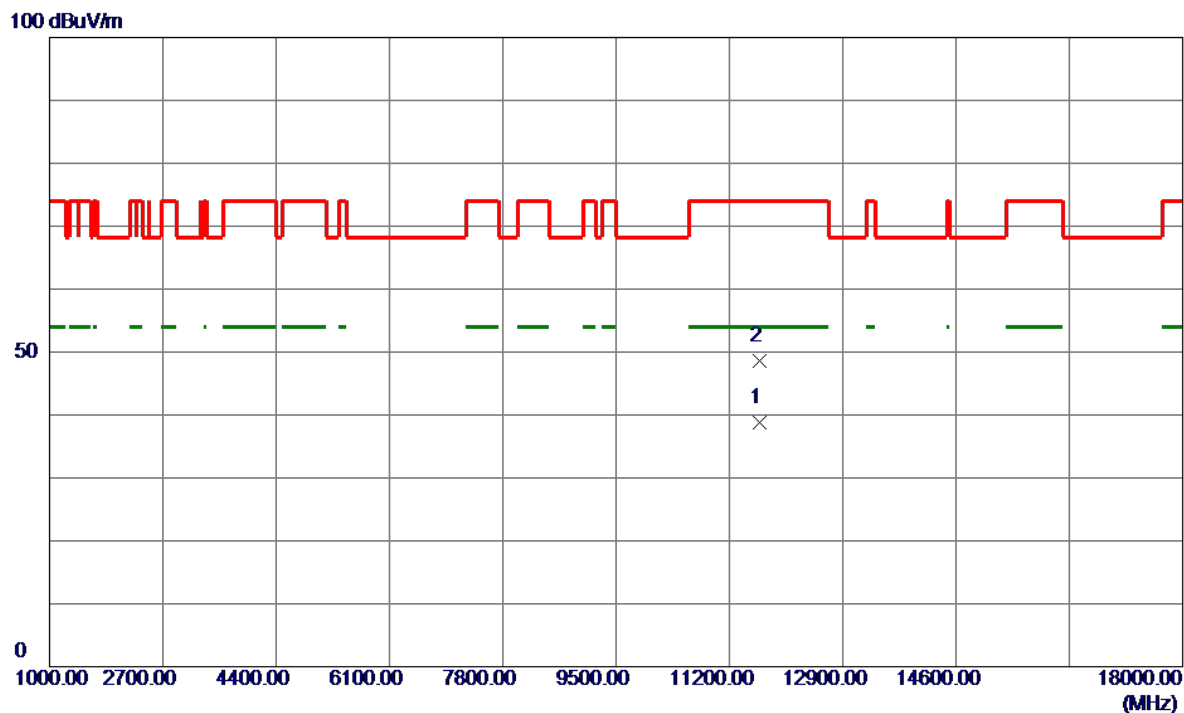


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.9000	28.25	10.60	38.85	54.00	-15.15	AVG	
2	11653.4500	38.05	10.60	48.65	74.00	-25.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

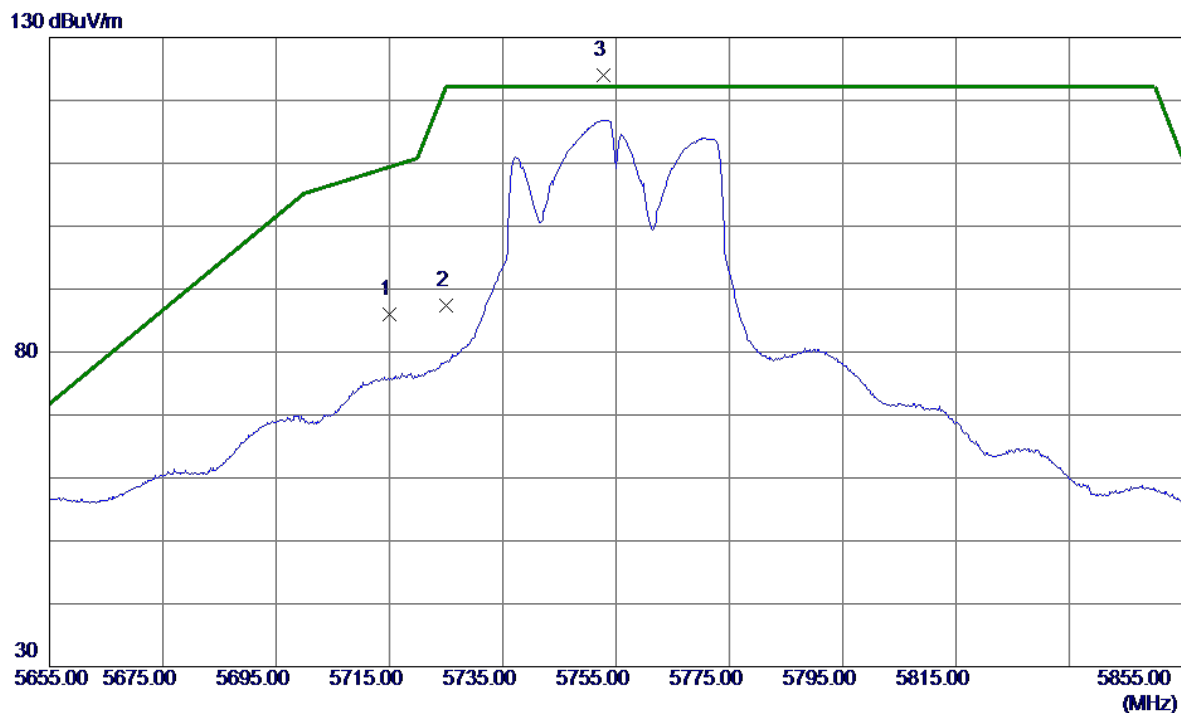


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	70.75	15.30	86.05	109.40	-23.35	Peak	
2	5725.0000	72.09	15.32	87.41	122.20	-34.79	Peak	
3 *	5752.8000	108.71	15.39	124.10	122.20	1.90	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

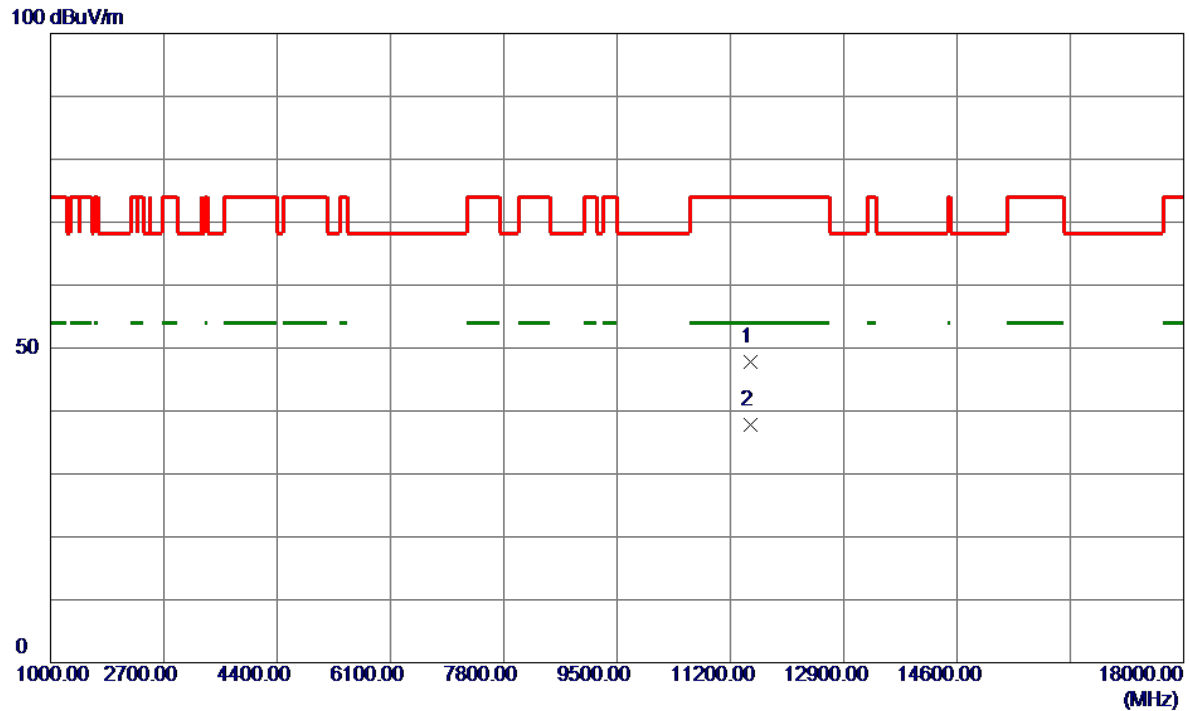


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11505.3400	37.21	10.54	47.75	74.00	-26.25	Peak	
2 *	11509.6600	27.18	10.54	37.72	54.00	-16.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

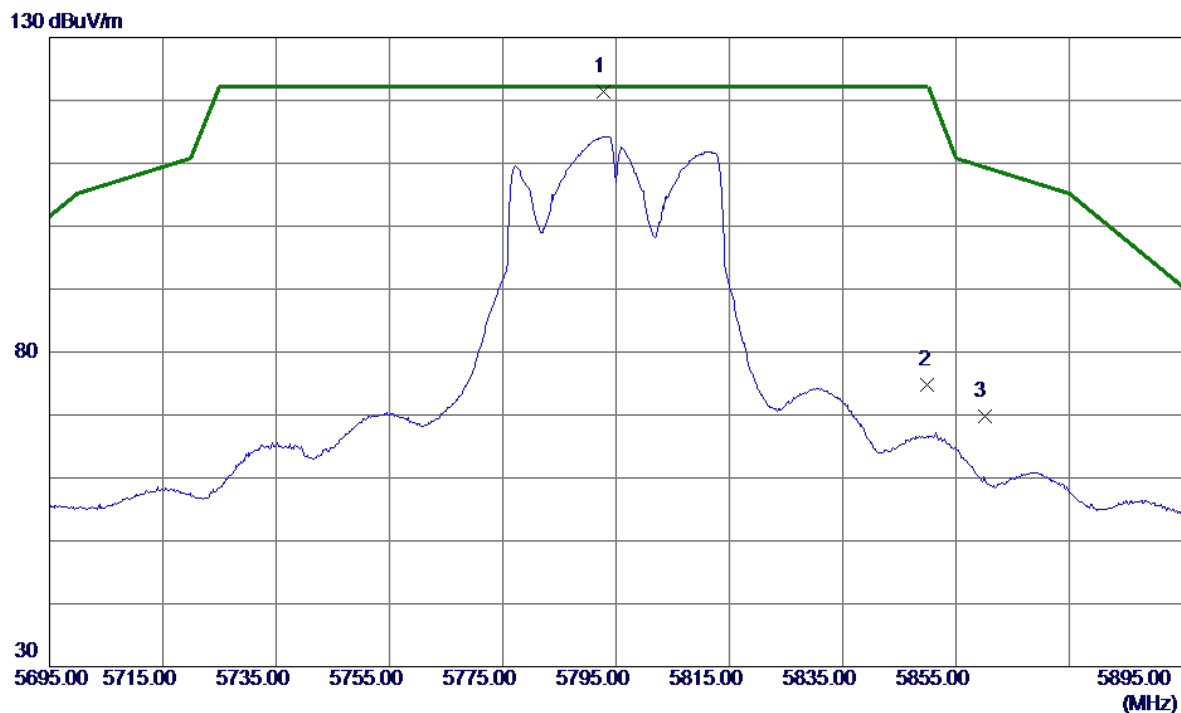


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5792.8000	105.91	15.49	121.40	122.20	-0.80	Peak	No Limit
2	5850.0000	59.20	15.64	74.84	122.20	-47.36	Peak	
3	5860.0000	54.17	15.66	69.83	109.40	-39.57	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

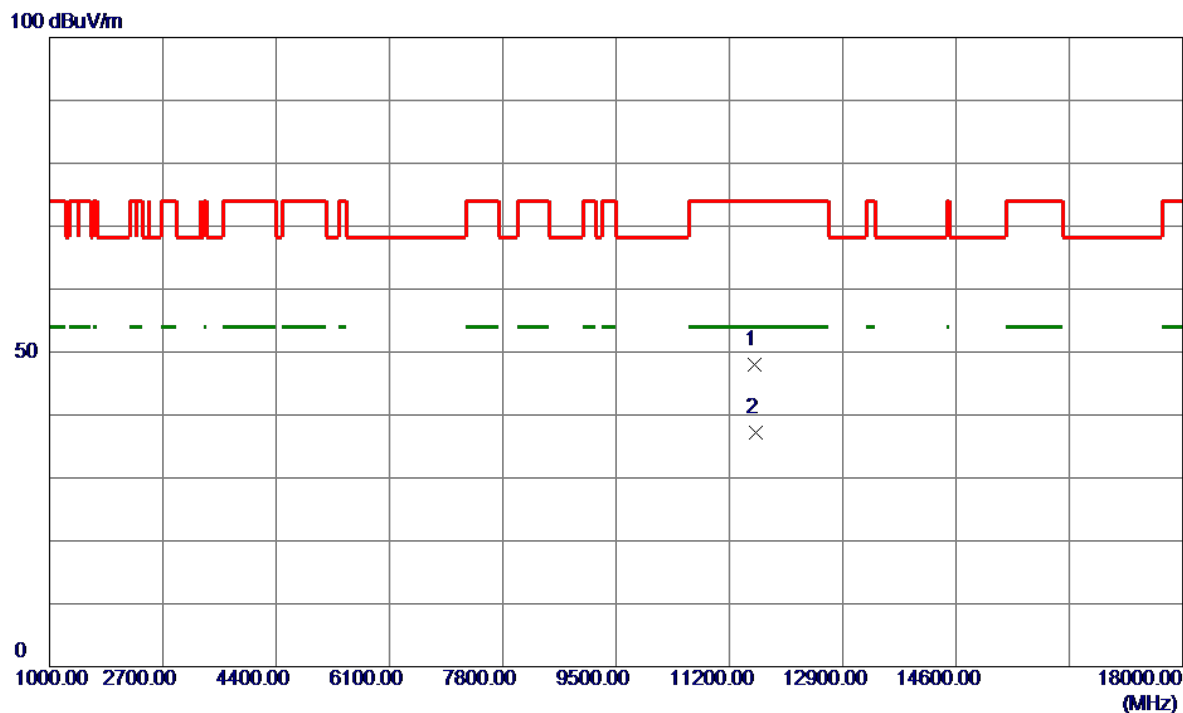


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11585.9800	37.35	10.57	47.92	74.00	-26.08	Peak	
2 *	11589.8600	26.71	10.58	37.29	54.00	-16.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

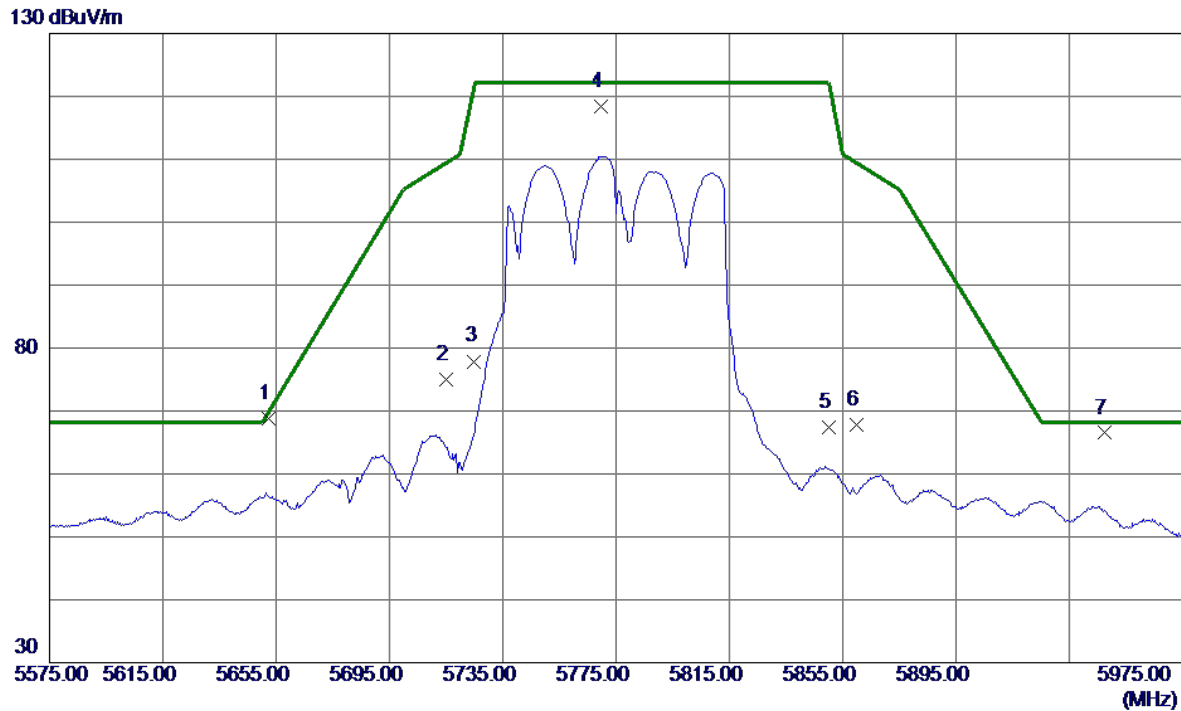


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5652.2000	53.66	15.14	68.80	69.83	-1.03	Peak	
2	5715.0000	59.70	15.30	75.00	109.40	-34.40	Peak	
3	5725.0000	62.58	15.32	77.90	122.20	-44.30	Peak	
4	5769.8000	102.99	15.44	118.43	122.20	-3.77	Peak	No Limit
5	5850.0000	51.83	15.64	67.47	122.20	-54.73	Peak	
6	5860.0000	52.08	15.66	67.74	109.40	-41.66	Peak	
7	5947.4000	50.61	15.89	66.50	68.20	-1.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

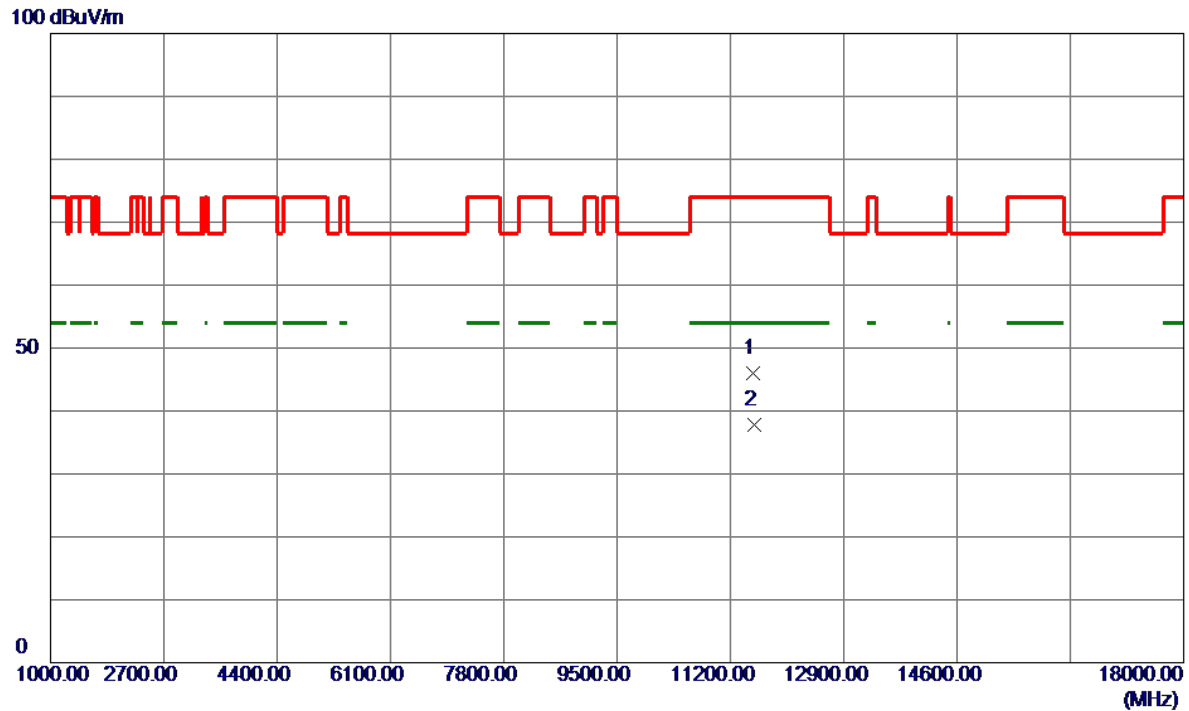


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11544.5000	35.53	10.56	46.09	74.00	-27.91	Peak	
2 *	11549.8800	27.20	10.56	37.76	54.00	-16.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

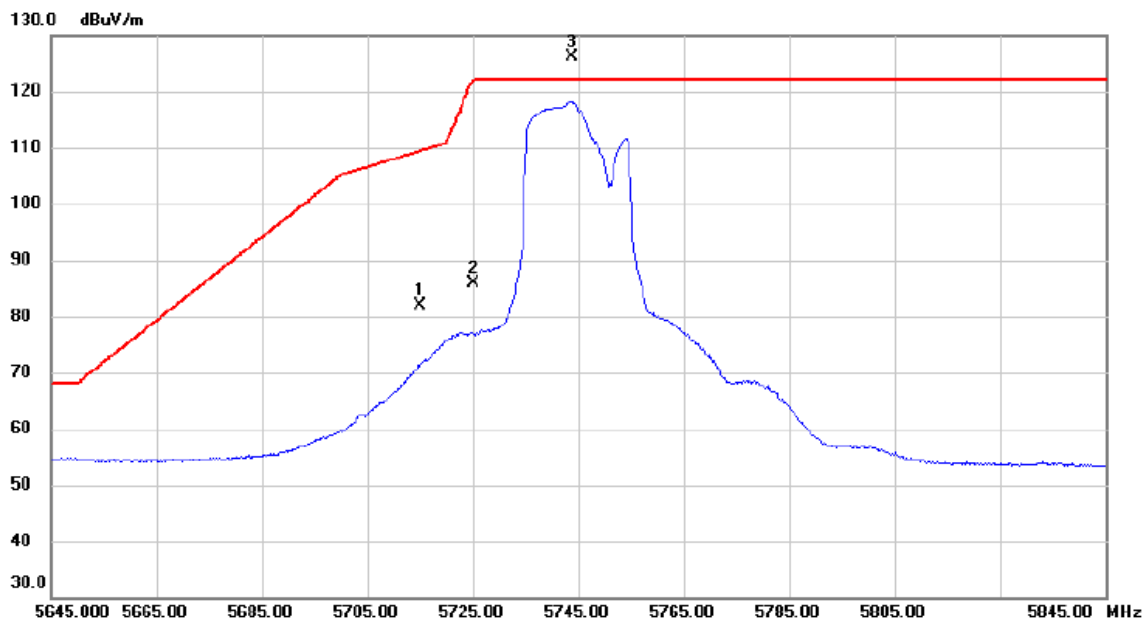


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	66.68	15.30	81.98	109.40	-27.42	peak	
2		5725.000	70.65	15.32	85.97	122.20	-36.23	peak	
3	*	5743.800	110.84	15.38	126.22	122.20	4.02	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

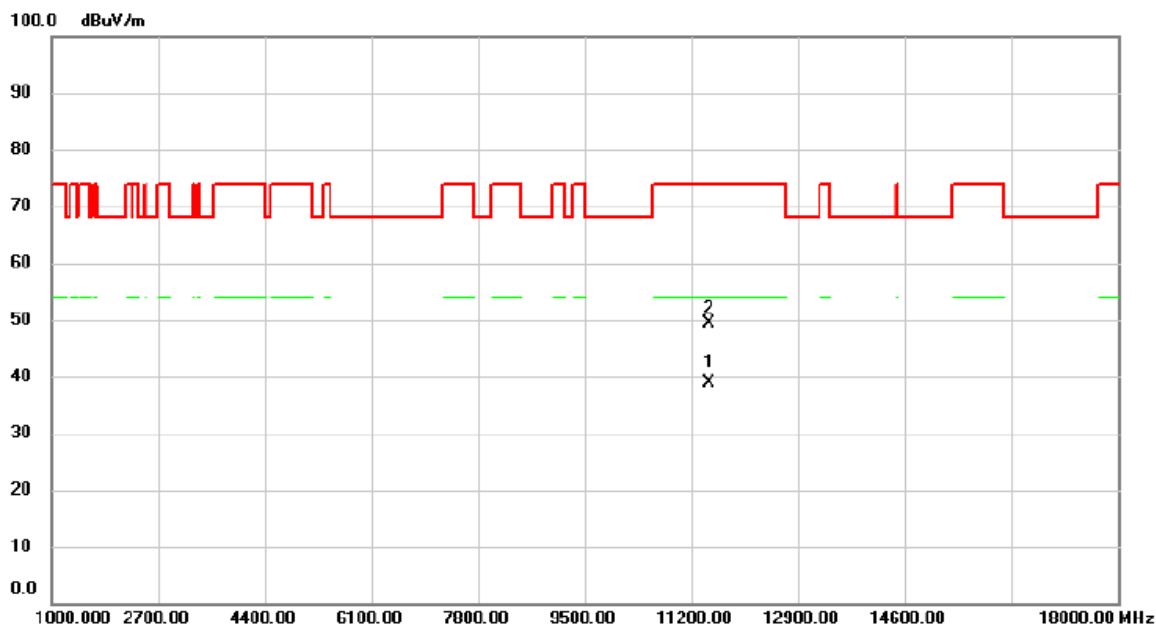


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11489.140	28.25	10.53	38.78	54.00	-15.22	AVG	
2		11490.900	38.74	10.54	49.28	74.00	-24.72	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

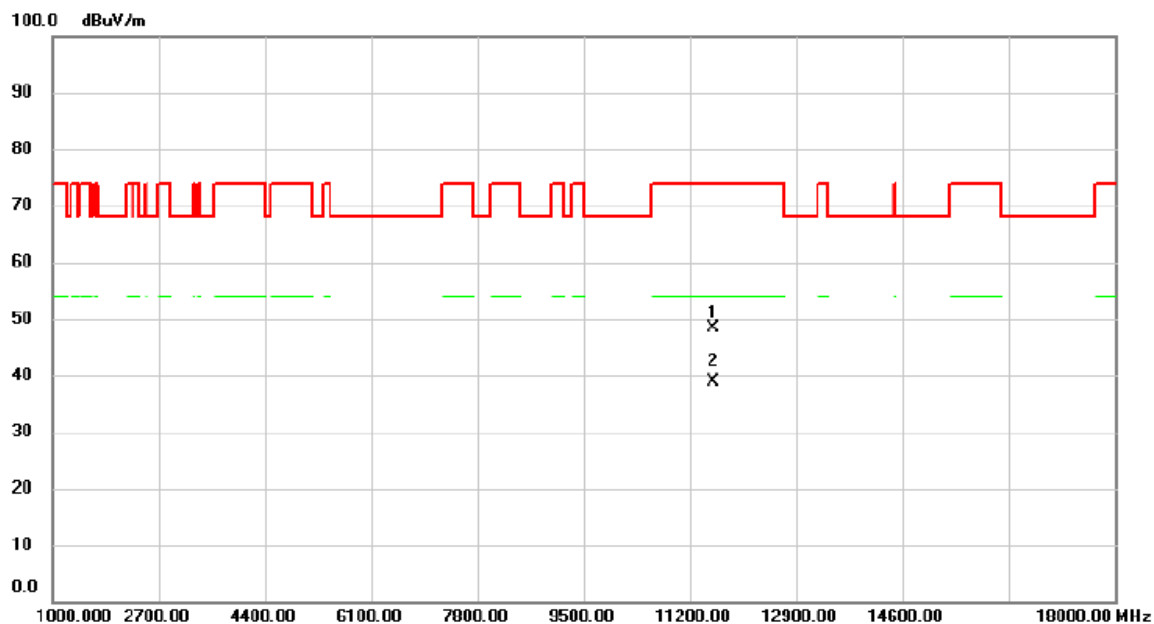


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11567.880	37.75	10.57	48.32	74.00	-25.68	peak	
2	*	11569.620	28.37	10.57	38.94	54.00	-15.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

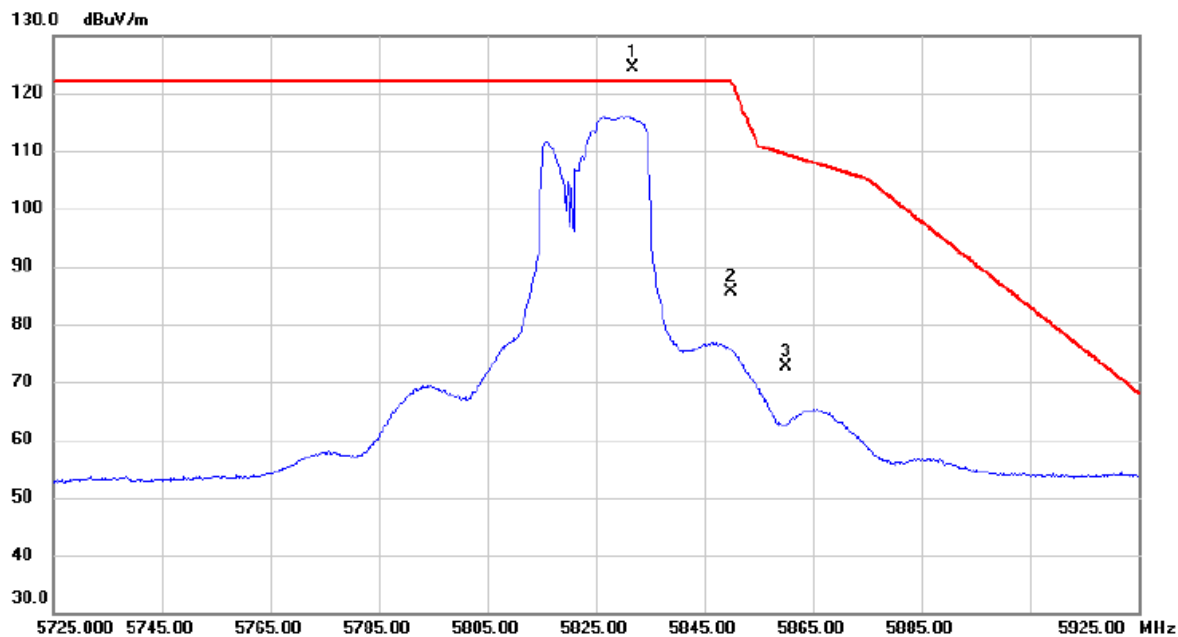


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5831.800	108.81	15.60	124.41	122.20	2.21	peak	No Limit
2		5850.000	69.93	15.65	85.58	122.20	-36.62	peak	
3		5860.000	56.96	15.66	72.62	109.40	-36.78	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

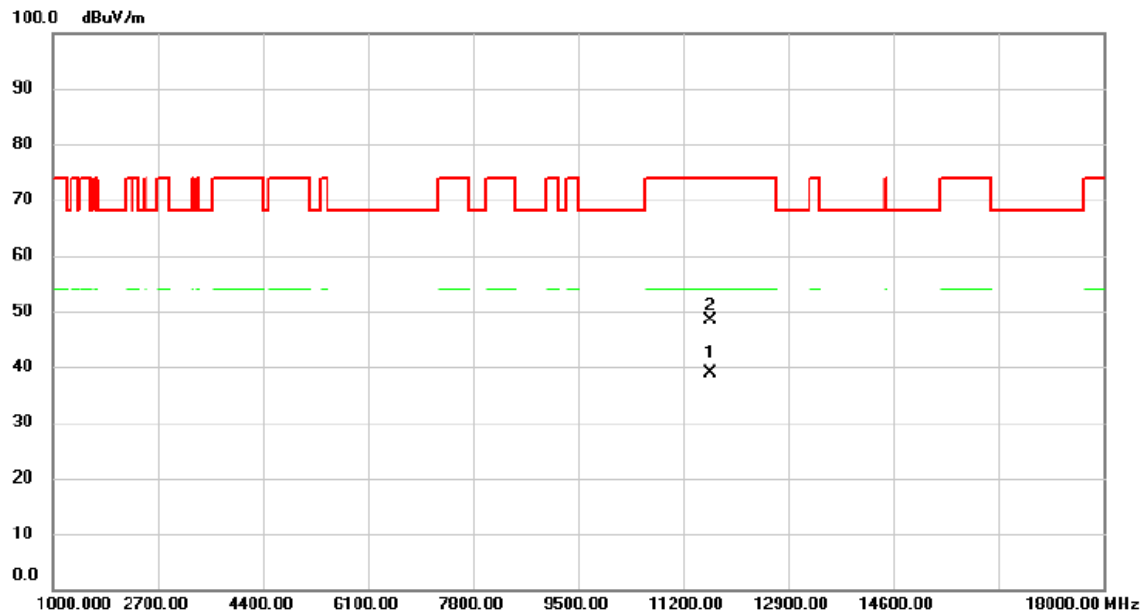


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11648.480	28.37	10.60	38.97	54.00	-15.03	AVG	
2		11649.400	37.72	10.60	48.32	74.00	-25.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

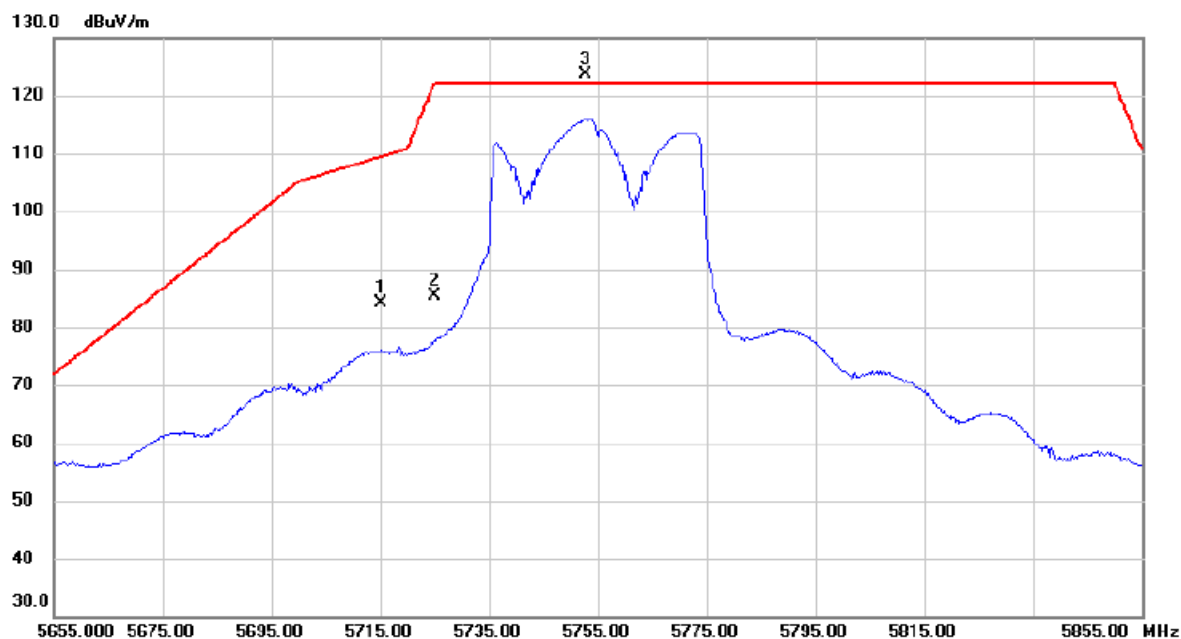


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	68.90	15.30	84.20	109.40	-25.20	peak	
2		5725.000	70.11	15.32	85.43	122.20	-36.77	peak	
3	*	5752.600	108.36	15.39	123.75	122.20	1.55	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

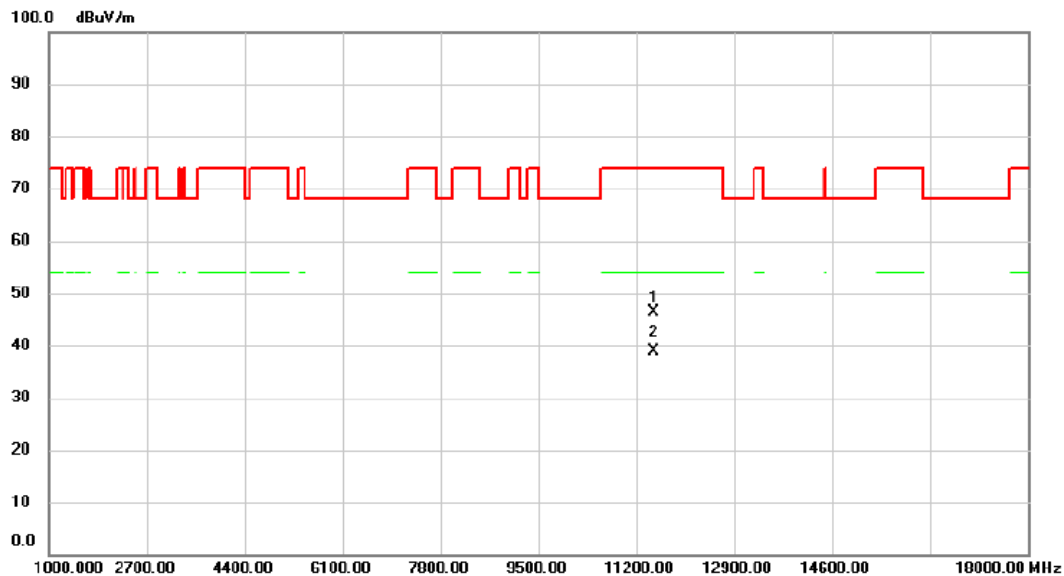


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11503.780	35.79	10.54	46.33	74.00	-27.67	peak	
2	*	11509.740	28.32	10.54	38.86	54.00	-15.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

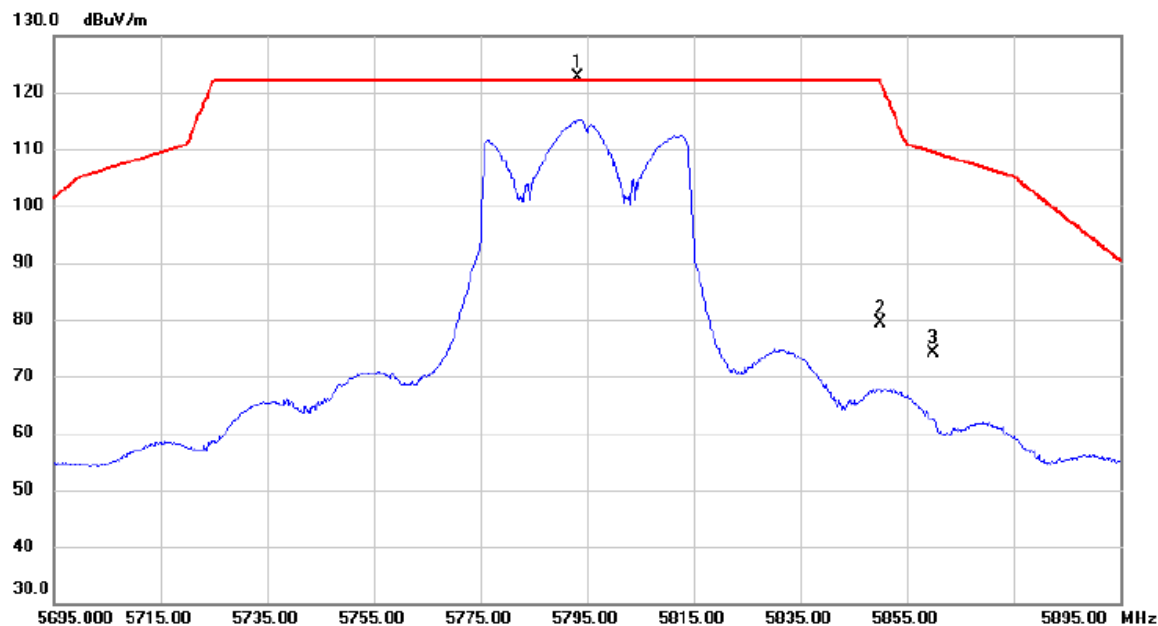


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5793.400	107.11	15.49	122.60	122.20	0.40	peak	No Limit
2		5850.000	63.69	15.65	79.34	122.20	-42.86	peak	
3		5860.000	58.51	15.66	74.17	109.40	-35.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

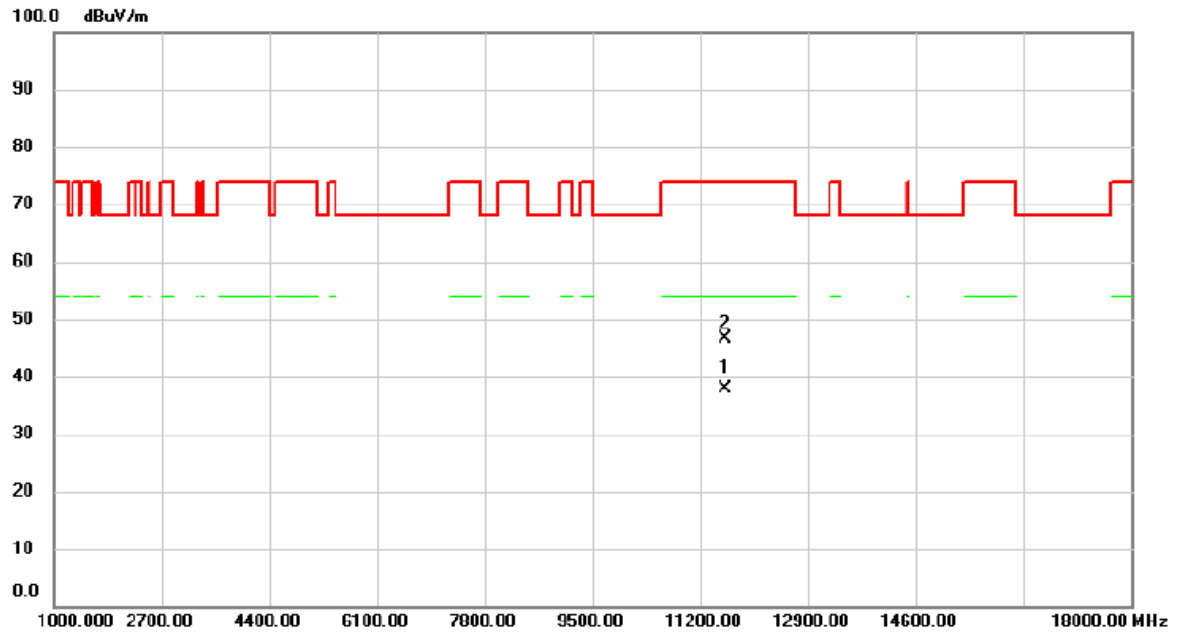


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11588.280	27.21	10.57	37.78	54.00	-16.22	AVG	
2		11597.840	36.15	10.57	46.72	74.00	-27.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

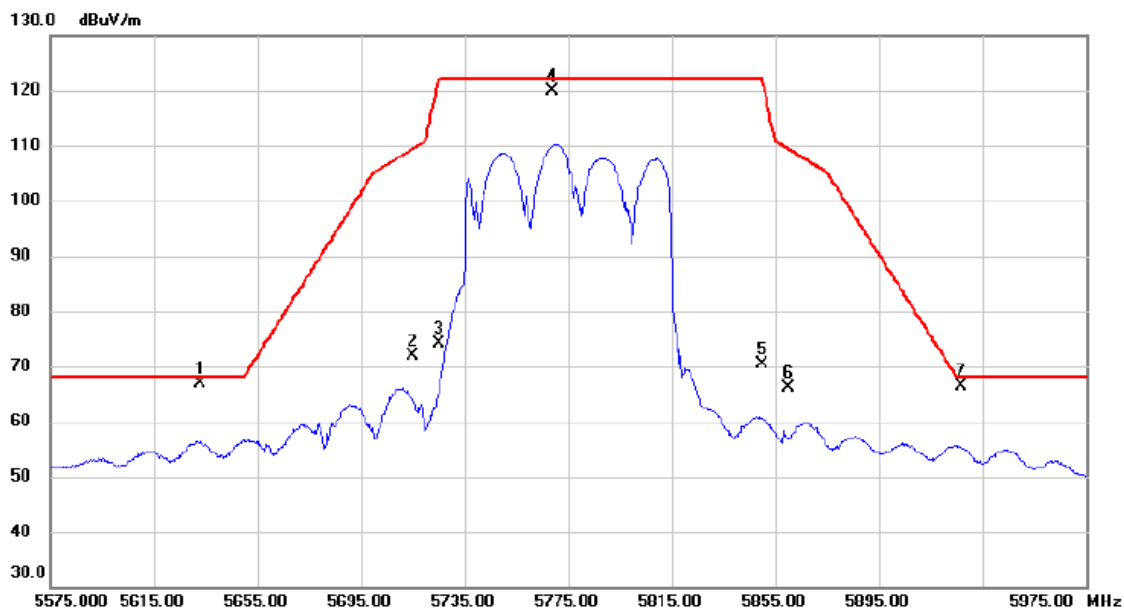


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5632.600	51.71	15.08	66.79	68.20	-1.41	peak	
2		5715.000	56.61	15.30	71.91	109.40	-37.49	peak	
3		5725.000	58.77	15.32	74.09	122.20	-48.11	peak	
4		5769.000	104.50	15.43	119.93	122.20	-2.27	peak	No Limit
5		5850.000	54.64	15.65	70.29	122.20	-51.91	peak	
6		5860.000	50.38	15.66	66.04	109.40	-43.36	peak	
7		5926.600	50.45	15.83	66.28	68.20	-1.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

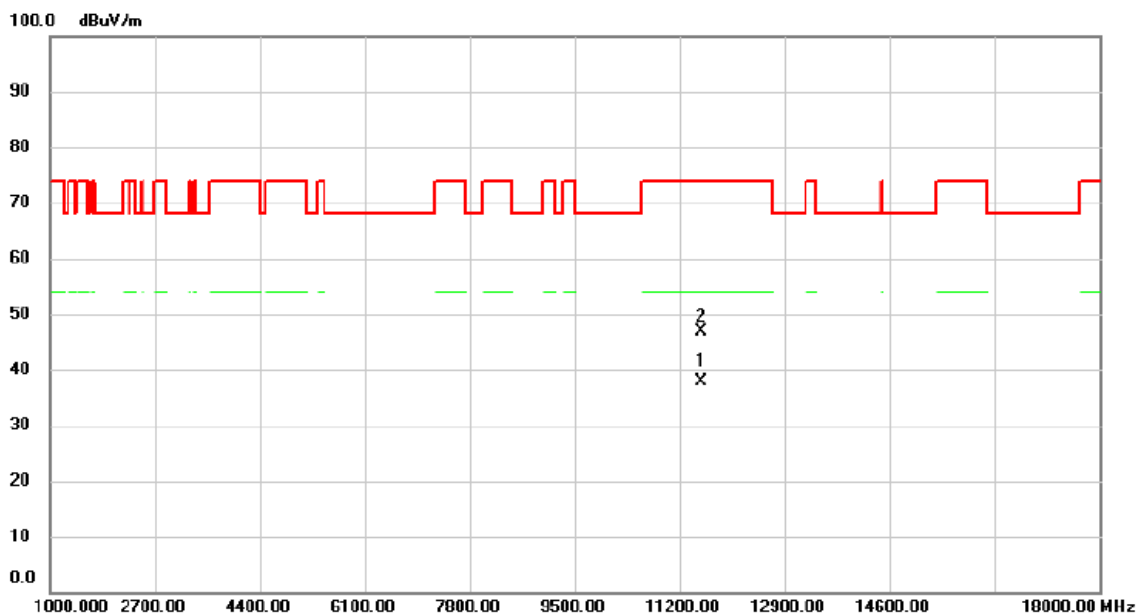


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11549.900	27.35	10.56	37.91	54.00	-16.09	AVG	
2		11550.180	36.30	10.56	46.86	74.00	-27.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

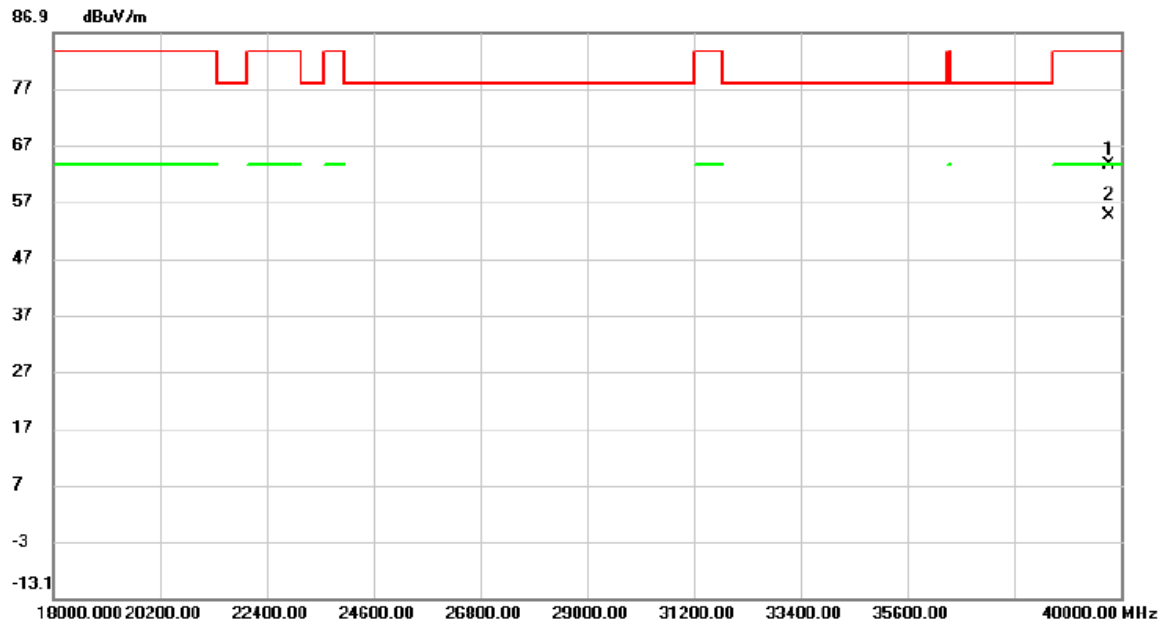


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39758.000	48.48	14.94	63.42	83.50	-20.08	peak	
2	*	39758.000	39.68	14.94	54.62	63.50	-8.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX BE(EHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

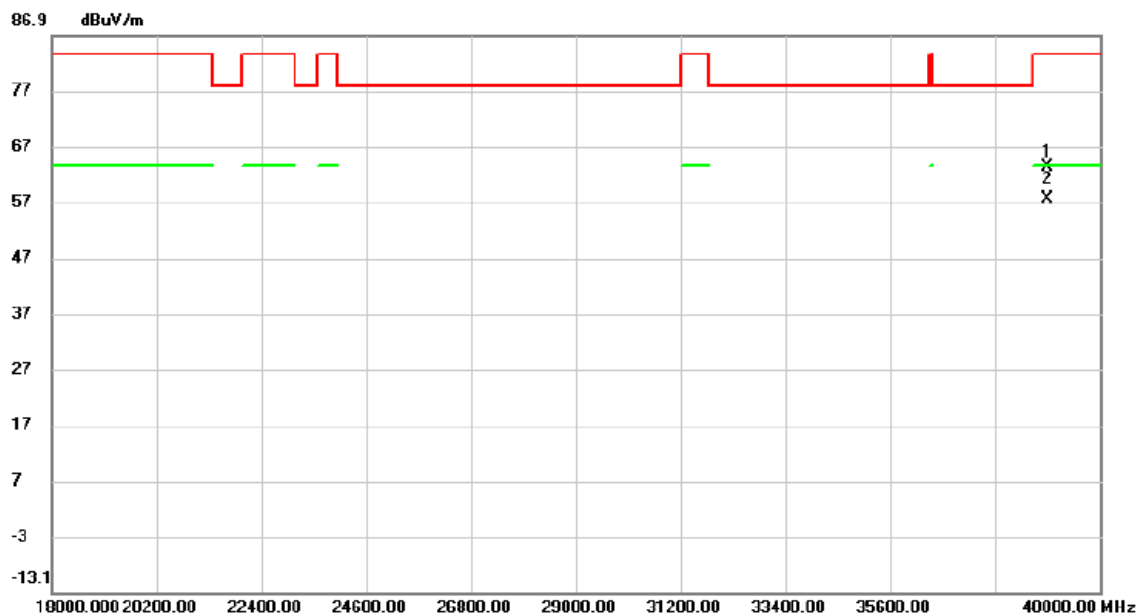


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		38900.000	49.14	14.20	63.34	83.50	-20.16	peak	
2	*	38900.000	43.28	14.20	57.48	63.50	-6.02	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

Straddle Channel:

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

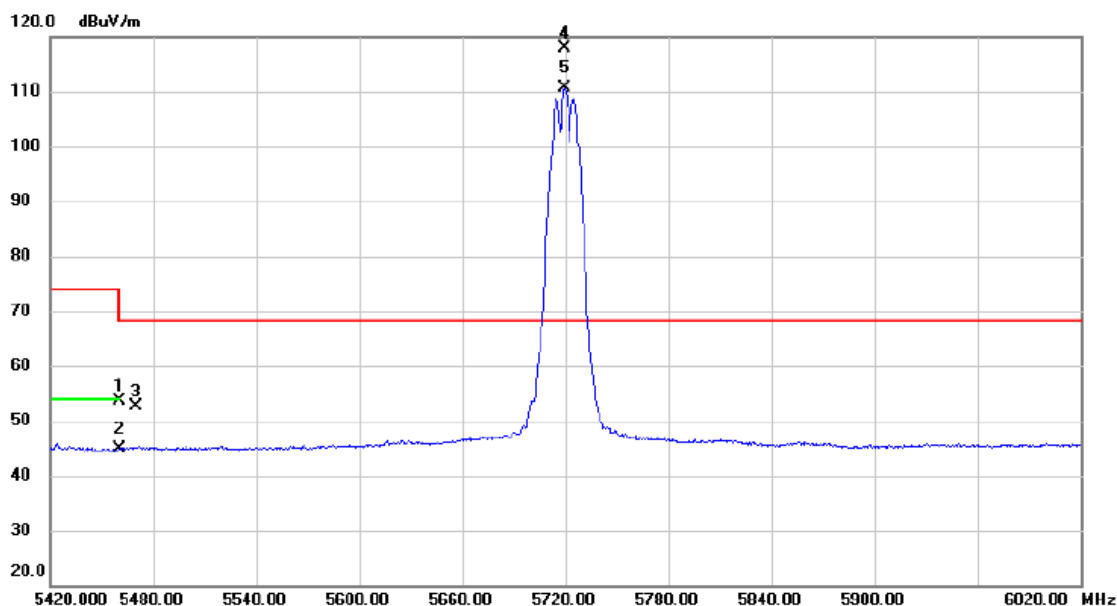


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.000	38.95	14.71	53.66	74.00	-20.34	peak	
2	5460.000	30.25	14.71	44.96	54.00	-9.04	AVG	
3	5470.000	38.00	14.73	52.73	68.20	-15.47	peak	
4 *	5719.400	102.49	15.30	117.79	68.20	49.59	peak	No Limit
5 X	5719.400	95.29	15.30	110.59	68.20	42.39	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5720 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

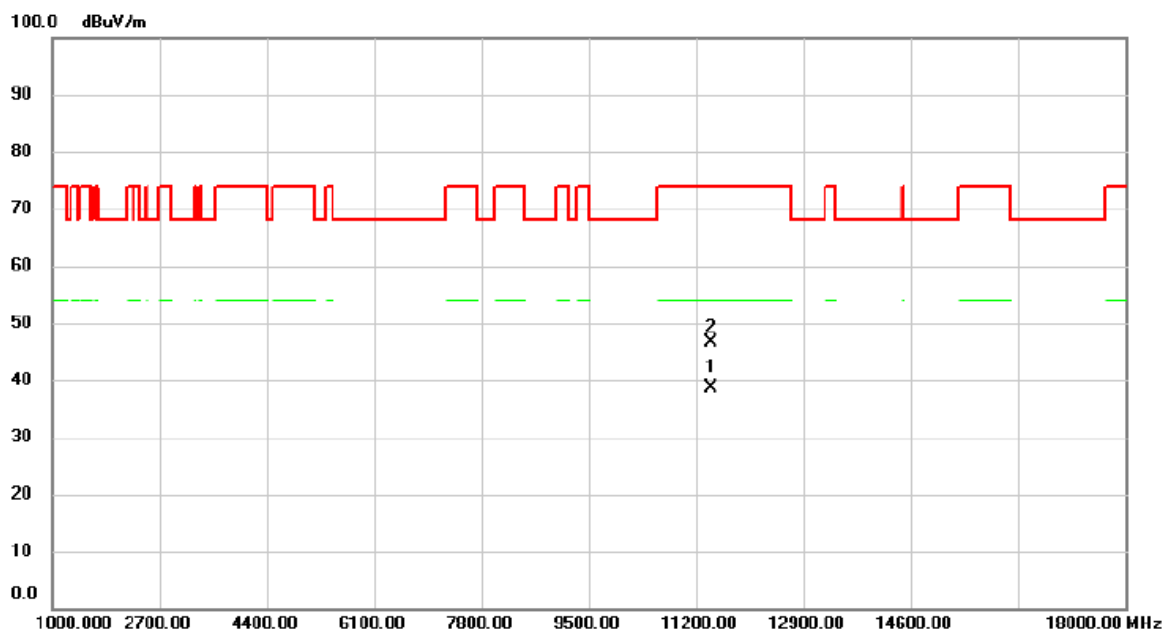


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11439.800	28.23	10.49	38.72	54.00	-15.28	AVG	
2		11446.000	36.23	10.49	46.72	74.00	-27.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

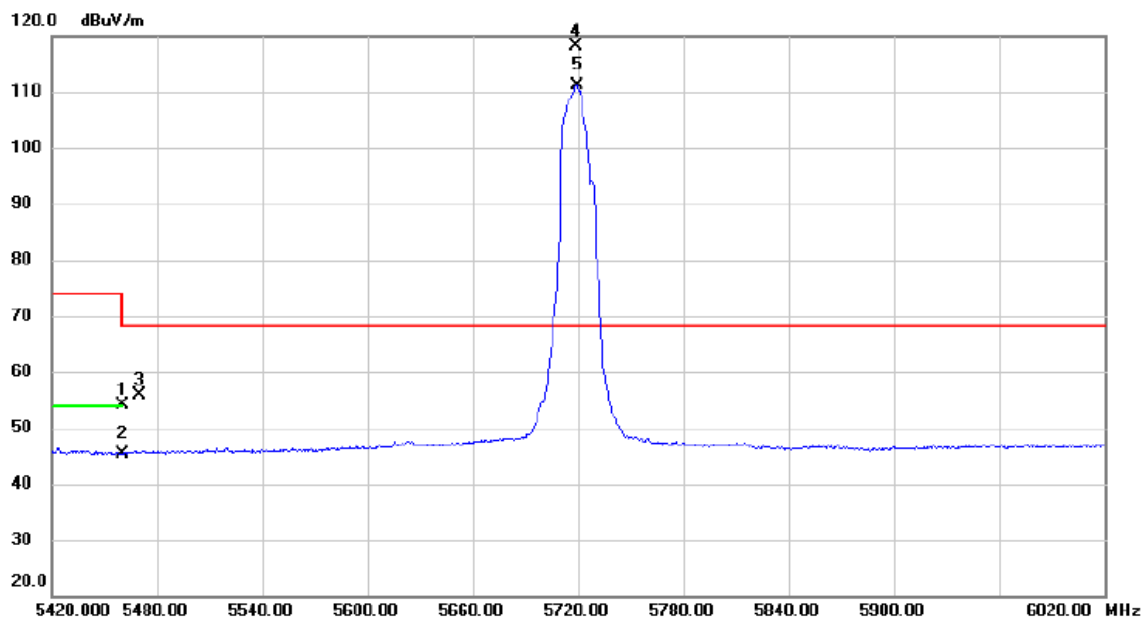


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	39.40	14.71	54.11	74.00	-19.89	peak	
2		5460.000	30.79	14.71	45.50	54.00	-8.50	AVG	
3		5470.000	41.14	14.73	55.87	68.20	-12.33	peak	
4	*	5718.800	102.90	15.30	118.20	68.20	50.00	peak	No Limit
5	X	5719.400	95.83	15.30	111.13	68.20	42.93	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

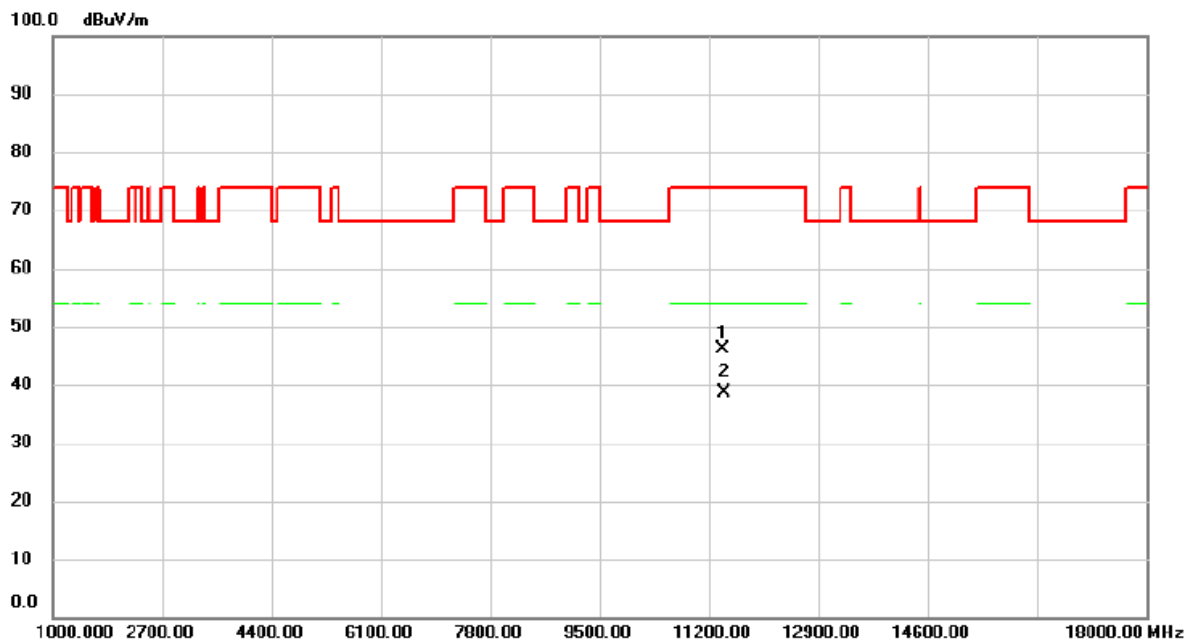


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11423.300	35.67	10.49	46.16	74.00	-27.84	peak	
2	*	11439.800	28.15	10.49	38.64	54.00	-15.36	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

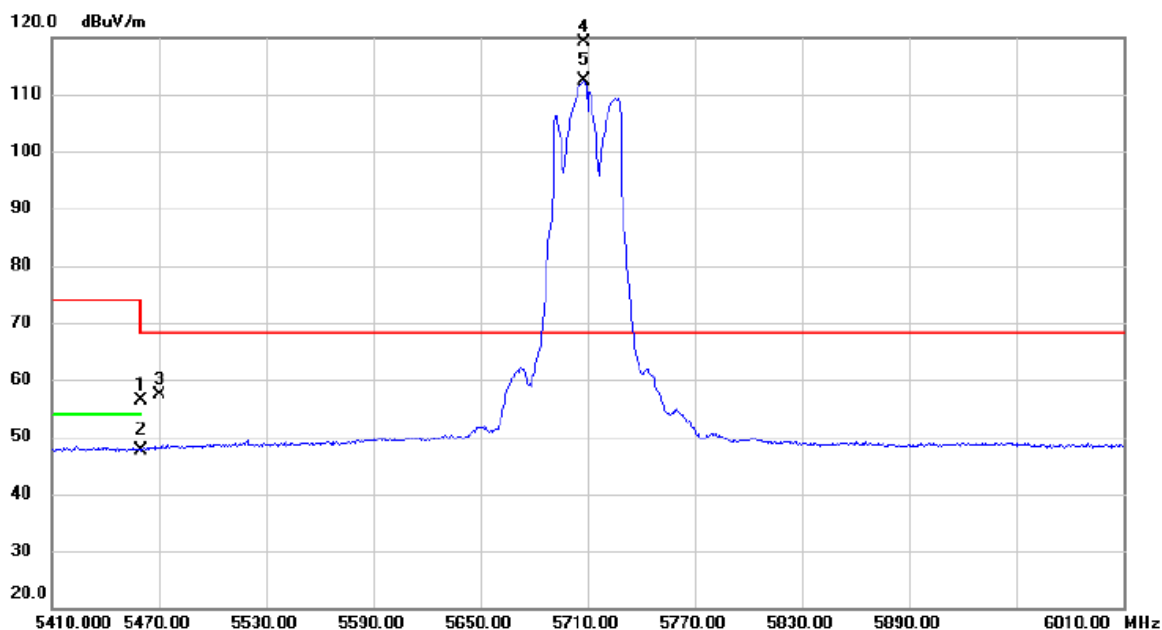


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	41.67	14.71	56.38	74.00	-17.62	peak	
2		5460.000	33.01	14.71	47.72	54.00	-6.28	AVG	
3		5470.000	42.69	14.73	57.42	68.20	-10.78	peak	
4	*	5708.200	103.86	15.28	119.14	68.20	50.94	peak	No Limit
5	X	5708.200	97.03	15.28	112.31	68.20	44.11	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

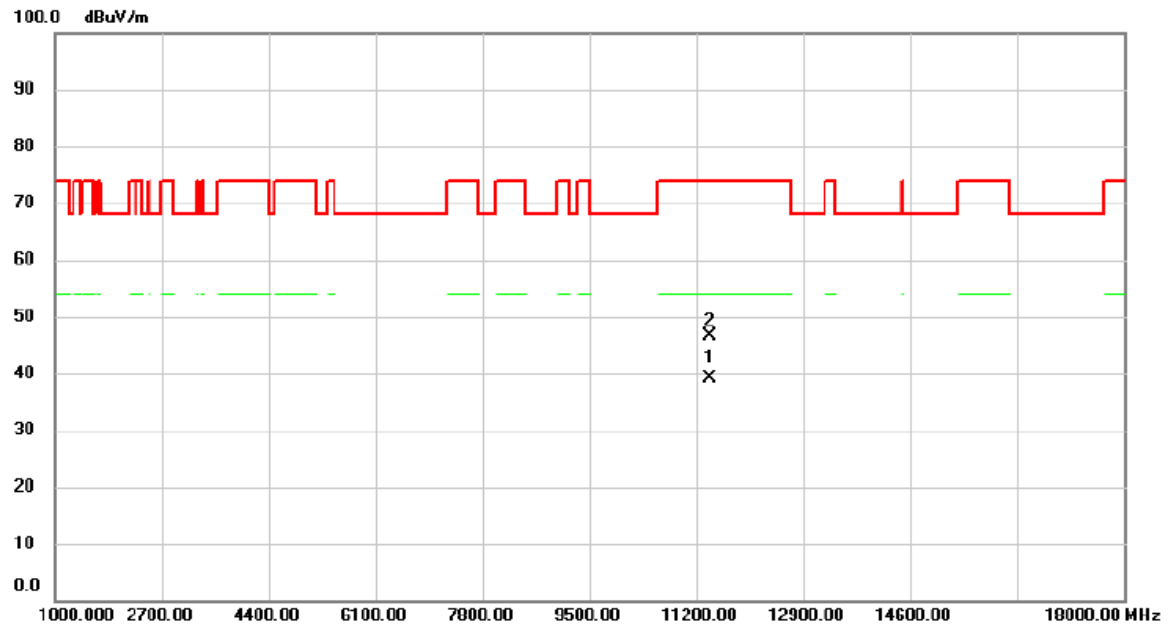


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11419.850	28.59	10.48	39.07	54.00	-14.93	AVG	
2		11420.000	36.22	10.48	46.70	74.00	-27.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

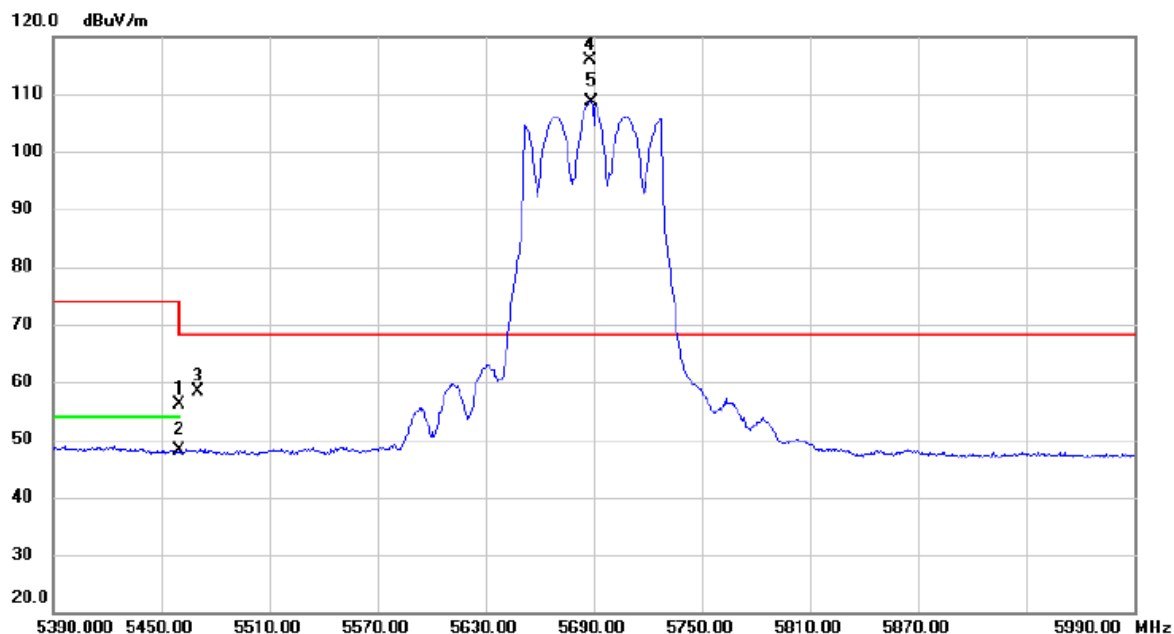


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	41.36	14.71	56.07	74.00	-17.93	peak	
2		5460.000	33.31	14.71	48.02	54.00	-5.98	AVG	
3		5470.000	43.58	14.73	58.31	68.20	-9.89	peak	
4	*	5687.600	100.73	15.23	115.96	68.20	47.76	peak	No Limit
5	X	5688.800	93.48	15.23	108.71	68.20	40.51	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

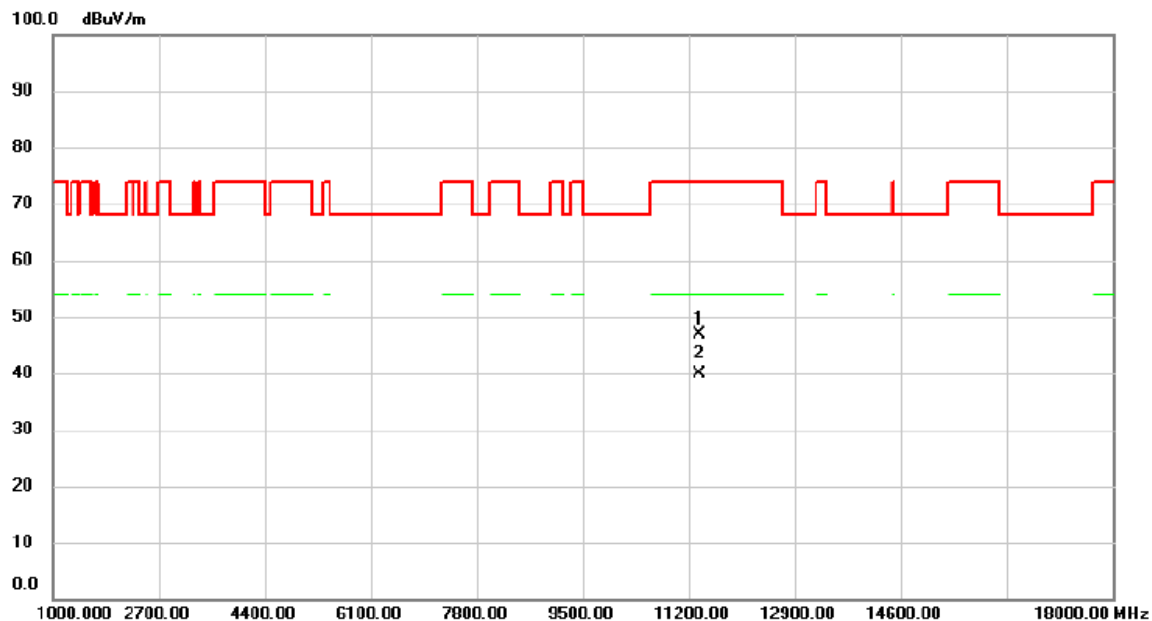


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11378.450	36.46	10.45	46.91	74.00	-27.09	peak	
2	*	11379.800	29.52	10.45	39.97	54.00	-14.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

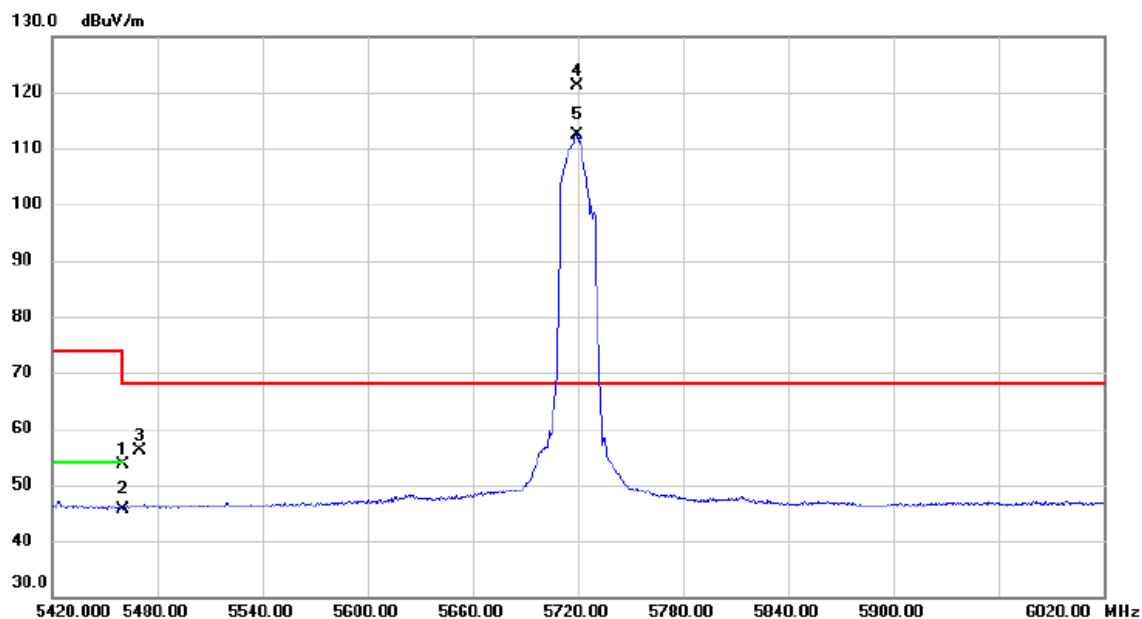


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	38.80	14.71	53.51	74.00	-20.49	peak	
2		5460.000	31.04	14.71	45.75	54.00	-8.25	AVG	
3		5470.000	41.31	14.73	56.04	68.20	-12.16	peak	
4	*	5719.400	105.89	15.30	121.19	68.20	52.99	peak	No Limit
5	X	5719.400	97.14	15.30	112.44	68.20	44.24	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT20) Mode 5720 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

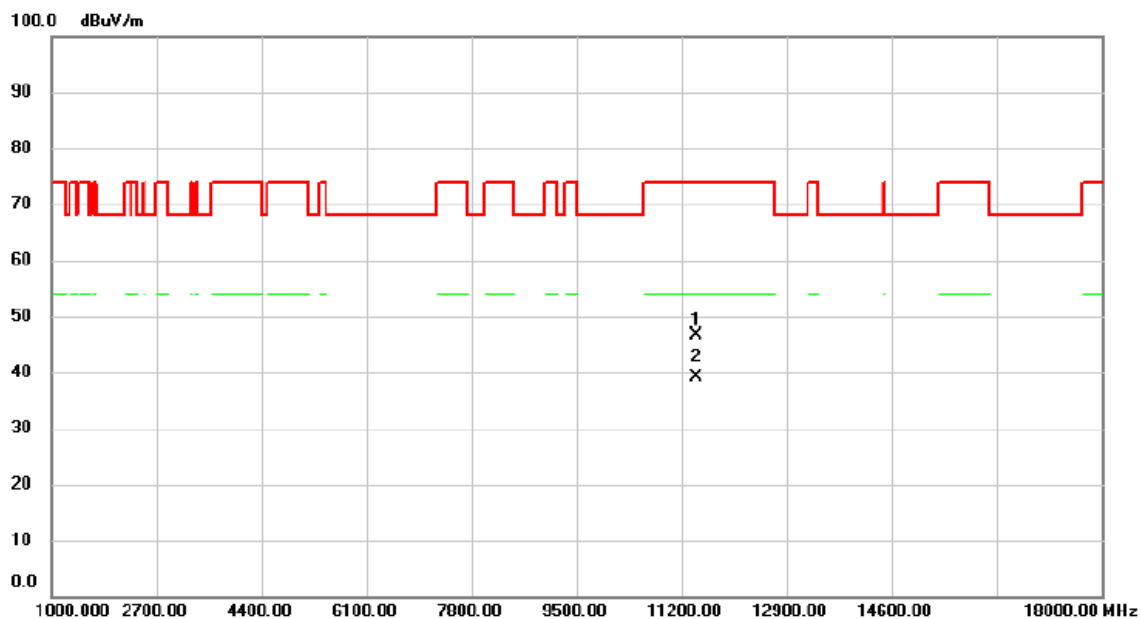


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11432.950	36.11	10.49	46.60	74.00	-27.40	peak	
2	*	11439.850	28.73	10.49	39.22	54.00	-14.78	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

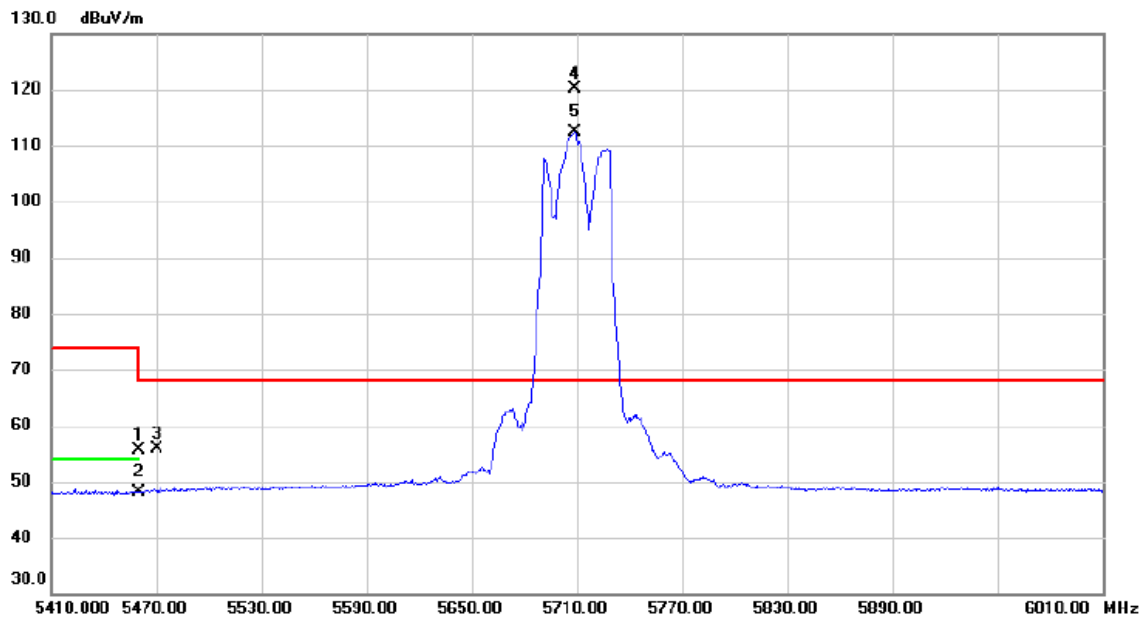


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	41.03	14.71	55.74	74.00	-18.26	peak	
2		5460.000	33.36	14.71	48.07	54.00	-5.93	AVG	
3		5470.000	41.24	14.73	55.97	68.20	-12.23	peak	
4	*	5708.800	104.77	15.29	120.06	68.20	51.86	peak	No Limit
5	X	5708.800	97.09	15.29	112.38	68.20	44.18	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT40) Mode 5710 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

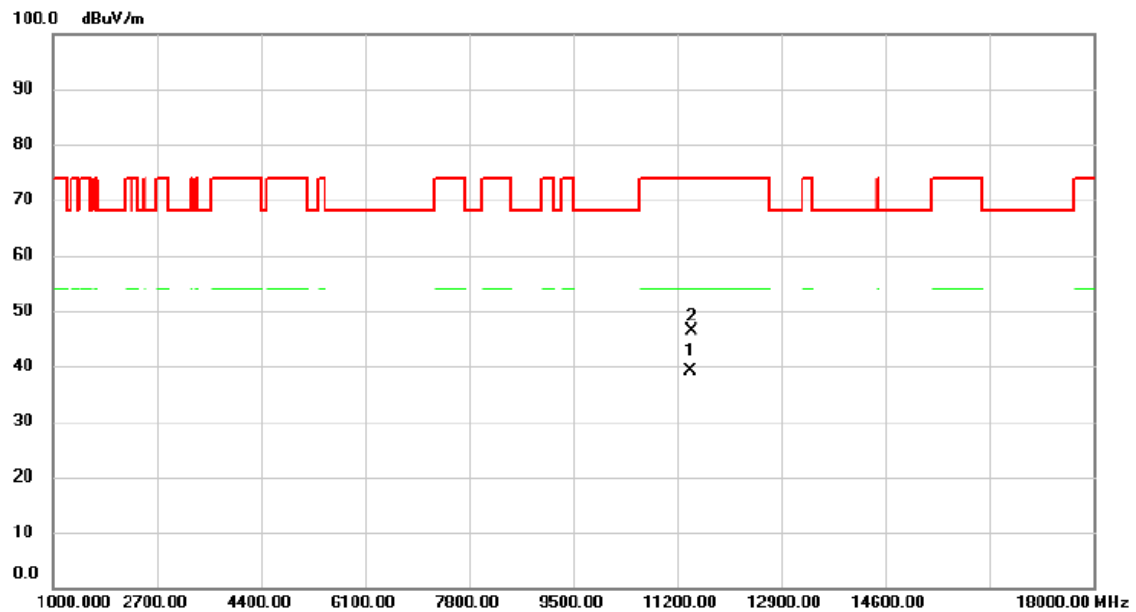


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11419.850	28.76	10.48	39.24	54.00	-14.76	AVG	
2		11443.350	35.87	10.50	46.37	74.00	-27.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

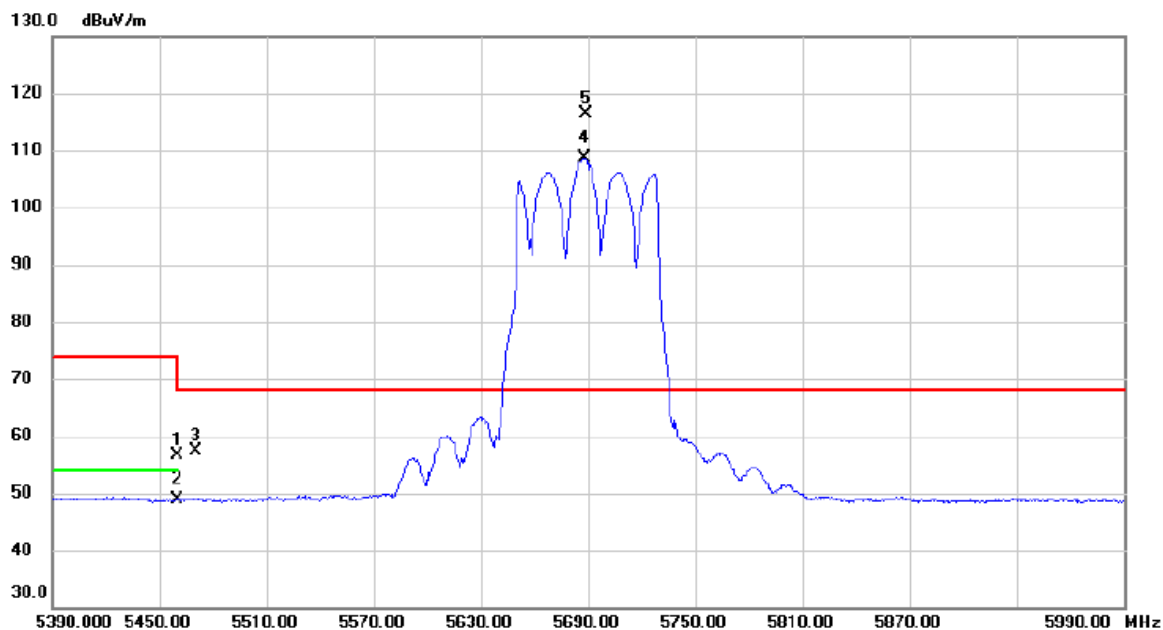


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	41.89	14.71	56.60	74.00	-17.40	peak	
2		5460.000	34.12	14.71	48.83	54.00	-5.17	AVG	
3		5470.000	42.64	14.73	57.37	68.20	-10.83	peak	
4	X	5687.600	93.46	15.23	108.69	68.20	40.49	AVG	No Limit
5	*	5688.800	101.27	15.23	116.50	68.20	48.30	peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX BE(EHT80) Mode 5690 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

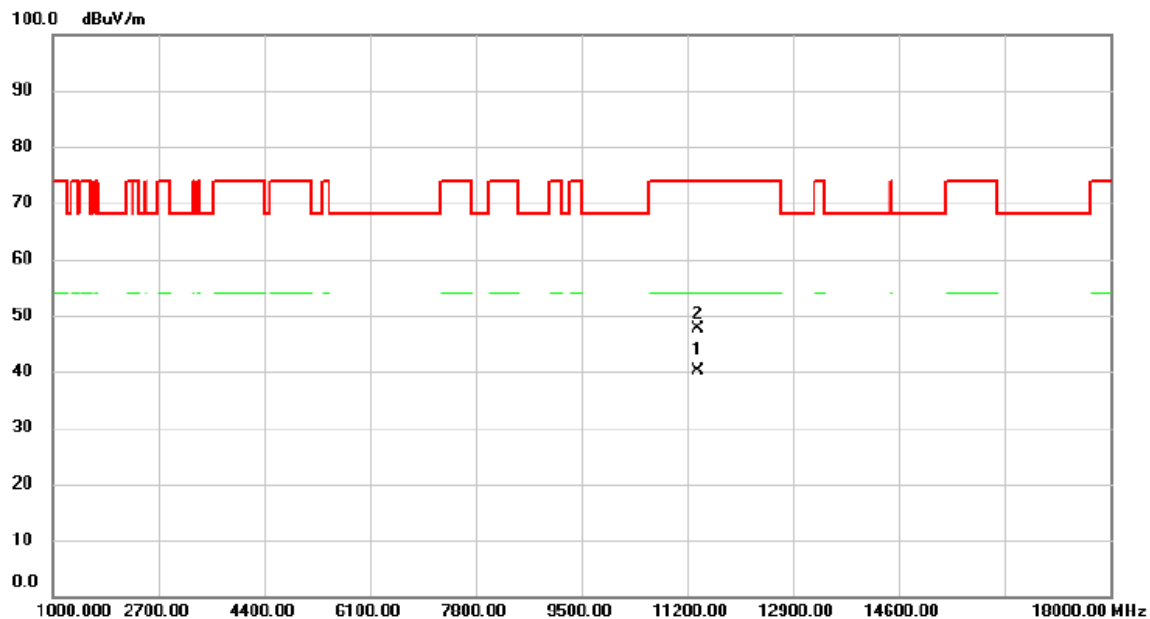

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11379.750	29.80	10.45	40.25	54.00	-13.75	AVG	
2		11379.800	37.19	10.45	47.64	74.00	-26.36	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	23.590	18.100
40	5200	23.550	18.100
48	5240	23.390	18.100

CH36

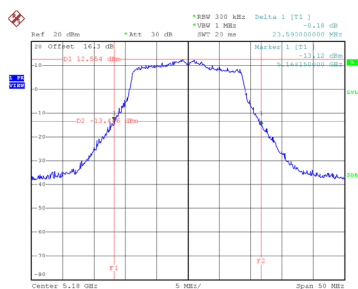


Date: 25.FEB.2025 14:03:46

CH40
26 dB Bandwidth

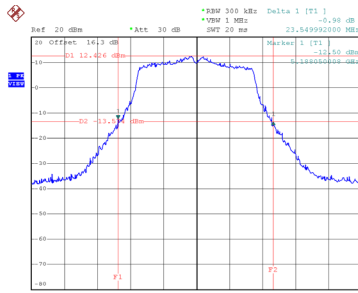


Date: 25.FEB.2025 14:04:49

CH48

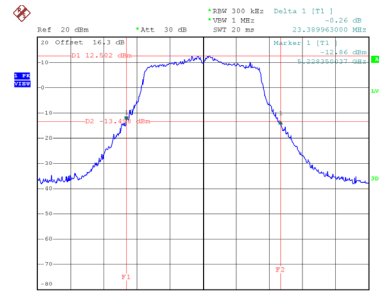


Date: 25.FEB.2025 14:05:58


99 % Occupied Bandwidth

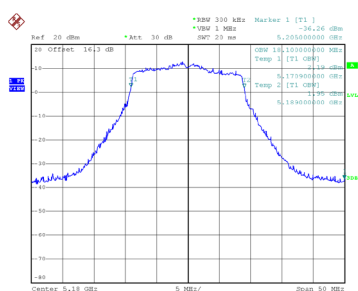

Date: 25.FEB.2025 14:03:13

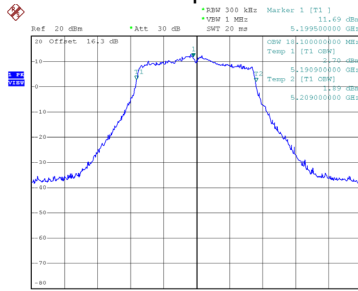

Date: 25.FEB.2025 14:04:18

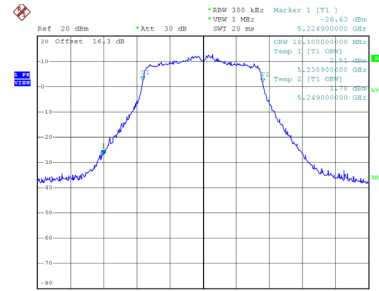


Date: 25.FEB.2025 14:05:25

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	44.700	37.800
46	5230	44.200	38.000

CH38

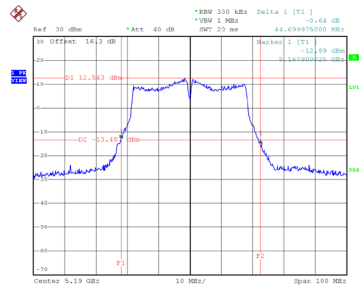


Date: 25.FEB.2025 14:44:35

CH46
26 dB Bandwidth

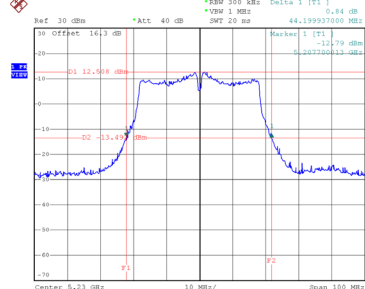


Date: 25.FEB.2025 14:47:29

99 % Occupied Bandwidth

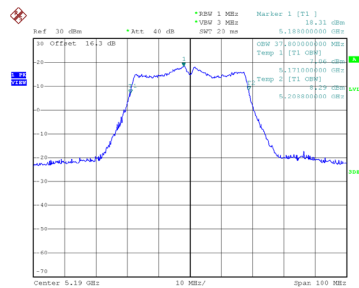

Date: 25.FEB.2025 14:45:59

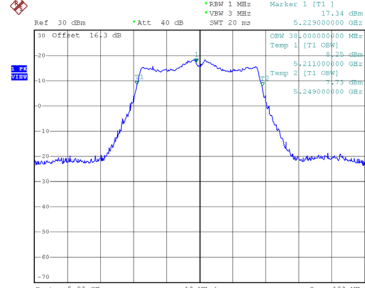


Date: 25.FEB.2025 14:46:53

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	94.200	77.600

CH42 26 dB Bandwidth

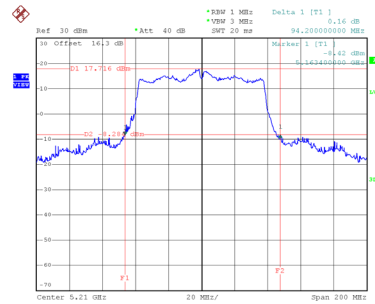

Date: 25.FEB.2025 17:01:36

99 % Occupied Bandwidth

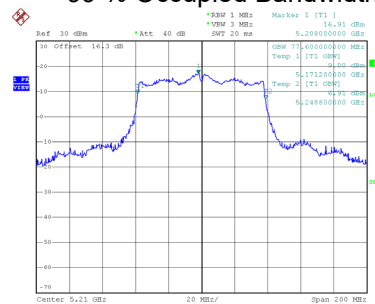


Date: 25.FEB.2025 17:00:52

Test Mode	UNII-1_TX BE(EHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	23.450	19.100
40	5200	22.688	19.100
48	5240	22.949	19.100

CH36

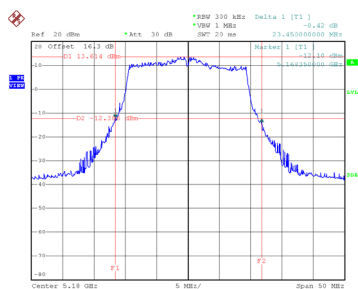


Date: 25.FEB.2025 14:15:15

CH40
26 dB Bandwidth

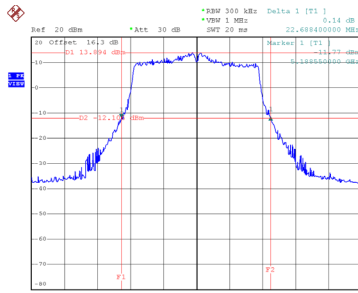


Date: 25.FEB.2025 14:16:36

CH48

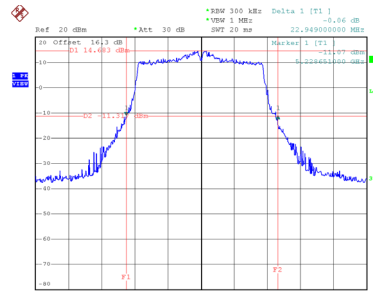


Date: 25.FEB.2025 14:17:44


99 % Occupied Bandwidth

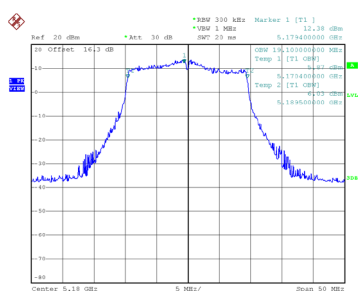

Date: 25.FEB.2025 14:14:44

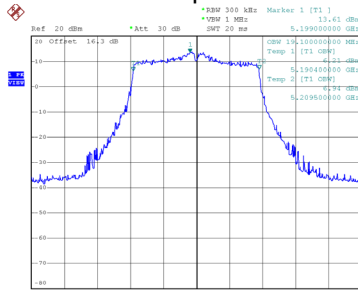

Date: 25.FEB.2025 14:16:04

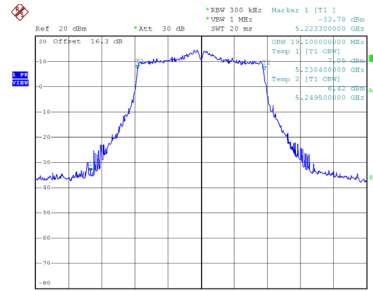


Date: 25.FEB.2025 14:17:13

Test Mode	UNII-1_TX BE(EHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	44.100	38.800
46	5230	43.799	38.800

CH38

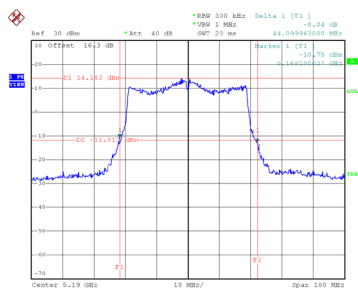


Date: 25.FEB.2025 14:59:44

CH46
26 dB Bandwidth

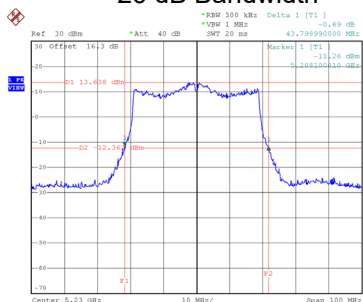


Date: 25.FEB.2025 15:01:11

99 % Occupied Bandwidth

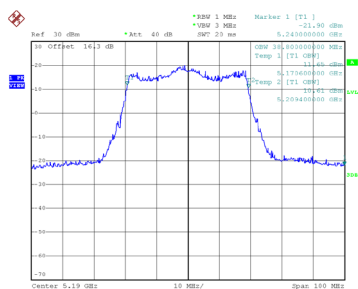

Date: 25.FEB.2025 14:59:07

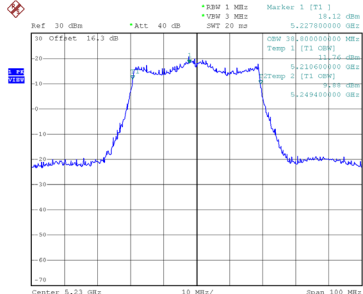


Date: 25.FEB.2025 15:00:36

Test Mode	UNII-1_TX BE(EHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	92.600	78.400

CH42 26 dB Bandwidth

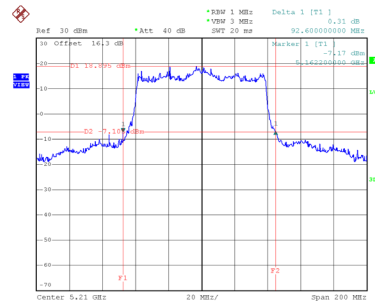

Date: 25.FEB.2025 17:30:03

99 % Occupied Bandwidth

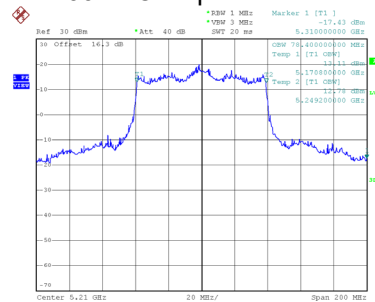


Date: 25.FEB.2025 17:29:21

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.849	17.200
60	5300	22.898	17.200
64	5320	23.050	17.200

CH52

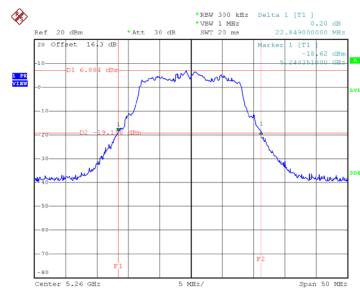


Date: 25.FEB.2025 13:26:57

CH60
26 dB Bandwidth

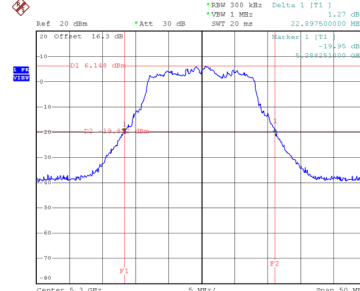


Date: 25.FEB.2025 13:45:42

CH64

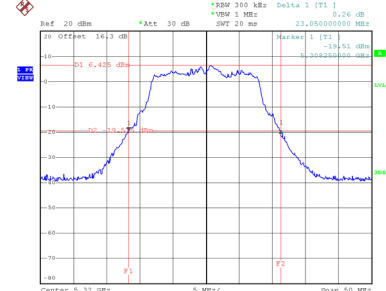


Date: 25.FEB.2025 13:49:17


99 % Occupied Bandwidth

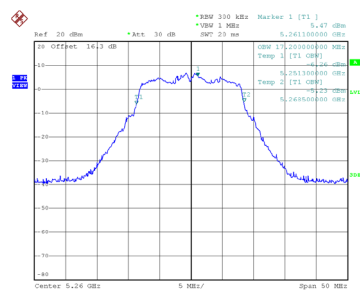

Date: 25.FEB.2025 13:26:23

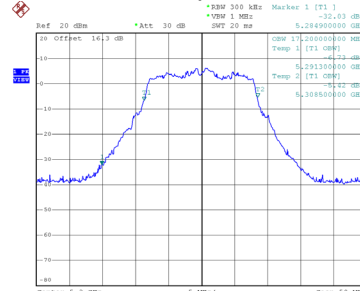

Date: 25.FEB.2025 13:45:06

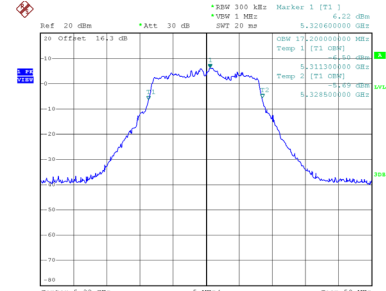


Date: 25.FEB.2025 13:48:43

Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	23.250	18.000
60	5300	23.400	18.100
64	5320	23.389	18.200

CH52

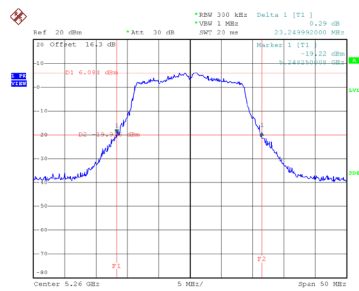


Date: 25.FEB.2025 14:06:55

CH60
26 dB Bandwidth

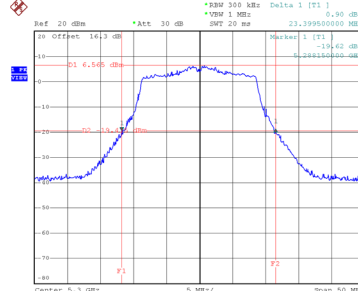


Date: 25.FEB.2025 14:07:52

CH64

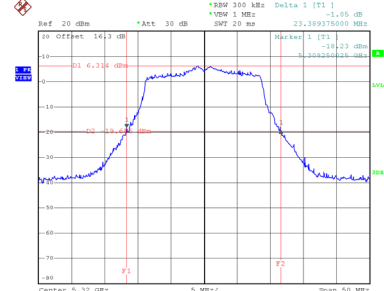


Date: 25.FEB.2025 14:08:45


99 % Occupied Bandwidth

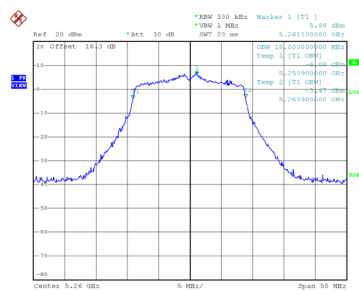

Date: 25.FEB.2025 14:06:23

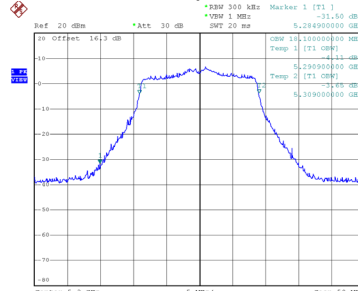

Date: 25.FEB.2025 14:07:20

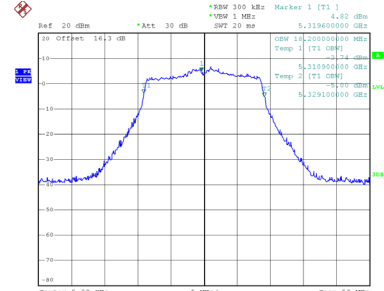


Date: 25.FEB.2025 14:08:13

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	44.900	38.200
62	5310	44.200	38.000

CH54

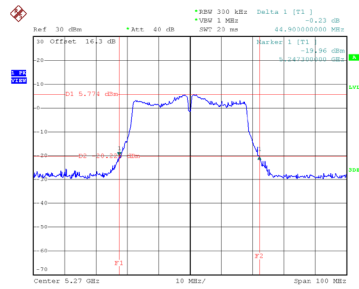


Date: 25.FEB.2025 14:49:36

CH62 26 dB Bandwidth

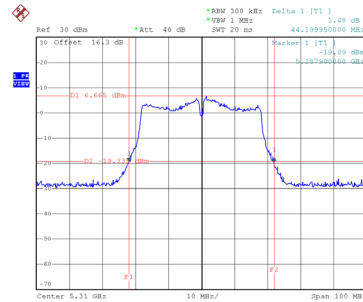


Date: 25.FEB.2025 14:50:31

99 % Occupied Bandwidth

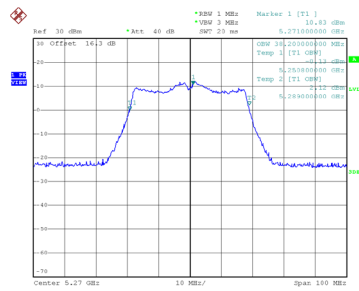

Date: 25.FEB.2025 14:49:02

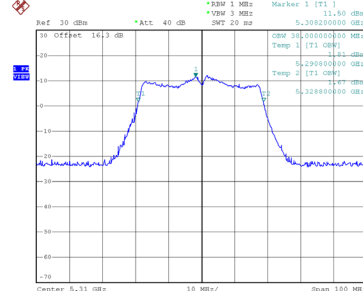


Date: 25.FEB.2025 14:49:56

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	90.790	77.200

CH58 26 dB Bandwidth

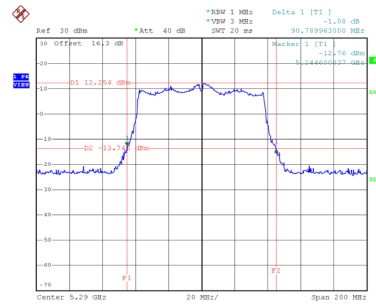

Date: 25.FEB.2025 17:03:34

99 % Occupied Bandwidth

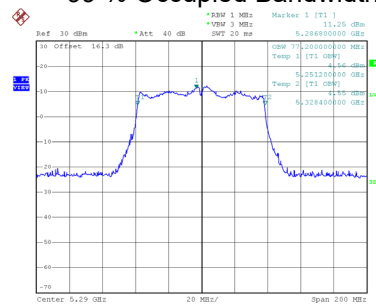


Date: 25.FEB.2025 17:02:41

Test Mode	UNII-2A_TX BE(EHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.400	19.100
60	5300	22.850	19.100
64	5320	23.150	19.100

CH52

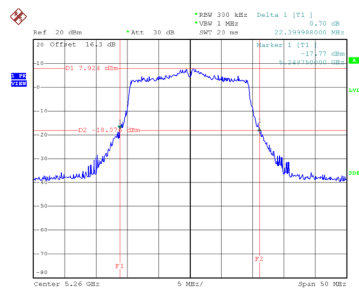


Date: 25.FEB.2025 14:18:47

CH60
26 dB Bandwidth

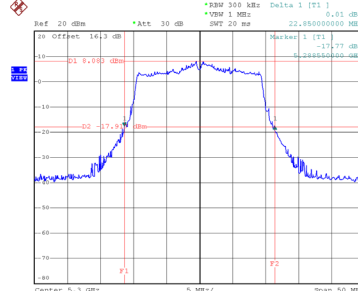


Date: 25.FEB.2025 14:24:54

CH64

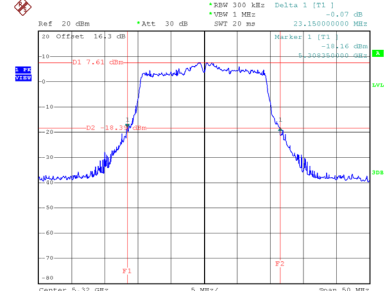


Date: 25.FEB.2025 14:26:16


99 % Occupied Bandwidth

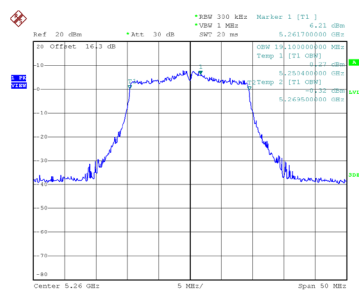

Date: 25.FEB.2025 14:18:14

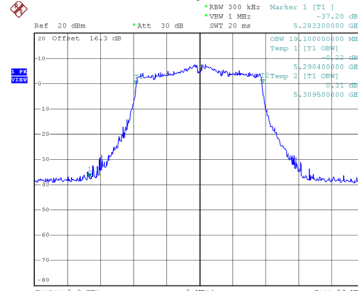

Date: 25.FEB.2025 14:24:21

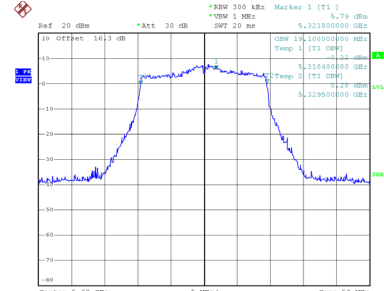


Date: 25.FEB.2025 14:25:45


Test Mode	UNII-2A_TX BE(EHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	43.900	39.000
62	5310	44.100	38.800



CH54

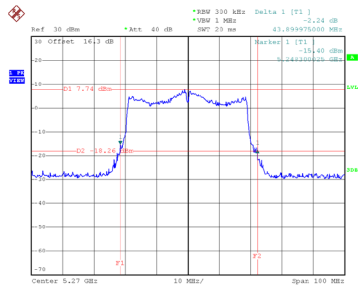

CH62 26 dB Bandwidth

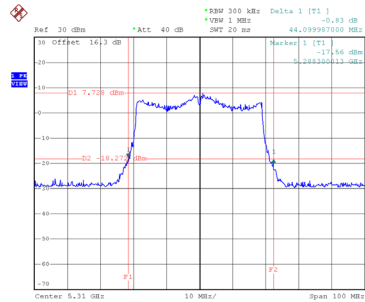


99 % Occupied Bandwidth

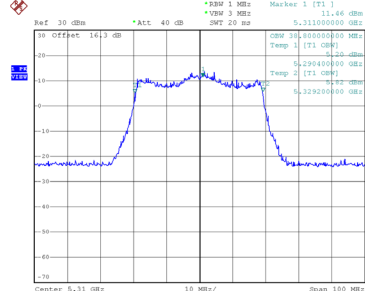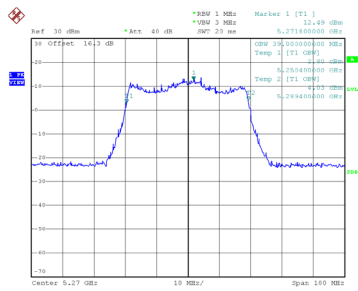

Test Mode	UNII-2A_TX BE(EHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	88.800	78.000

CH58 26 dB Bandwidth

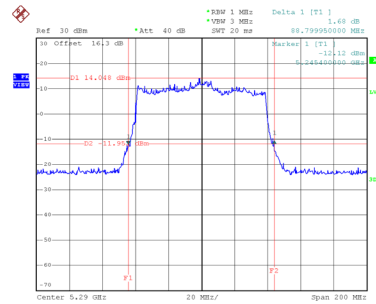

Date: 25.FEB.2025 17:31:29

99 % Occupied Bandwidth

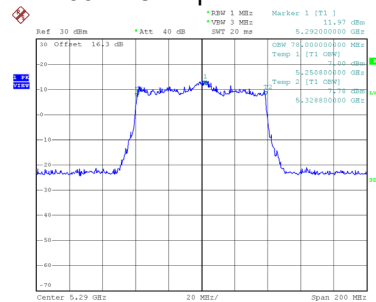


Date: 25.FEB.2025 17:30:43

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	177.592	157.600

CH50 26 dB Bandwidth

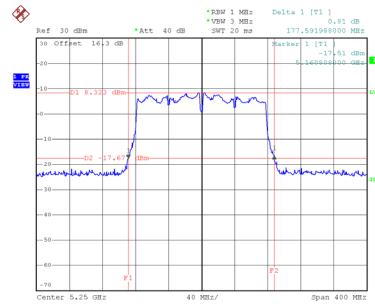

Date: 25.FEB.2025 17:44:43

99 % Occupied Bandwidth

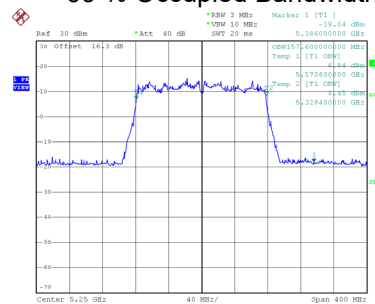


Date: 25.FEB.2025 17:43:57

Test Mode	UNII-1+UNII-2A_TX BE(EHT160) Mode
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	176.400	159.200

CH50 26 dB Bandwidth

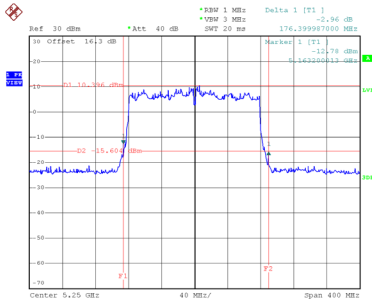

Date: 25.FEB.2025 17:40:45

99 % Occupied Bandwidth

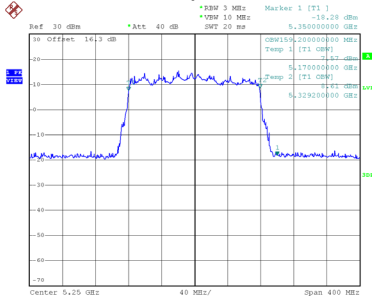


Date: 25.FEB.2025 17:40:03

Test Mode	UNII-2C_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	22.990	17.200
116	5580	22.950	17.200
140	5700	22.590	17.200
144	5720	16.050	17.400

CH100

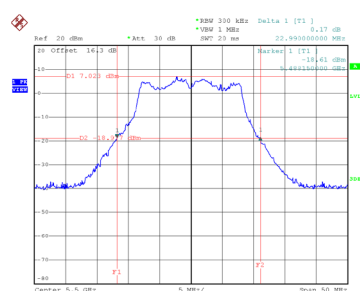


Date: 25.FEB.2025 13:50:46

CH116
26 dB Bandwidth

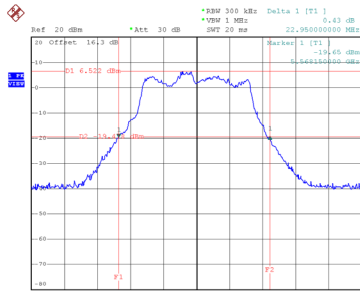


Date: 25.FEB.2025 13:51:53

CH140

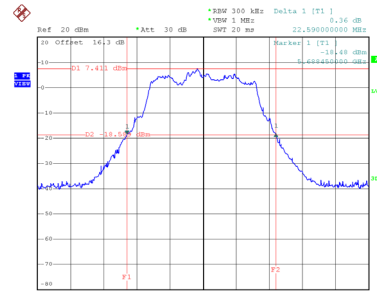


Date: 25.FEB.2025 13:52:52


99 % Occupied Bandwidth

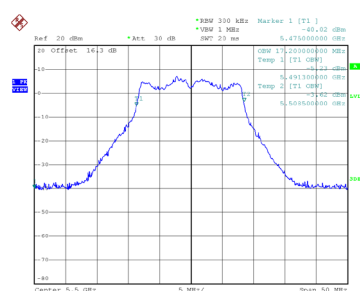

Date: 25.FEB.2025 13:50:12

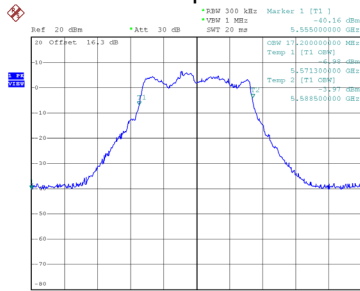


Date: 25.FEB.2025 13:51:19

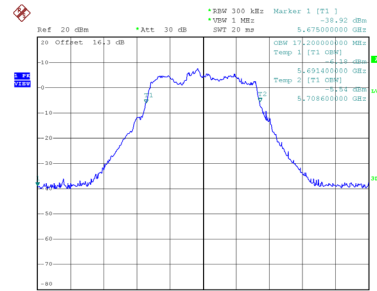


Date: 25.FEB.2025 13:52:18

CH144 26 dB Bandwidth

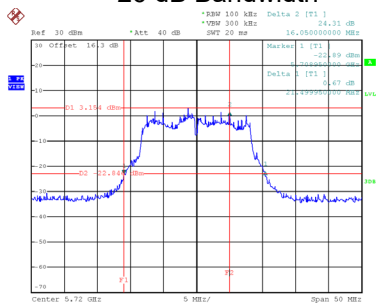

Date: 1.APR.2025 11:30:46

99 % Occupied Bandwidth

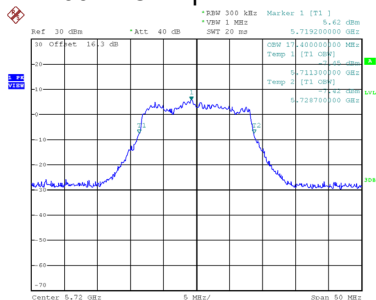


Date: 1.APR.2025 11:26:51

Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	24.950	18.600
116	5580	24.490	18.400
140	5700	23.399	18.100
144	5720	16.450	18.400

CH100

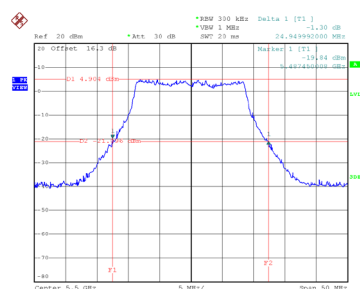


Date: 25.FEB.2025 14:09:43

CH116
26 dB Bandwidth

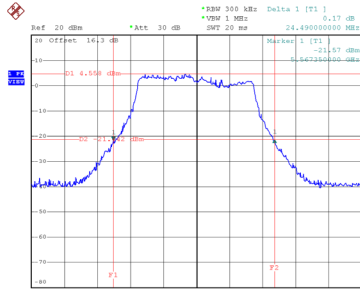


Date: 25.FEB.2025 14:10:35

CH140

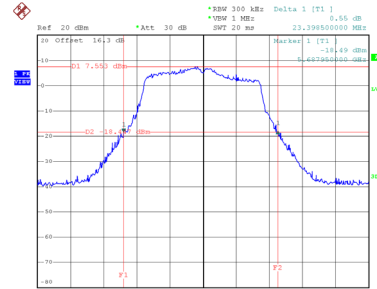


Date: 25.FEB.2025 14:11:48


99 % Occupied Bandwidth

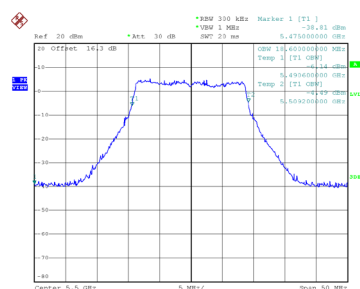

Date: 25.FEB.2025 14:09:13

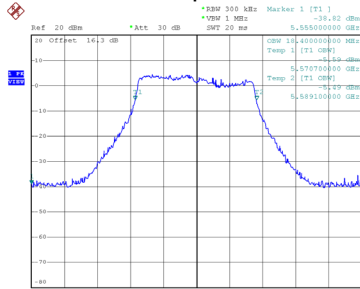


Date: 25.FEB.2025 14:10:05

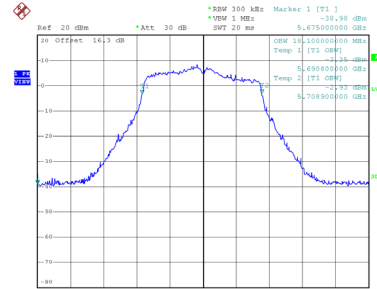


Date: 25.FEB.2025 14:11:15

CH144 26 dB Bandwidth

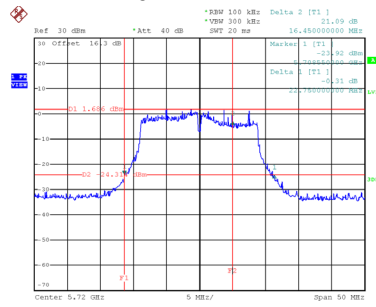

Date: 1.APR.2025 11:32:16

99 % Occupied Bandwidth

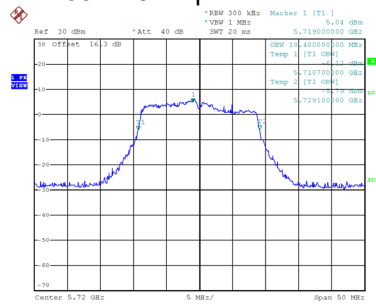


Date: 1.APR.2025 11:31:16

Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	45.098	37.800
110	5550	44.900	37.800
134	5670	44.199	37.800
142	5710	38.500	37.800

CH102

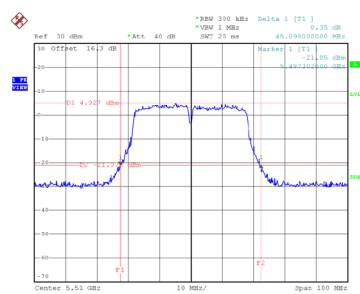


Date: 25.FEB.2025 14:51:39

CH110
26 dB Bandwidth

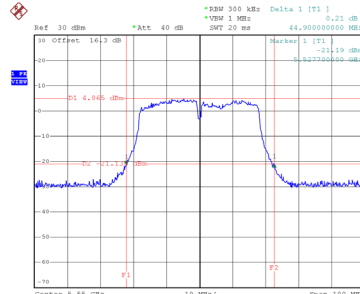


Date: 25.FEB.2025 14:52:36

CH134

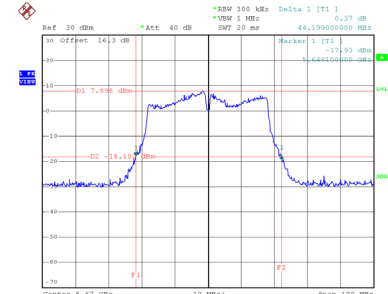


Date: 25.FEB.2025 14:53:59


99 % Occupied Bandwidth

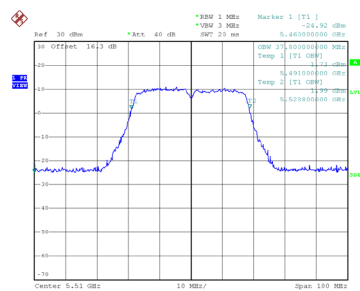

Date: 25.FEB.2025 14:51:04

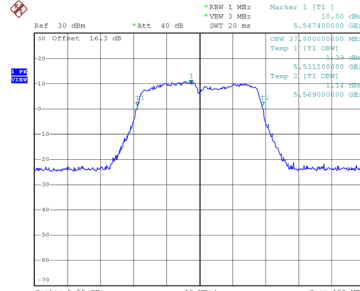


Date: 25.FEB.2025 14:52:00

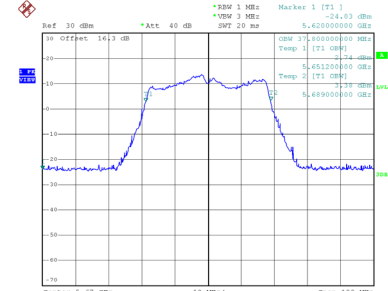


Date: 25.FEB.2025 14:53:24

CH142 26 dB Bandwidth

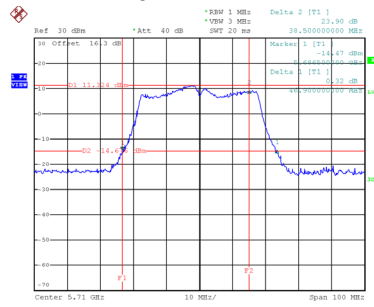

Date: 1.APR.2025 11:34:51

99 % Occupied Bandwidth

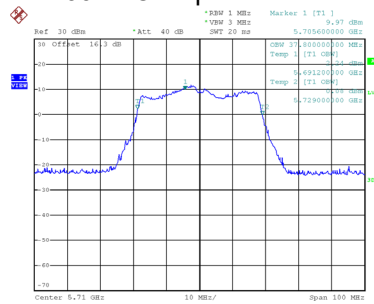


Date: 1.APR.2025 11:32:47

Test Mode	UNII-2C_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
106	5530	91.190	76.800
122	5610	91.000	76.800
138	5690	80.000	76.800

CH106

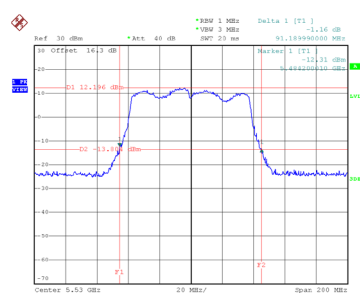


Date: 25.FEB.2025 17:07:25

CH122
26 dB Bandwidth

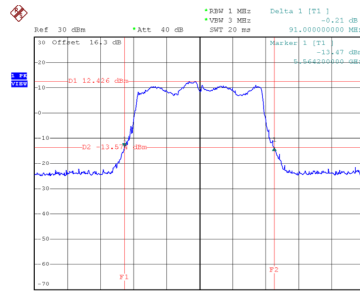


Date: 25.FEB.2025 17:08:45

CH138

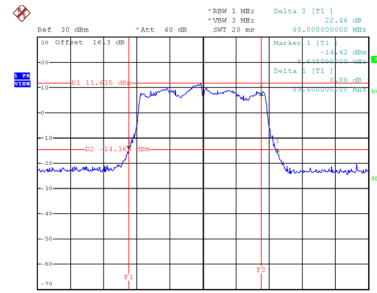


Date: 1.APR.2025 11:37:48


99 % Occupied Bandwidth

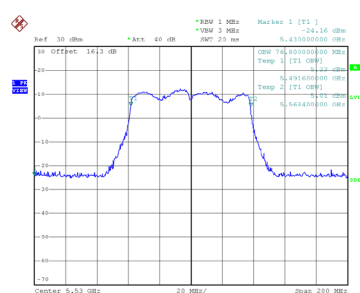

Date: 25.FEB.2025 17:06:37

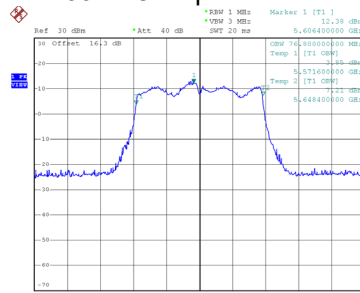

Date: 25.FEB.2025 17:08:03

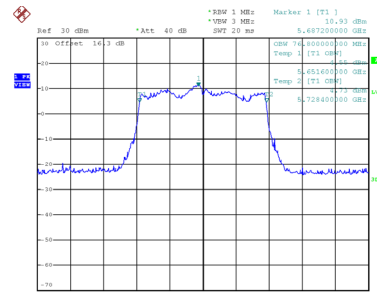

Date: 1.APR.2025 11:36:48