

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 0	Ant 1	Ant 2				
802.11ax-HE80	MCS0	39	6145	12.40	12.03	12.09	16.95	5.27	22.22	≤ 30.00
802.11ax-HE80	MCS0	55	6225	12.45	12.07	11.75	16.87	5.27	22.14	≤ 30.00
802.11ax-HE80	MCS0	87	6385	11.88	11.98	12.19	16.79	5.27	22.06	≤ 30.00
802.11ax-HE80	MCS0	103	6465	13.90	14.46	13.92	18.87	3.65	22.52	≤ 30.00
802.11ax-HE80	MCS0	119	6545	11.57	11.56	11.24	16.23	5.96	22.19	≤ 30.00
802.11ax-HE80	MCS0	135	6625	11.70	11.41	11.94	16.46	5.96	22.42	≤ 30.00
802.11ax-HE80	MCS0	151	6705	11.59	11.23	11.78	16.31	5.96	22.27	≤ 30.00
802.11ax-HE80	MCS0	167	6785	11.18	12.01	12.34	16.64	5.96	22.60	≤ 30.00
802.11ax-HE80	MCS0	183	6865	11.23	11.68	12.07	16.44	5.96	22.40	≤ 30.00
802.11ax-HE80	MCS0	199	6945	12.44	11.89	12.39	17.02	4.92	21.94	≤ 30.00
802.11ax-HE80	MCS0	215	7025	13.38	11.89	12.82	17.51	4.92	22.43	≤ 30.00
802.11ax-HE160	MCS0	47	6185	14.98	15.43	15.67	20.14	5.27	25.41	≤ 30.00
802.11ax-HE160	MCS0	79	6345	15.11	15.00	14.43	19.63	5.27	24.90	≤ 30.00
802.11ax-HE160	MCS0	111	6505	13.02	14.12	13.46	18.33	5.96	24.29	≤ 30.00
802.11ax-HE160	MCS0	143	6665	14.20	14.31	14.14	18.99	5.96	24.95	≤ 30.00
802.11ax-HE160	MCS0	175	6825	14.25	14.35	14.18	19.03	5.96	24.99	≤ 30.00
802.11ax-HE160	MCS0	207	6985	14.69	14.39	15.85	19.79	4.92	24.71	≤ 30.00
802.11be-EHT20	MCS0	33	6115	6.83	7.02	7.40	11.86	5.27	17.13	≤ 30.00
802.11be-EHT20	MCS0	61	6255	6.61	7.42	6.76	11.72	5.27	16.99	≤ 30.00
802.11be-EHT20	MCS0	93	6415	7.13	7.77	7.11	12.12	5.27	17.39	≤ 30.00
802.11be-EHT20	MCS0	97	6435	8.22	8.89	8.96	13.47	3.65	17.12	≤ 30.00
802.11be-EHT20	MCS0	105	6475	7.99	8.87	8.08	13.10	3.65	16.75	≤ 30.00
802.11be-EHT20	MCS0	113	6515	8.37	7.93	8.17	12.93	3.65	16.58	≤ 30.00
802.11be-EHT20	MCS0	117	6535	5.86	5.67	6.04	10.63	5.96	16.59	≤ 30.00
802.11be-EHT20	MCS0	149	6695	5.93	5.87	6.76	10.98	5.96	16.94	≤ 30.00
802.11be-EHT20	MCS0	181	6855	5.94	6.30	6.71	11.10	5.96	17.06	≤ 30.00
802.11be-EHT20	MCS0	185	6875	6.13	6.48	6.60	11.18	5.96	17.14	≤ 30.00
802.11be-EHT20	MCS0	189	6895	6.91	6.65	7.42	11.78	4.92	16.70	≤ 30.00
802.11be-EHT20	MCS0	209	6995	7.50	5.95	6.54	11.48	4.92	16.40	≤ 30.00
802.11be-EHT20	MCS0	229	7095	7.94	6.71	7.45	12.17	4.92	17.09	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 0	Ant 1	Ant 2				
802.11be-EHT40	MCS0	35	6125	9.75	9.69	9.68	14.48	5.27	19.75	≤ 30.00
802.11be-EHT40	MCS0	59	6245	9.03	8.95	8.73	13.68	5.27	18.95	≤ 30.00
802.11be-EHT40	MCS0	91	6405	9.37	9.96	8.83	14.18	5.27	19.45	≤ 30.00
802.11be-EHT40	MCS0	99	6445	10.55	10.83	11.32	15.68	3.65	19.33	≤ 30.00
802.11be-EHT40	MCS0	107	6485	10.15	10.74	10.30	15.18	3.65	18.83	≤ 30.00
802.11be-EHT40	MCS0	115	6525	8.46	7.86	8.13	12.93	5.96	18.89	≤ 30.00
802.11be-EHT40	MCS0	123	6565	8.43	8.60	8.24	13.20	5.96	19.16	≤ 30.00
802.11be-EHT40	MCS0	147	6685	7.66	8.02	8.75	12.94	5.96	18.90	≤ 30.00
802.11be-EHT40	MCS0	179	6845	7.68	8.35	8.96	13.13	5.96	19.09	≤ 30.00
802.11be-EHT40	MCS0	187	6885	8.69	8.72	9.04	13.59	5.96	19.55	≤ 30.00
802.11be-EHT40	MCS0	195	6925	9.30	9.04	10.19	14.31	4.92	19.23	≤ 30.00
802.11be-EHT40	MCS0	211	7005	9.73	8.34	9.15	13.88	4.92	18.80	≤ 30.00
802.11be-EHT40	MCS0	227	7085	9.97	9.49	9.64	14.48	4.92	19.40	≤ 30.00
802.11be-EHT80	MCS0	39	6145	12.54	12.43	12.66	17.32	5.27	22.59	≤ 30.00
802.11be-EHT80	MCS0	55	6225	12.61	12.58	12.21	17.24	5.27	22.51	≤ 30.00
802.11be-EHT80	MCS0	87	6385	11.49	11.58	11.78	16.39	5.27	21.66	≤ 30.00
802.11be-EHT80	MCS0	103	6465	13.39	14.15	13.57	18.49	3.65	22.14	≤ 30.00
802.11be-EHT80	MCS0	119	6545	11.92	11.78	11.60	16.54	5.96	22.50	≤ 30.00
802.11be-EHT80	MCS0	135	6625	12.00	11.45	12.05	16.61	5.96	22.57	≤ 30.00
802.11be-EHT80	MCS0	151	6705	11.84	11.55	12.25	16.66	5.96	22.62	≤ 30.00
802.11be-EHT80	MCS0	167	6785	11.48	12.09	12.58	16.84	5.96	22.80	≤ 30.00
802.11be-EHT80	MCS0	183	6865	11.49	11.48	12.28	16.54	5.96	22.50	≤ 30.00
802.11be-EHT80	MCS0	199	6945	12.74	11.99	13.51	17.56	4.92	22.48	≤ 30.00
802.11be-EHT80	MCS0	215	7025	13.83	12.25	12.80	17.78	4.92	22.70	≤ 30.00
802.11be-EHT160	MCS0	47	6185	14.97	14.90	16.31	20.21	5.27	25.48	≤ 30.00
802.11be-EHT160	MCS0	79	6345	15.02	15.00	14.96	19.76	5.27	25.03	≤ 30.00
802.11be-EHT160	MCS0	111	6505	13.45	14.35	14.06	18.74	5.96	24.70	≤ 30.00
802.11be-EHT160	MCS0	143	6665	13.73	13.68	13.77	18.50	5.96	24.46	≤ 30.00
802.11be-EHT160	MCS0	175	6825	13.66	13.47	13.28	18.24	5.96	24.20	≤ 30.00
802.11be-EHT160	MCS0	207	6985	14.83	14.16	15.53	19.65	4.92	24.57	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)			Total Average Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)
				Ant 0	Ant 1	Ant 2				
802.11be-EHT320-1	MCS0	95	6425	15.97	16.37	15.99	20.89	5.96	26.85	≤ 30.00
802.11be-EHT320-1	MCS0	159	6745	16.48	16.03	15.37	20.75	5.96	26.71	≤ 30.00
802.11be-EHT320-2	MCS0	63	6265	16.75	18.04	17.69	22.30	5.27	27.57	≤ 30.00
802.11be-EHT320-2	MCS0	127	6585	16.60	17.17	15.80	21.33	5.96	27.29	≤ 30.00
802.11be-EHT320-2	MCS0	191	6905	15.97	15.61	15.76	20.55	5.96	26.51	≤ 30.00

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)}\}$.

Note 2: EIRP (dBm) = Total Average Power (dBm) + Antenna Gain (dBi).

A.4 Power Spectral Density Test Result

Test Site	WJ-SR3	Test Engineer	Simon Lu
Test Date	2025-01-12~2025-01-15	Test Mode	Nss = 1

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)			Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2				
802.11ax-HE20	MCS0	33	6115	-10.236	-9.928	-9.683	98.50	9.80	4.63	≤ 5.00
802.11ax-HE20	MCS0	61	6255	-10.299	-9.779	-9.694	98.50	9.80	4.66	≤ 5.00
802.11ax-HE20	MCS0	93	6415	-9.878	-9.280	-9.832	98.50	9.80	4.92	≤ 5.00
802.11ax-HE20	MCS0	97	6435	-8.217	-8.067	-8.336	98.50	8.06	4.63	≤ 5.00
802.11ax-HE20	MCS0	105	6475	-8.772	-7.961	-8.095	98.50	8.06	4.57	≤ 5.00
802.11ax-HE20	MCS0	113	6515	-8.129	-8.053	-8.073	98.50	8.06	4.75	≤ 5.00
802.11ax-HE20	MCS0	117	6535	-10.489	-10.402	-10.469	98.50	10.25	4.57	≤ 5.00
802.11ax-HE20	MCS0	149	6695	-10.600	-10.533	-9.515	98.50	10.25	4.83	≤ 5.00
802.11ax-HE20	MCS0	181	6855	-10.815	-10.513	-9.635	98.50	10.25	4.73	≤ 5.00
802.11ax-HE20	MCS0	185	6875	-10.677	-10.280	-10.316	98.50	10.25	4.60	≤ 5.00
802.11ax-HE20	MCS0	189	6895	-9.223	-9.455	-8.878	98.50	9.28	4.87	≤ 5.00
802.11ax-HE20	MCS0	209	6995	-8.198	-10.114	-9.202	98.50	9.28	4.95	≤ 5.00
802.11ax-HE20	MCS0	229	7095	-9.221	-10.415	-9.072	98.50	9.28	4.52	≤ 5.00
802.11ax-HE40	MCS0	35	6125	-10.273	-9.084	-10.136	96.91	9.80	4.91	≤ 5.00
802.11ax-HE40	MCS0	59	6245	-10.357	-9.700	-9.211	96.91	9.80	4.98	≤ 5.00
802.11ax-HE40	MCS0	91	6405	-9.605	-9.234	-10.414	96.91	9.80	4.98	≤ 5.00
802.11ax-HE40	MCS0	99	6445	-8.113	-8.272	-8.197	96.91	8.06	4.77	≤ 5.00
802.11ax-HE40	MCS0	107	6485	-8.232	-7.697	-8.926	96.91	8.06	4.71	≤ 5.00
802.11ax-HE40	MCS0	115	6525	-10.228	-10.940	-10.315	96.91	10.25	4.67	≤ 5.00
802.11ax-HE40	MCS0	123	6565	-10.440	-10.119	-10.187	96.91	10.25	4.91	≤ 5.00
802.11ax-HE40	MCS0	147	6685	-10.834	-10.676	-9.741	96.91	10.25	4.77	≤ 5.00
802.11ax-HE40	MCS0	179	6845	-10.353	-10.482	-9.881	96.91	10.25	4.93	≤ 5.00
802.11ax-HE40	MCS0	187	6885	-10.019	-10.563	-10.011	96.91	10.25	4.97	≤ 5.00
802.11ax-HE40	MCS0	195	6925	-9.448	-9.528	-8.658	96.91	9.28	4.99	≤ 5.00
802.11ax-HE40	MCS0	211	7005	-8.610	-10.505	-9.640	96.91	9.28	4.67	≤ 5.00
802.11ax-HE40	MCS0	227	7085	-8.940	-9.301	-9.579	96.91	9.28	4.92	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)			Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2				
802.11ax-HE80	MCS0	39	6145	-9.709	-10.414	-9.421	95.02	9.80	4.96	≤ 5.00
802.11ax-HE80	MCS0	55	6225	-10.879	-9.189	-10.753	95.02	9.80	4.59	≤ 5.00
802.11ax-HE80	MCS0	87	6385	-9.283	-9.983	-10.495	95.02	9.80	4.90	≤ 5.00
802.11ax-HE80	MCS0	103	6465	-9.090	-9.186	-7.242	95.02	8.06	4.64	≤ 5.00
802.11ax-HE80	MCS0	119	6545	-10.050	-10.528	-10.567	95.02	10.25	4.87	≤ 5.00
802.11ax-HE80	MCS0	135	6625	-10.766	-11.028	-9.641	95.02	10.25	4.81	≤ 5.00
802.11ax-HE80	MCS0	151	6705	-10.857	-11.310	-9.649	95.02	10.25	4.70	≤ 5.00
802.11ax-HE80	MCS0	167	6785	-10.858	-10.618	-10.512	95.02	10.25	4.58	≤ 5.00
802.11ax-HE80	MCS0	183	6865	-10.474	-10.276	-10.935	95.02	10.25	4.69	≤ 5.00
802.11ax-HE80	MCS0	199	6945	-9.435	-9.774	-9.561	95.02	9.28	4.69	≤ 5.00
802.11ax-HE80	MCS0	215	7025	-8.564	-10.679	-10.197	95.02	9.28	4.56	≤ 5.00
802.11ax-HE160	MCS0	47	6185	-10.411	-10.802	-9.344	93.94	9.80	4.70	≤ 5.00
802.11ax-HE160	MCS0	79	6345	-10.460	-9.469	-11.003	93.94	9.80	4.58	≤ 5.00
802.11ax-HE160	MCS0	111	6505	-12.120	-11.114	-9.456	93.94	10.25	4.54	≤ 5.00
802.11ax-HE160	MCS0	143	6665	-11.833	-9.249	-11.408	93.94	10.25	4.62	≤ 5.00
802.11ax-HE160	MCS0	175	6825	-11.300	-12.257	-8.813	93.94	10.25	4.75	≤ 5.00
802.11ax-HE160	MCS0	207	6985	-10.386	-10.899	-8.331	93.94	9.28	4.60	≤ 5.00
802.11be-EHT20	MCS0	33	6115	-10.170	-9.714	-10.054	98.88	9.80	4.60	≤ 5.00
802.11be-EHT20	MCS0	61	6255	-10.462	-9.368	-10.096	98.88	9.80	4.62	≤ 5.00
802.11be-EHT20	MCS0	93	6415	-9.744	-9.322	-10.071	98.88	9.80	4.87	≤ 5.00
802.11be-EHT20	MCS0	97	6435	-8.530	-7.812	-7.640	98.88	8.06	4.85	≤ 5.00
802.11be-EHT20	MCS0	105	6475	-8.789	-7.463	-7.799	98.88	8.06	4.85	≤ 5.00
802.11be-EHT20	MCS0	113	6515	-8.177	-8.351	-8.160	98.88	8.06	4.60	≤ 5.00
802.11be-EHT20	MCS0	117	6535	-10.186	-10.246	-10.097	98.88	10.25	4.85	≤ 5.00
802.11be-EHT20	MCS0	149	6695	-11.051	-10.297	-9.573	98.88	10.25	4.76	≤ 5.00
802.11be-EHT20	MCS0	181	6855	-10.692	-10.004	-9.717	98.88	10.25	4.90	≤ 5.00
802.11be-EHT20	MCS0	185	6875	-10.501	-10.478	-10.271	98.88	10.25	4.61	≤ 5.00
802.11be-EHT20	MCS0	189	6895	-9.534	-9.146	-9.764	98.88	9.28	4.58	≤ 5.00
802.11be-EHT20	MCS0	209	6995	-8.465	-9.761	-9.141	98.88	9.28	4.96	≤ 5.00
802.11be-EHT20	MCS0	229	7095	-9.190	-10.386	-9.033	98.88	9.28	4.56	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)			Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2				
802.11be-EHT40	MCS0	35	6125	-10.499	-9.497	-10.247	97.53	9.80	4.62	≤ 5.00
802.11be-EHT40	MCS0	59	6245	-10.403	-9.618	-9.621	97.53	9.80	4.81	≤ 5.00
802.11be-EHT40	MCS0	91	6405	-10.023	-9.698	-10.296	97.53	9.80	4.68	≤ 5.00
802.11be-EHT40	MCS0	99	6445	-8.088	-7.994	-9.024	97.53	8.06	4.60	≤ 5.00
802.11be-EHT40	MCS0	107	6485	-8.541	-8.410	-7.591	97.53	8.06	4.78	≤ 5.00
802.11be-EHT40	MCS0	115	6525	-10.287	-10.229	-10.837	97.53	10.25	4.69	≤ 5.00
802.11be-EHT40	MCS0	123	6565	-10.415	-9.793	-10.285	97.53	10.25	4.97	≤ 5.00
802.11be-EHT40	MCS0	147	6685	-11.011	-10.454	-9.846	97.53	10.25	4.72	≤ 5.00
802.11be-EHT40	MCS0	179	6845	-10.706	-10.919	-9.945	97.53	10.25	4.63	≤ 5.00
802.11be-EHT40	MCS0	187	6885	-10.172	-10.809	-10.265	97.53	10.25	4.72	≤ 5.00
802.11be-EHT40	MCS0	195	6925	-9.382	-9.927	-8.661	97.53	9.28	4.87	≤ 5.00
802.11be-EHT40	MCS0	211	7005	-8.540	-10.612	-9.560	97.53	9.28	4.67	≤ 5.00
802.11be-EHT40	MCS0	227	7085	-8.977	-9.278	-9.643	97.53	9.28	4.87	≤ 5.00
802.11be-EHT80	MCS0	39	6145	-10.807	-9.218	-10.483	94.34	9.80	4.71	≤ 5.00
802.11be-EHT80	MCS0	55	6225	-10.628	-10.027	-9.290	94.34	9.80	4.88	≤ 5.00
802.11be-EHT80	MCS0	87	6385	-9.739	-9.885	-10.530	94.34	9.80	4.79	≤ 5.00
802.11be-EHT80	MCS0	103	6465	-8.556	-7.468	-8.349	94.34	8.06	4.99	≤ 5.00
802.11be-EHT80	MCS0	119	6545	-10.738	-9.348	-11.093	94.34	10.25	4.95	≤ 5.00
802.11be-EHT80	MCS0	135	6625	-10.853	-11.138	-9.679	94.34	10.25	4.76	≤ 5.00
802.11be-EHT80	MCS0	151	6705	-10.600	-10.119	-10.221	94.34	10.25	4.97	≤ 5.00
802.11be-EHT80	MCS0	167	6785	-10.498	-10.968	-9.511	94.34	10.25	4.99	≤ 5.00
802.11be-EHT80	MCS0	183	6865	-10.644	-10.867	-9.562	94.34	10.25	4.95	≤ 5.00
802.11be-EHT80	MCS0	199	6945	-9.745	-9.394	-9.361	94.34	9.28	4.81	≤ 5.00
802.11be-EHT80	MCS0	215	7025	-8.609	-10.241	-9.773	94.34	9.28	4.82	≤ 5.00
802.11be-EHT160	MCS0	47	6185	-11.430	-8.881	-9.578	95.06	9.80	4.96	≤ 5.00
802.11be-EHT160	MCS0	79	6345	-9.888	-9.786	-10.716	95.06	9.80	4.68	≤ 5.00
802.11be-EHT160	MCS0	111	6505	-11.955	-11.093	-9.259	95.06	10.25	4.62	≤ 5.00
802.11be-EHT160	MCS0	143	6665	-11.714	-9.483	-10.828	95.06	10.25	4.66	≤ 5.00
802.11be-EHT160	MCS0	175	6825	-11.117	-10.210	-10.673	95.06	10.25	4.59	≤ 5.00
802.11be-EHT160	MCS0	207	6985	-10.098	-10.267	-7.970	95.06	9.28	4.96	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/MHz)			Duty Cycle (%)	Antenna Gain (dBi)	EIRP PSD (dBm/MHz)	Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2				
802.11be-EHT320-1	MCS0	95	6425	-11.572	-9.455	-11.782	90.99	10.25	4.63	≤ 5.00
802.11be-EHT320-1	MCS0	159	6745	-10.822	-11.894	-9.505	90.99	10.25	4.80	≤ 5.00
802.11be-EHT320-2	MCS0	63	6265	-11.454	-9.444	-9.992	90.99	9.80	4.76	≤ 5.00
802.11be-EHT320-2	MCS0	127	6585	-11.734	-10.542	-10.435	90.99	10.25	4.57	≤ 5.00
802.11be-EHT320-2	MCS0	191	6905	-10.762	-10.805	-10.011	90.99	10.25	4.92	≤ 5.00


Note:

When EUT duty cycle < 98%, EIRP PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/MHz) + $10 \cdot \log (1/\text{Duty Cycle})$ + Antenna Gain (dBi).

When EUT duty cycle ≥ 98%, EIRP PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)}\}$ (dBm/MHz) + Antenna Gain (dBi).

802.11ax-HE20 Power Spectral Density- Ant 0 (Nss = 1)

Channel 33 (6115MHz)

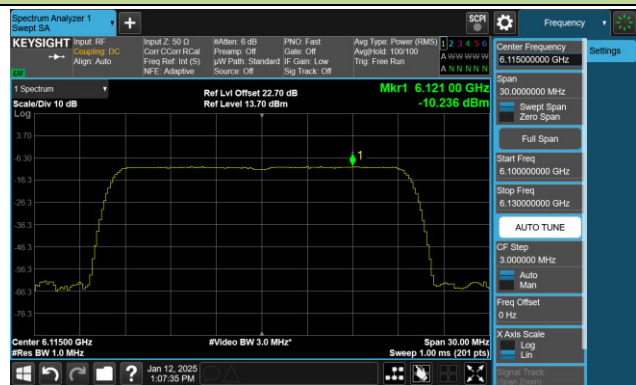

Channel 61 (6255MHz)



Channel 93 (6415MHz)



Channel 97 (6435MHz)



Channel 105 (6475MHz)




Channel 113 (6515MHz)




802.11ax-HE20 Power Spectral Density- Ant 0 (Nss = 1)


Channel 117 (6535MHz)

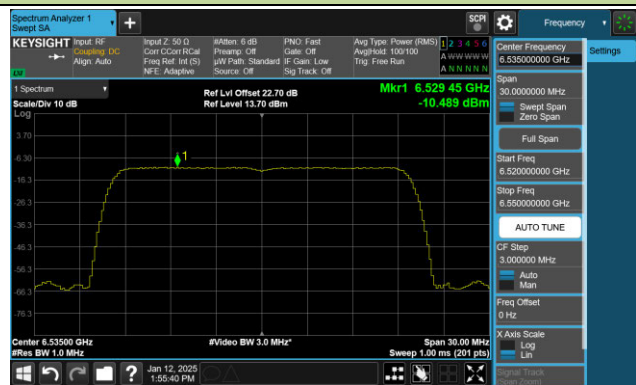


Channel 149 (6695MHz)

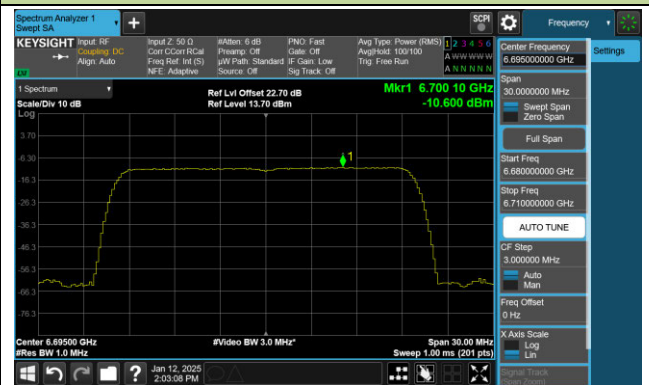


Channel 181 (6855MHz)

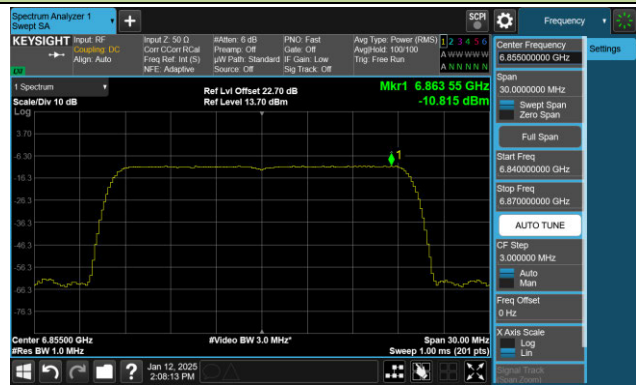

Channel 185 (6875MHz)

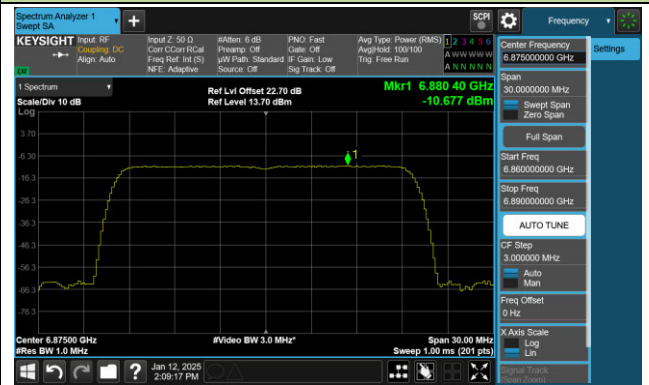


Channel 189 (6895MHz)

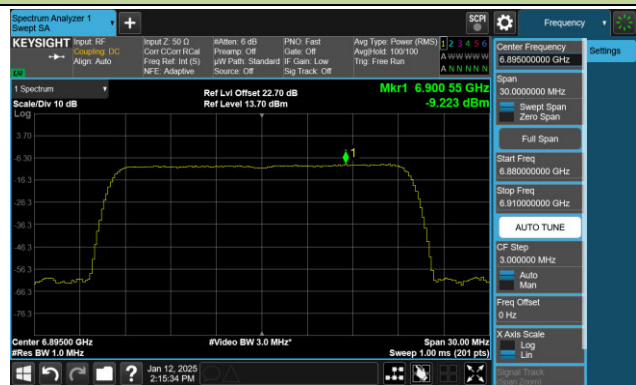


Channel 209 (6995MHz)



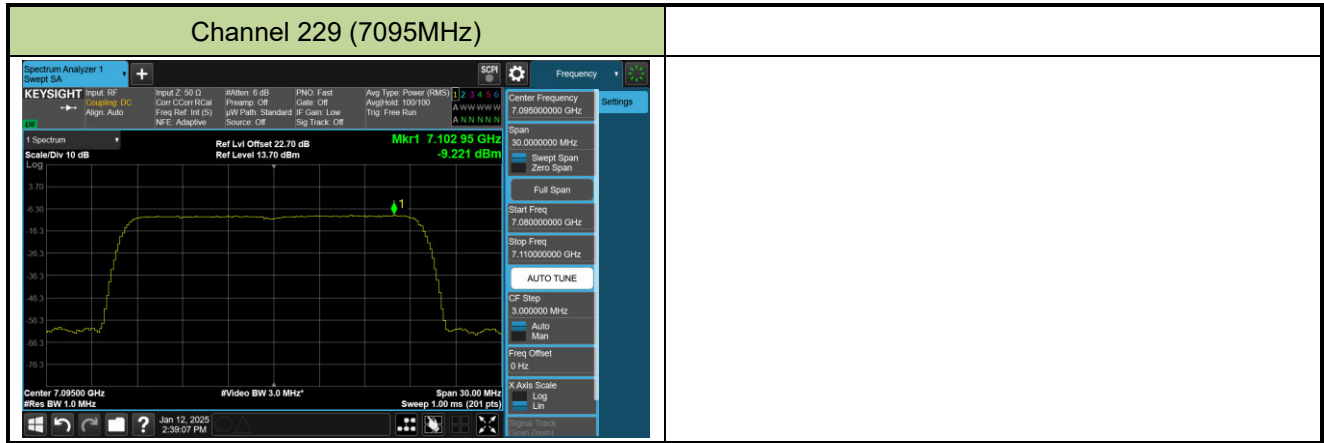


802.11ax-HE40 Power Spectral Density- Ant 0 (Nss = 1)


Channel 35 (6125MHz)

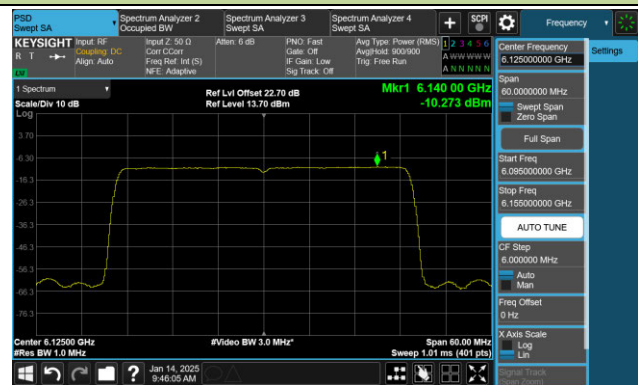


Channel 59 (6245MHz)

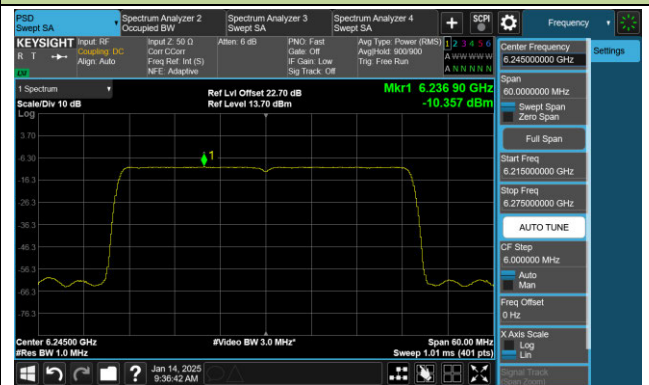


Channel 91 (6405MHz)

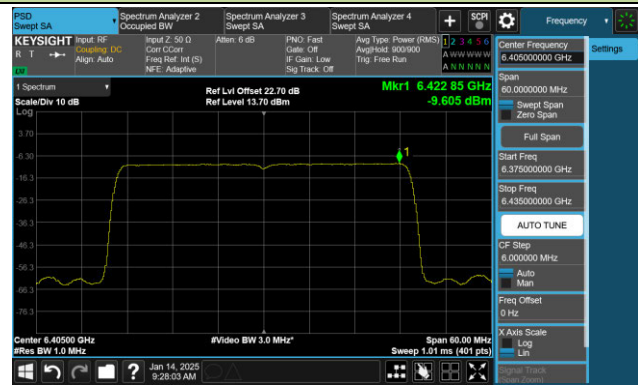


Channel 99 (6445MHz)

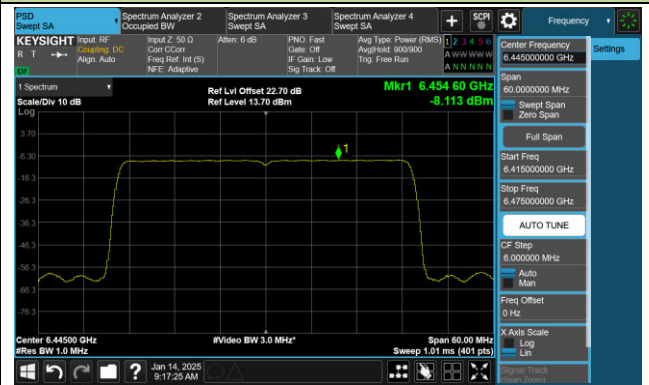

Channel 107 (6485MHz)

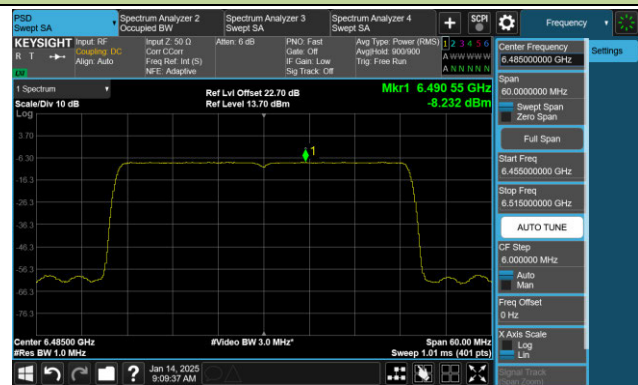


Channel 115 (6525MHz)

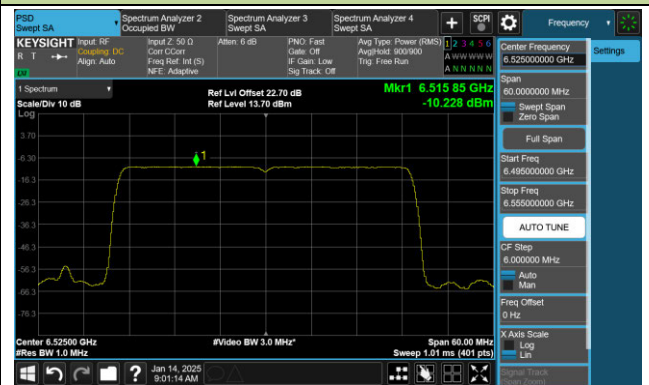


802.11ax-HE40 Power Spectral Density- Ant 0 (Nss = 1)


Channel 123 (6565MHz)

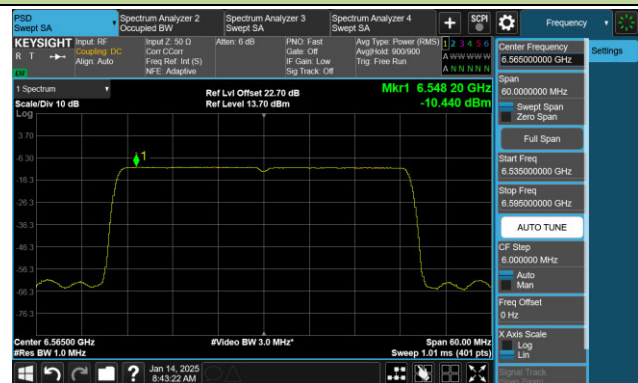


Channel 147 (6685MHz)

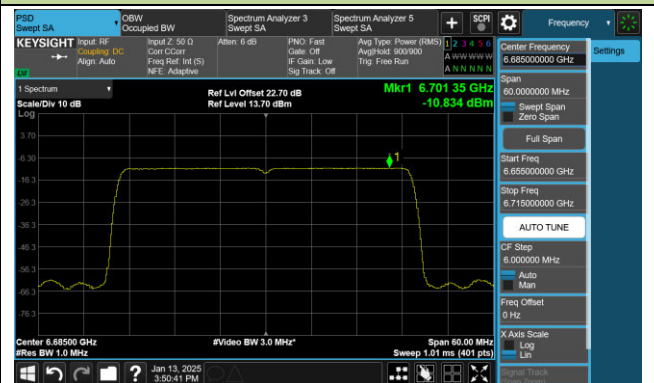


Channel 179 (6845MHz)

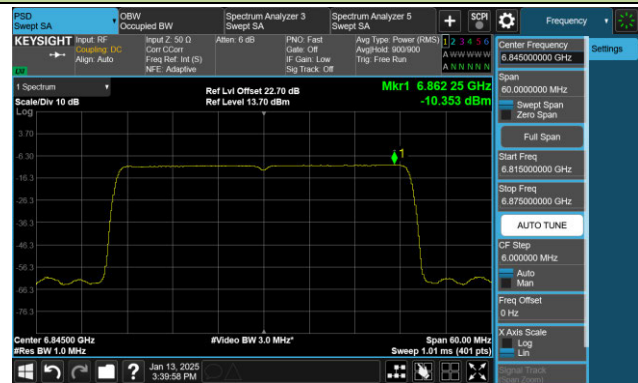


Channel 187 (6885MHz)

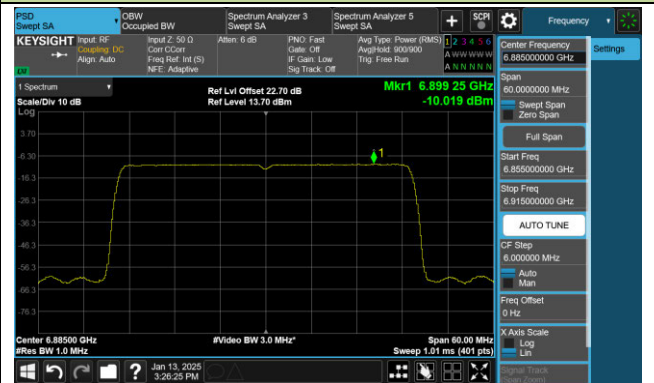


Channel 195 (6925MHz)

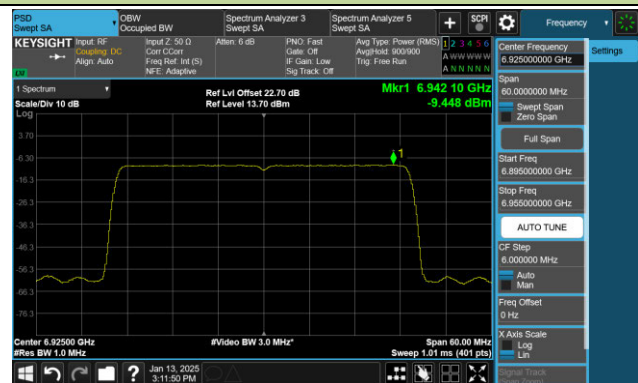


Channel 211 (7005MHz)

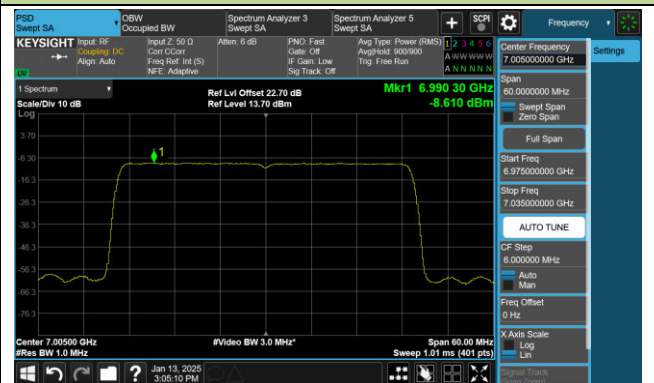

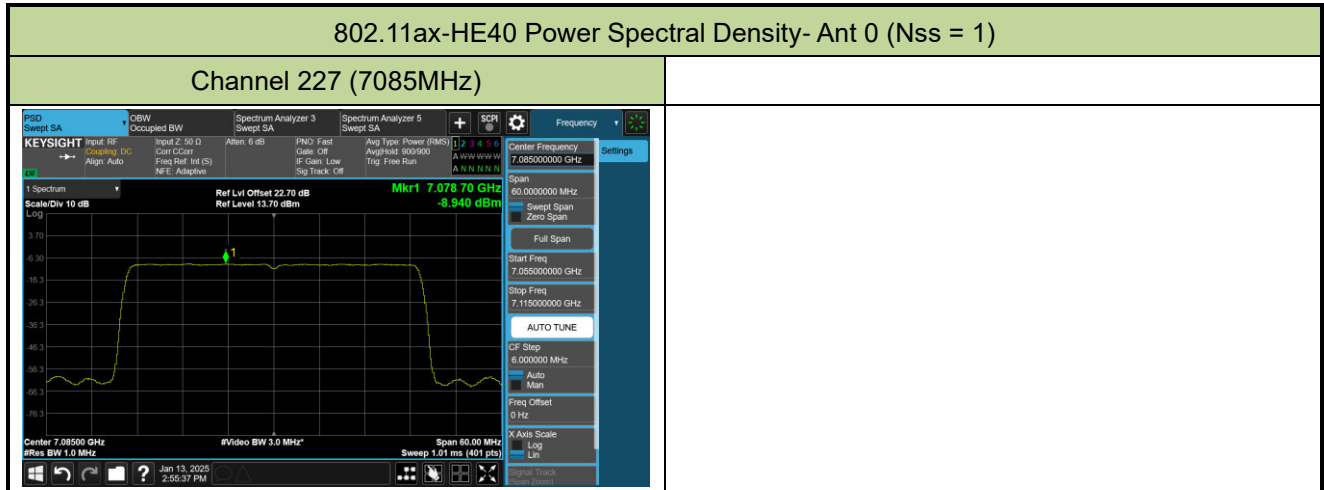


802.11ax-HE80 Power Spectral Density- Ant 0 (Nss = 1)


Channel 39 (6145MHz)

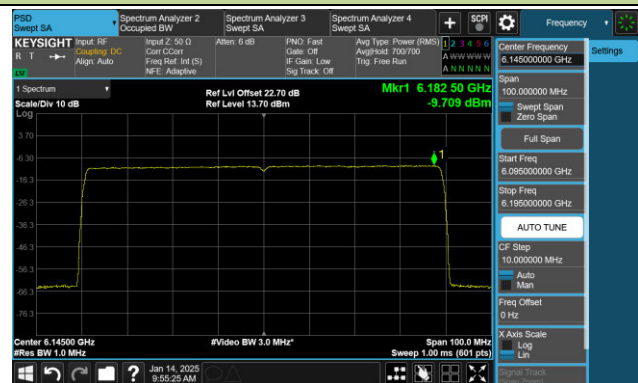


Channel 55 (6225MHz)

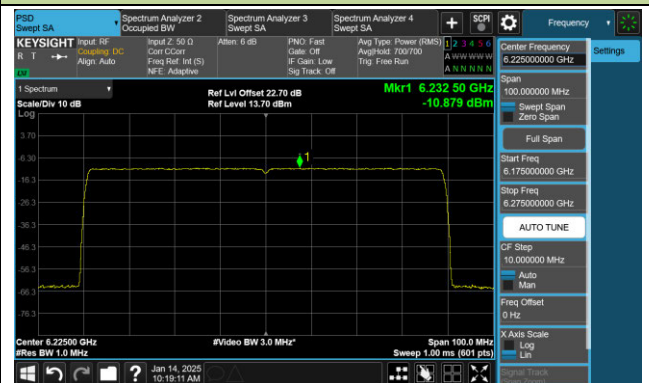


Channel 87 (6385MHz)

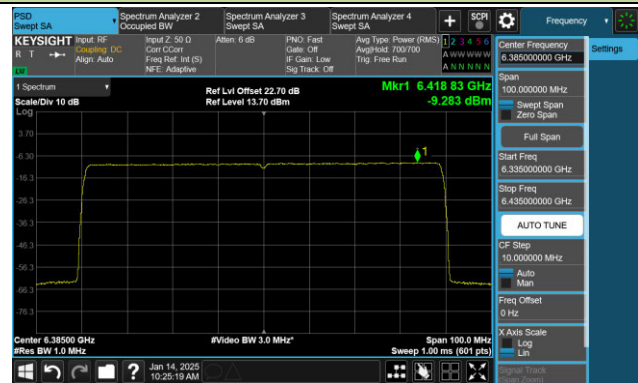


Channel 103 (6465MHz)

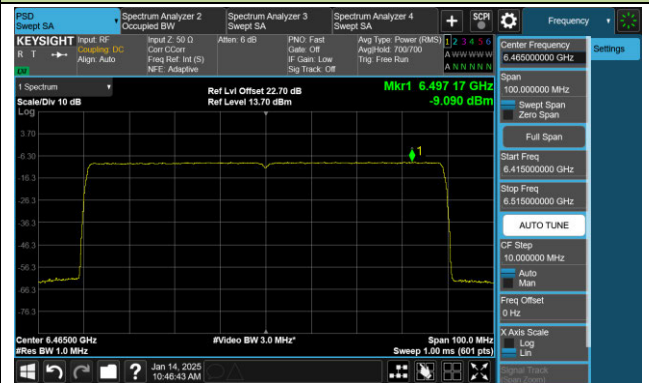

Channel 119 (6545MHz)

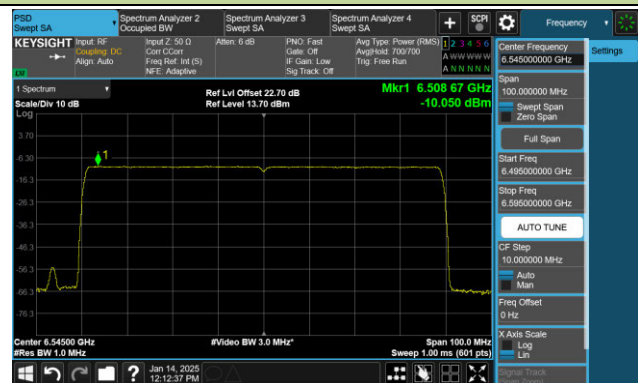

Channel 135 (6625MHz)

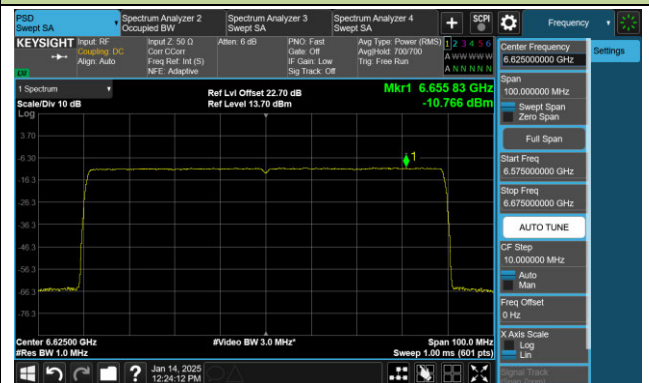


802.11ax-HE80 Power Spectral Density- Ant 0 (Nss = 1)


Channel 151 (6705MHz)




Channel 167 (6785MHz)

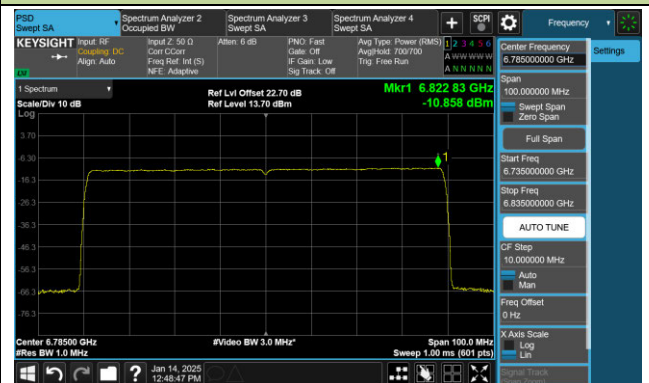


Channel 183 (6865MHz)

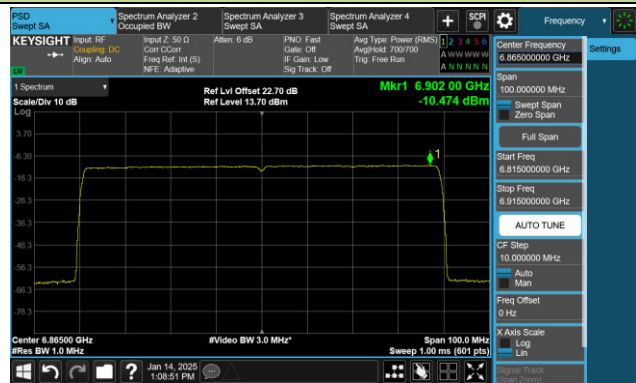

Channel 199 (6945MHz)

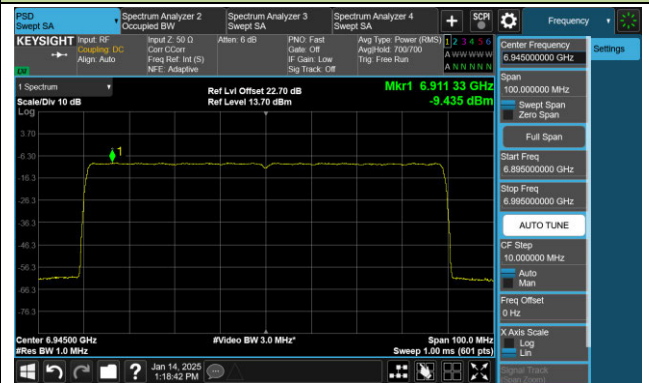


Channel 215 (7025MHz)

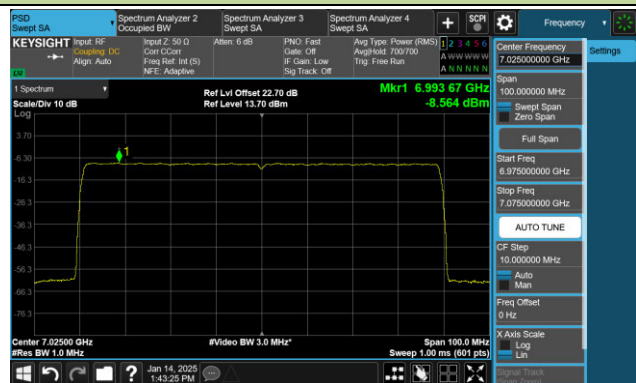


802.11ax-HE160 Power Spectral Density- Ant 0 (Nss = 1)


Channel 47 (6185MHz)

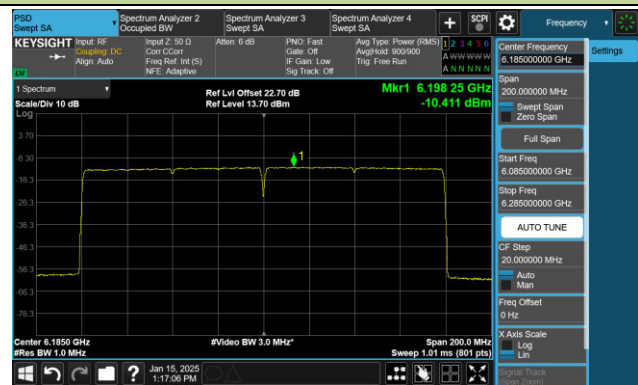


Channel 79 (6345MHz)

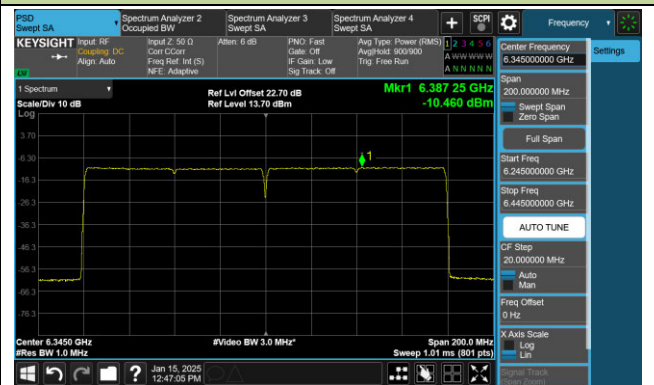


Channel 111 (6505MHz)

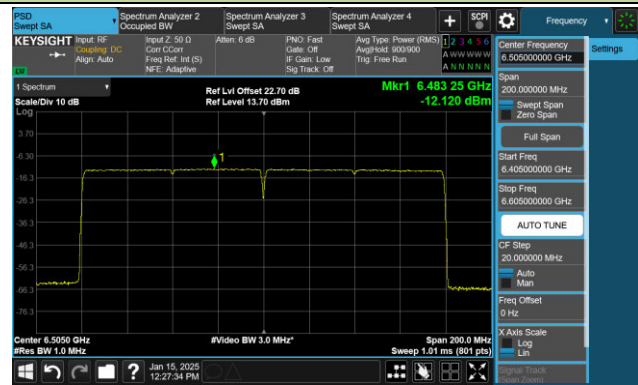


Channel 143 (6665MHz)

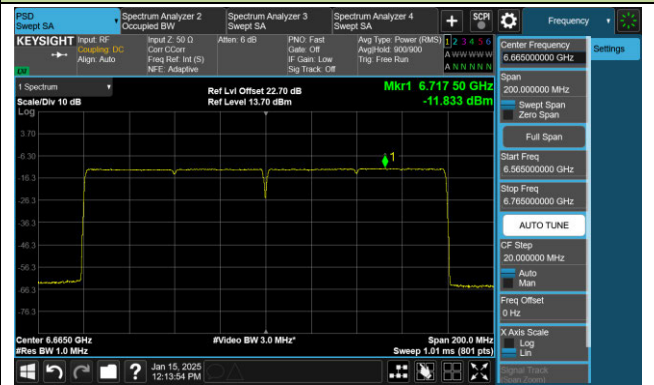

Channel 175 (6825MHz)

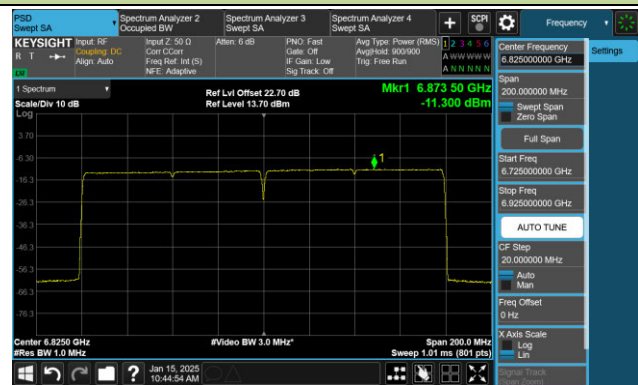


Channel 207 (6985MHz)

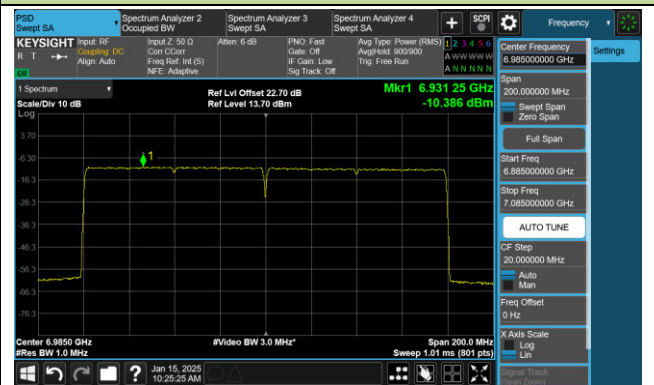


802.11be-EHT20 Power Spectral Density- Ant 0 (Nss = 1)

Channel 33 (6115MHz)

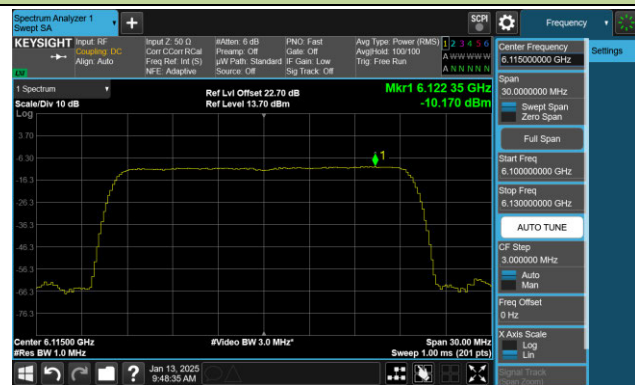

Channel 61 (6255MHz)

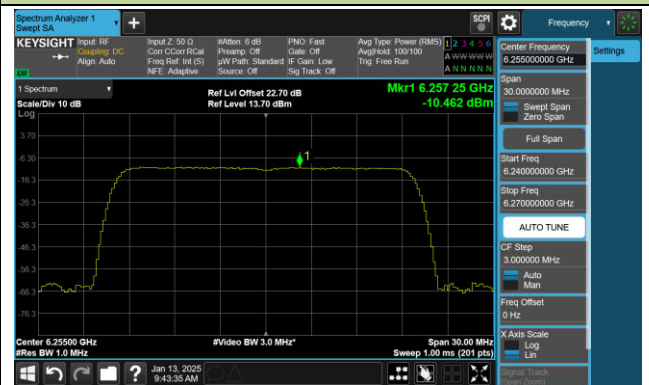


Channel 93 (6415MHz)



Channel 97 (6435MHz)



Channel 105 (6475MHz)

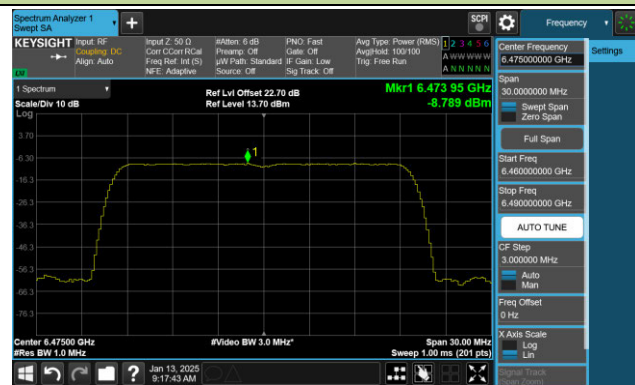

Channel 113 (6515MHz)



802.11be-EHT20 Power Spectral Density- Ant 0 (Nss = 1)

Channel 117 (6535MHz)



Channel 149 (6695MHz)



Channel 181 (6855MHz)



Channel 185 (6875MHz)




Channel 189 (6895MHz)




Channel 209 (6995MHz)



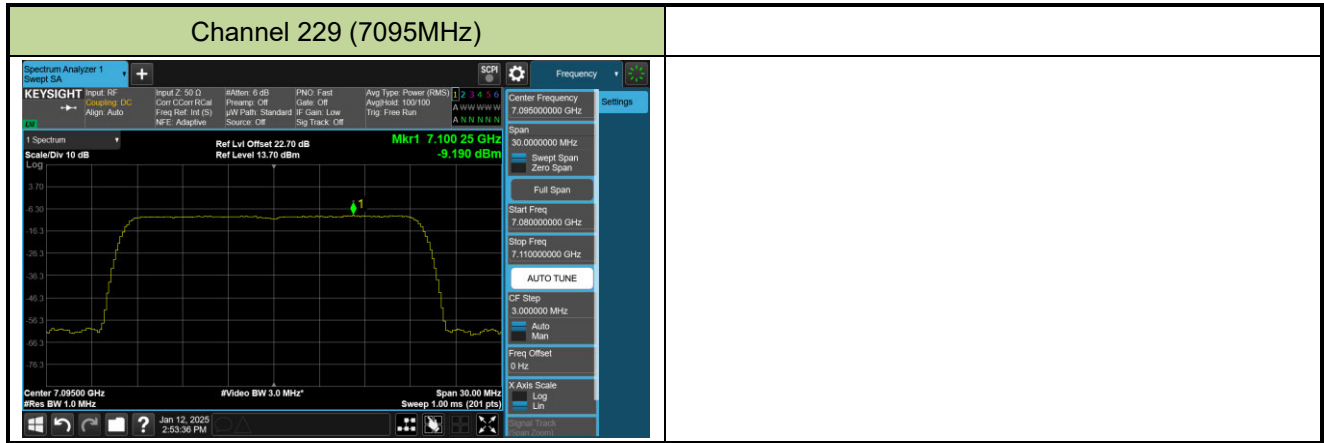

802.11be-EHT40 Power Spectral Density- Ant 0 (Nss = 1)


Channel 35 (6125MHz)

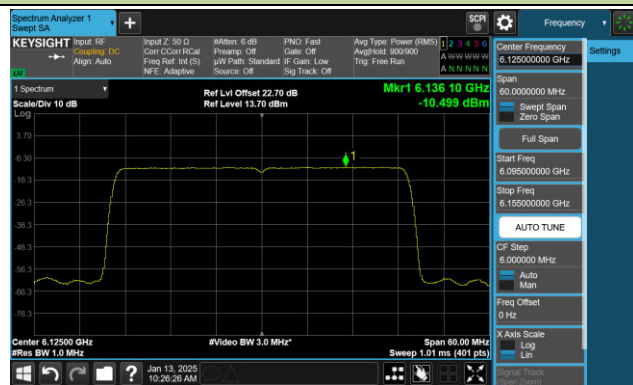


Channel 59 (6245MHz)




Channel 91 (6405MHz)

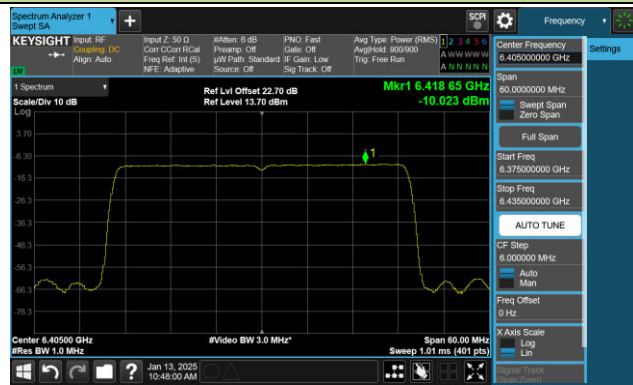


Channel 99 (6445MHz)

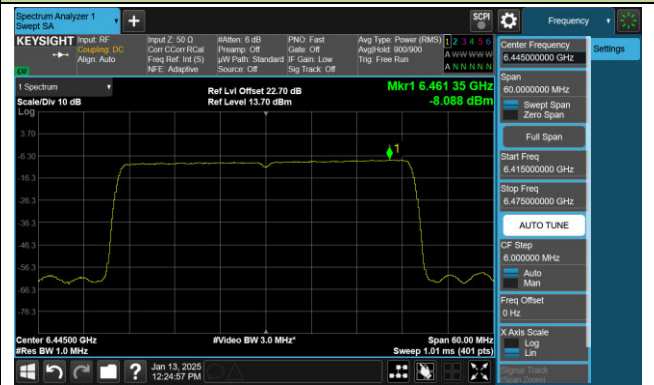

Channel 107 (6485MHz)

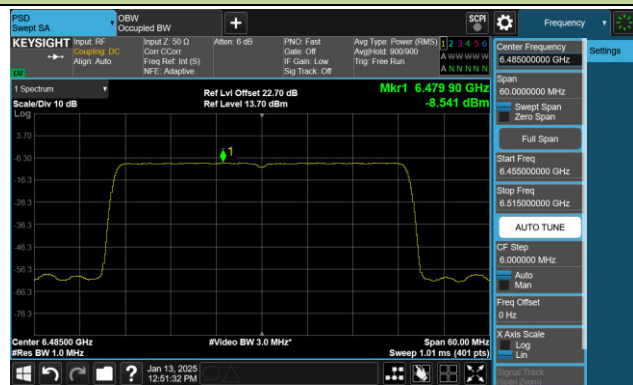


Channel 115 (6525MHz)

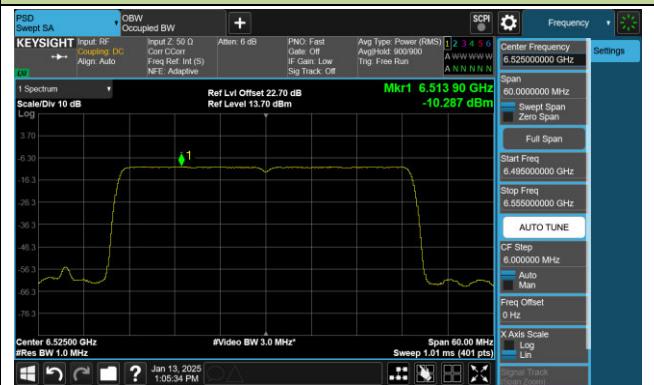


802.11be-EHT40 Power Spectral Density- Ant 0 (Nss = 1)


Channel 123 (6565MHz)

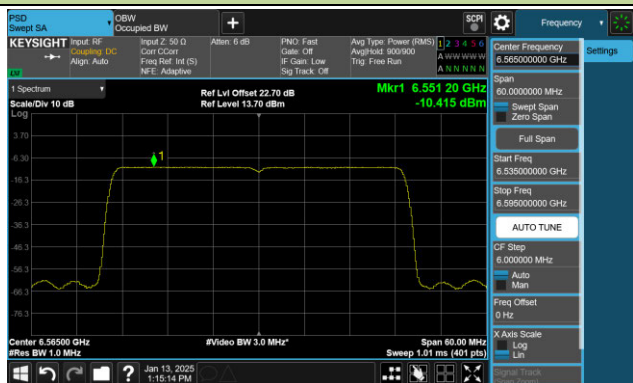


Channel 147 (6685MHz)

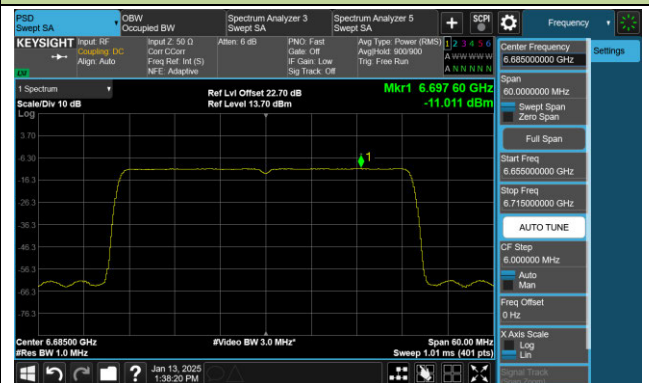


Channel 179 (6845MHz)

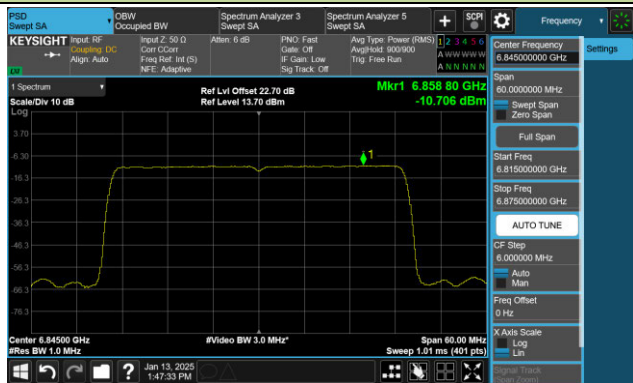


Channel 187 (6885MHz)

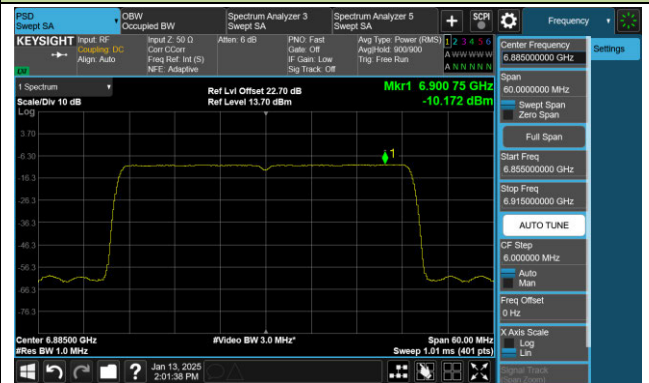

Channel 195 (6925MHz)

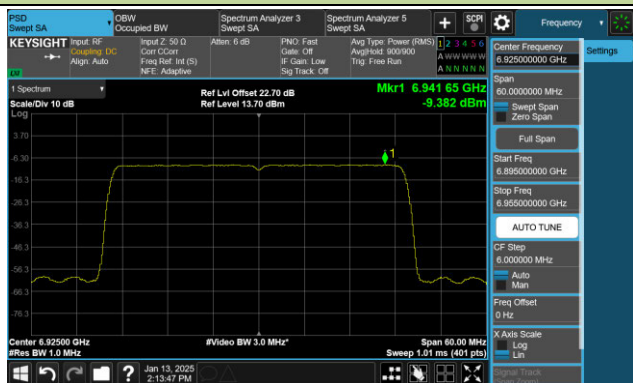

Channel 211 (7005MHz)

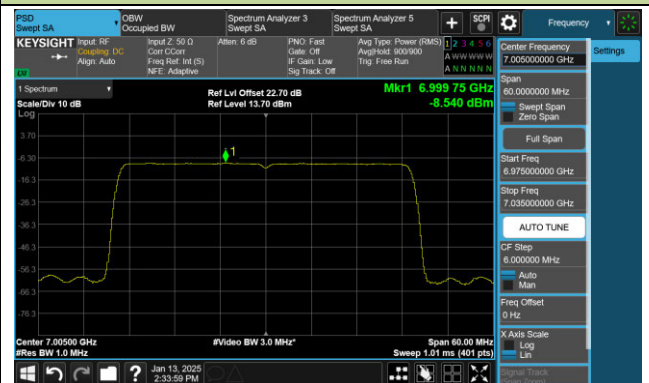

802.11be-EHT40 Power Spectral Density- Ant 0 (Nss = 1)

Channel 227 (7085MHz)

