



FCC Radio Test Report

FCC ID: 2BH7FEAP603OD

This report concerns: Original Grant

Project No.	: 2501G023
Equipment	: AX1800 Indoor/Outdoor Wi-Fi 6 Access Point
Brand Name	: tp-link
Test Model	: EAP603-Outdoor
Series Model	: N/A
Applicant	: TP-Link Systems Inc.
Address	: 10 Mauchly, Irvine, CA 92618
Manufacturer	: TP-Link Systems Inc.
Address	: 10 Mauchly, Irvine, CA 92618
Date of Receipt	: Feb. 28, 2025
Date of Test	: Mar. 05, 2025 ~ Jun. 07, 2025 Jul. 25, 2025
Issued Date	: Jul. 30, 2025
Test Sample	: Engineering Sample No.: DG2025022823 for Radiated (below 30 MHz) & AC Power Line Conducted Emissions, DG2025041041 for Radiated (above 30 MHz), DG2025022823 for power, DG2025031354 for other.
Standard(s)	: FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan).

Prepared by : Mr. ...

Chella Zheng

Approved by : Welly Zhou

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	14
3.3 PARAMETERS OF TEST SOFTWARE	18
3.4 DUTY CYCLE	20
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	23
3.6 SUPPORT UNITS	23
3.7 CUSTOMER INFORMATION DESCRIPTION	23
4 . AC POWER LINE CONDUCTED EMISSIONS	24
4.1 LIMIT	24
4.2 TEST PROCEDURE	24
4.3 DEVIATION FROM TEST STANDARD	24
4.4 TEST SETUP	25
4.5 EUT OPERATION CONDITIONS	25
4.6 TEST RESULTS	25
5 . RADIATED EMISSIONS	26
5.1 LIMIT	26
5.2 TEST PROCEDURE	27
5.3 DEVIATION FROM TEST STANDARD	28
5.4 TEST SETUP	28
5.5 EUT OPERATION CONDITIONS	30
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	30
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	30
5.8 TEST RESULTS - ABOVE 1000 MHZ	30
6 . BANDWIDTH	31
6.1 LIMIT	31

Table of Contents

	Page
6.2 TEST PROCEDURE	31
6.3 DEVIATION FROM STANDARD	31
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULTS	32
7 . MAXIMUM OUTPUT POWER	33
7.1 LIMIT	33
7.2 TEST PROCEDURE	34
7.3 DEVIATION FROM STANDARD	34
7.4 TEST SETUP	34
7.5 EUT OPERATION CONDITIONS	34
7.6 TEST RESULTS	34
8 . POWER SPECTRAL DENSITY	35
8.1 LIMIT	35
8.2 TEST PROCEDURE	35
8.3 DEVIATION FROM STANDARD	35
8.4 TEST SETUP	36
8.5 EUT OPERATION CONDITIONS	36
8.6 TEST RESULTS	36
9 . FREQUENCY STABILITY	37
9.1 LIMIT	37
9.2 TEST PROCEDURE	37
9.3 DEVIATION FROM STANDARD	37
9.4 TEST SETUP	37
9.5 EUT OPERATION CONDITIONS	37
9.6 TEST RESULTS	37
10 . MEASUREMENT INSTRUMENTS LIST	38
11 . EUT TEST PHOTOS	41
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	47
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	50
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	55
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	58

Table of Contents	Page
APPENDIX E - BANDWIDTH	174
APPENDIX F - MAXIMUM OUTPUT POWER	203
APPENDIX G - POWER SPECTRAL DENSITY	232

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2501G023	R00	Original Report.	Jul. 18, 2025	Invalid
BTL-FCCP-2-2501G023	R01	<p>In this report:</p> <ol style="list-style-type: none">1. Modified the brand name in page 1 and page 10.2. Added the test environment of Bandwidth in chapter 2.3.3. Modified the antenna connection method in chapter 3.1.4. Modified the description in chapter 7.2 and chapter 9.6.5. Added the measurement instruments list of Bandwidth in chapter 10.6. Modified the test data of 26 dB Bandwidth in Appendix E. <p>It is a revision of the report BTL-FCCP-2-2501G023 R00. This is a newly released report, replacing the BTL-FCCP-2-2501G023 R00 report.</p>	Jul. 29, 2025	Invalid
BTL-FCCP-2-2501G023	R02	This report modified the antenna connection method in chapter 3.1. It is a revision of the report BTL-FCCP-2-2501G023 R01. This is a newly released report, replacing the BTL-FCCP-2-2501G023 R01 report.	Jul. 30, 2025	Invalid
BTL-FCCP-2-2501G023	R03	This report modified the description in chapter 2. It is a revision of the report BTL-FCCP-2-2501G023 R02. This is a newly released report, replacing the BTL-FCCP-2-2501G023 R02 report.	Jul. 30, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	-----	NOTE (5)	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use 2 detachable antennas with unique connector and 1 permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - Outdoor access point device
 - Indoor access point device
 - Fixed point-to-point access points device
 - Client device
- (5) The item is declared by the manufacturer.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For Radiated Emissions - Above 1GHz test items: Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For other test items: No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{\text{(dB)}}$
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB18 (1m)	CISPR	18 ~ 26.5 GHz	3.56
		26.5 ~ 40 GHz	3.54

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.4 dB
Frequency Stability	2.7 ppm
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	22°C	53%	PoE 48V	Hayden Chen	Mar. 12, 2025
Radiated Emissions- 9kHz to 30MHz	20°C	48%	AC 120V/60Hz	Hayden Chen	Mar. 21, 2025
Radiated Emissions- 30MHz to 1000MHz	25°C	55%	PoE 48V	Calvin Wen	Jun. 06, 2025
Radiated Emissions- Above 1000 MHz	22°C	56%	PoE 48V	Chen Mo	Mar. 21, 2025 - Mar. 22, 2025
	23°C	50%	PoE 48V	Drew Tan	Apr. 11, 2025
	22°C	45%	PoE 48V	Drew Tan	May 15, 2025
Bandwidth	24°C	51%	PoE 48V	Hayden Chen	Apr. 08, 2025
	23°C	50%	PoE 48V	Arvin Tong	Jul. 25, 2025
Maximum Output Power	23-25°C	50-63%	PoE 48V	Meers Zhang Alex Yin	Mar. 12, 2025 - Apr. 24, 2025
Power Spectral Density	24°C	51%	PoE 48V	Hayden Chen	Apr. 08, 2025
	23°C	56%	PoE 48V	Arvin Tong	Apr. 22, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	AX1800 Indoor/Outdoor Wi-Fi 6 Access Point
Brand Name	tp-link
Test Model	EAP603-Outdoor
Series Model	N/A
Model Difference(s)	N/A
Hardware Version	V1
Software Version	V1
Power Source	1# DC Voltage supplied from PoE adapter. Model: POE4824G 2# Supplied from PoE port.
Power Rating	1# I/P: 100-240V~, 50/60Hz, 0.8A O/P: 48.0V---0.5A 24.0W +4,5pins; -7,8pins 2# PoE: 42.5-57V---0.6A 802.3at
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 866.6 Mbps IEEE 802.11ax: up to 1201 Mbps
Maximum Output Power UNII-1	IEEE 802.11ax40: 27.63 dBm (0.5794 W)
Maximum Output Power UNII-2A	IEEE 802.11ax40: 22.93 dBm (0.1963 W)
Maximum Output Power UNII-2C	IEEE 802.11ax40: 22.97 dBm (0.1982 W)
Maximum Output Power UNII-3	IEEE 802.11a: 27.09 dBm (0.5117 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)	IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)	IEEE 802.11n(HT80) IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)			
UNII-1	UNII-1	UNII-1			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)	IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)	IEEE 802.11n(HT80) IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)			
UNII-2A	UNII-2A	UNII-2A			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)	IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)	IEEE 802.11n(HT80) IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)			
UNII-2C	UNII-2C	UNII-2C			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20) IEEE 802.11ax(HE20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40) IEEE 802.11ax(HE40)		IEEE 802.11n(HT80) IEEE 802.11ac(VHT80) IEEE 802.11ax(HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	TP-Link Systems Inc.	N/A	Dipole	RP-SMA	4.07	UNII-1
2	TP-Link Systems Inc.	N/A	Dipole	RP-SMA	4.07	
3	TP-Link Systems Inc.	N/A	Dipole	N/A	4.68	
1	TP-Link Systems Inc.	N/A	Dipole	RP-SMA	4.11	UNII-2A
2	TP-Link Systems Inc.	N/A	Dipole	RP-SMA	4.11	
3	TP-Link Systems Inc.	N/A	Dipole	N/A	4.68	
1	TP-Link Systems Inc.	N/A	Dipole	RP-SMA	5.14	UNII-2C
2	TP-Link Systems Inc.	N/A	Dipole	RP-SMA	5.14	
3	TP-Link Systems Inc.	N/A	Dipole	N/A	4.39	
1	TP-Link Systems Inc.	N/A	Dipole	RP-SMA	4.50	UNII-3
2	TP-Link Systems Inc.	N/A	Dipole	RP-SMA	4.50	
3	TP-Link Systems Inc.	N/A	Dipole	N/A	4.47	

Note:

- 1) This EUT supports CDD, and all antenna gains are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$. For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the UNII-1 Directional gain=4.68, the UNII-2A Directional gain=4.68, the UNII-2C Directional gain=5.14, the UNII-3 Directional gain=4.50. For power spectral density measurements, Directional gain(each angle)= $10\log[(10^{G1/20}+10^{G2/20}+\dots+10^{GN/20})^2/N] \text{dBi}$. So the UNII-1 Directional gain(each angle)= $10\log[(10^{3.93/20}+10^{4.26/20}+10^{-5.57/20})^2/3] \text{dBi}=6.67$, the UNII-2A Directional gain(each angle)= $10\log[(10^{1.11/20}+10^{4.30/20}+10^{0.60/20})^2/3] \text{dBi}=6.93$, the UNII-2C Directional gain(each angle)= $10\log[(10^{3.04/20}+10^{2.97/20}+10^{0.13/20})^2/3] \text{dBi}=6.92$, the UNII-3 Directional gain(each angle)= $10\log[(10^{2.78/20}+10^{-0.32/20}+10^{1.65/20})^2/3] \text{dBi}=6.23$. Then, the UNII-1 power spectral density limit is $17-(6.67-6)=16.33$, the UNII-2A power spectral density limit is $11-(6.93-6)=10.07$, the UNII-2C power spectral density limit is $11-(6.92-6)=10.08$, the UNII-3 power spectral density limit is $30-(6.23-6)=29.77$.
- 2) The maximum direction gain at any elevation angle above 30 degrees as measured from the horizon is -7.34 dB.
- 3) Beamforming Gain: 5 dB.

4. Table for Antenna Configuration:

For Non Beamforming:

Operating Mode	TX Mode	3TX
IEEE 802.11a		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2 + Ant. 3)

For Beamforming:

Operating Mode	TX Mode	3TX
IEEE 802.11n(HT20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11n(HT40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ac(VHT80)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE20)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE40)		V (Ant. 1 + Ant. 2 + Ant. 3)
IEEE 802.11ax(HE80)		V (Ant. 1 + Ant. 2 + Ant. 3)

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 7	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 15	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 16	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 17	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 18	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 19	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 20	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 21	TX AX(HE80) Mode Channel 106/122 (UNII-2C)
Mode 22	TX A Mode Channel 149/157/165 (UNII-3)
Mode 23	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 24	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 25	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 26	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 28	TX AX(HE80) Mode Channel 155 (UNII-3)
Mode 29	TX AX(HE40) Mode Channel 46 (UNII-1)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test

Final Test Mode	Description
Mode 29	TX AX(HE40) Mode Channel 46 (UNII-1)

Radiated Emissions Test - Below 1GHz

Final Test Mode	Description
Mode 29	TX AX(HE40) Mode Channel 46 (UNII-1)

Radiated Emissions Test - Above 1GHz

Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 7	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 15	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 16	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 17	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 18	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 19	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 20	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 21	TX AX(HE80) Mode Channel 106/122 (UNII-2C)
Mode 22	TX A Mode Channel 149/157/165 (UNII-3)
Mode 23	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 24	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 25	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 26	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 28	TX AX(HE80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX AX(HE20) Mode Channel 36/40/48 (UNII-1)
Mode 6	TX AX(HE40) Mode Channel 38/46 (UNII-1)
Mode 7	TX AX(HE80) Mode Channel 42 (UNII-1)
Mode 8	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 10	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 11	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 12	TX AX(HE20) Mode Channel 52/60/64 (UNII-2A)
Mode 13	TX AX(HE40) Mode Channel 54/62 (UNII-2A)
Mode 14	TX AX(HE80) Mode Channel 58 (UNII-2A)
Mode 15	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 16	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 17	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 18	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 19	TX AX(HE20) Mode Channel 100/116/140 (UNII-2C)
Mode 20	TX AX(HE40) Mode Channel 102/110/134 (UNII-2C)
Mode 21	TX AX(HE80) Mode Channel 106/122 (UNII-2C)
Mode 22	TX A Mode Channel 149/157/165 (UNII-3)
Mode 23	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 24	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 25	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 26	TX AX(HE20) Mode Channel 149/157/165 (UNII-3)
Mode 27	TX AX(HE40) Mode Channel 151/159 (UNII-3)
Mode 28	TX AX(HE80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AX(HE40) Mode Channel 46 (UNII-1) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.
- (6) For Beamforming operation, the manufacturer automatically reduces power based on a factor calculated as the difference between the beamforming directional gain and the CDD directional power gain. Thus, only the CDD mode was evaluated in this report.
- (7) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.
- (8) IEEE 802.11ax mode only support full RU, so only the full RU is evaluated and measured inside report.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	QATool_Db 0.0.2.78		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	19	19	19
IEEE 802.11ac(VHT20)	19.5	20	20
IEEE 802.11ax(HE20)	19.5	19.5	19
Frequency (MHz)	5190	5230	
IEEE 802.11ac(VHT40)	19	21.5	
IEEE 802.11ax(HE40)	18.5	21.5	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	15		
IEEE 802.11ax(HE80)	14.5		

UNII-2A			
Test Software Version	QATool_Db 0.0.2.78		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	13.5	14	14
IEEE 802.11ac(VHT20)	13.5	13.5	13.5
IEEE 802.11ax(HE20)	13.5	14	13.5
Frequency (MHz)	5270	5310	
IEEE 802.11ac(VHT40)	15.5	16	
IEEE 802.11ax(HE40)	15.5	16	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	14.5		
IEEE 802.11ax(HE80)	13.5		

UNII-2C			
Test Software Version	QATool_Db 0.0.2.78		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	13.5	13.5	13.5
IEEE 802.11ac(VHT20)	13.5	13.5	13.5
IEEE 802.11ax(HE20)	14	13.5	14
Frequency (MHz)	5510	5550	5670
IEEE 802.11ac(VHT40)	16	16	16
IEEE 802.11ax(HE40)	16	16	16
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	16.5	16.5	
IEEE 802.11ax(HE80)	16.5	16.5	

UNII-3			
Test Software Version	QATool_Db 0.0.2.78		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	20.5	20.5	20.5
IEEE 802.11ac(VHT20)	20.5	20.5	20.5
IEEE 802.11ax(HE20)	19.5	19.5	19.5
Frequency (MHz)	5755	5795	
IEEE 802.11ac(VHT40)	19.5	19.5	
IEEE 802.11ax(HE40)	19.5	19.5	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	21		
IEEE 802.11ax(HE80)	21		

3.4 DUTY CYCLE


If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


IEEE 802.11a

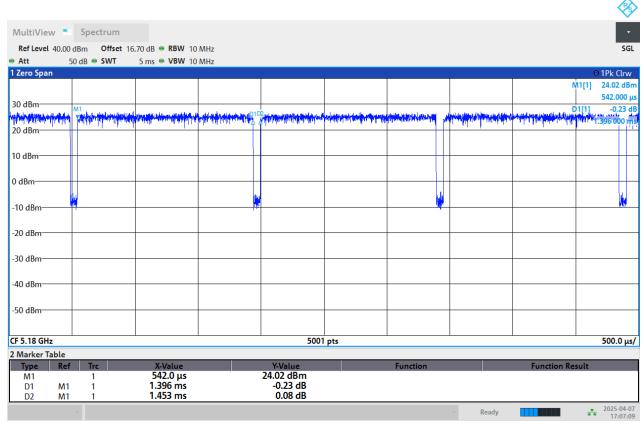

05:07:10 PM 04/07/2025

Duty cycle = $1.396 \text{ ms} / 1.453 \text{ ms} = 96.08\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.17$


IEEE 802.11ac(VHT20)

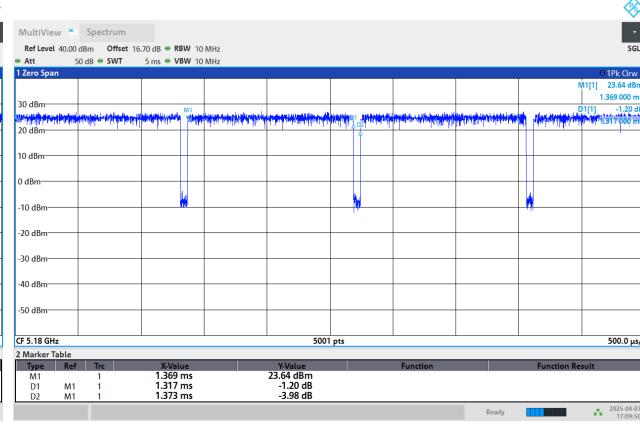

05:09:50 PM 04/07/2025

Duty cycle = $1.317 \text{ ms} / 1.373 \text{ ms} = 95.92\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.18$


IEEE 802.11ac(VHT40)

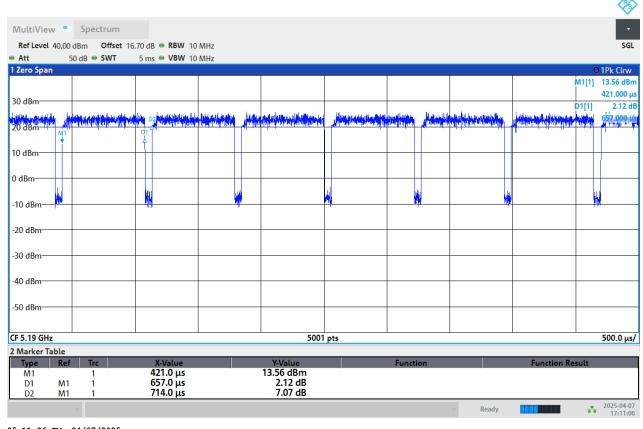

05:11:06 PM 04/07/2025


Duty cycle = $0.657 \text{ ms} / 0.714 \text{ ms} = 92.02\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.36$

IEEE 802.11ac(VHT80)

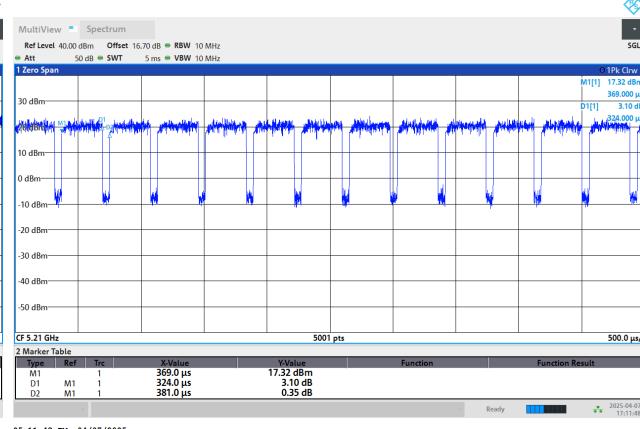


05:11:48 PM 04/07/2025


Duty cycle = $0.324 \text{ ms} / 0.381 \text{ ms} = 85.04\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.70$

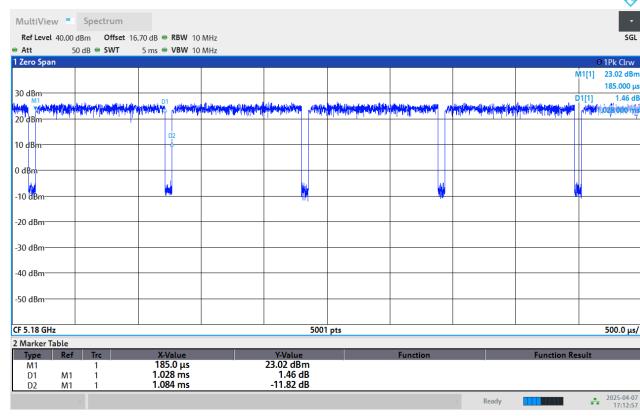IEEE 802.11ax(HE20)


Duty cycle = 1.028 ms / 1.084 ms = 94.83%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.23$

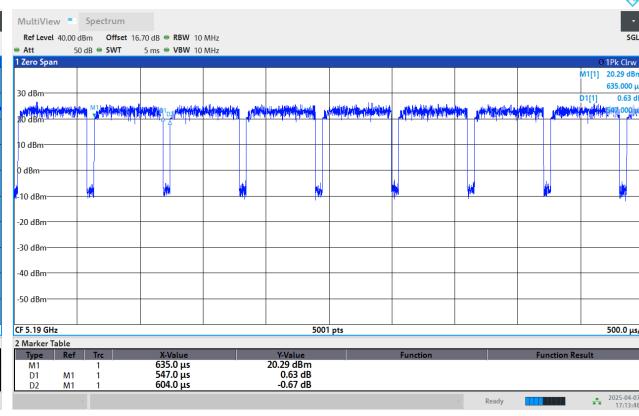IEEE 802.11ax(HE40)


Duty cycle = 0.547 ms / 0.604 ms = 90.56%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.43$

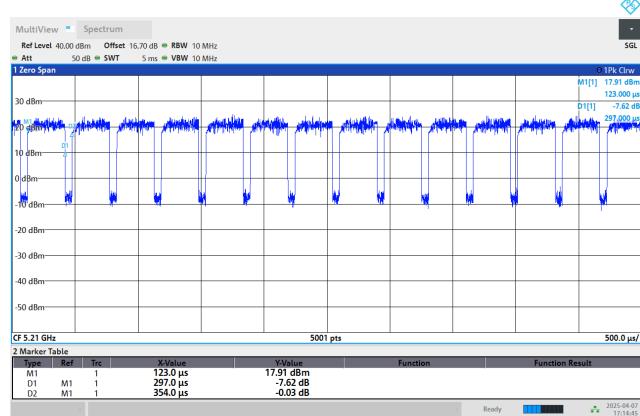IEEE 802.11ax(HE80)


Duty cycle = 0.297 ms / 0.354 ms = 83.90%
 Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.76$

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 716 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 759 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1522 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3086 Hz (Duty cycle < 98%).

For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 973 Hz (Duty cycle < 98%).


For IEEE 802.11ax(HE40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1828 Hz (Duty cycle < 98%).

For IEEE 802.11ax(HE80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3367 Hz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

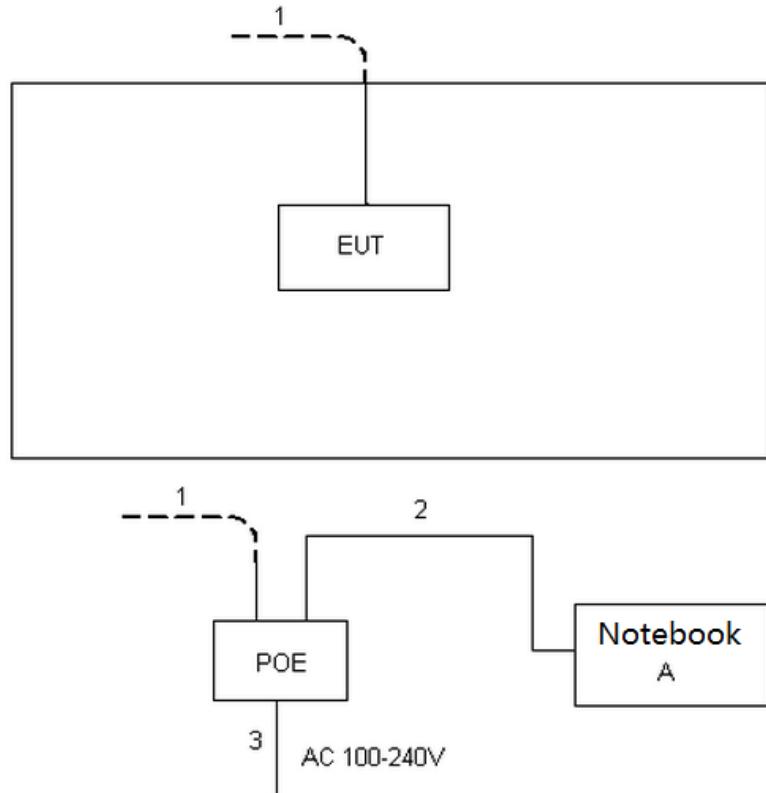

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	RJ45 Cable	NO	NO	10m
2	Network Cable	NO	NO	1m
3	AC Cable	NO	NO	1.5m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

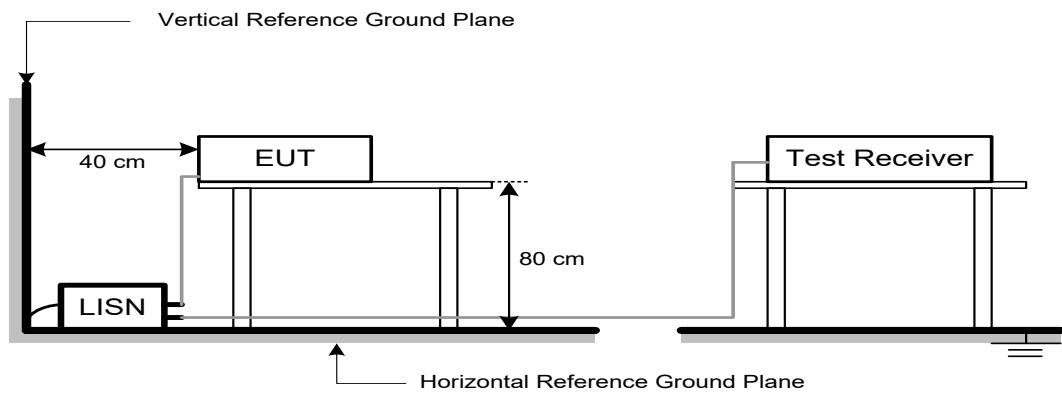

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dB μ V/m)	Harmonic at 1m (dB μ V/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

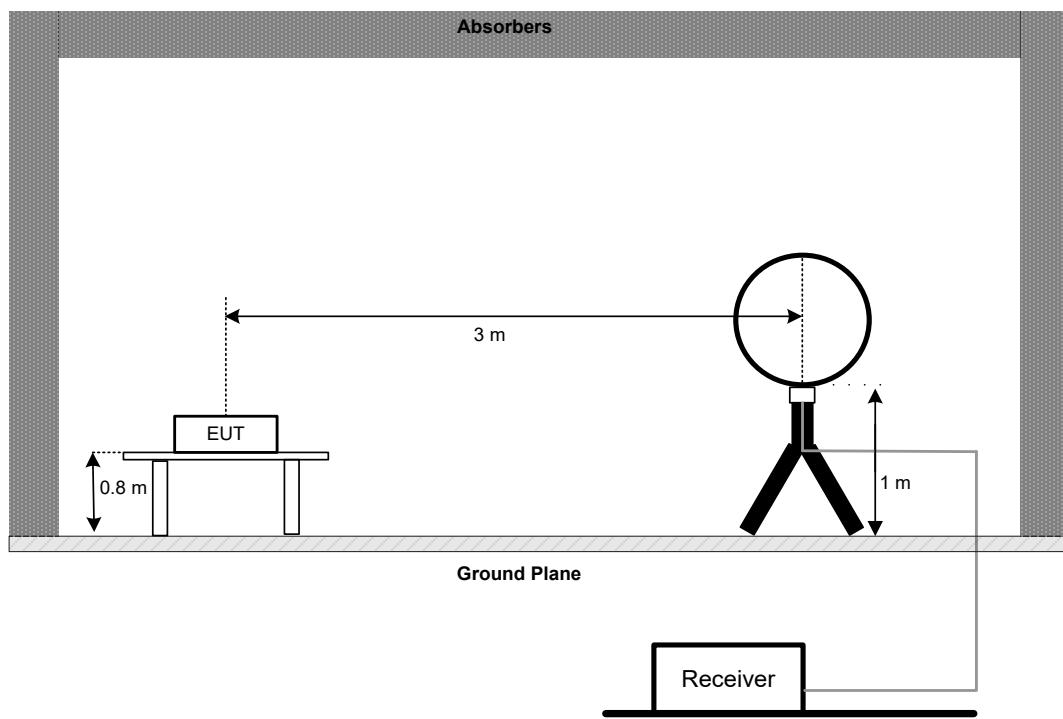


30 MHz to 1 GHz

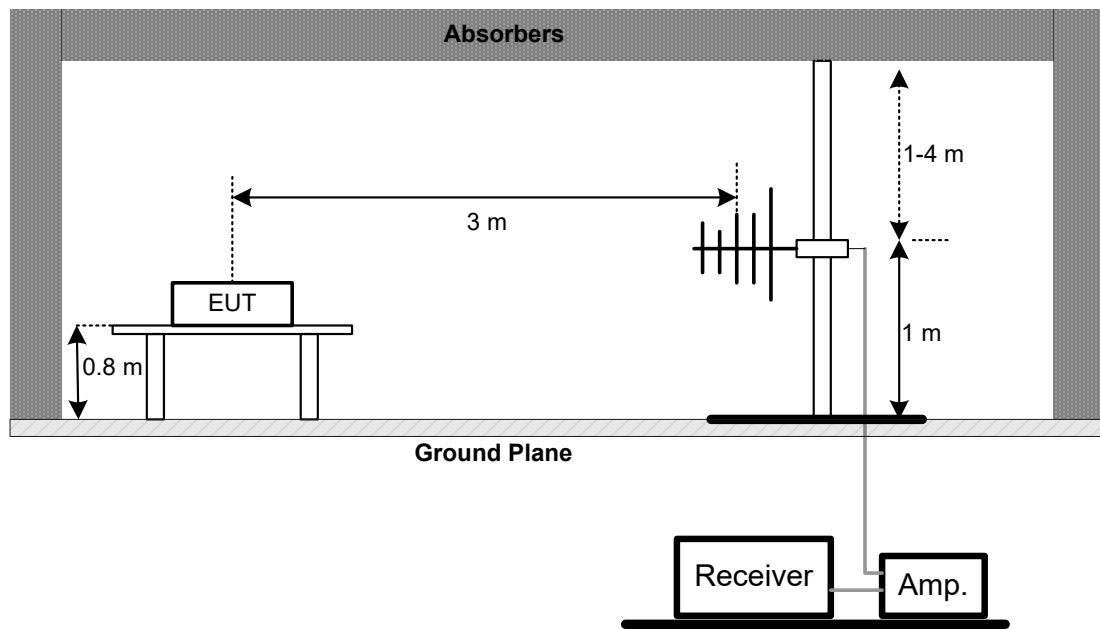

**Above 1 GHz
Band edge & Harmonic (1 GHz to 18 GHz)**

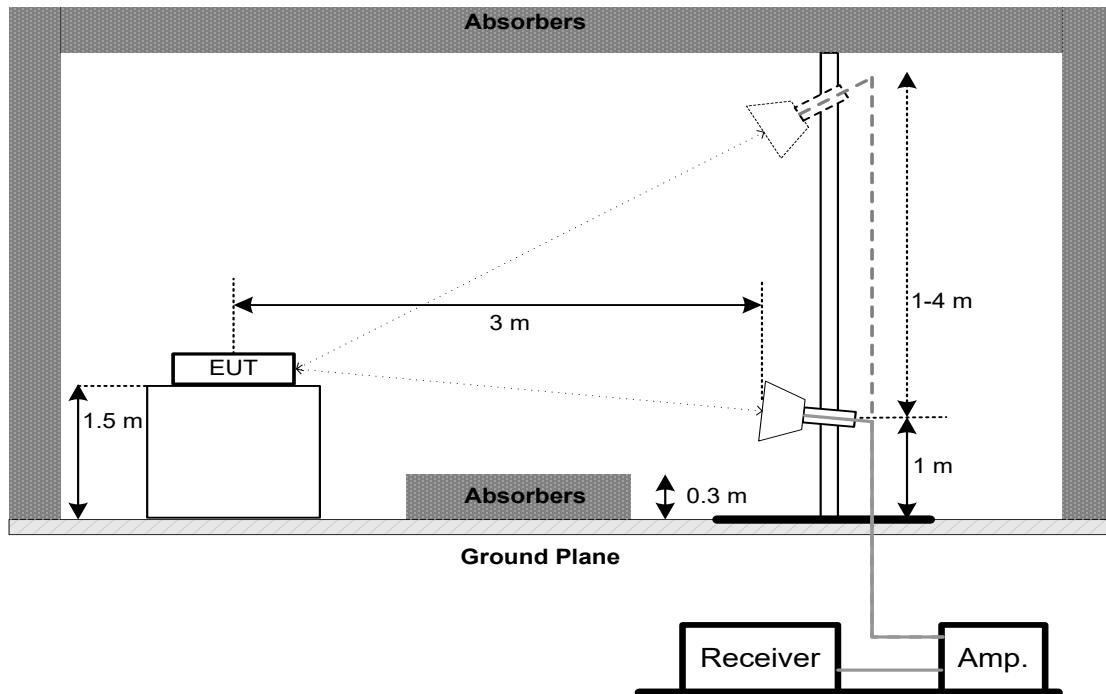

Harmonic (18 GHz to 40 GHz)

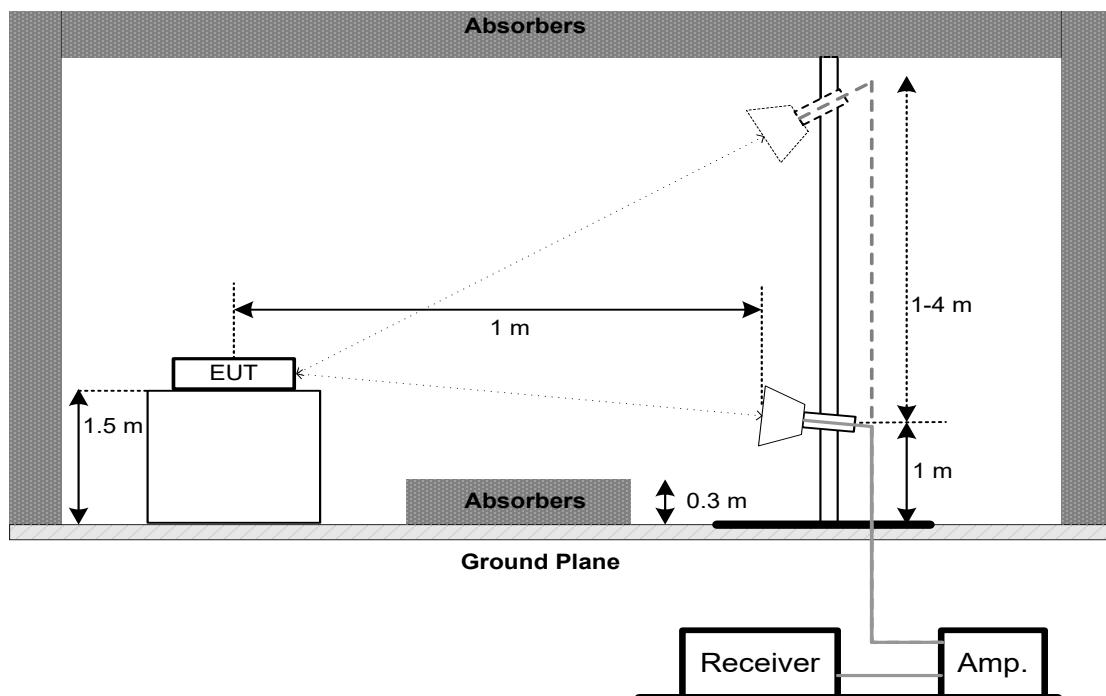

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	> 26 dB Bandwidth
RBW	Appromixately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- a. For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- b. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26dB Bandwidth in megahertz.


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- b. The test was performed in accordance with method II.E.3.a) and II.H.1 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

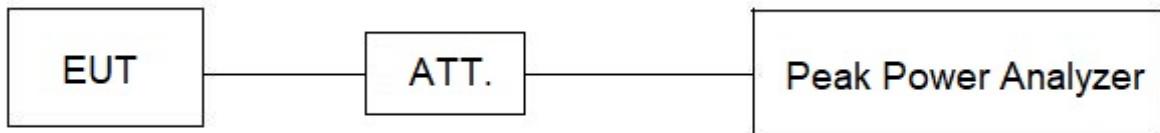

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz	5150-5250
		Client device: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE


- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Span	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
- c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- d. User manual temperature is -30°C~70°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

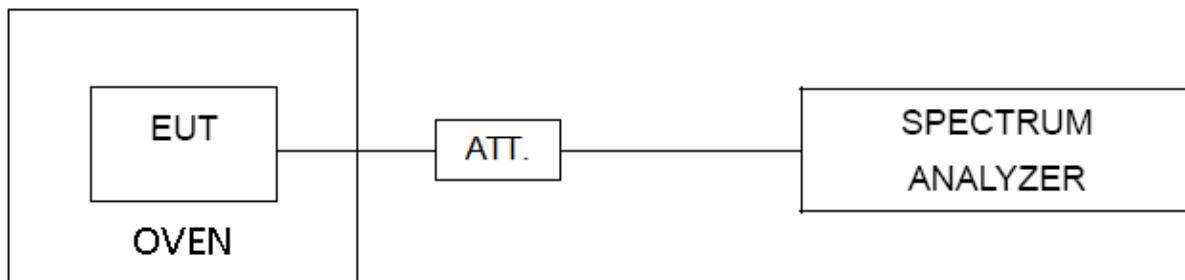

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

N/A.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-00 1	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 06, 2025
3	Cable	N/A	RW4950-3.8A-NMSM-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1462	Dec. 14, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 14, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 06, 2025
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 06, 2025
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 06, 2025
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 1 GHz - 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMSM-1.3M	N/A	Apr. 06, 2026
5	Cable	RegalWay	RWLP50-2.6A-3.5M2.9 2MRA-3M	N/A	Apr. 06, 2026
6	Cable	RegalWay	RWLP50-4.0A-SMSM-9M	N/A	Apr. 06, 2026
7	966 Chamber room	ETS	RFD-100 (SVSWR)	Q2179	Jan. 07, 2026
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9969	N/A	Oct. 29, 2025

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Oct. 29, 2025
4	966 Chamber room	ETS	RFD-100 (SVSWR)	Q2179	Jan. 07, 2026
5	Cable	RegalWay	RWLP50-2.6A-2.92M2.92M-2M	N/A	Jan. 07, 2026
6	Cable	RegalWay	RWLP50-2.6A-3.5M2.9 2MMRA-6M	N/A	Jan. 07, 2026
7	Preamplifier	EMC INSTRUMENT	EMC184045SE	980793	Jan. 10, 2026
8	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	0 1046	Jul. 22, 2025

For test date: Apr. 08, 2025 ~ Apr. 22, 2025

 Bandwidth &
 Power Spectral Density

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	FSV Signal & Spectrum Analyzer	R&S	FSV3044	101682	Oct. 17, 2025
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	Cable	RegalWay	20210802 013	RWP50-402-SM SM-1M	N/A

For test date: Jul. 25, 2025

Bandwidth

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026
2	Measurement Software	BTL	BTL Conducted Test	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	Cable	RegalWay	20210802 013	RWP50-402-SM SM-1M	N/A



Maximum Output Power



Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.


All calibration period of equipment list is one year.


11. EUT TEST PHOTOS**AC Power Line Conducted Emissions Test Photos**

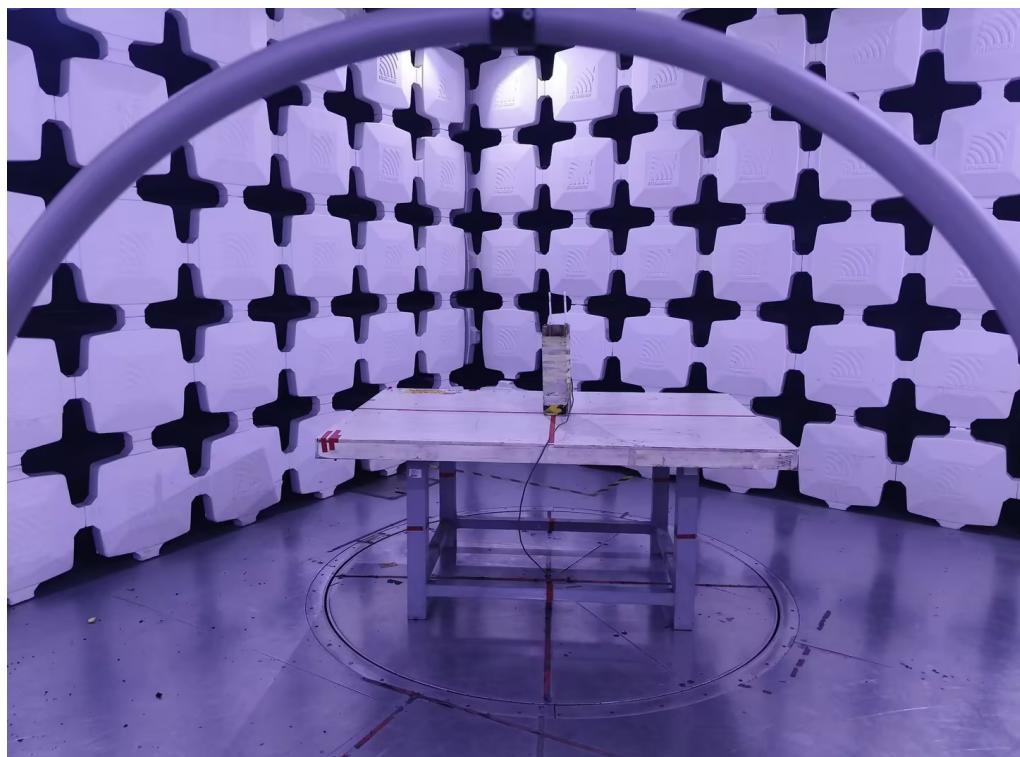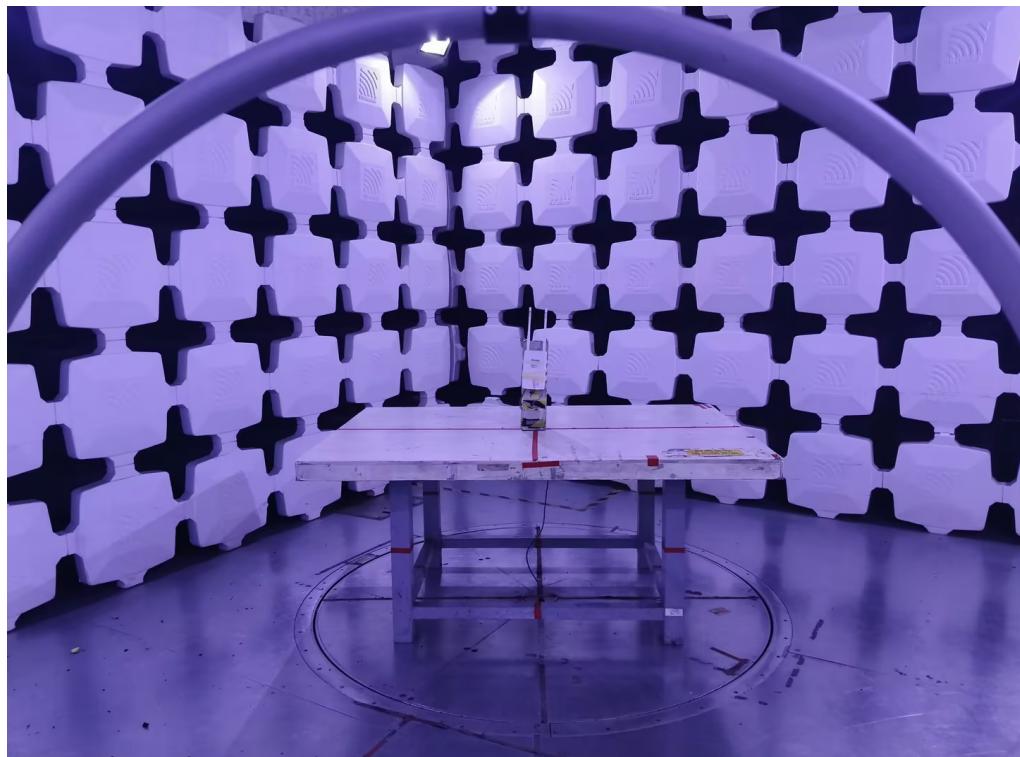Radiated Emissions Test Photos**9 kHz to 30 MHz**

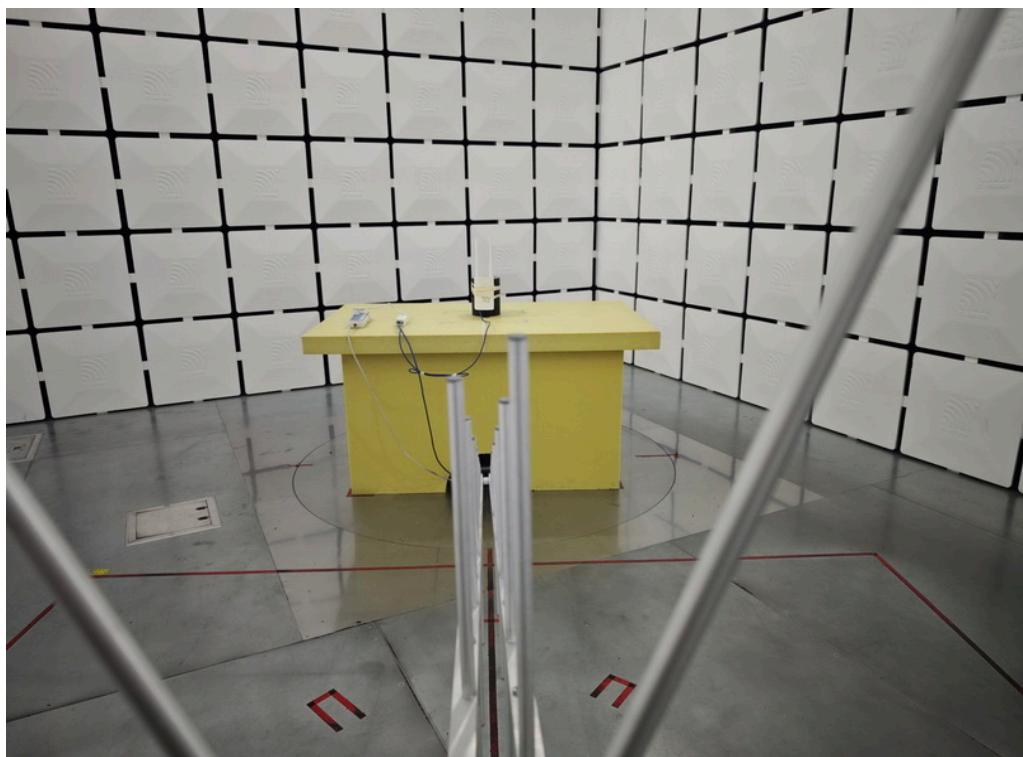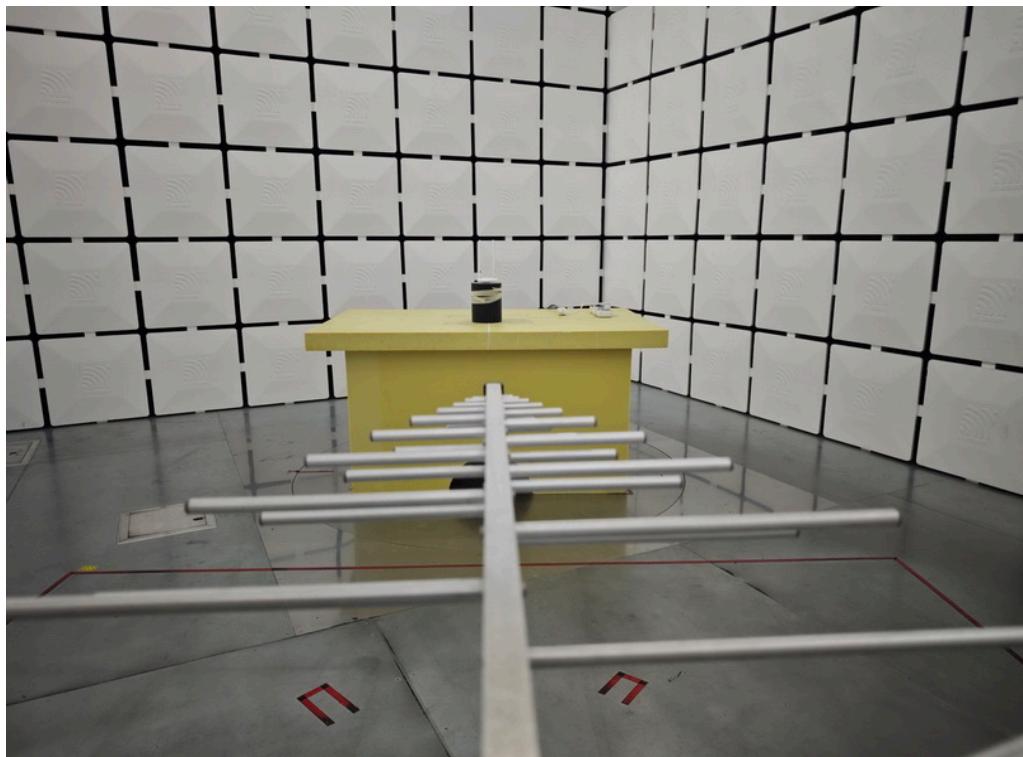Radiated Emissions Test Photos**30 MHz to 1 GHz**

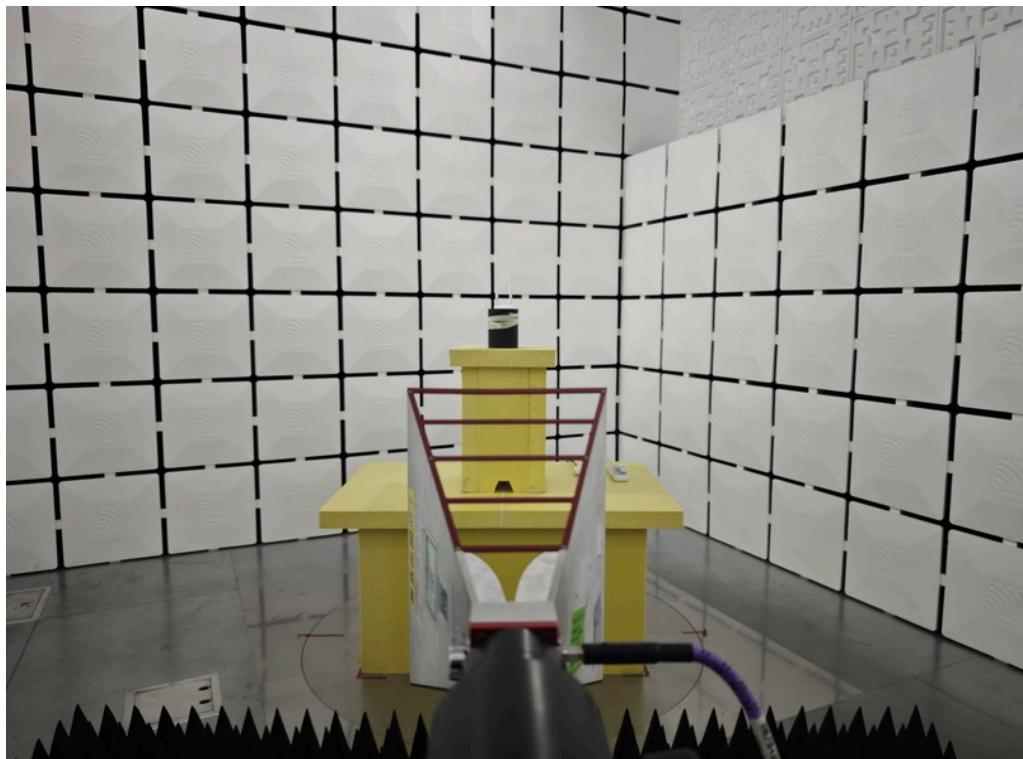
Radiated Emissions Test Photos**Band edge & Harmonic(1 GHz to 18 GHz)**

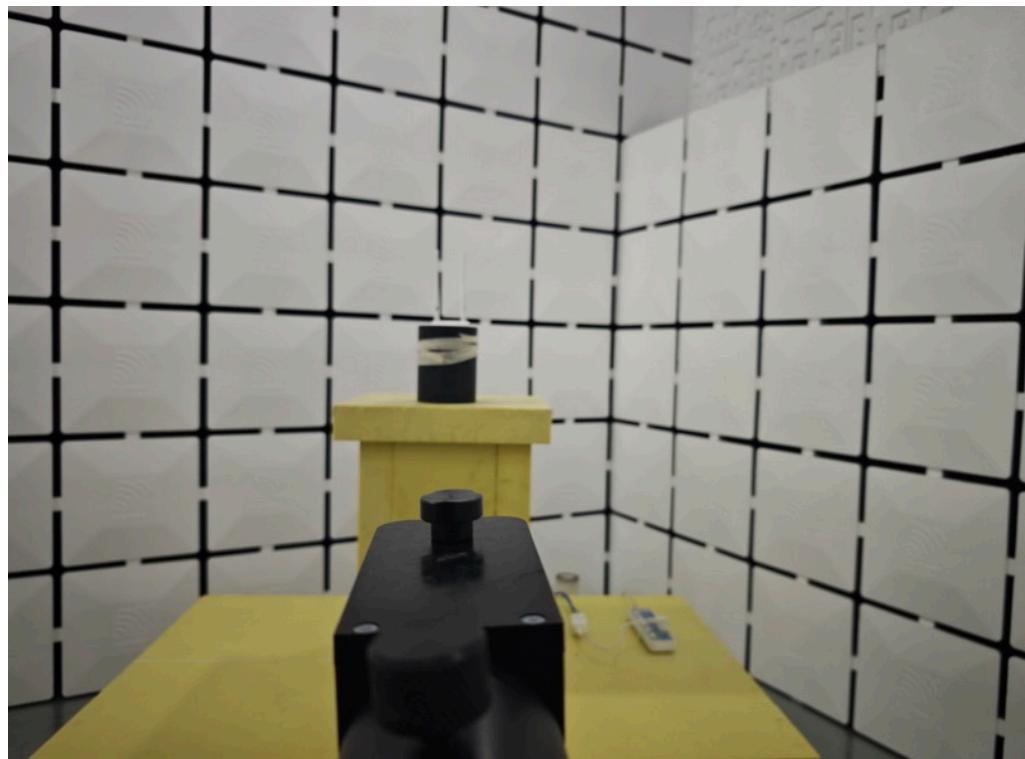Radiated Emissions Test Photos**Harmonic(18 GHz to 40 GHz)**

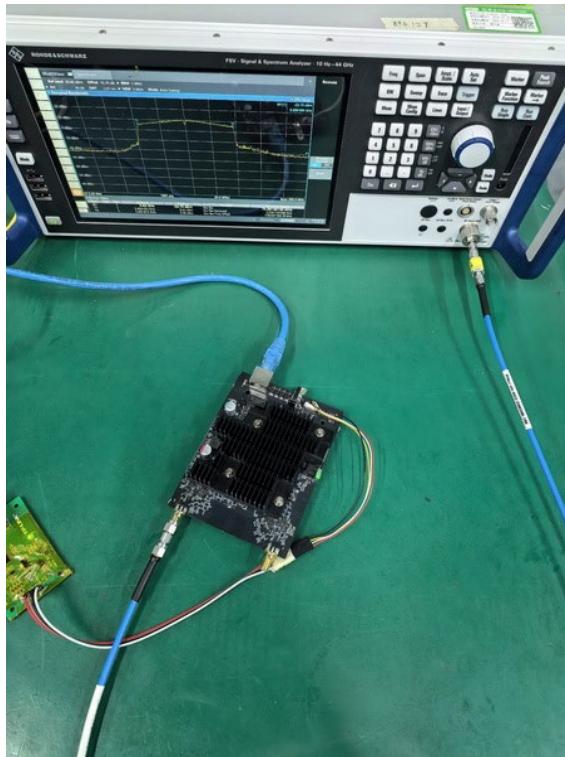Conducted Test Photos

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX AX(HE40) Mode Channel 46 (UNII-1)	Phase	Line
-----------	--------------------------------------	-------	------

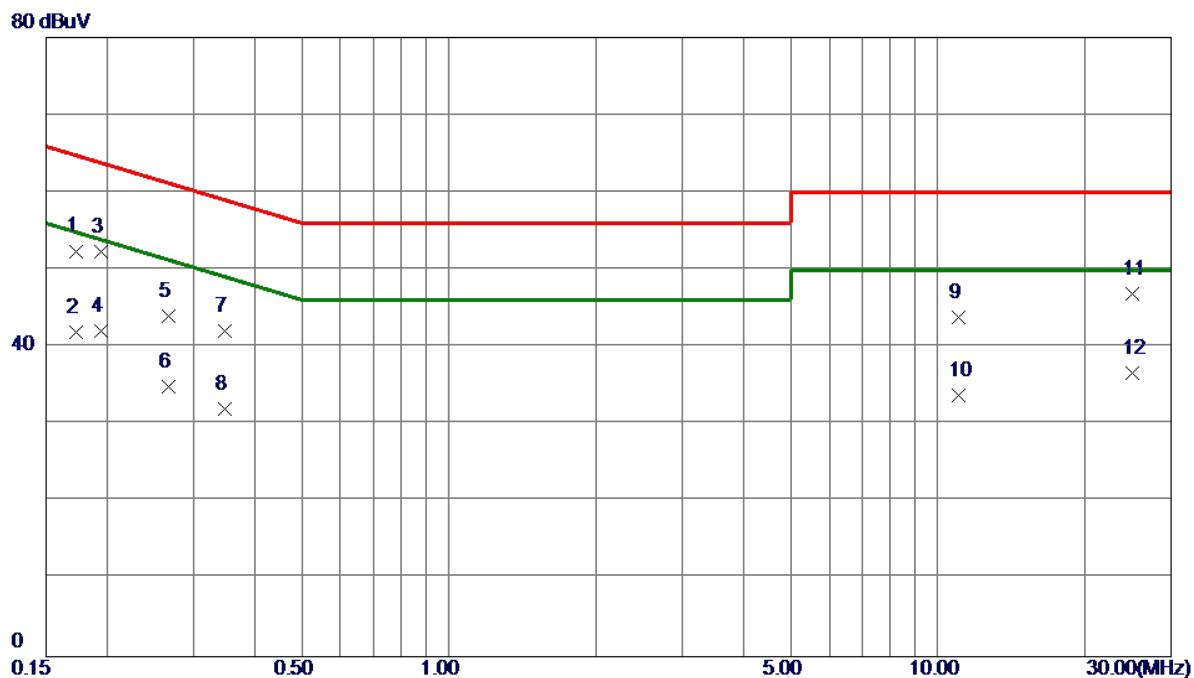


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1725	42.48	9.92	52.40	64.84	-12.44	QP	
2	0.1725	32.01	9.92	41.93	54.84	-12.91	AVG	
3 *	0.1949	42.36	9.90	52.26	63.83	-11.57	QP	
4	0.1949	32.21	9.90	42.11	53.83	-11.72	AVG	
5	0.2672	34.13	9.91	44.04	61.20	-17.16	QP	
6	0.2672	24.90	9.91	34.81	51.20	-16.39	AVG	
7	0.3480	32.17	9.93	42.10	59.01	-16.91	QP	
8	0.3480	22.00	9.93	31.93	49.01	-17.08	AVG	
9	11.0444	31.55	12.33	43.88	60.00	-16.12	QP	
10	11.0444	21.50	12.33	33.83	50.00	-16.17	AVG	
11	24.9585	31.33	15.58	46.91	60.00	-13.09	QP	
12	24.9585	21.10	15.58	36.68	50.00	-13.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode Channel 46 (UNII-1)	Phase	Neutral
-----------	--------------------------------------	-------	---------

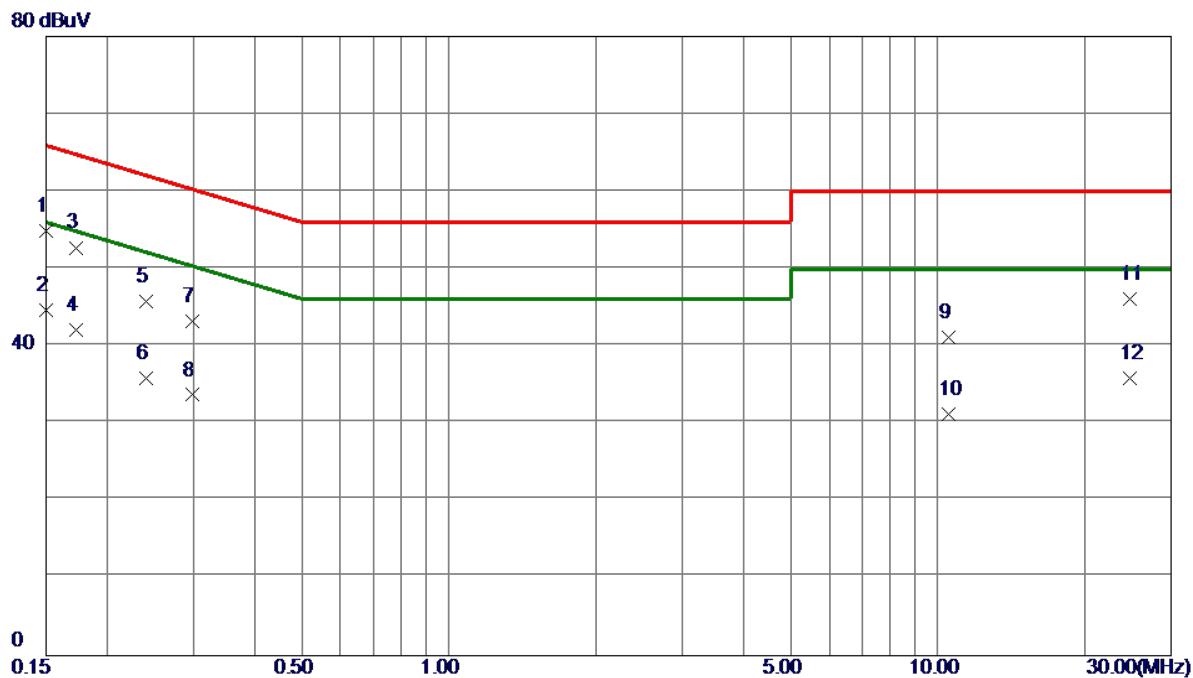


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	44.93	9.97	54.90	66.00	-11.10	QP	
2	0.1500	34.60	9.97	44.57	56.00	-11.43	AVG	
3	0.1725	42.75	9.97	52.72	64.84	-12.12	QP	
4	0.1725	32.10	9.97	42.07	54.84	-12.77	AVG	
5	0.2400	35.73	9.98	45.71	62.10	-16.39	QP	
6	0.2400	25.90	9.98	35.88	52.10	-16.22	AVG	
7	0.2985	33.21	9.98	43.19	60.28	-17.09	QP	
8	0.2985	23.70	9.98	33.68	50.28	-16.60	AVG	
9	10.5045	28.95	12.13	41.08	60.00	-18.92	QP	
10	10.5045	19.00	12.13	31.13	50.00	-18.87	AVG	
11	24.6435	30.56	15.51	46.07	60.00	-13.93	QP	
12	24.6435	20.40	15.51	35.91	50.00	-14.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX AX(HE40) Mode Channel 46 (UNII-1)	Polarization	Ant 0°
-----------	--------------------------------------	--------------	--------

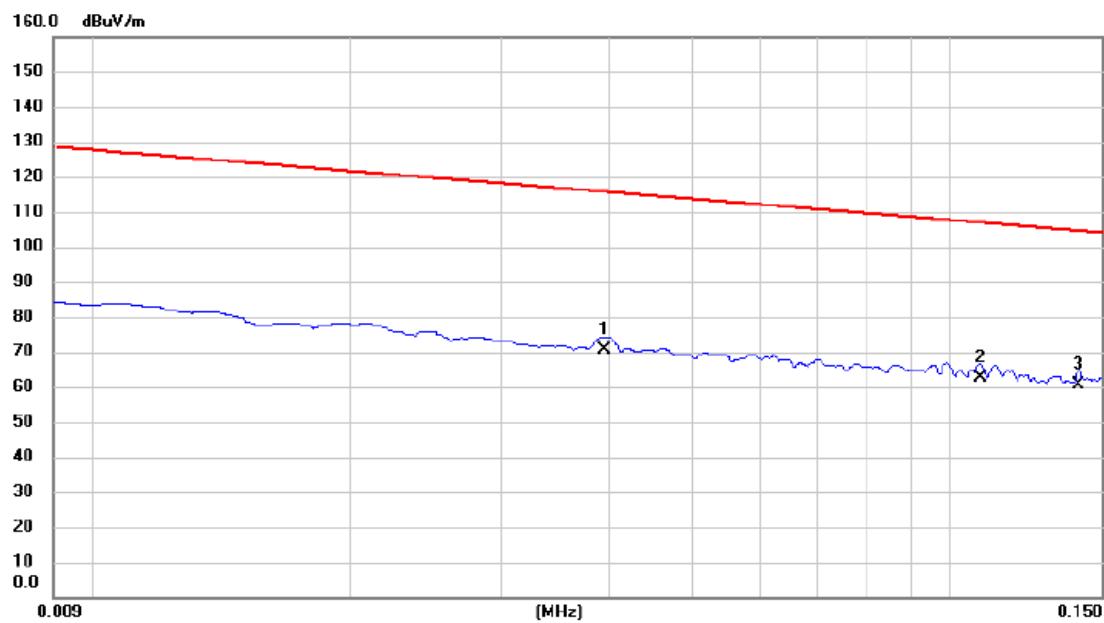


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0396	49.36	21.19	70.55	115.65	-45.10	AVG	
2		0.1084	41.43	21.33	62.76	106.91	-44.15	QP	
3	*	0.1411	39.47	21.28	60.75	104.62	-43.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode Channel 46 (UNII-1)	Polarization	Ant 0°
-----------	--------------------------------------	--------------	--------

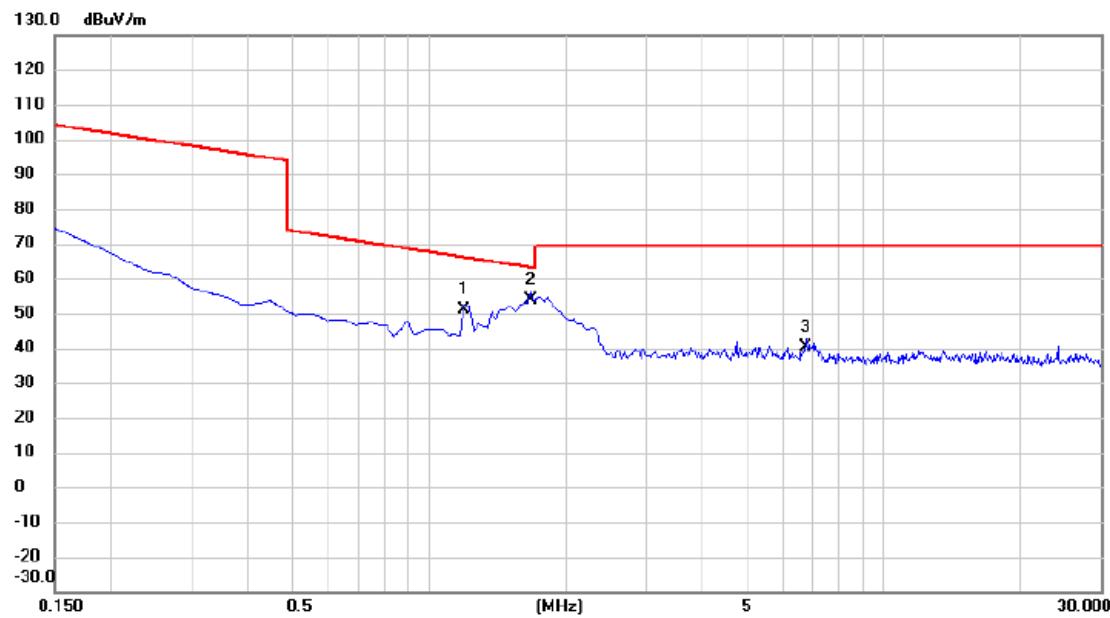


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		1.1947	29.74	21.18	50.92	66.06	-15.14	QP
2	*	1.6724	32.48	21.14	53.62	63.14	-9.52	QP
3		6.7470	19.26	21.14	40.40	69.54	-29.14	QP

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode Channel 46 (UNII-1)	Polarization	Ant 90°
-----------	--------------------------------------	--------------	---------

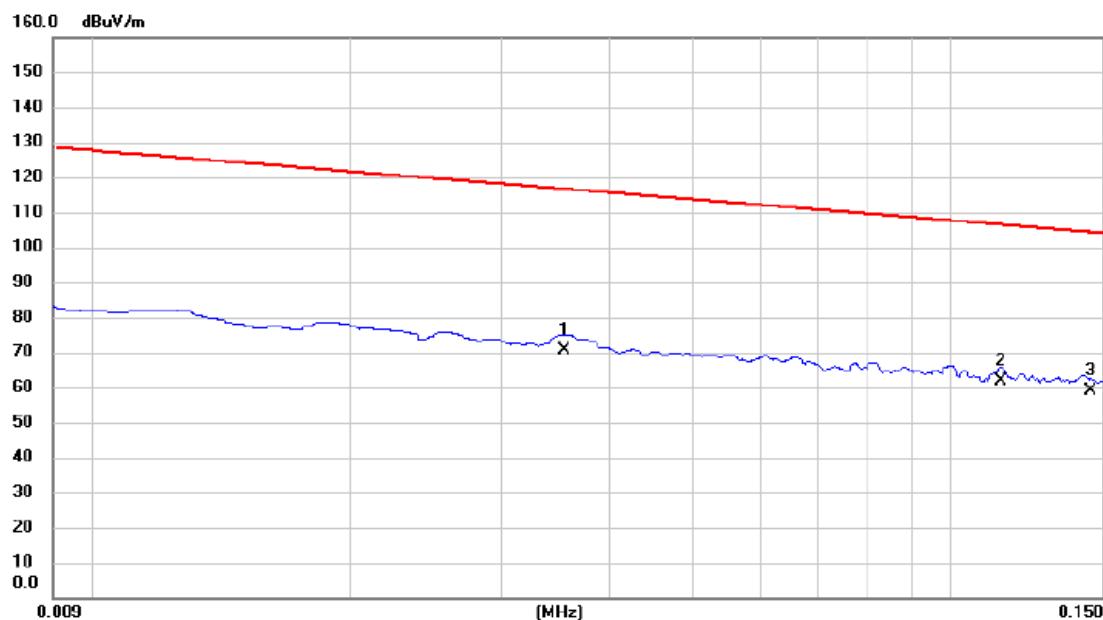


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		0.0355	49.47	21.17	70.64	116.60	-45.96	AVG	
2	*	0.1143	40.58	21.32	61.90	106.45	-44.55	AVG	
3		0.1452	37.63	21.27	58.90	104.37	-45.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode Channel 46 (UNII-1)	Polarization	Ant 90°
-----------	--------------------------------------	--------------	---------

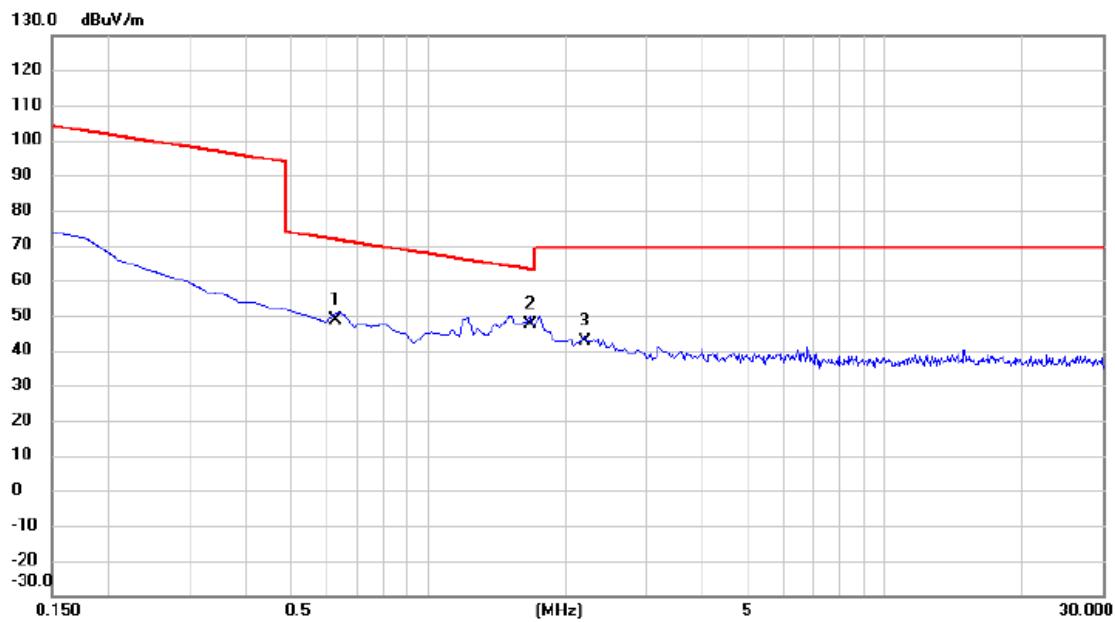


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.6276	27.41	21.10	48.51	71.65	-23.14	QP
2	*	1.6724	26.34	21.14	47.48	63.14	-15.66	QP
3		2.2096	21.58	21.11	42.69	69.54	-26.85	QP

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX AX(HE40) Mode Channel 46 (UNII-1)	Polarization	Vertical
-----------	--------------------------------------	--------------	----------

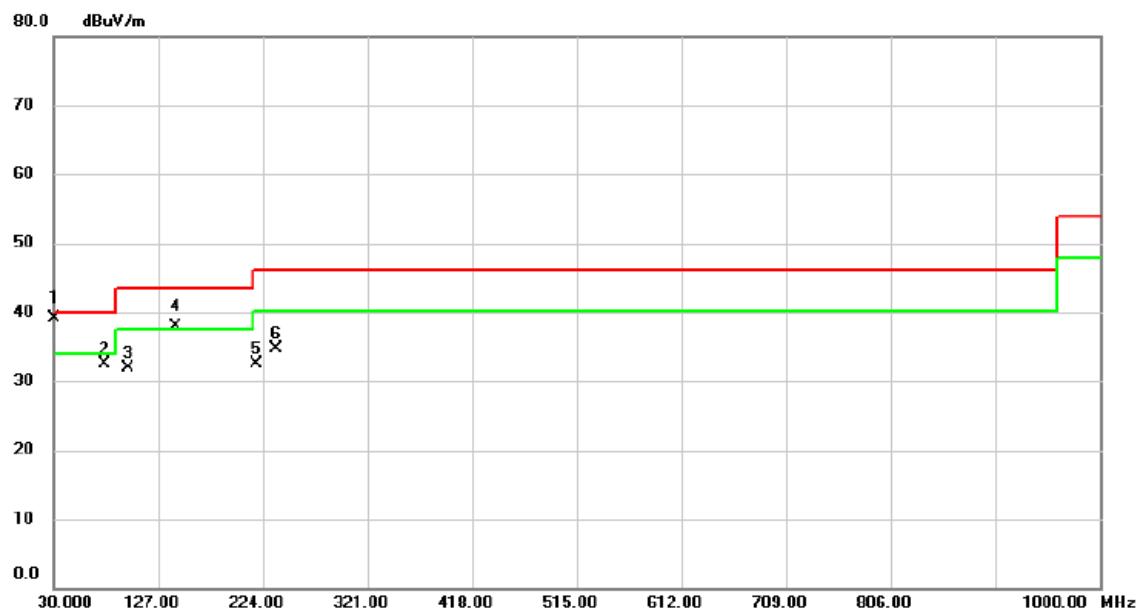


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1	*	30.970	51.84	-12.78	39.06	40.00	-0.94	QP	
2		77.530	46.96	-14.55	32.41	40.00	-7.59	peak	
3		98.870	47.44	-15.58	31.86	43.52	-11.66	peak	
4	!	143.490	48.92	-11.00	37.92	43.52	-5.60	QP	
5		218.180	46.02	-13.56	32.46	46.02	-13.56	peak	
6		236.610	46.90	-12.20	34.70	46.02	-11.32	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE40) Mode Channel 46 (UNII-1)	Polarization	Horizontal
-----------	--------------------------------------	--------------	------------

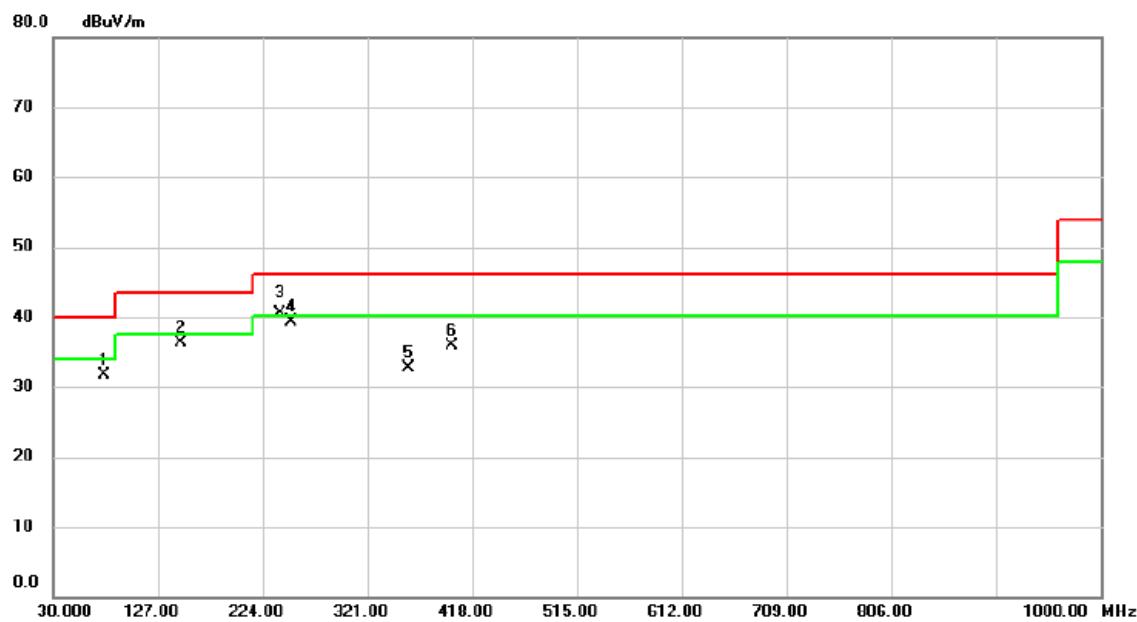


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
1		77.530 MHz	46.19 dBuV	-14.55 dB	31.64 dBuV/m	40.00 dBuV/m	-8.36	peak	
2		148.340 MHz	47.01 dBuV	-10.73 dB	36.28 dBuV/m	43.52 dBuV/m	-7.24	peak	
3 *		240.490 MHz	52.42 dBuV	-11.86 dB	40.56 dBuV/m	46.02 dBuV/m	-5.46	QP	
4		250.190 MHz	50.65 dBuV	-11.37 dB	39.28 dBuV/m	46.02 dBuV/m	-6.74	peak	
5		358.830 MHz	41.24 dBuV	-8.46 dB	32.78 dBuV/m	46.02 dBuV/m	-13.24	peak	
6		399.570 MHz	43.29 dBuV	-7.39 dB	35.90 dBuV/m	46.02 dBuV/m	-10.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

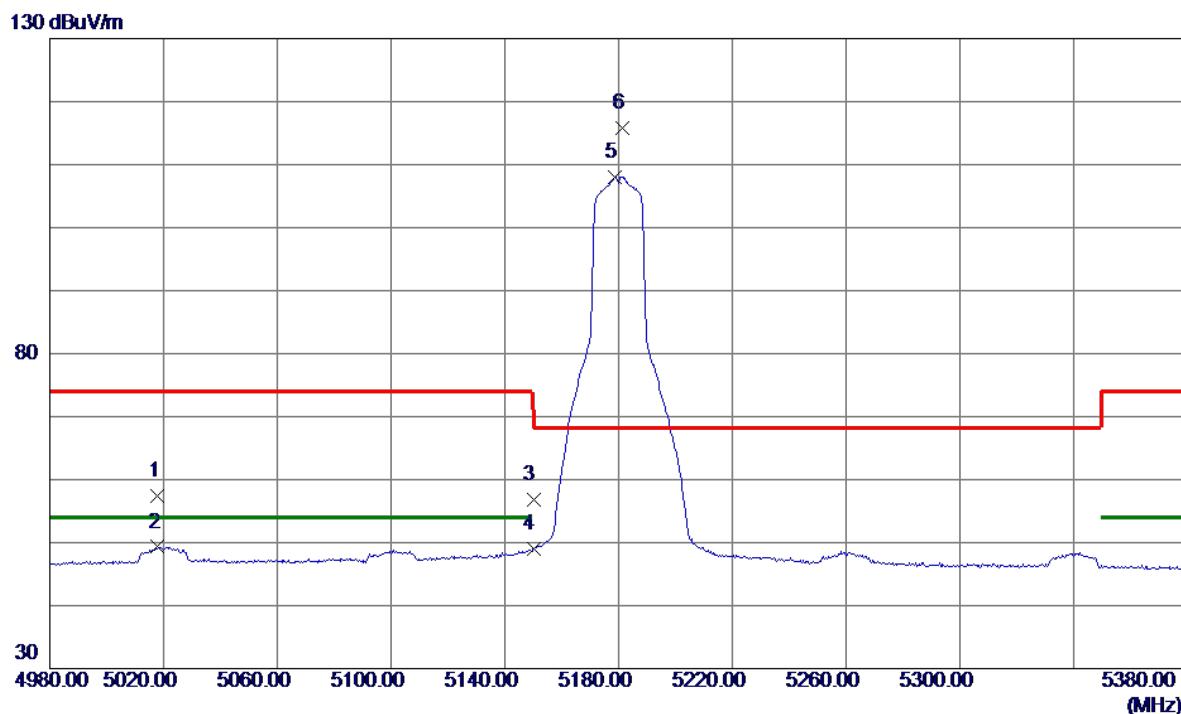


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5018.0000	42.99	14.32	57.31	74.00	-16.69	Peak	
2	5018.0000	34.98	14.32	49.30	54.00	-4.70	AVG	
3	5150.0000	42.44	14.43	56.87	74.00	-17.13	Peak	
4	5150.0000	34.55	14.43	48.98	54.00	-5.02	AVG	
5	5178.8000	93.63	14.46	108.09	999.00	-890.91	AVG	No Limit
6 *	5181.2000	101.25	14.46	115.71	68.20	47.51	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

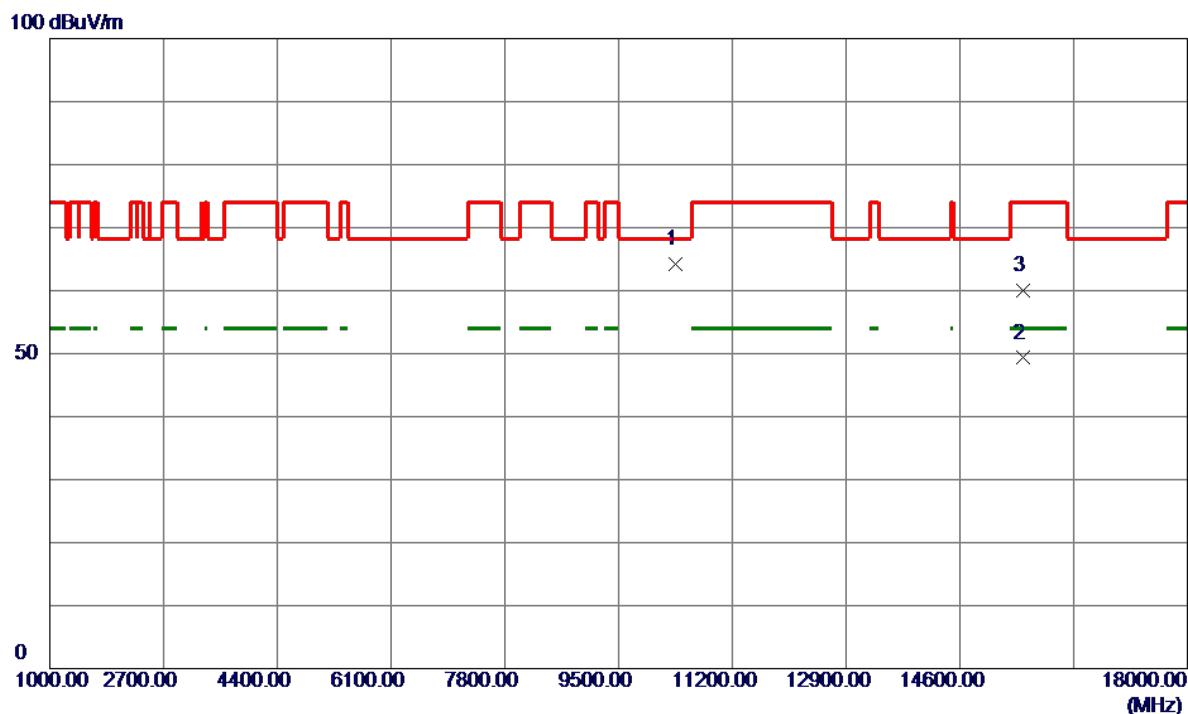


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10358.1000	53.46	10.76	64.22	68.20	-3.98	Peak	
2	15541.8500	37.84	11.46	49.30	54.00	-4.70	AVG	
3	15542.9500	48.49	11.46	59.95	74.00	-14.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

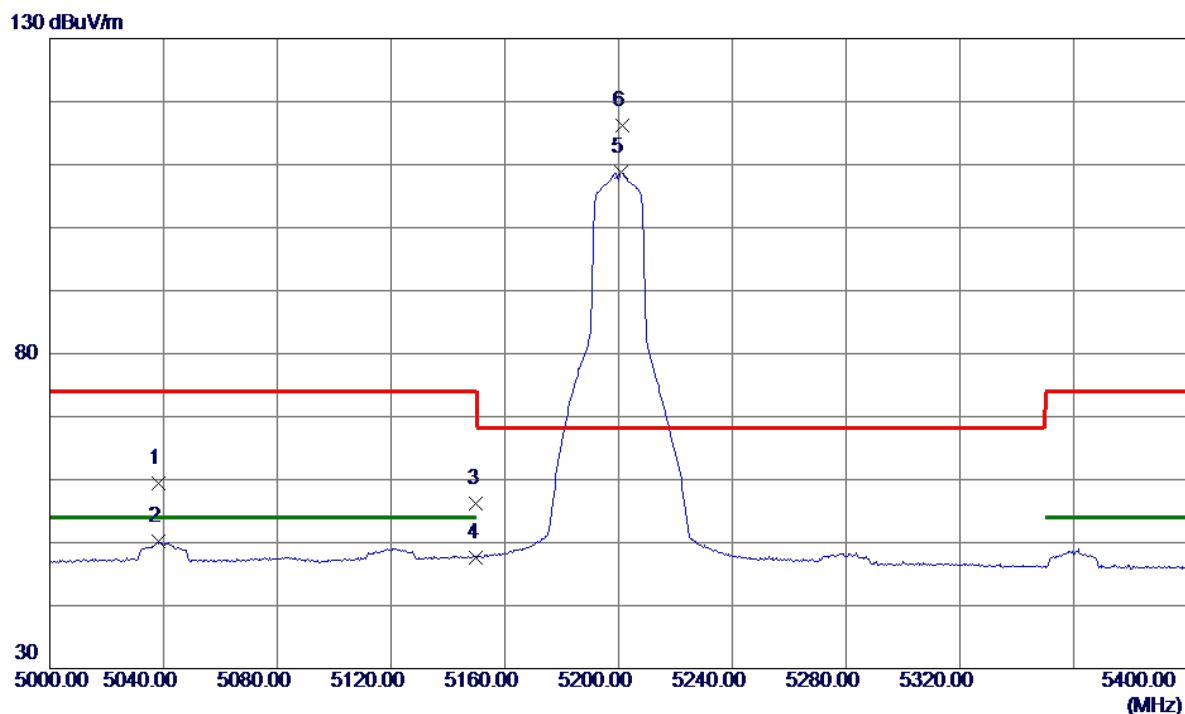


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5038.4000	45.03	14.33	59.36	74.00	-14.64	Peak	
2	5038.4000	35.91	14.33	50.24	54.00	-3.76	AVG	
3	5150.0000	41.84	14.43	56.27	74.00	-17.73	Peak	
4	5150.0000	33.23	14.43	47.66	54.00	-6.34	AVG	
5	5200.8000	94.27	14.48	108.75	999.00	-890.25	AVG	No Limit
6 *	5201.2000	101.64	14.48	116.12	68.20	47.92	Peak	No Limit

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

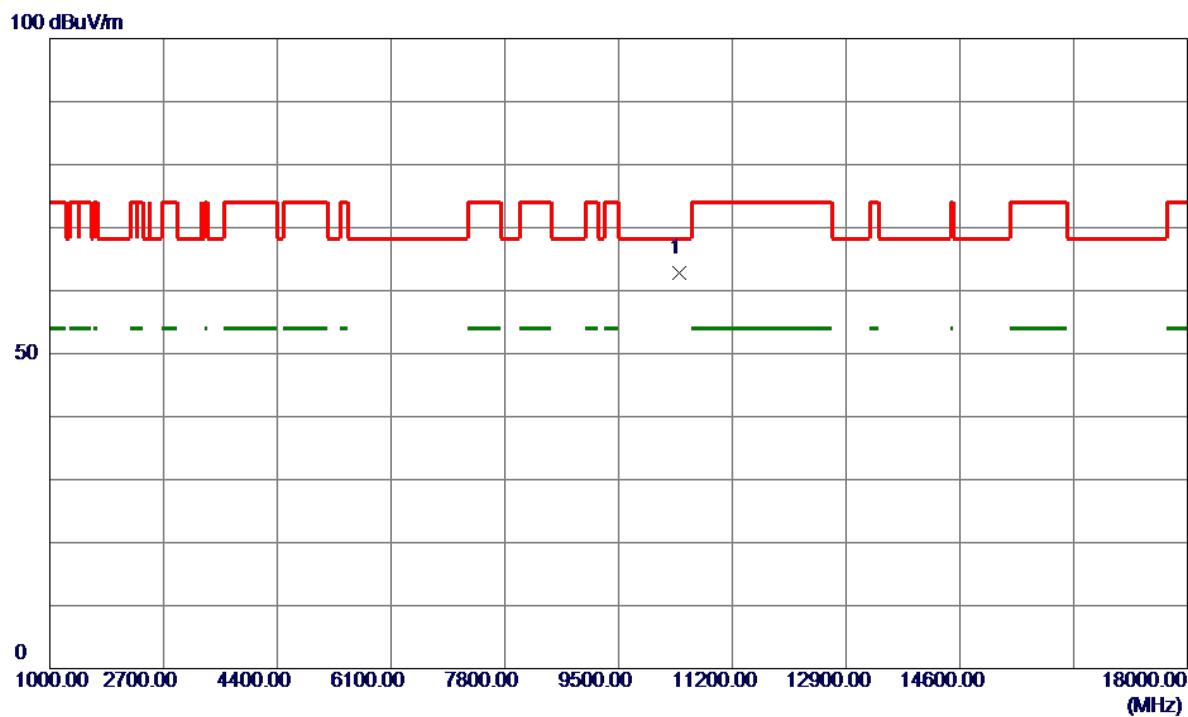**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

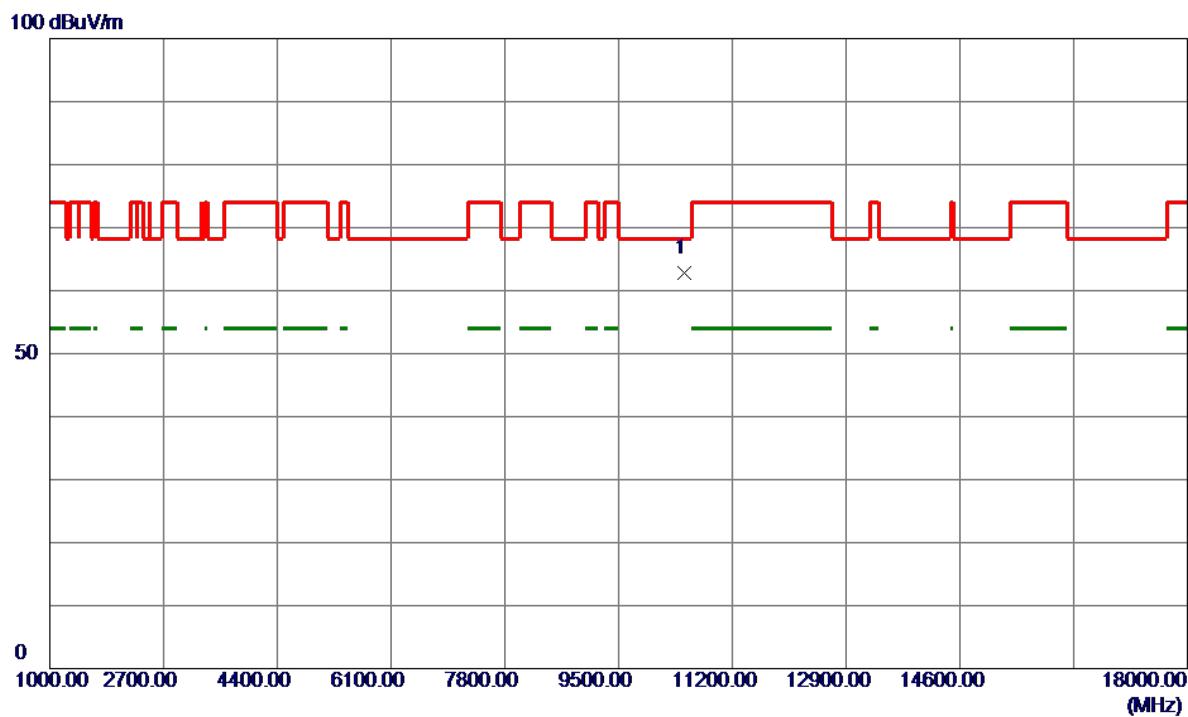


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10478.9000	52.02	10.80	62.82	68.20	-5.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

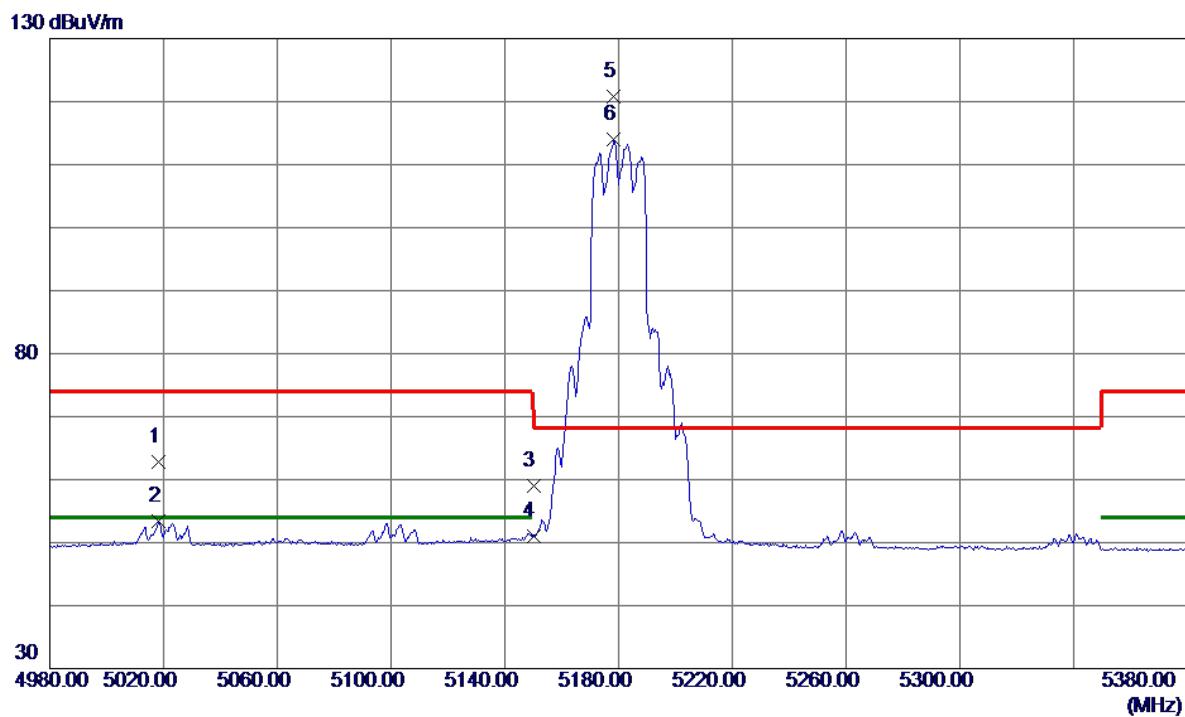


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5018.4000	48.56	14.32	62.88	74.00	-11.12	Peak	
2	5018.4000	39.05	14.32	53.37	54.00	-0.63	AVG	
3	5150.0000	44.51	14.43	58.94	74.00	-15.06	Peak	
4	5150.0000	36.48	14.43	50.91	54.00	-3.09	AVG	
5 *	5178.4000	106.38	14.46	120.84	68.20	52.64	Peak	No Limit
6	5178.4000	99.53	14.46	113.99	999.00	-885.01	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5180 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

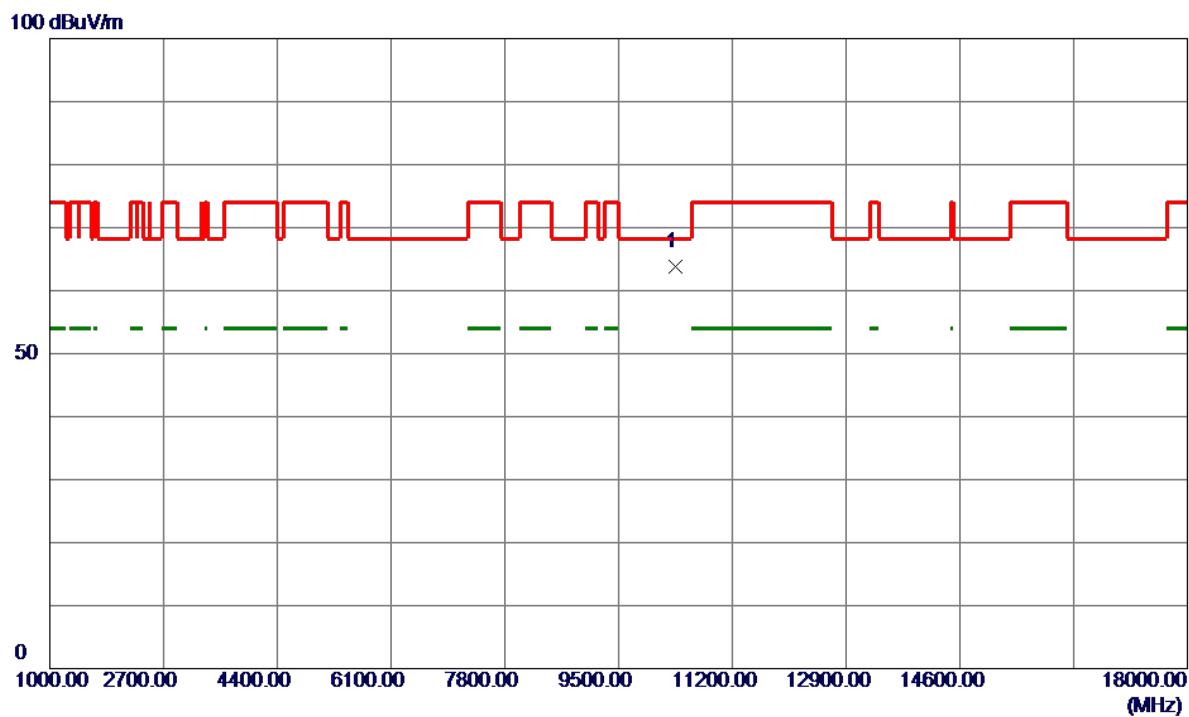


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10359.2000	53.00	10.76	63.76	68.20	-4.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

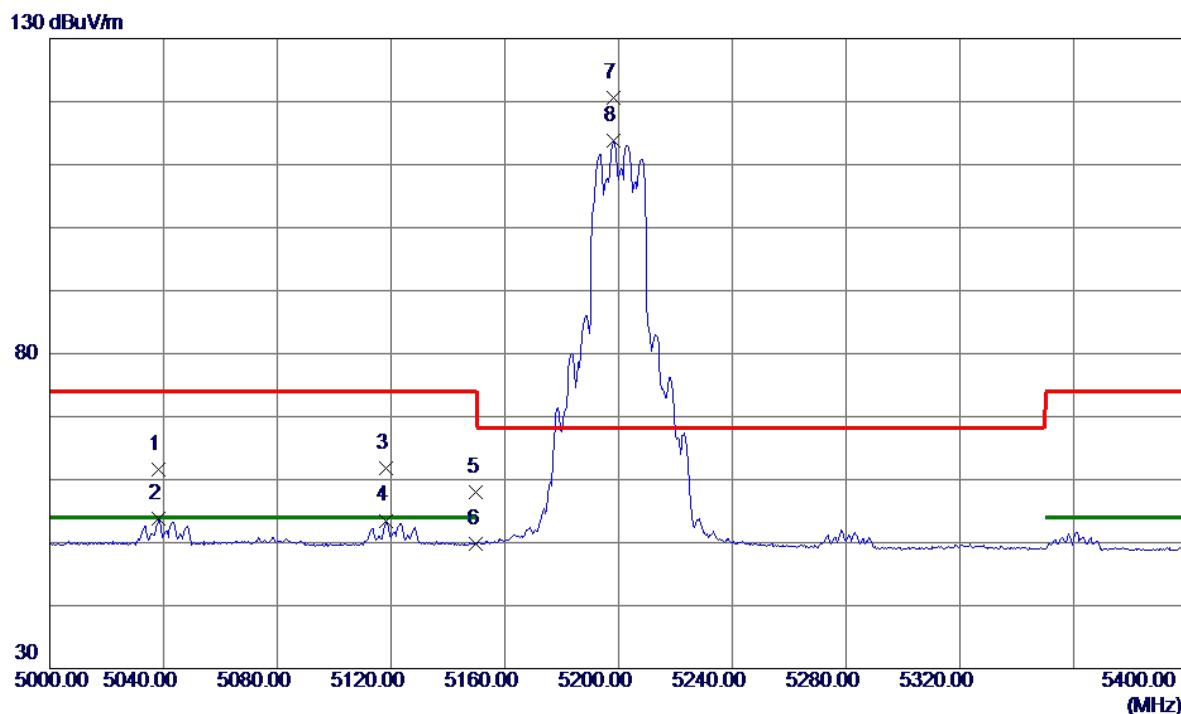


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5038.4000	47.33	14.33	61.66	74.00	-12.34	Peak	
2	5038.4000	39.43	14.33	53.76	54.00	-0.24	AVG	
3	5118.4000	47.32	14.41	61.73	74.00	-12.27	Peak	
4	5118.4000	39.09	14.41	53.50	54.00	-0.50	AVG	
5	5150.0000	43.59	14.43	58.02	74.00	-15.98	Peak	
6	5150.0000	35.39	14.43	49.82	54.00	-4.18	AVG	
7 *	5198.4000	106.21	14.48	120.69	68.20	52.49	Peak	No Limit
8	5198.4000	99.32	14.48	113.80	999.00	-885.20	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5200 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

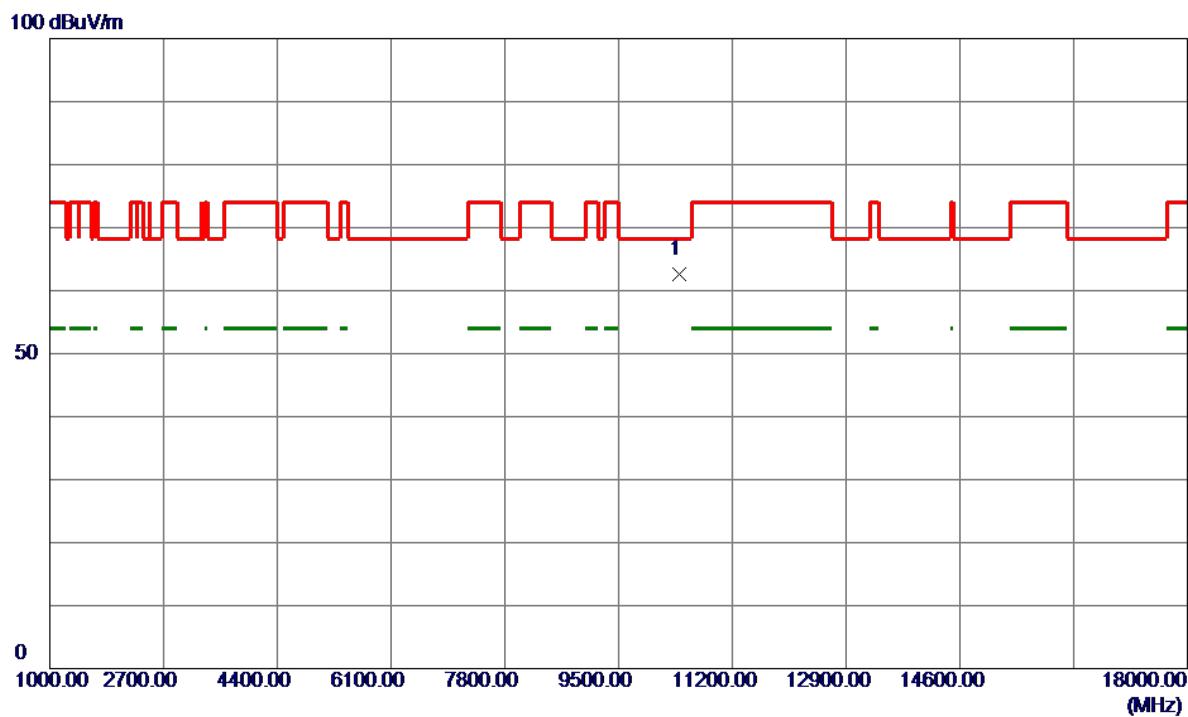


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10404.3000	51.88	10.77	62.65	68.20	-5.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT20) Mode 5240 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

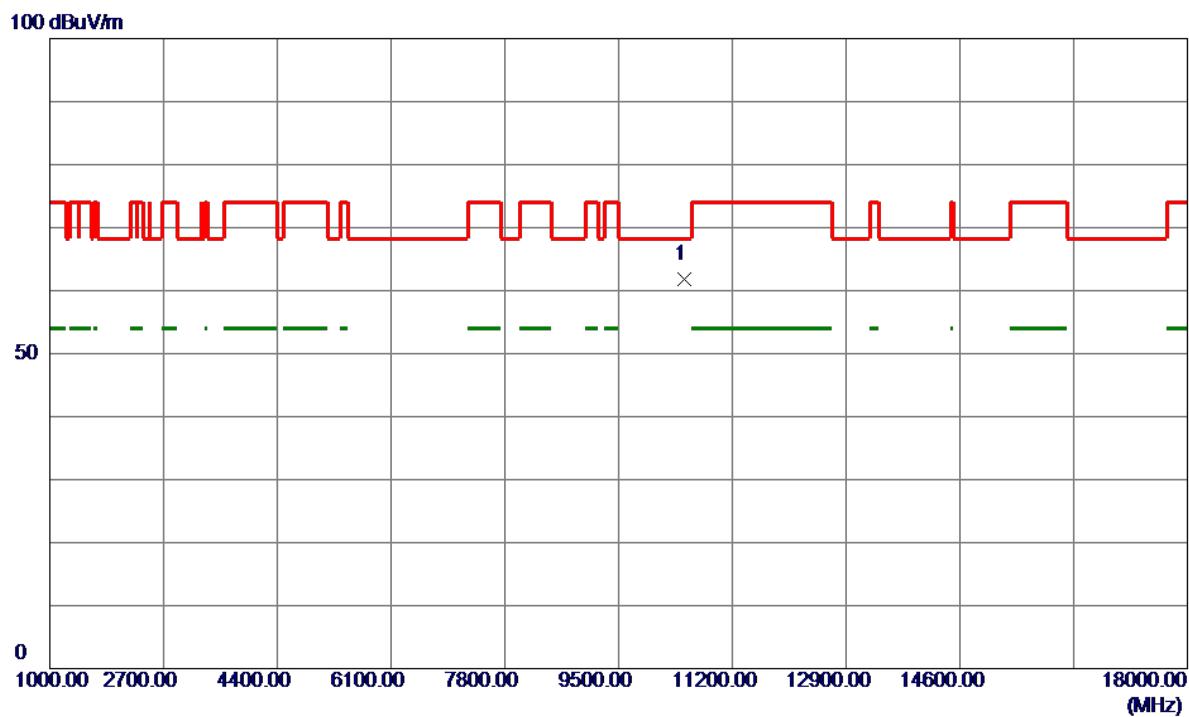


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10477.2000	51.08	10.80	61.88	68.20	-6.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

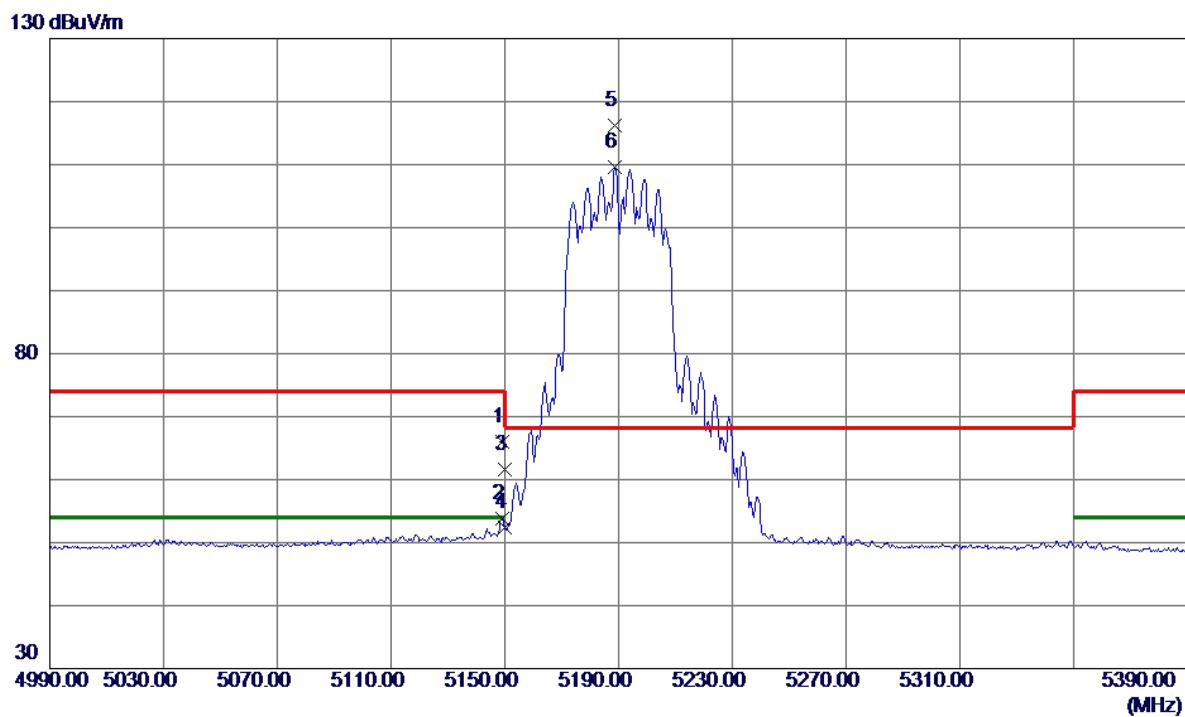


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.0000	51.54	14.43	65.97	74.00	-8.03	Peak	
2	5149.2000	39.34	14.43	53.77	54.00	-0.23	AVG	
3	5150.0000	47.15	14.43	61.58	74.00	-12.42	Peak	
4	5150.0000	37.97	14.43	52.40	54.00	-1.60	AVG	
5 *	5188.8000	101.68	14.47	116.15	68.20	47.95	Peak	No Limit
6	5188.8000	95.13	14.47	109.60	999.00	-889.40	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5190 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

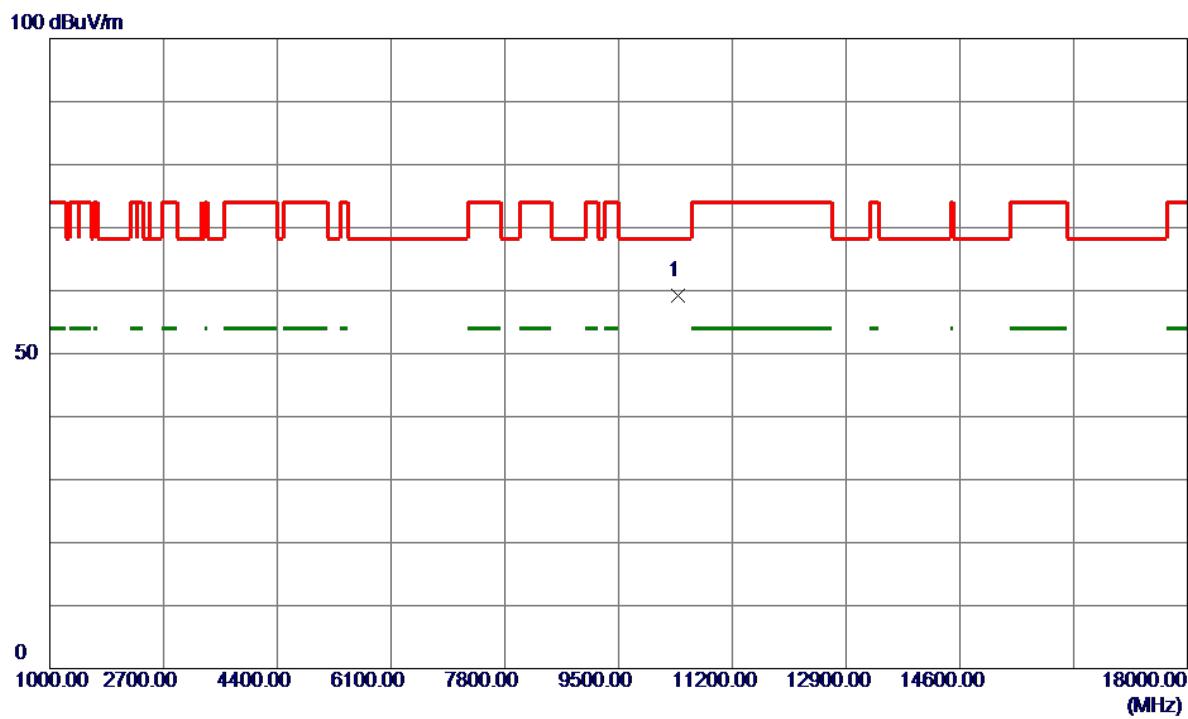


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10378.6000	48.35	10.76	59.11	68.20	-9.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

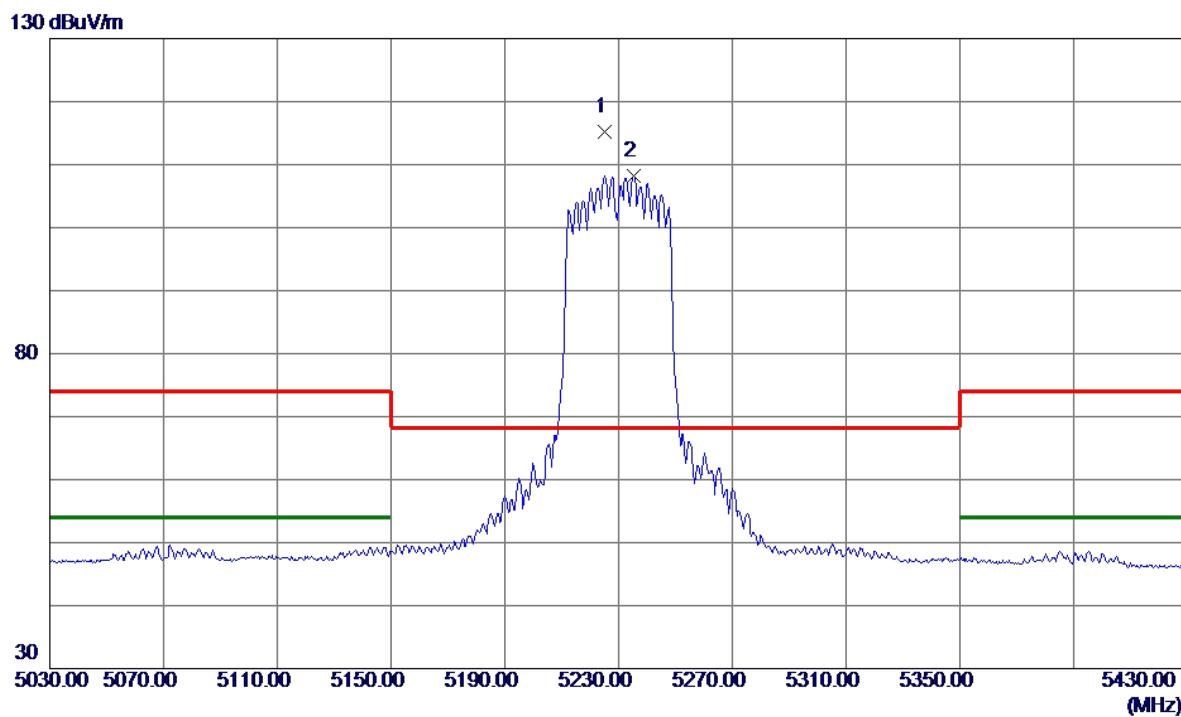


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5225.2000	100.68	14.50	115.18	68.20	46.98	Peak	No Limit
2	5235.2000	93.72	14.51	108.23	999.00	-890.77	AVG	No Limit

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT40) Mode 5230 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

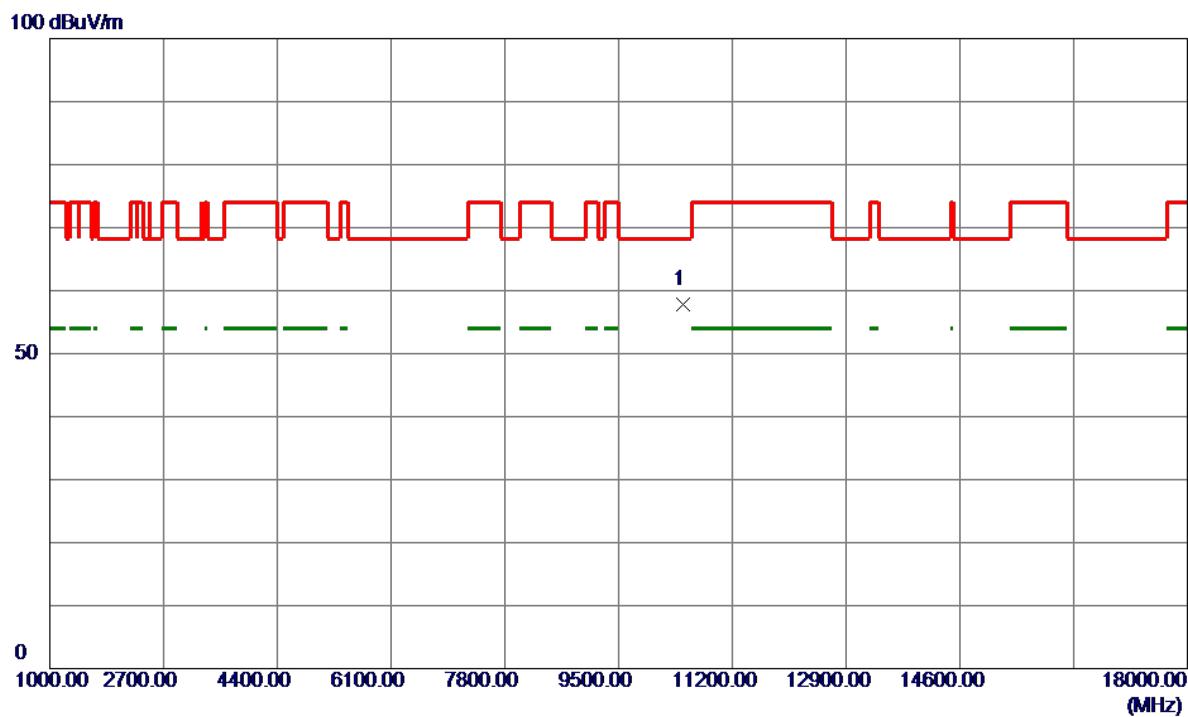**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

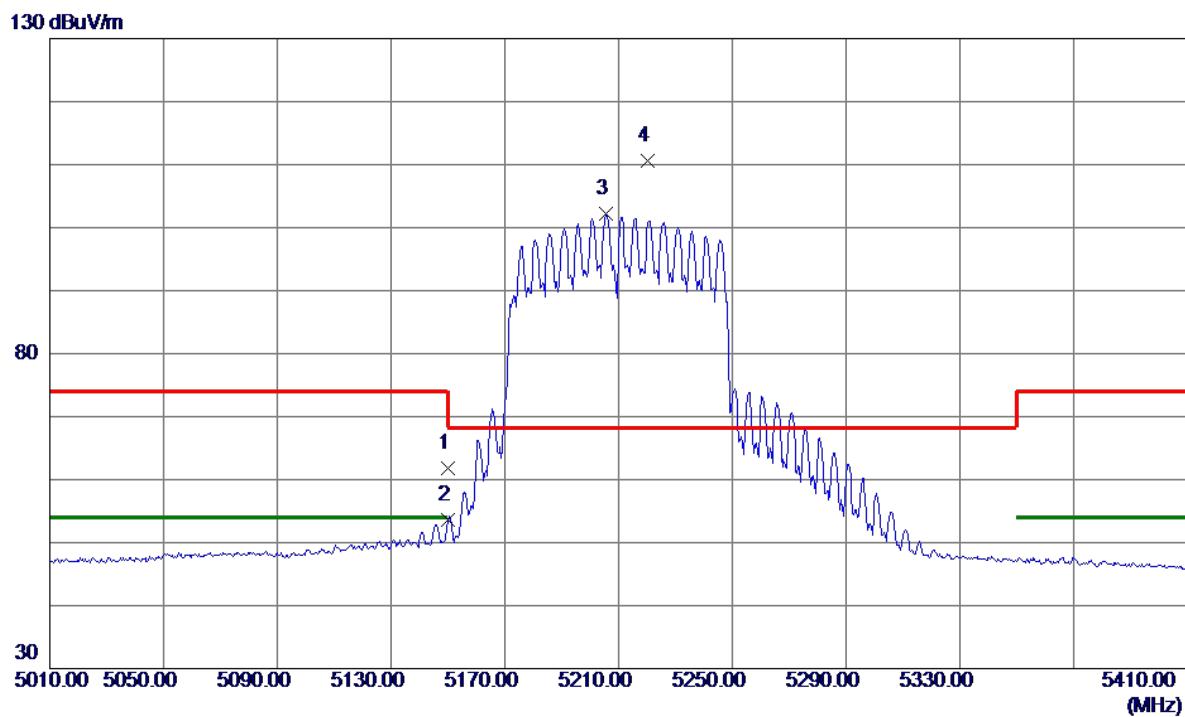


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5150.0000	47.31	14.43	61.74	74.00	-12.26	Peak	
2	5150.0000	39.26	14.43	53.69	54.00	-0.31	AVG	
3	5205.6000	87.69	14.48	102.17	999.00	-896.83	AVG	No Limit
4 *	5220.4000	96.06	14.50	110.56	68.20	42.36	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

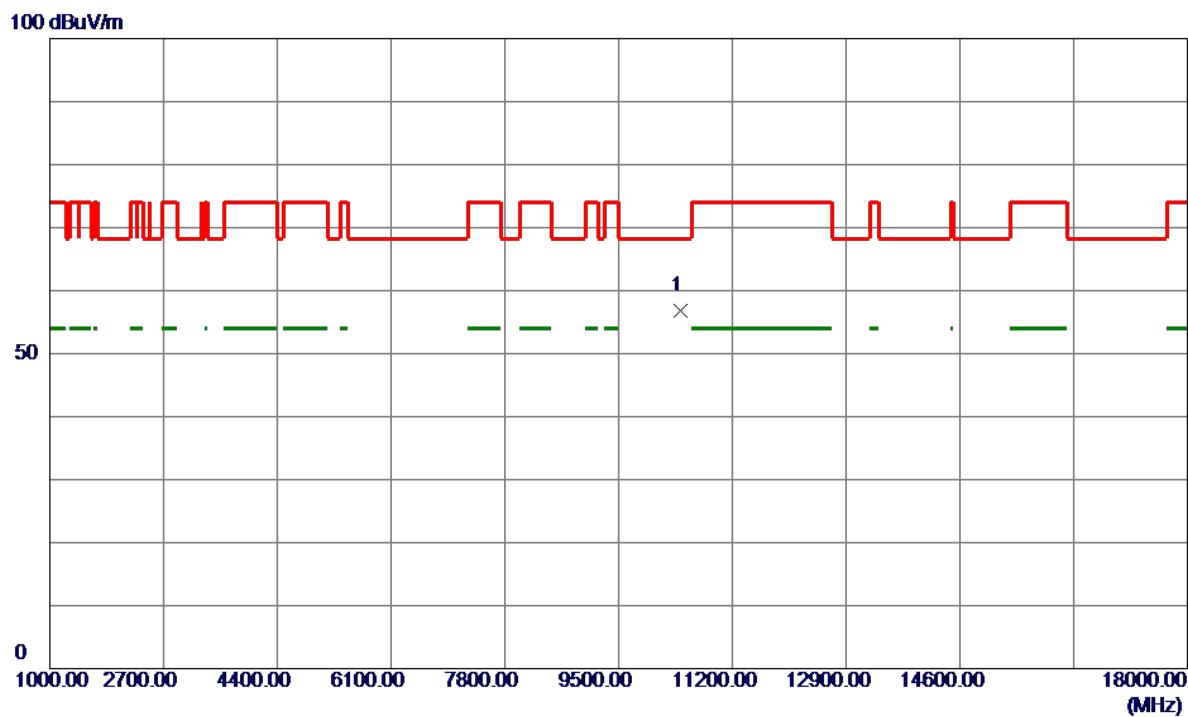


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB
1 *	10419.8000	46.04	10.78	56.82	68.20	-11.38

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

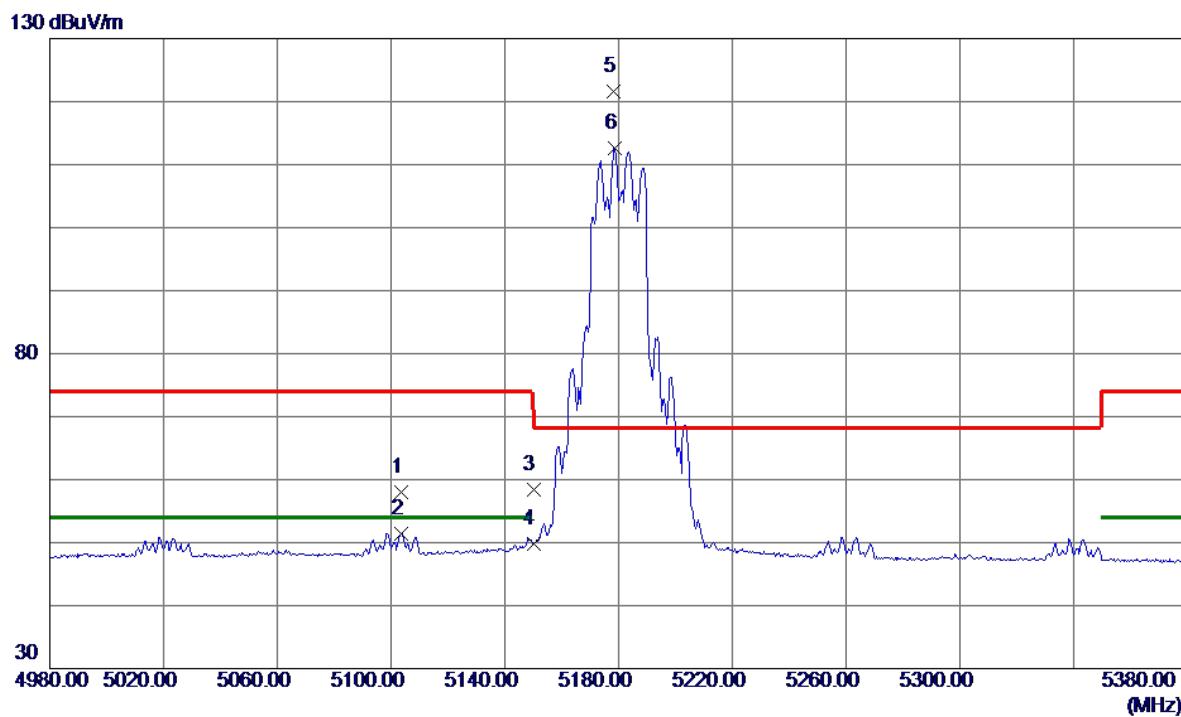


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5103.6000	43.63	14.39	58.02	74.00	-15.98	Peak	
2	5103.6000	37.10	14.39	51.49	54.00	-2.51	AVG	
3	5150.0000	44.06	14.43	58.49	74.00	-15.51	Peak	
4	5150.0000	35.40	14.43	49.83	54.00	-4.17	AVG	
5 *	5178.4000	107.13	14.46	121.59	68.20	53.39	Peak	No Limit
6	5178.8000	98.08	14.46	112.54	999.00	-886.46	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

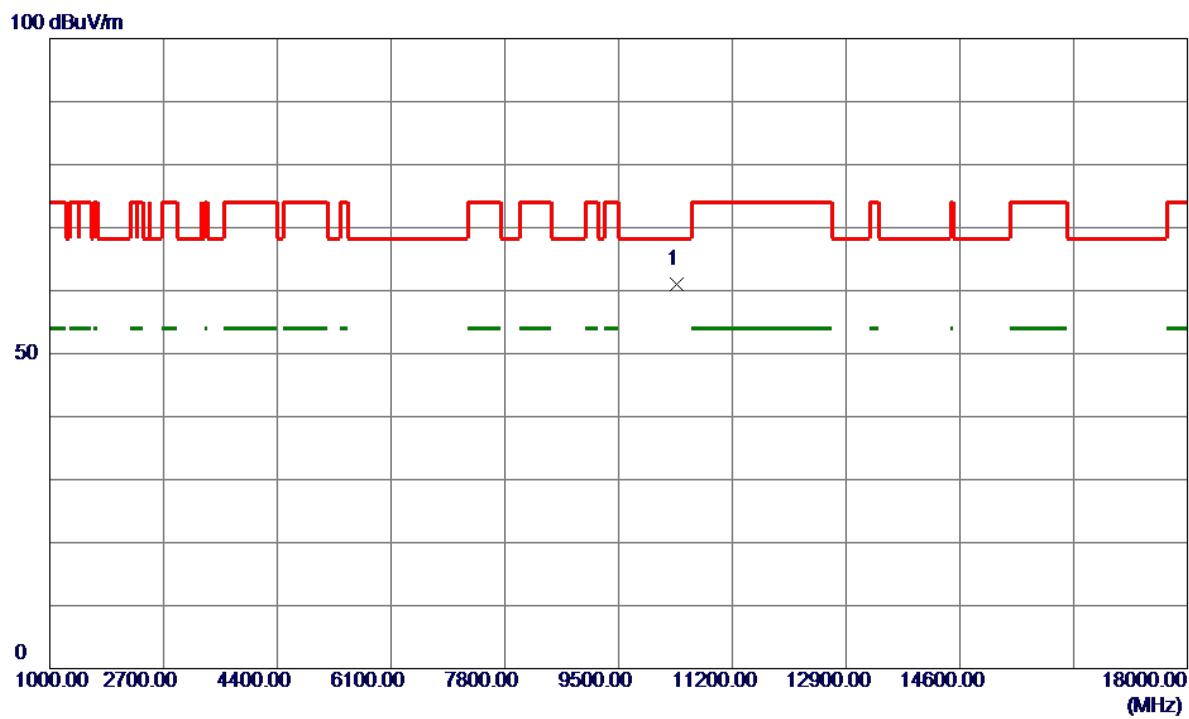


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10363.9000	50.18	10.76	60.94	68.20	-7.26	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

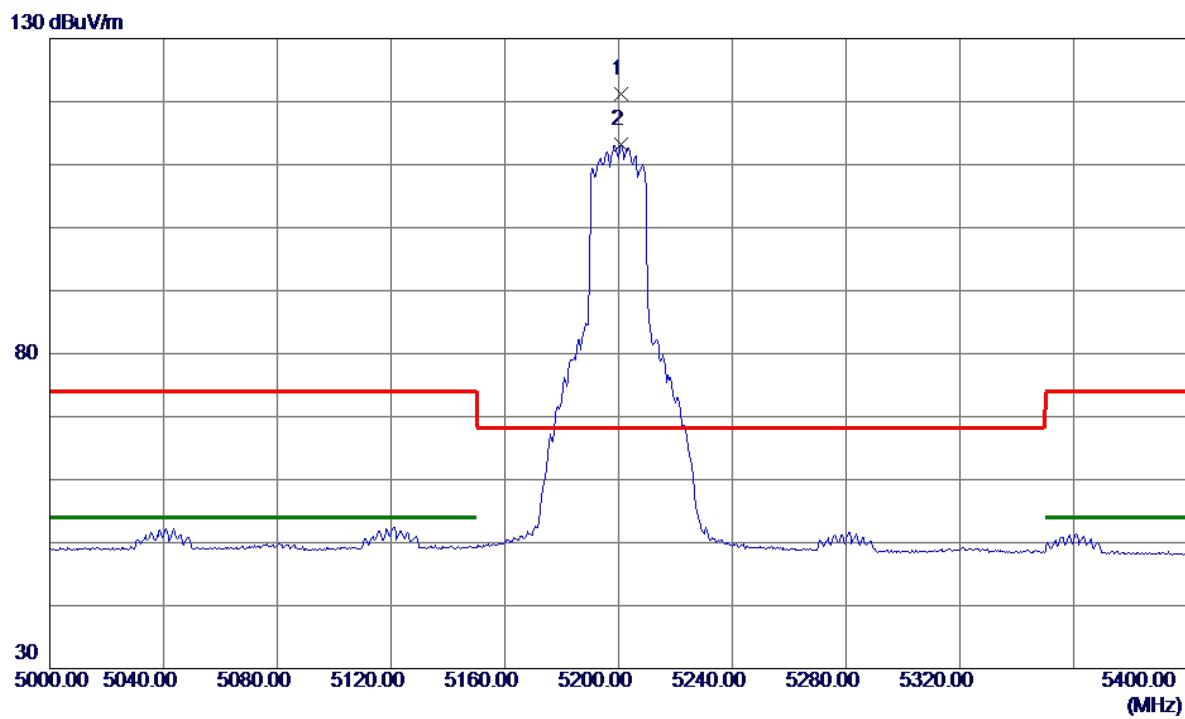


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5200.8000	106.74	14.48	121.22	68.20	53.02	Peak	No Limit
2	5200.8000	98.66	14.48	113.14	999.00	-885.86	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

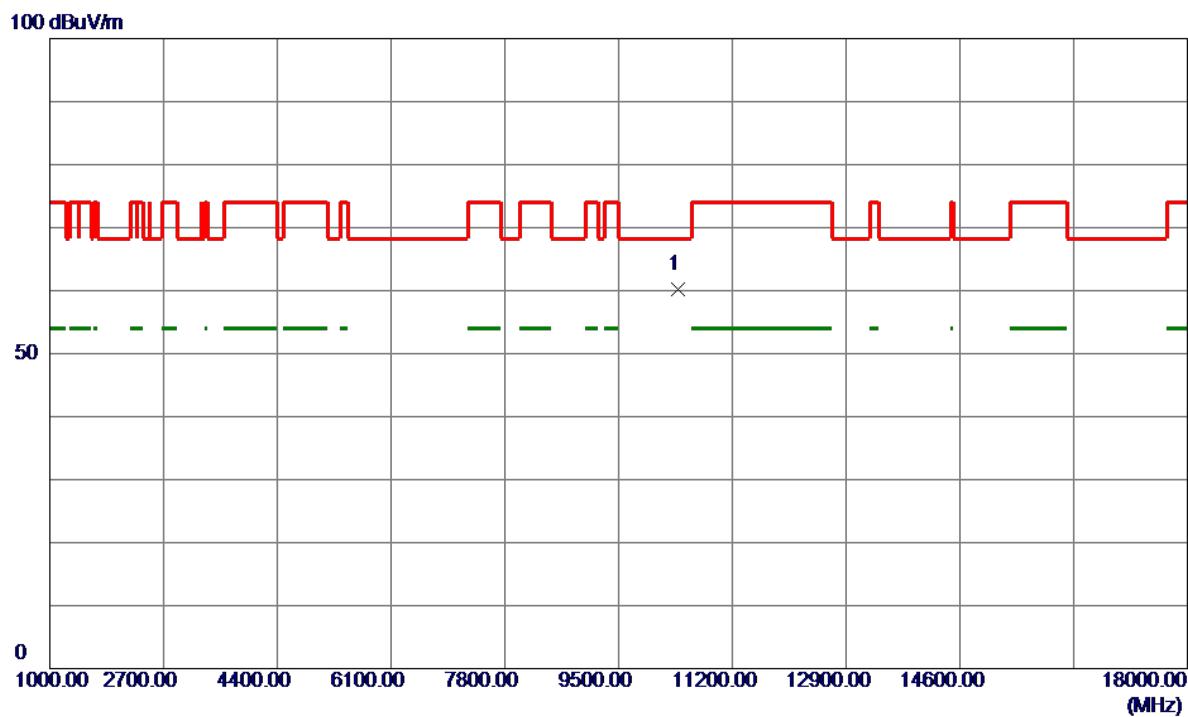


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	10394.1500	49.43	10.77	60.20	68.20	-8.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

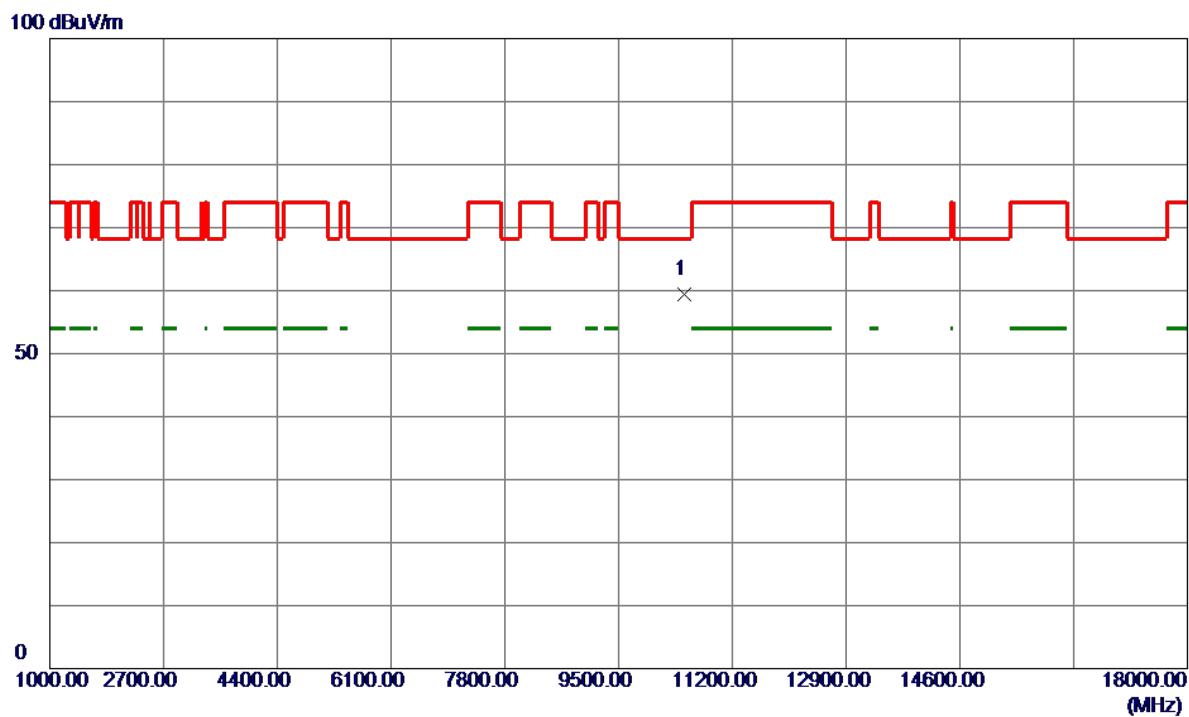


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10484.8000	48.52	10.80	59.32	68.20	-8.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

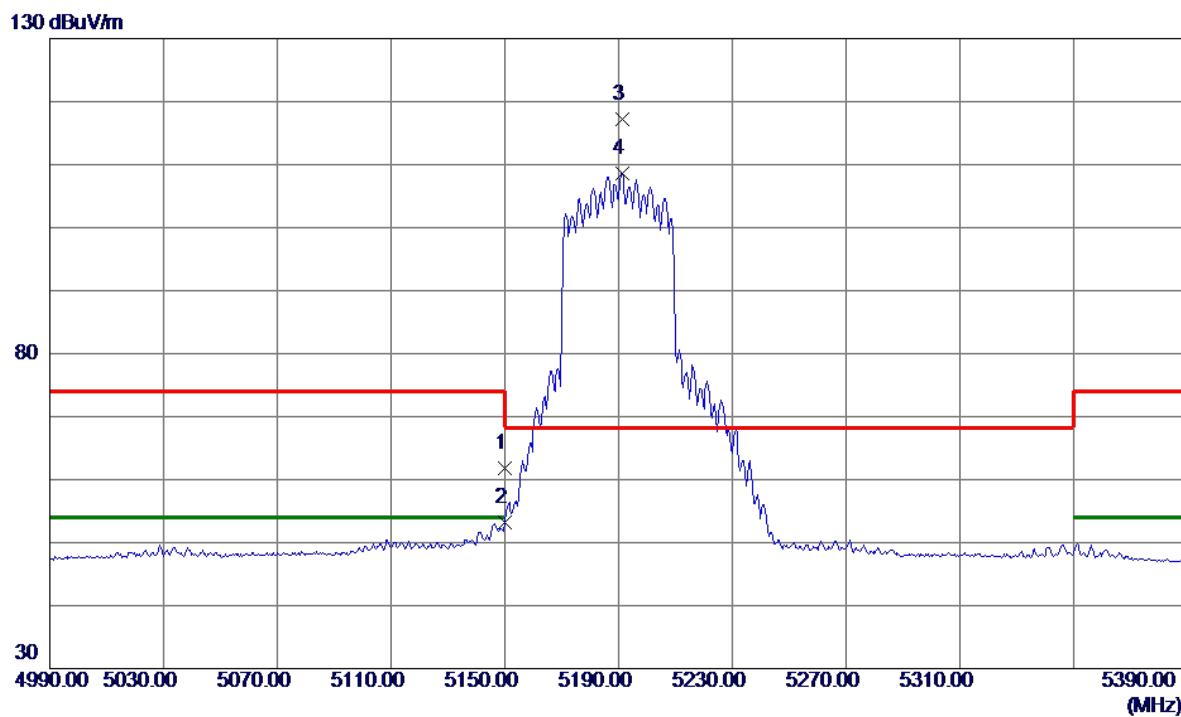


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5150.0000	47.31	14.43	61.74	74.00	-12.26	Peak	
2	5150.0000	38.71	14.43	53.14	54.00	-0.86	AVG	
3 *	5191.2000	102.67	14.47	117.14	68.20	48.94	Peak	No Limit
4	5191.2000	94.22	14.47	108.69	999.00	-890.31	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

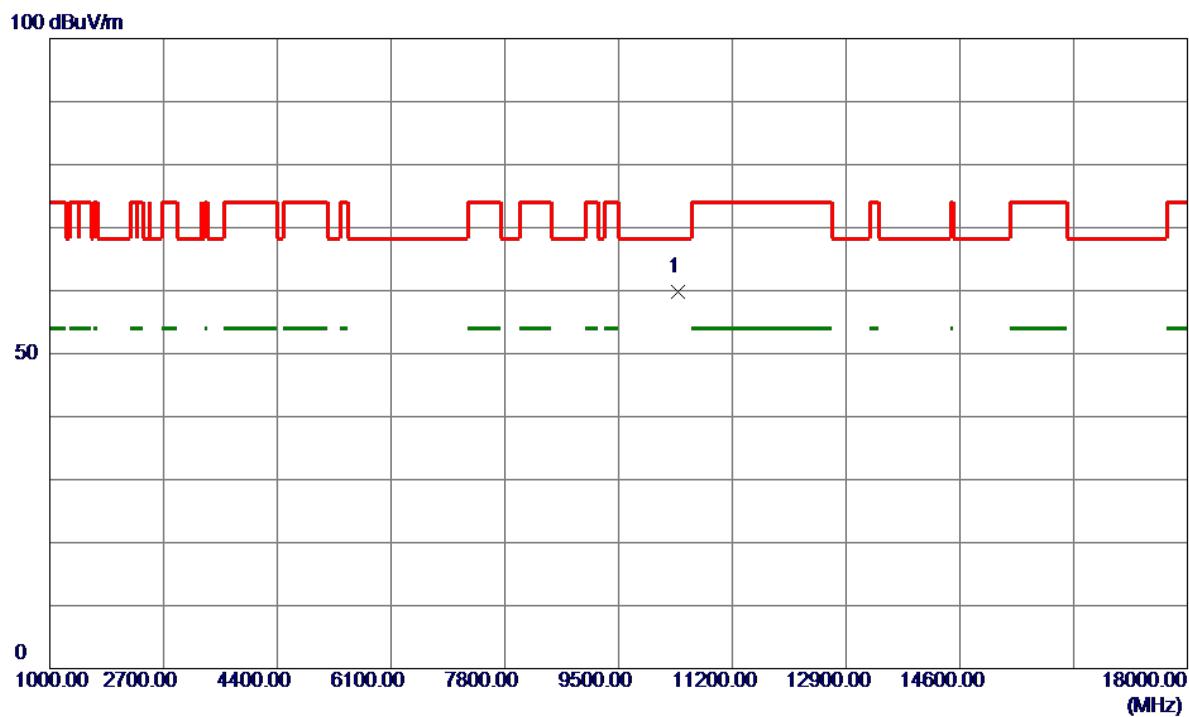


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10379.9000	49.07	10.76	59.83	68.20	-8.37	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

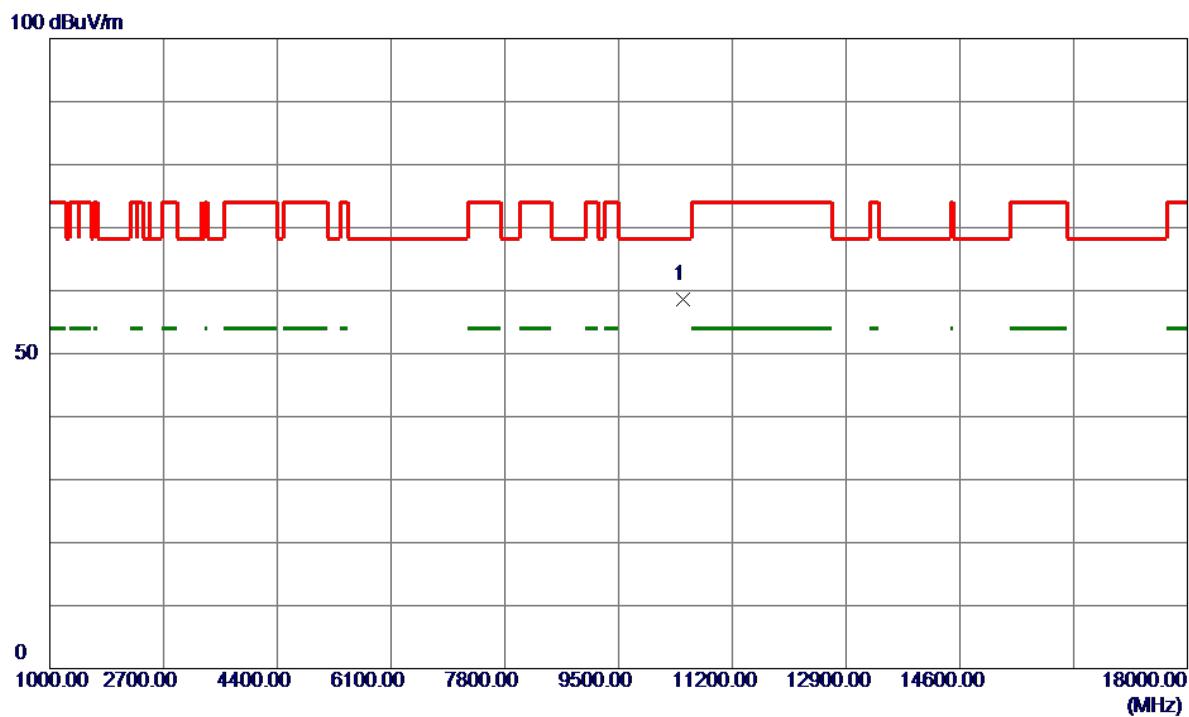**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

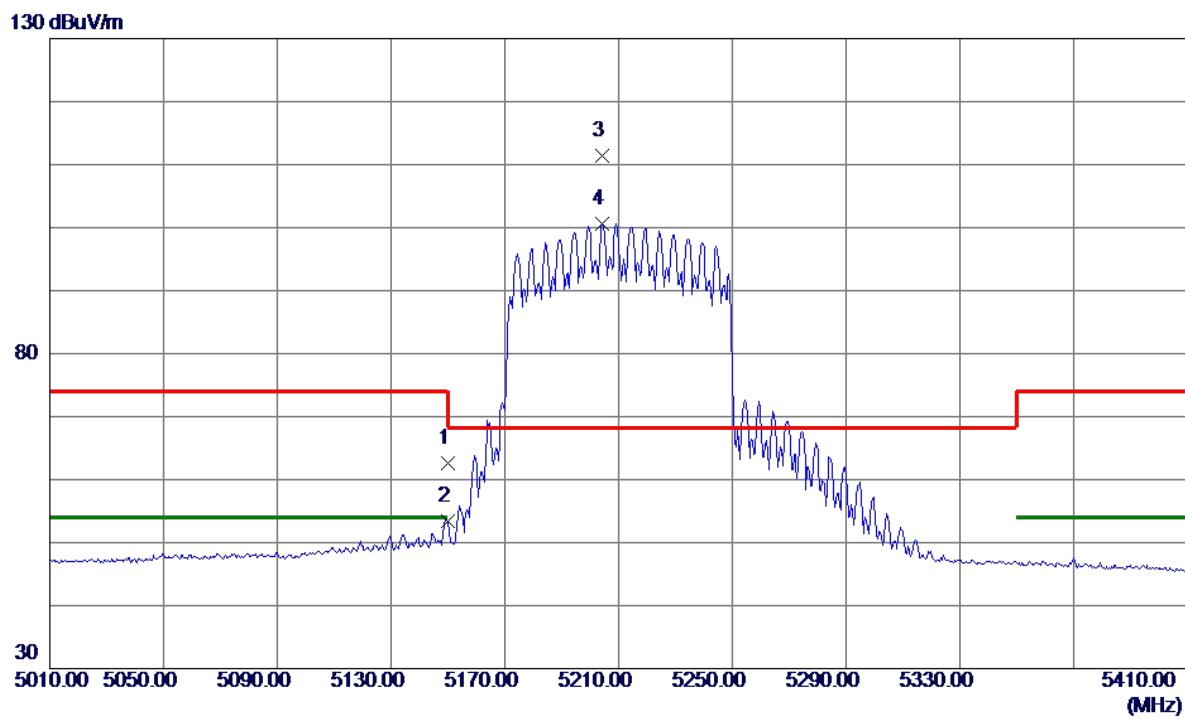


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5150.0000	48.14	14.43	62.57	74.00	-11.43	Peak	
2	5150.0000	39.01	14.43	53.44	54.00	-0.56	AVG	
3 *	5204.4000	96.88	14.48	111.36	68.20	43.16	Peak	No Limit
4	5204.4000	86.18	14.48	100.66	999.00	-898.34	AVG	No Limit

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

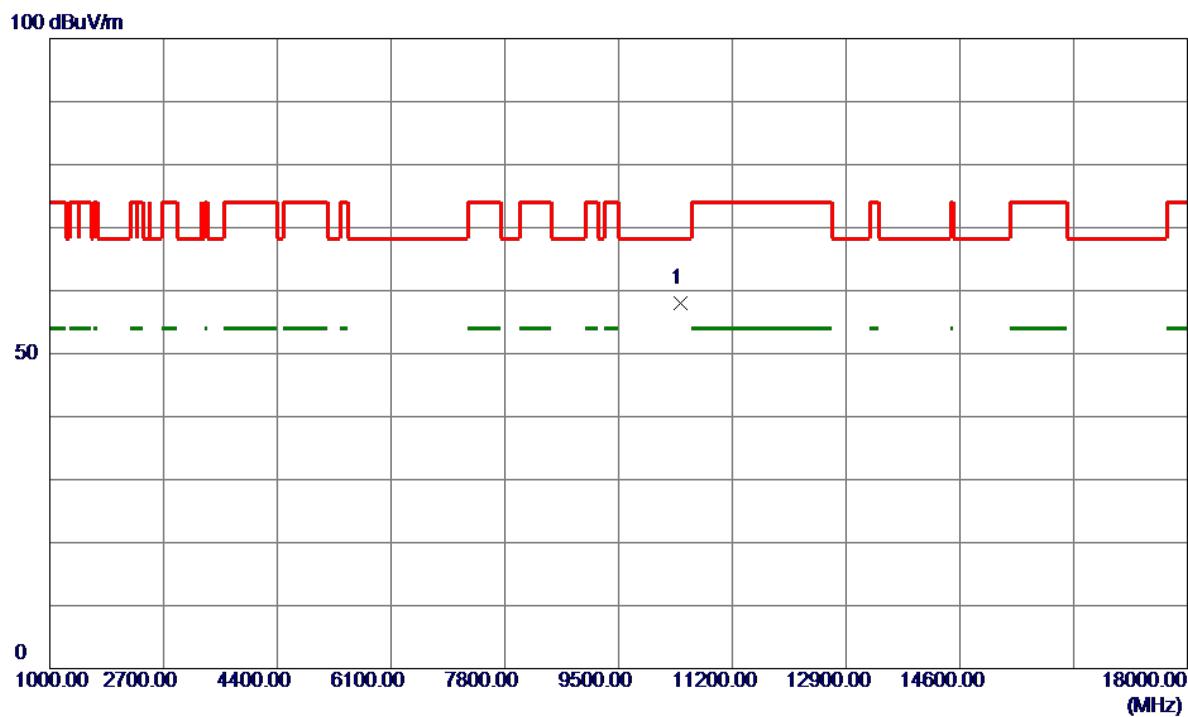**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

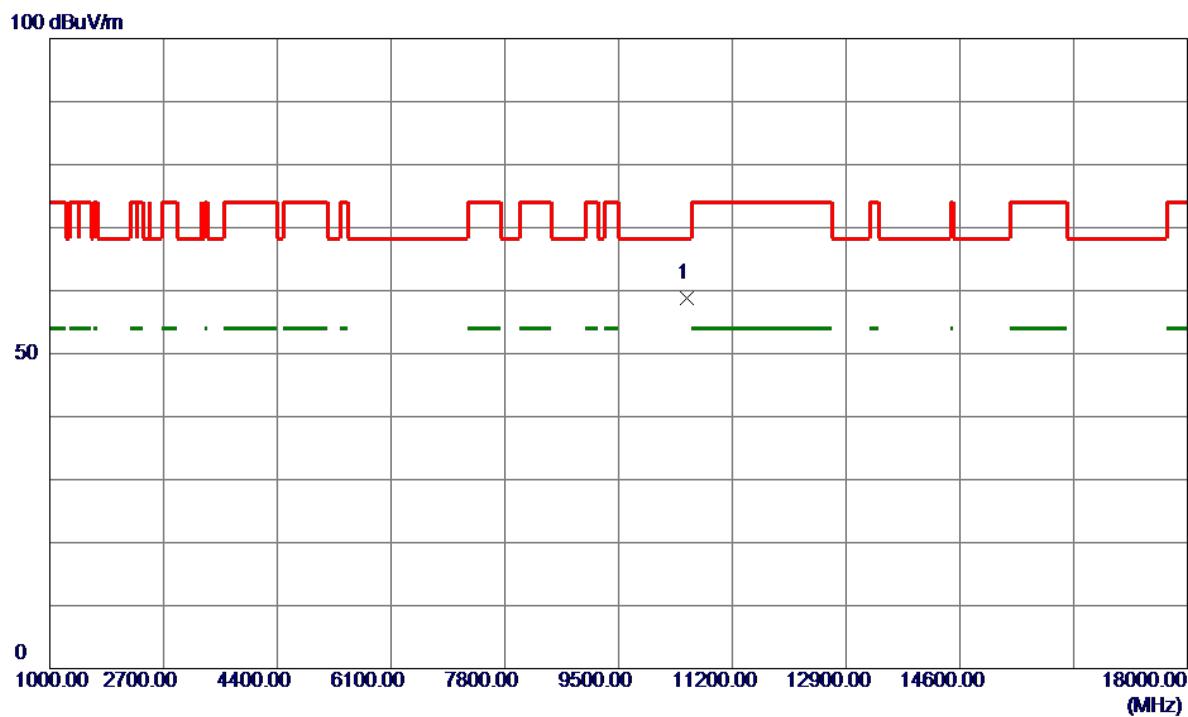


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10520.1000	47.98	10.81	58.79	68.20	-9.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

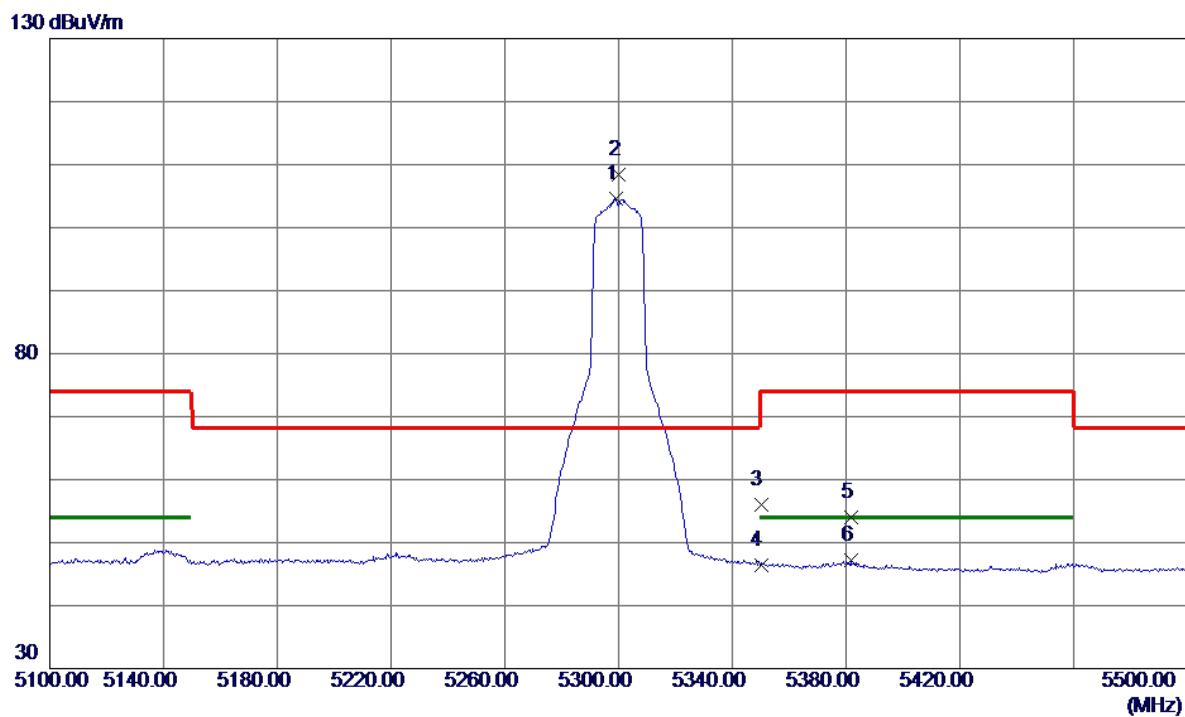


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5299.2000	89.99	14.57	104.56	999.00	-894.44	AVG	No Limit
2 *	5300.0000	93.83	14.57	108.40	68.20	40.20	Peak	No Limit
3	5350.0000	41.31	14.61	55.92	74.00	-18.08	Peak	
4	5350.0000	31.77	14.61	46.38	54.00	-7.62	AVG	
5	5381.6000	39.43	14.64	54.07	74.00	-19.93	Peak	
6	5381.6000	32.52	14.64	47.16	54.00	-6.84	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

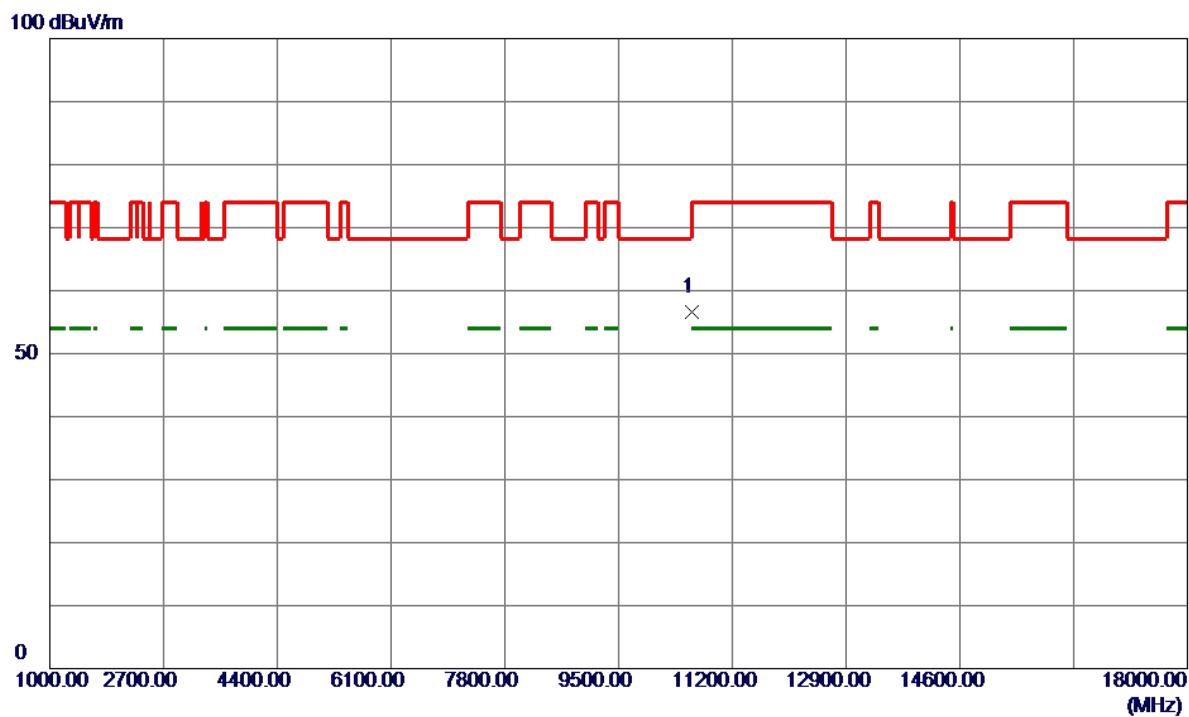**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

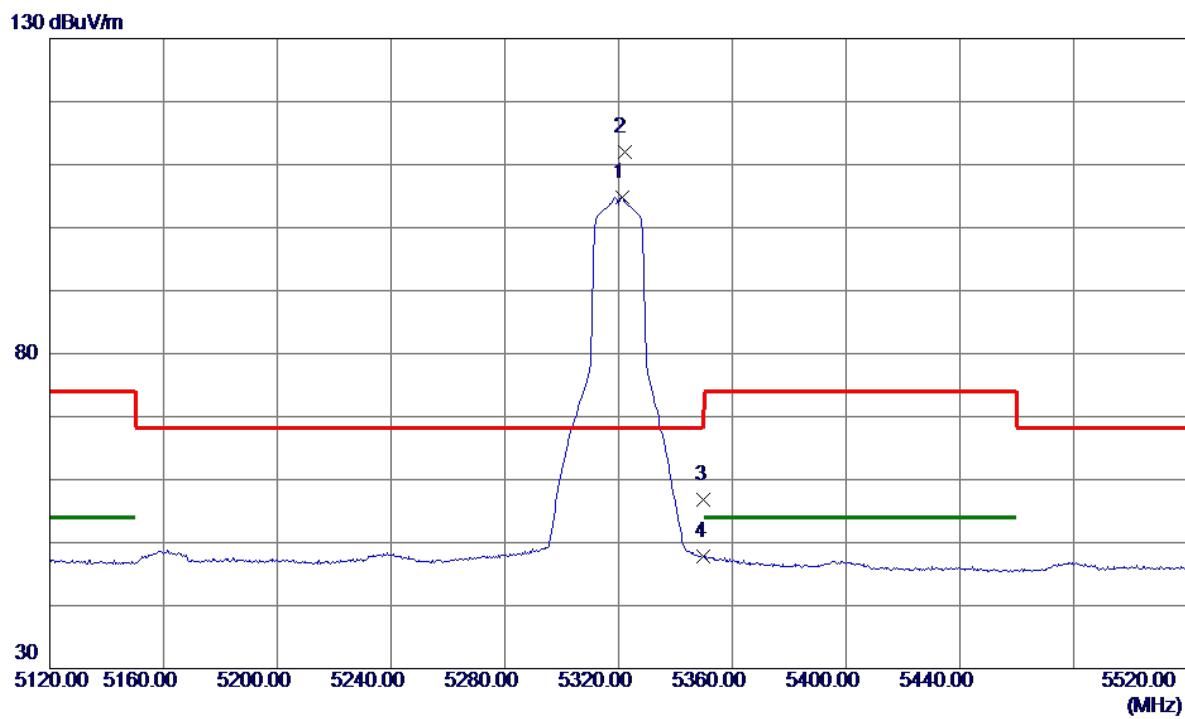


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5321.2000	90.15	14.59	104.74	999.00	-894.26	AVG	No Limit
2 *	5322.0000	97.49	14.59	112.08	68.20	43.88	Peak	No Limit
3	5350.0000	42.24	14.61	56.85	74.00	-17.15	Peak	
4	5350.0000	33.11	14.61	47.72	54.00	-6.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

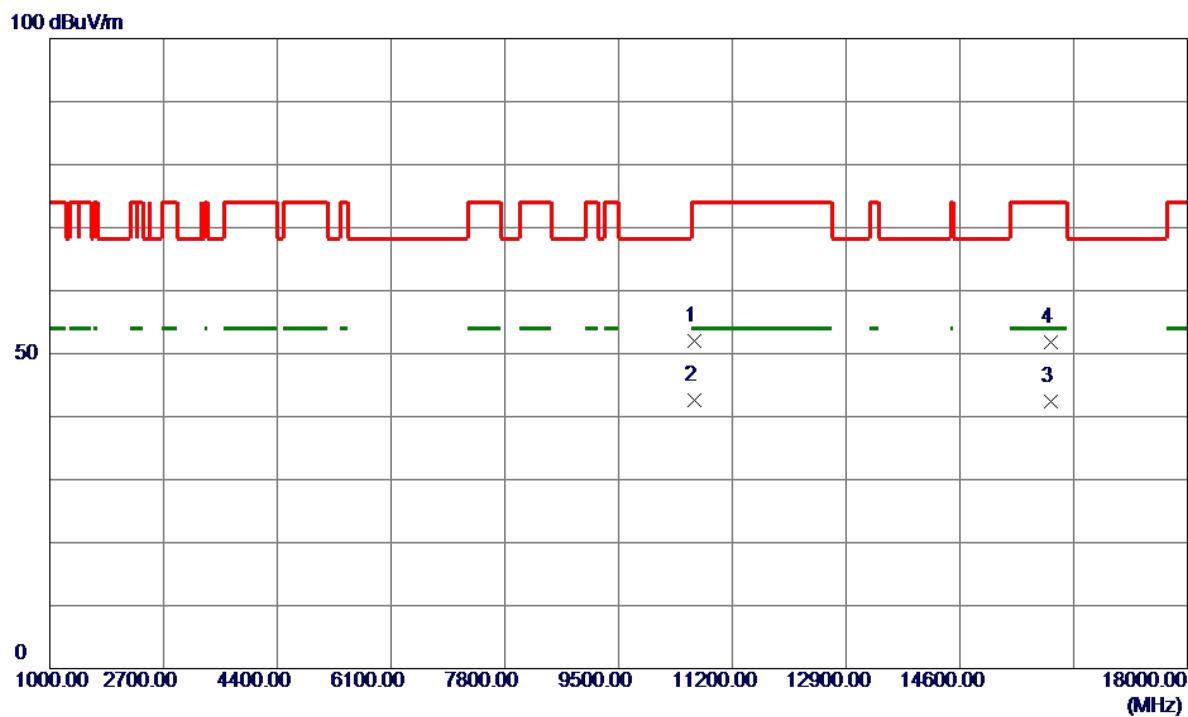


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	10639.2500	41.18	10.81	51.99	74.00	-22.01	Peak	
2 *	10640.7000	31.78	10.81	42.59	54.00	-11.41	AVG	
3	15958.3500	30.86	11.55	42.41	54.00	-11.59	AVG	
4	15959.3500	40.26	11.55	51.81	74.00	-22.19	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5260 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

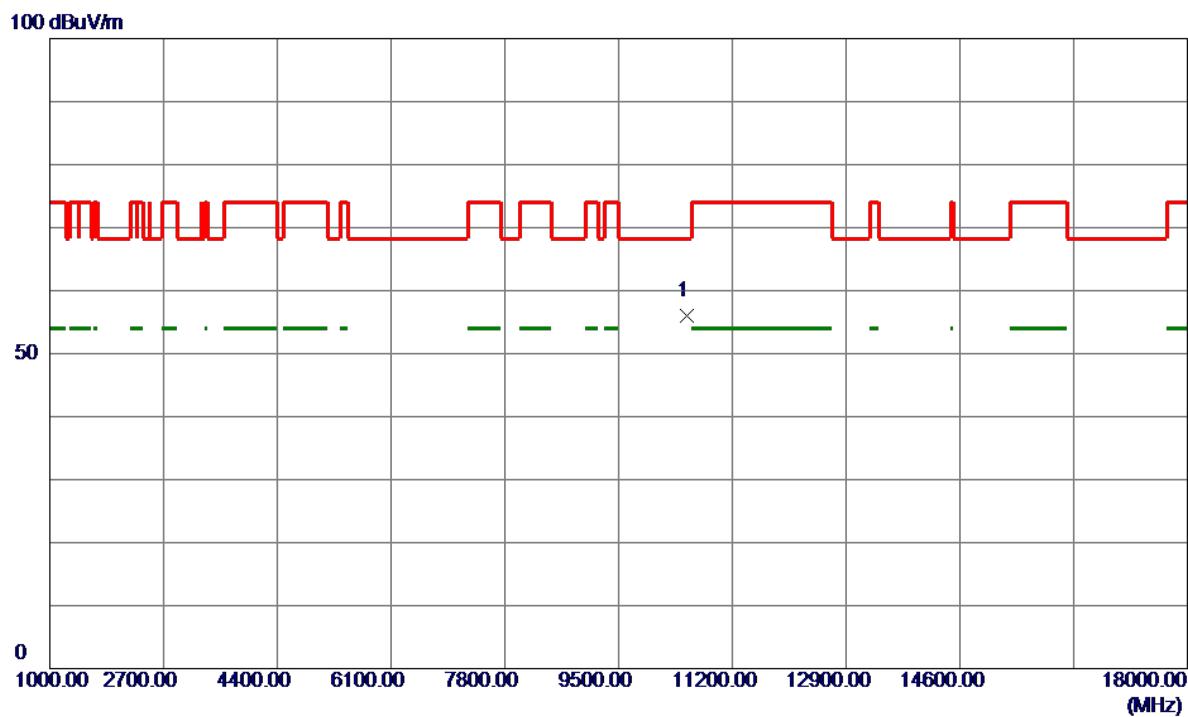


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10519.4000	45.16	10.81	55.97	68.20	-12.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

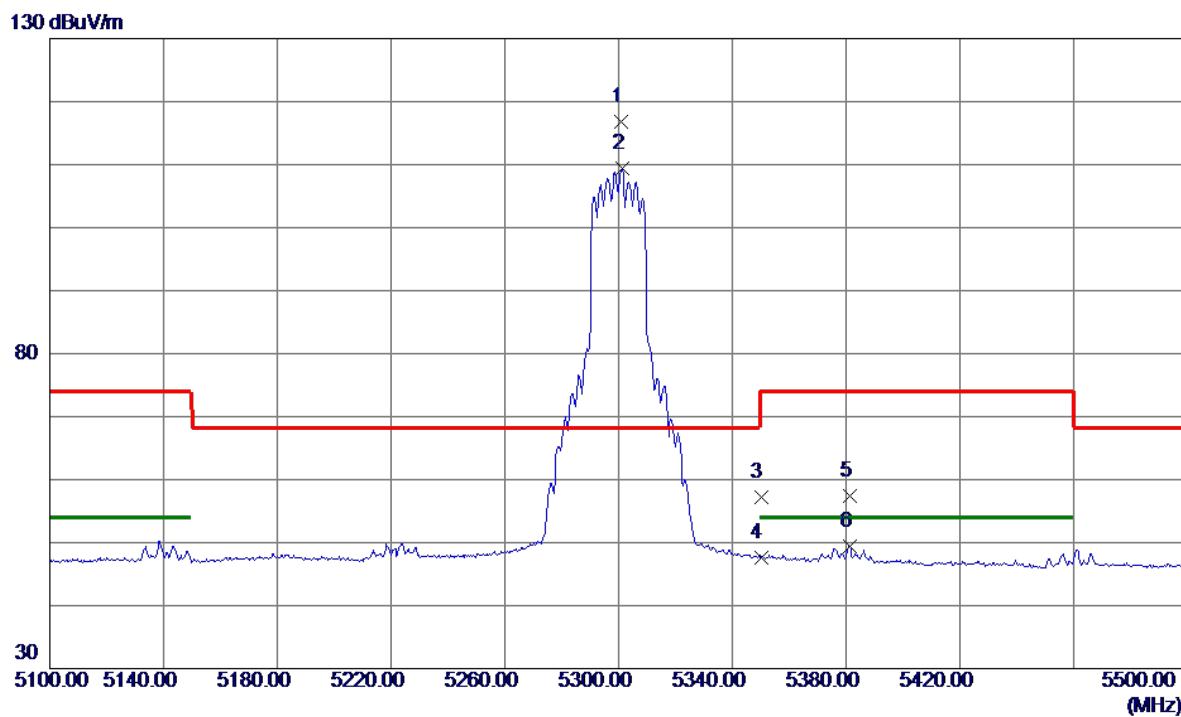


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5300.8000	102.32	14.57	116.89	68.20	48.69	Peak	No Limit
2	5301.2000	94.75	14.57	109.32	999.00	-889.68	AVG	No Limit
3	5350.0000	42.52	14.61	57.13	74.00	-16.87	Peak	
4	5350.0000	33.05	14.61	47.66	54.00	-6.34	AVG	
5	5381.2000	42.72	14.64	57.36	74.00	-16.64	Peak	
6	5381.2000	34.78	14.64	49.42	54.00	-4.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5300 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

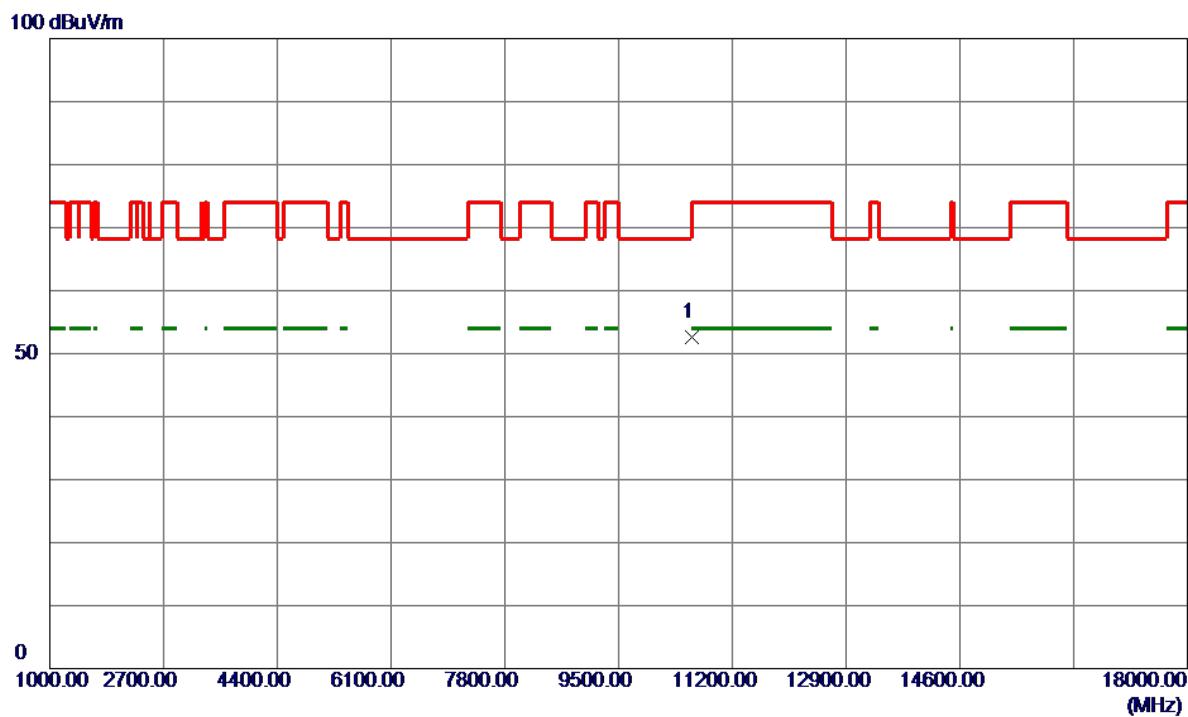


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10597.1000	41.86	10.81	52.67	68.20	-15.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

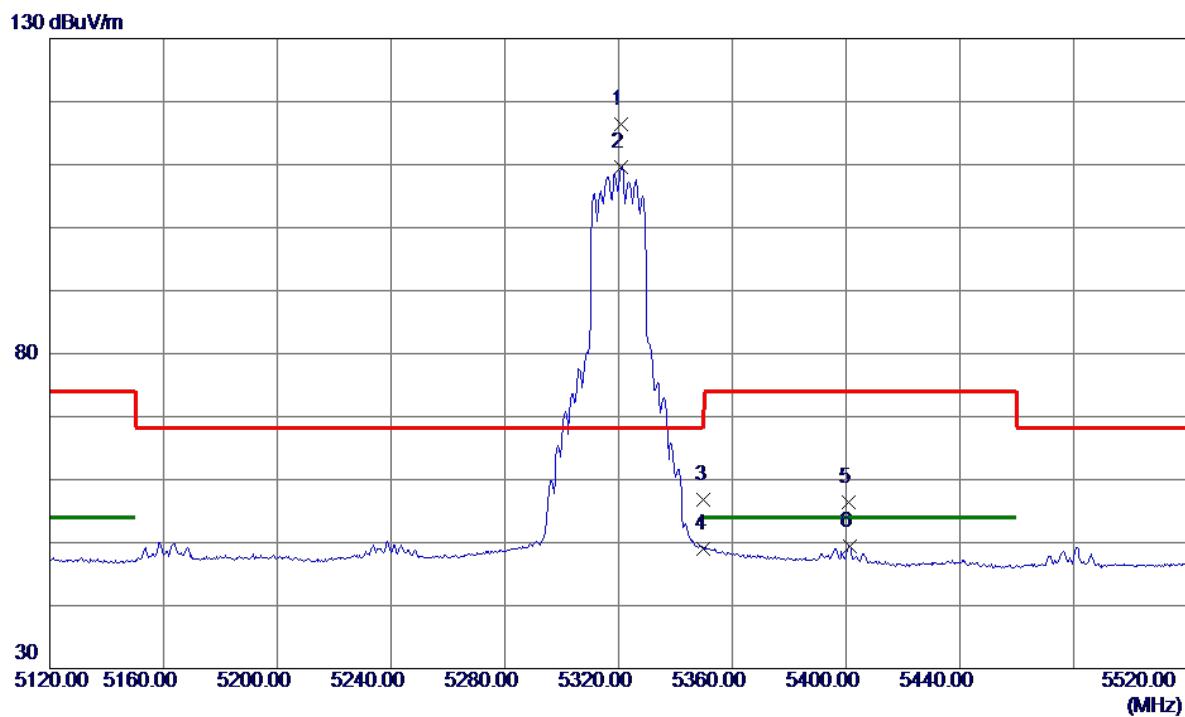


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5320.8000	101.75	14.59	116.34	68.20	48.14	Peak	No Limit
2	5320.8000	95.07	14.59	109.66	999.00	-889.34	AVG	No Limit
3	5350.0000	42.27	14.61	56.88	74.00	-17.12	Peak	
4	5350.0000	34.48	14.61	49.09	54.00	-4.91	AVG	
5	5401.0000	41.68	14.66	56.34	74.00	-17.66	Peak	
6	5401.2000	34.78	14.66	49.44	54.00	-4.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT20) Mode 5320 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

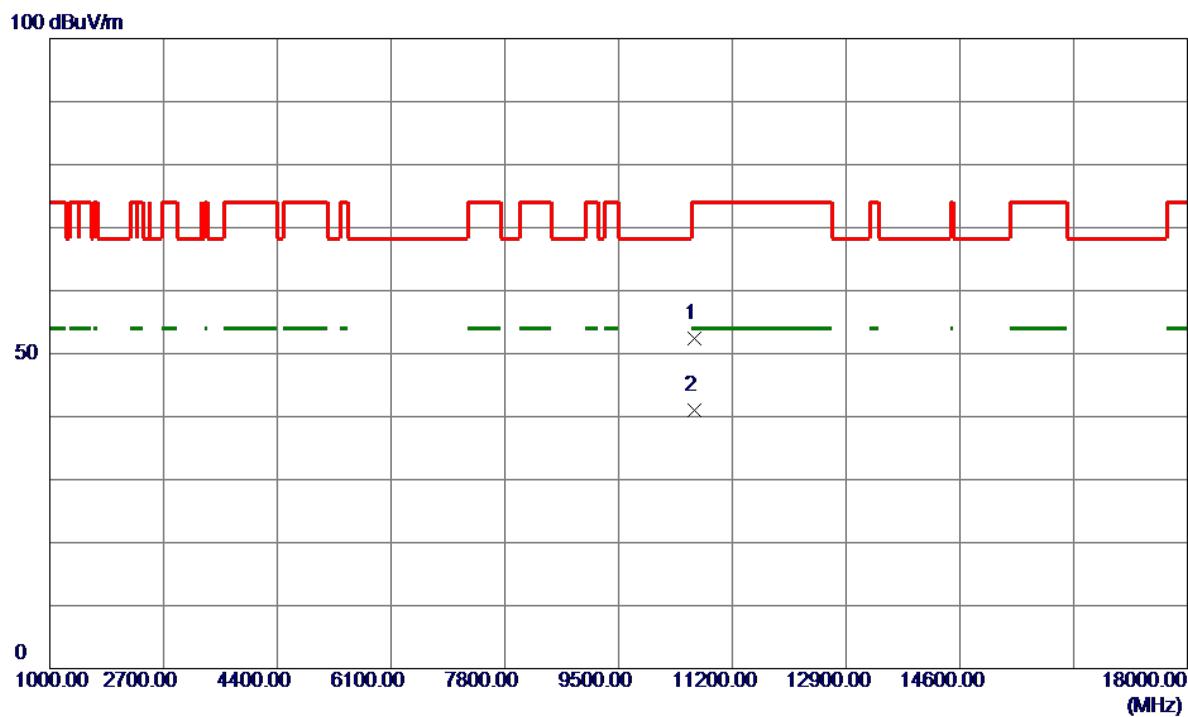


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	10638.8500	41.52	10.81	52.33	74.00	-21.67	Peak	
2 *	10641.7500	30.13	10.81	40.94	54.00	-13.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

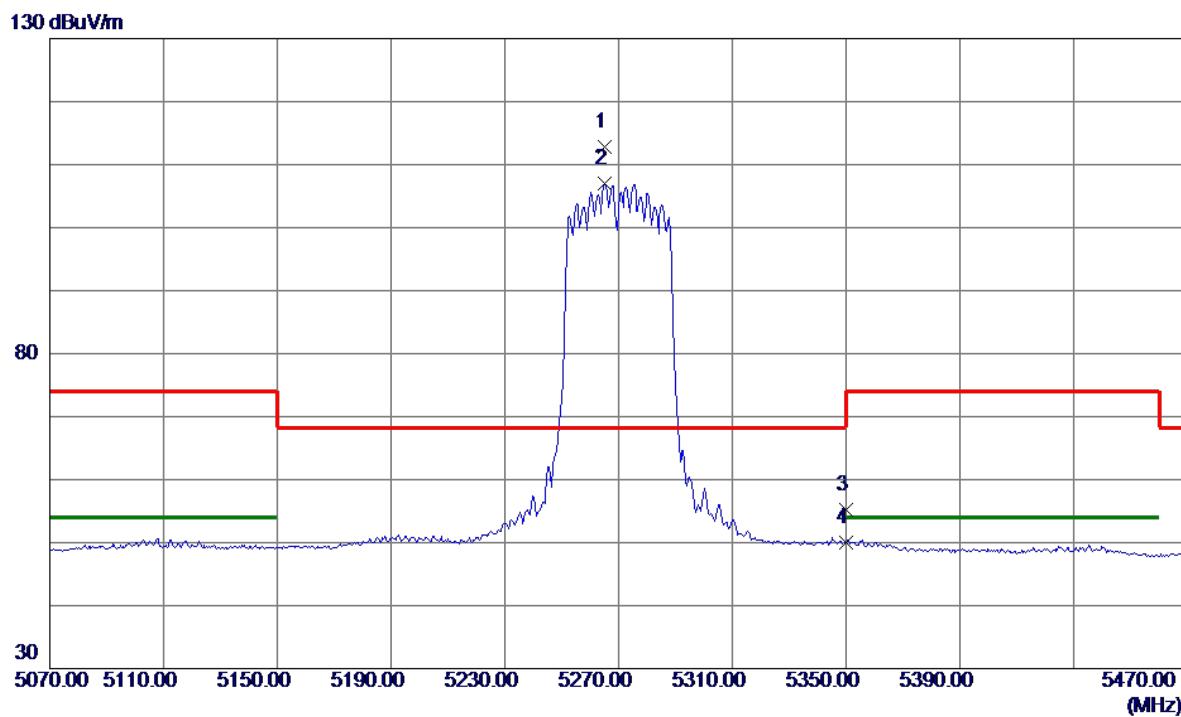


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5265.2000	98.33	14.54	112.87	68.20	44.67	Peak	No Limit
2	5265.2000	92.45	14.54	106.99	999.00	-892.01	AVG	No Limit
3	5350.0000	40.68	14.61	55.29	74.00	-18.71	Peak	
4	5350.0000	35.39	14.61	50.00	54.00	-4.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5270 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

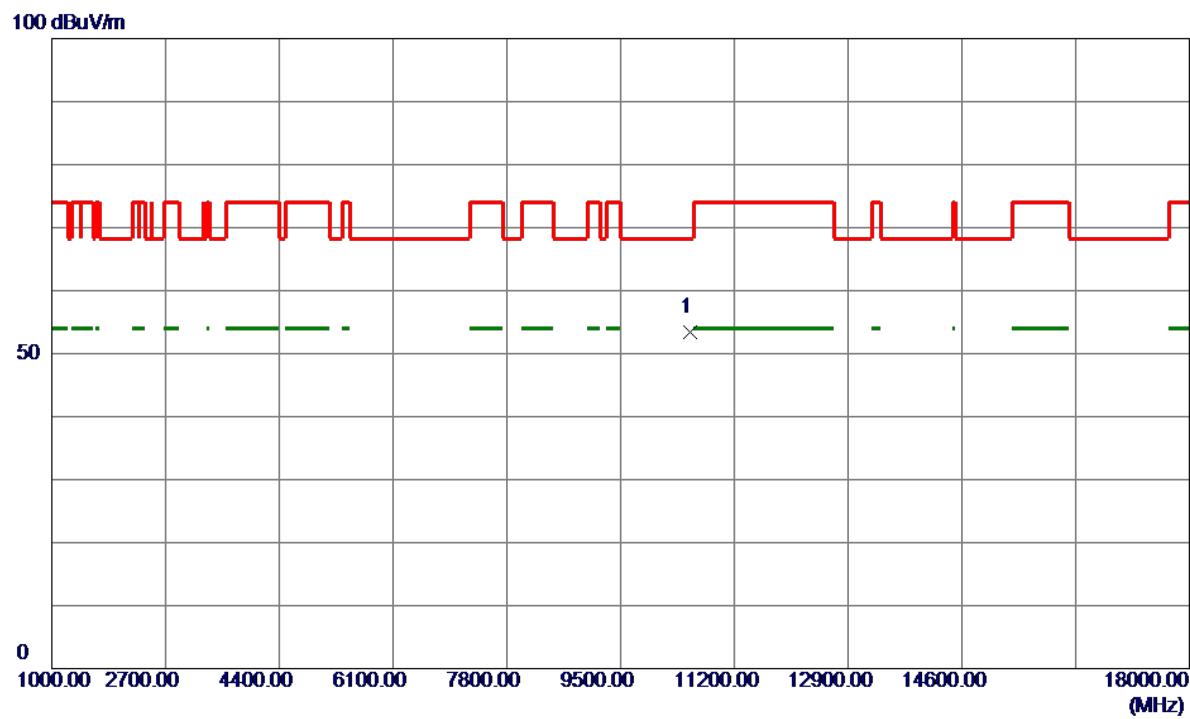


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10536.8000	42.51	10.81	53.32	68.20	-14.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

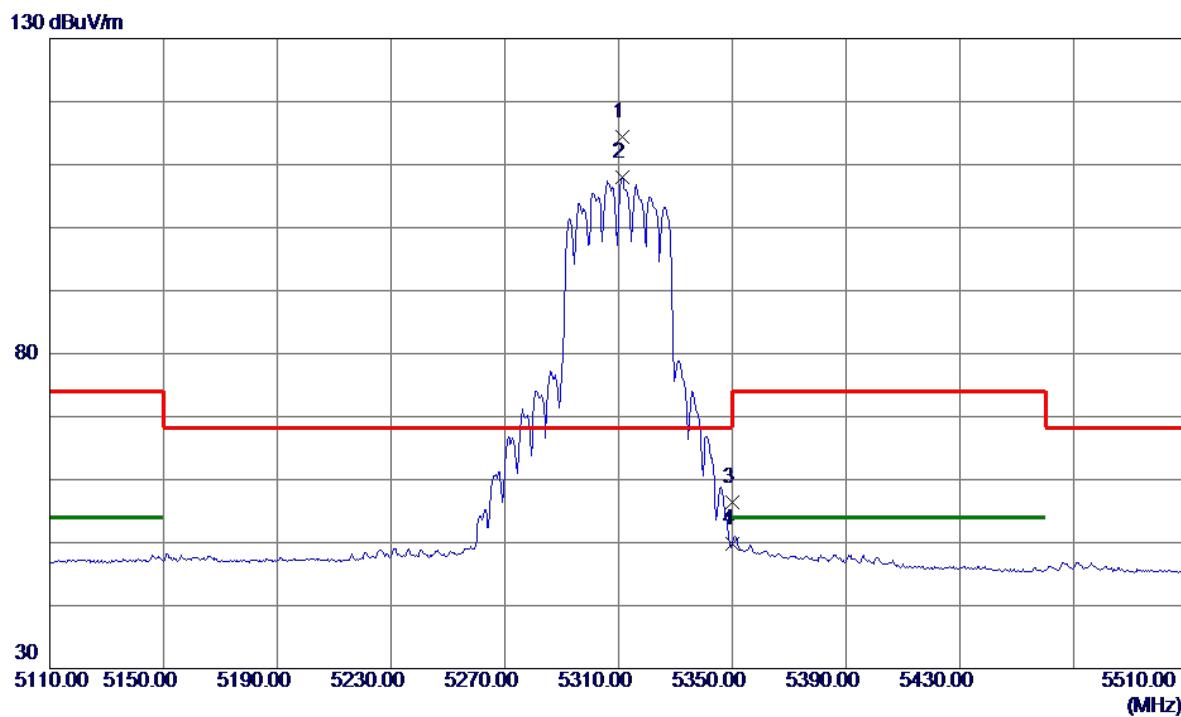


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5311.2000	99.80	14.58	114.38	68.20	46.18	Peak	No Limit
2	5311.2000	93.36	14.58	107.94	999.00	-891.06	AVG	No Limit
3	5350.0000	41.86	14.61	56.47	74.00	-17.53	Peak	
4	5350.0000	35.23	14.61	49.84	54.00	-4.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT40) Mode 5310 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

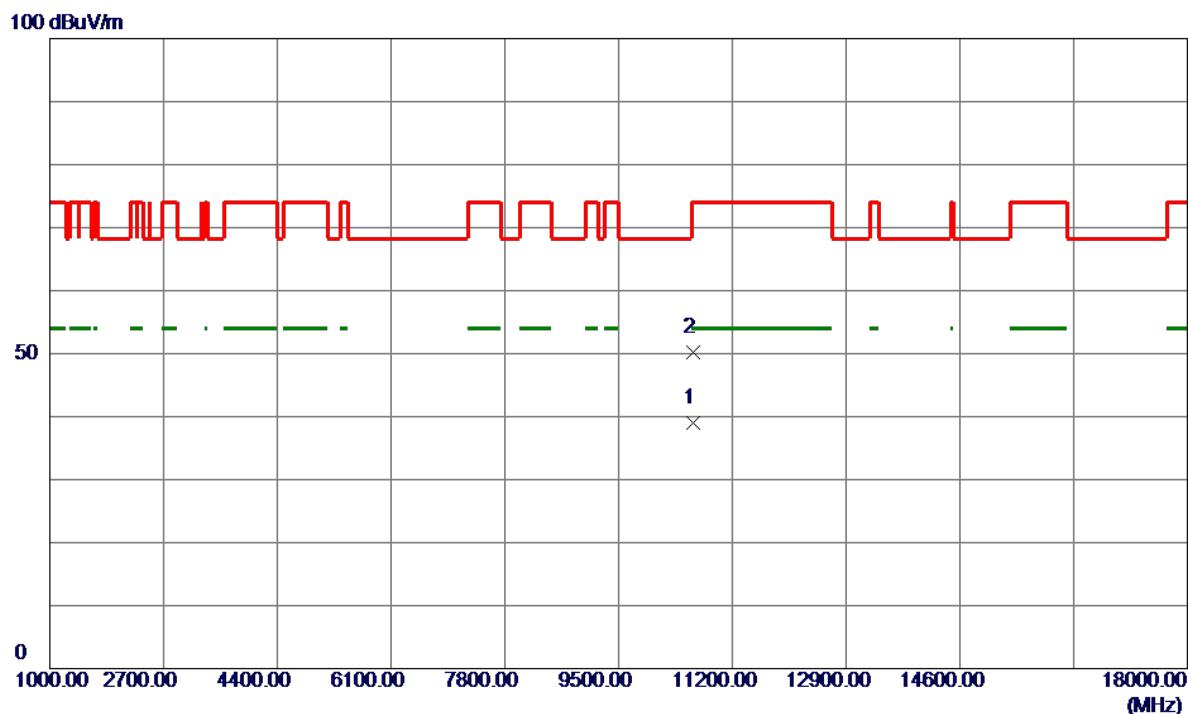


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10620.1000	28.22	10.81	39.03	54.00	-14.97	AVG	
2	10620.2000	39.37	10.81	50.18	74.00	-23.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

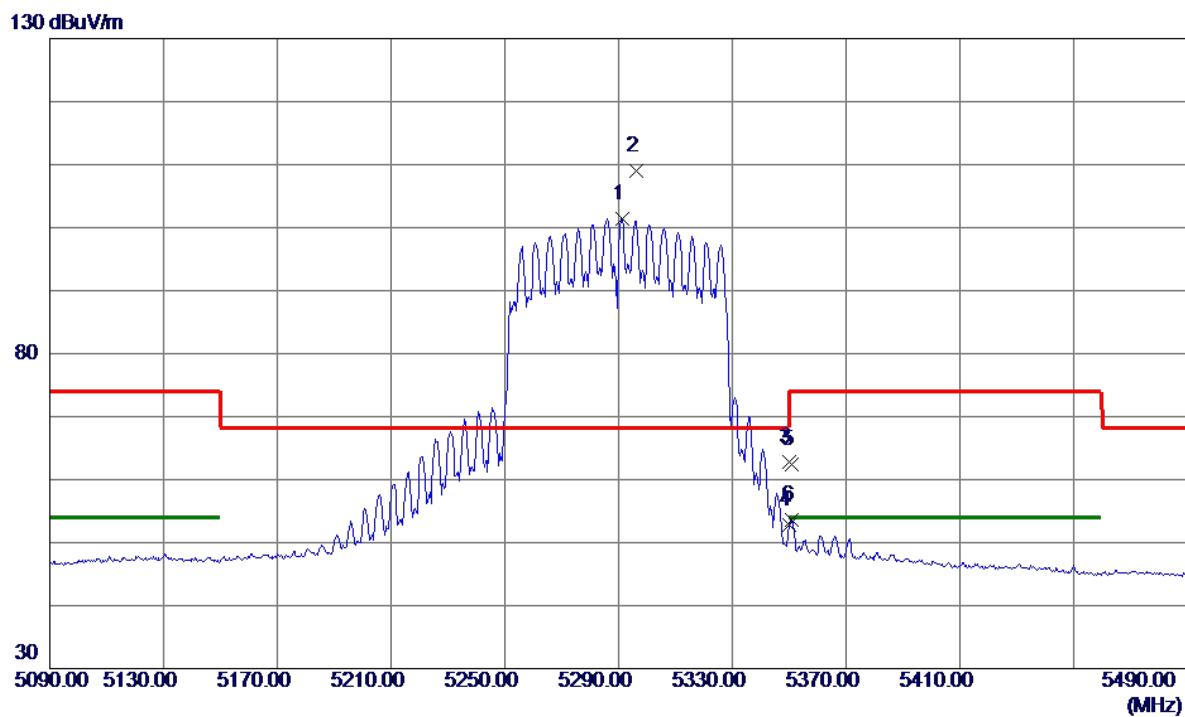


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5291.2000	86.88	14.56	101.44	999.00	-897.56	AVG	No Limit
2 *	5296.4000	94.36	14.57	108.93	68.20	40.73	Peak	No Limit
3	5350.0000	48.26	14.61	62.87	74.00	-11.13	Peak	
4	5350.0000	38.25	14.61	52.86	54.00	-1.14	AVG	
5	5350.8000	47.74	14.62	62.36	74.00	-11.64	Peak	
6	5350.8000	39.01	14.62	53.63	54.00	-0.37	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

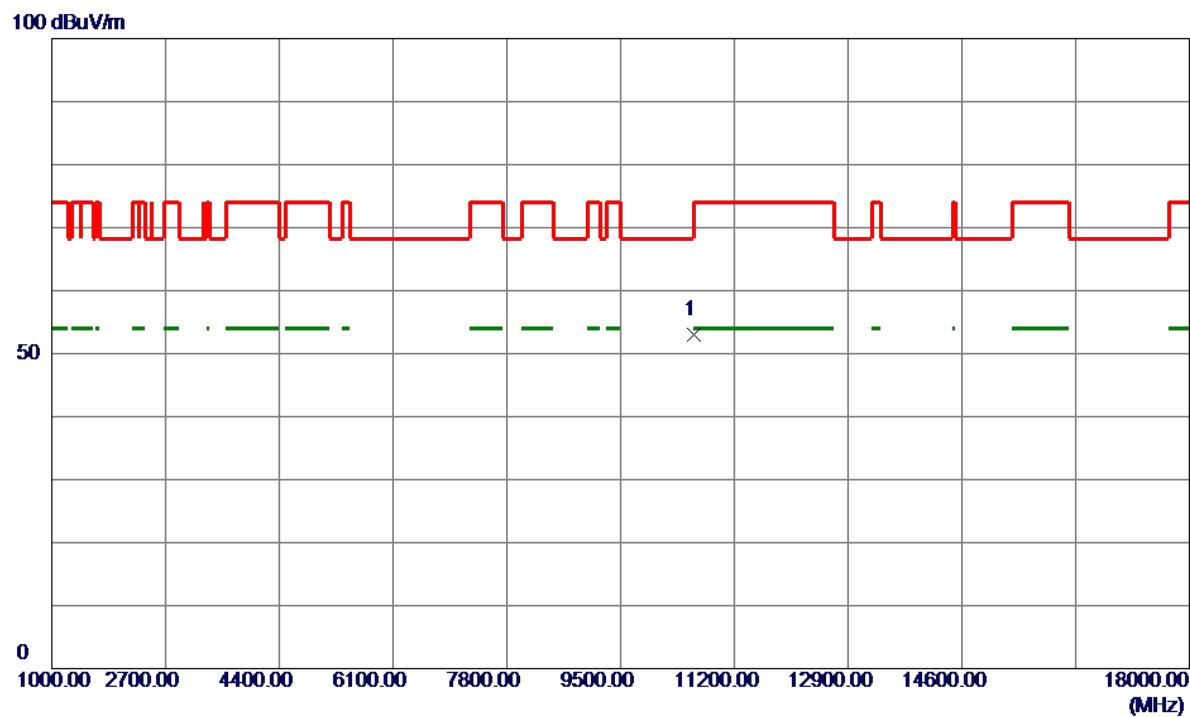**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

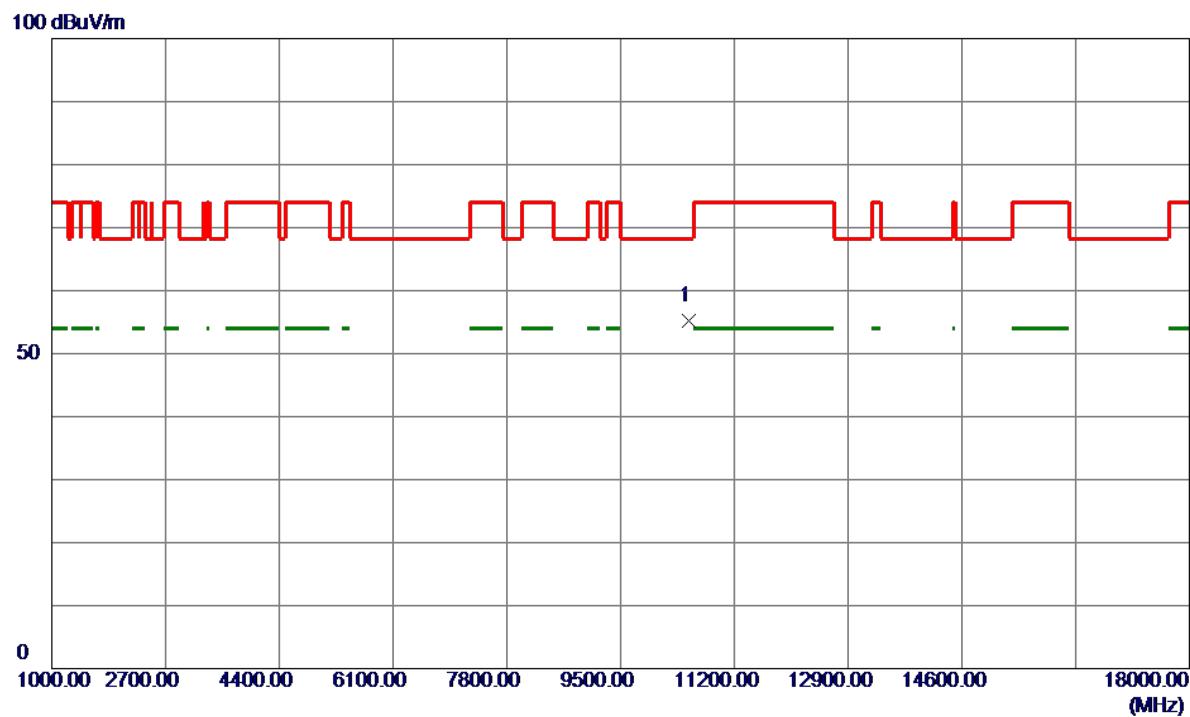


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10521.5500	44.37	10.81	55.18	68.20	-13.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

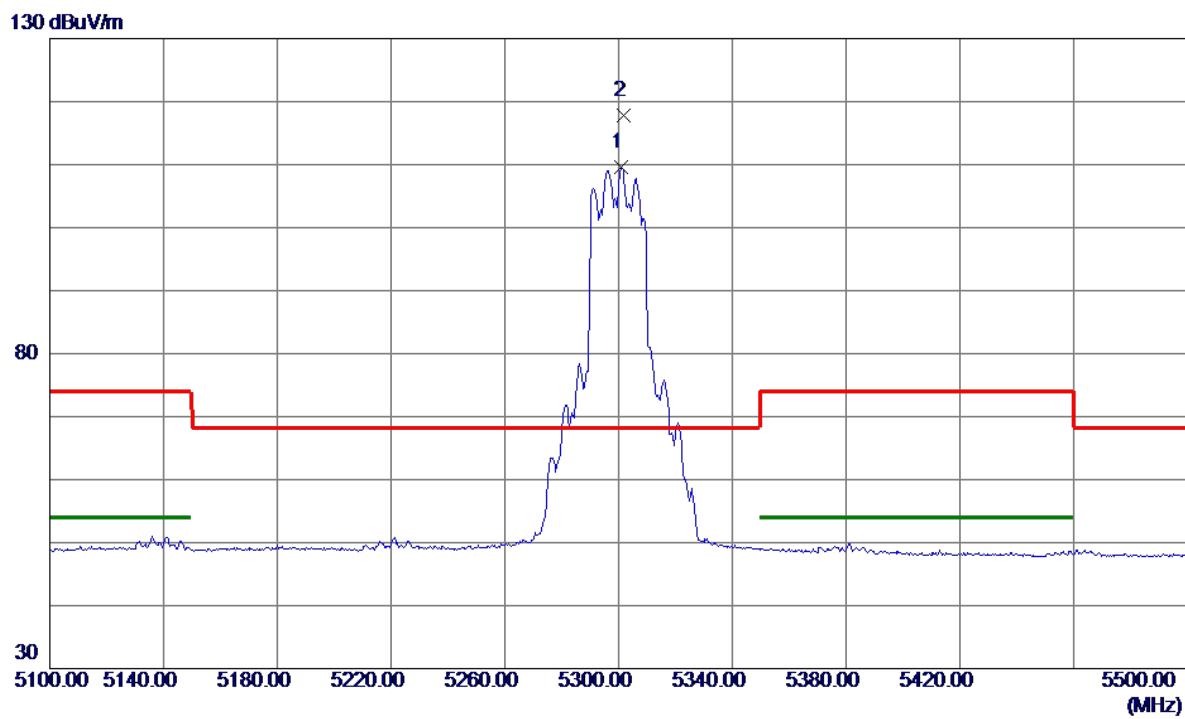


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5300.8000	94.95	14.57	109.52	999.00	-889.48	AVG	No Limit
2 *	5301.6000	103.27	14.57	117.84	68.20	49.64	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

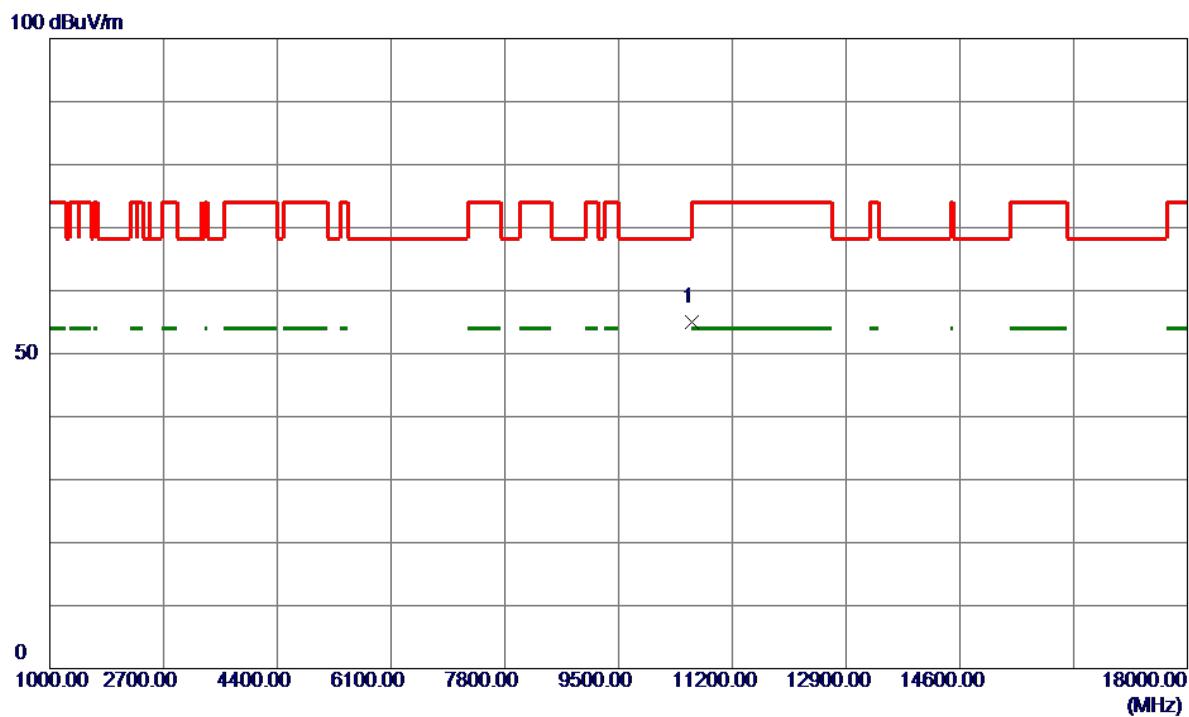


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10596.9000	44.21	10.81	55.02	68.20	-13.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

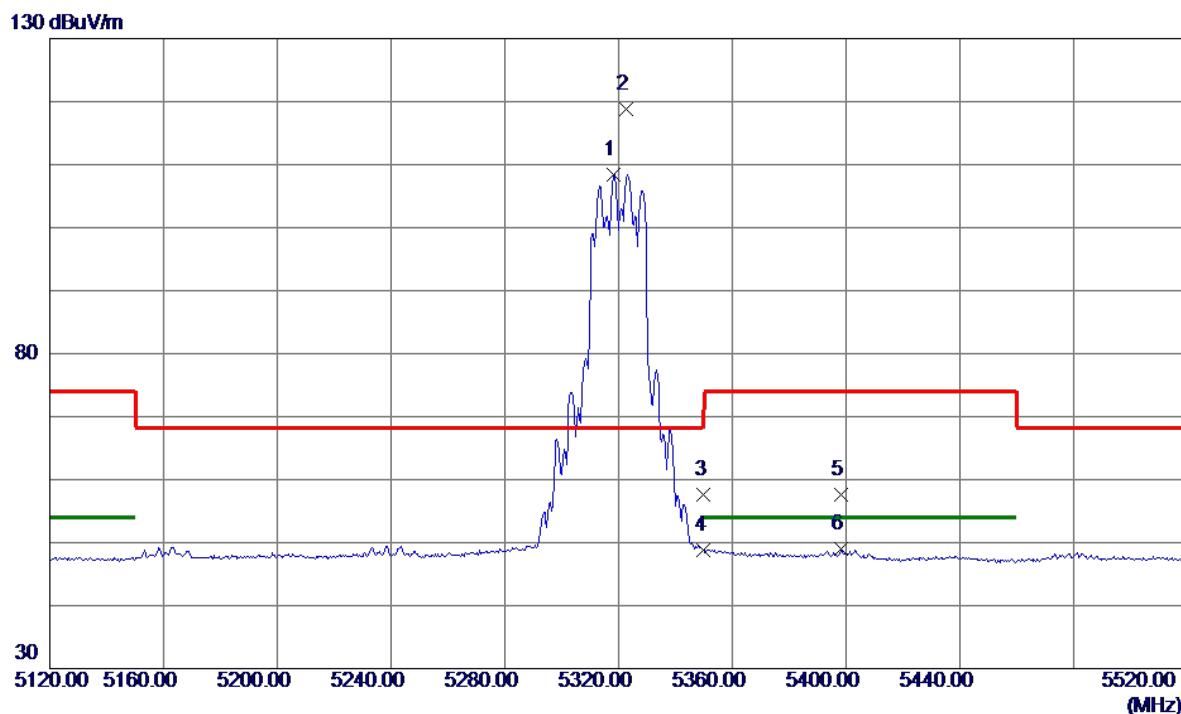


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5318.4000	93.82	14.59	108.41	999.00	-890.59	AVG	No Limit
2 *	5322.8000	104.16	14.59	118.75	68.20	50.55	Peak	No Limit
3	5350.0000	42.92	14.61	57.53	74.00	-16.47	Peak	
4	5350.0000	34.17	14.61	48.78	54.00	-5.22	AVG	
5	5398.4000	43.03	14.66	57.69	74.00	-16.31	Peak	
6	5398.4000	34.34	14.66	49.00	54.00	-5.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

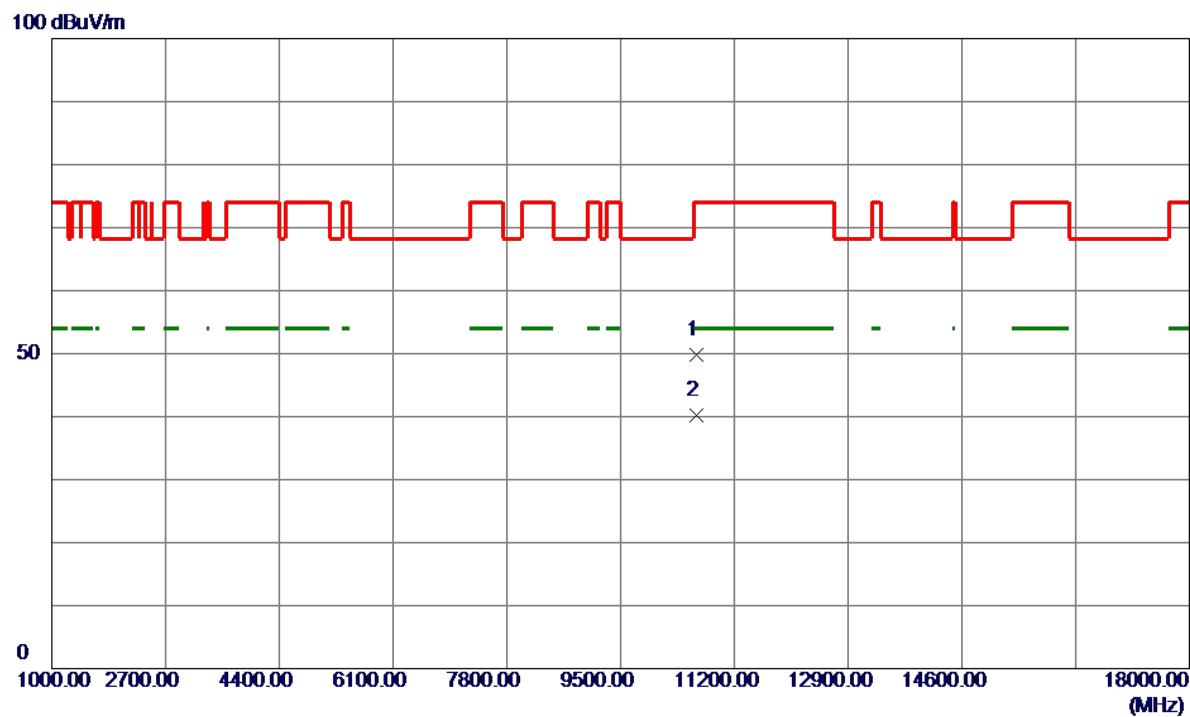


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	10640.1000	38.92	10.81	49.73	74.00	-24.27	Peak	
2 *	10640.4000	29.44	10.81	40.25	54.00	-13.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

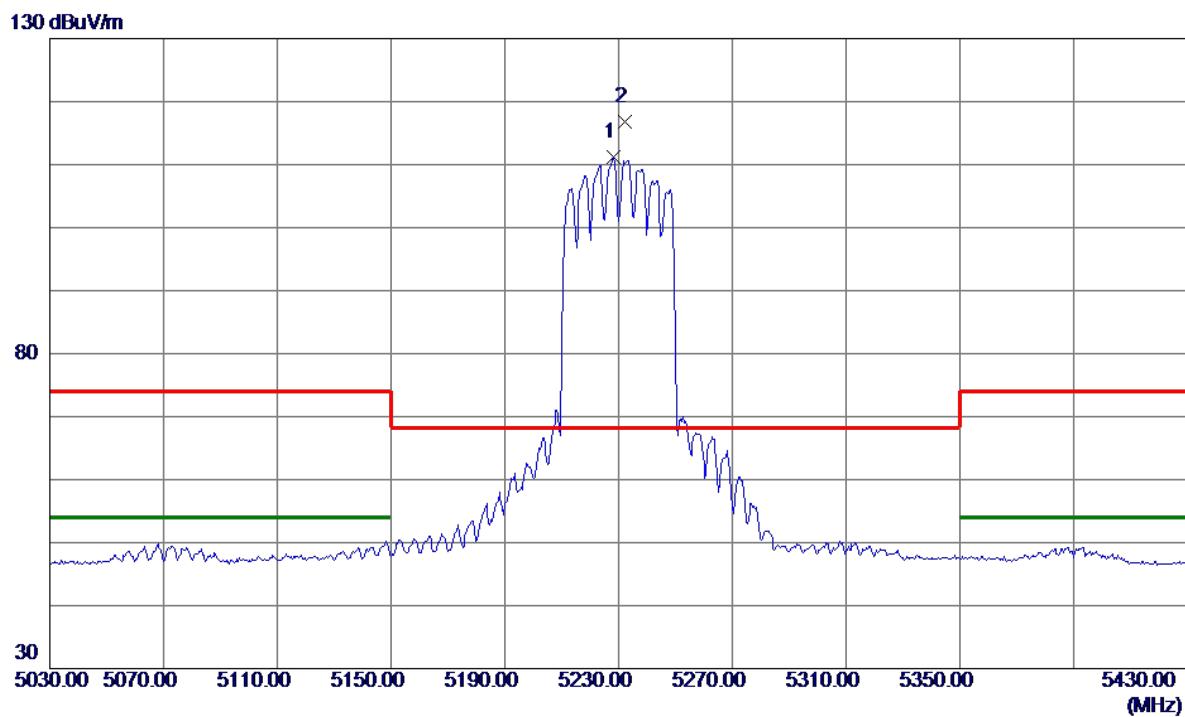


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5228.4000	96.74	14.51	111.25	999.00	-887.75	AVG	No Limit
2 *	5232.4000	102.26	14.51	116.77	68.20	48.57	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

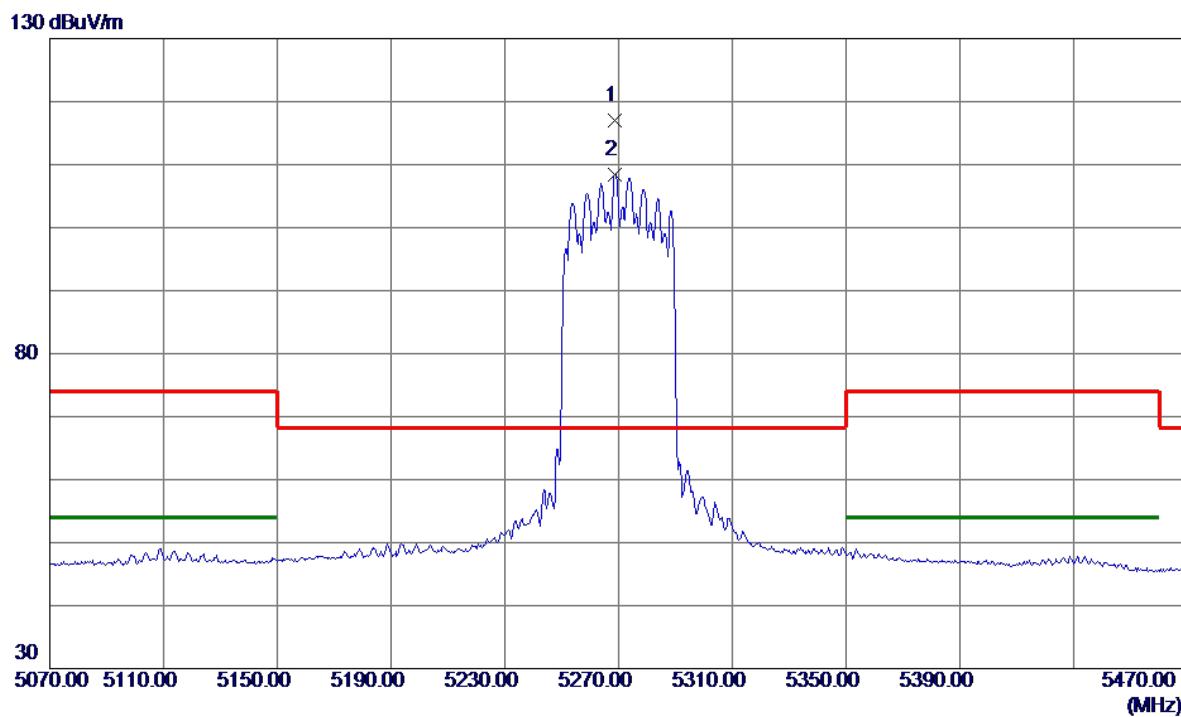


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5268.8000	102.37	14.54	116.91	68.20	48.71	Peak	No Limit
2	5268.8000	93.93	14.54	108.47	999.00	-890.53	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

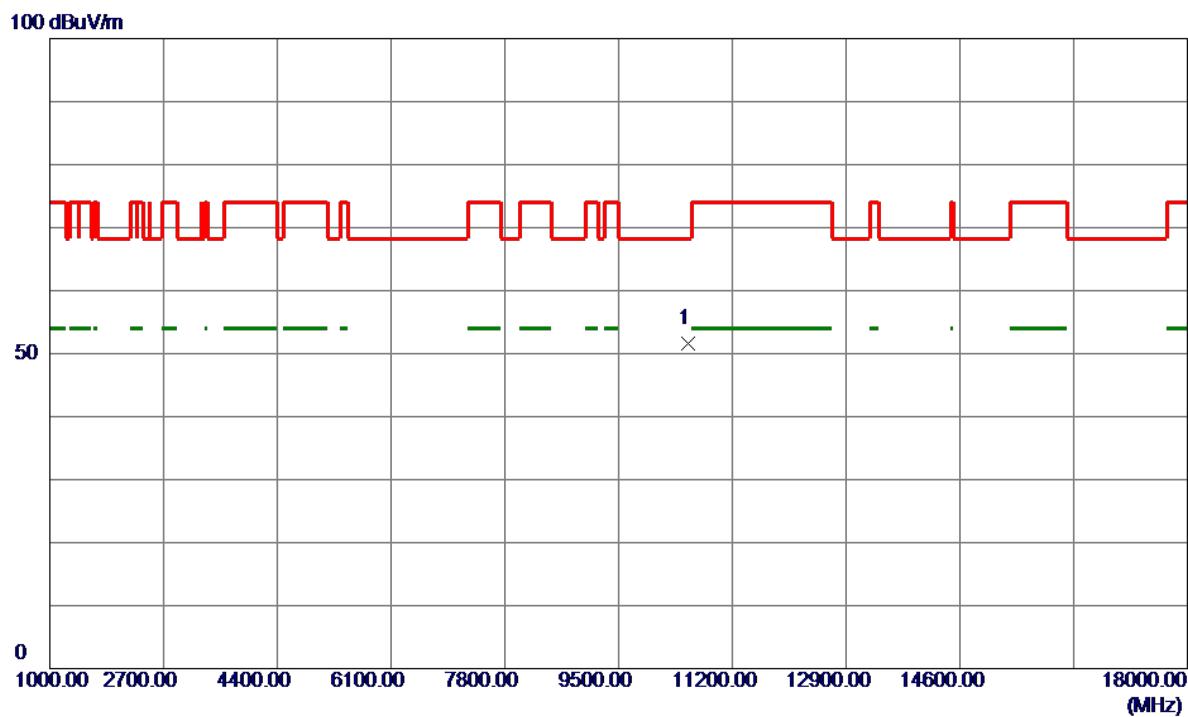


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10544.9000	40.70	10.81	51.51	68.20	-16.69	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

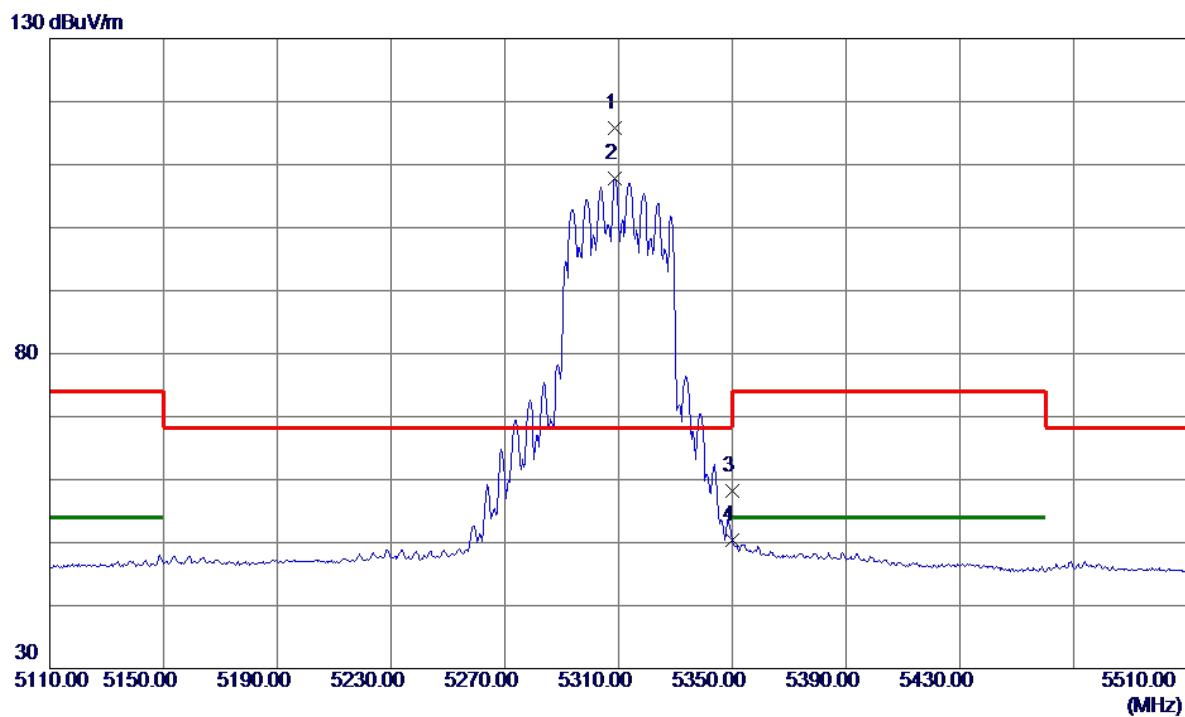


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5308.8000	101.25	14.58	115.83	68.20	47.63	Peak	No Limit
2	5308.8000	93.28	14.58	107.86	999.00	-891.14	AVG	No Limit
3	5350.0000	43.65	14.61	58.26	74.00	-15.74	Peak	
4	5350.0000	35.82	14.61	50.43	54.00	-3.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

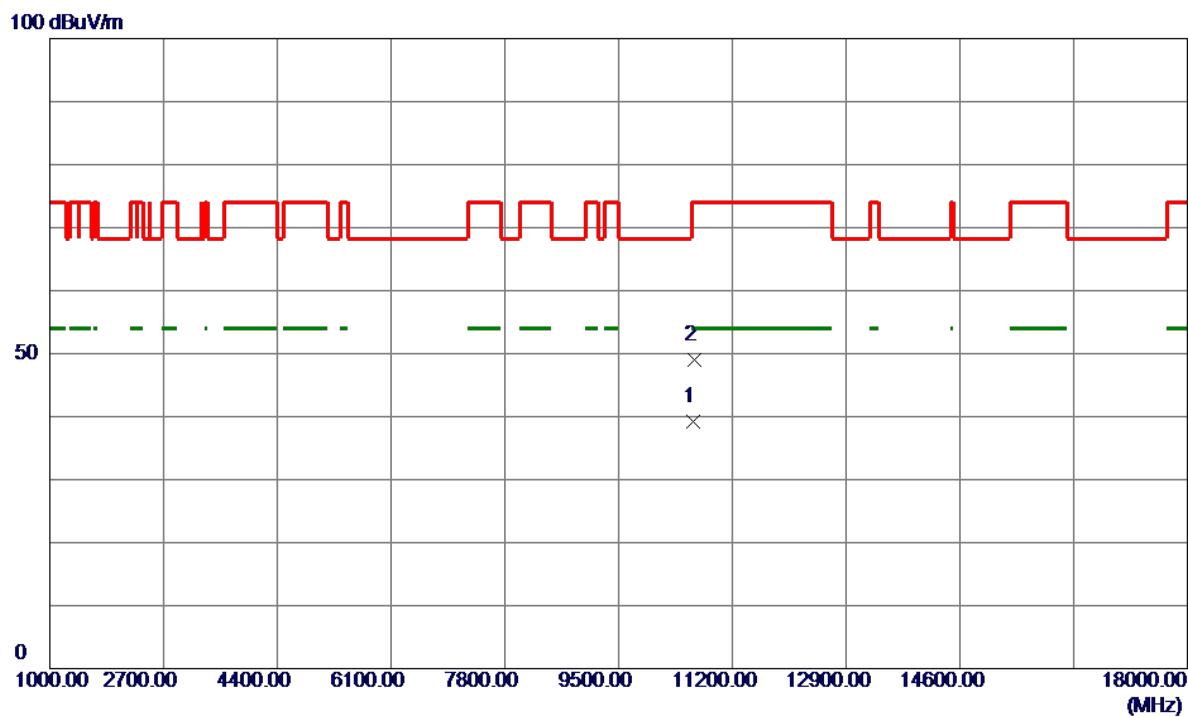


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10615.1000	28.41	10.81	39.22	54.00	-14.78	AVG	
2	10624.7000	38.10	10.81	48.91	74.00	-25.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

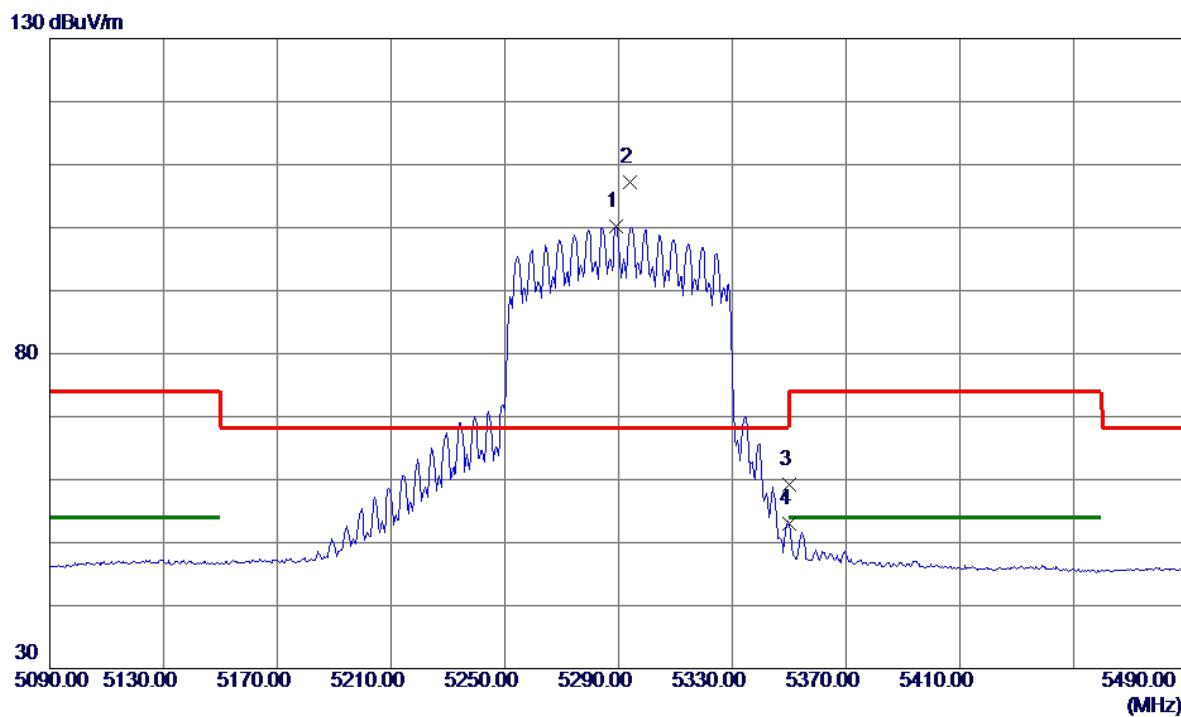


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5289.2000	85.65	14.56	100.21	999.00	-898.79	AVG	No Limit
2 *	5294.0000	92.63	14.56	107.19	68.20	38.99	Peak	No Limit
3	5350.0000	44.56	14.61	59.17	74.00	-14.83	Peak	
4	5350.0000	38.31	14.61	52.92	54.00	-1.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

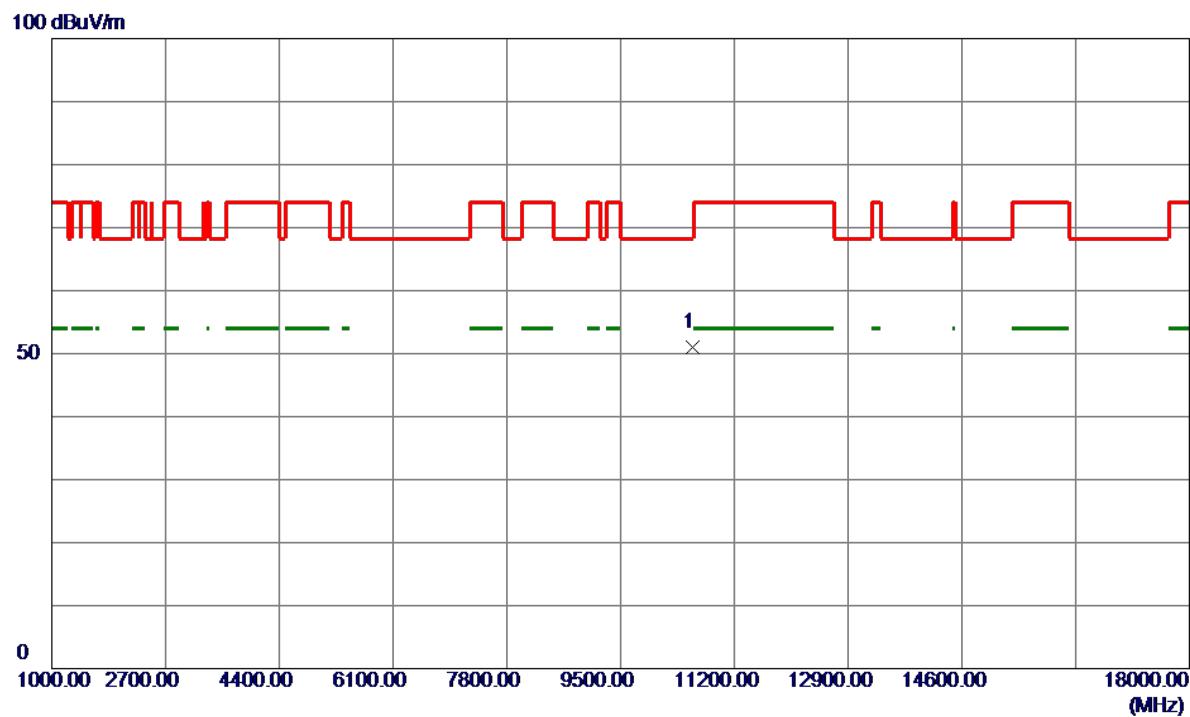


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10585.1500	40.24	10.81	51.05	68.20	-17.15	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

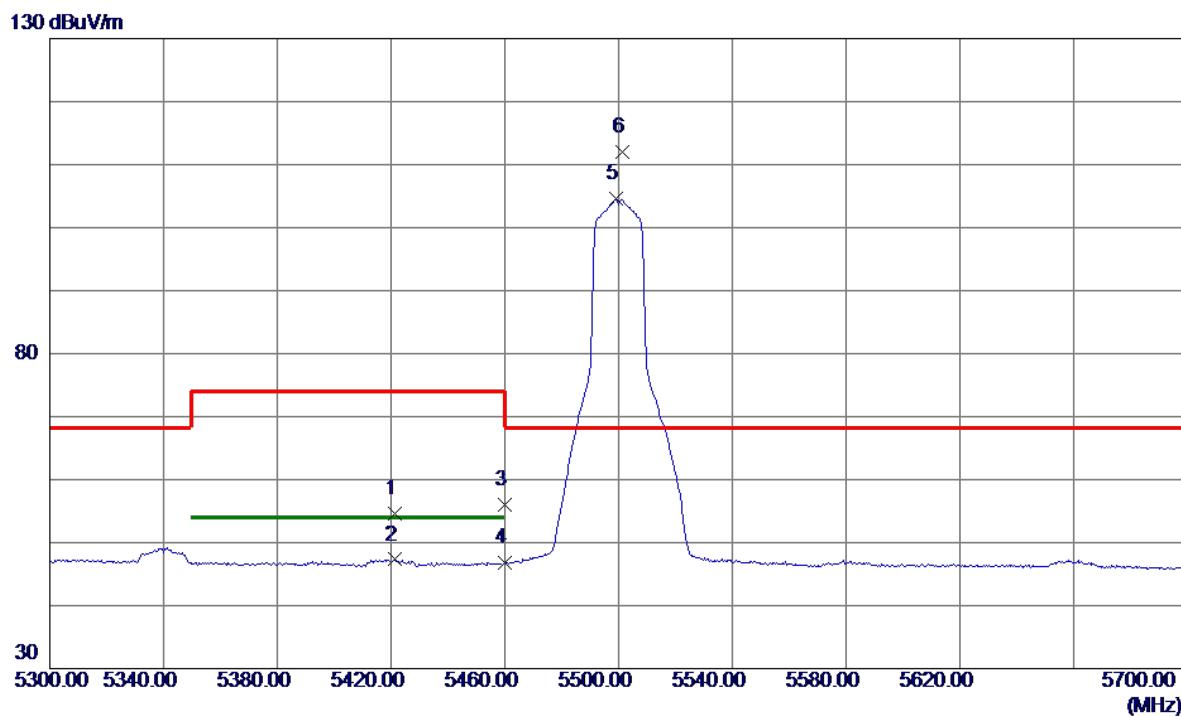


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5421.2000	39.98	14.68	54.66	74.00	-19.34	Peak	
2	5421.2000	32.62	14.68	47.30	54.00	-6.70	AVG	
3	5460.0000	41.25	14.71	55.96	74.00	-18.04	Peak	
4	5460.0000	32.11	14.71	46.82	54.00	-7.18	AVG	
5	5499.2000	89.82	14.75	104.57	999.00	-894.43	AVG	No Limit
6 *	5501.2000	97.15	14.75	111.90	68.20	43.70	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

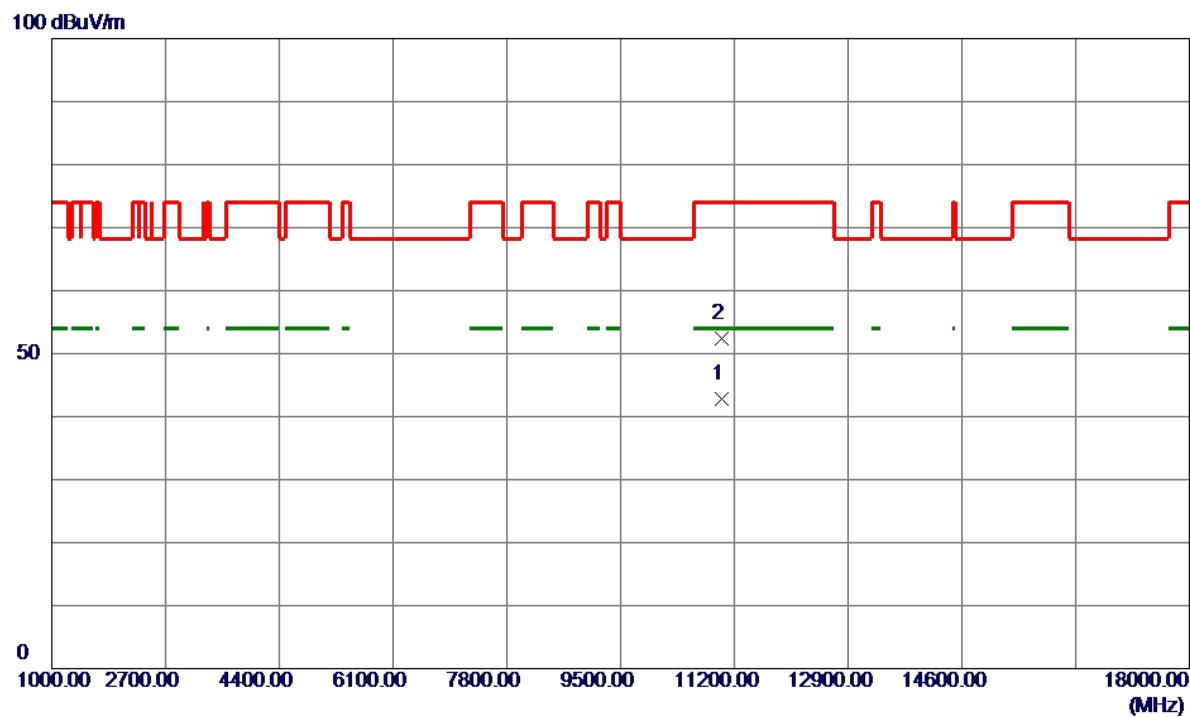


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11002.3000	32.08	10.81	42.89	54.00	-11.11	AVG	
2	11003.1000	41.65	10.81	52.46	74.00	-21.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

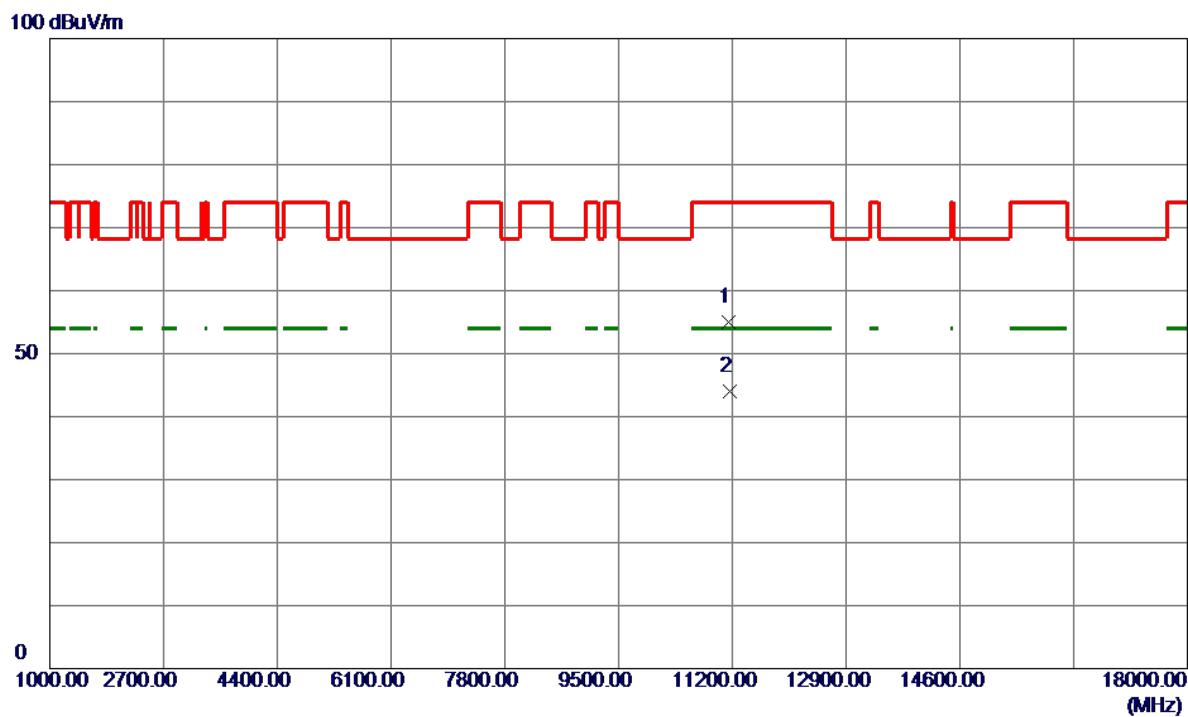


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	11152.4000	44.10	10.90	55.00	74.00	-19.00	Peak	
2 *	11162.4000	33.08	10.91	43.99	54.00	-10.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

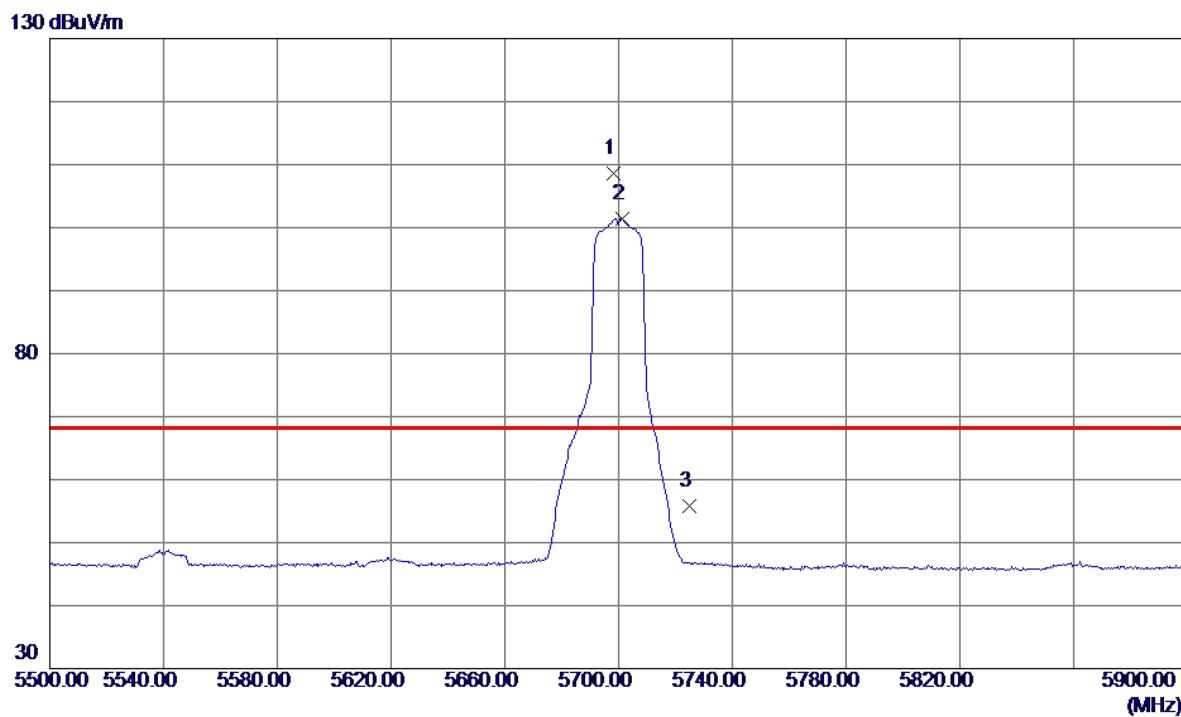


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5698.4000	93.27	15.25	108.52	68.20	40.32	Peak	No Limit
2	5701.2000	86.21	15.26	101.47	999.00	-897.53	AVG	No Limit
3	5725.0000	40.51	15.32	55.83	68.20	-12.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

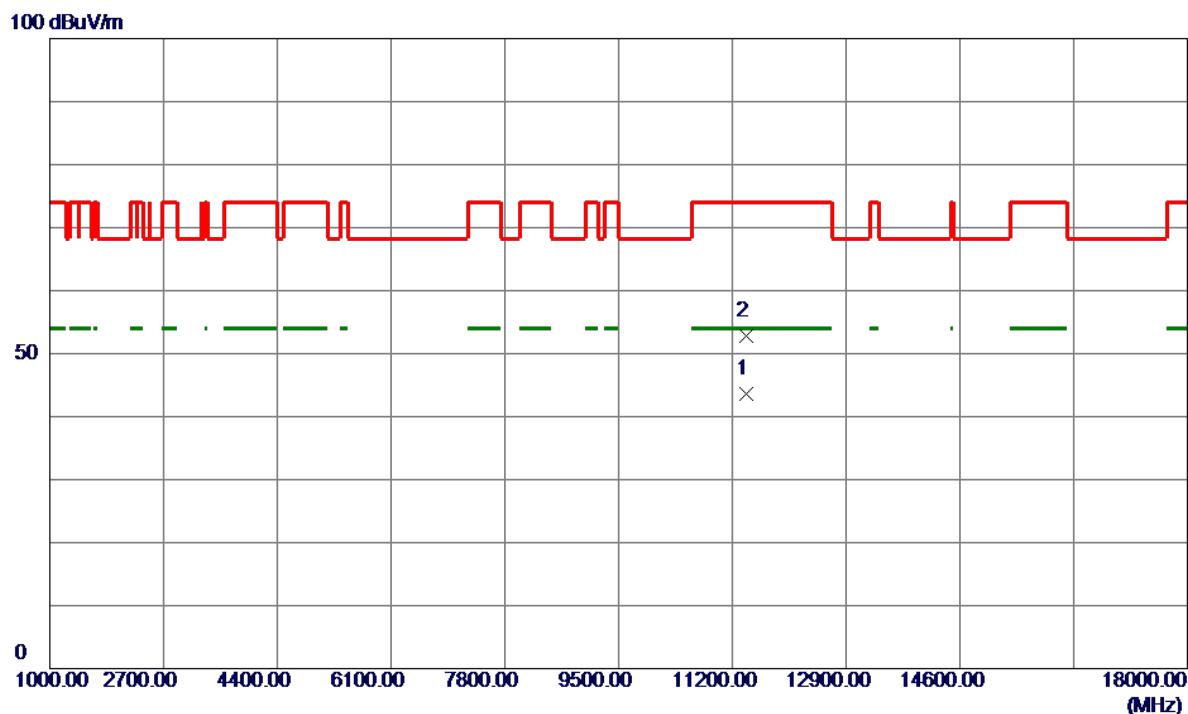


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11401.8000	32.56	11.05	43.61	54.00	-10.39	AVG	
2	11404.9500	41.66	11.05	52.71	74.00	-21.29	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

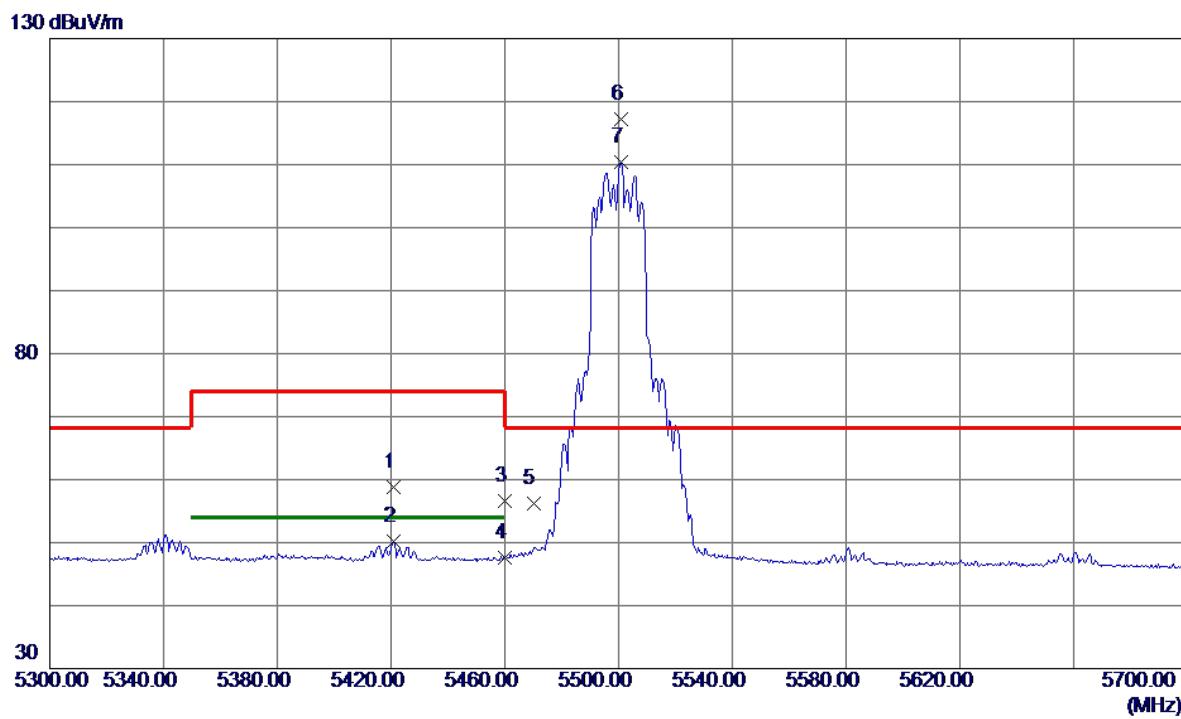


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5420.8000	44.06	14.68	58.74	74.00	-15.26	Peak	
2	5420.8000	35.50	14.68	50.18	54.00	-3.82	AVG	
3	5460.0000	41.97	14.71	56.68	74.00	-17.32	Peak	
4	5460.0000	32.91	14.71	47.62	54.00	-6.38	AVG	
5	5470.0000	41.45	14.72	56.17	68.20	-12.03	Peak	
6 *	5500.8000	102.38	14.75	117.13	68.20	48.93	Peak	No Limit
7	5500.8000	95.65	14.75	110.40	999.00	-888.60	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

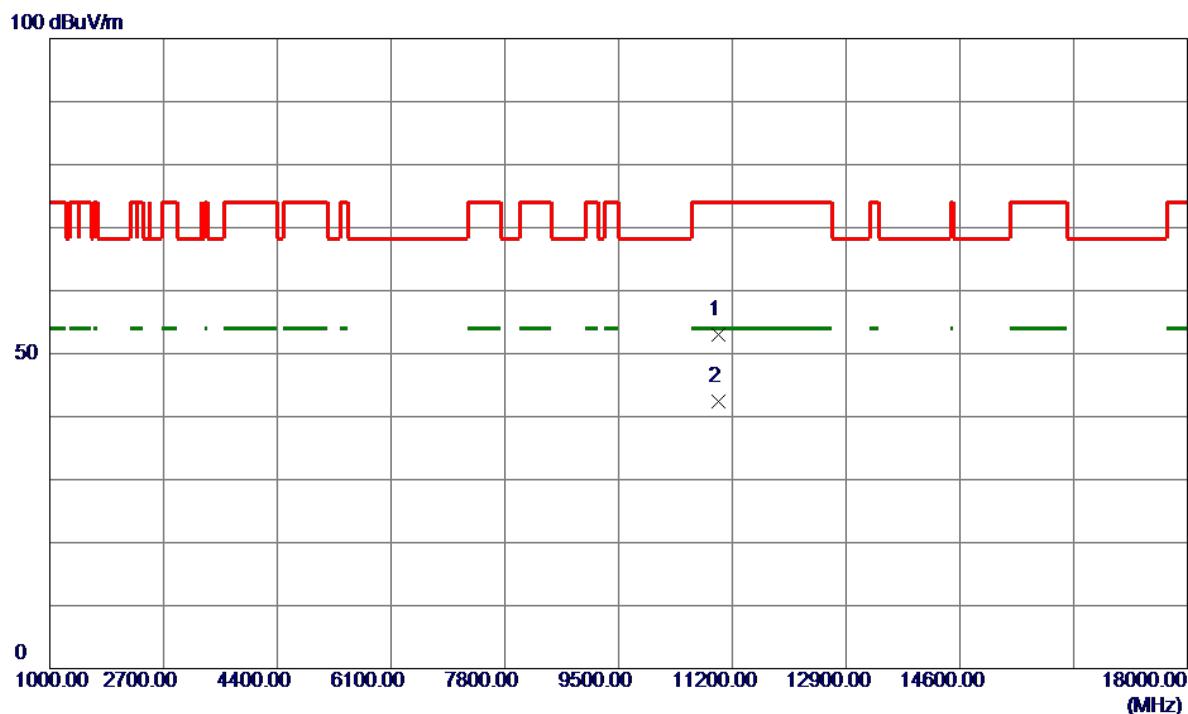


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	10997.9000	42.28	10.81	53.09	74.00	-20.91	Peak	
2 *	10998.0500	31.54	10.81	42.35	54.00	-11.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

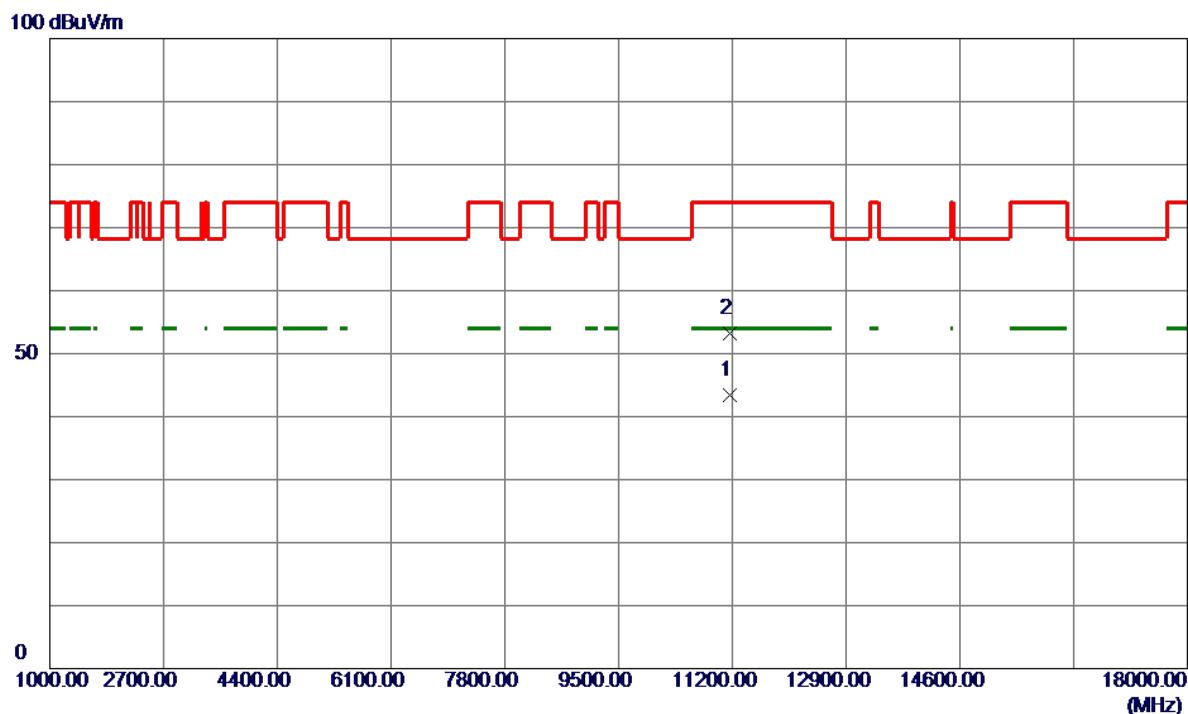


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	11158.4000	32.55	10.90	43.45	54.00	-10.55	AVG	
2	11163.2000	42.25	10.91	53.16	74.00	-20.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

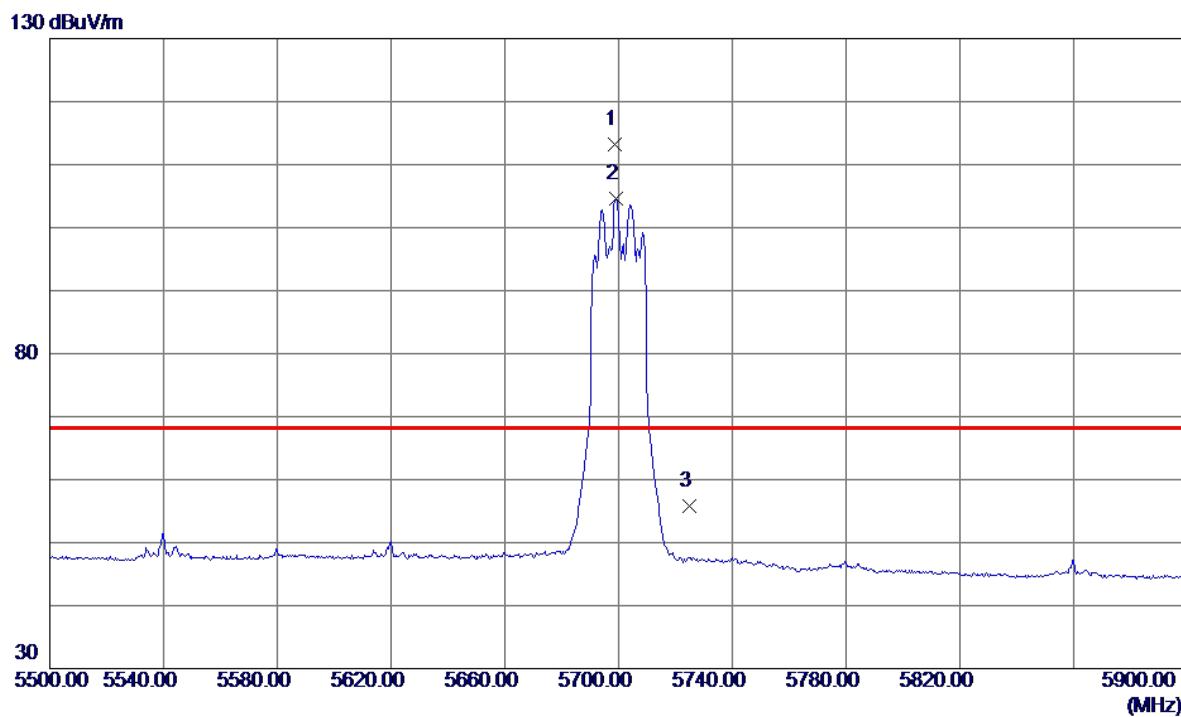


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5698.8000	98.04	15.25	113.29	68.20	45.09	Peak	No Limit
2	5699.2000	89.25	15.26	104.51	999.00	-894.49	AVG	No Limit
3	5725.0000	40.55	15.32	55.87	68.20	-12.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

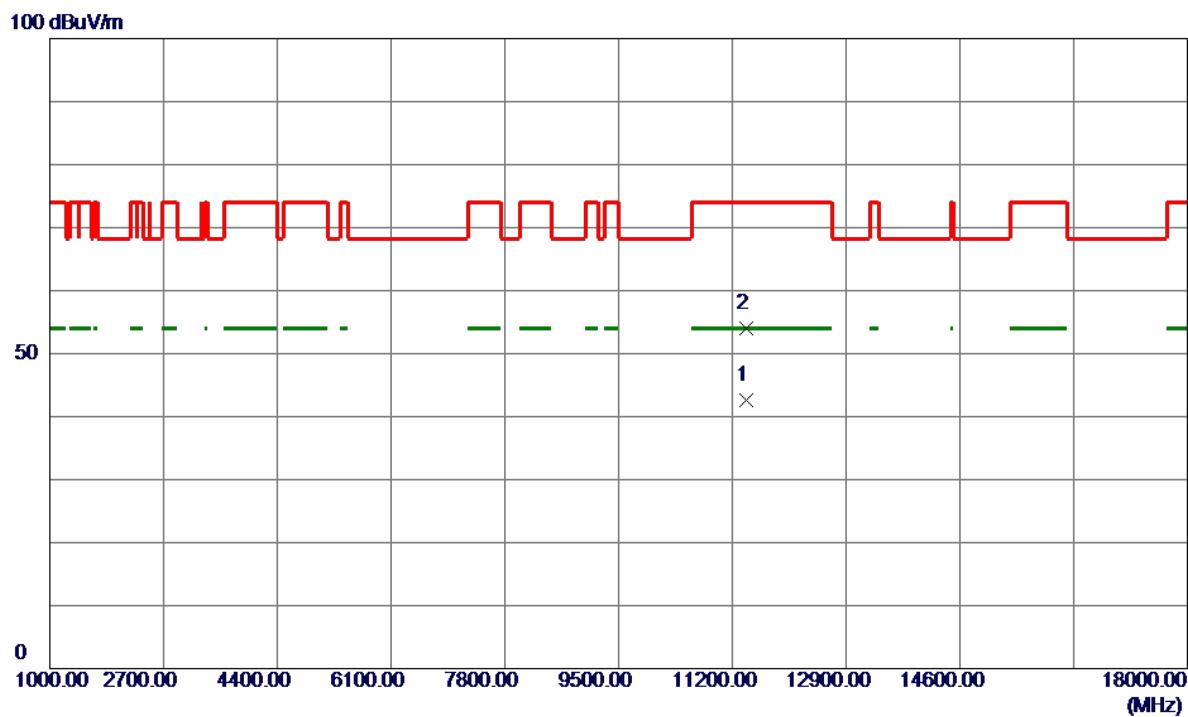


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11402.8000	31.63	11.05	42.68	54.00	-11.32	AVG	
2	11407.6000	42.93	11.05	53.98	74.00	-20.02	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

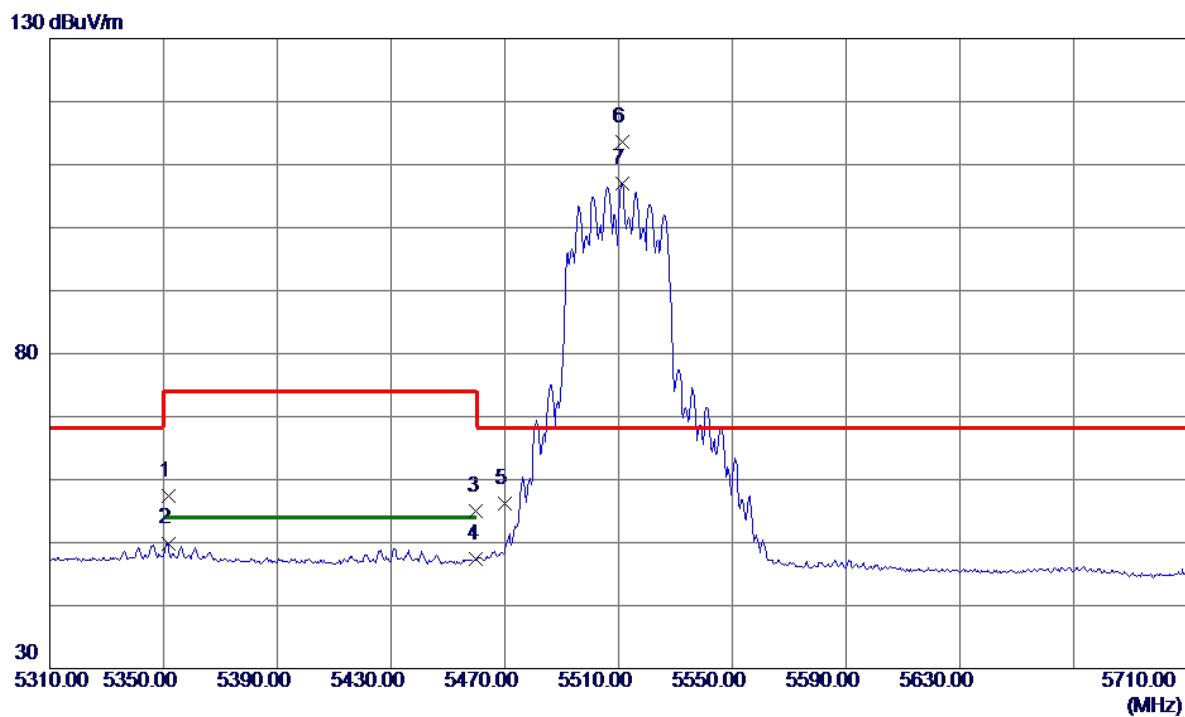


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5351.6000	42.70	14.62	57.32	74.00	-16.68	Peak	
2	5351.6000	35.28	14.62	49.90	54.00	-4.10	AVG	
3	5460.0000	40.32	14.71	55.03	74.00	-18.97	Peak	
4	5460.0000	32.63	14.71	47.34	54.00	-6.66	AVG	
5	5470.0000	41.52	14.72	56.24	68.20	-11.96	Peak	
6 *	5511.2000	98.81	14.78	113.59	68.20	45.39	Peak	No Limit
7	5511.2000	92.24	14.78	107.02	999.00	-891.98	AVG	No Limit

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

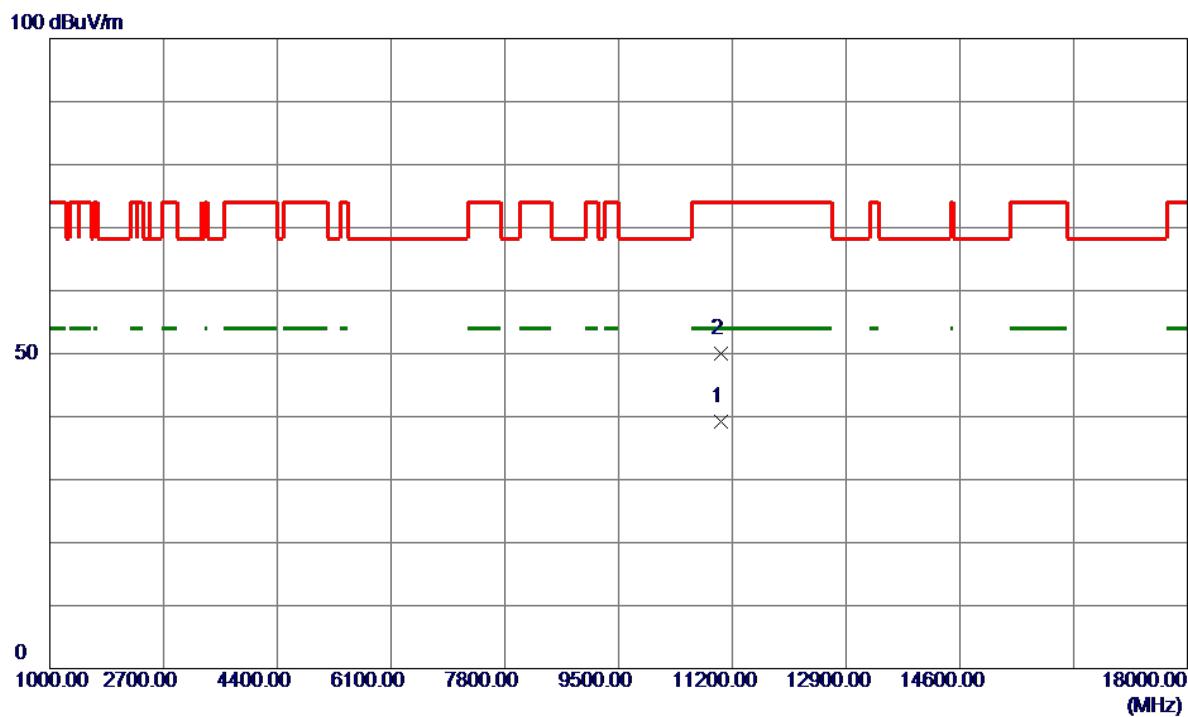**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

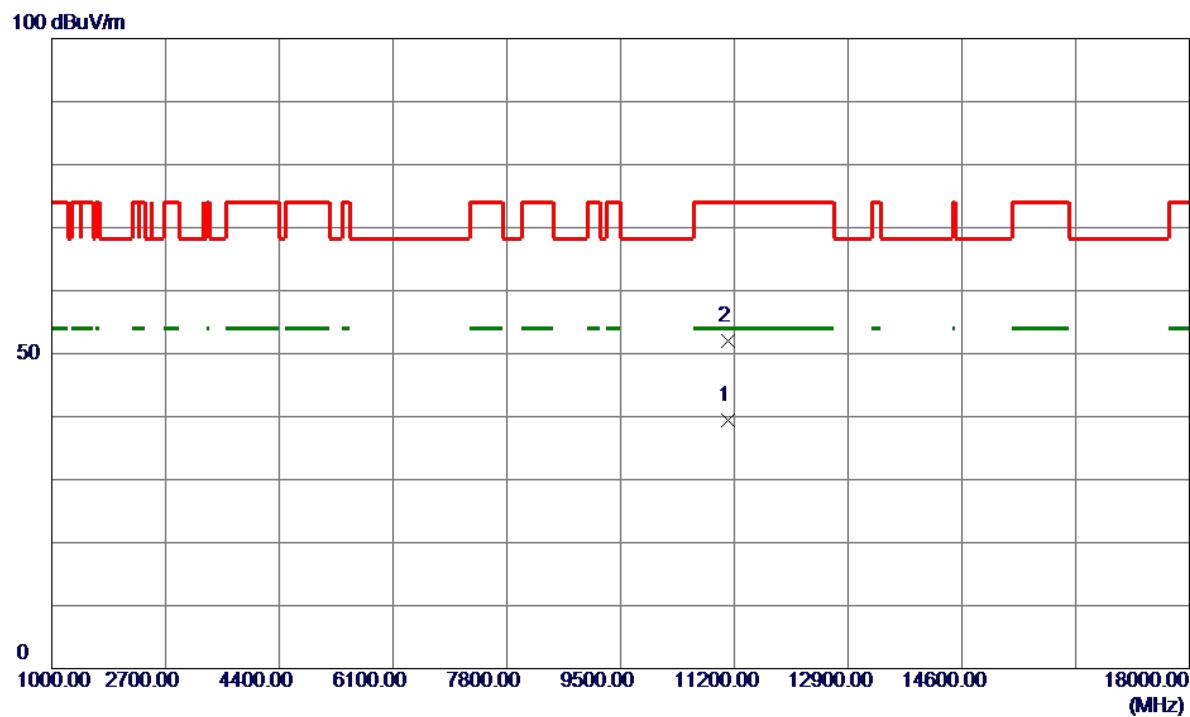


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11097.5000	28.55	10.87	39.42	54.00	-14.58	AVG	
2	11102.7500	41.04	10.87	51.91	74.00	-22.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

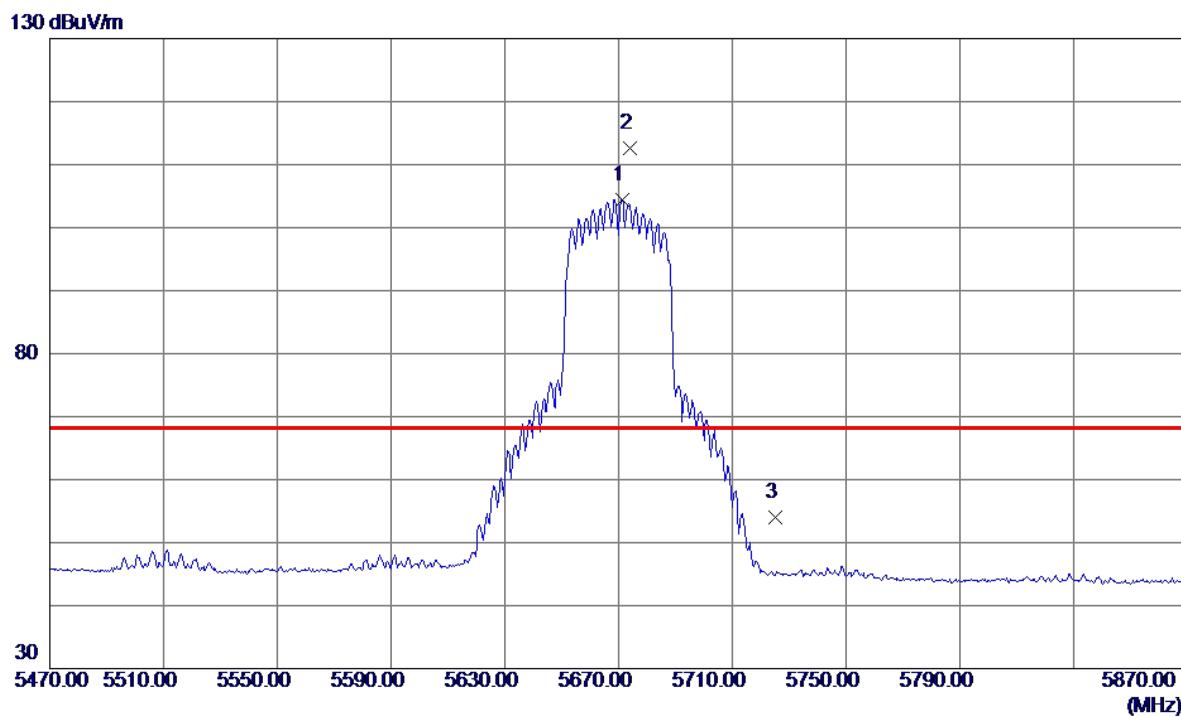


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5671.2000	89.27	15.18	104.45	999.00	-894.55	AVG	No Limit
2 *	5674.0000	97.33	15.19	112.52	68.20	44.32	Peak	No Limit
3	5725.0000	38.70	15.32	54.02	68.20	-14.18	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

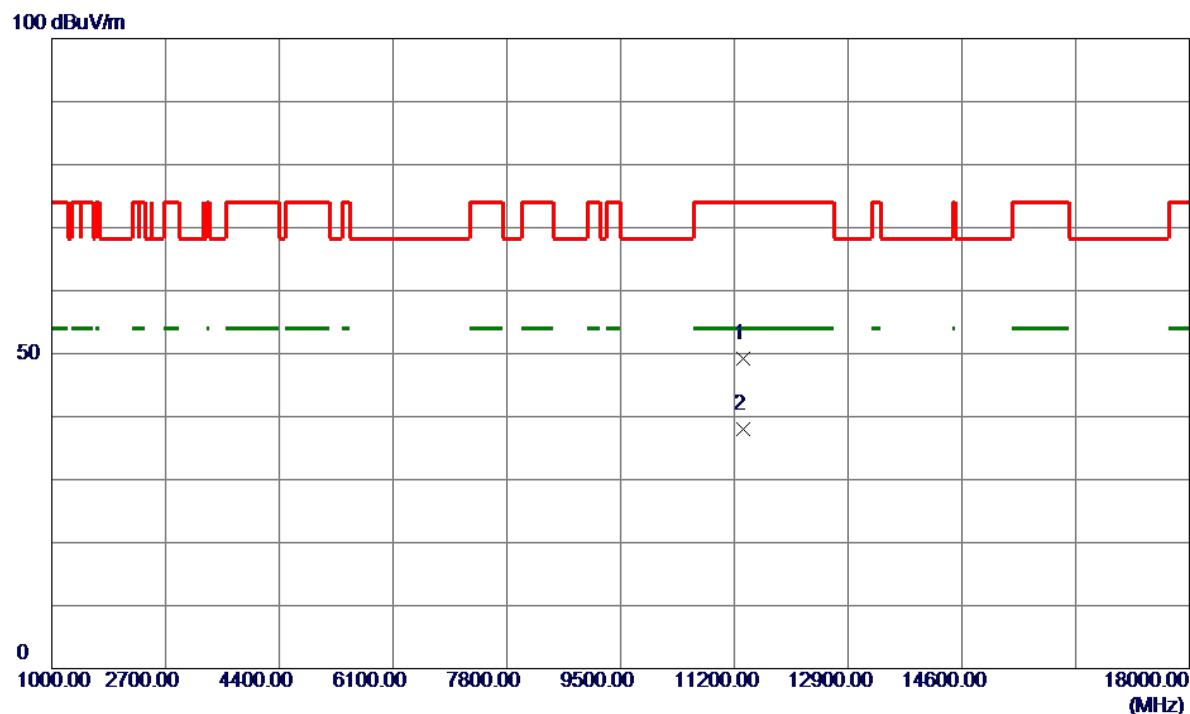


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	11327.2500	38.17	11.00	49.17	74.00	-24.83	Peak	
2 *	11337.4500	27.06	11.01	38.07	54.00	-15.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

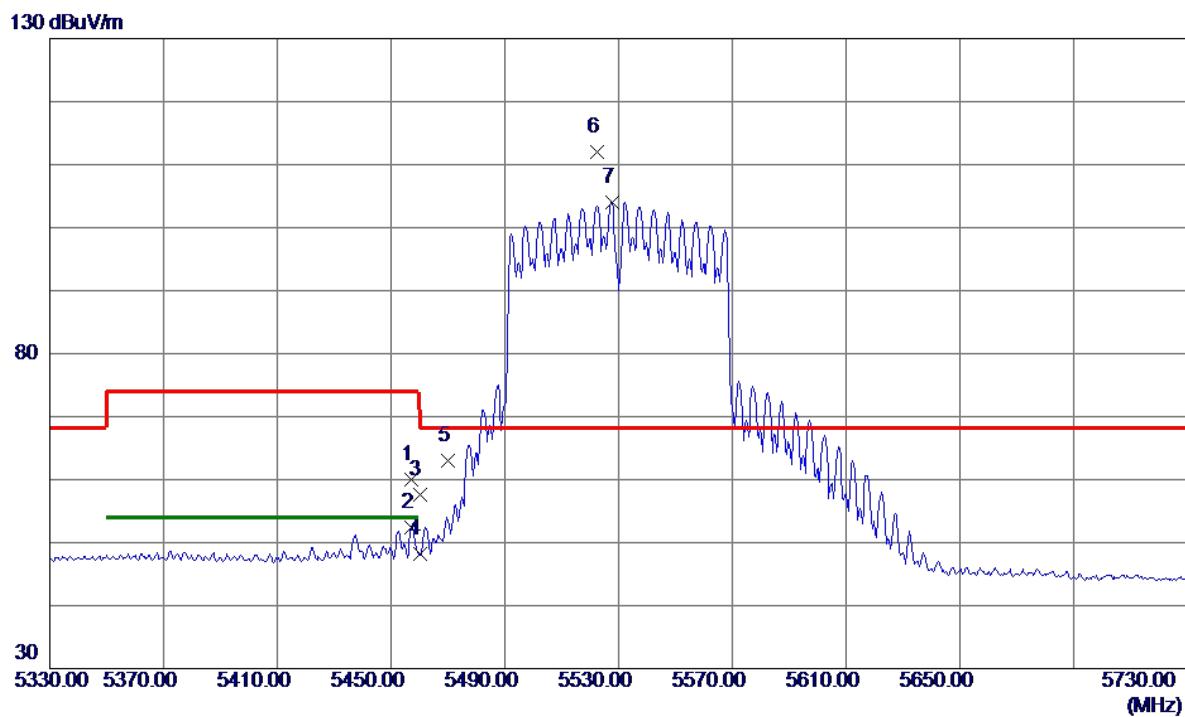


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.2000	45.25	14.71	59.96	74.00	-14.04	Peak	
2	5457.2000	37.78	14.71	52.49	54.00	-1.51	AVG	
3	5460.0000	42.81	14.71	57.52	74.00	-16.48	Peak	
4	5460.0000	33.40	14.71	48.11	54.00	-5.89	AVG	
5	5470.0000	48.33	14.72	63.05	68.20	-5.15	Peak	
6 *	5522.4000	97.24	14.81	112.05	68.20	43.85	Peak	No Limit
7	5527.6000	89.16	14.82	103.98	999.00	-895.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

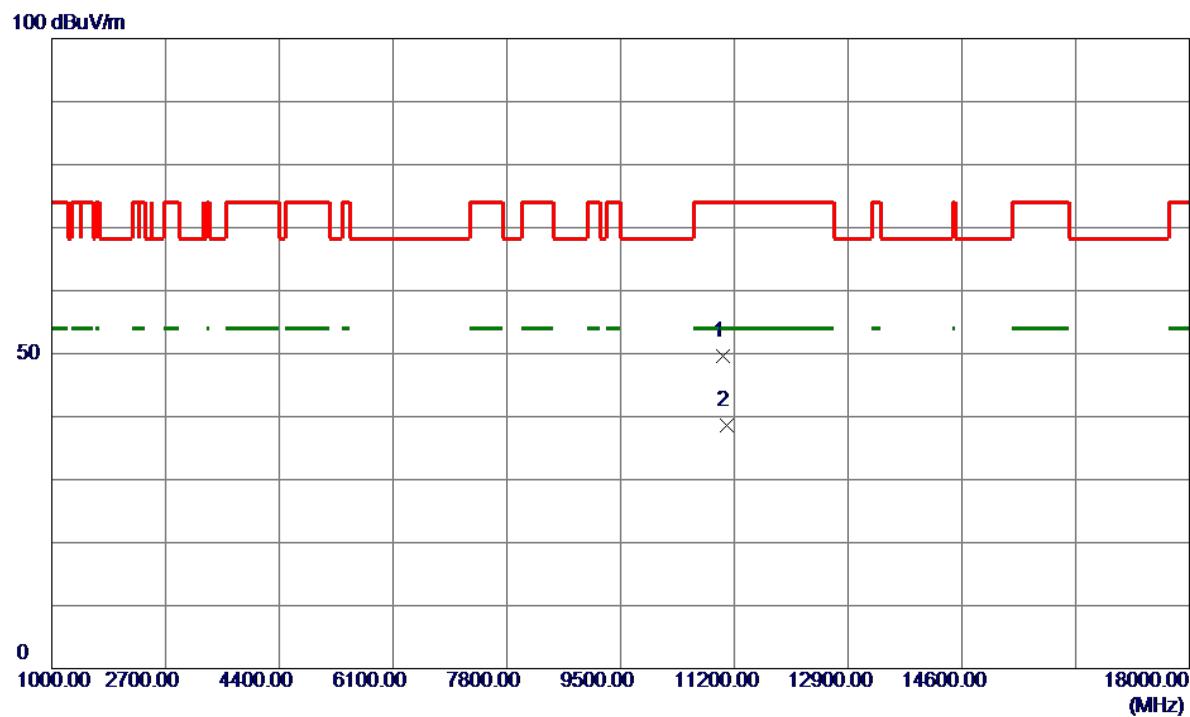


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	11037.8000	38.85	10.83	49.68	74.00	-24.32	Peak	
2 *	11078.0000	27.76	10.86	38.62	54.00	-15.38	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

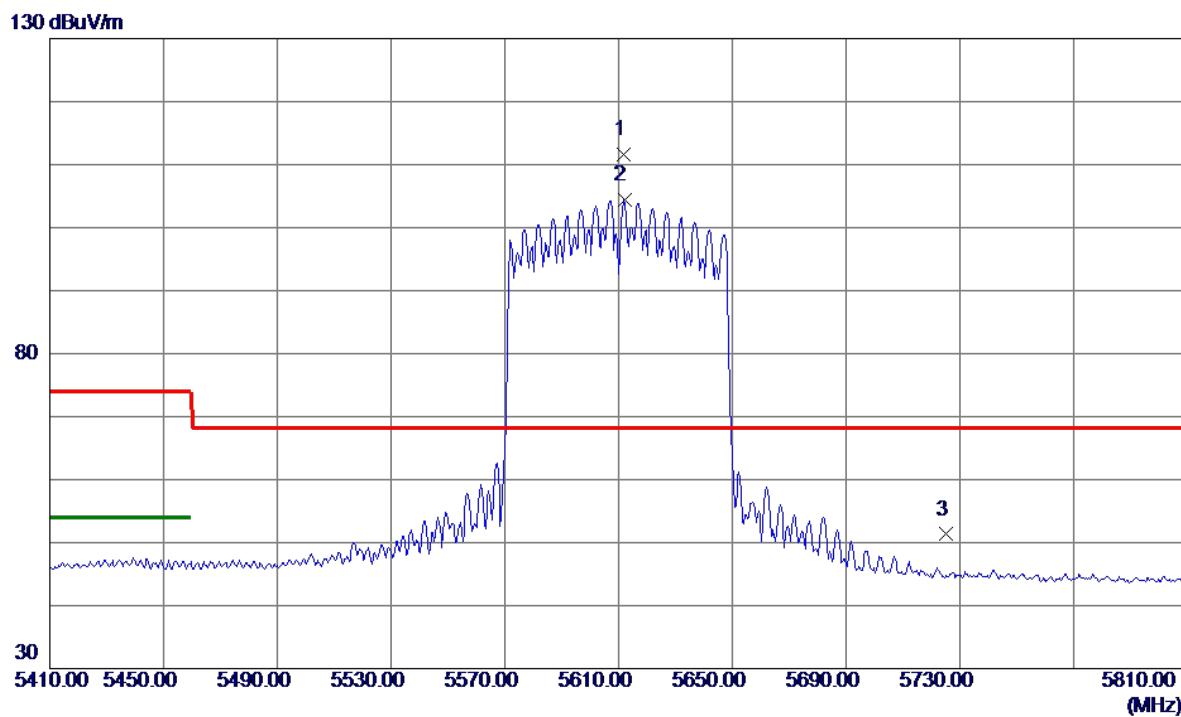


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5611.6000	96.64	15.03	111.67	68.20	43.47	Peak	No Limit
2	5612.0000	89.38	15.03	104.41	999.00	-894.59	AVG	No Limit
3	5725.0000	35.98	15.32	51.30	68.20	-16.90	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

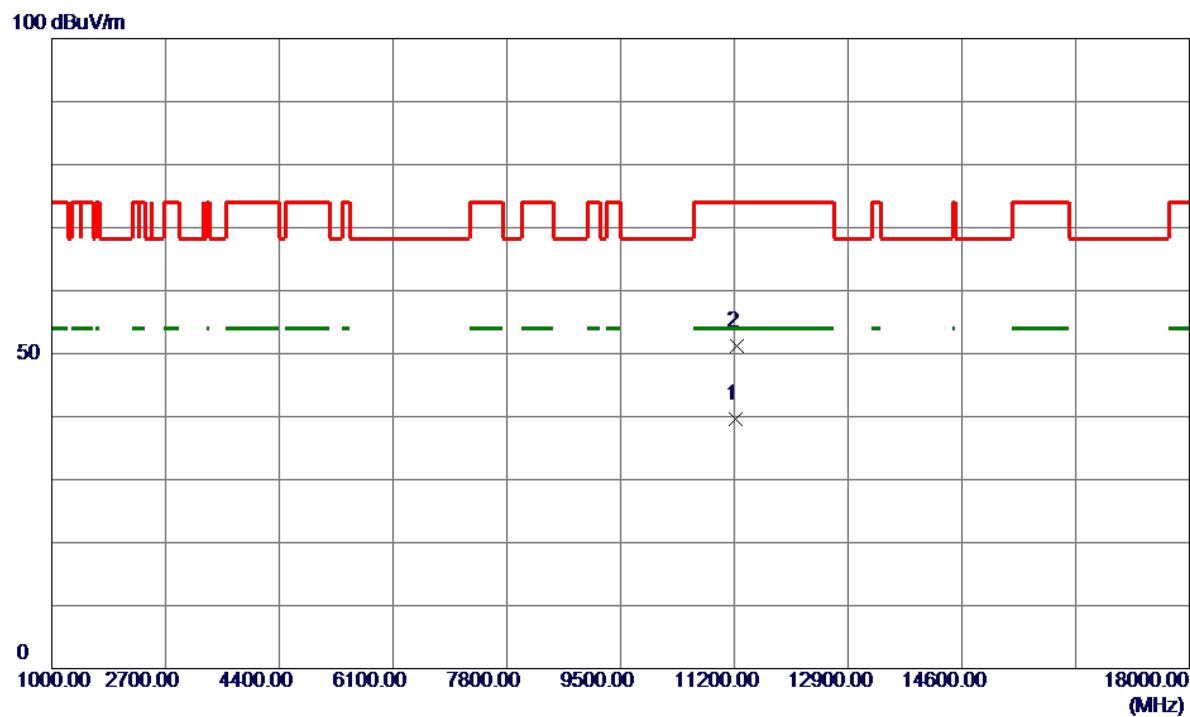


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11218.3000	28.58	10.94	39.52	54.00	-14.48	AVG	
2	11232.8500	40.27	10.95	51.22	74.00	-22.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

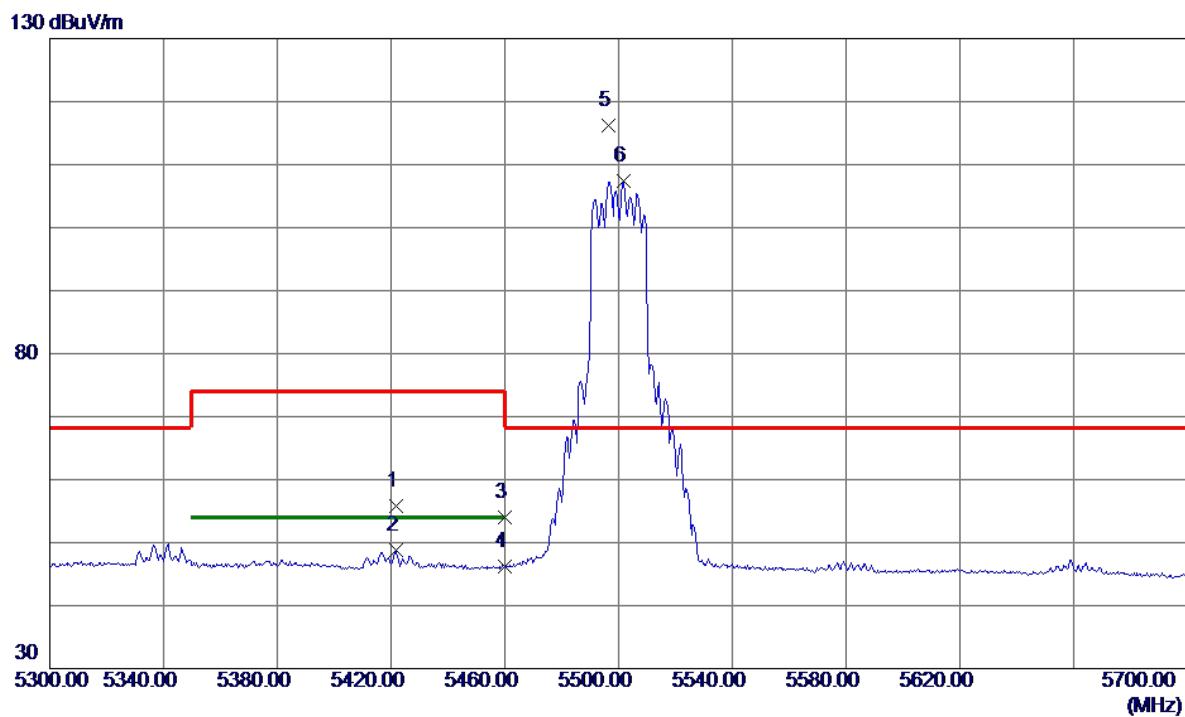


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5421.6000	41.15	14.68	55.83	74.00	-18.17	Peak	
2	5421.6000	34.13	14.68	48.81	54.00	-5.19	AVG	
3	5460.0000	39.32	14.71	54.03	74.00	-19.97	Peak	
4	5460.0000	31.53	14.71	46.24	54.00	-7.76	AVG	
5 *	5496.4000	101.47	14.75	116.22	68.20	48.02	Peak	No Limit
6	5501.6000	92.69	14.75	107.44	999.00	-891.56	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

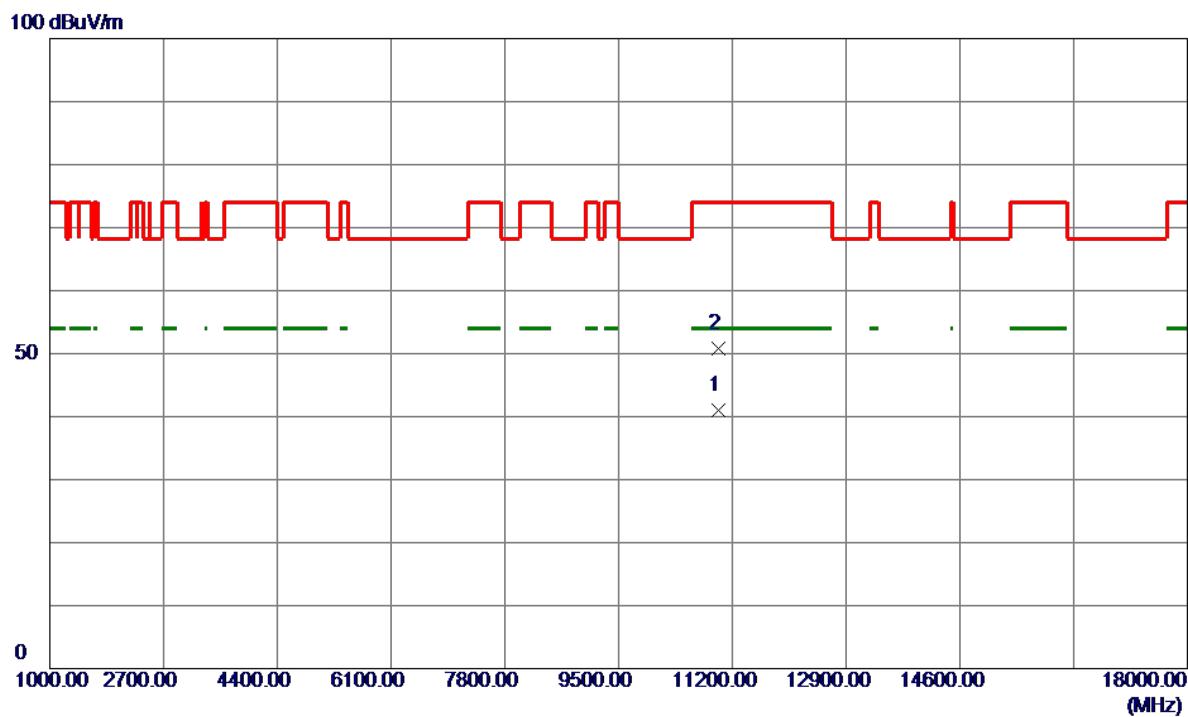


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	10997.9000	30.16	10.81	40.97	54.00	-13.03	AVG	
2	10998.2000	39.92	10.81	50.73	74.00	-23.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

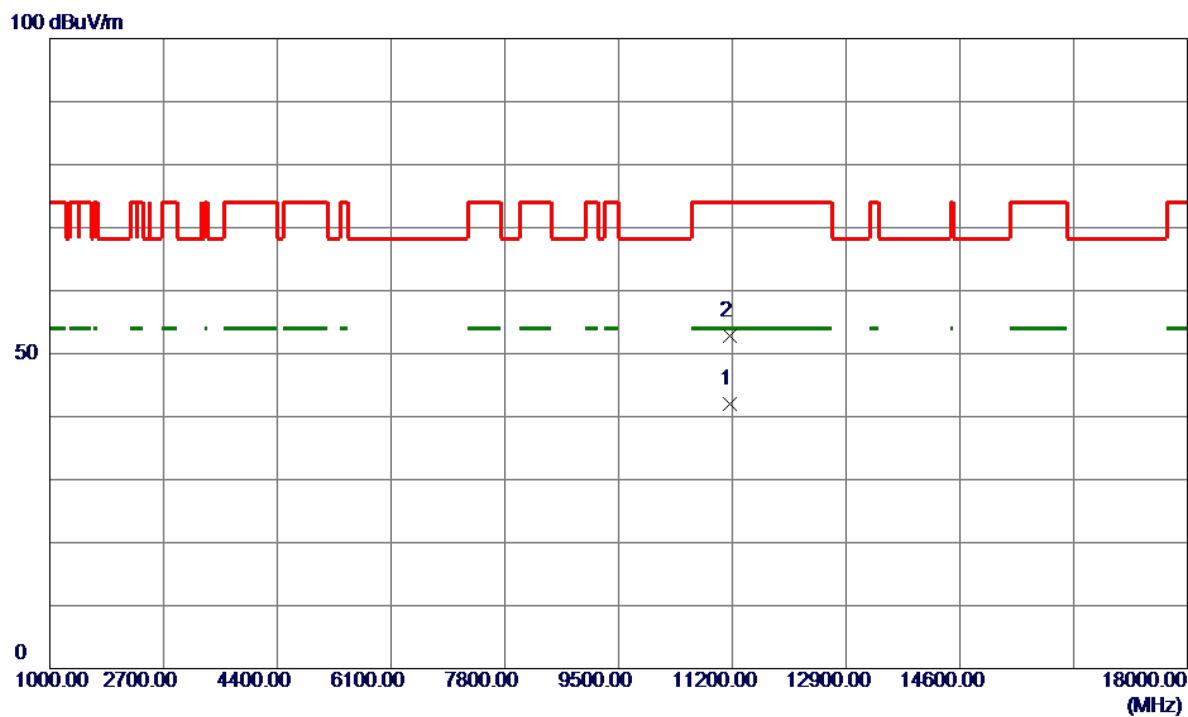


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11157.9000	31.12	10.90	42.02	54.00	-11.98	AVG	
2	11158.0000	41.83	10.90	52.73	74.00	-21.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

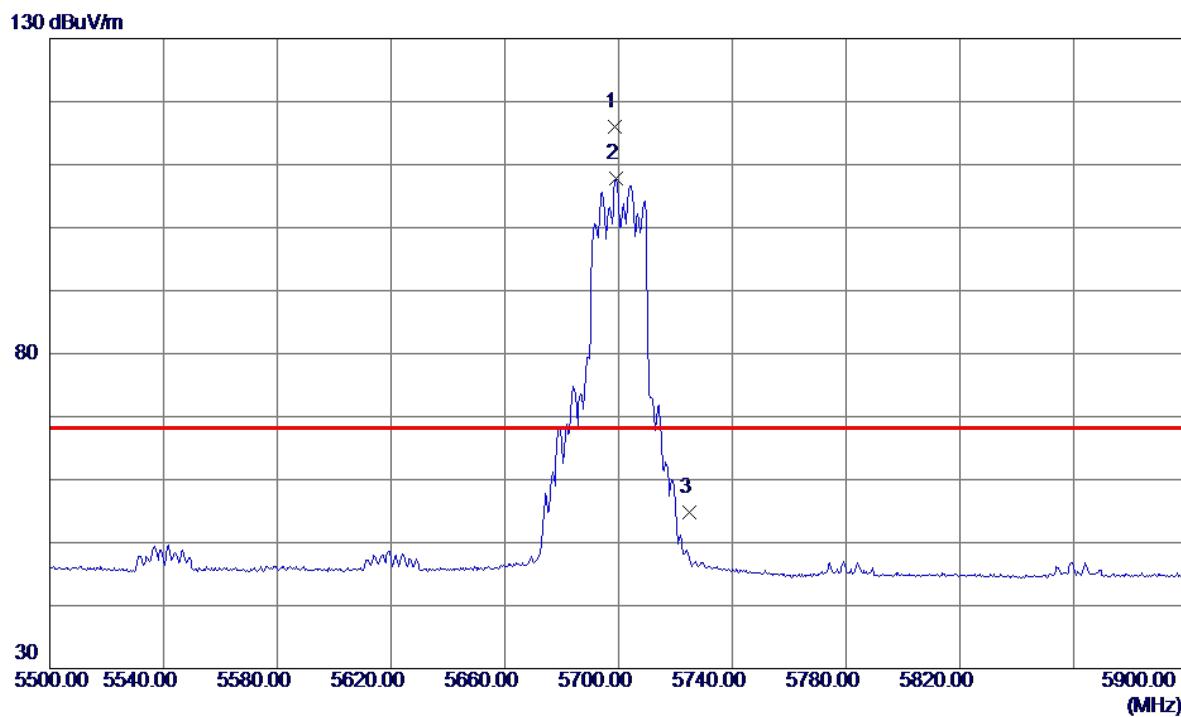


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5698.8000	100.81	15.25	116.06	68.20	47.86	Peak	No Limit
2	5699.2000	92.49	15.26	107.75	999.00	-891.25	AVG	No Limit
3	5725.0000	39.39	15.32	54.71	68.20	-13.49	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

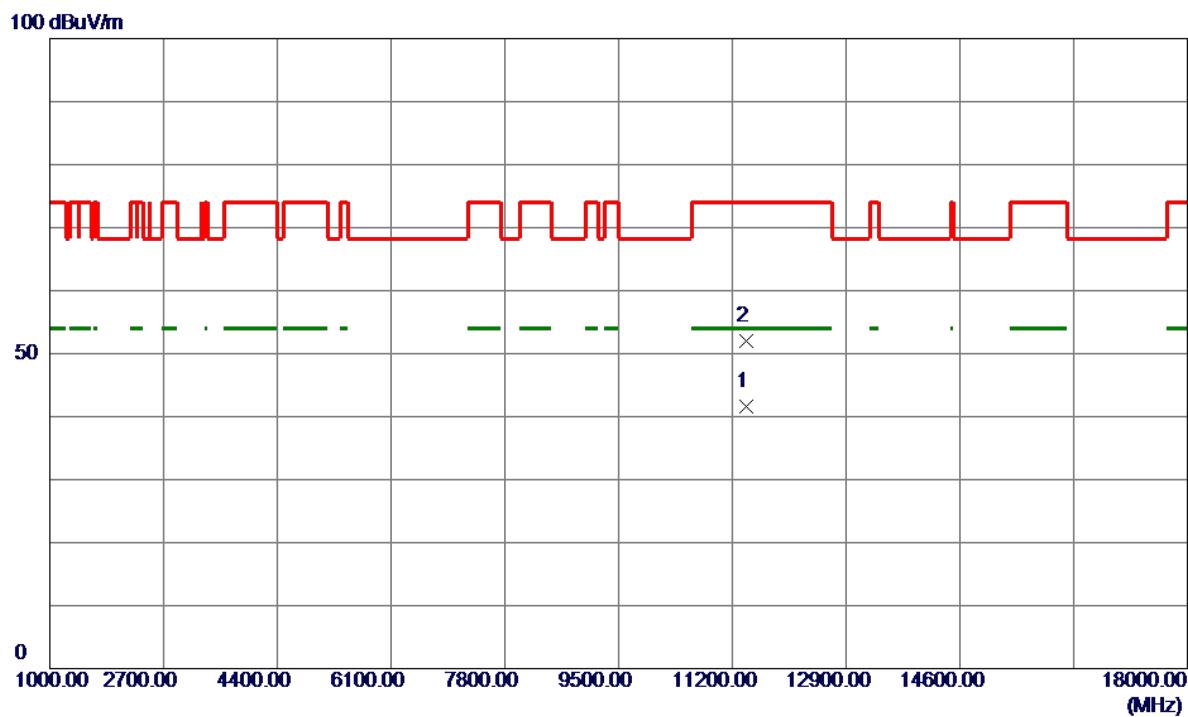


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11402.3000	30.56	11.05	41.61	54.00	-12.39	AVG	
2	11406.8500	40.88	11.05	51.93	74.00	-22.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

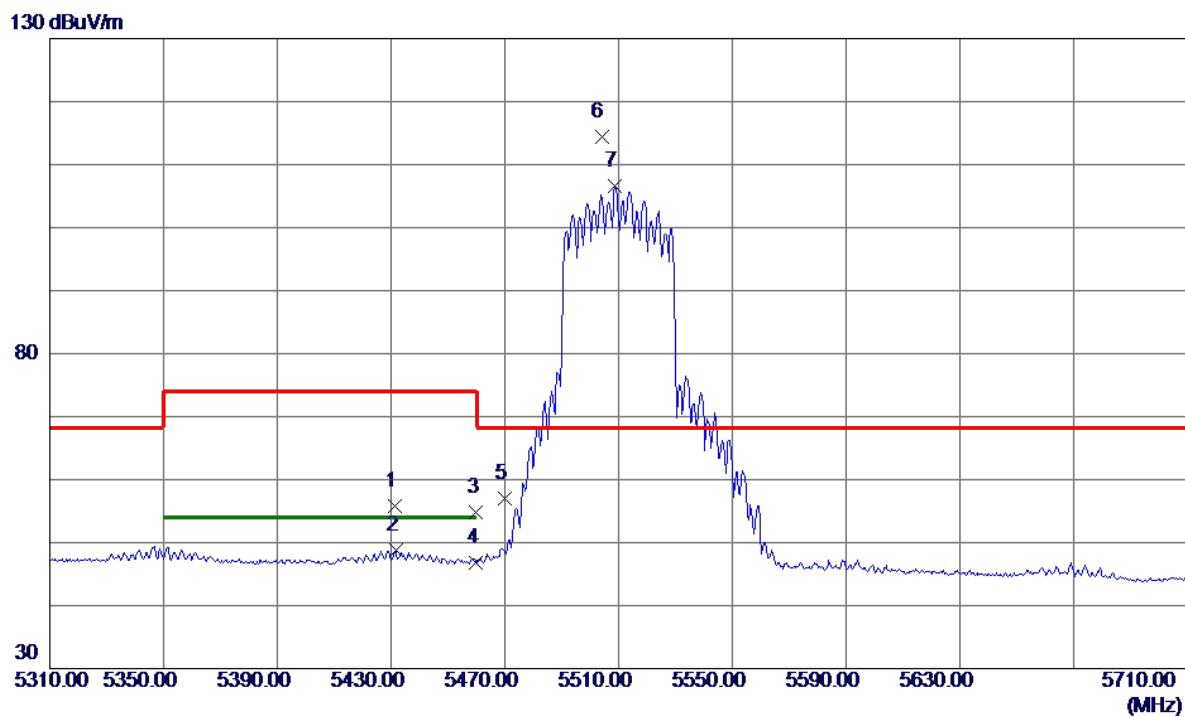


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5431.5000	41.17	14.69	55.86	74.00	-18.14	Peak	
2	5431.6000	34.14	14.69	48.83	54.00	-5.17	AVG	
3	5460.0000	40.10	14.71	54.81	74.00	-19.19	Peak	
4	5460.0000	32.06	14.71	46.77	54.00	-7.23	AVG	
5	5470.0000	42.26	14.72	56.98	68.20	-11.22	Peak	
6 *	5504.0000	99.58	14.76	114.34	68.20	46.14	Peak	No Limit
7	5508.8000	91.82	14.77	106.59	999.00	-892.41	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

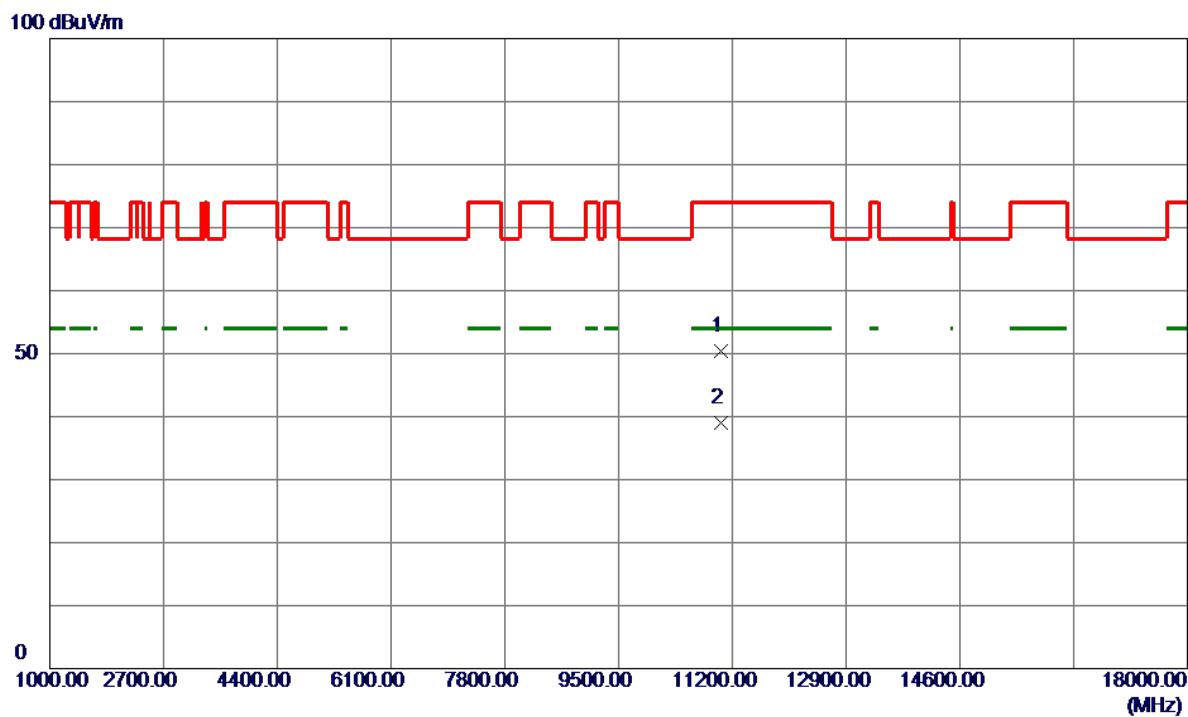


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	11022.8000	39.67	10.82	50.49	74.00	-23.51	Peak	
2 *	11027.6000	28.26	10.83	39.09	54.00	-14.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

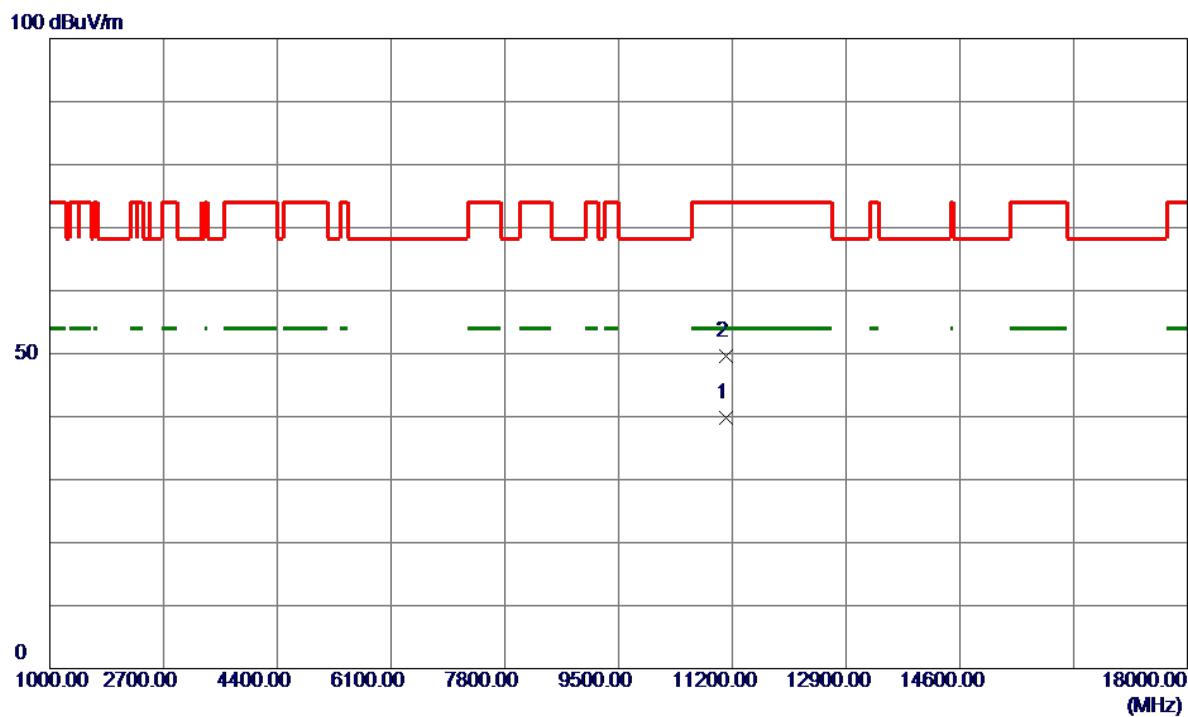


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11102.5500	28.84	10.87	39.71	54.00	-14.29	AVG	
2	11113.3500	38.77	10.88	49.65	74.00	-24.35	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

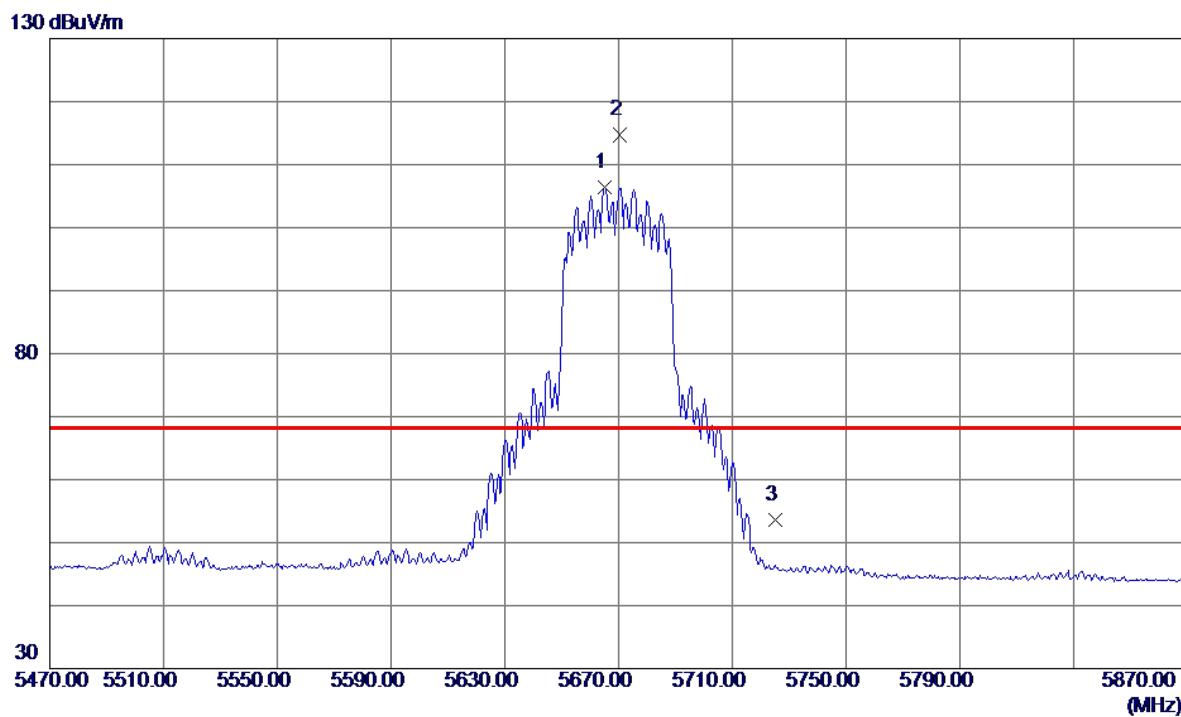


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5665.2000	91.23	15.17	106.40	999.00	-892.60	AVG	No Limit
2 *	5670.4000	99.52	15.18	114.70	68.20	46.50	Peak	No Limit
3	5725.0000	38.21	15.32	53.53	68.20	-14.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

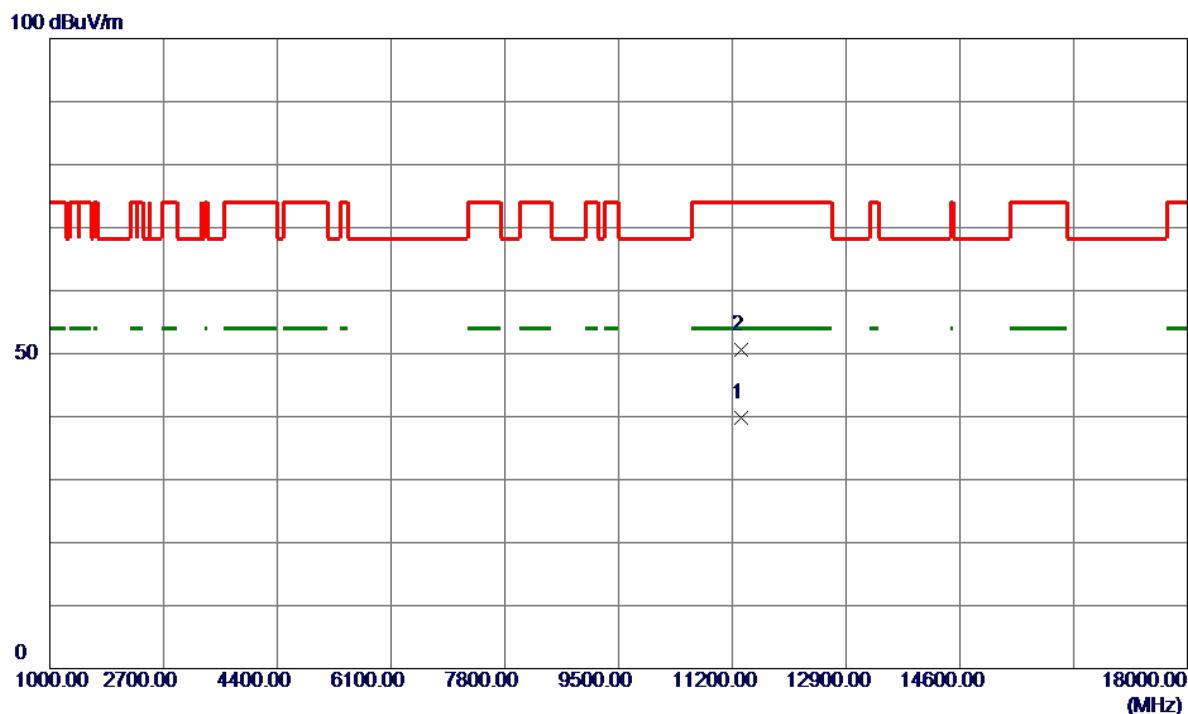


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11337.9500	28.70	11.01	39.71	54.00	-14.29	AVG	
2	11338.4500	39.67	11.01	50.68	74.00	-23.32	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

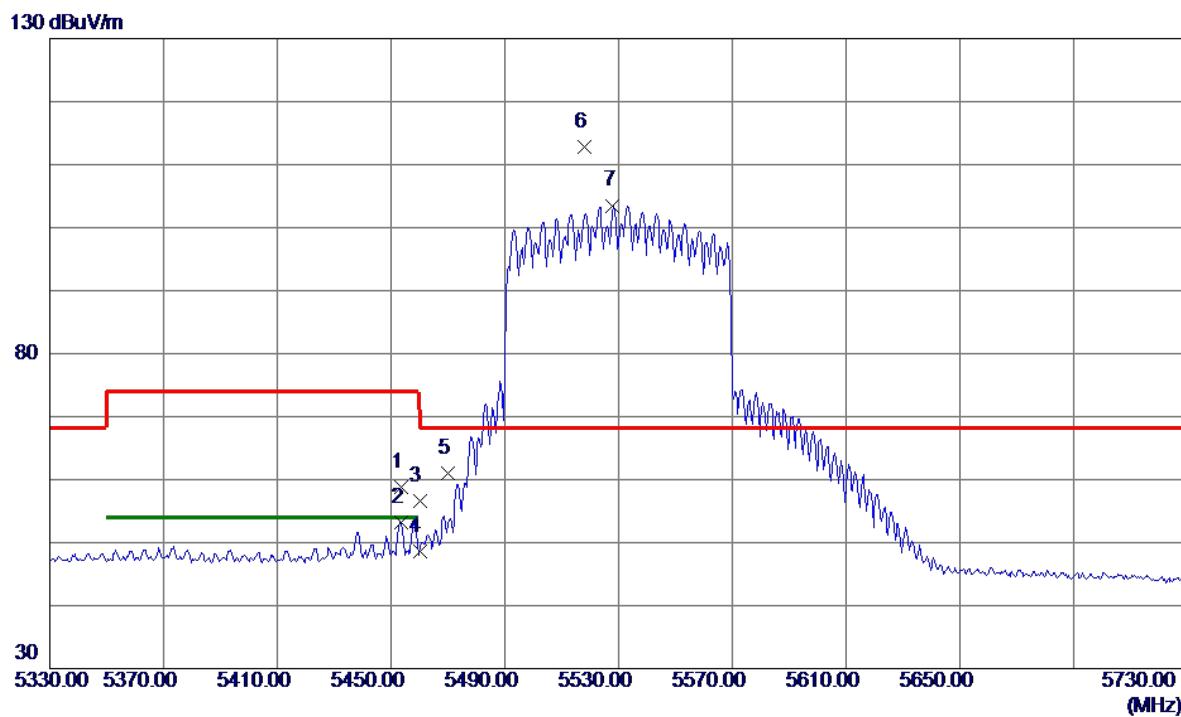


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5453.5000	44.11	14.71	58.82	74.00	-15.18	Peak	
2	5453.6000	38.58	14.71	53.29	54.00	-0.71	AVG	
3	5460.0000	41.92	14.71	56.63	74.00	-17.37	Peak	
4	5460.0000	33.84	14.71	48.55	54.00	-5.45	AVG	
5	5470.0000	46.36	14.72	61.08	68.20	-7.12	Peak	
6 *	5518.0000	98.01	14.80	112.81	68.20	44.61	Peak	No Limit
7	5528.0000	88.68	14.82	103.50	999.00	-895.50	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

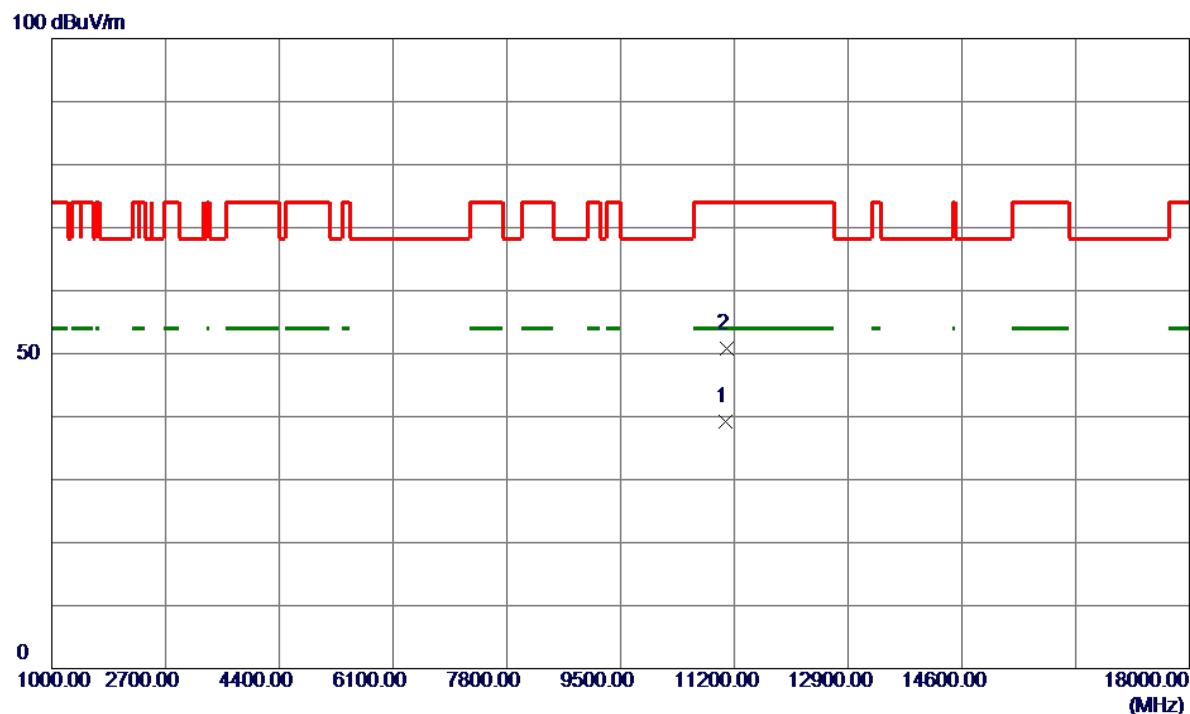


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11072.9000	28.42	10.85	39.27	54.00	-14.73	AVG	
2	11082.7500	39.91	10.86	50.77	74.00	-23.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

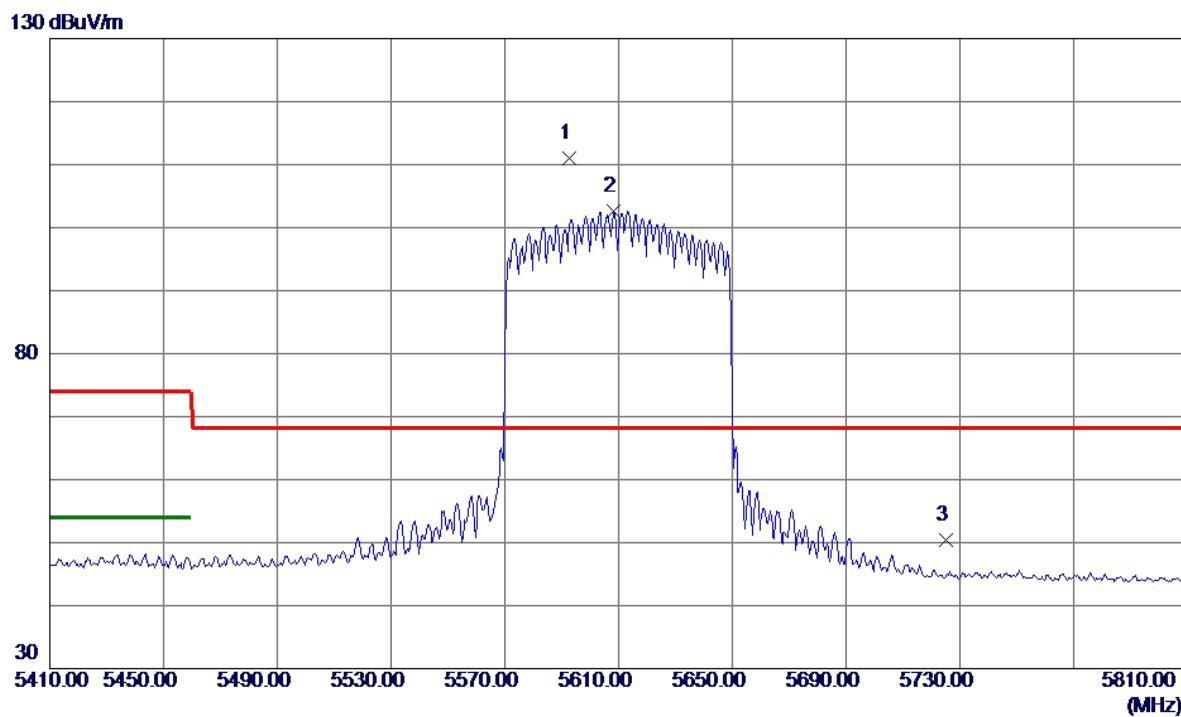


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5592.8000	95.99	14.99	110.98	68.20	42.78	Peak	No Limit
2	5608.4000	87.64	15.03	102.67	999.00	-896.33	AVG	No Limit
3	5725.0000	35.05	15.32	50.37	68.20	-17.83	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

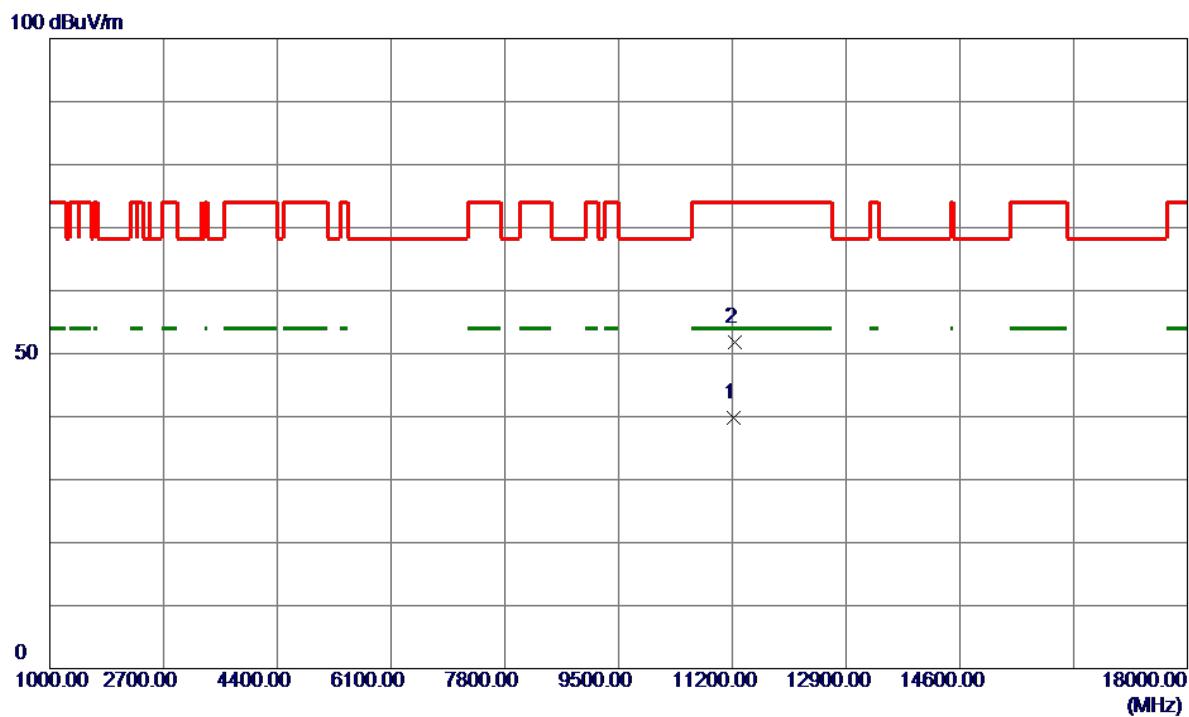


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11213.1000	28.77	10.94	39.71	54.00	-14.29	AVG	
2	11241.6000	40.82	10.95	51.77	74.00	-22.23	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

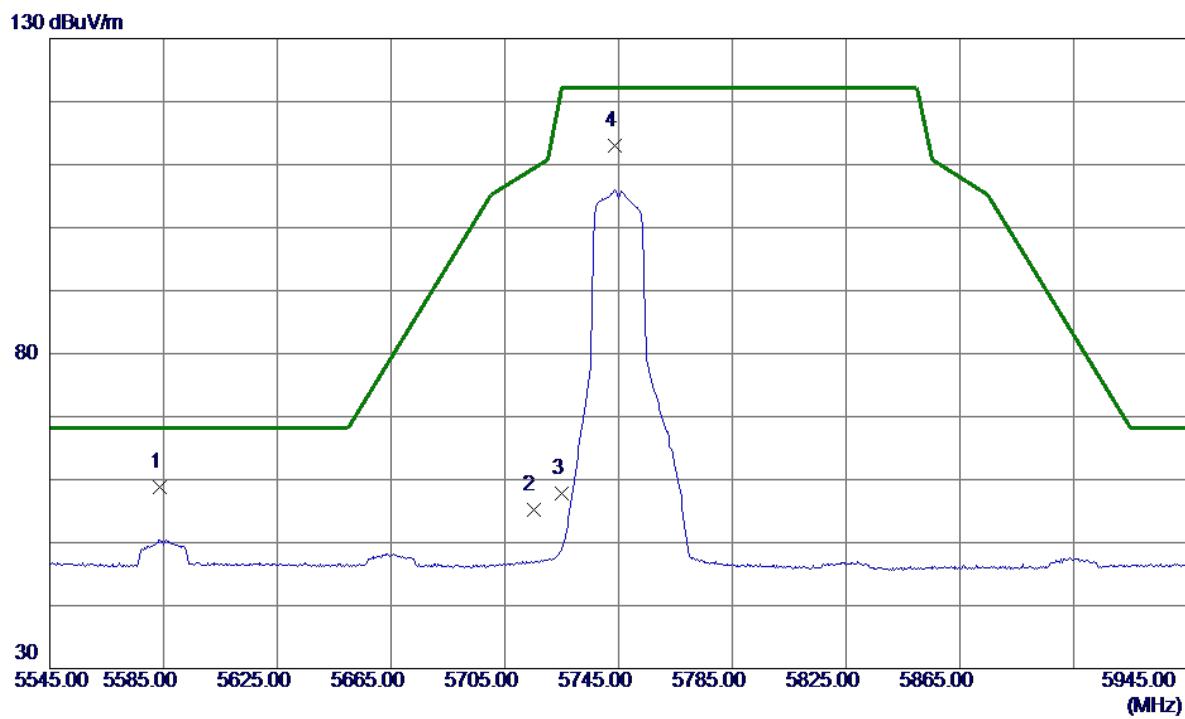


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5583.8000	43.75	14.96	58.71	68.20	-9.49	Peak	
2	5715.0000	39.82	15.30	55.12	109.40	-54.28	Peak	
3	5725.0000	42.44	15.32	57.76	122.20	-64.44	Peak	
4 *	5743.8000	97.68	15.37	113.05	122.20	-9.15	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

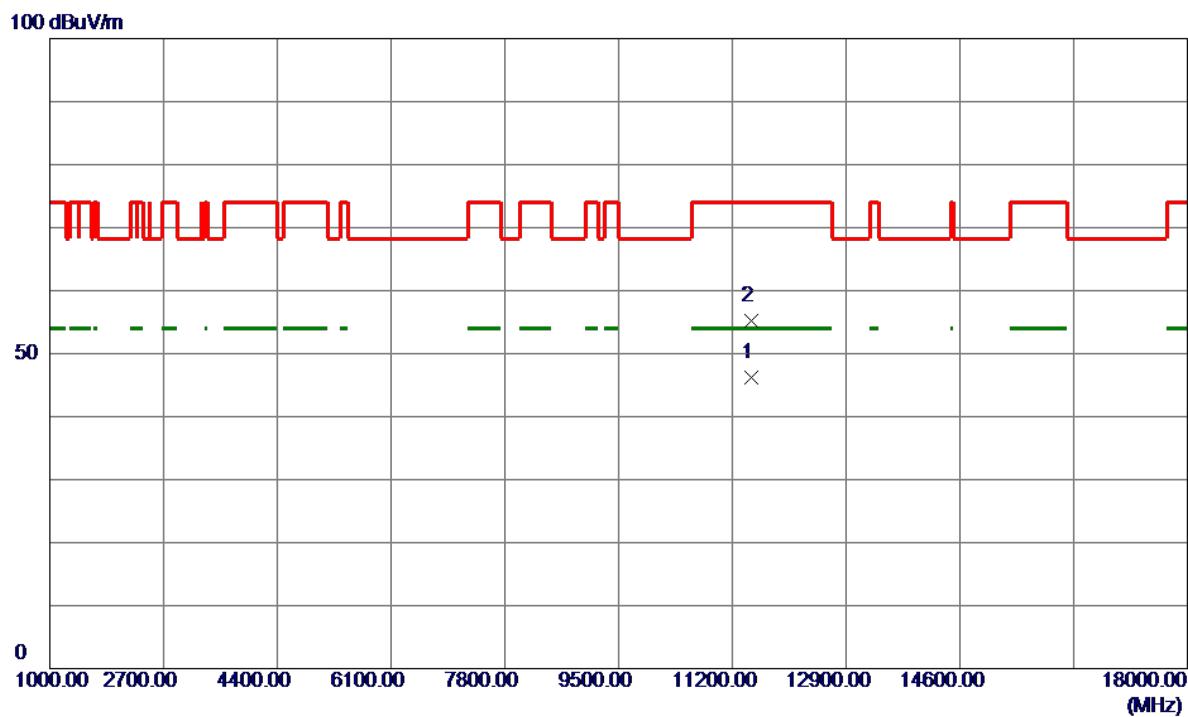


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11487.8000	35.11	11.10	46.21	54.00	-7.79	AVG	
2	11489.0000	44.19	11.10	55.29	74.00	-18.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

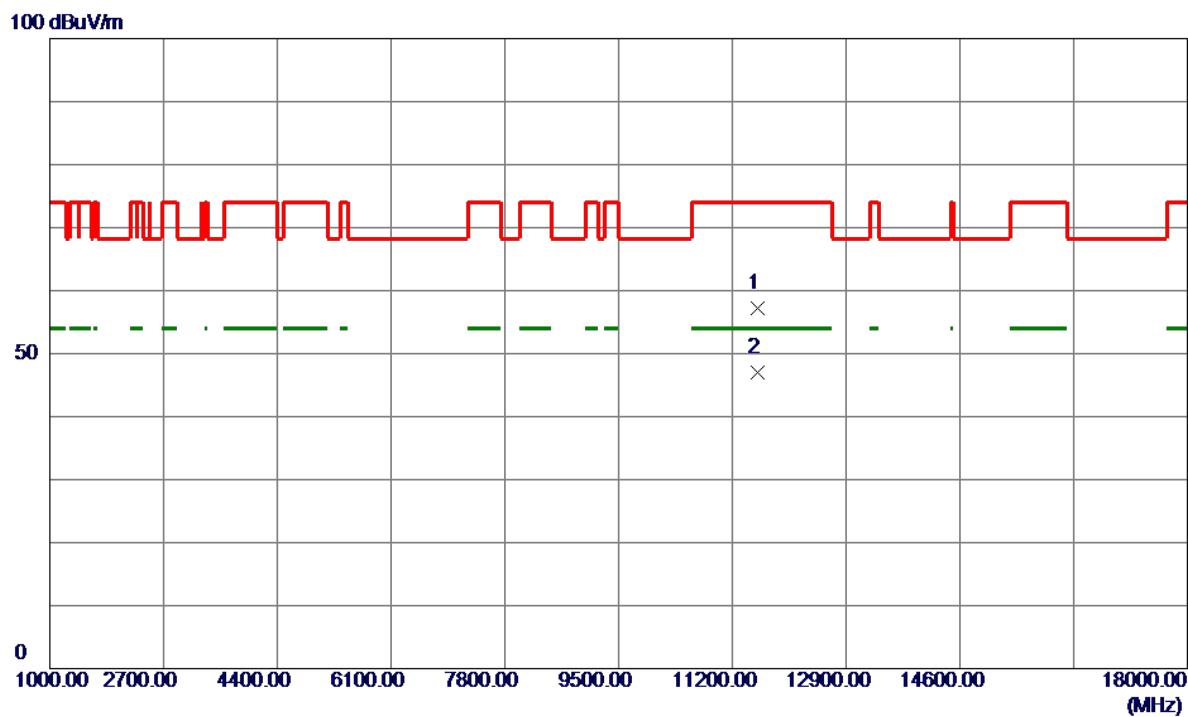


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	11573.1000	46.19	11.10	57.29	74.00	-16.71	Peak	
2 *	11573.2500	35.89	11.10	46.99	54.00	-7.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

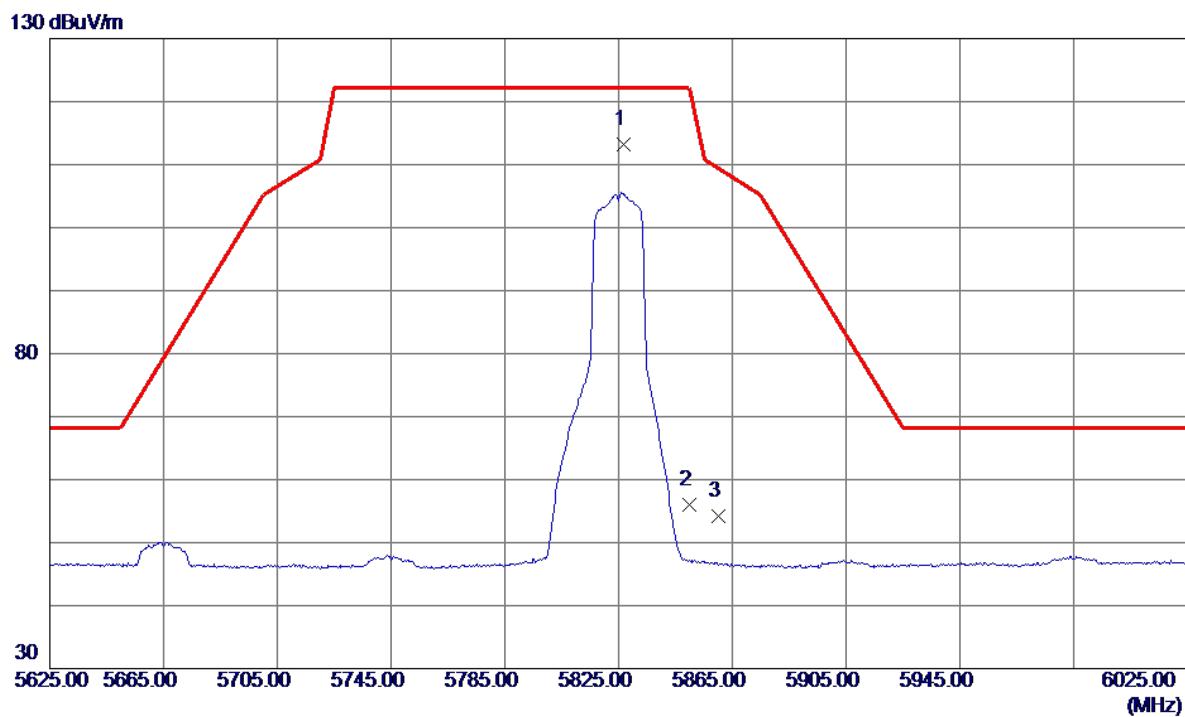


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5826.6000	97.54	15.58	113.12	122.20	-9.08	Peak	No Limit
2	5850.0000	40.40	15.64	56.04	122.20	-66.16	Peak	
3	5860.0000	38.46	15.66	54.12	109.40	-55.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

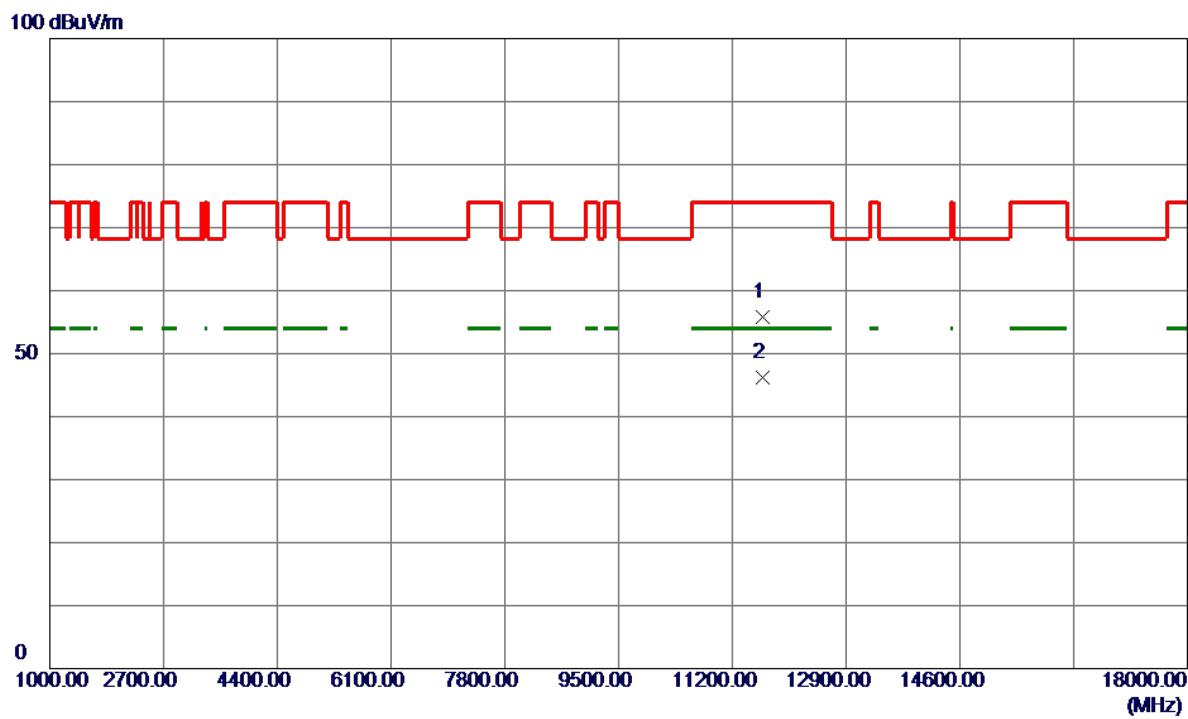


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	11652.7000	44.68	11.09	55.77	74.00	-18.23	Peak	
2 *	11653.2500	35.17	11.09	46.26	54.00	-7.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

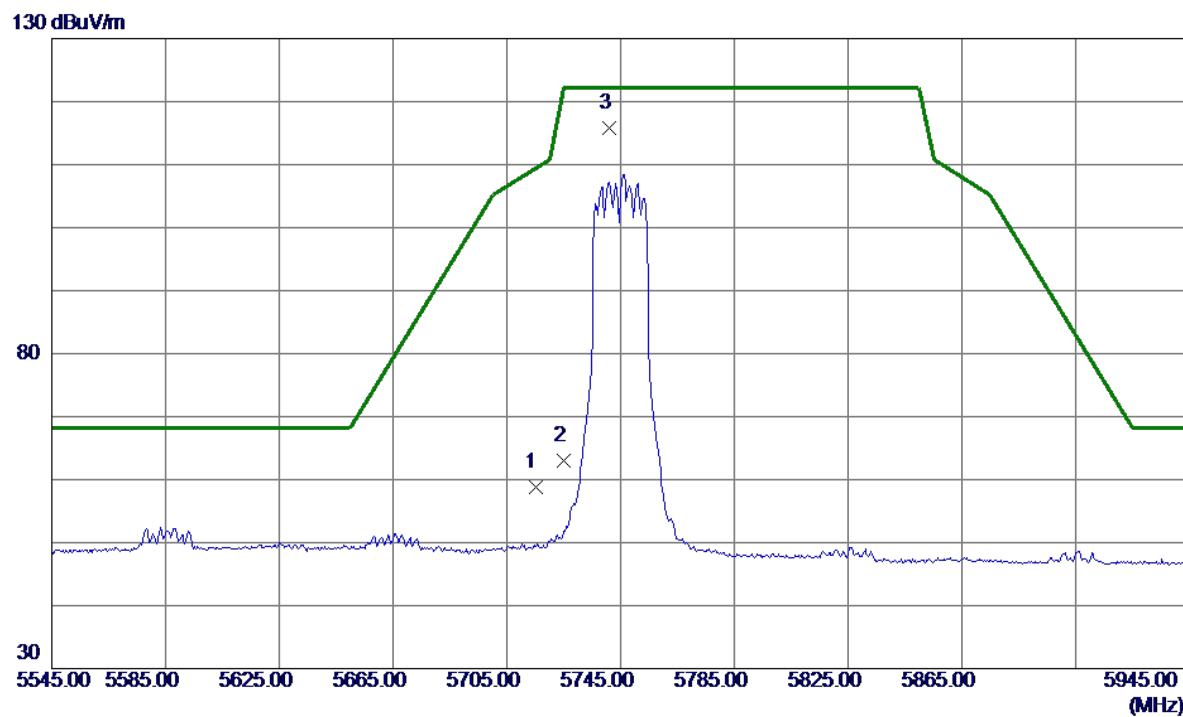


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5715.0000	43.47	15.30	58.77	109.40	-50.63	Peak	
2	5725.0000	47.68	15.32	63.00	122.20	-59.20	Peak	
3 *	5741.0000	100.38	15.36	115.74	122.20	-6.46	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

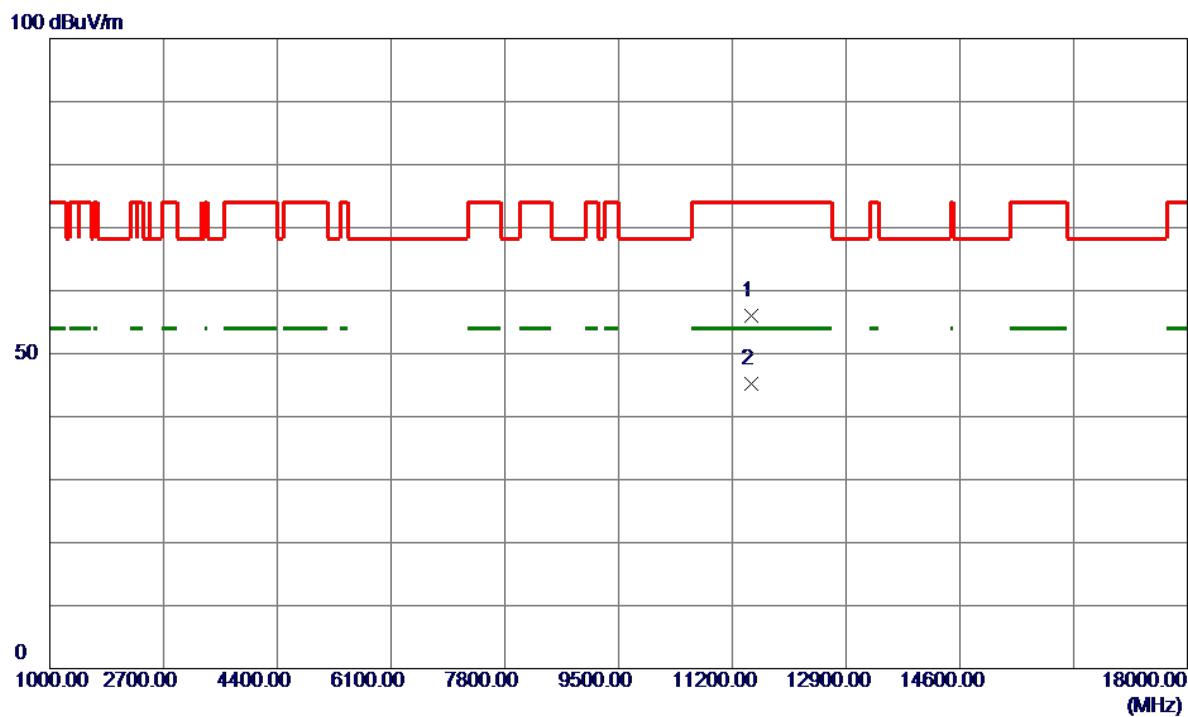


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	11483.9000	44.93	11.10	56.03	74.00	-17.97	Peak	
2 *	11488.6500	34.13	11.10	45.23	54.00	-8.77	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

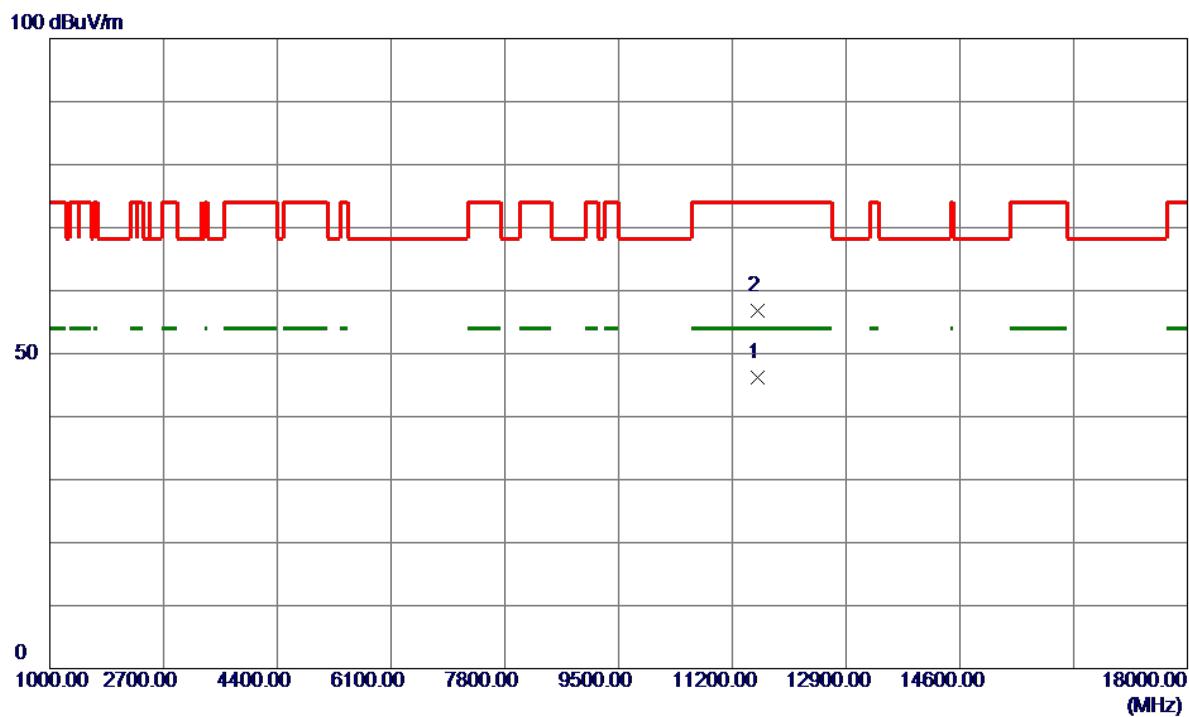**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

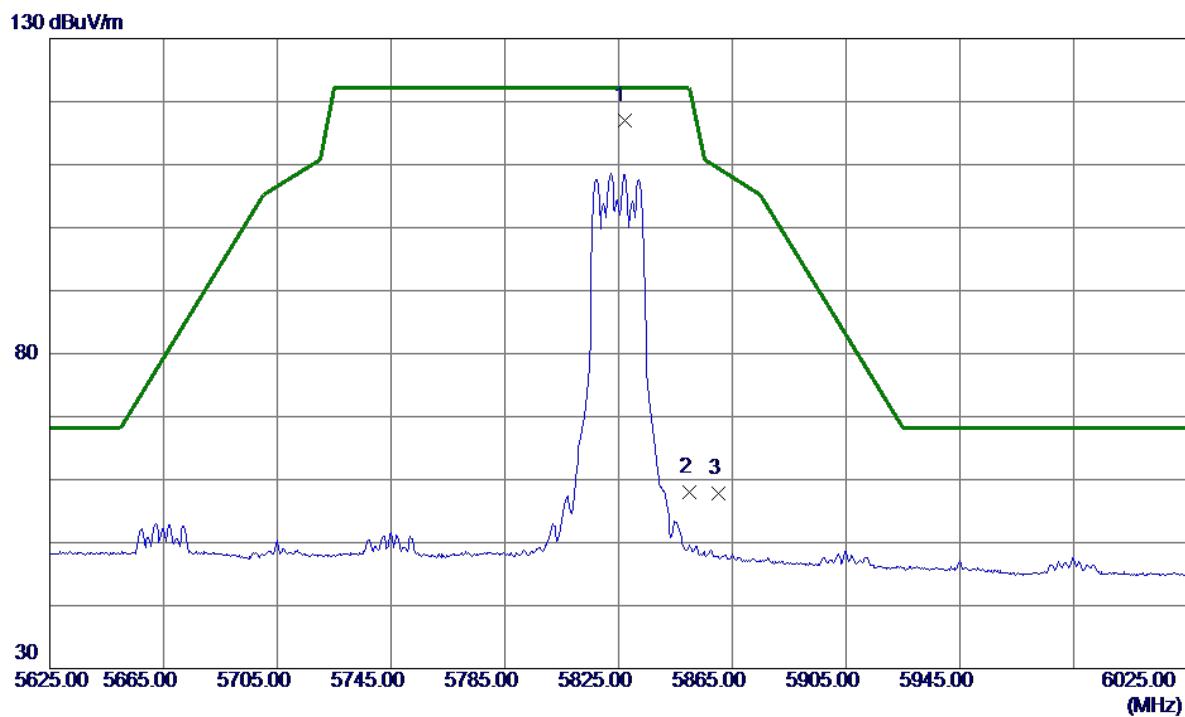


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5827.0000	101.35	15.58	116.93	122.20	-5.27	Peak	No Limit
2	5850.0000	42.36	15.64	58.00	122.20	-64.20	Peak	
3	5860.0000	42.07	15.66	57.73	109.40	-51.67	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

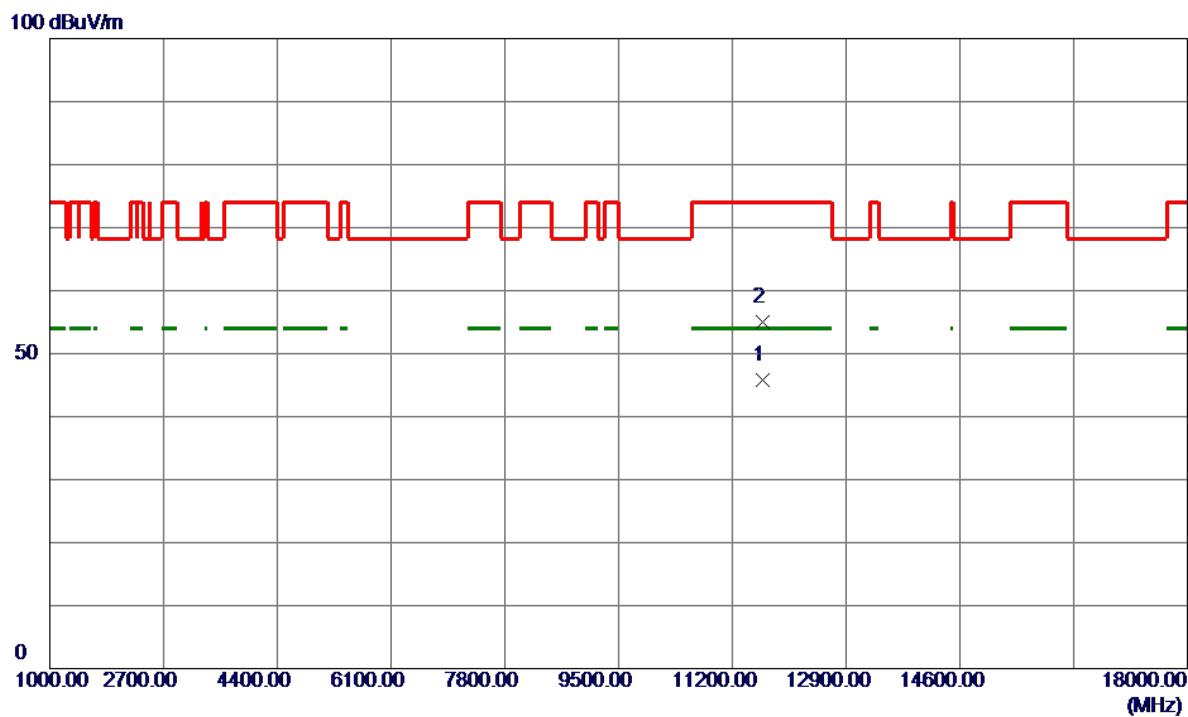


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	11649.1500	34.79	11.09	45.88	54.00	-8.12	AVG	
2	11649.4500	43.88	11.09	54.97	74.00	-19.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

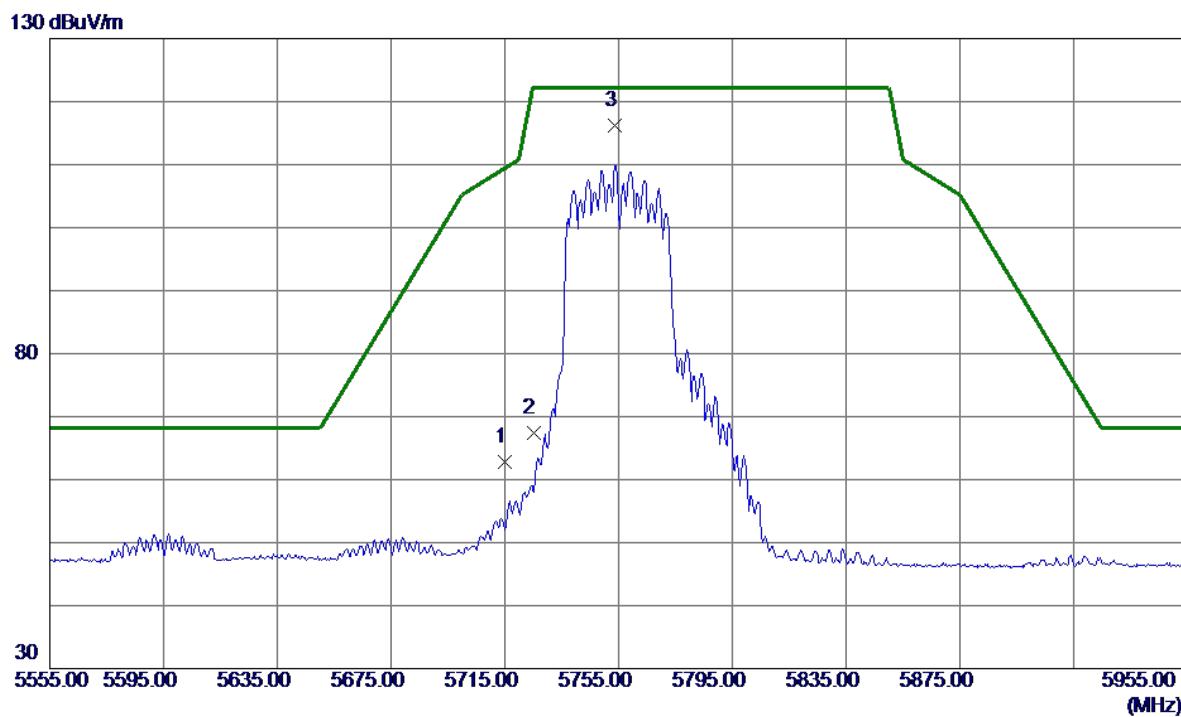


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5715.0000	47.53	15.30	62.83	109.40	-46.57	Peak	
2	5725.0000	52.02	15.32	67.34	122.20	-54.86	Peak	
3 *	5753.8000	100.87	15.39	116.26	122.20	-5.94	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

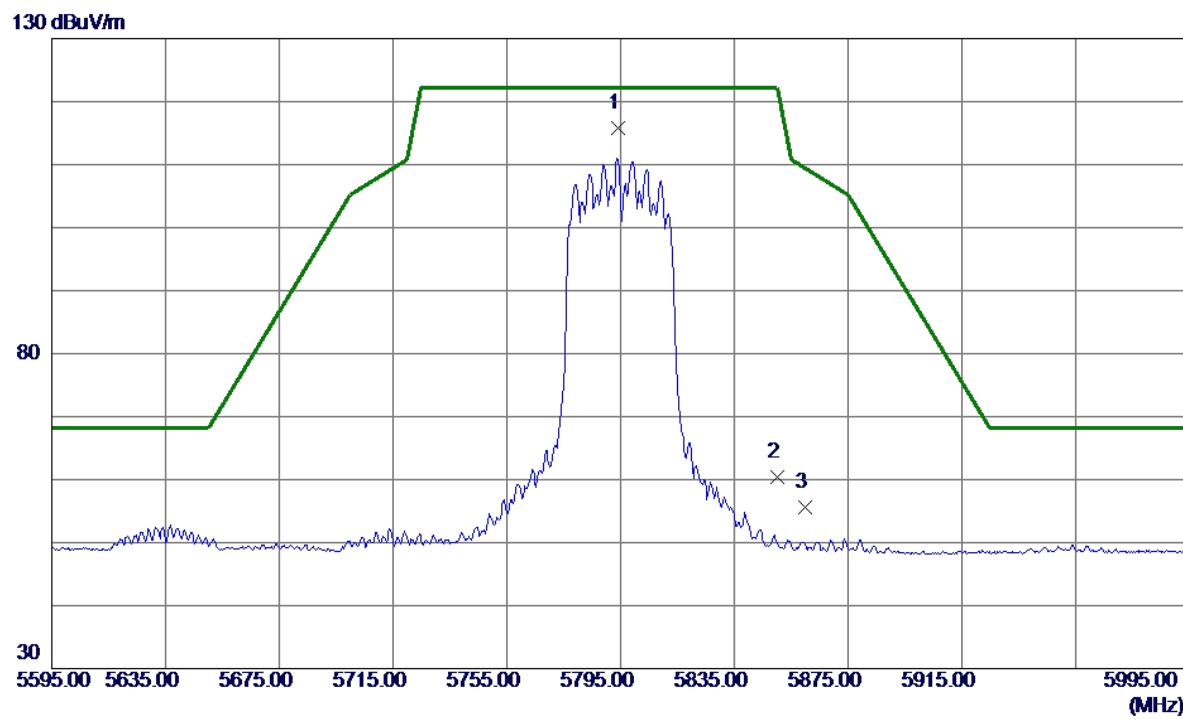


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	5794.2000	100.32	15.50	115.82	122.20	-6.38	Peak	No Limit
2	5850.0000	44.75	15.64	60.39	122.20	-61.81	Peak	
3	5860.0000	39.85	15.66	55.51	109.40	-53.89	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

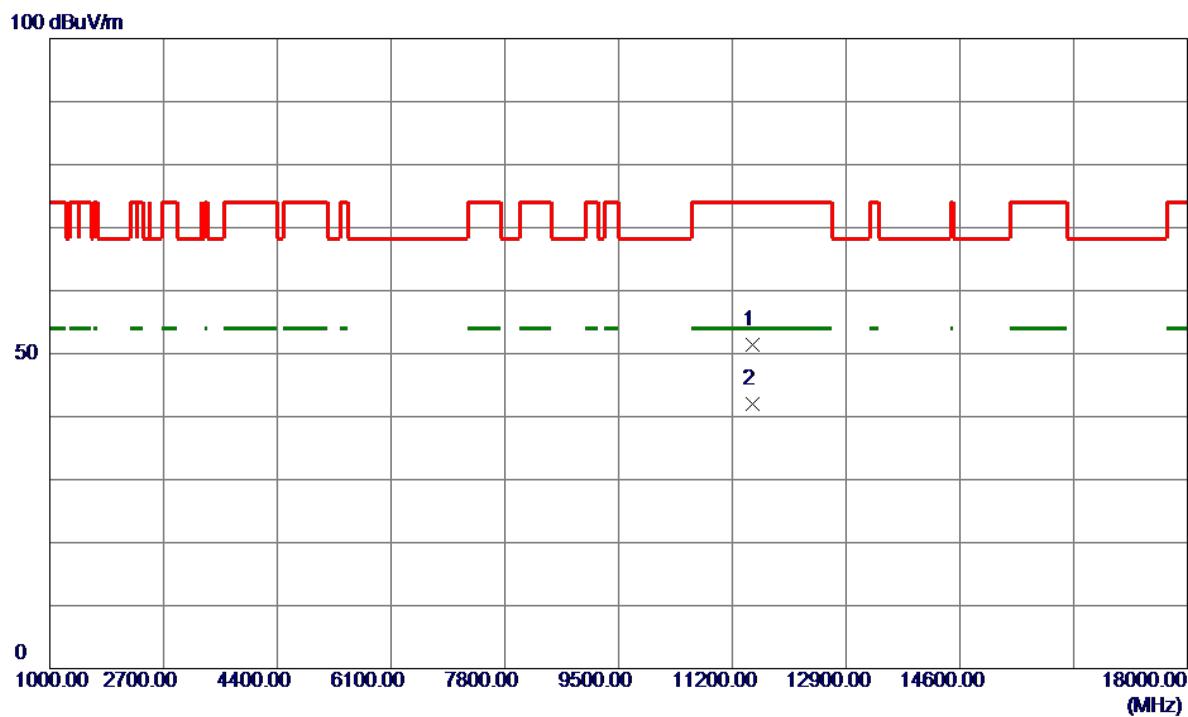**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

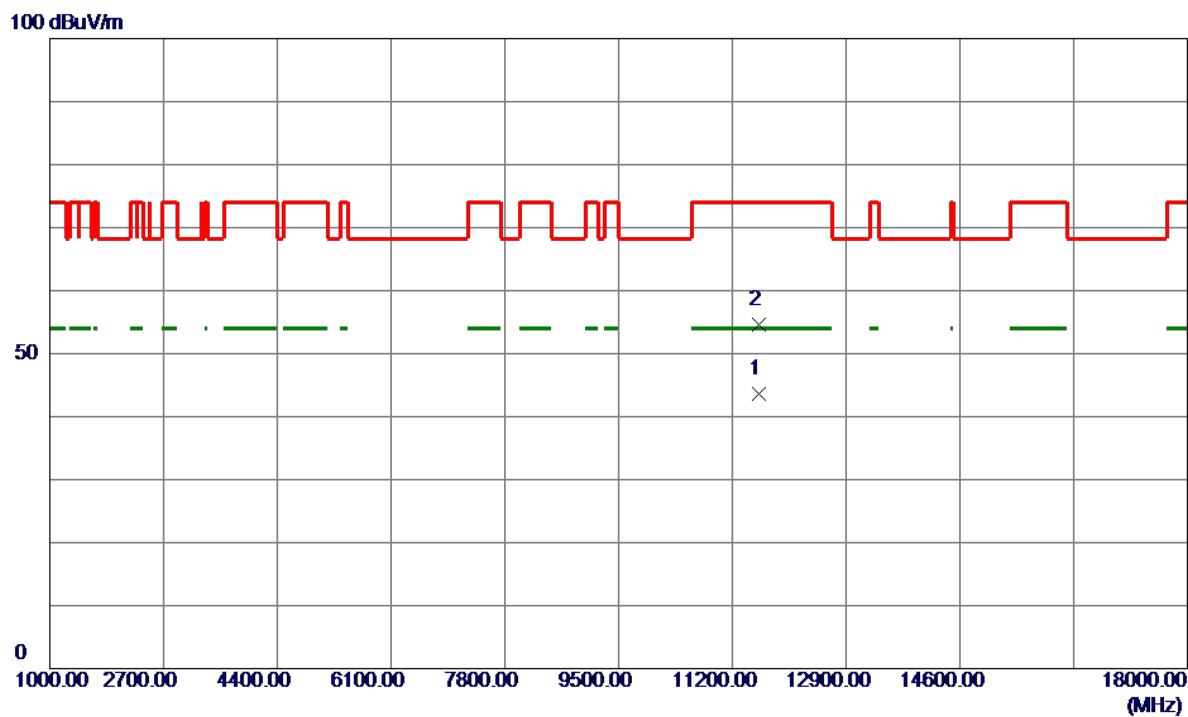**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

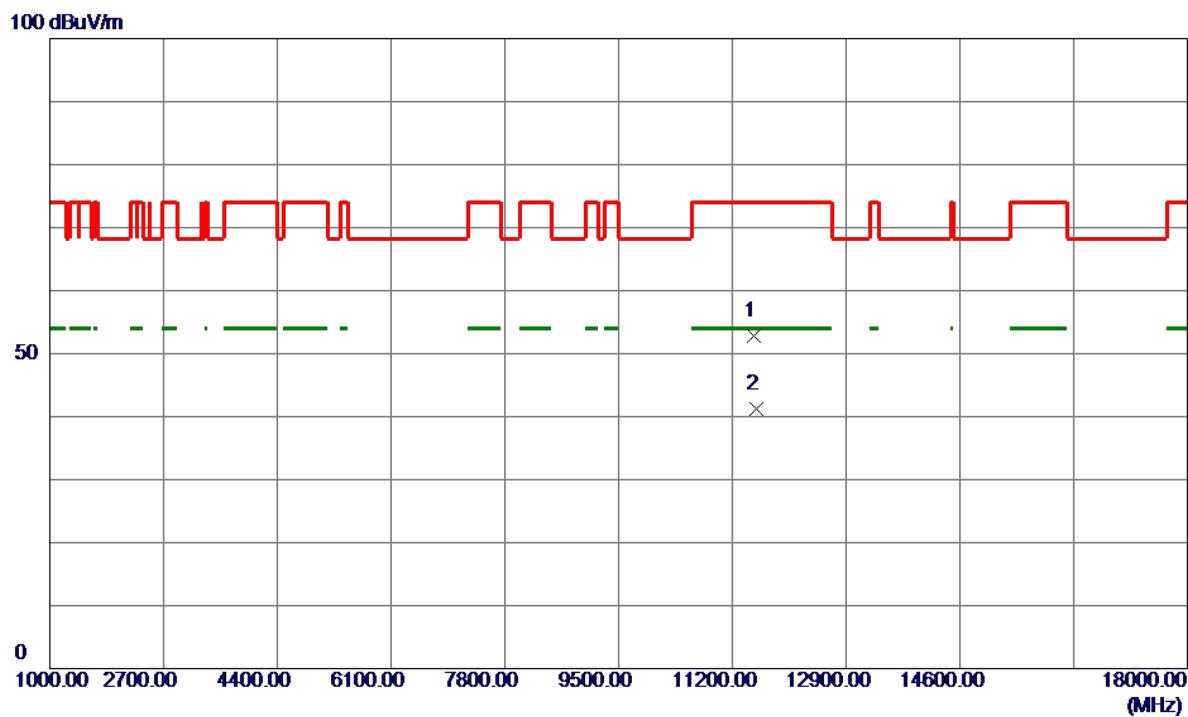


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1	11518.5599	41.61	11.10	52.71	74.00	-21.29	Peak	
2 *	11563.5199	30.11	11.10	41.21	54.00	-12.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

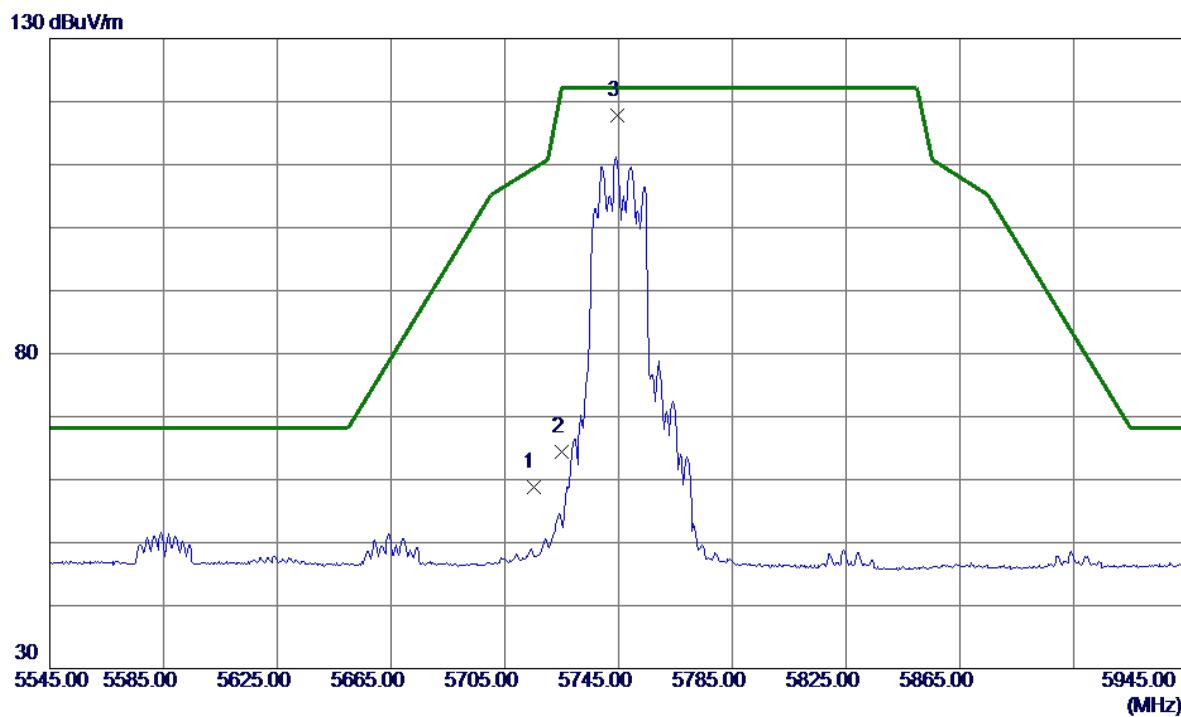

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	5715.0000	43.41	15.30	58.71	109.40	-50.69	Peak	
2	5725.0000	49.13	15.32	64.45	122.20	-57.75	Peak	
3 *	5744.6000	102.40	15.37	117.77	122.20	-4.43	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.