

# AUT Report

Product Model: EAP610

Manufacturer: TP-Link Systems Inc.

Test Date: 2025.03.18

Tested By: Fang Chao


TP-Link Systems Inc.  
10 Mauchly, Irvine, CA 92618

# **Index**

<b>1. Antenna Distribution.....</b>	<b>3</b>
<b>2. Electrical Characteristics .....</b>	<b>3</b>
<b>3. Gain and Radiation Pattern .....</b>	<b>4</b>
3.1 Measurement Procedure .....	4
3.2 Test Setup.....	5
3.3 S Parameter Test Data.....	6
3.4 Antenna Peak Gain .....	7
3.5 Antenna Radiation Pattern.....	7

# 1. Antenna Distribution

EAP610

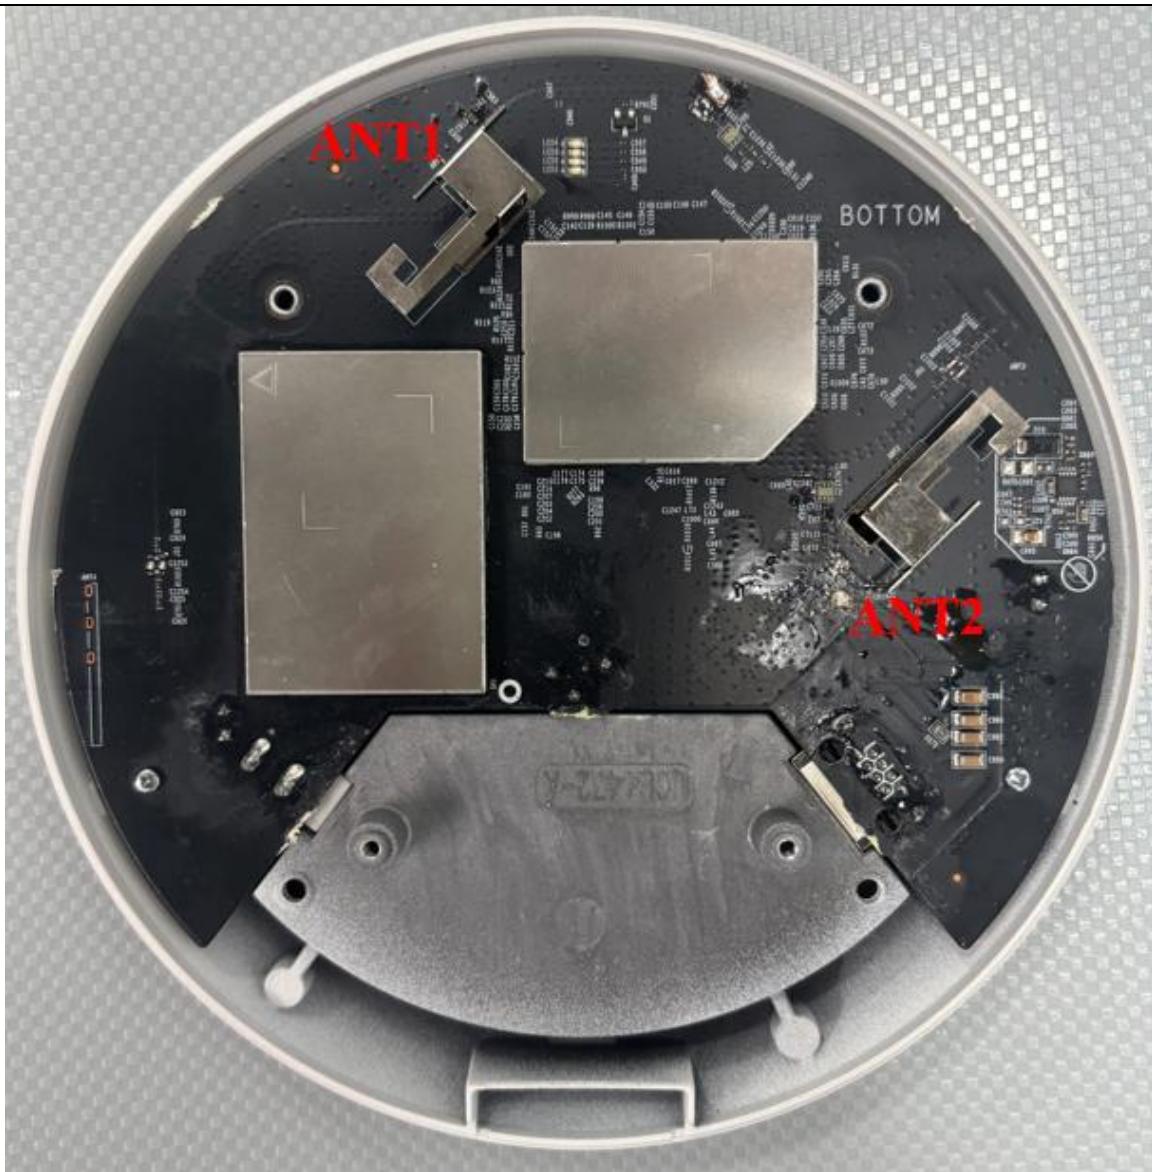

## 2. Electrical Characteristics

### Ant1

<b>Frequency</b>	2400 ~ 2500MHz&5150 ~ 5850MHz
<b>Impedance</b>	50Ohm
<b>Antenna Type</b>	IFA
<b>Antenna Gain</b>	4.00dBi@2400~2500MHz&5.00dBi@5150~5850MHz
<b>Radiation pattern</b>	Omni-Directional
<b>P/N</b>	6035500232

### Ant2


<b>Frequency</b>	2400 ~ 2500MHz&5150 ~ 5850MHz
<b>Impedance</b>	50Ohm
<b>Antenna Type</b>	IFA
<b>Antenna Gain</b>	4.00dBi@2400~2500MHz&5.00dBi@5150~5850MHz

Radiation pattern	Omni-Directional
P/N	6035500232

### 3. Gain and Radiation Pattern

#### 3.1 Measurement Procedure

This measurement experiment adopted an antenna near-field measurement system, and the diagram of the measurement system was shown in Figure 3-1. The excitation signal was generated by the Keysight E5071C (300kHz-20GHz). Under the control of the central computer, the probe rotated in the  $\theta$  direction, and the EUT rotated in the  $\varphi$  direction with the turntable. The probe sampling frame received and collected signals in the near-field range of the EUT. The software system which was controlled by the central computer completed the processing, output and display of the test data.

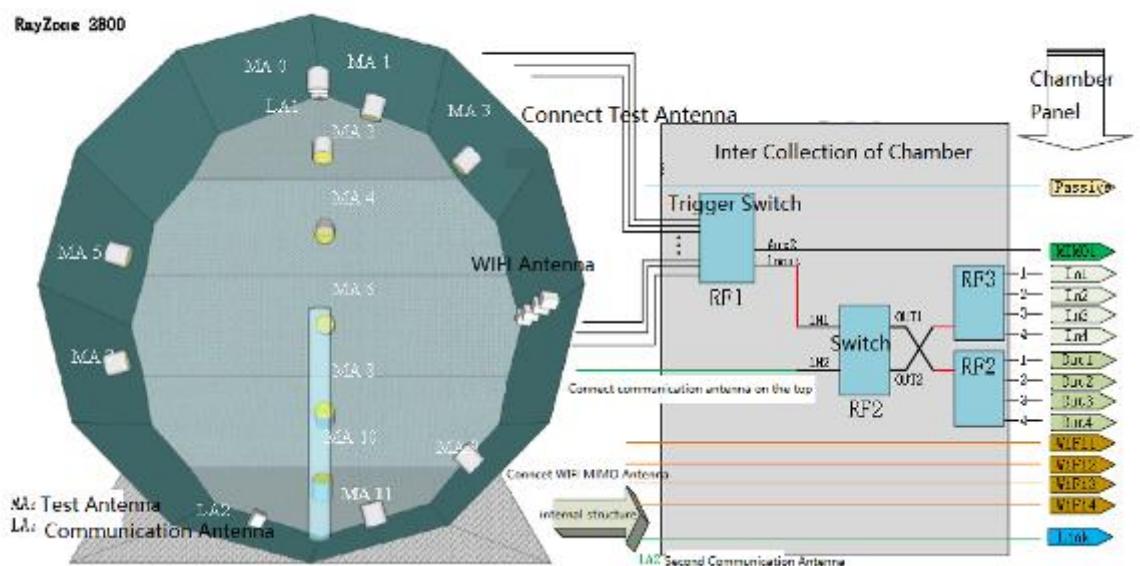

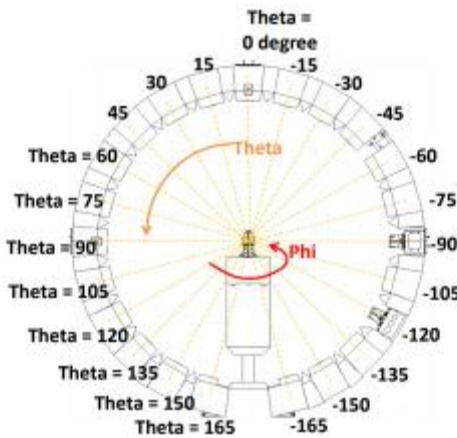


Figure 3-2

Before the measurement, calibrated the vector network analyzer, and then connected the input end of each antenna to the output end of the vector network analyzer, and evenly the antennas to be measured.

Test Equipment listed below:

Equipments	Model	Manufacturer	S/N	Cali. Interval	Cali. Due Date
Chamber	Rayzone2800	GTS(General Test System)	MY53470435	12months	2026/01/15
Vector Network Analyzer	E5071C	Keysight	MY46315238	24months	2026/03/13
GTS MaxSign100 Software	V2.1	GTS(General Test System)	/	/	/

### 3.2 Test Setup

The test setup was shown in Figure 3-3, 3-4:



Figure 3-3



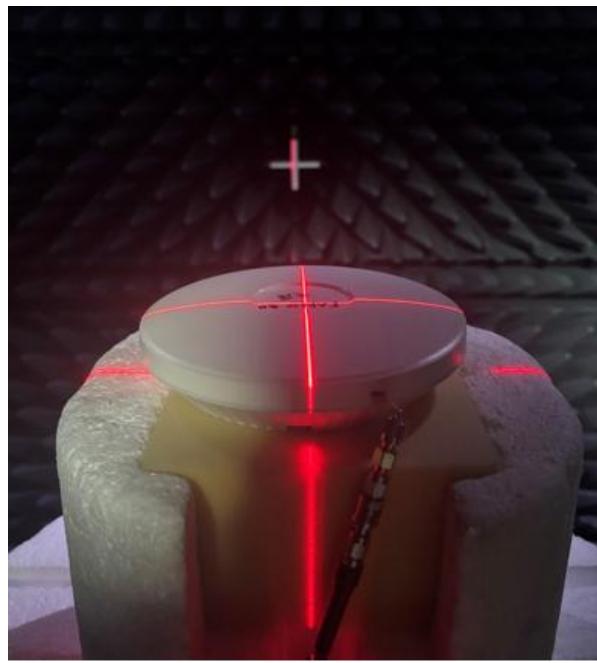


Figure 3-4

### 3.3 S Parameter Test Data

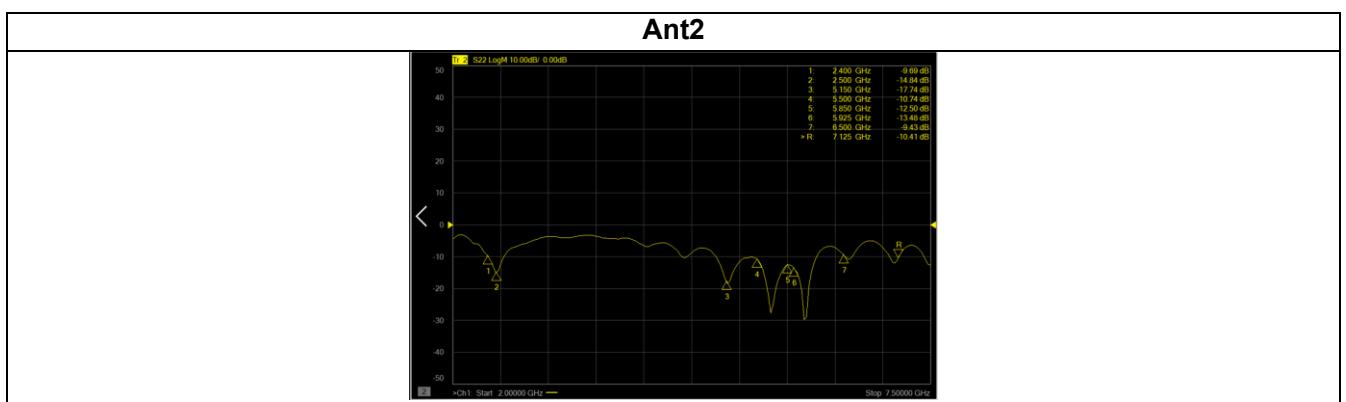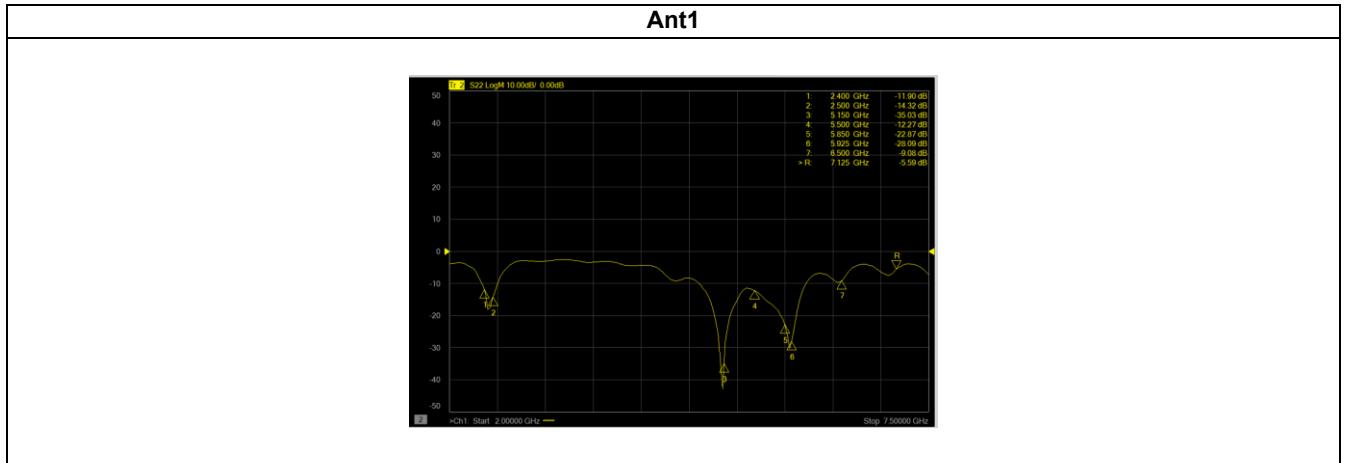

### 3.4 Antenna Peak Gain

Frequency	2.45GHz 2400~2500MHz	5.2GHz 5150~5250MHz	5.3GHz 5250~5350MHz	5.6GHz 5470~5725MHz
<b>Ant1 MaxGain(dBi)</b>	4.00	5.00	5.00	5.00
<b>Ant2 MaxGain(dBi)</b>	4.00	5.00	5.00	5.00
<b>Ant1 Polarization/Φ (°) / θ (°)</b>	Theta/90/45	Theta/315/60	Theta/135/60	Theta/210/60
<b>Ant2 Polarization/Φ (°) / θ (°)</b>	Theta/120/45	Phi/0/60	Phi/0/60	Theta/180/60
<b>Max Gain(dBi)</b>	4.00	5.00	5.00	5.00

Frequency	5.8GHz 5725~5895MHz
<b>Ant1 MaxGain(dBi)</b>	5.00
<b>Ant2 MaxGain(dBi)</b>	5.00
<b>Ant1 Polarization/Φ (°) / θ (°)</b>	Theta/135/60
<b>Ant2 Polarization/Φ (°) / θ (°)</b>	Theta/0/60
<b>Max Gain(dBi)</b>	5.00

### 3.5 Antenna Radiation Pattern

