

# AUT Report

Product Model: EAP650 D30-Outdoor

Manufacturer: TP-Link Systems Inc.

Test Date: 2024.10.29

Tested By: Shao Jinwei Shao Jinwei


TP-Link Systems Inc.  
10 Mauchly, Irvine, CA 92618

# Index

<b>1. Antenna Distribution.....</b>	<b>3</b>
<b>2. Electrical Characteristics .....</b>	<b>3</b>
<b>3. Gain and Radiation Pattern .....</b>	<b>5</b>
3.1    Measurement Procedure .....	5
3.2    Test Setup.....	6
3.3    S Parameter Test Data.....	7
3.4    Antenna Gain .....	9
3.4.1    Peak Gain.....	9
3.5    Horizontal plane Gain .....	10
3.5.1    5150~5250MHz .....	10
3.6    Antenna Radiation Pattern.....	10

# 1. Antenna Distribution

EAP650 D30-Outdoor

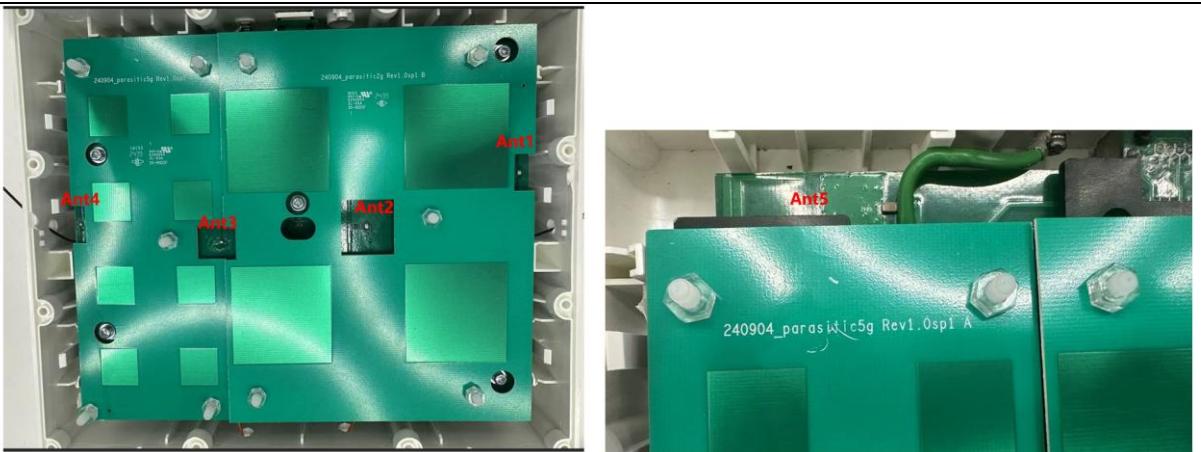

## 2. Electrical Characteristics

Ant1(2.4G WiFi)

<b>Frequency</b>	2400~2500MHz
<b>Impedance</b>	50Ohm
<b>Antenna Type</b>	Microstrip
<b>Antenna Gain</b>	8.00dBi@2400~2500MHz
<b>Radiation pattern</b>	Directional
<b>P/N</b>	D30-Ant1

Ant2(2.4G WiFi)

<b>Frequency</b>	2400~2500MHz
<b>Impedance</b>	50Ohm
<b>Antenna Type</b>	Microstrip
<b>Antenna Gain</b>	8.00dBi@2400~2500MHz
<b>Radiation pattern</b>	Directional
<b>P/N</b>	D30-Ant2

Ant3(5G WiFi)

<b>Frequency</b>	5150~5850MHz
<b>Impedance</b>	50Ohm
<b>Antenna Type</b>	Microstrip
<b>Antenna Gain</b>	10.00dBi@5150~5250MHz 10.00dBi@5250~5350MHz 10.00dBi@5470~5725MHz 10.00dBi@5725~5895MHz
<b>Radiation pattern</b>	Directional
<b>P/N</b>	D30-Ant3

Ant4(5G WiFi)

<b>Frequency</b>	5150~5850MHz
<b>Impedance</b>	50Ohm
<b>Antenna Type</b>	Microstrip
<b>Antenna Gain</b>	10.00dBi@5150~5250MHz 10.00dBi@5250~5350MHz 10.00dBi@5470~5725MHz

	10.00dBi@5725~5895MHz
<b>Radiation pattern</b>	Directional
<b>P/N</b>	D30-Ant4

<b>Ant5(BLE)</b>	
<b>Frequency</b>	2400~2500MHz
<b>Impedance</b>	50Ohm
<b>Antenna Type</b>	IFA
<b>Antenna Gain</b>	3.00dBi@2400~2500MHz
<b>Radiation pattern</b>	Omni-Directional
<b>P/N</b>	D30-Ant5

### 3. Gain and Radiation Pattern

#### 3.1 Measurement Procedure

This measurement experiment adopted an antenna near-field measurement system, and the diagram of the measurement system was shown in Figure 3-1. The excitation signal was generated by the Keysight E5071C (300kHz-20GHz). Under the control of the central computer, the probe rotated in the  $\theta$  direction, and the EUT rotated in the  $\varphi$  direction with the turntable. The probe sampling frame received and collected signals in the near-field range of the EUT. The software system which was controlled by the central computer completed the processing, output and display of the test data.

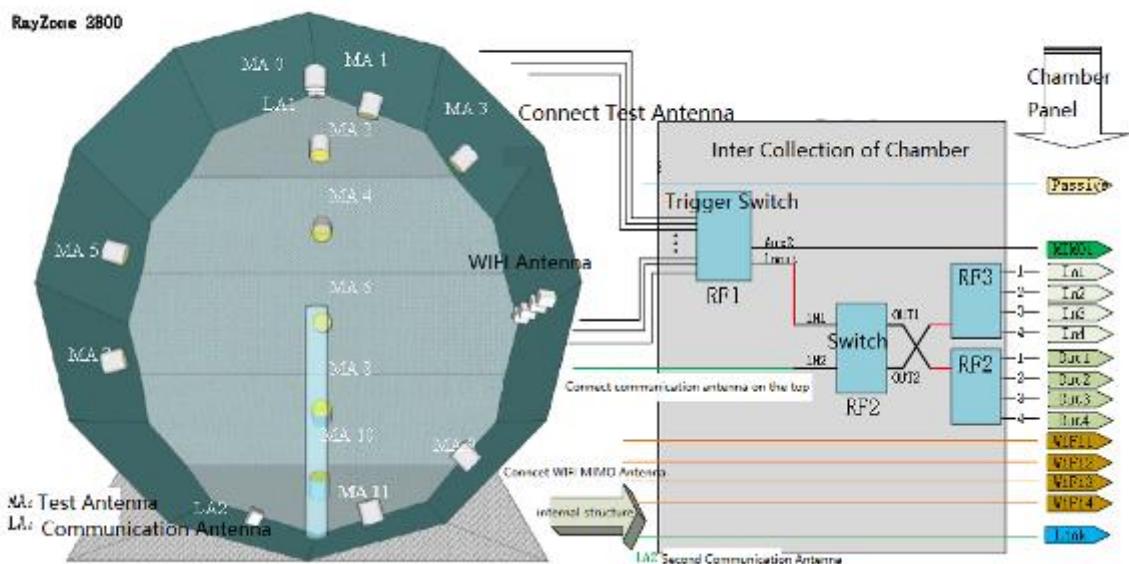


Figure 3-1

The test site was a full anechoic chamber with a size of  $3.0\text{m} \times 3.1\text{m} \times 2.97\text{m}$ , which was built by GTS Rayzone2800. All six surfaces of the anechoic chamber were pasted with absorbing materials. And the chamber was calibrated by the authoritative third-party lab every year. The antenna anechoic chamber measurement system adopted a 13-probe multi-probe system. The probe antennas were evenly distributed on the spherical surface surrounding the EUT, and theirs operating frequency was 600MHz~8.5GHz.

During the measurement, the probe antennas were rotated in the  $\theta$  direction under the control of the probe holder to sample the near-field data at the  $\theta$  angle. At the same time, the EUT rotated with the turntable in the  $\varphi$  direction to sample the near field data at the  $\varphi$  angle. The sampling accuracy was  $15^\circ$ . The system diagram was shown in Figure 3-2. From the sampling results, the EUT's near-field test data of  $\theta$  component,  $\varphi$  component and total component could be obtained.

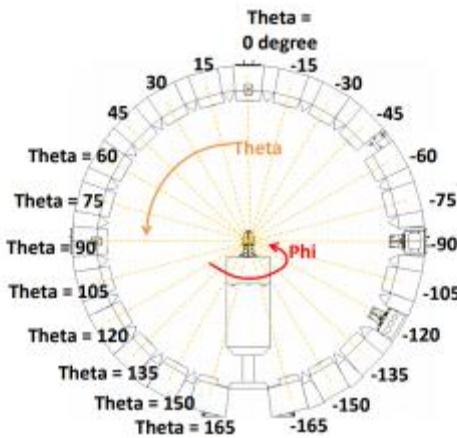


Figure 3-2

Before the measurement, calibrated the vector network analyzer, and then connected the input end of each antenna to the output end of the vector network analyzer, and evenly the antennas to be measured.

Test Equipment listed below:

Equipments	Model	Manufacturer	S/N	Cali. Interval	Cali. Due Date
Chamber	Rayzone2800	GTS(General Test System)	MY53470435	12months	2026/01/15
Vector Network Analyzer	E5071C	Keysight	MY46315238	24months	2026/03/13
GTS MaxSign100 Software	V2.1	GTS(General Test System)	/	/	/

### 3.2 Test Setup

The test setup was shown in Figure 3-3, 3-4:

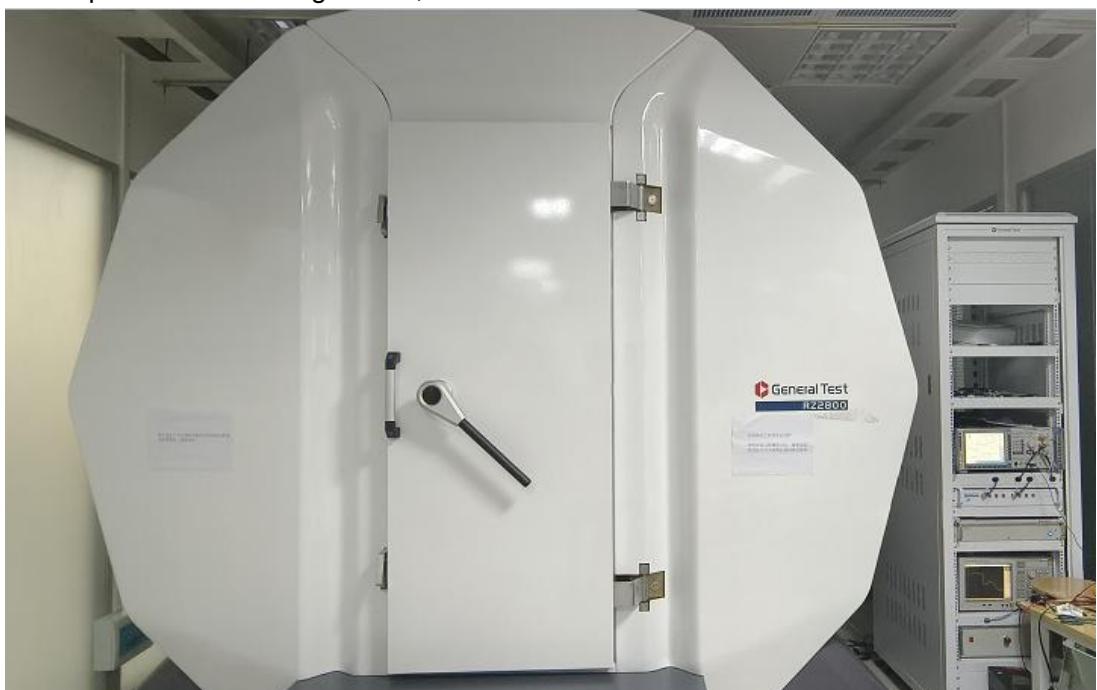


Figure 3-3






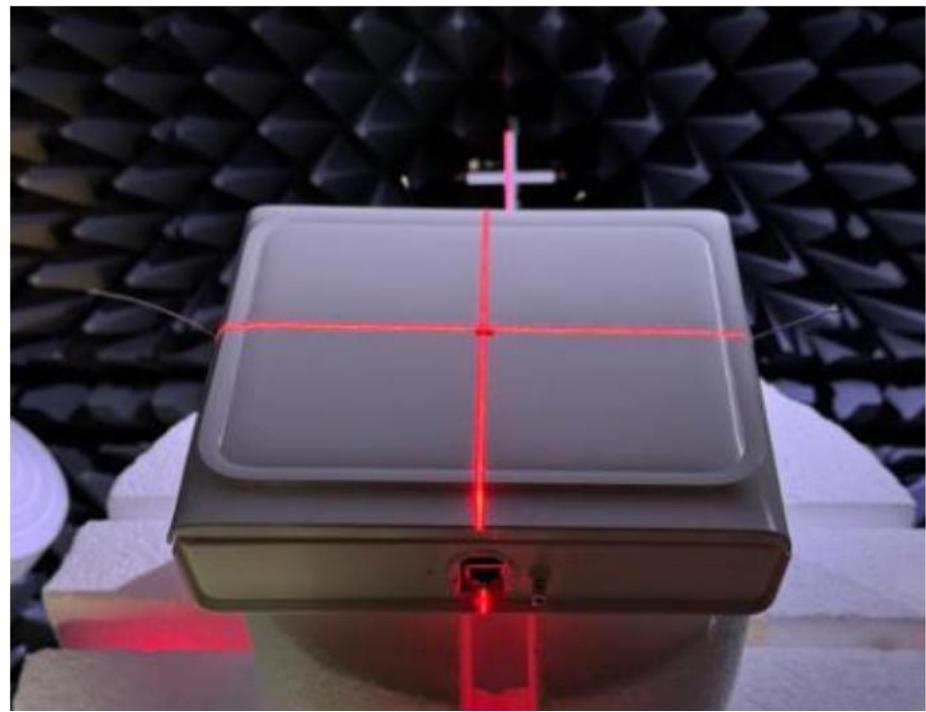


Figure 3-4

### 3.3 S Parameter Test Data

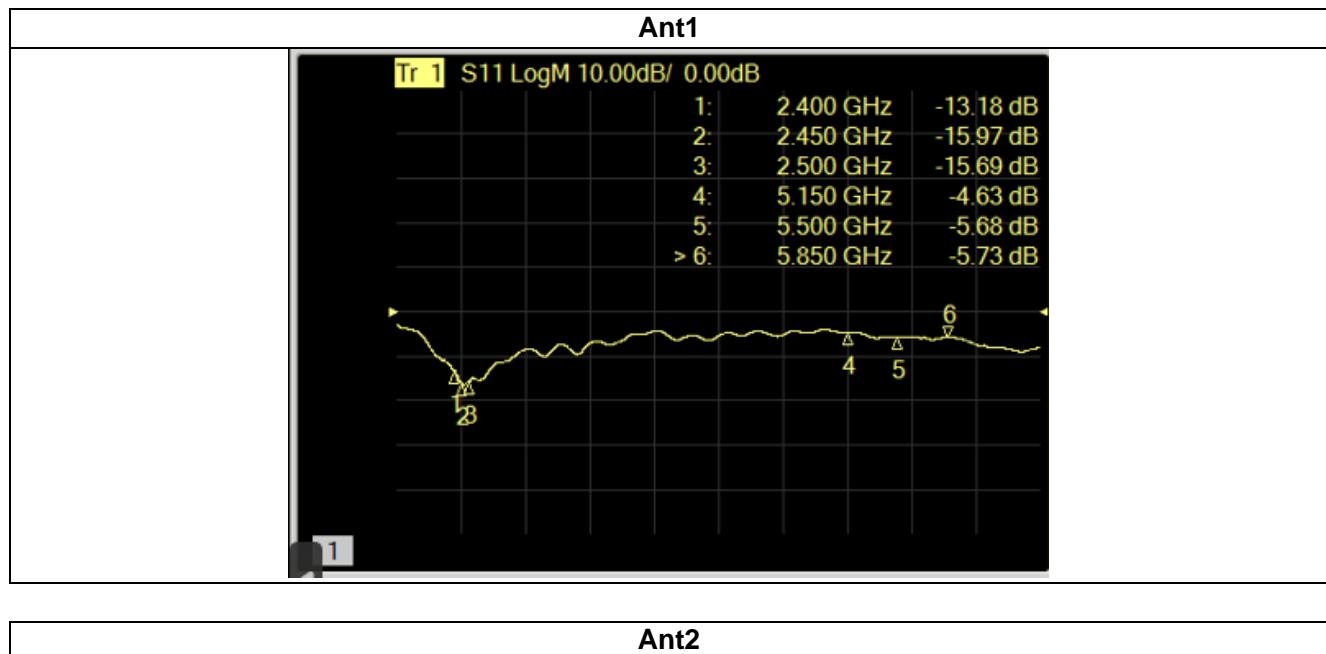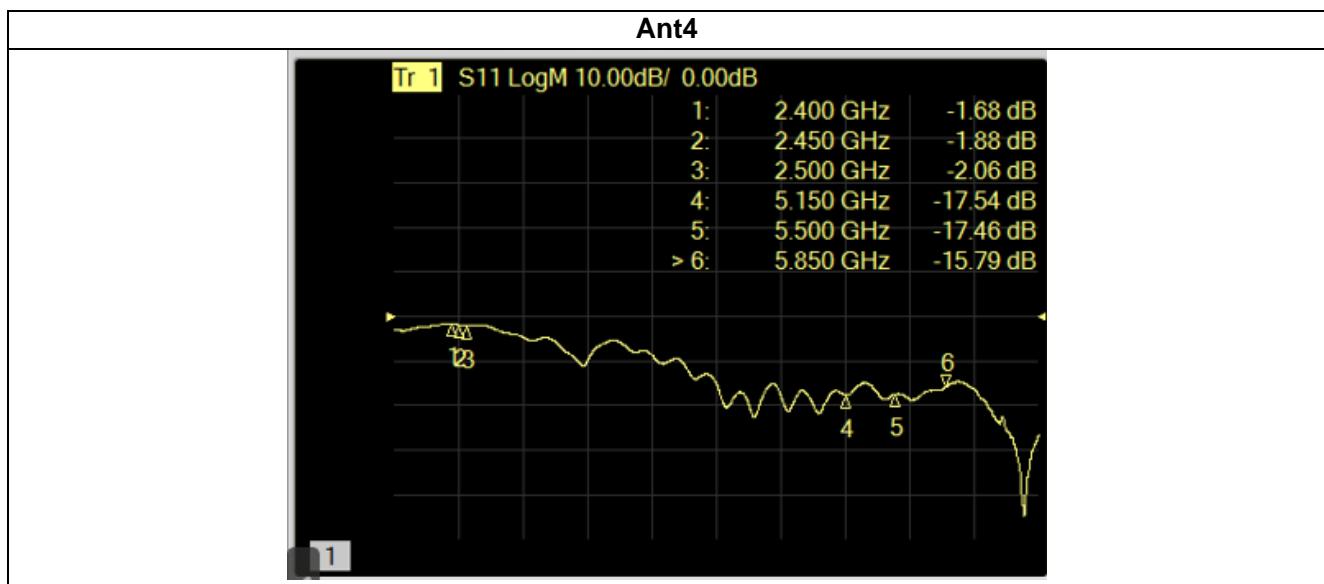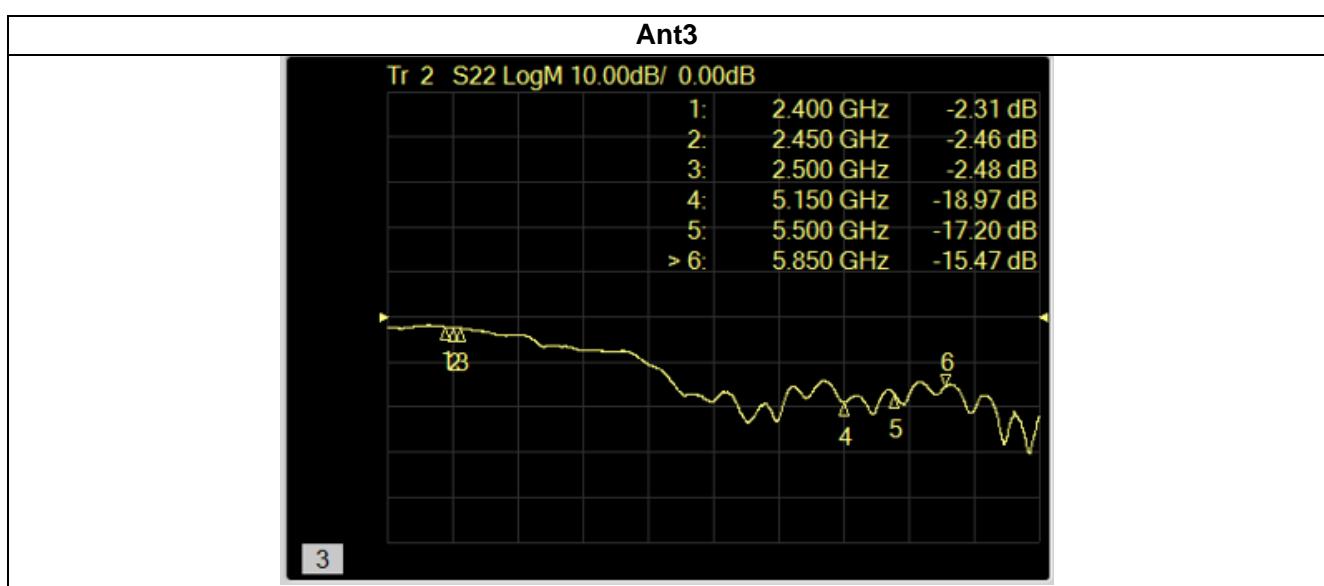

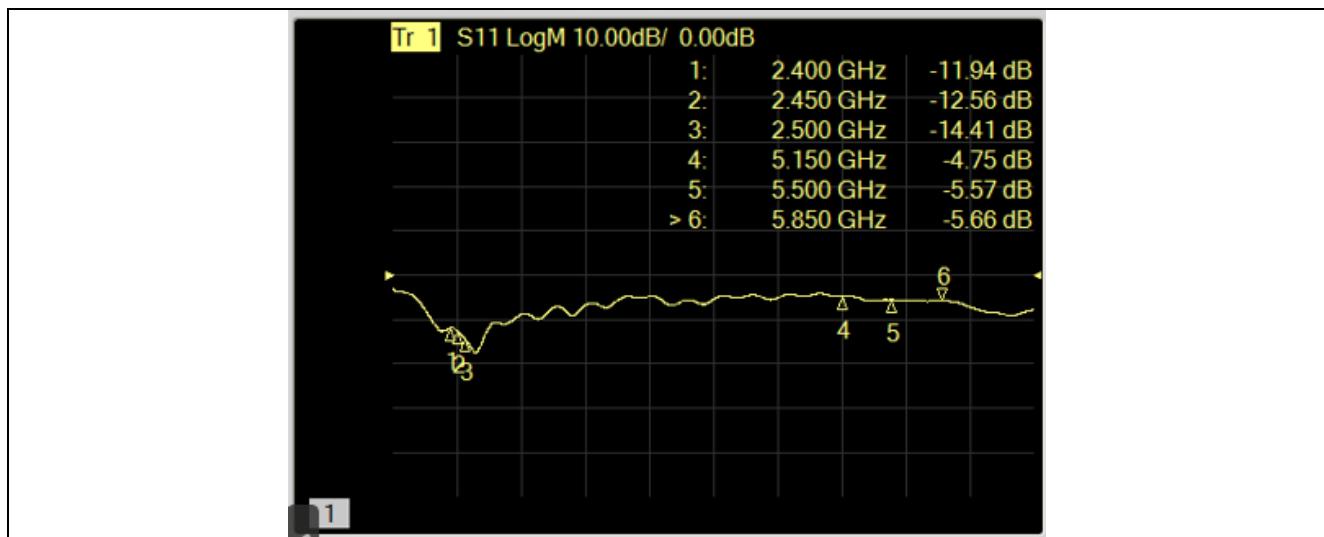

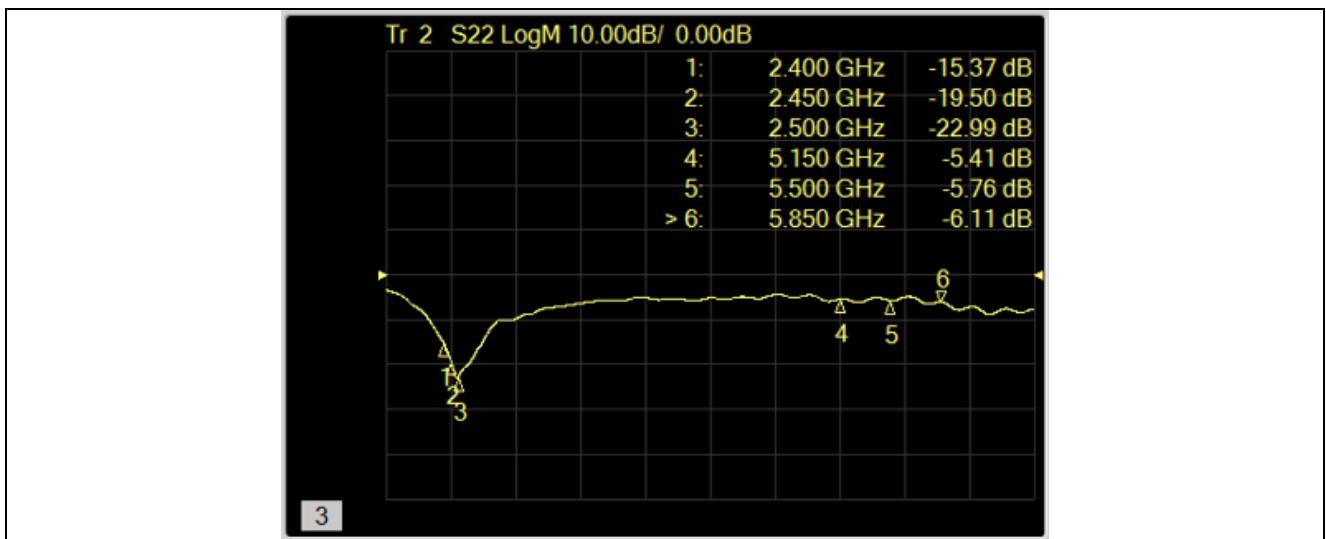

## 3.4 Antenna Gain

### 3.4.1 Peak Gain

<b>Frequency</b>	2.45GHz 2400~2500MHz
<b>Ant1 MaxGain(dBi)</b>	8.00
<b>Ant2 MaxGain(dBi)</b>	8.00
<b>Ant1 Polarization/Φ (°) / θ (°)</b>	Phi/0/0
<b>Ant2 Polarization/Φ (°) / θ (°)</b>	Theta/0/0
<b>Max Gain(dBi)</b>	8.00

<b>Frequency</b>	5.2GHz 5150~5250MHz	5.3GHz 5250~5350MHz	5.6GHz 5470~5725MHz	5.8GHz 5725~5850MHz
<b>Ant3 MaxGain(dBi)</b>	10.00	10.00	10.00	10.00
<b>Ant4 MaxGain(dBi)</b>	10.00	10.00	10.00	10.00
<b>Ant3 Polarization/Φ (°) / θ (°)</b>	Phi/0/0	Phi/0/0	Phi/0/0	Phi/0/0
<b>Ant4 Polarization/Φ (°) / θ (°)</b>	Theta/0/0	Theta/0/0	Theta/0/0	Theta/0/0
<b>Max Gain(dBi)</b>	10.00	10.00	10.00	10.00

<b>Frequency</b>	2.45GHz(BLE) 2400~2500MHz
<b>Ant5 MaxGain(dBi)</b>	3.00
<b>Ant5 Polarization/Φ (°) / θ (°)</b>	Theta/345/60
<b>Max Gain(dBi)</b>	3.00

## 3.5 Horizontal plane Gain

### 3.5.1 5150~5250MHz

$\theta$	>30°
Ant3 MaxGain(dBi)	-4
Ant4 MaxGain(dBi)	-4
Max Gain(dBi)	-4

## 3.6 Antenna Radiation Pattern

