


Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

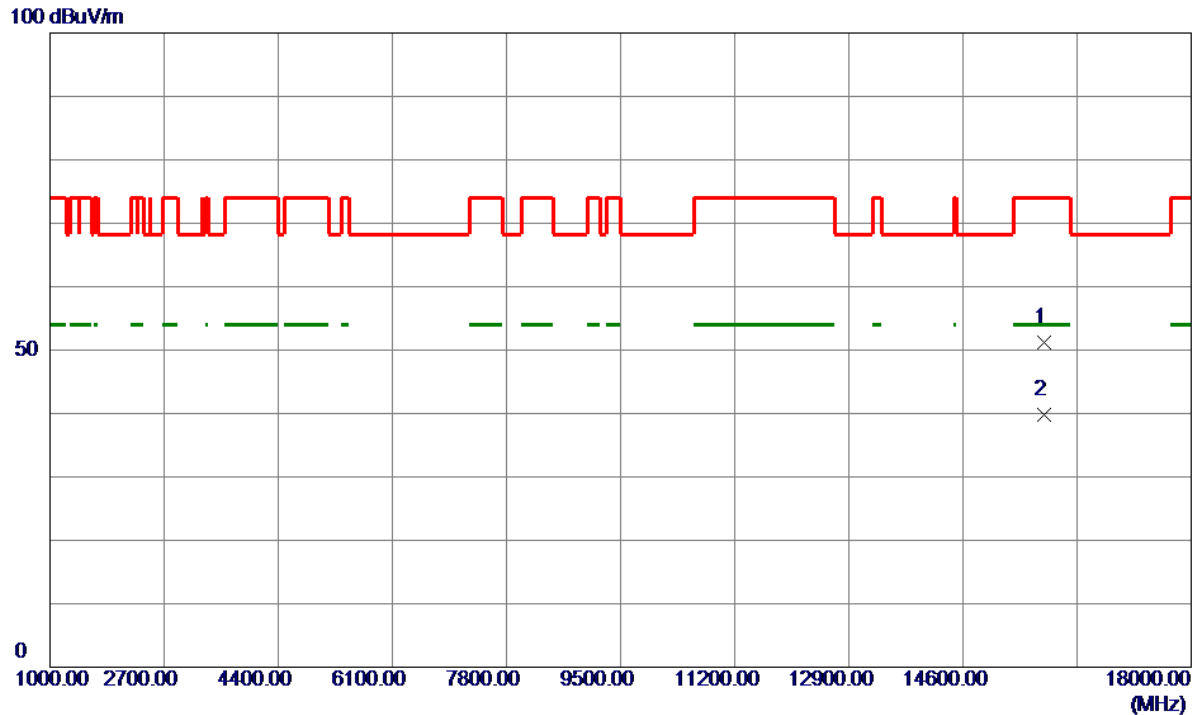


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15806.6900	39.72	11.52	51.24	74.00	-22.76	Peak	
2 *	15810.0100	28.31	11.52	39.83	54.00	-14.17	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

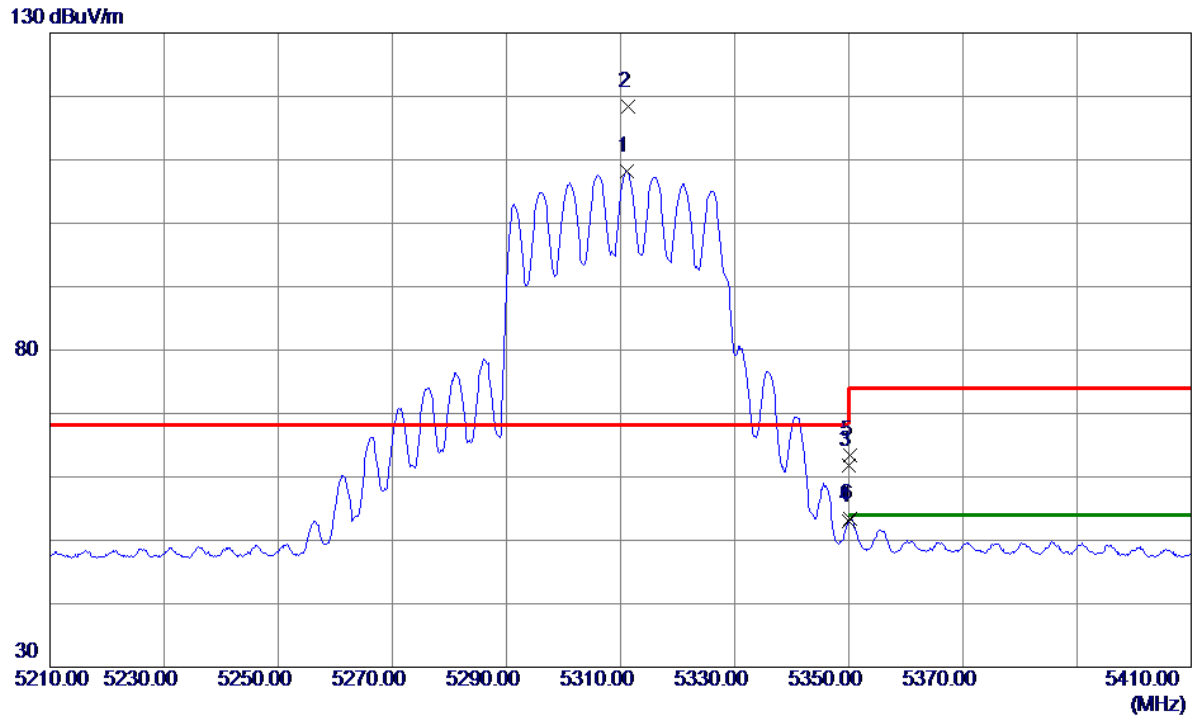


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5311.2000	93.96	14.29	108.25	999.00	-890.75	AVG	No Limit
2 *	5311.4000	104.04	14.29	118.33	68.20	50.13	Peak	No Limit
3	5350.0000	47.45	14.29	61.74	74.00	-12.26	Peak	
4	5350.0000	38.71	14.29	53.00	54.00	-1.00	AVG	
5	5350.2000	49.07	14.29	63.36	74.00	-10.64	Peak	
6	5350.2000	39.19	14.29	53.48	54.00	-0.52	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

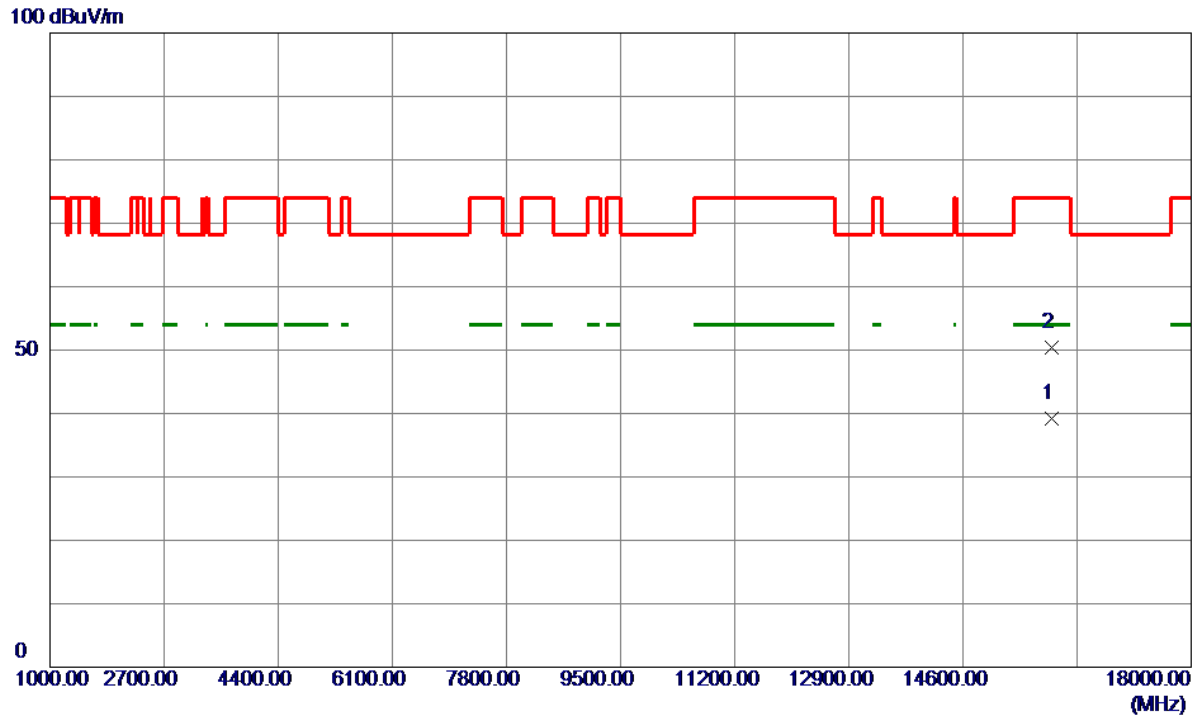


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15925.5200	27.73	11.54	39.27	54.00	-14.73	AVG	
2	15926.9400	38.83	11.54	50.37	74.00	-23.63	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

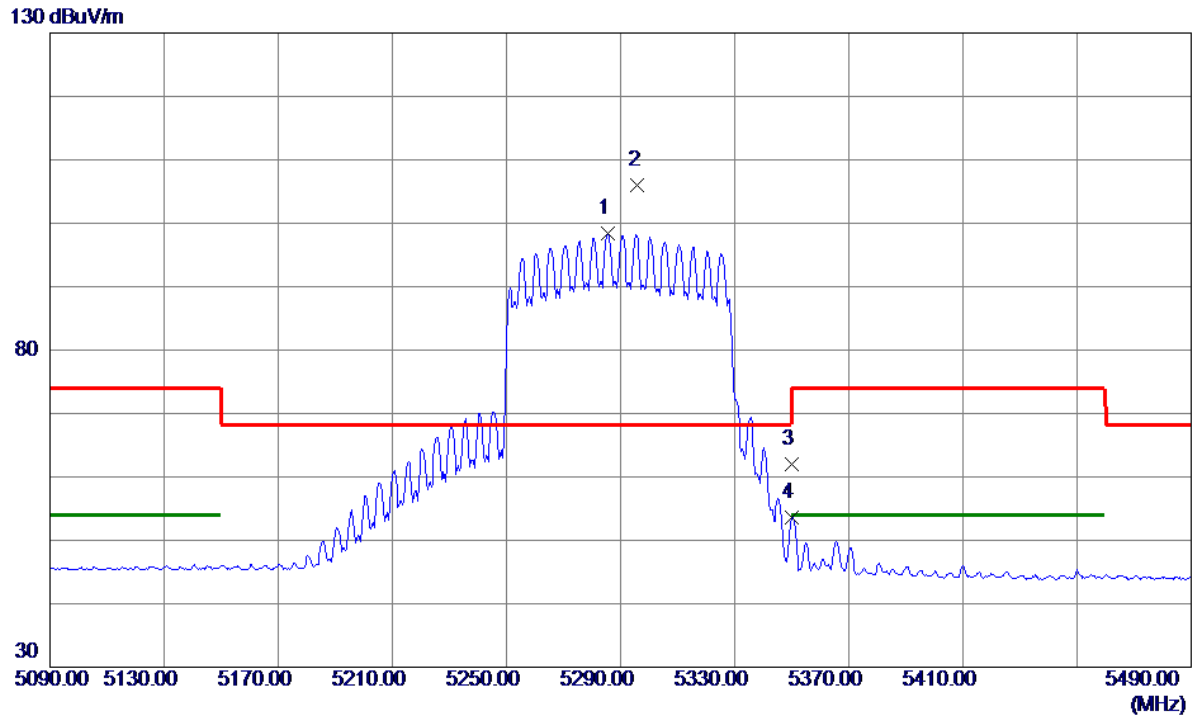


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5285.6000	84.04	14.30	98.34	999.00	-900.66	AVG	No Limit
2 *	5296.0000	91.77	14.30	106.07	68.20	37.87	Peak	No Limit
3	5350.0000	47.65	14.29	61.94	74.00	-12.06	Peak	
4	5350.0000	39.34	14.29	53.63	54.00	-0.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

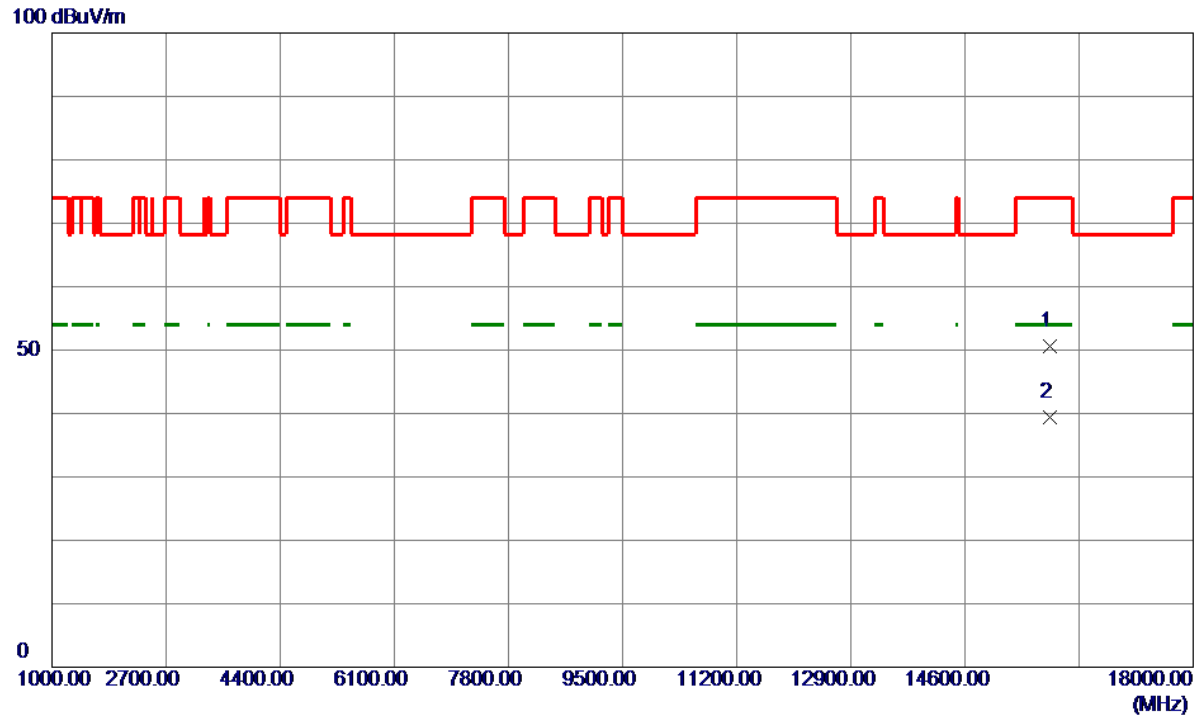


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15869.0680	38.99	11.53	50.52	74.00	-23.48	Peak	
2 *	15870.2900	27.92	11.53	39.45	54.00	-14.55	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Vertical
-----------	--	--------------	----------

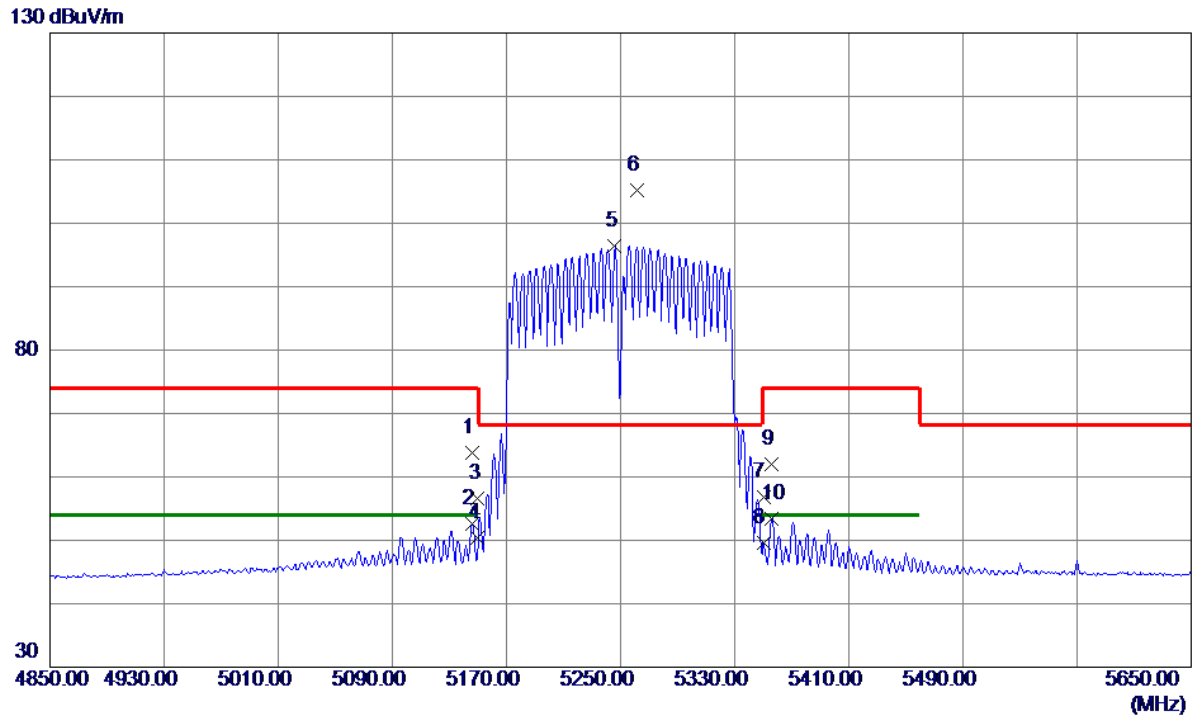


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.0000	49.41	14.31	63.72	74.00	-10.28	Peak	
2	5146.0000	38.33	14.31	52.64	54.00	-1.36	AVG	
3	5150.0000	42.35	14.31	56.66	74.00	-17.34	Peak	
4	5150.0000	36.13	14.31	50.44	54.00	-3.56	AVG	
5	5246.0000	82.17	14.30	96.47	999.00	-902.53	AVG	No Limit
6 *	5261.2000	90.82	14.30	105.12	68.20	36.92	Peak	No Limit
7	5350.0000	42.57	14.29	56.86	74.00	-17.14	Peak	
8	5350.0000	35.38	14.29	49.67	54.00	-4.33	AVG	
9	5355.6000	47.65	14.29	61.94	74.00	-12.06	Peak	
10	5355.6000	39.09	14.29	53.38	54.00	-0.62	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode 5250 MHz	Polarization	Horizontal
-----------	--	--------------	------------

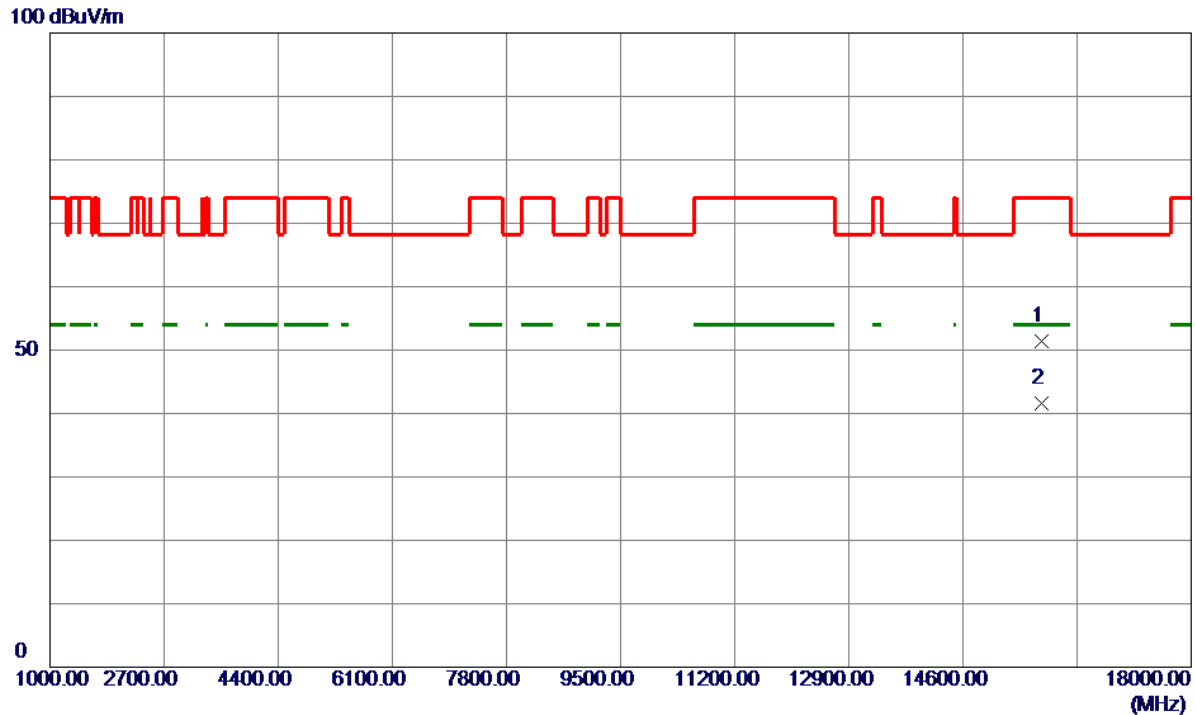


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15767.5000	39.92	11.51	51.43	74.00	-22.57	Peak	
2 *	15780.0000	30.16	11.51	41.67	54.00	-12.33	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Vertical
-----------	---	--------------	----------

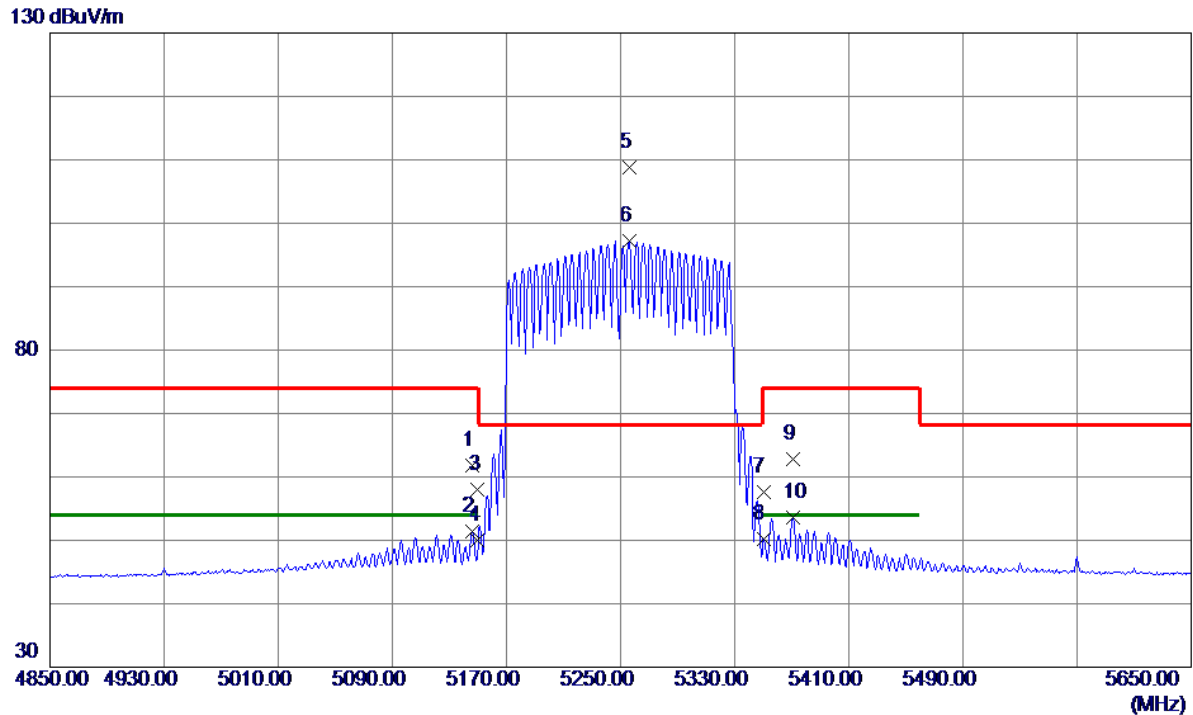


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.0000	47.47	14.31	61.78	74.00	-12.22	Peak	
2	5146.0000	37.06	14.31	51.37	54.00	-2.63	AVG	
3	5150.0000	43.67	14.31	57.98	74.00	-16.02	Peak	
4	5150.0000	35.67	14.31	49.98	54.00	-4.02	AVG	
5 *	5256.4000	94.46	14.30	108.76	68.20	40.56	Peak	No Limit
6	5256.4000	82.94	14.30	97.24	999.00	-901.76	AVG	No Limit
7	5350.0000	43.22	14.29	57.51	74.00	-16.49	Peak	
8	5350.0000	35.91	14.29	50.20	54.00	-3.80	AVG	
9	5370.8000	48.59	14.29	62.88	74.00	-11.12	Peak	
10	5370.8000	39.36	14.29	53.65	54.00	-0.35	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode 5250 MHz	Polarization	Horizontal
-----------	---	--------------	------------

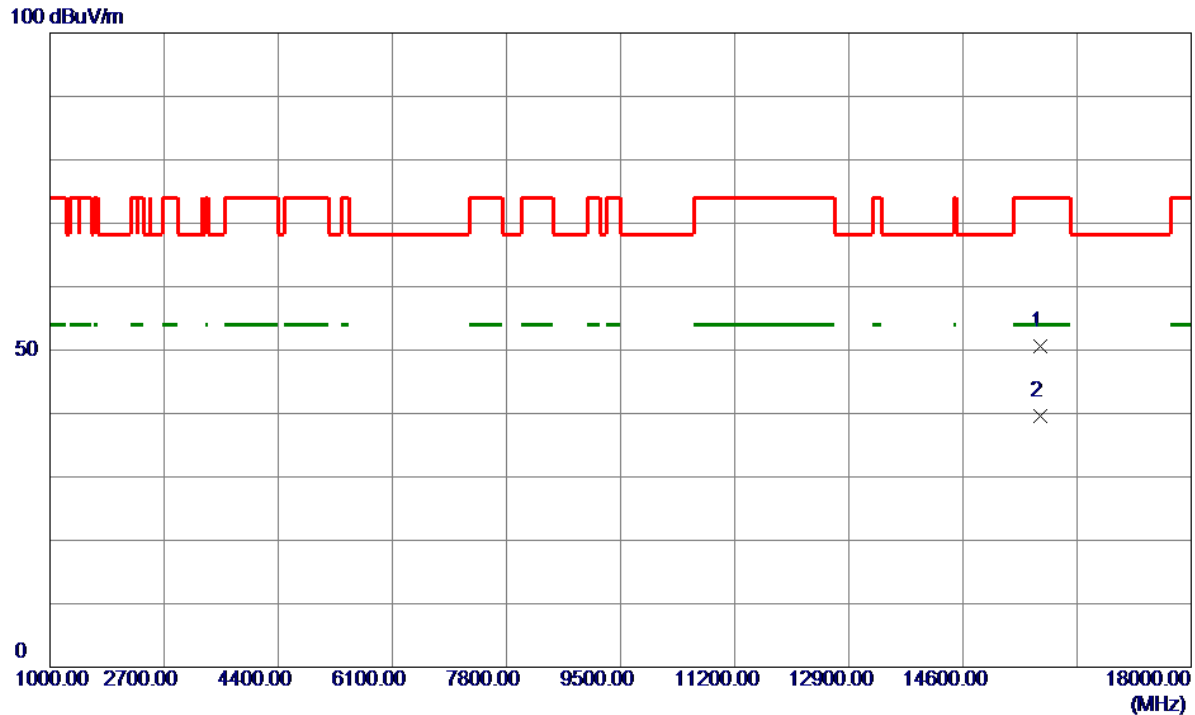


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15745.9600	39.13	11.50	50.63	74.00	-23.37	Peak	
2 *	15750.0300	28.12	11.50	39.62	54.00	-14.38	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

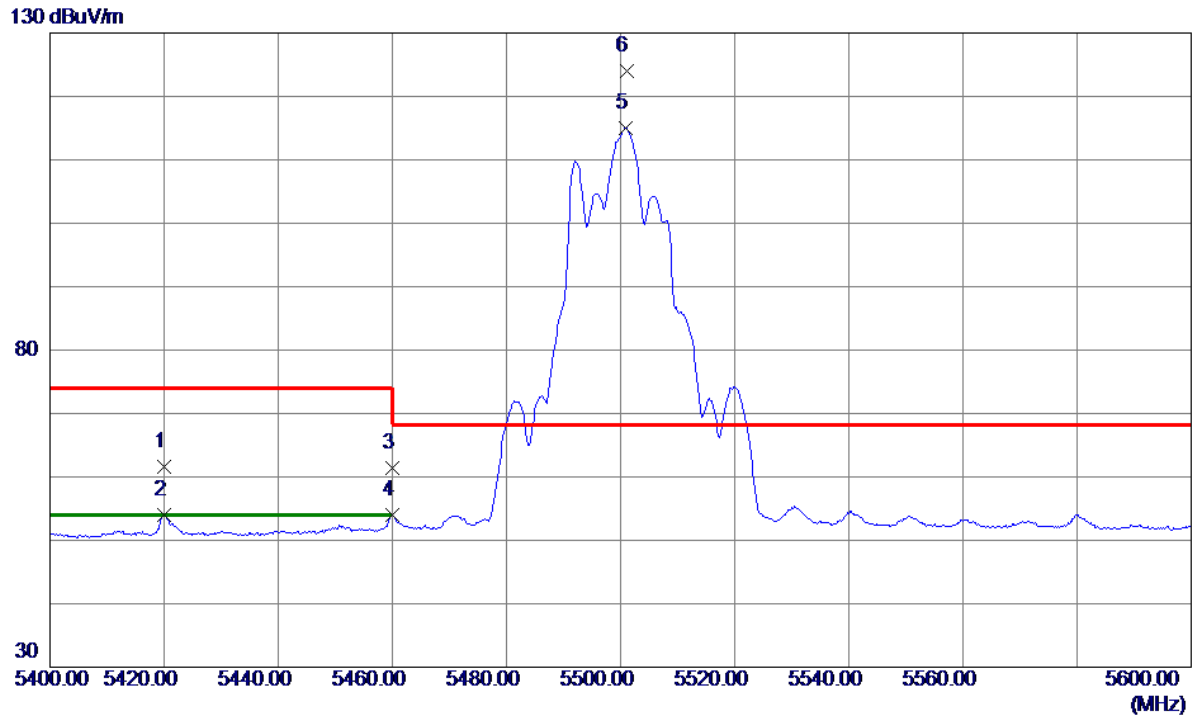


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5420.0000	47.40	14.29	61.69	74.00	-12.31	Peak	
2	5420.0000	39.68	14.29	53.97	54.00	-0.03	AVG	
3	5460.0000	47.04	14.28	61.32	74.00	-12.68	Peak	
4	5460.0000	39.63	14.28	53.91	54.00	-0.09	AVG	
5	5500.8000	100.81	14.28	115.09	999.00	-883.91	AVG	No Limit
6 *	5501.0000	109.75	14.28	124.03	68.20	55.83	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

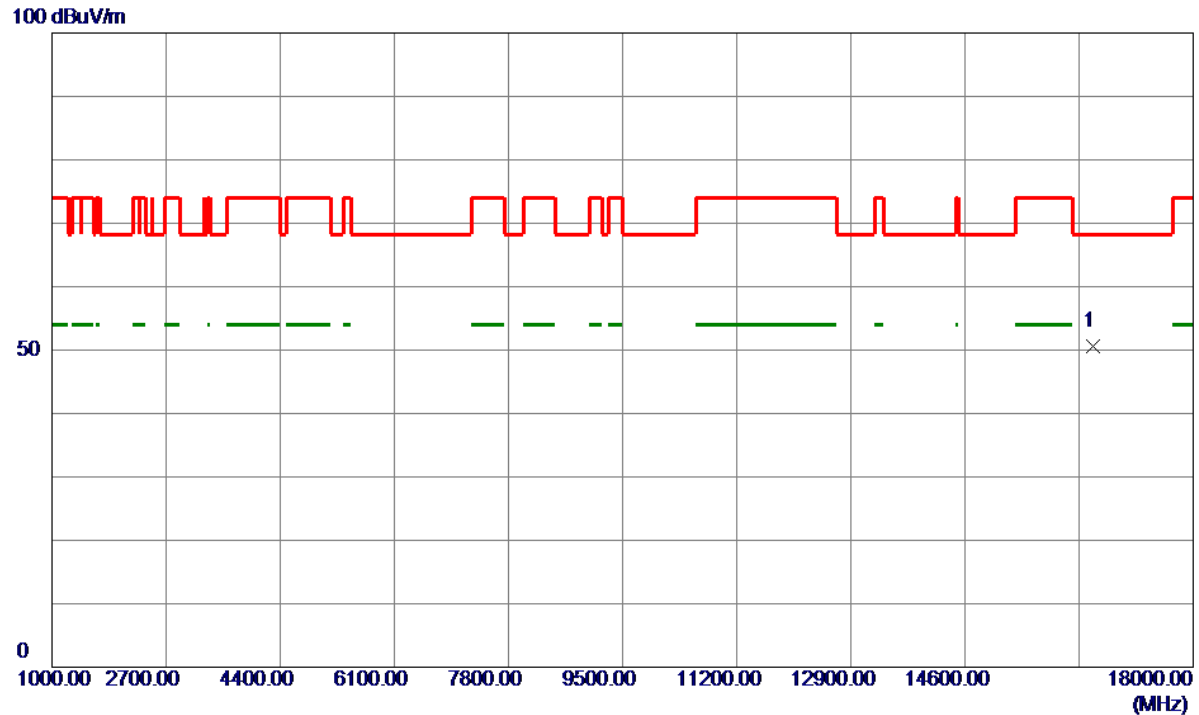


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16503.4000	39.24	11.36	50.60	68.20	-17.60	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

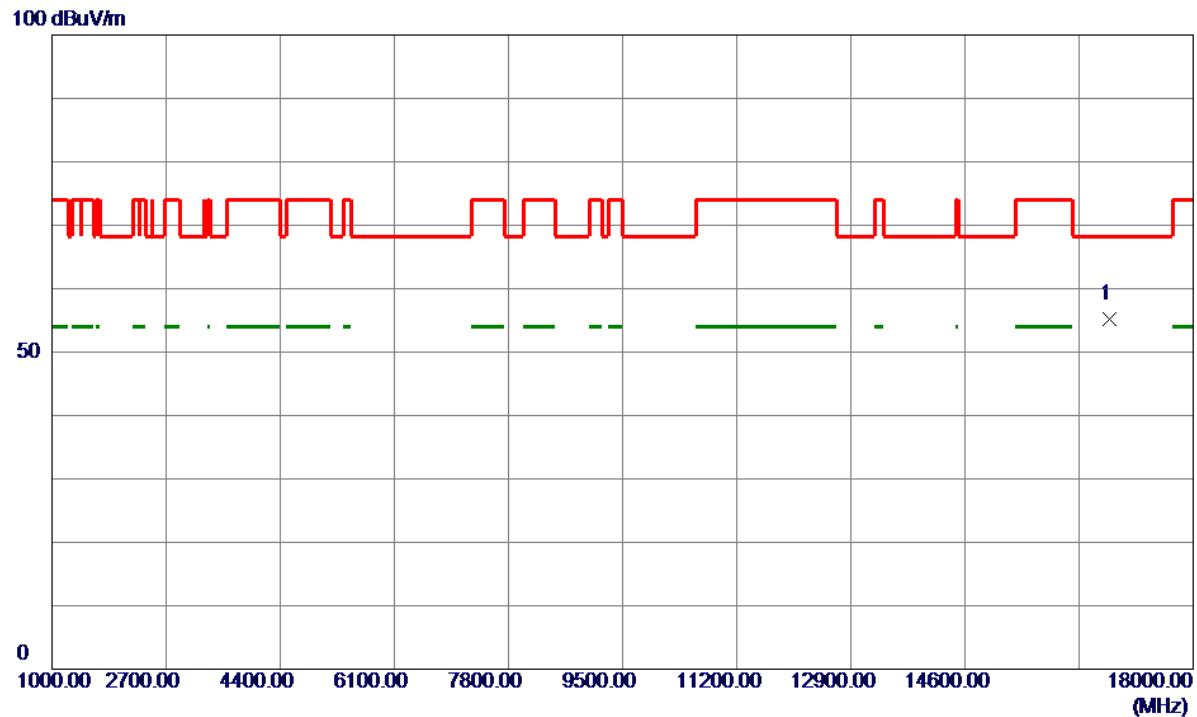


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16746.9500	43.86	11.33	55.19	68.20	-13.01	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

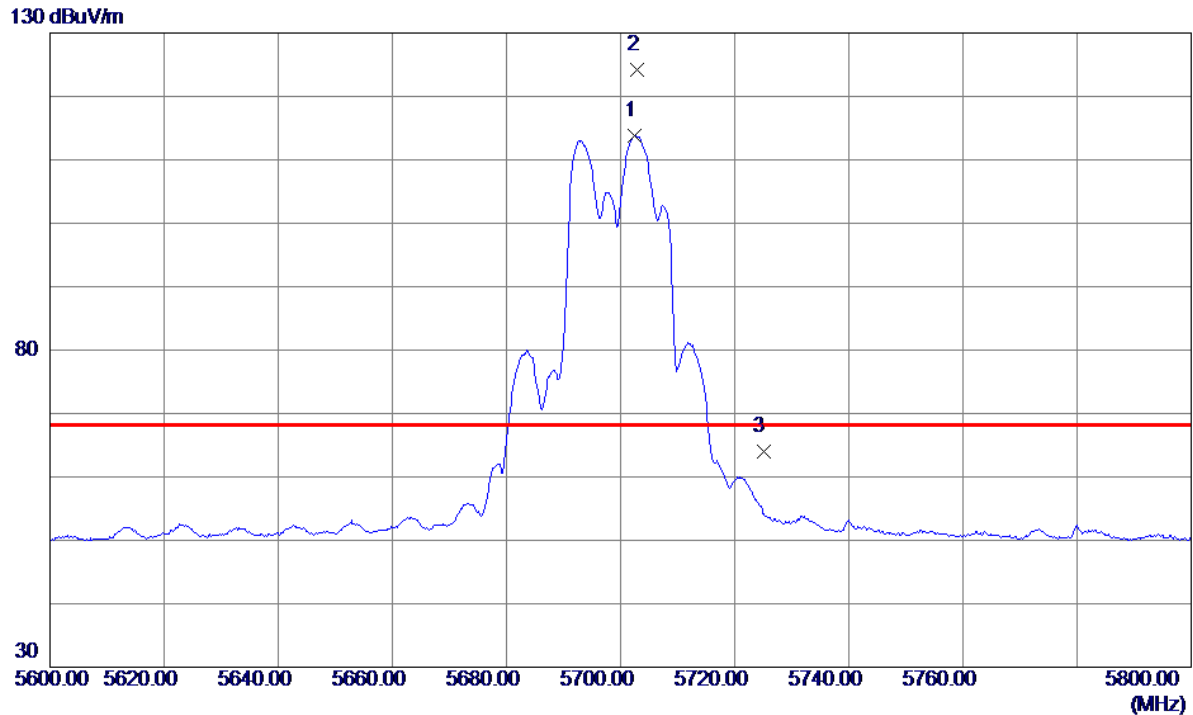


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5702.4000	99.00	14.72	113.72	999.00	-885.28	AVG	No Limit
2 *	5702.8000	109.51	14.72	124.23	68.20	56.03	Peak	No Limit
3	5725.0000	49.17	14.77	63.94	68.20	-4.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

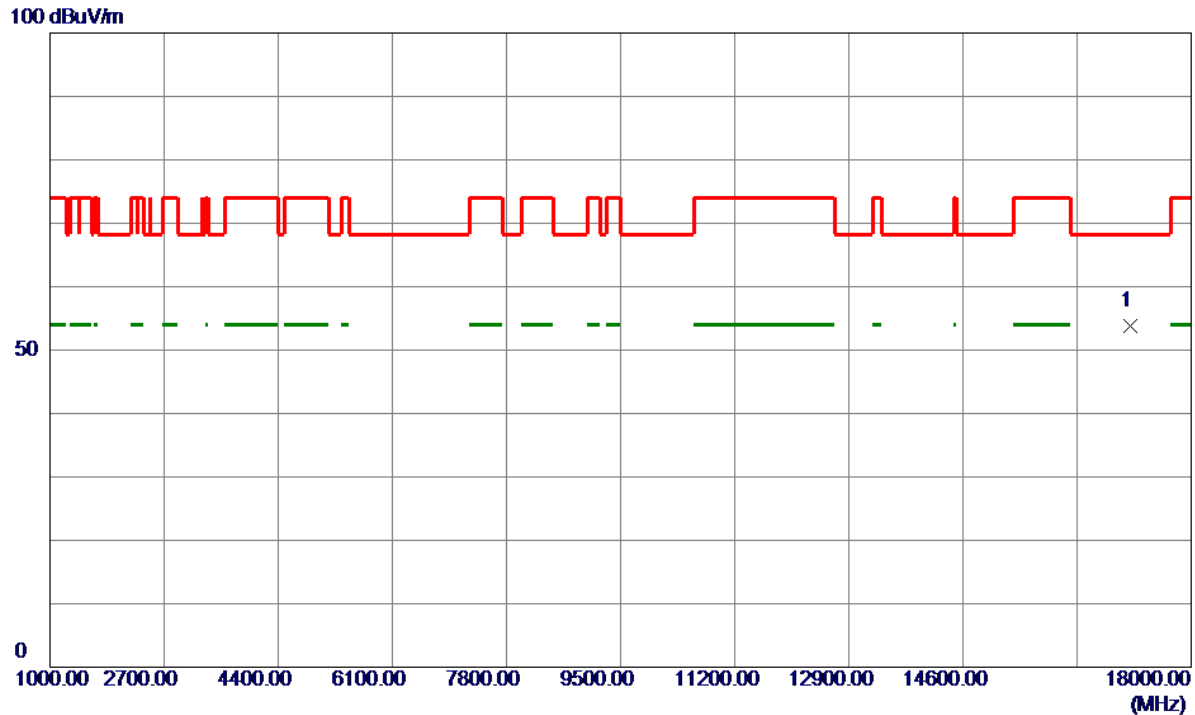


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17096.2000	42.64	11.11	53.75	68.20	-14.45	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

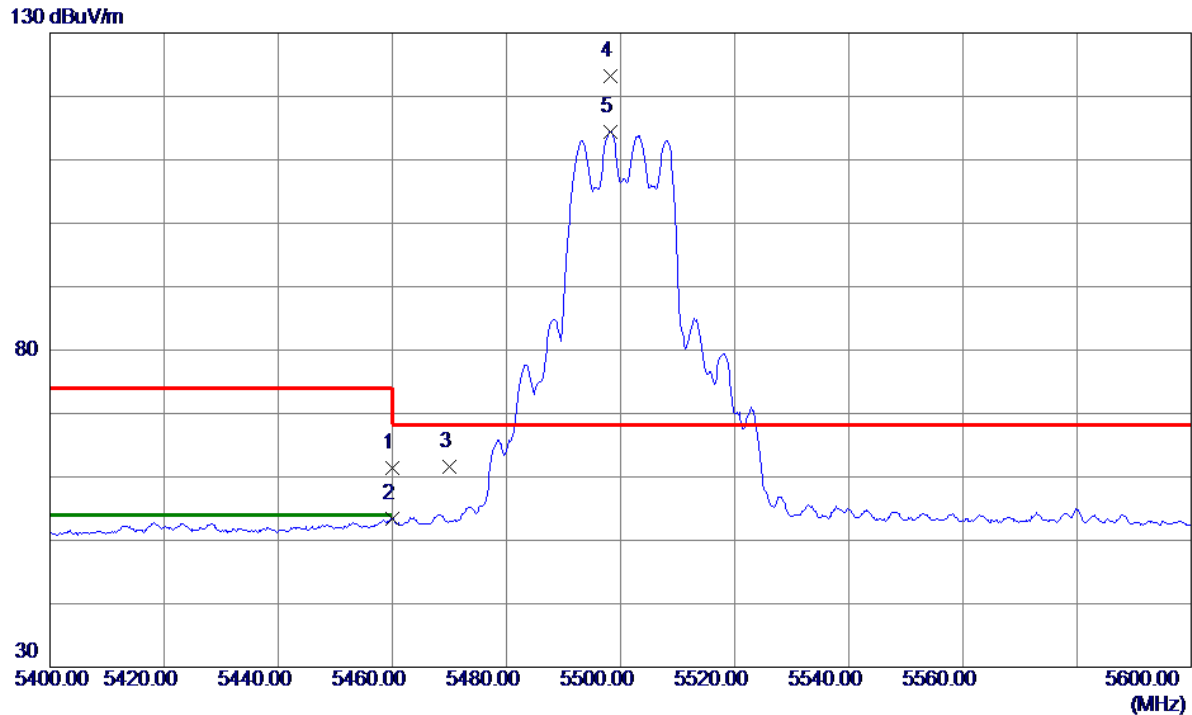


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	47.15	14.28	61.43	74.00	-12.57	Peak	
2	5460.0000	39.20	14.28	53.48	54.00	-0.52	AVG	
3	5470.0000	47.35	14.28	61.63	68.20	-6.57	Peak	
4 *	5498.2000	108.97	14.28	123.25	68.20	55.05	Peak	No Limit
5	5498.2000	100.12	14.28	114.40	999.00	-884.60	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5500 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

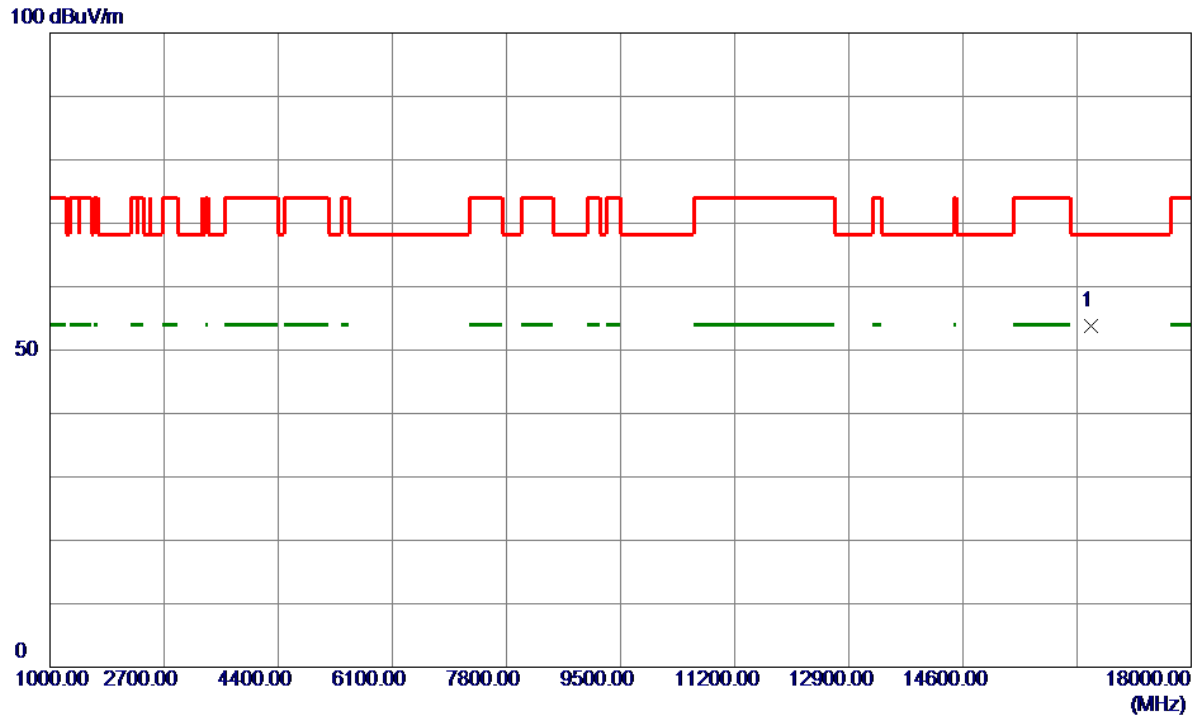


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16499.4000	42.53	11.36	53.89	68.20	-14.31	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5580 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

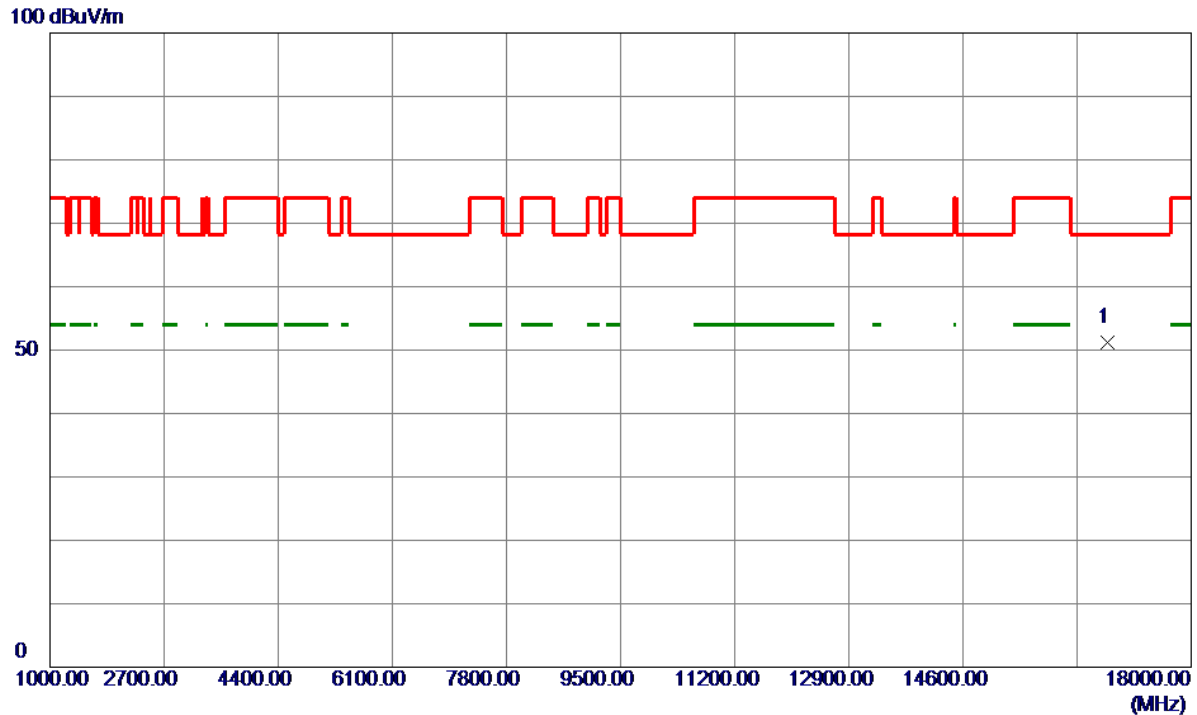


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16746.4500	39.81	11.33	51.14	68.20	-17.06	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

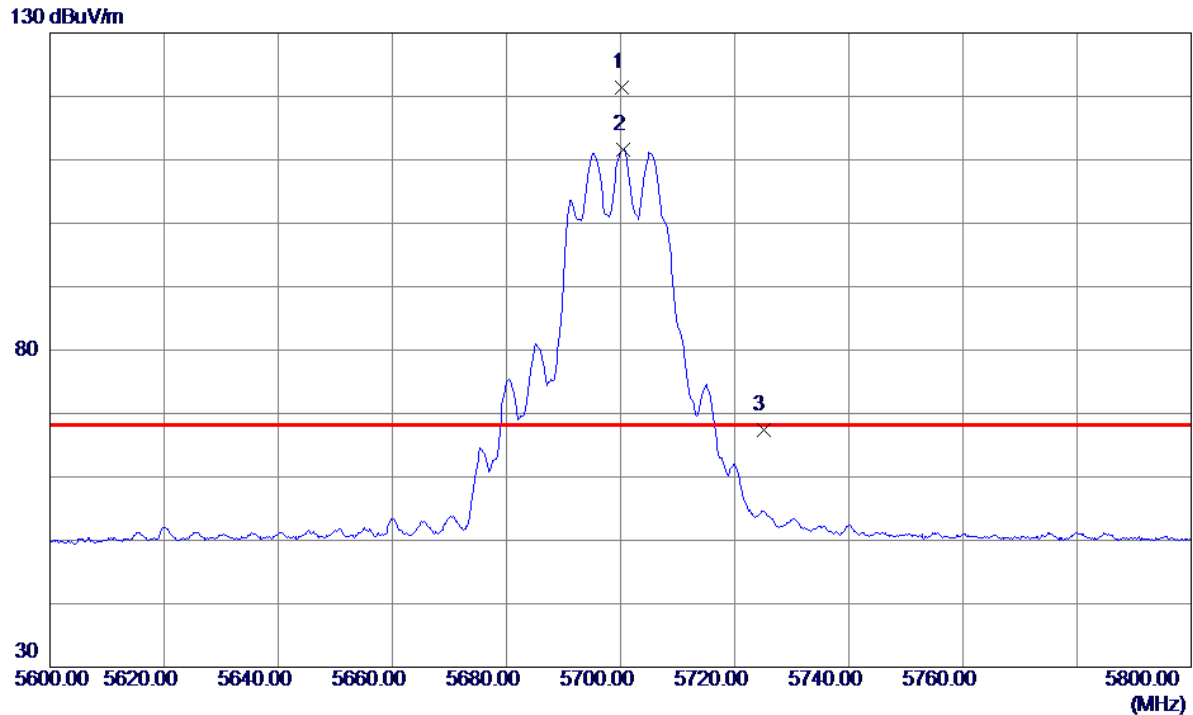


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5700.2000	106.71	14.72	121.43	68.20	53.23	Peak	No Limit
2	5700.4000	96.95	14.72	111.67	999.00	-887.33	AVG	No Limit
3	5725.0000	52.56	14.77	67.33	68.20	-0.87	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT20) Mode 5700 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

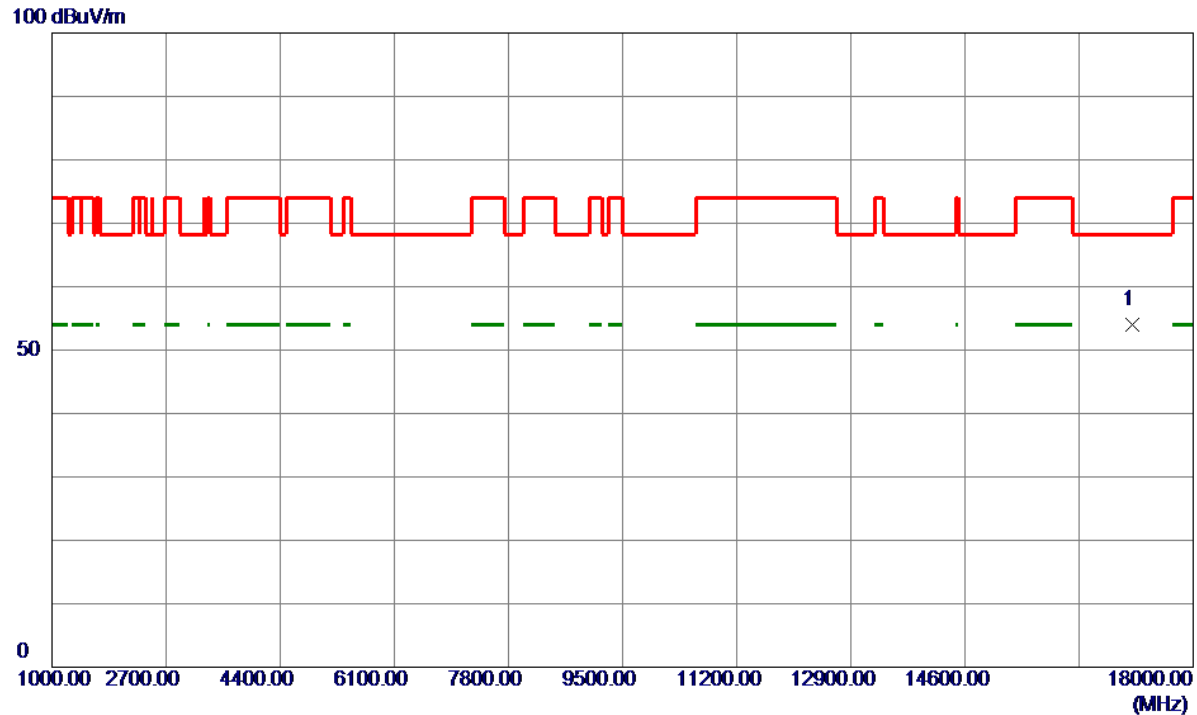


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17099.2000	42.98	11.11	54.09	68.20	-14.11	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

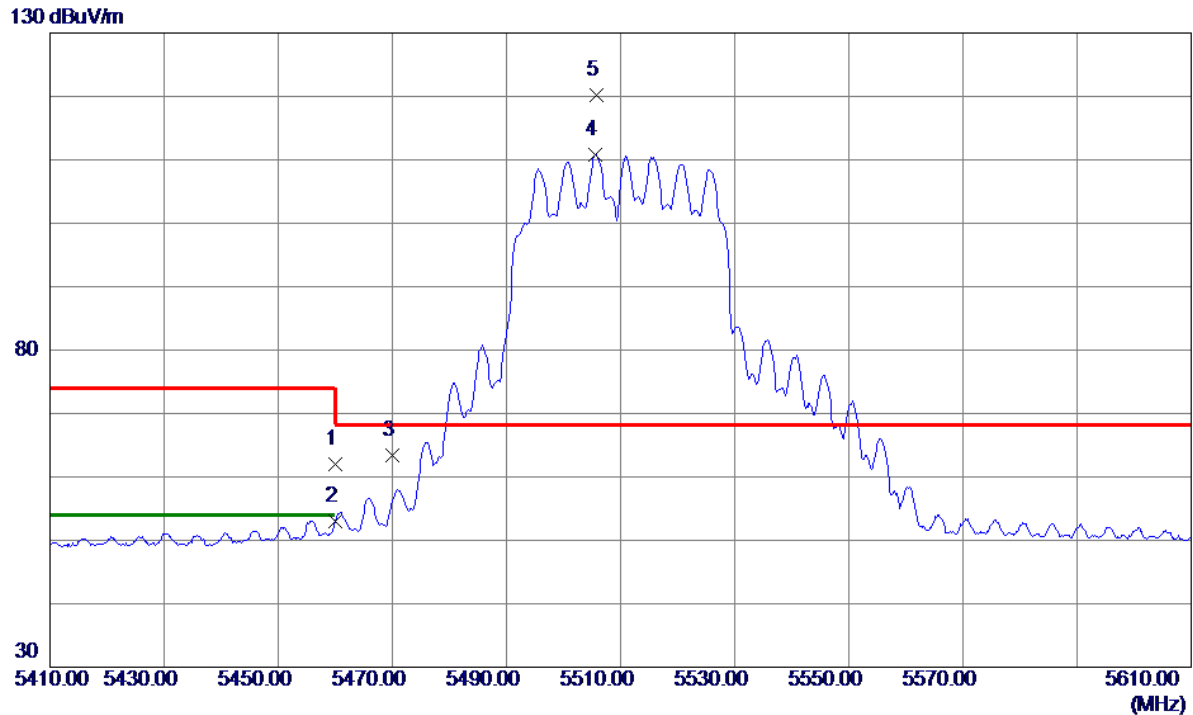


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	47.81	14.28	62.09	74.00	-11.91	Peak	
2	5460.0000	38.78	14.28	53.06	54.00	-0.94	AVG	
3	5470.0000	49.17	14.28	63.45	68.20	-4.75	Peak	
4	5505.6000	96.50	14.29	110.79	999.00	-888.21	AVG	No Limit
5 *	5505.8000	105.82	14.29	120.11	68.20	51.91	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5510 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

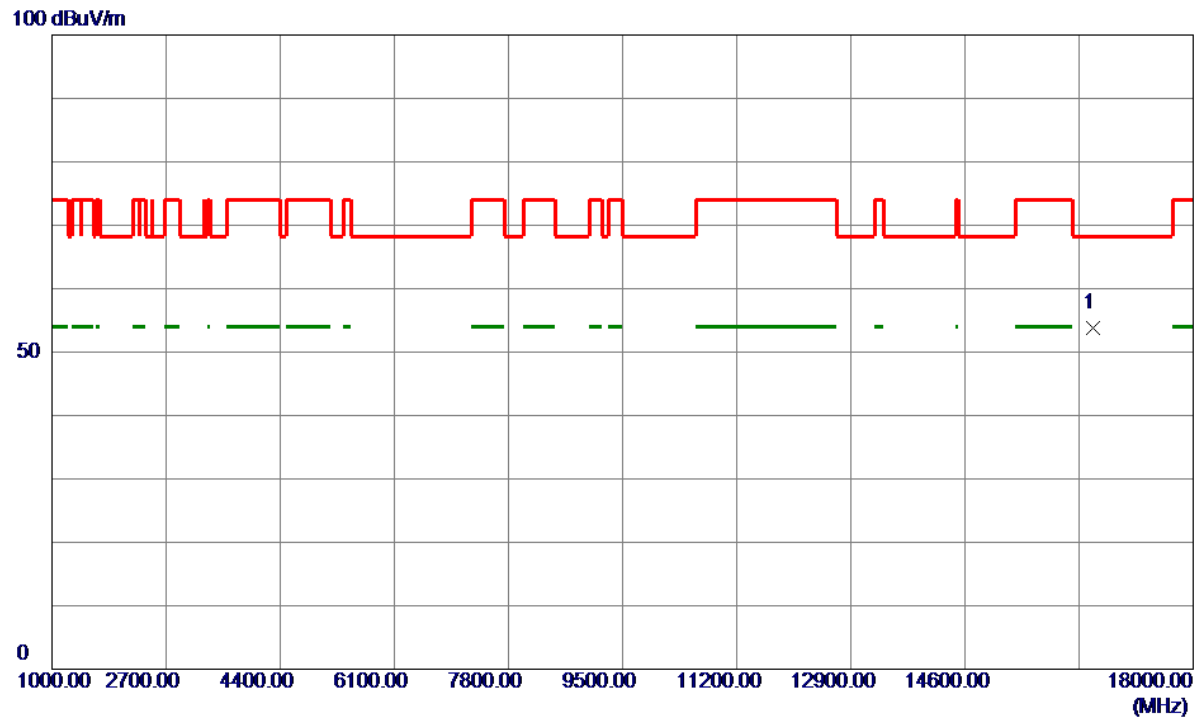


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16499.7000	42.36	11.36	53.72	68.20	-14.48	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5550 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

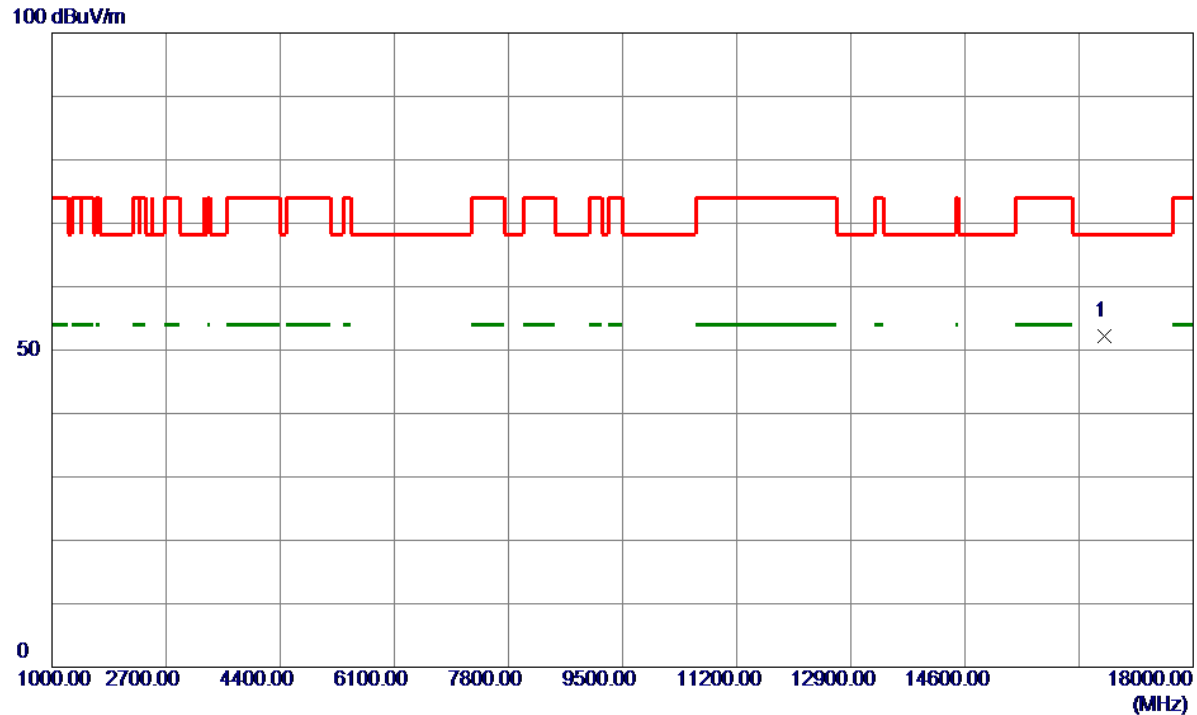


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16682.0000	40.93	11.33	52.26	68.20	-15.94	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

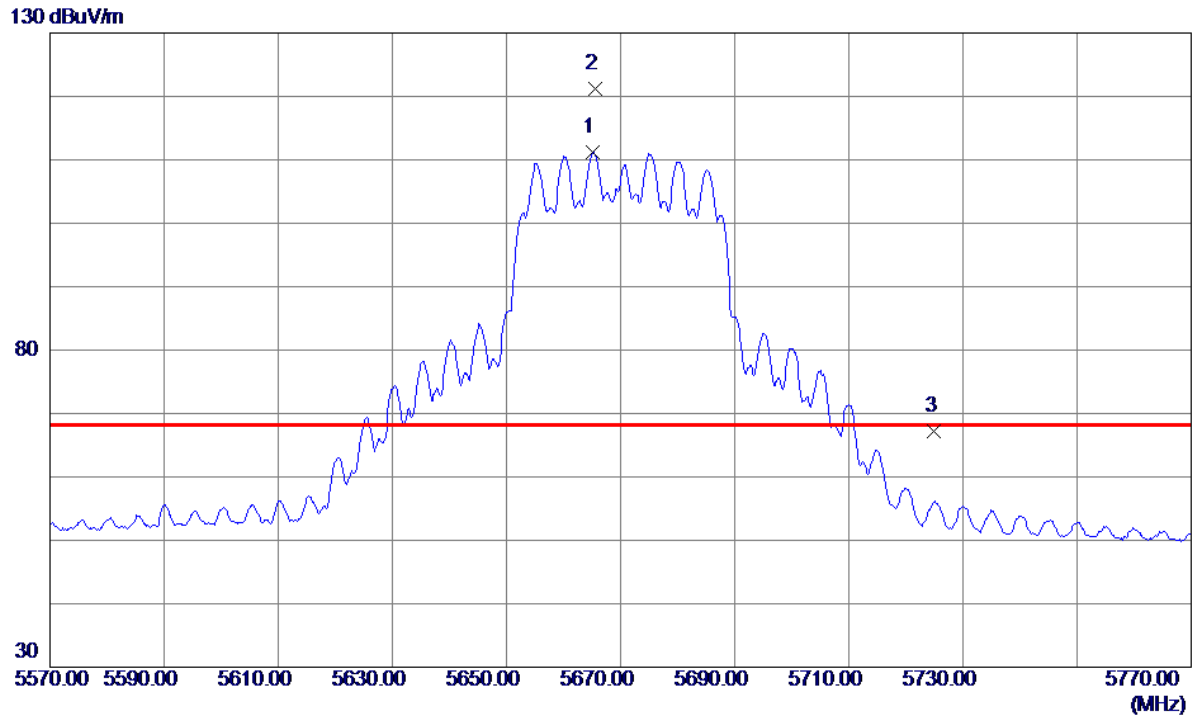


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5665.2000	96.63	14.64	111.27	999.00	-887.73	AVG	No Limit
2 *	5665.6000	106.59	14.64	121.23	68.20	53.03	Peak	No Limit
3	5725.0000	52.38	14.77	67.15	68.20	-1.05	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT40) Mode 5670 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

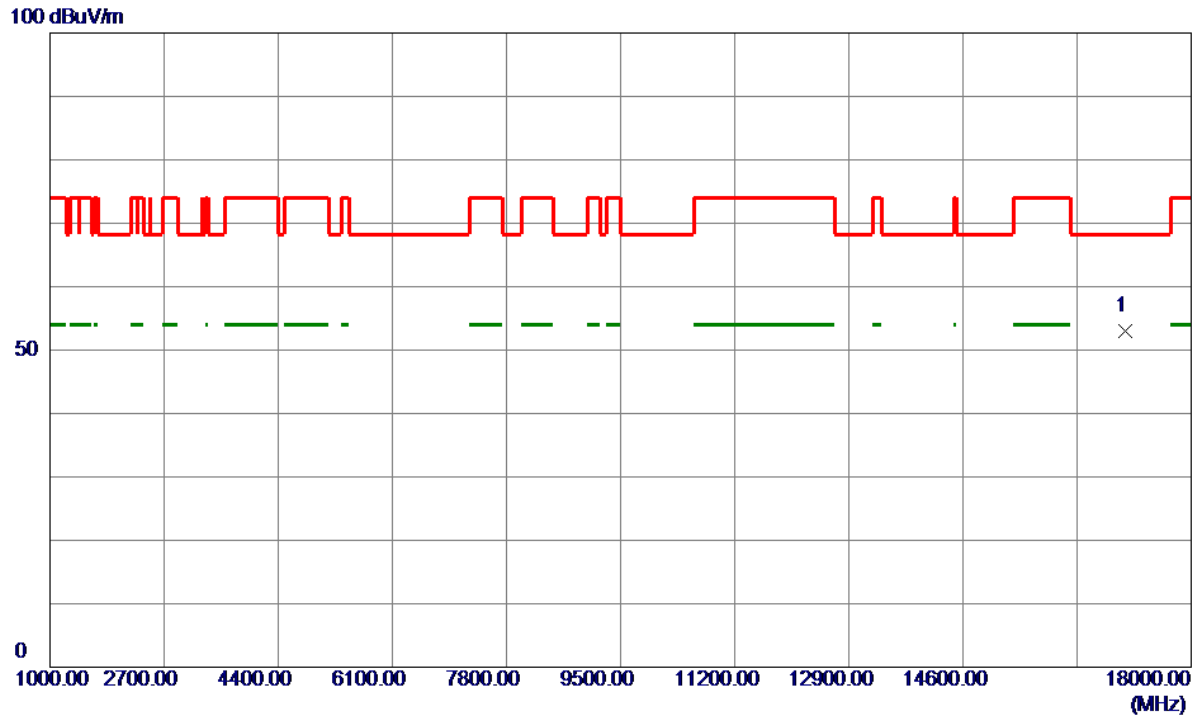


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17014.6000	41.78	11.26	53.04	68.20	-15.16	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

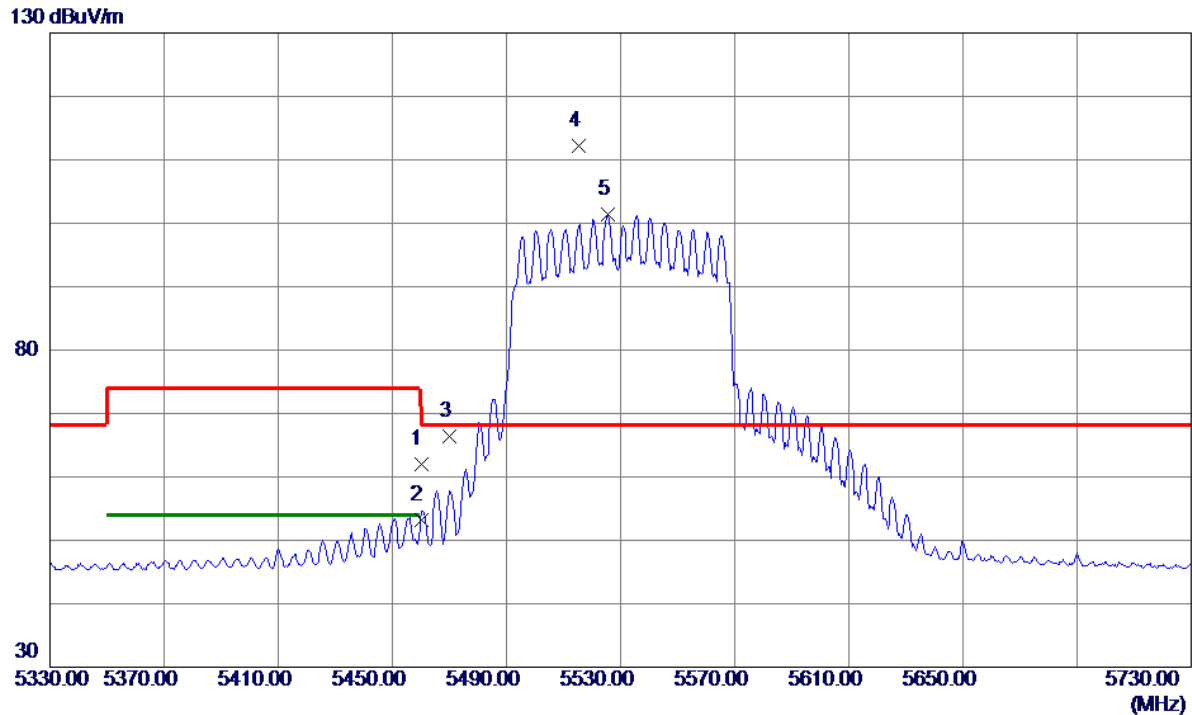


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	47.68	14.28	61.96	74.00	-12.04	Peak	
2	5460.0000	39.00	14.28	53.28	54.00	-0.72	AVG	
3	5470.0000	52.04	14.28	66.32	68.20	-1.88	Peak	
4 *	5515.2000	97.92	14.31	112.23	68.20	44.03	Peak	No Limit
5	5525.6000	87.03	14.34	101.37	999.00	-897.63	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

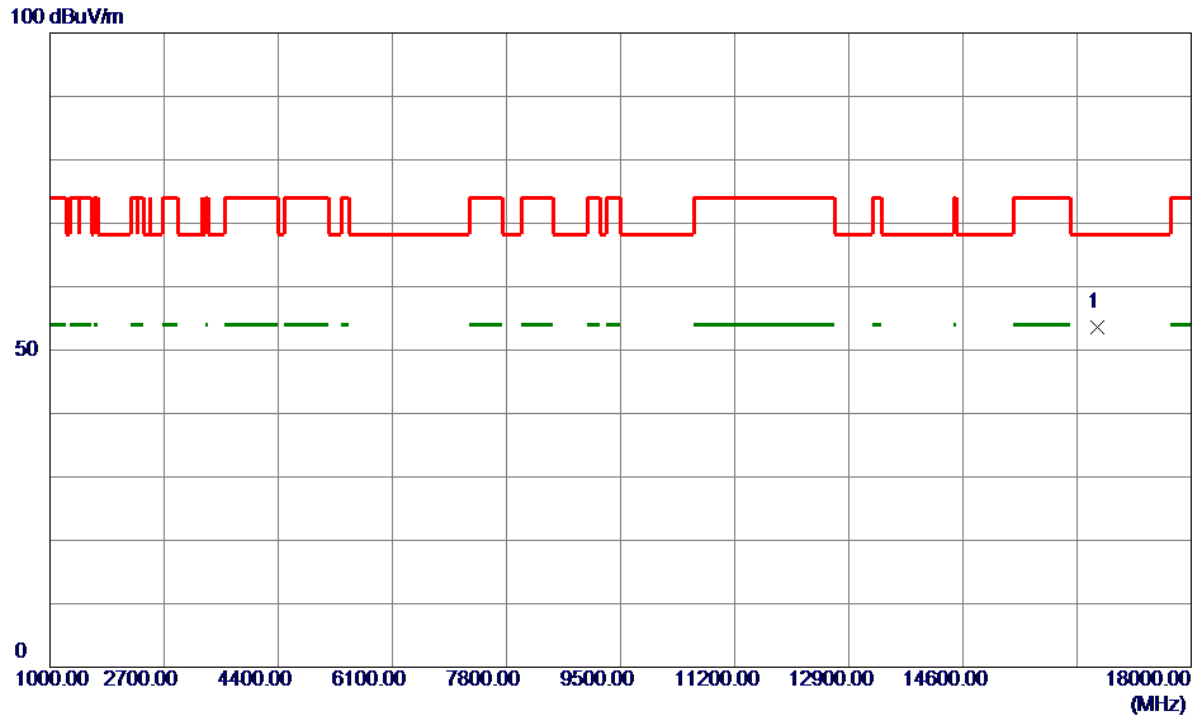


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16597.0000	42.32	11.35	53.67	68.20	-14.53	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

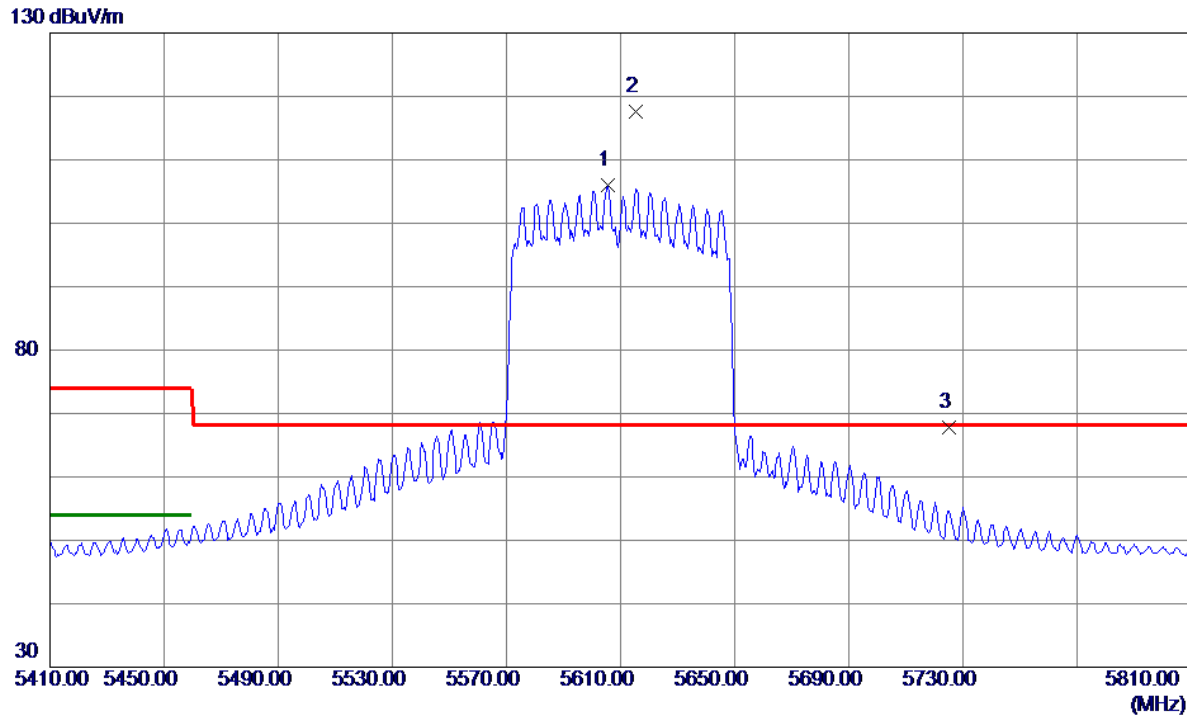


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5605.6000	91.51	14.51	106.02	999.00	-892.98	AVG	No Limit
2 *	5615.2000	103.00	14.53	117.53	68.20	49.33	Peak	No Limit
3	5725.0000	52.95	14.77	67.72	68.20	-0.48	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

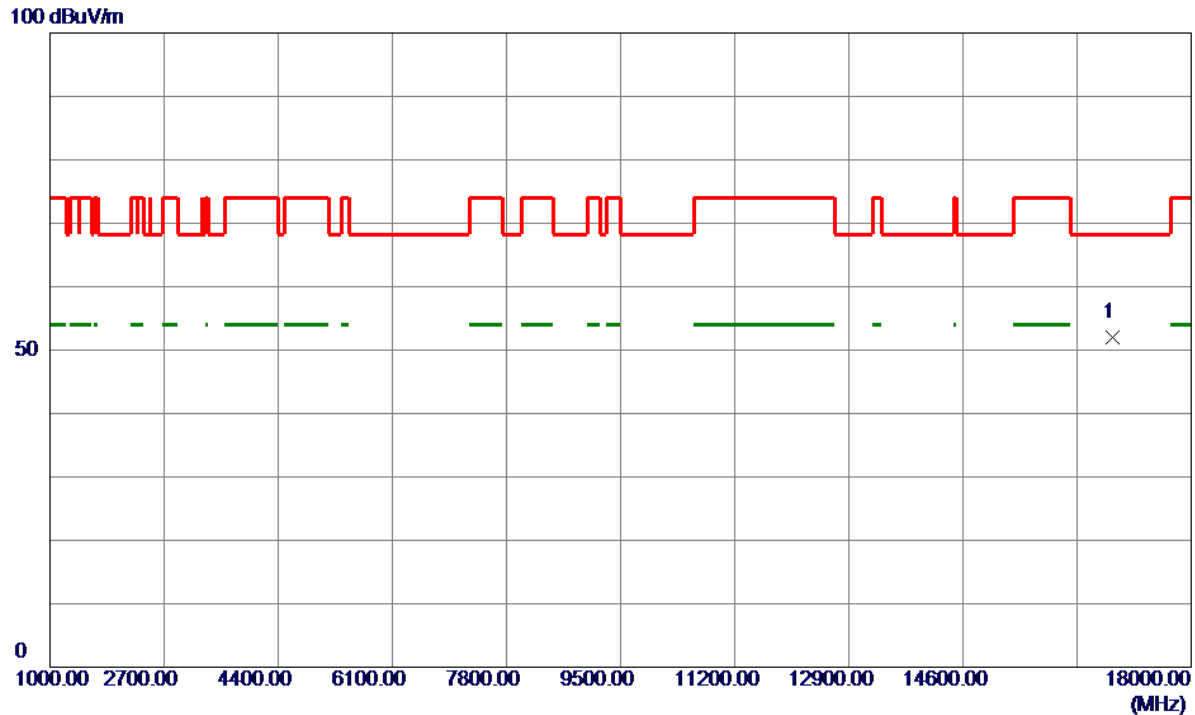


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16836.2000	40.72	11.31	52.03	68.20	-16.17	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Vertical
-----------	-------------------------------------	--------------	----------

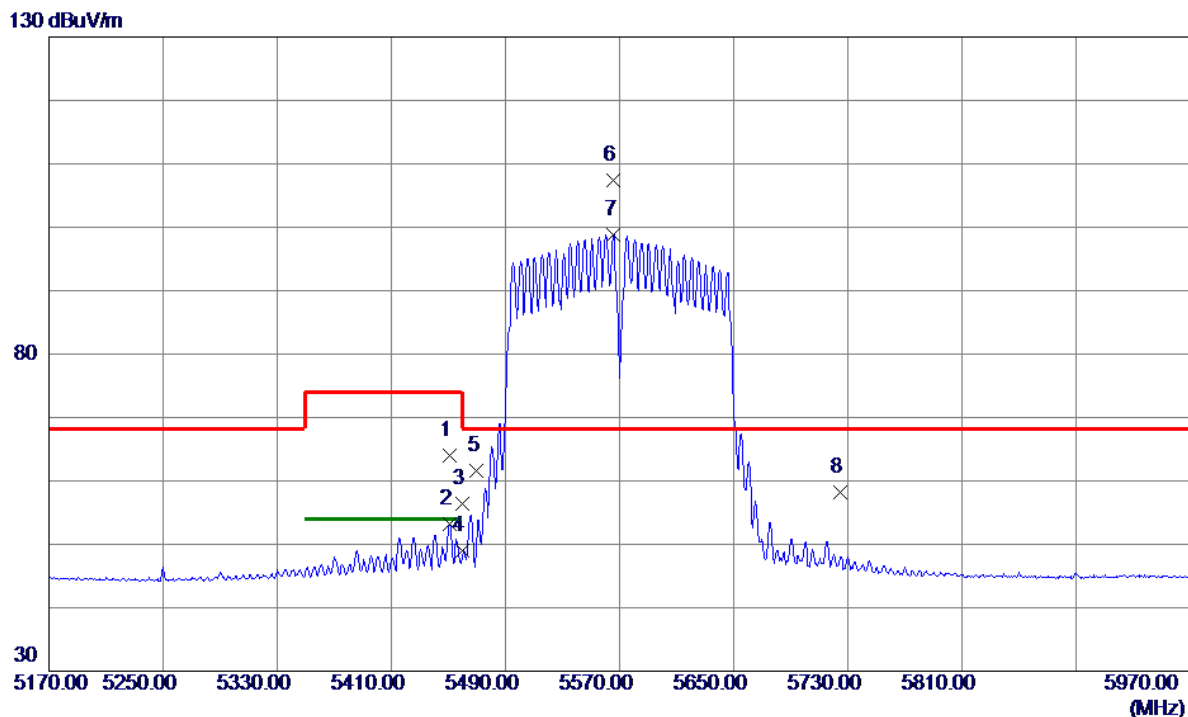


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5450.8000	49.65	14.28	63.93	74.00	-10.07	Peak	
2	5450.8000	38.99	14.28	53.27	54.00	-0.73	AVG	
3	5460.0000	42.19	14.28	56.47	74.00	-17.53	Peak	
4	5460.0000	34.73	14.28	49.01	54.00	-4.99	AVG	
5	5470.0000	47.25	14.28	61.53	68.20	-6.67	Peak	
6 *	5565.2000	92.91	14.42	107.33	68.20	39.13	Peak	No Limit
7	5566.0000	84.47	14.42	98.89	999.00	-900.11	AVG	No Limit
8	5725.0000	43.45	14.77	58.22	68.20	-9.98	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT160) Mode 5570 MHz	Polarization	Horizontal
-----------	-------------------------------------	--------------	------------

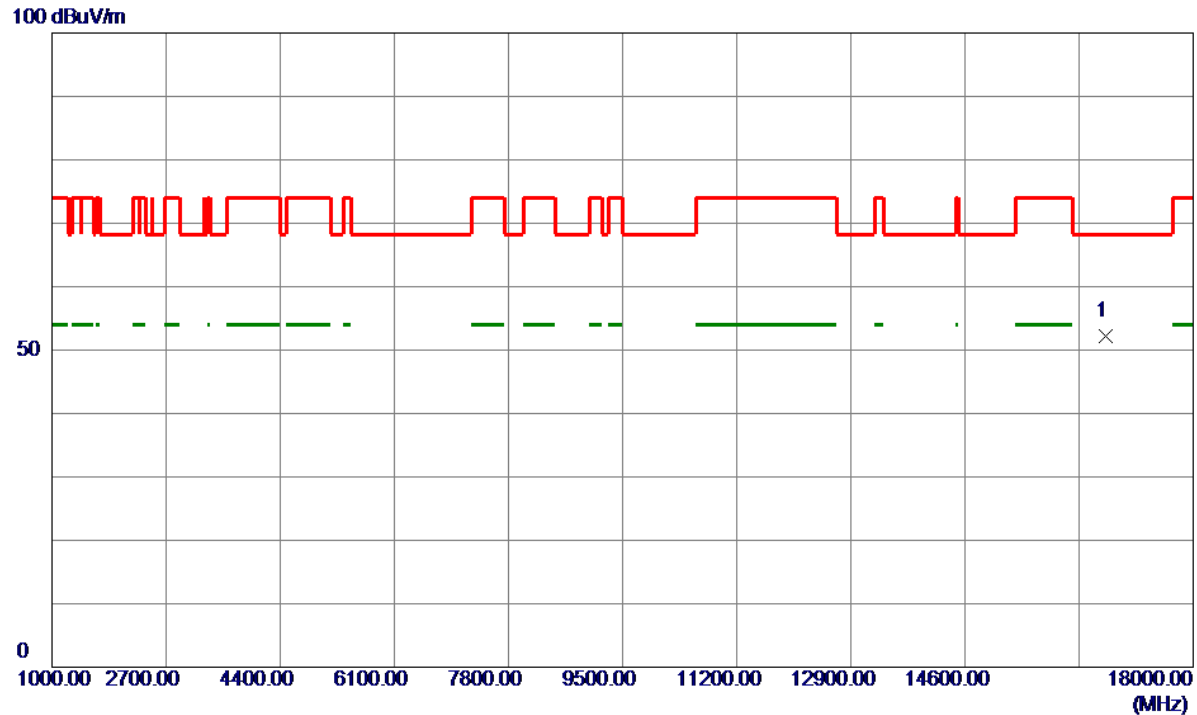


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16705.8200	40.91	11.33	52.24	68.20	-15.96	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

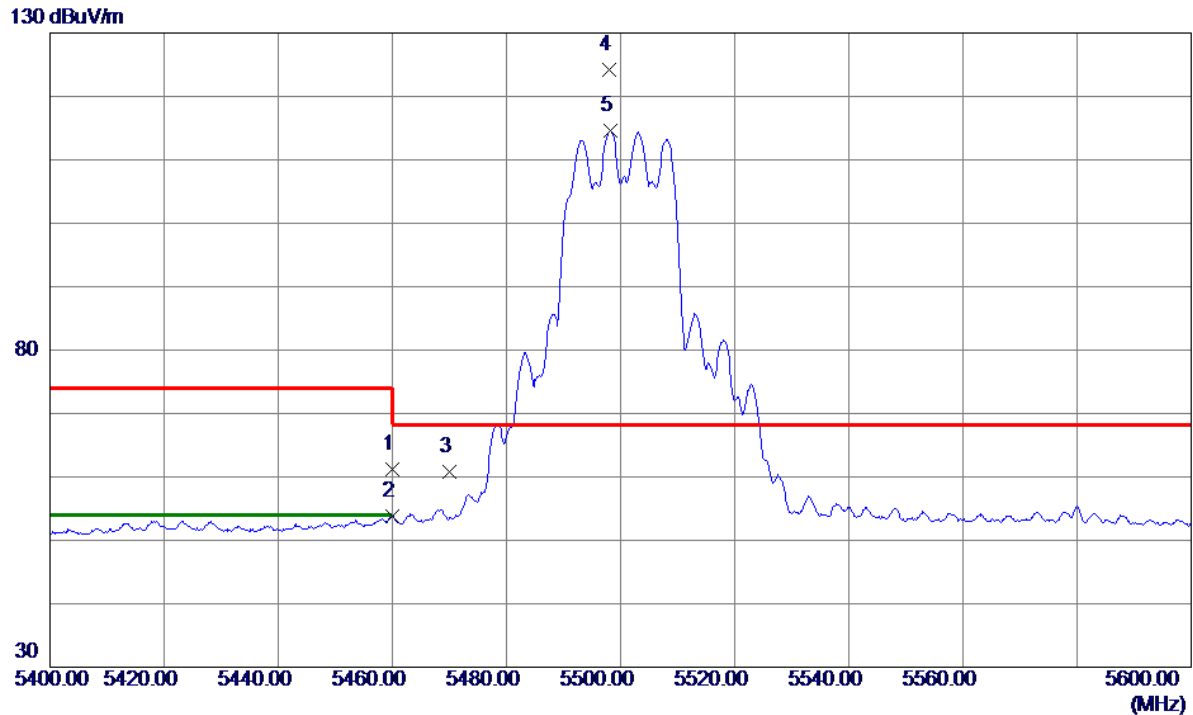


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	46.89	14.28	61.17	74.00	-12.83	Peak	
2	5460.0000	39.50	14.28	53.78	54.00	-0.22	AVG	
3	5470.0000	46.49	14.28	60.77	68.20	-7.43	Peak	
4 *	5498.0000	110.01	14.28	124.29	68.20	56.09	Peak	No Limit
5	5498.2000	100.33	14.28	114.61	999.00	-884.39	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

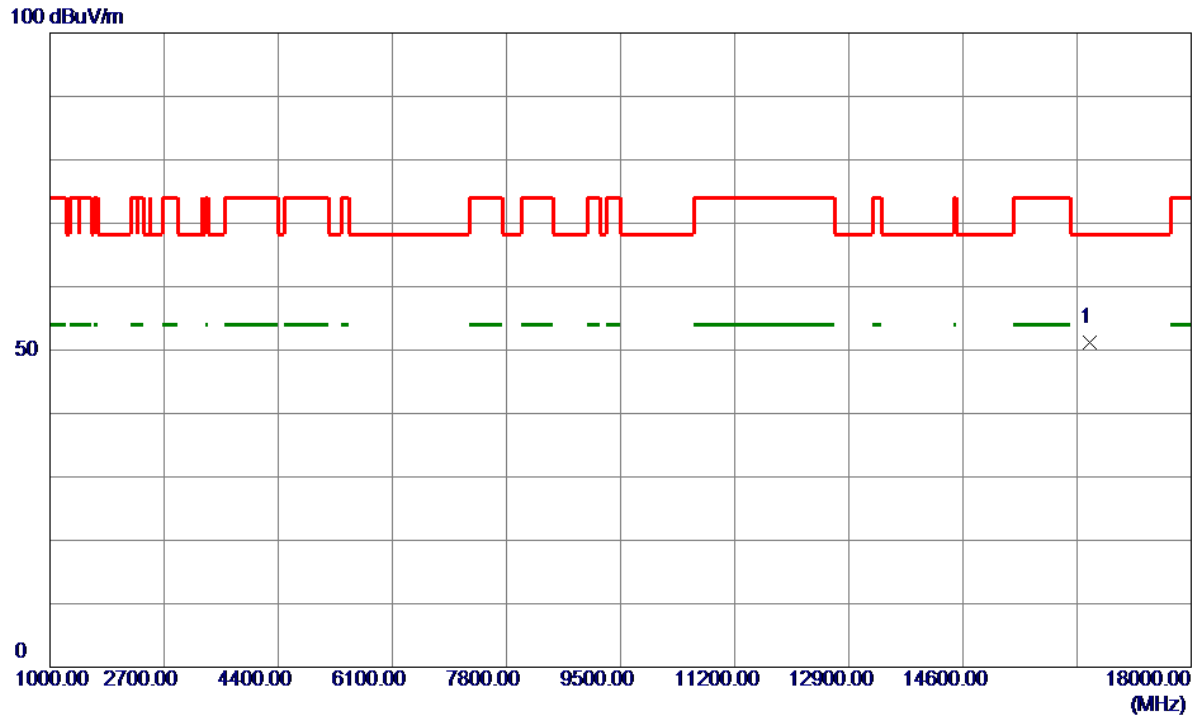


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16495.6000	39.92	11.36	51.28	68.20	-16.92	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

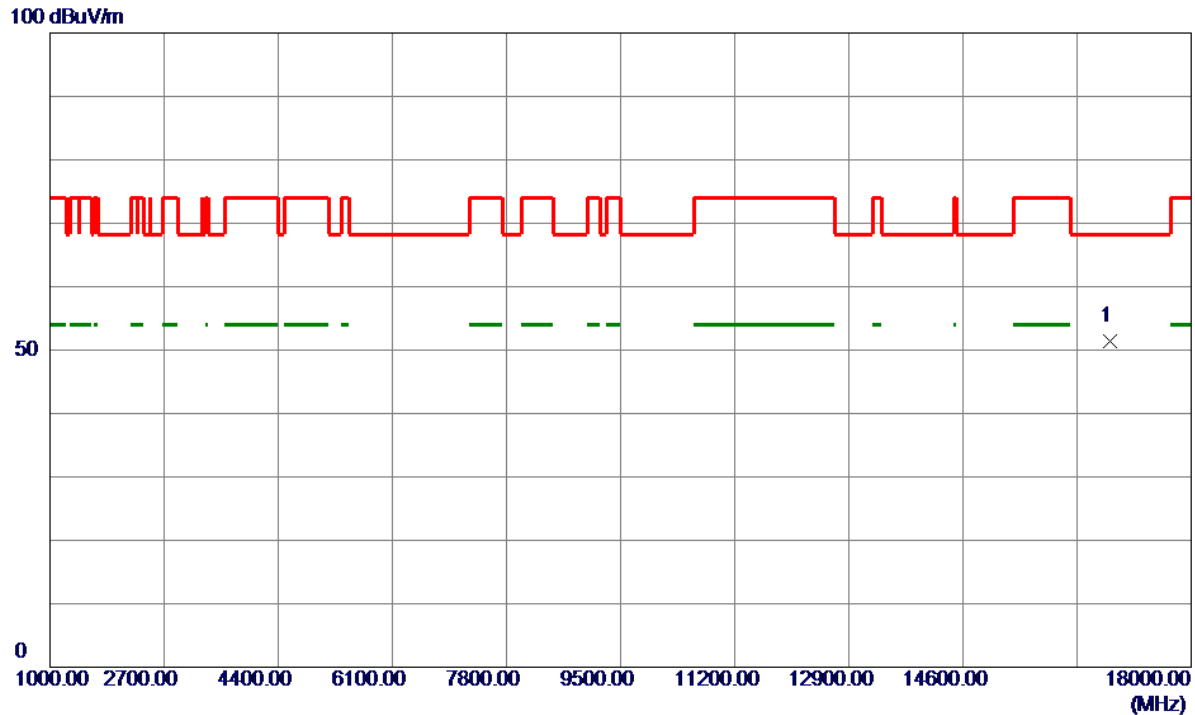


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16788.0000	40.16	11.32	51.48	68.20	-16.72	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

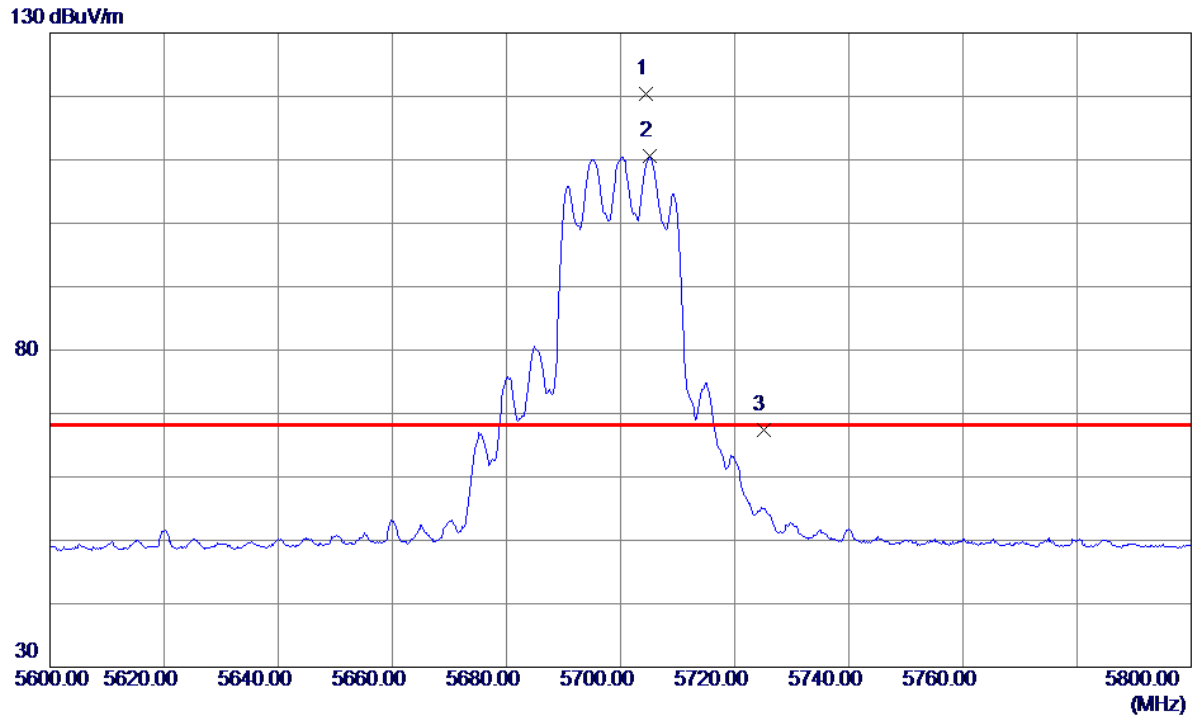


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5704.4000	105.69	14.73	120.42	68.20	52.22	Peak	No Limit
2	5705.2000	95.81	14.73	110.54	999.00	-888.46	AVG	No Limit
3	5725.0000	52.56	14.77	67.33	68.20	-0.87	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

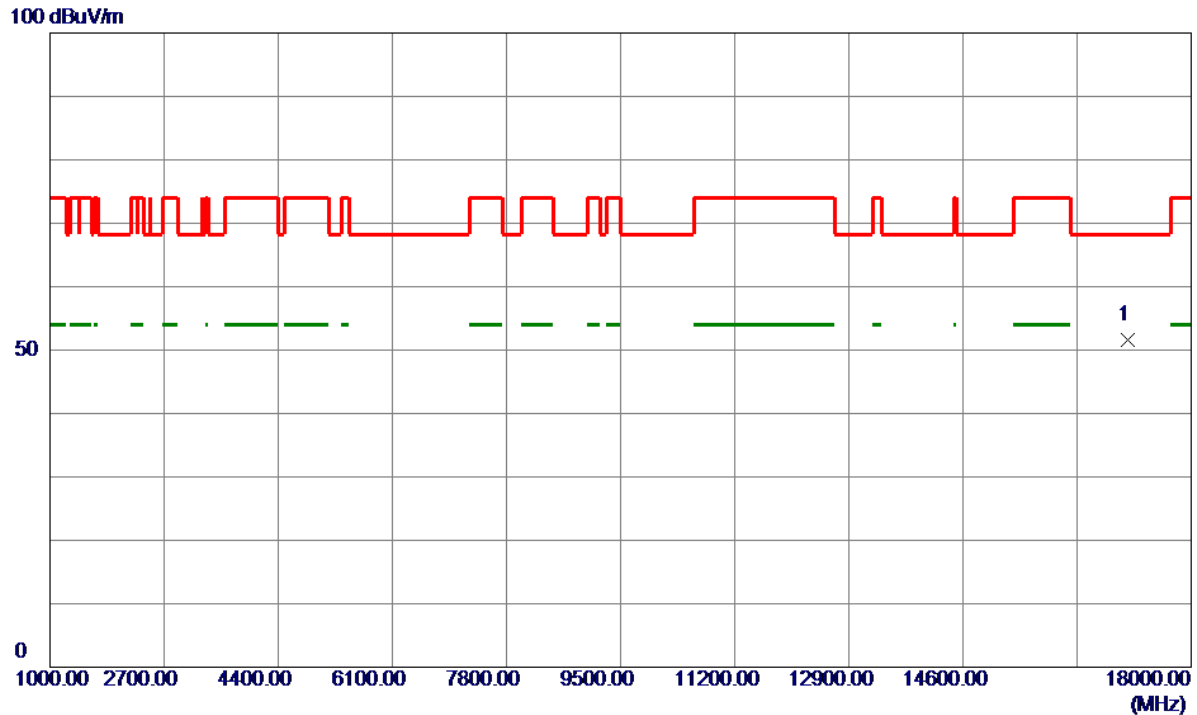


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17061.8000	40.36	11.18	51.54	68.20	-16.66	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

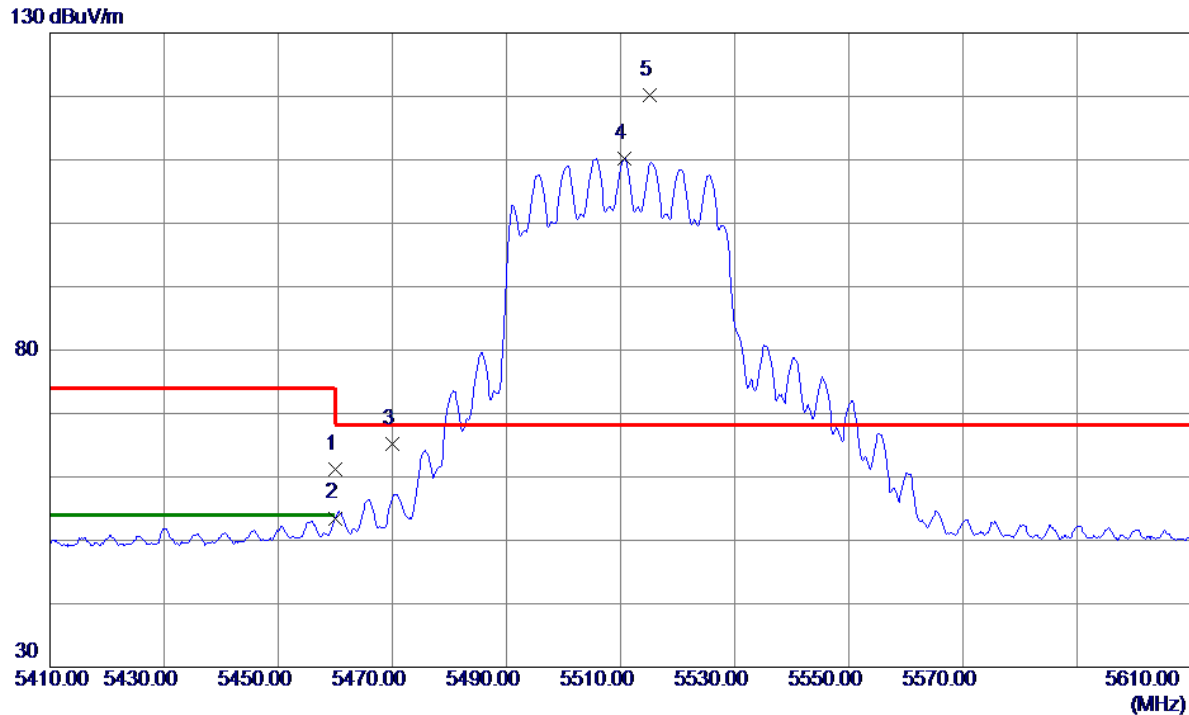


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	46.98	14.28	61.26	74.00	-12.74	Peak	
2	5460.0000	39.22	14.28	53.50	54.00	-0.50	AVG	
3	5470.0000	50.98	14.28	65.26	68.20	-2.94	Peak	
4	5510.6000	95.94	14.30	110.24	999.00	-888.76	AVG	No Limit
5 *	5515.2000	105.81	14.31	120.12	68.20	51.92	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

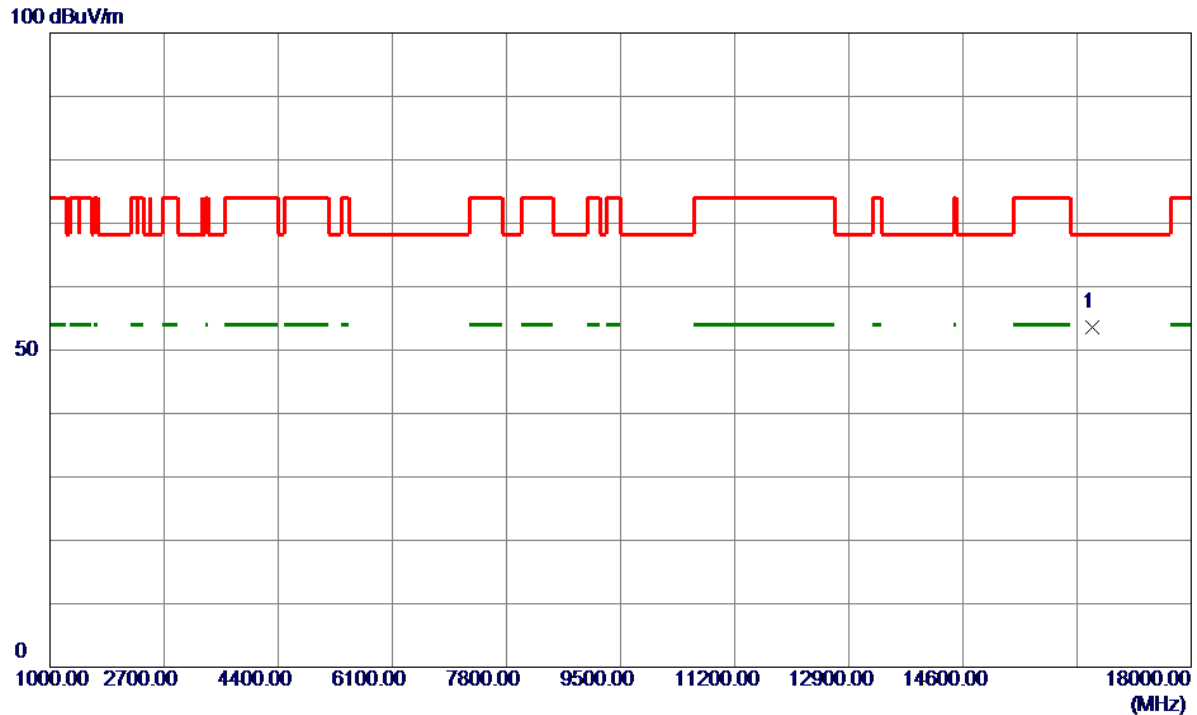


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16529.3859	42.29	11.36	53.65	68.20	-14.55	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

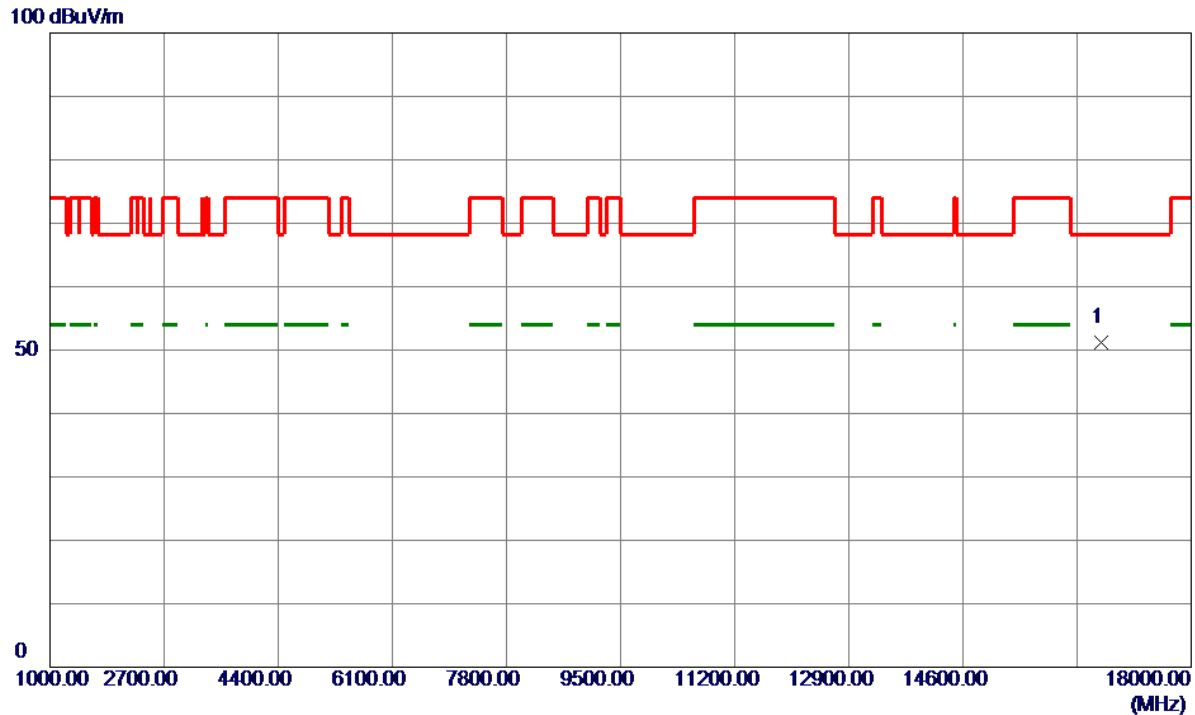


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16649.7000	39.85	11.34	51.19	68.20	-17.01	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

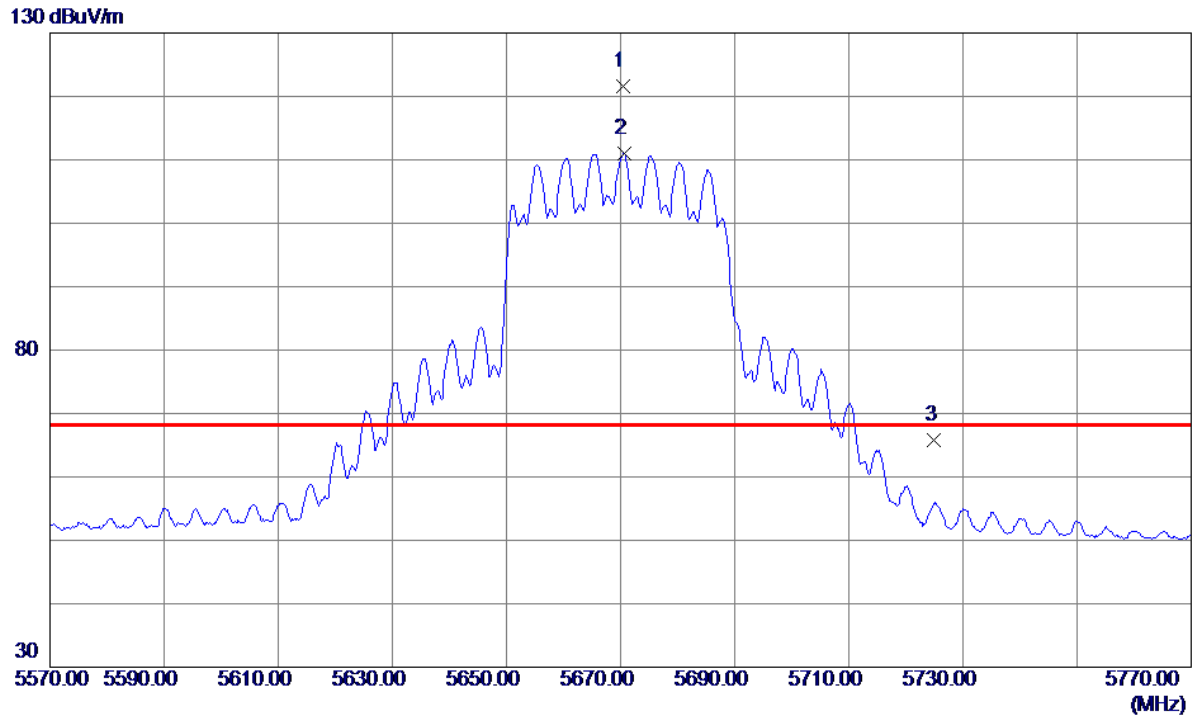


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5670.4000	106.97	14.65	121.62	68.20	53.42	Peak	No Limit
2	5670.6000	96.38	14.65	111.03	999.00	-887.97	AVG	No Limit
3	5725.0000	51.09	14.77	65.86	68.20	-2.34	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

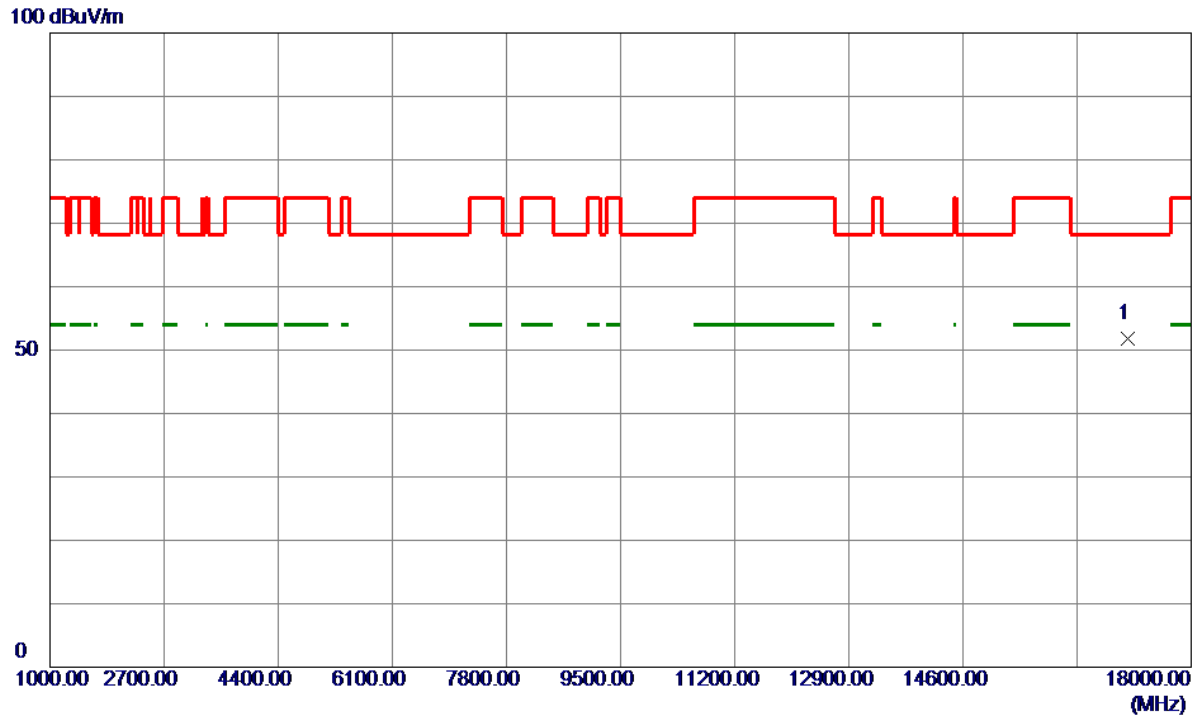


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17058.7000	40.65	11.18	51.83	68.20	-16.37	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

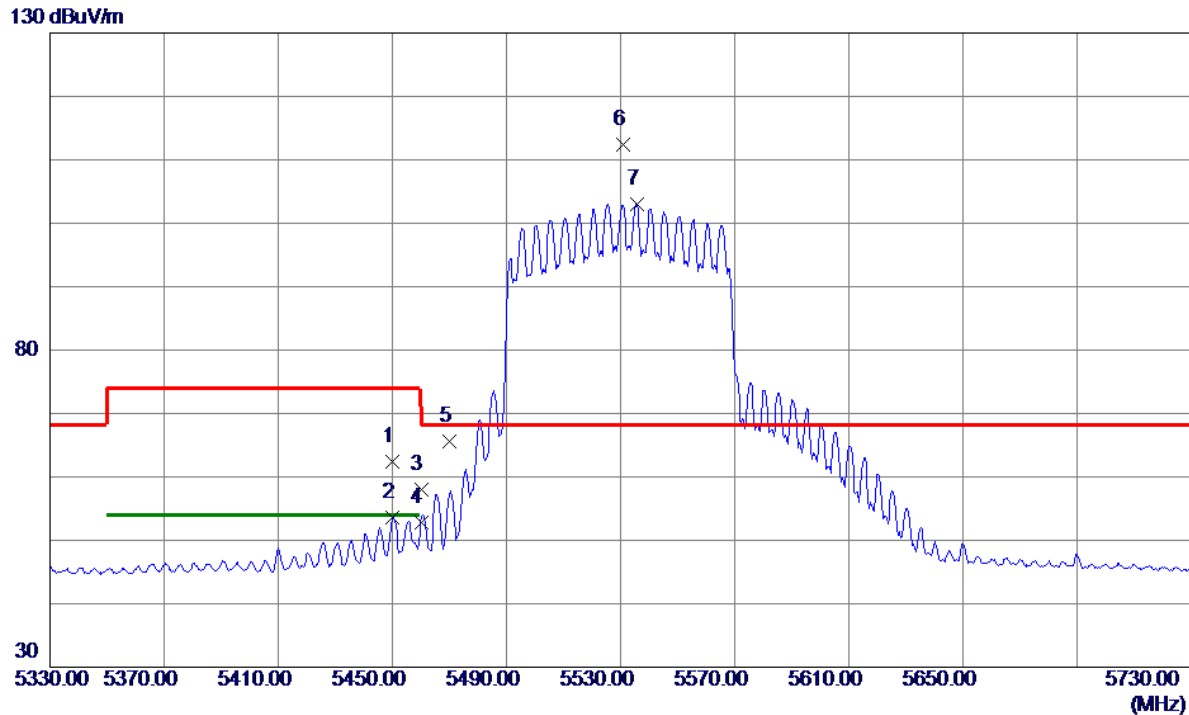


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5450.0000	48.20	14.28	62.48	74.00	-11.52	Peak	
2	5450.0000	39.27	14.28	53.55	54.00	-0.45	AVG	
3	5460.0000	43.68	14.28	57.96	74.00	-16.04	Peak	
4	5470.0000	38.60	14.28	52.88	54.00	-1.12	AVG	
5	5470.0000	51.39	14.28	65.67	68.20	-2.53	Peak	
6 *	5530.8000	98.14	14.35	112.49	68.20	44.29	Peak	No Limit
7	5535.6000	88.69	14.36	103.05	999.00	-895.95	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

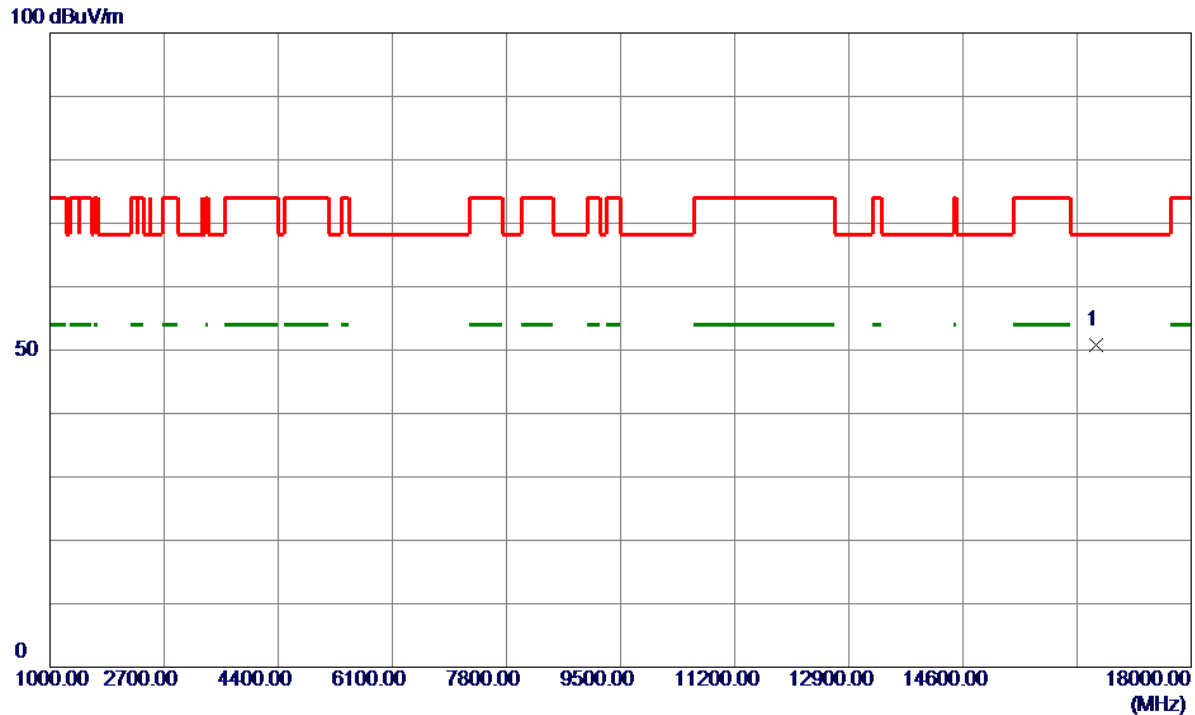


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16587.9500	39.44	11.35	50.79	68.20	-17.41	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

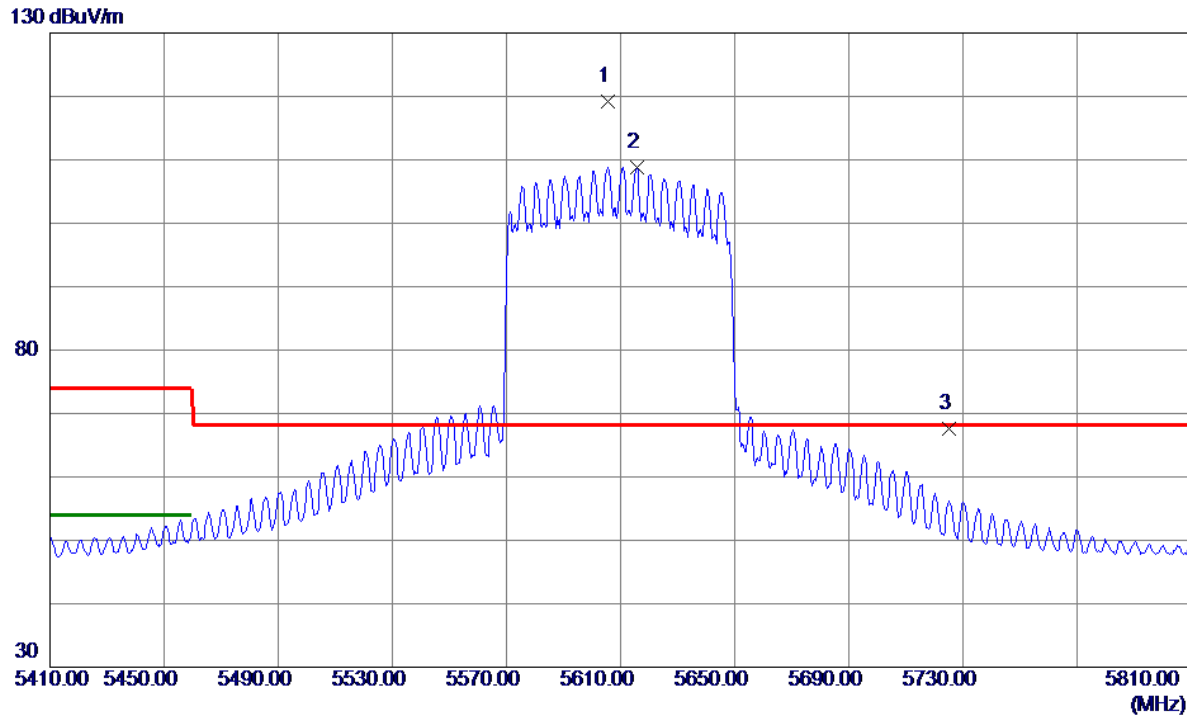


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5605.6000	104.69	14.51	119.20	68.20	51.00	Peak	No Limit
2	5615.6000	94.23	14.53	108.76	999.00	-890.24	AVG	No Limit
3	5725.0000	52.78	14.77	67.55	68.20	-0.65	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

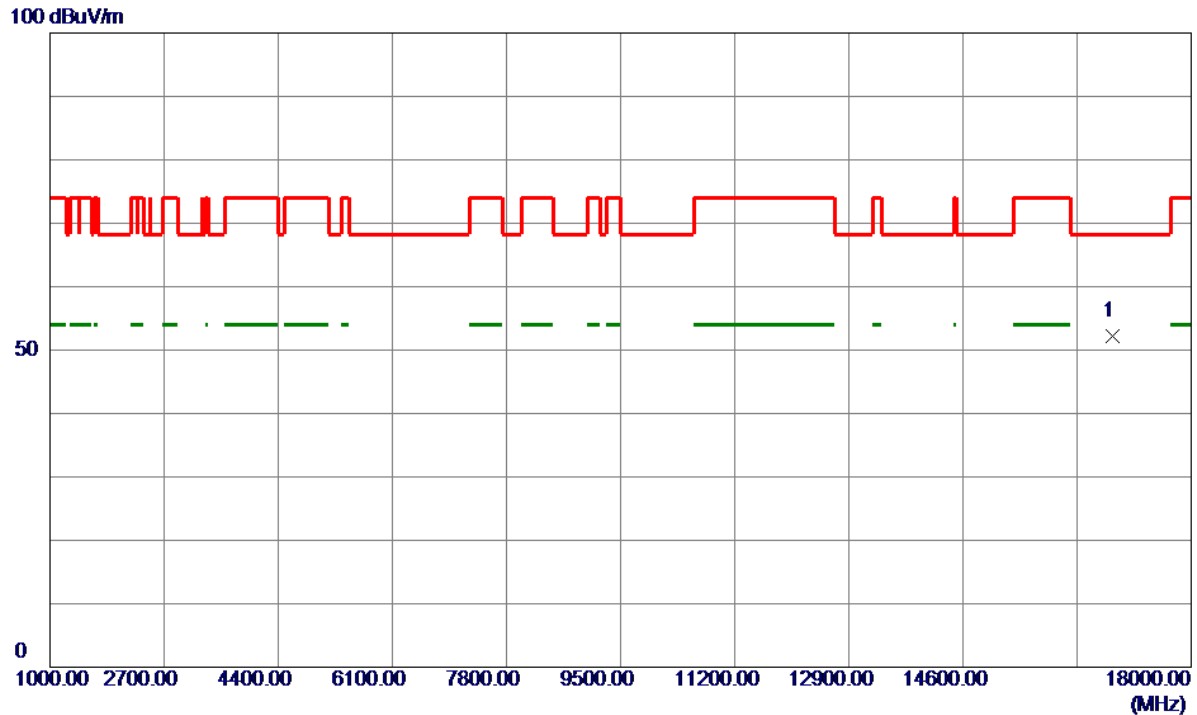


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16833.5300	40.84	11.31	52.15	68.20	-16.05	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

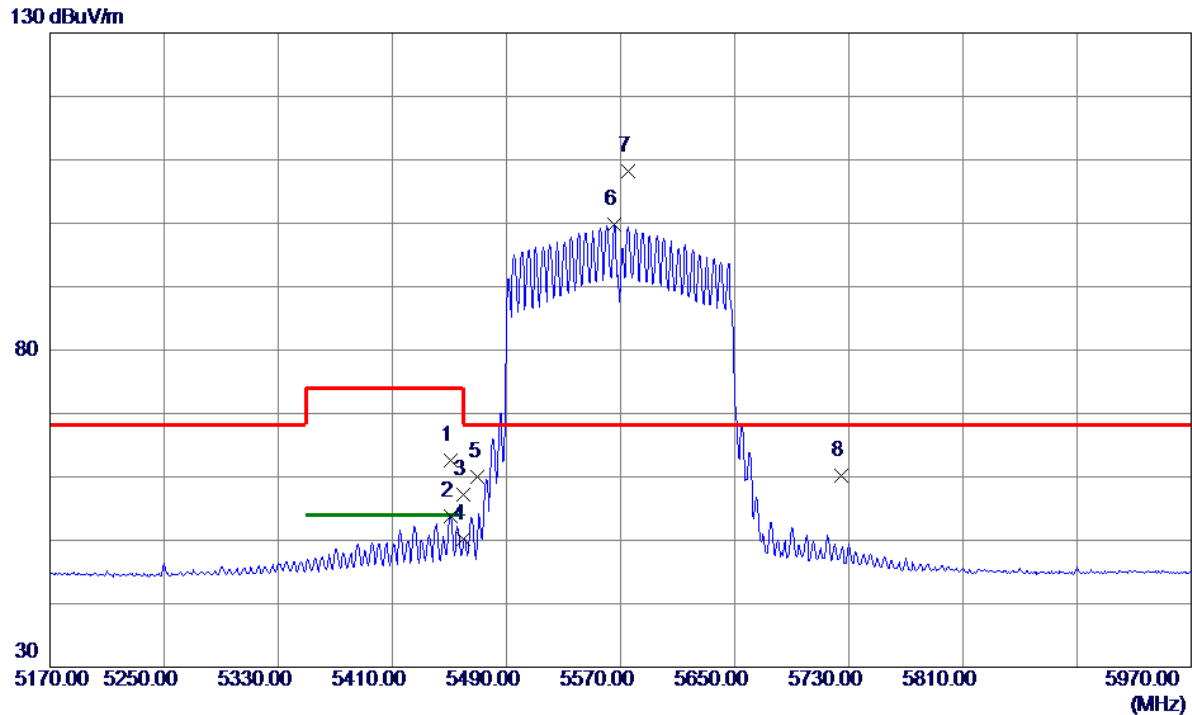


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5450.8000	48.39	14.28	62.67	74.00	-11.33	Peak	
2	5450.8000	39.56	14.28	53.84	54.00	-0.16	AVG	
3	5460.0000	42.95	14.28	57.23	74.00	-16.77	Peak	
4	5460.0000	35.97	14.28	50.25	54.00	-3.75	AVG	
5	5470.0000	45.73	14.28	60.01	68.20	-8.19	Peak	
6	5565.2000	85.40	14.42	99.82	999.00	-899.18	AVG	No Limit
7 *	5575.6000	93.72	14.44	108.16	68.20	39.96	Peak	No Limit
8	5725.0000	45.42	14.77	60.19	68.20	-8.01	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AX(HE160) Mode 5570 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

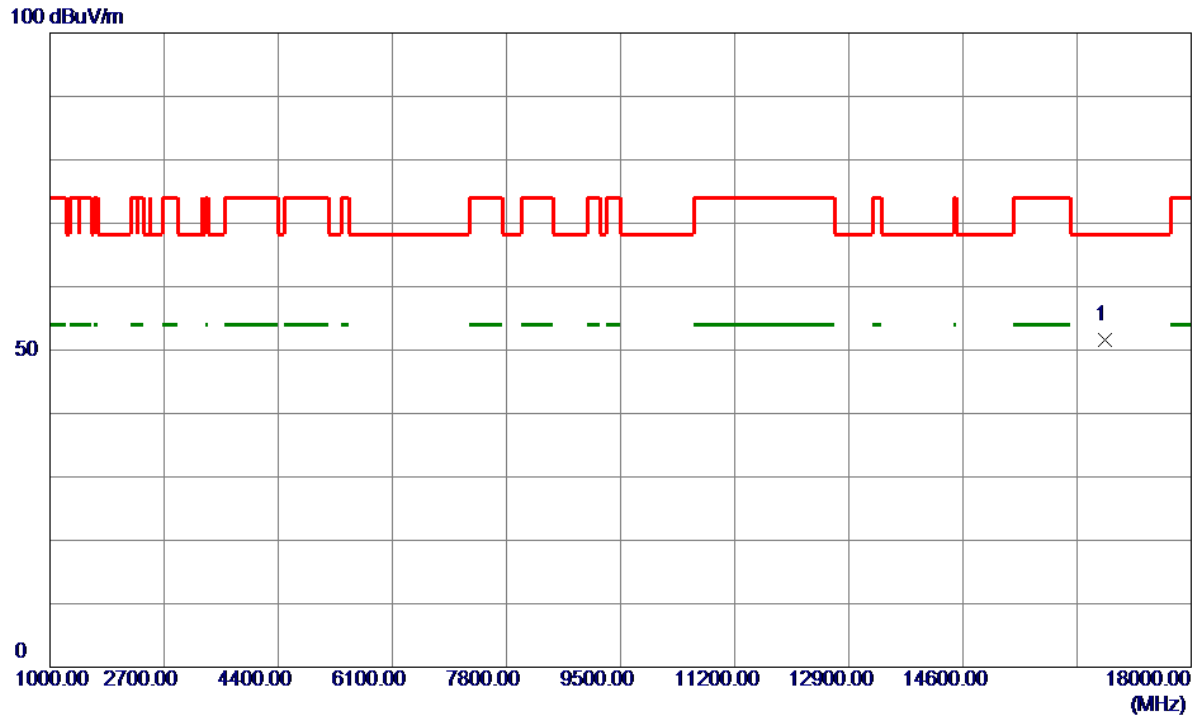


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16708.1300	40.33	11.33	51.66	68.20	-16.54	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

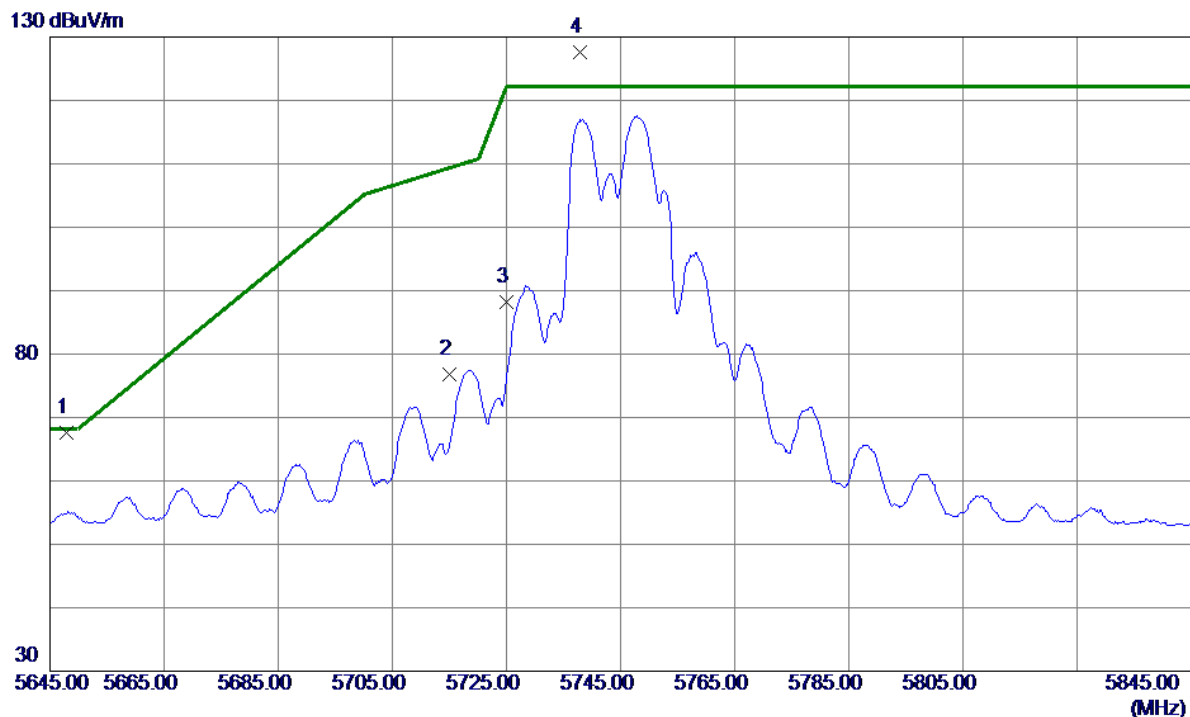


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5647.8000	53.03	14.60	67.63	68.20	-0.57	Peak	
2	5715.0000	62.14	14.75	76.89	109.40	-32.51	Peak	
3	5725.0000	73.48	14.77	88.25	122.20	-33.95	Peak	
4 *	5737.8000	112.75	14.80	127.55	122.20	5.35	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

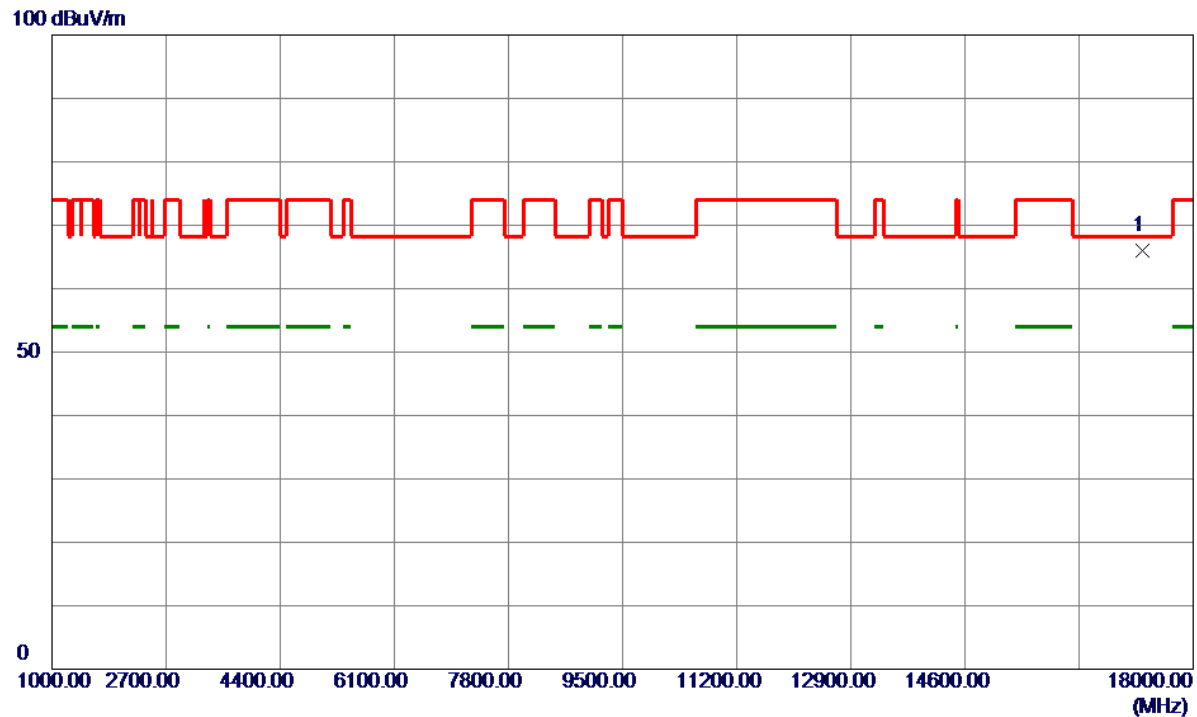


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17238.4000	55.24	10.86	66.10	68.20	-2.10	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

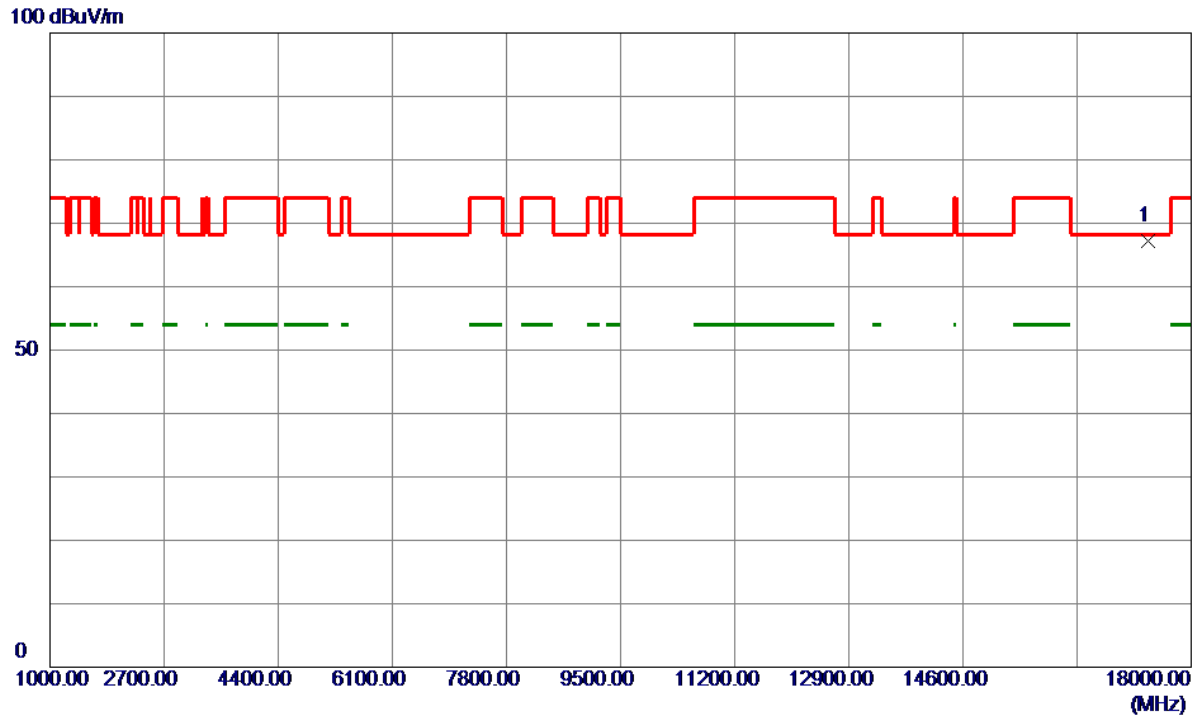


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17358.7500	56.65	10.64	67.29	68.20	-0.91	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

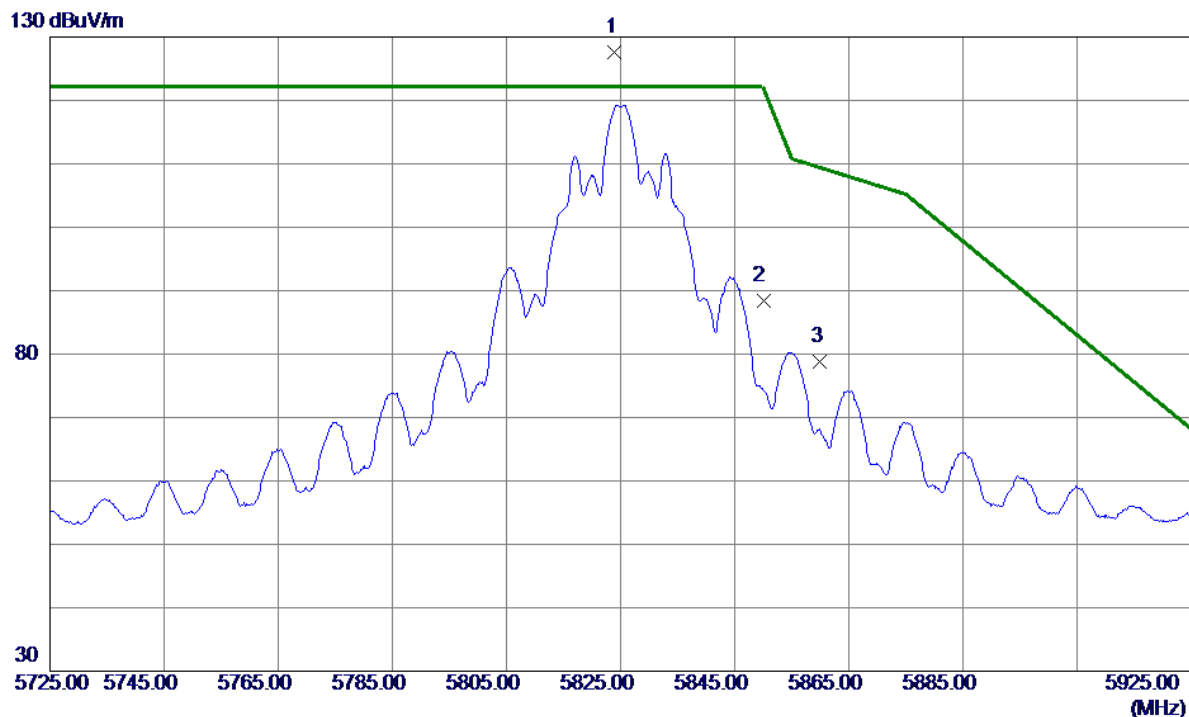


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.0000	112.64	14.99	127.63	122.20	5.43	Peak	No Limit
2	5850.0000	73.42	15.04	88.46	122.20	-33.74	Peak	
3	5860.0000	63.69	15.06	78.75	109.40	-30.65	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

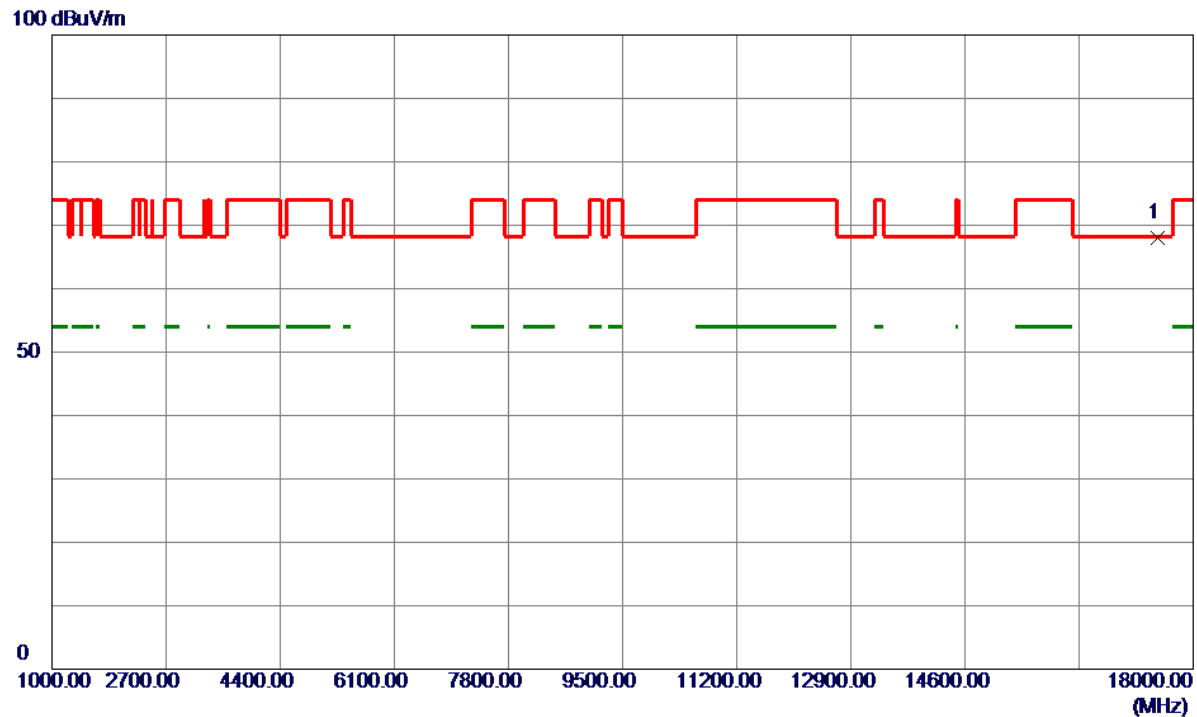


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17479.1500	57.62	10.42	68.04	68.20	-0.16	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

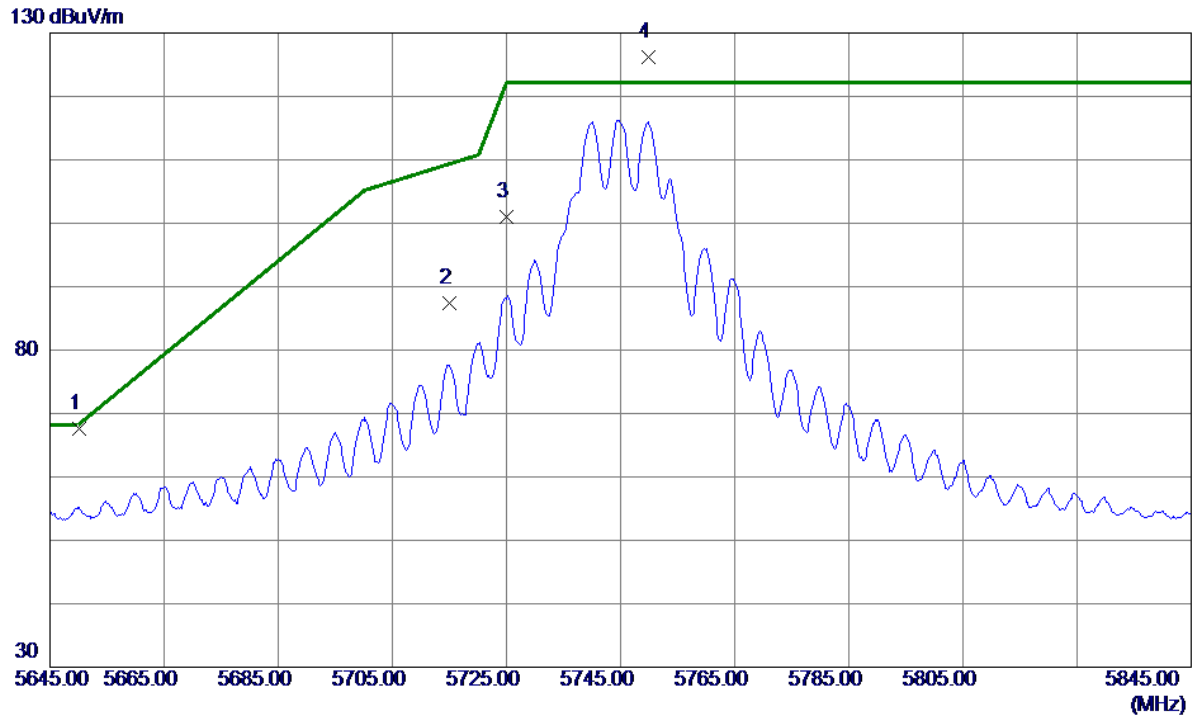


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5650.2000	53.05	14.61	67.66	68.35	-0.69	Peak	
2	5715.0000	72.69	14.75	87.44	109.40	-21.96	Peak	
3	5725.0000	86.15	14.77	100.92	122.20	-21.28	Peak	
4 *	5749.8000	111.40	14.82	126.22	122.20	4.02	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5745 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

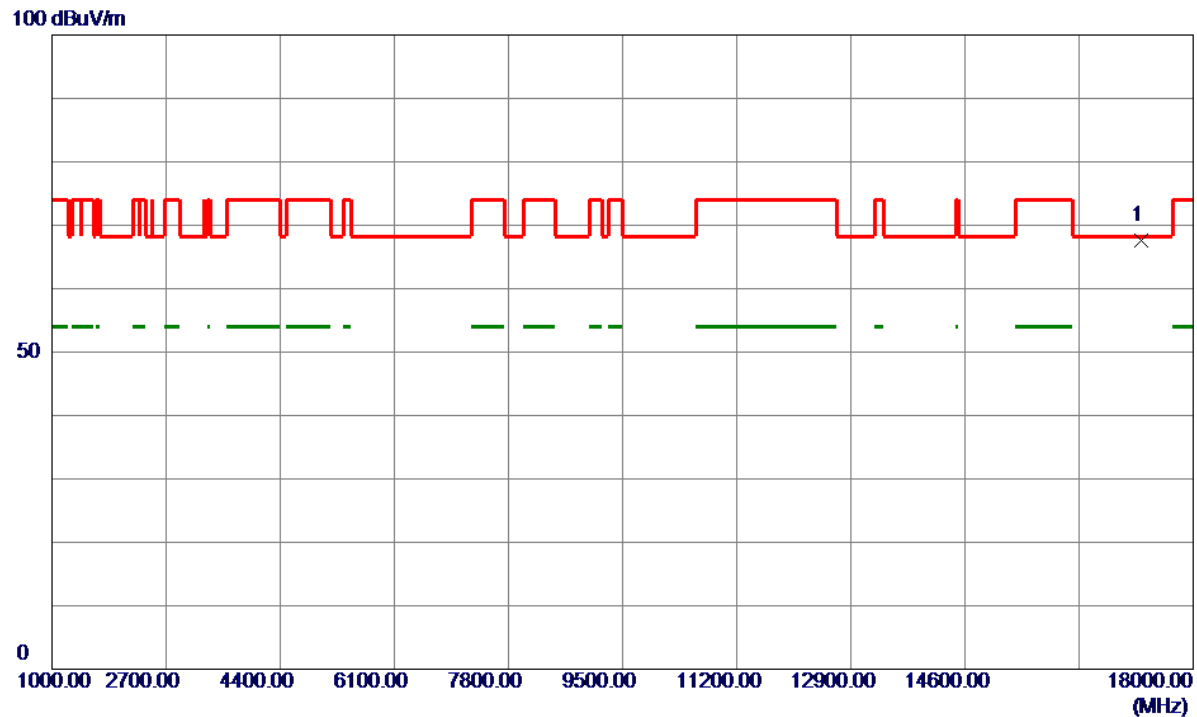


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17231.2000	56.67	10.87	67.54	68.20	-0.66	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5785 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

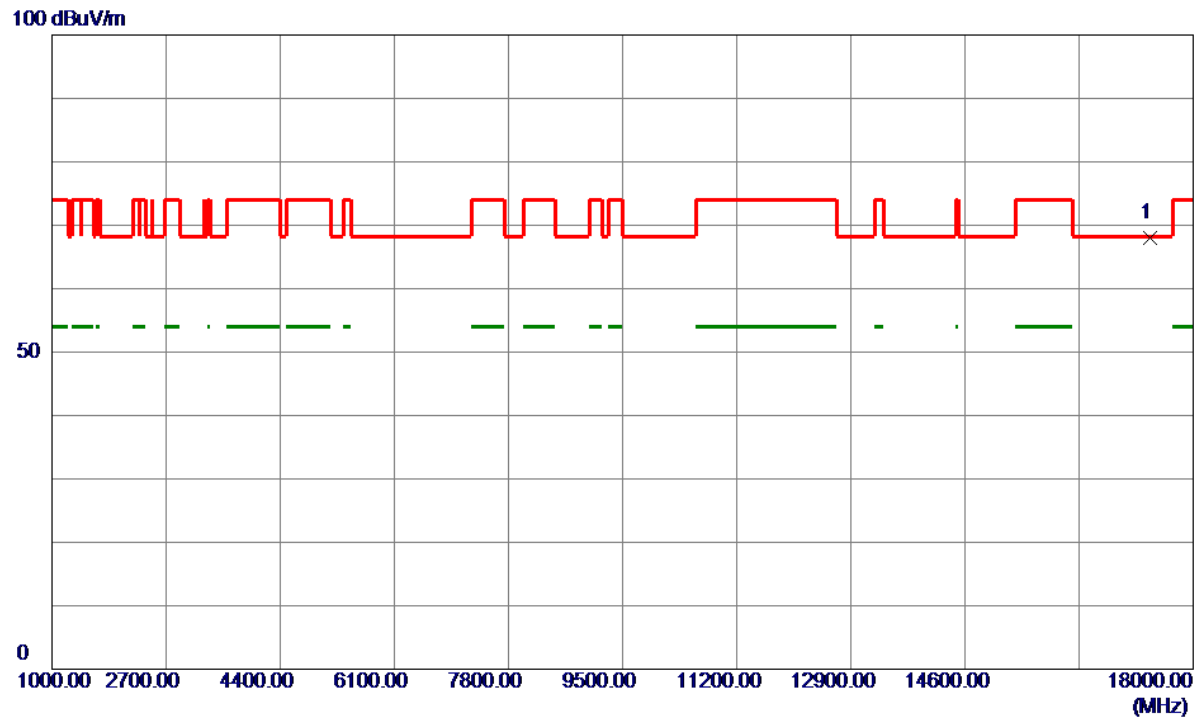


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17356.1000	57.27	10.64	67.91	68.20	-0.29	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

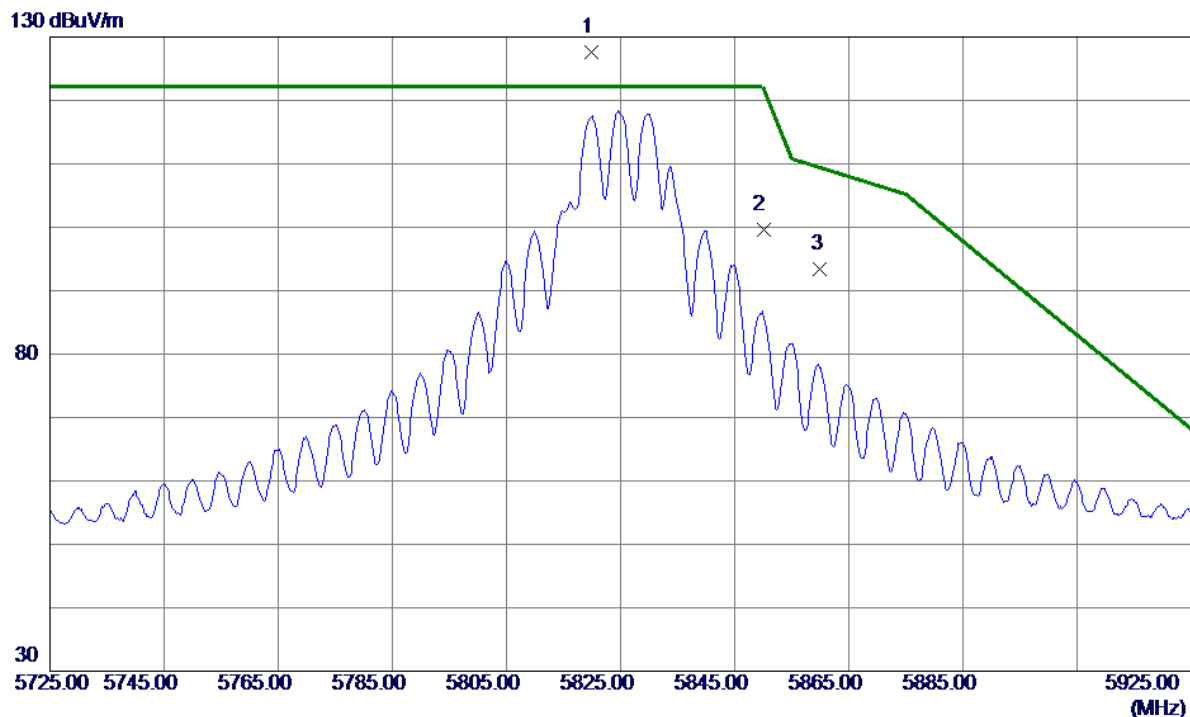


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5819.8000	112.54	14.98	127.52	122.20	5.32	Peak	No Limit
2	5850.0000	84.61	15.04	99.65	122.20	-22.55	Peak	
3	5860.0000	78.31	15.06	93.37	109.40	-16.03	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

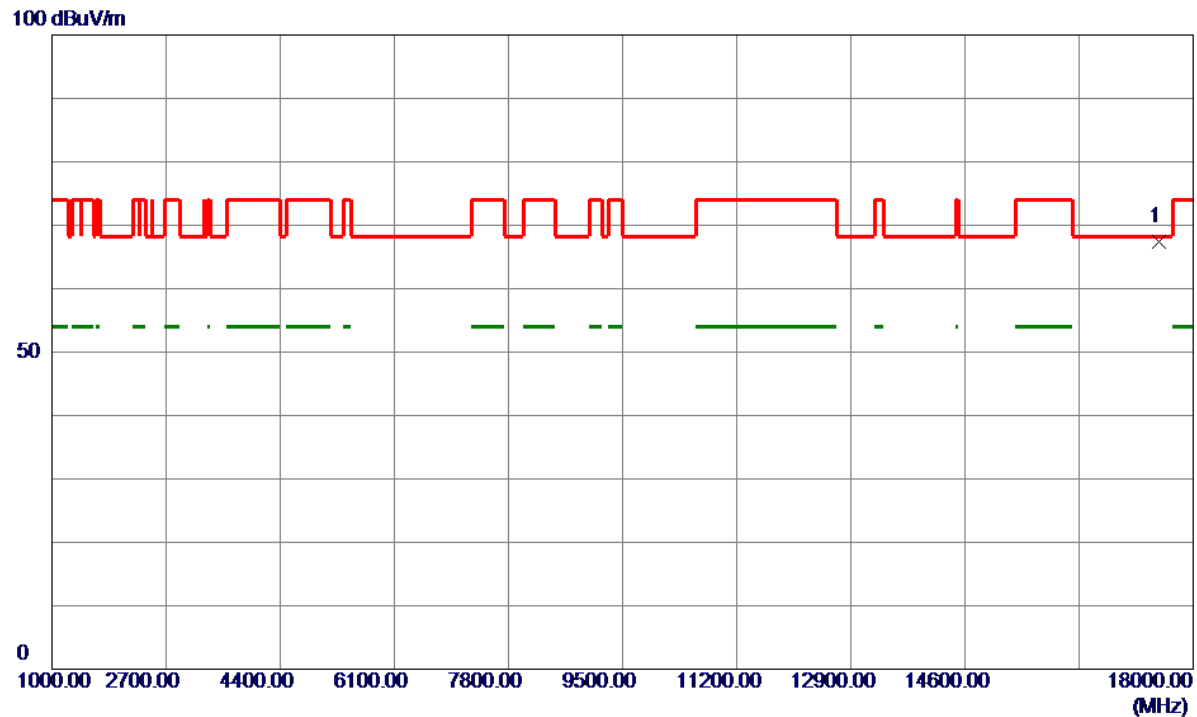


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17481.2500	57.02	10.41	67.43	68.20	-0.77	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

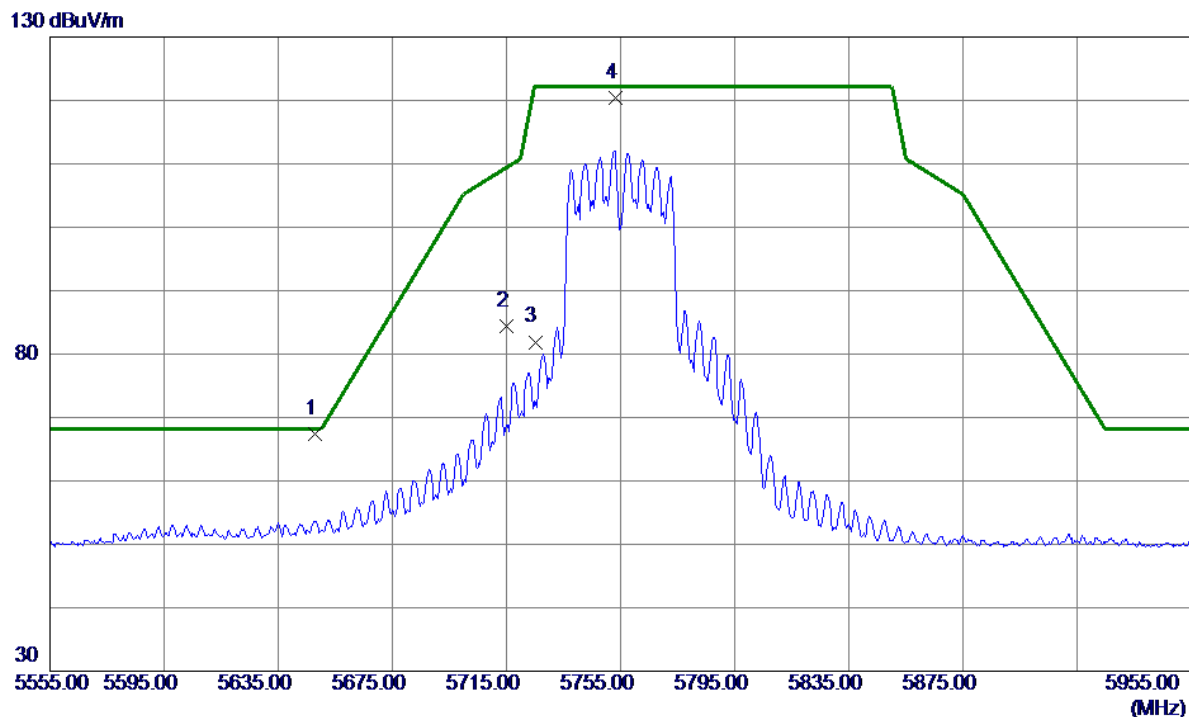


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5647.8000	52.88	14.60	67.48	68.20	-0.72	Peak	
2	5715.0000	69.74	14.75	84.49	109.40	-24.91	Peak	
3	5725.0000	67.13	14.77	81.90	122.20	-40.30	Peak	
4	5753.4000	105.63	14.83	120.46	122.20	-1.74	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

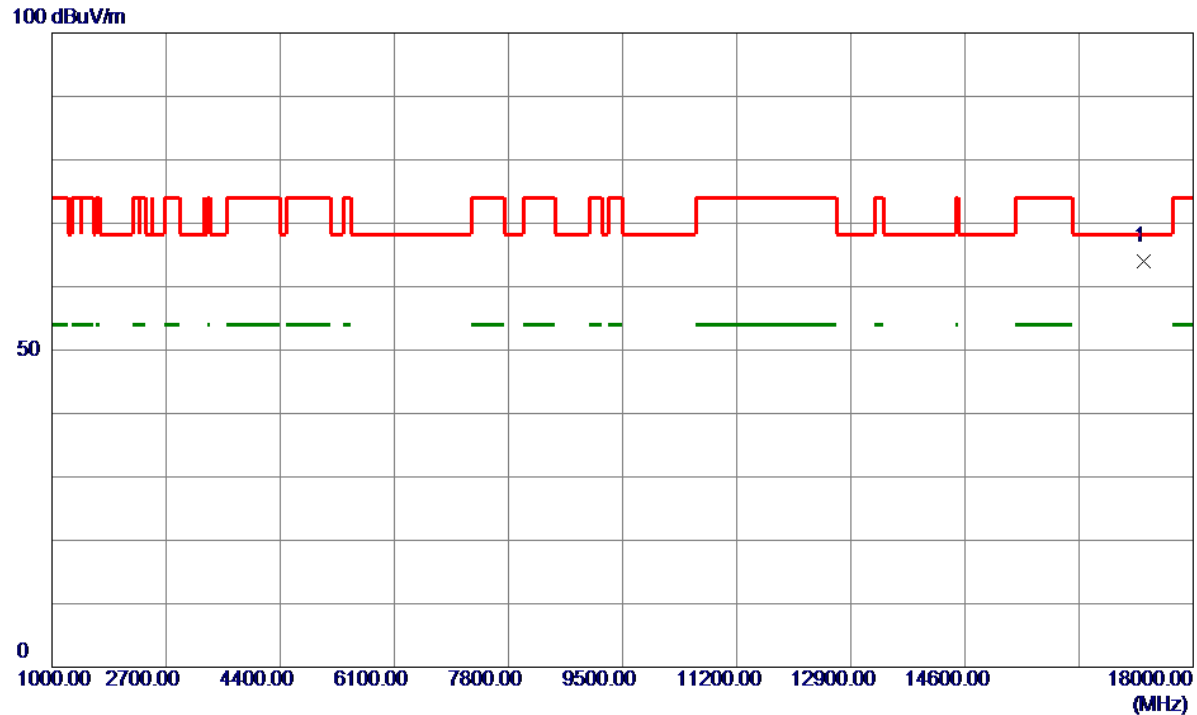


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17267.5000	53.15	10.80	63.95	68.20	-4.25	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

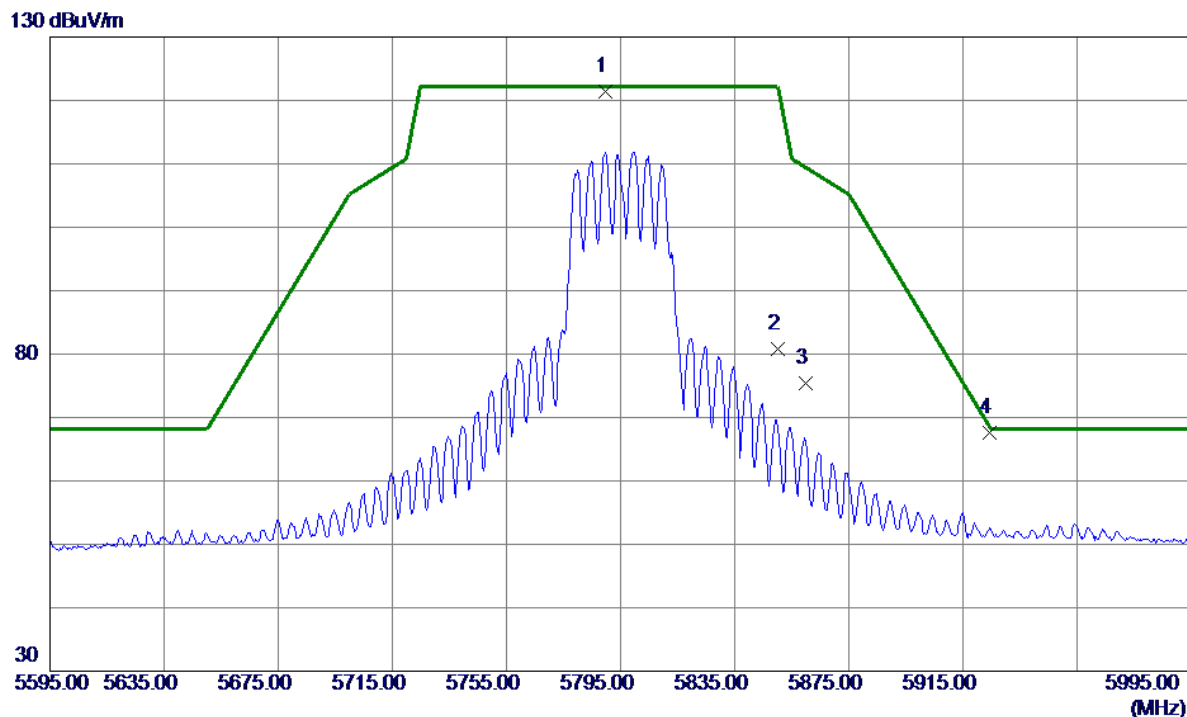


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5789.8000	106.51	14.91	121.42	122.20	-0.78	Peak	No Limit
2	5850.0000	65.85	15.04	80.89	122.20	-41.31	Peak	
3	5860.0000	60.42	15.06	75.48	109.40	-33.92	Peak	
4	5924.2000	52.34	15.20	67.54	68.79	-1.25	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

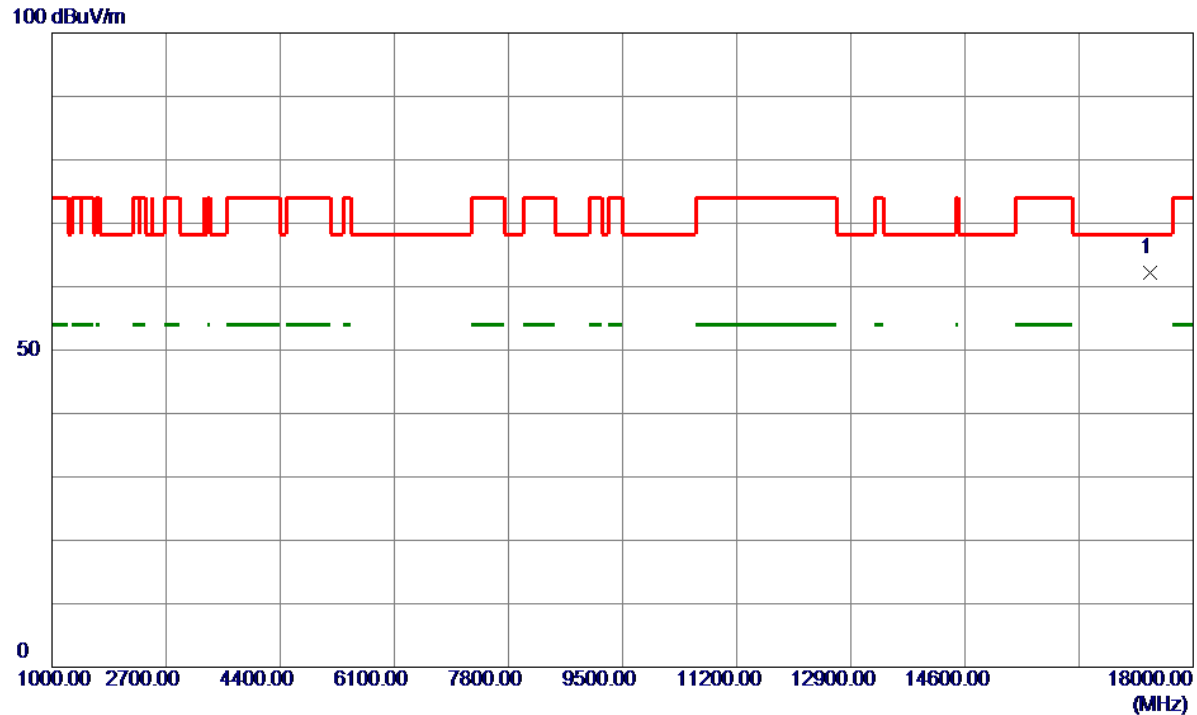


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17365.7000	51.60	10.62	62.22	68.20	-5.98	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

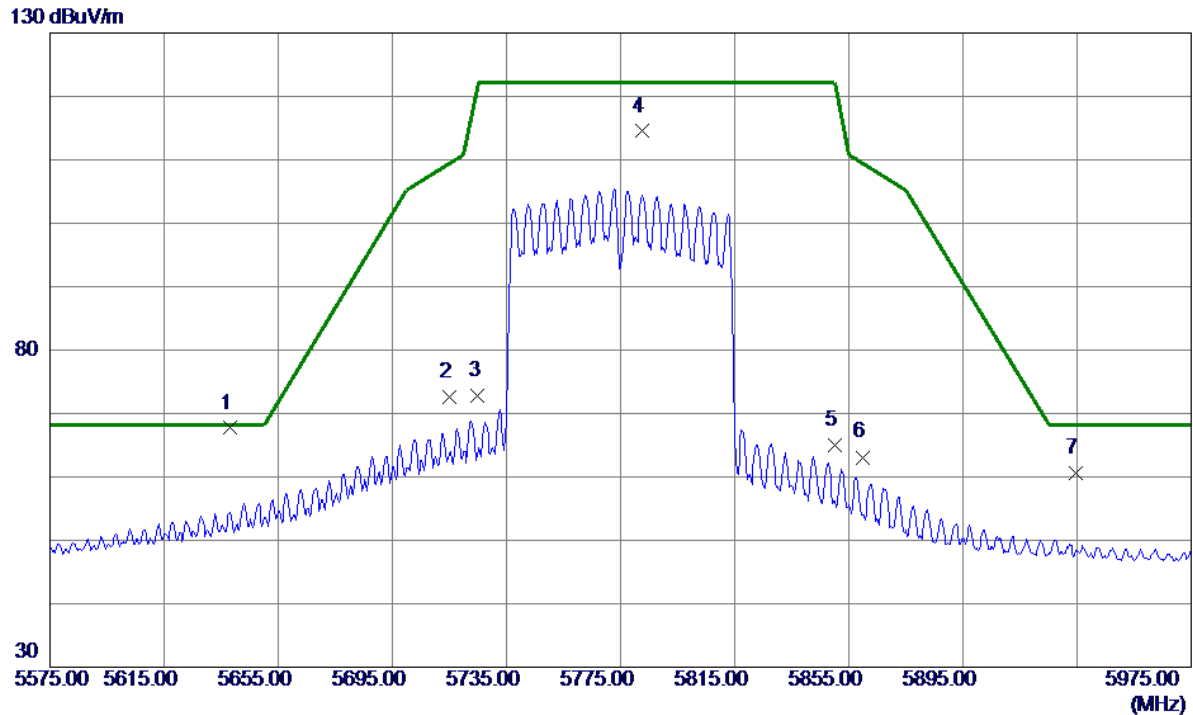


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5638.2000	53.12	14.58	67.70	68.20	-0.50	Peak	
2	5715.0000	57.90	14.75	72.65	109.40	-36.75	Peak	
3	5725.0000	57.94	14.77	72.71	122.20	-49.49	Peak	
4	5782.6000	99.60	14.90	114.50	122.20	-7.70	Peak	No Limit
5	5850.0000	49.90	15.04	64.94	122.20	-57.26	Peak	
6	5860.0000	48.04	15.06	63.10	109.40	-46.30	Peak	
7	5934.6000	45.40	15.23	60.63	68.20	-7.57	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

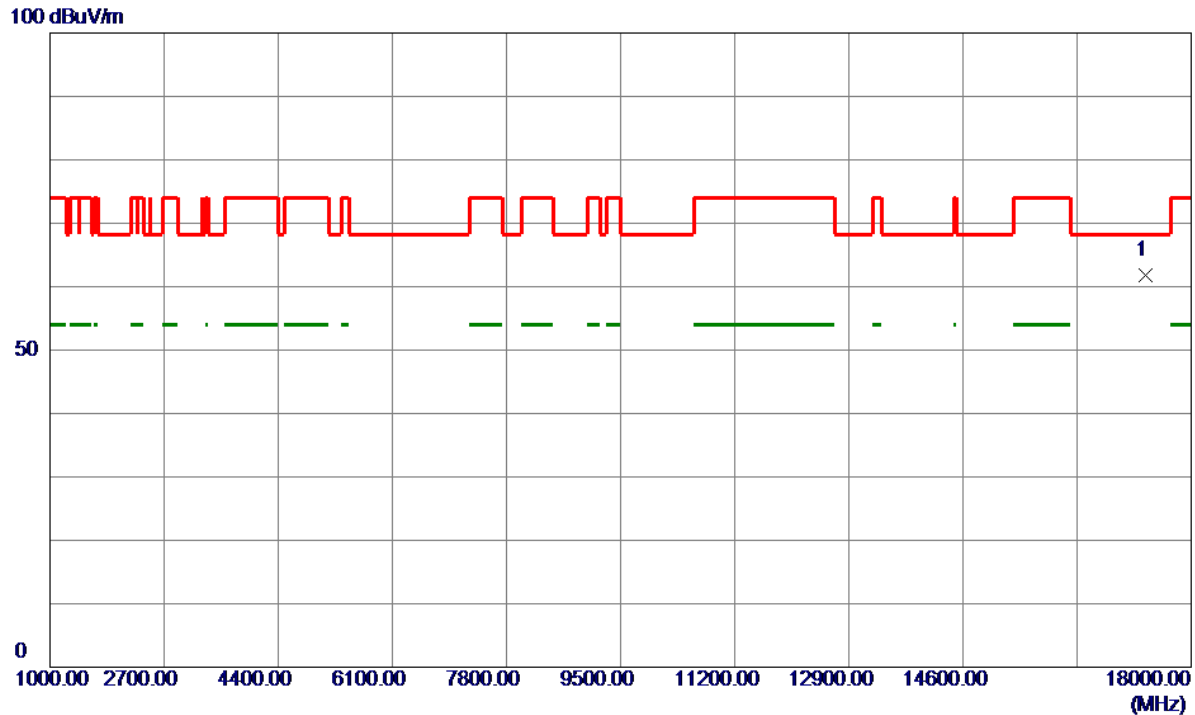


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17328.6000	51.08	10.69	61.77	68.20	-6.43	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

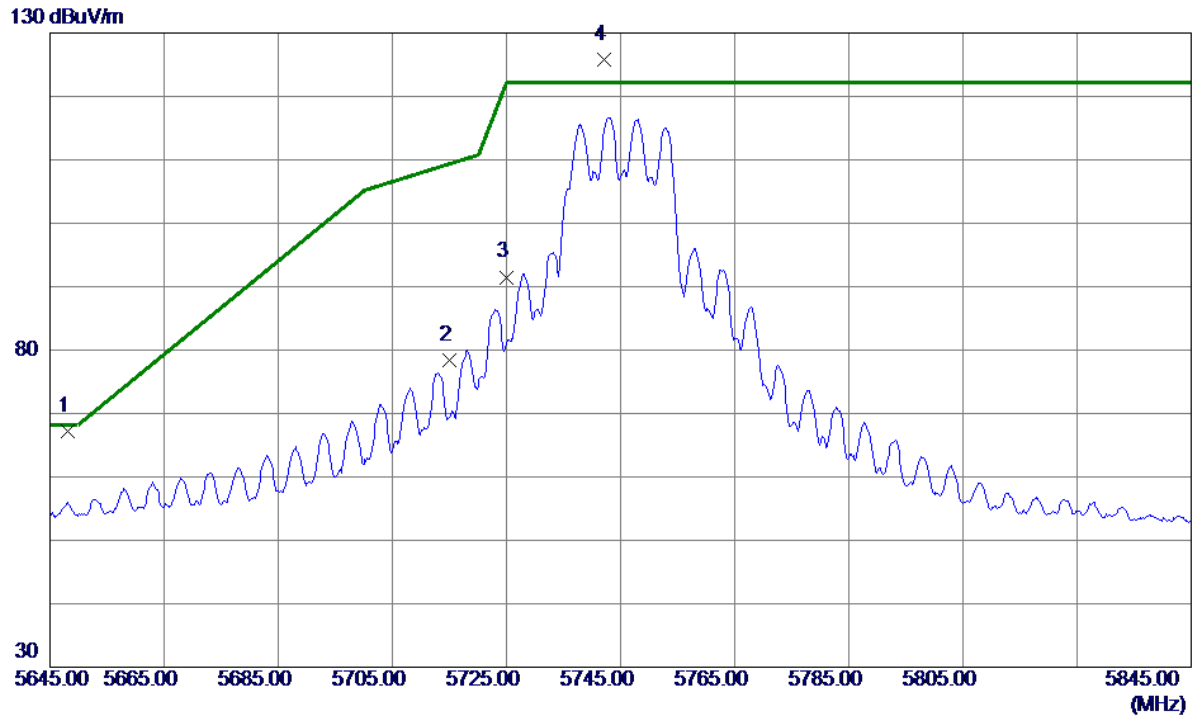


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.2000	52.67	14.60	67.27	68.20	-0.93	Peak	
2	5715.0000	63.67	14.75	78.42	109.40	-30.98	Peak	
3	5725.0000	76.73	14.77	91.50	122.20	-30.70	Peak	
4 *	5742.2000	110.97	14.81	125.78	122.20	3.58	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

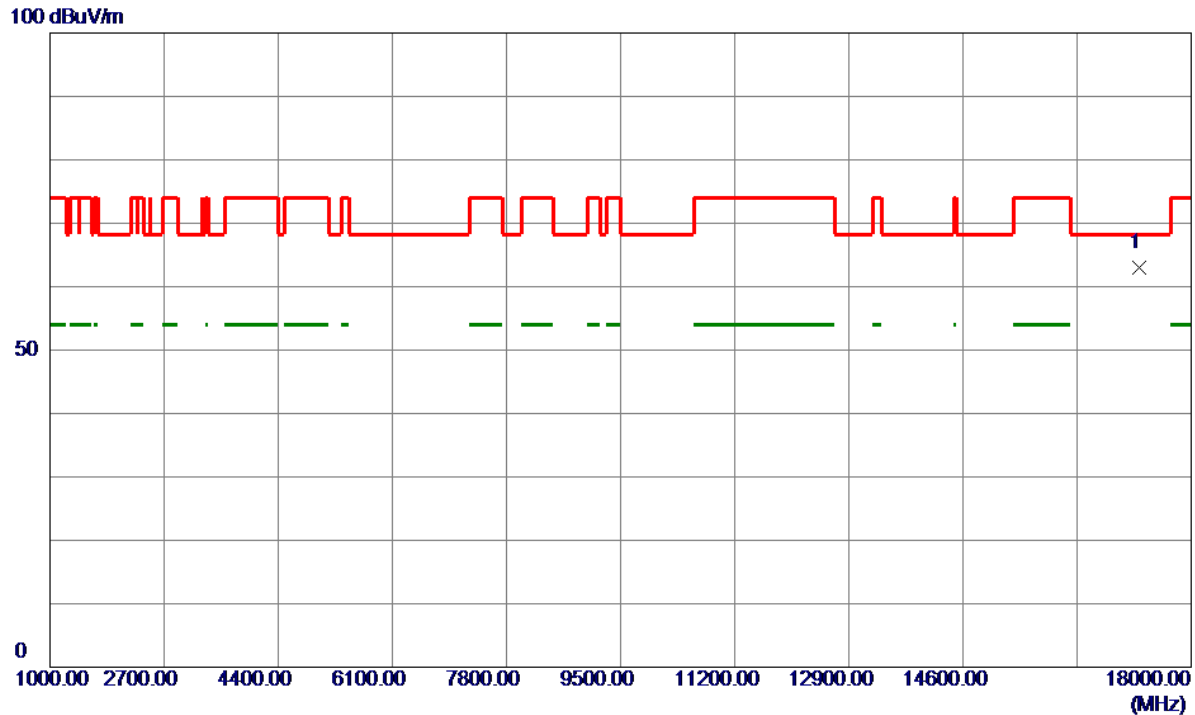


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17234.5000	52.08	10.86	62.94	68.20	-5.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

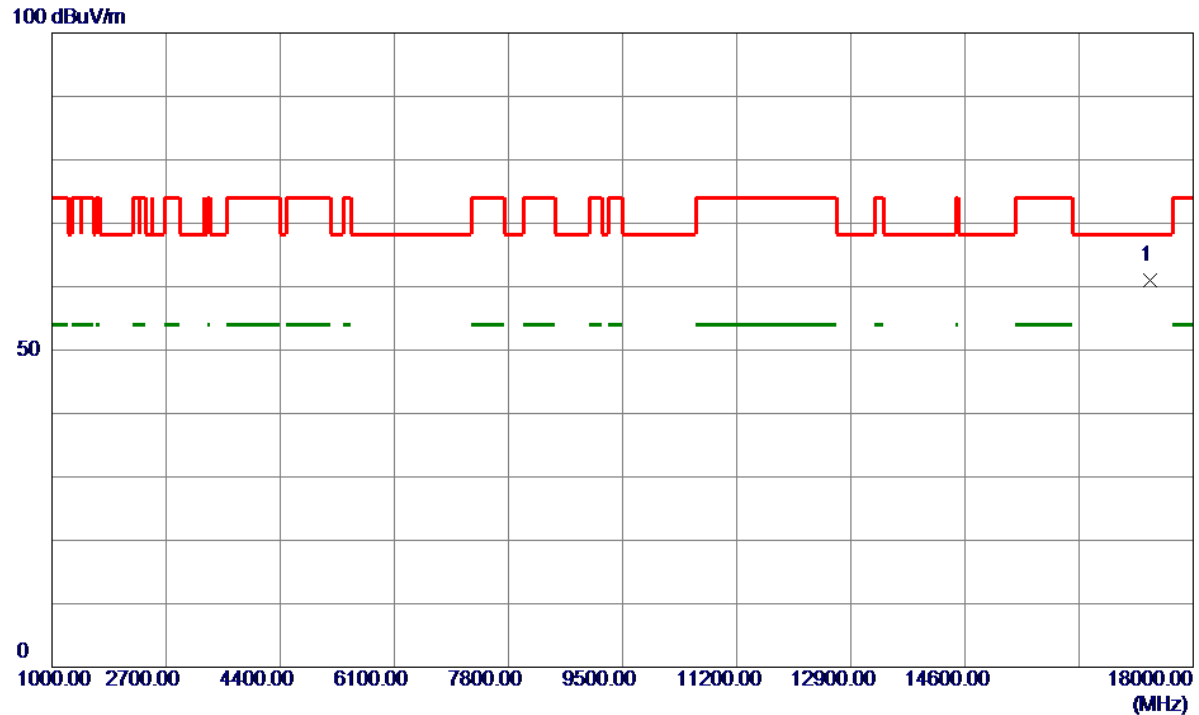


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17363.5000	50.46	10.63	61.09	68.20	-7.11	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

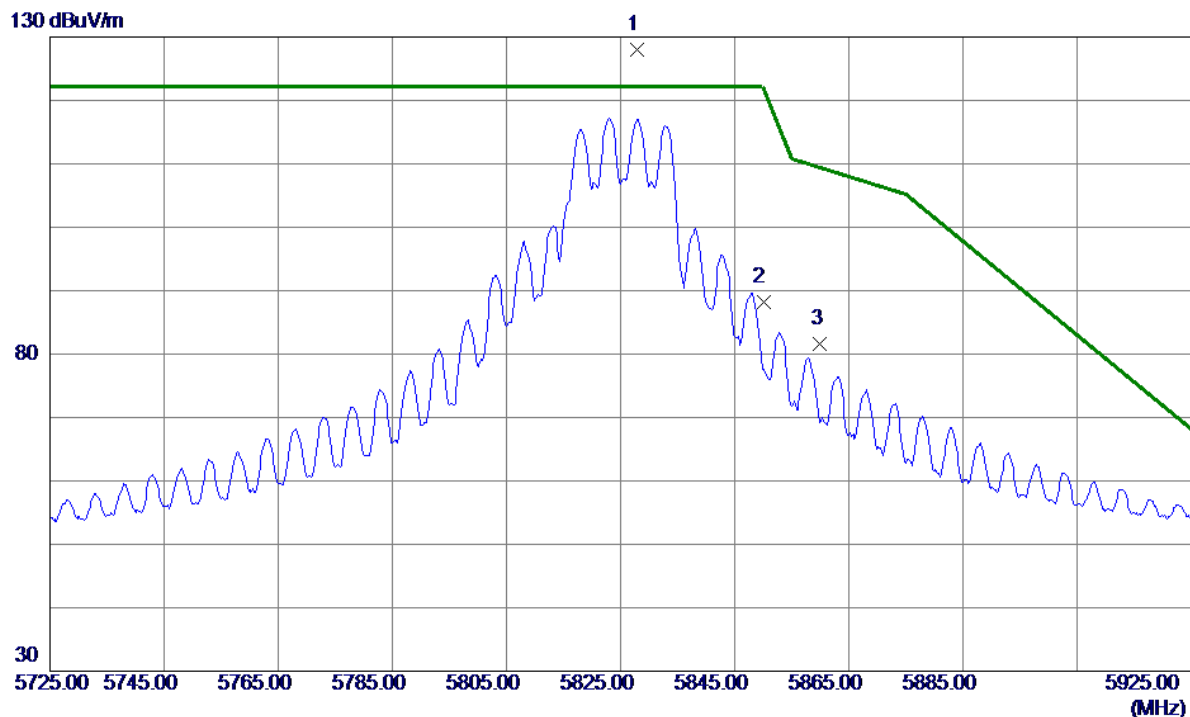


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5827.8000	113.00	14.99	127.99	122.20	5.79	Peak	No Limit
2	5850.0000	73.08	15.04	88.12	122.20	-34.08	Peak	
3	5860.0000	66.57	15.06	81.63	109.40	-27.77	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

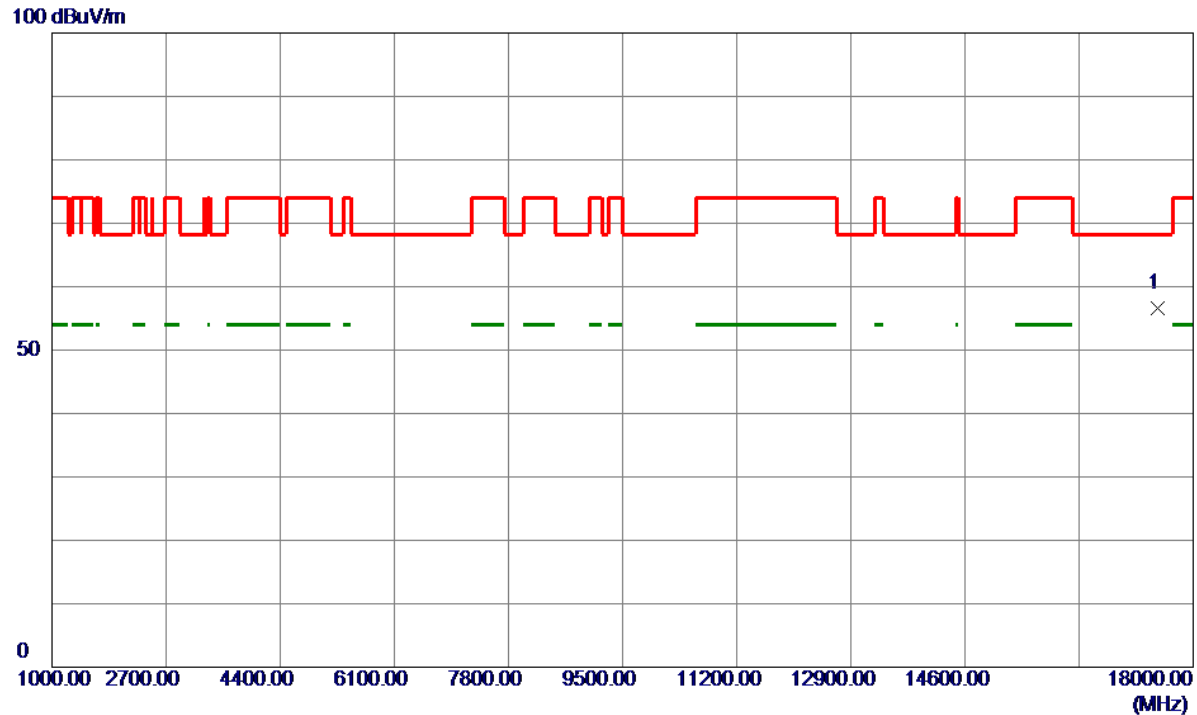


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17479.3000	46.10	10.42	56.52	68.20	-11.68	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

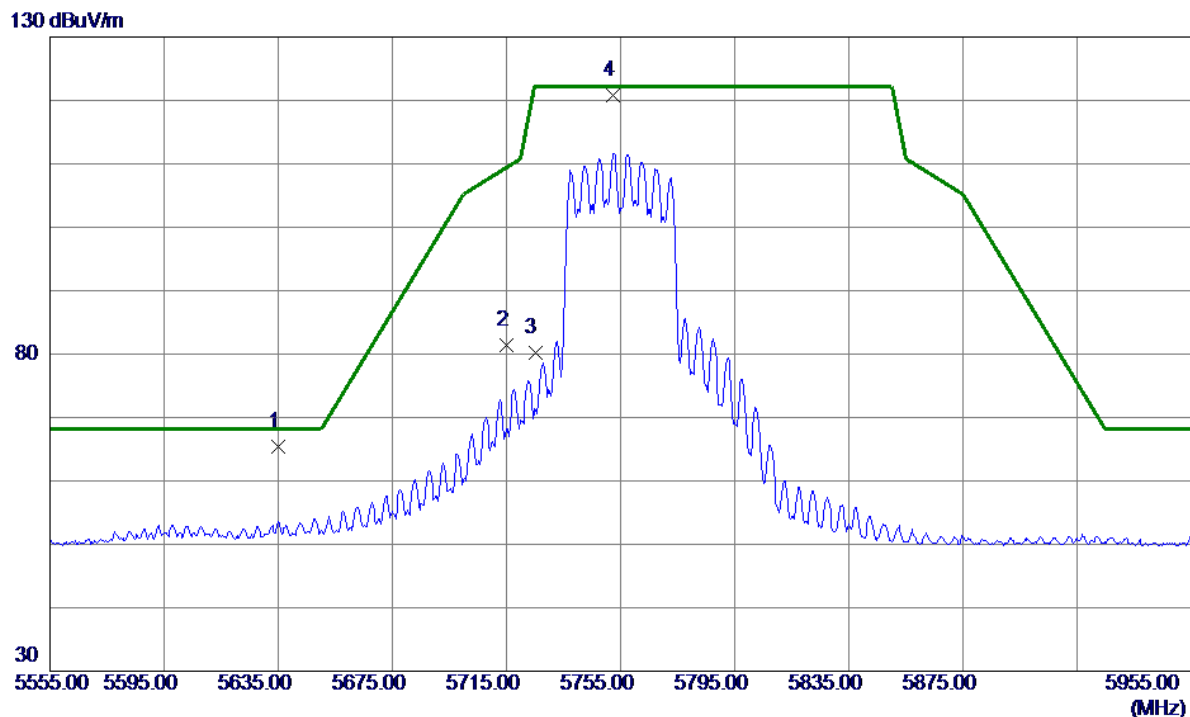


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5635.0000	50.90	14.57	65.47	68.20	-2.73	Peak	
2	5715.0000	66.73	14.75	81.48	109.40	-27.92	Peak	
3	5725.0000	65.43	14.77	80.20	122.20	-42.00	Peak	
4 *	5752.2000	105.94	14.83	120.77	122.20	-1.43	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

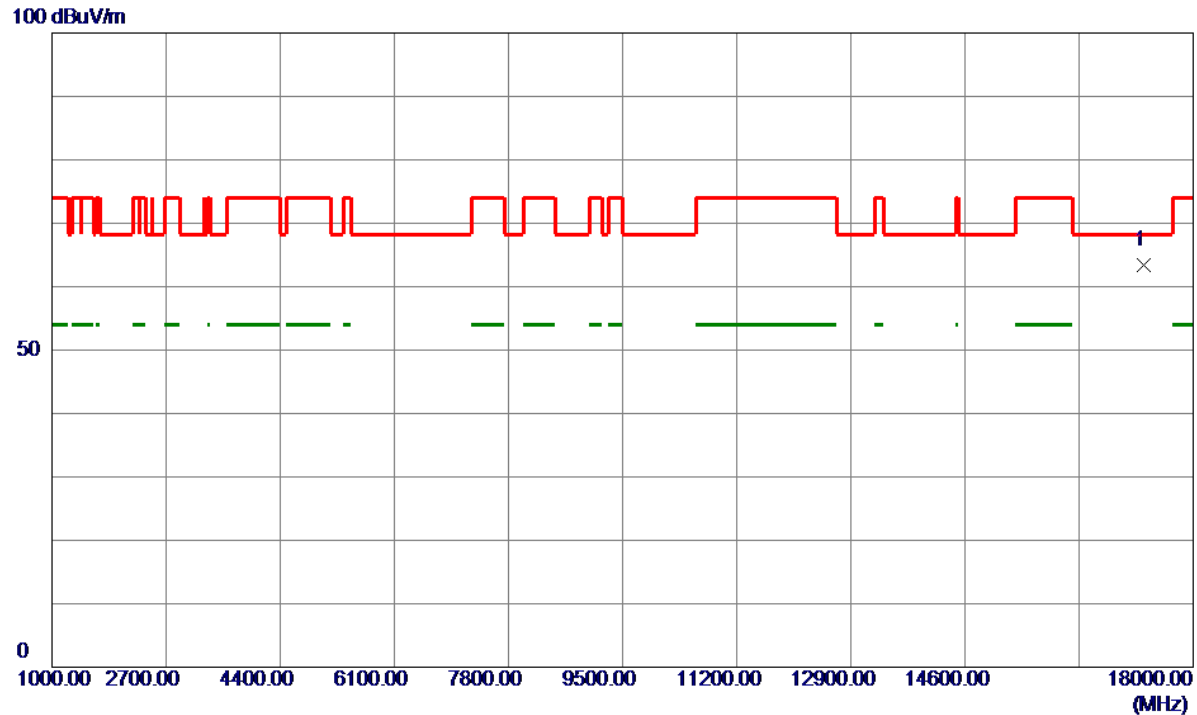


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17263.4000	52.67	10.81	63.48	68.20	-4.72	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

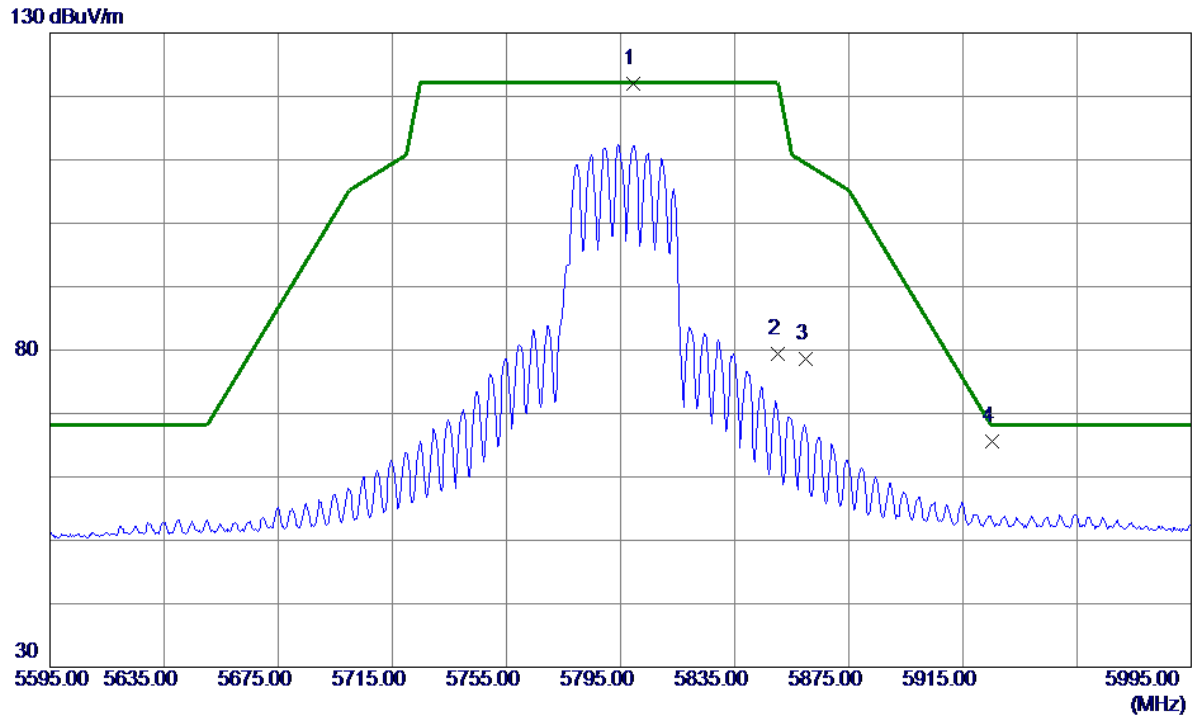


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5799.4000	107.02	14.93	121.95	122.20	-0.25	Peak	No Limit
2	5850.0000	64.33	15.04	79.37	122.20	-42.83	Peak	
3	5860.0000	63.50	15.06	78.56	109.40	-30.84	Peak	
4	5925.4000	50.35	15.21	65.56	68.20	-2.64	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

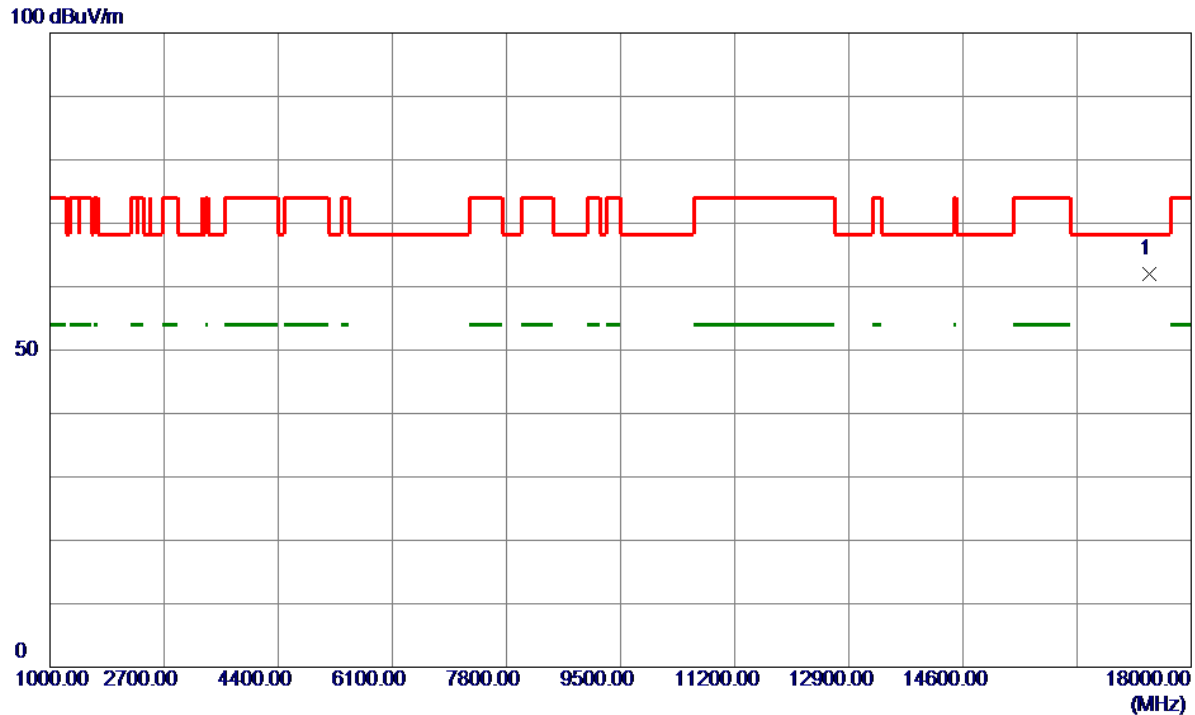


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17377.9000	51.34	10.60	61.94	68.20	-6.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

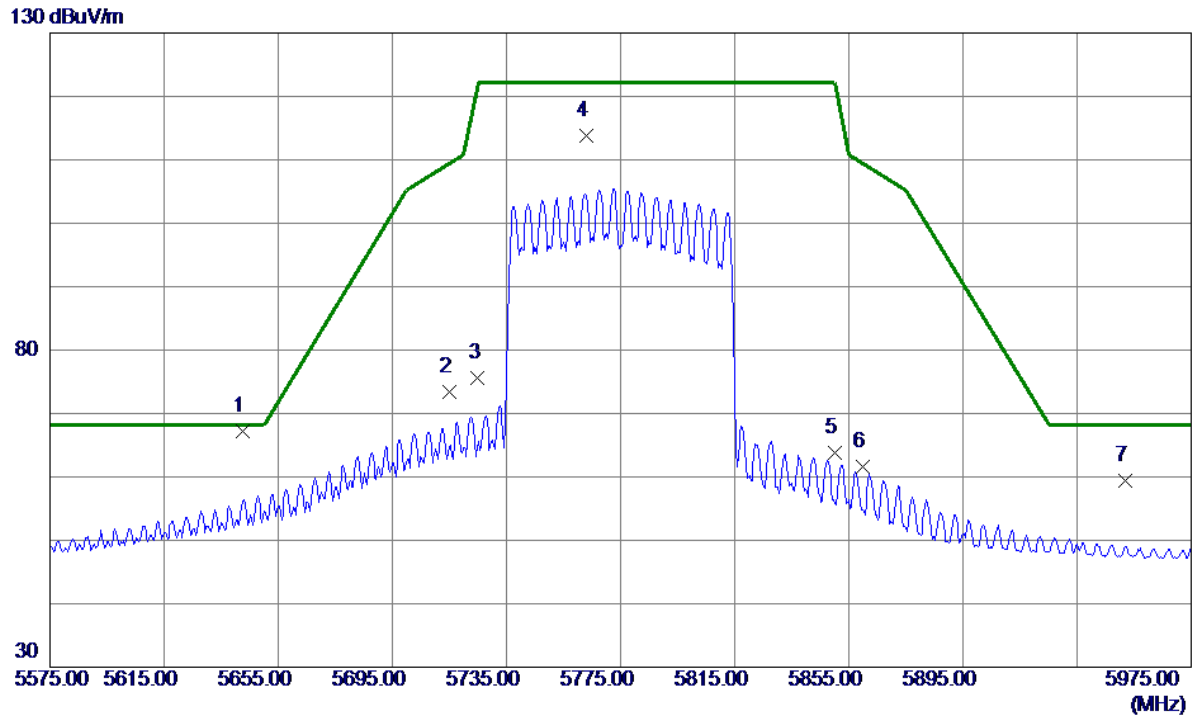


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5642.6000	52.58	14.59	67.17	68.20	-1.03	Peak	
2	5715.0000	58.60	14.75	73.35	109.40	-36.05	Peak	
3	5725.0000	60.92	14.77	75.69	122.20	-46.51	Peak	
4	5763.0000	98.94	14.85	113.79	122.20	-8.41	Peak	No Limit
5	5850.0000	48.70	15.04	63.74	122.20	-58.46	Peak	
6	5860.0000	46.46	15.06	61.52	109.40	-47.88	Peak	
7	5951.8000	44.07	15.26	59.33	68.20	-8.87	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

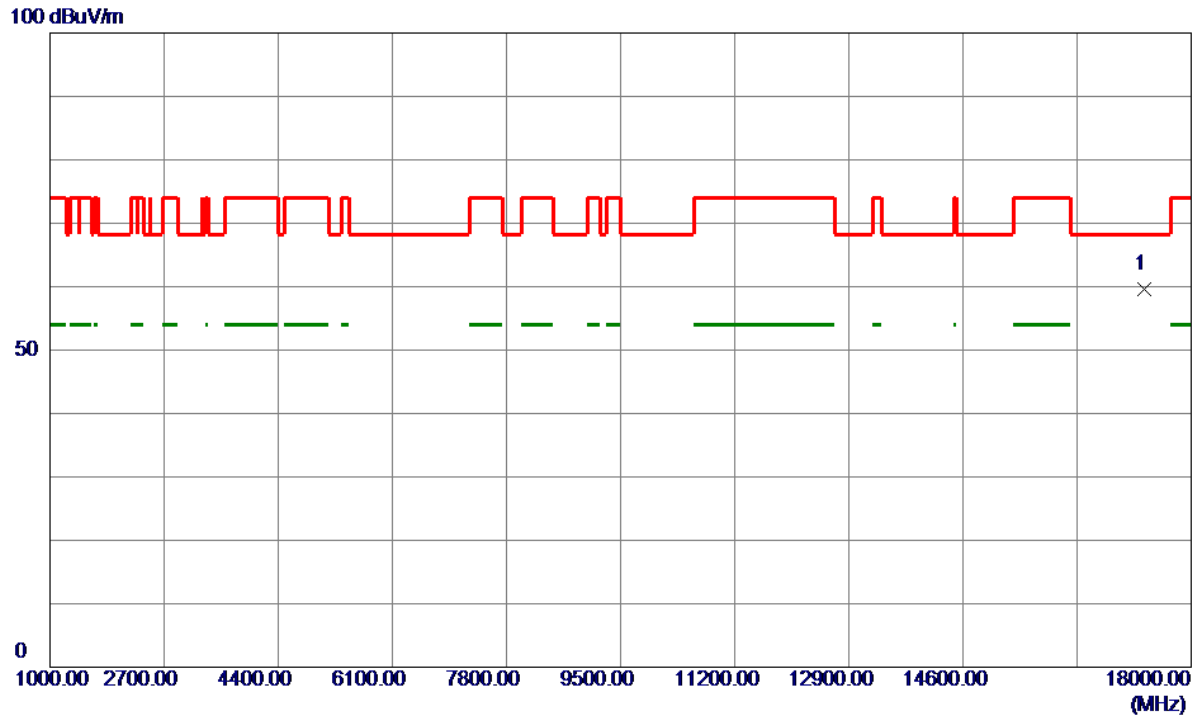


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17306.4000	48.93	10.73	59.66	68.20	-8.54	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

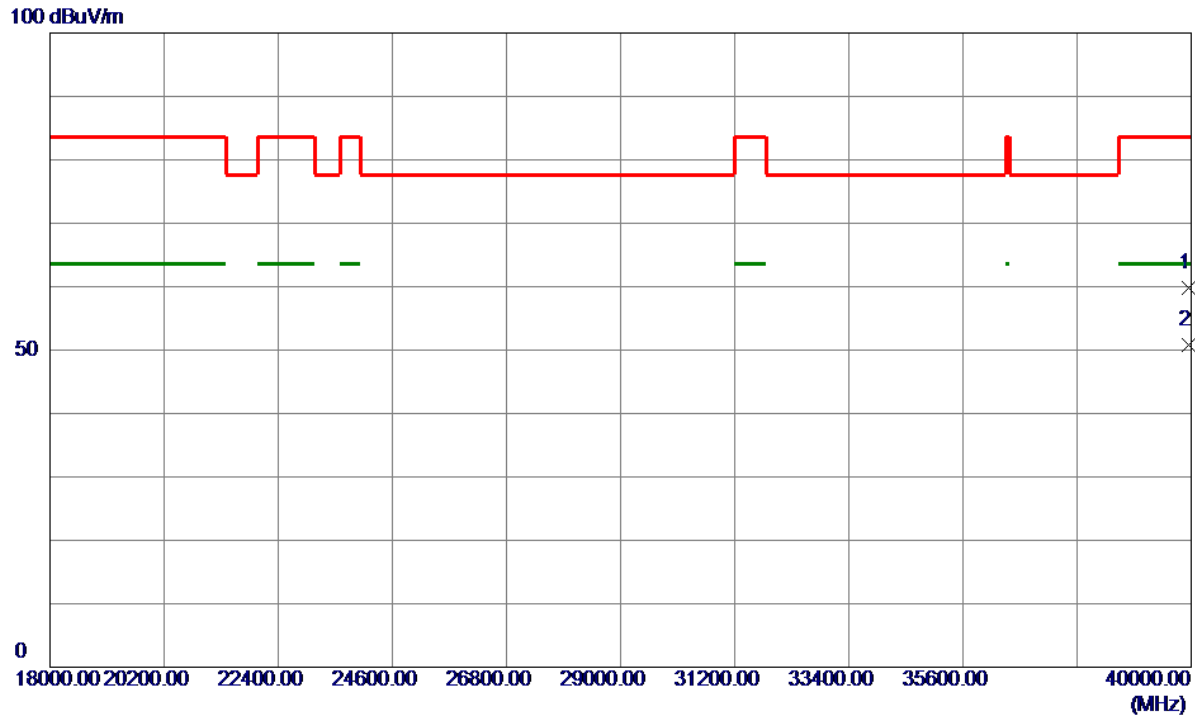


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39956.0000	43.61	16.11	59.72	83.50	-23.78	Peak	
2 *	39956.0000	34.65	16.11	50.76	63.50	-12.74	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

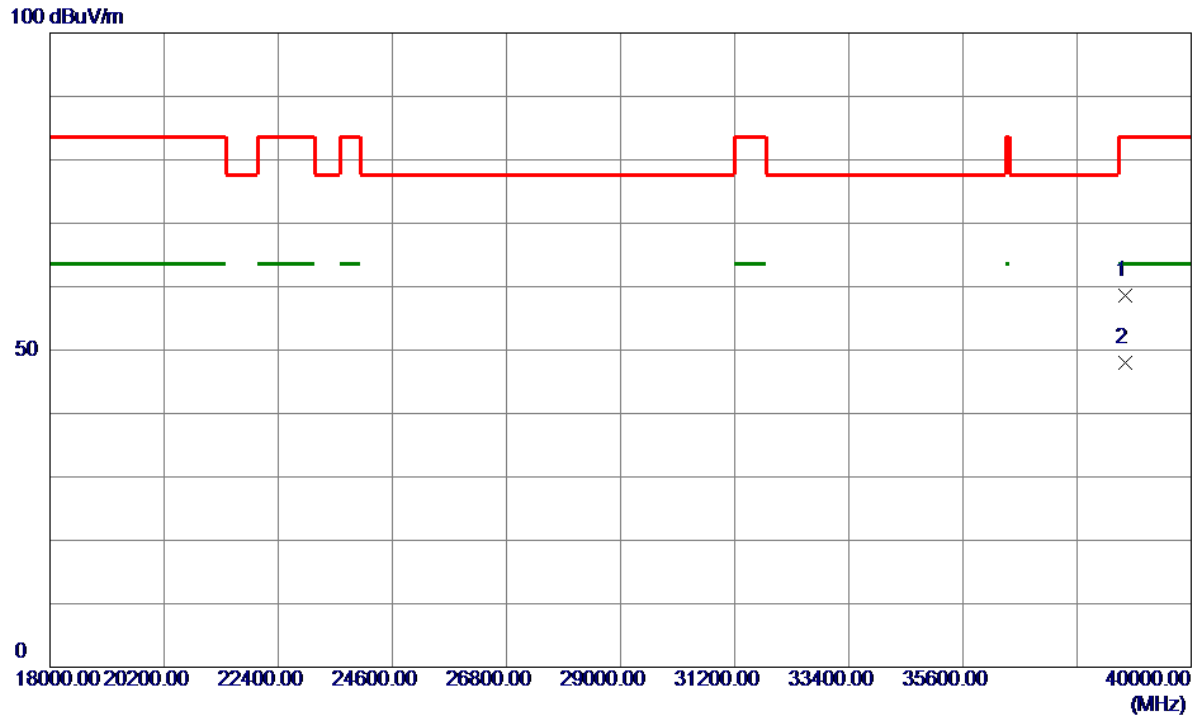

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38724.0000	44.41	14.18	58.59	83.50	-24.91	Peak	
2 *	38724.0000	33.89	14.18	48.07	63.50	-15.43	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode UNII-1_TX A Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	30.960	17.520
40	5200	33.960	17.520
48	5240	35.640	17.640

CH36

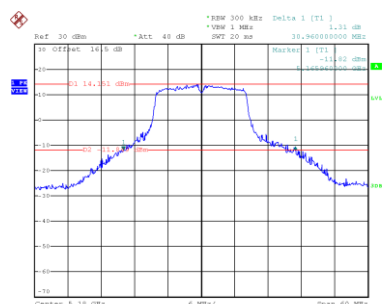


Date: 8.APR.2025 02:03:05

CH40
26 dB Bandwidth

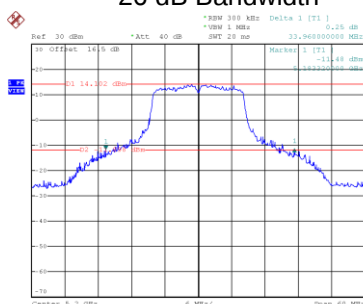


Date: 8.APR.2025 02:03:49

CH48

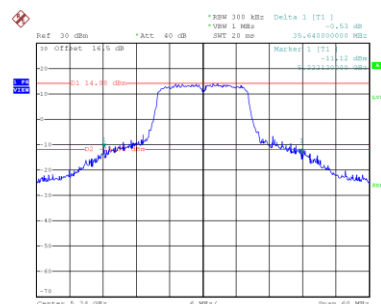


Date: 8.APR.2025 02:04:28


99 % Occupied Bandwidth

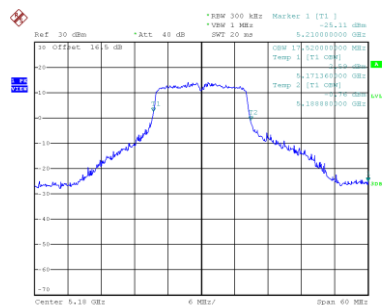

Date: 8.APR.2025 02:03:18

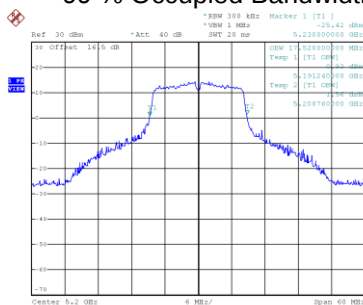

Date: 8.APR.2025 02:04:00

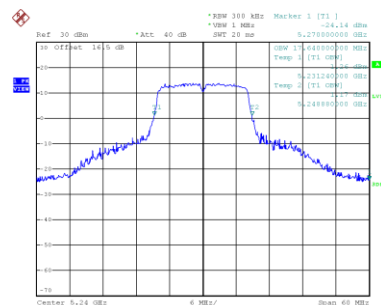


Date: 8.APR.2025 02:04:39

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	32.160	18.480
40	5200	34.920	18.720
48	5240	38.520	18.960

CH36

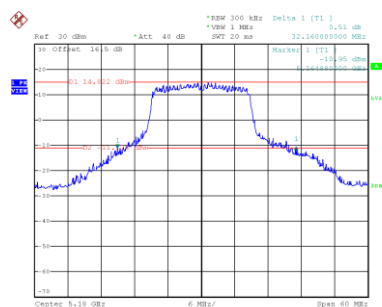


Date: 8.APR.2025 02:18:57

CH40
26 dB Bandwidth

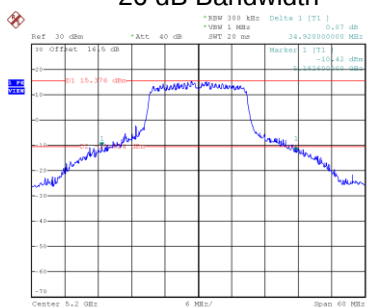


Date: 8.APR.2025 02:19:29

CH48

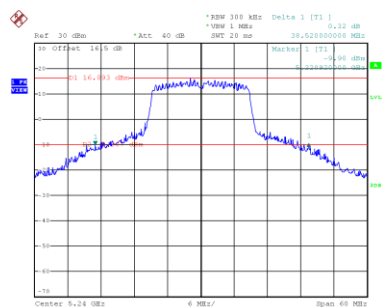


Date: 8.APR.2025 02:20:16


99 % Occupied Bandwidth

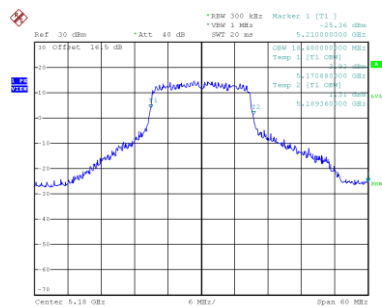

Date: 8.APR.2025 02:19:07

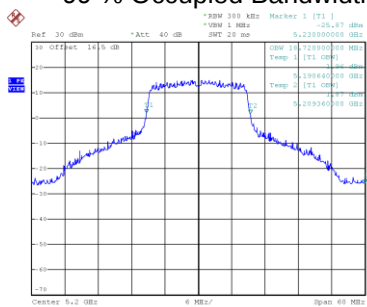

Date: 8.APR.2025 02:19:40

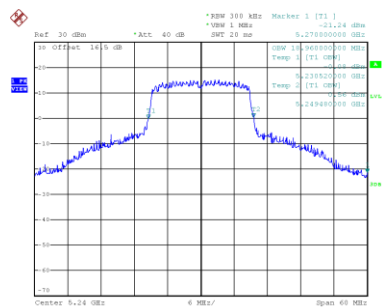


Date: 8.APR.2025 02:20:06

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	89.000	48.400
46	5230	90.800	54.400

CH38

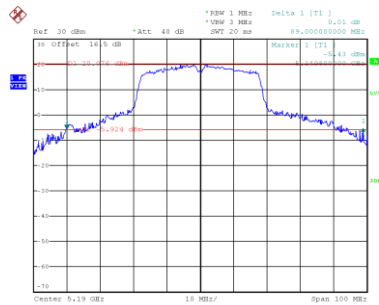


Date: 8.APR.2025 02:51:46

CH46
26 dB Bandwidth

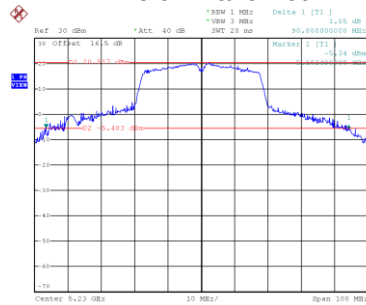


Date: 8.APR.2025 02:52:35

99 % Occupied Bandwidth

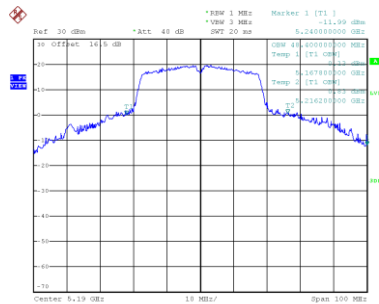

Date: 8.APR.2025 02:51:57

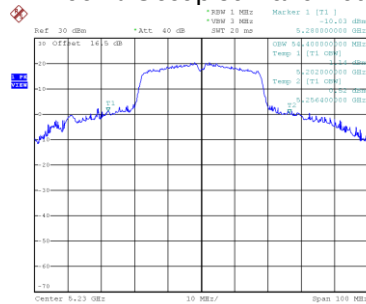


Date: 8.APR.2025 02:52:46

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	192.000	117.200

CH42 26 dB Bandwidth

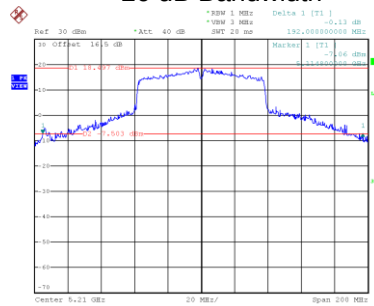

Date: 8.APR.2025 03:04:49

99 % Occupied Bandwidth

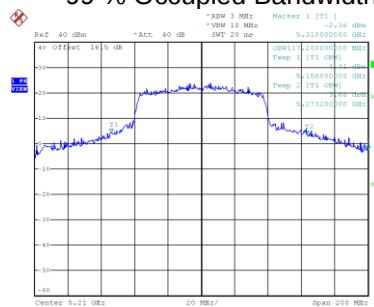


Date: 8.APR.2025 07:05:59

Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	28.320	19.320
40	5200	33.000	19.560
48	5240	39.600	19.200

CH36

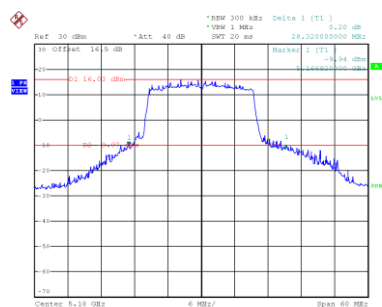


Date: 8.APR.2025 02:29:10

CH40
26 dB Bandwidth

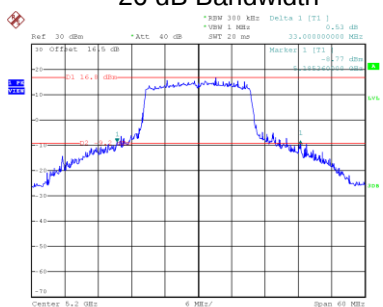


Date: 8.APR.2025 02:29:55

CH48

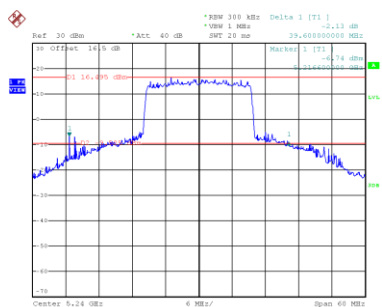


Date: 8.APR.2025 02:30:13


99 % Occupied Bandwidth

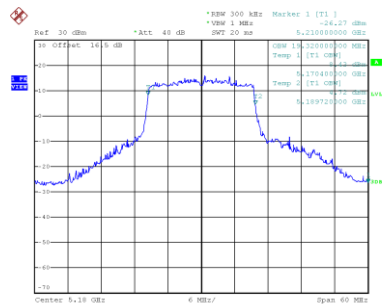

Date: 8.APR.2025 02:29:21

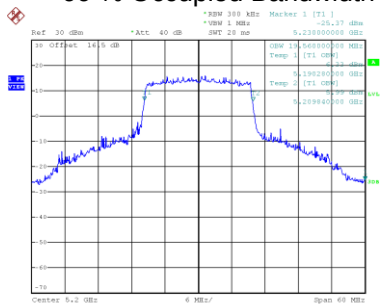

Date: 8.APR.2025 02:29:44

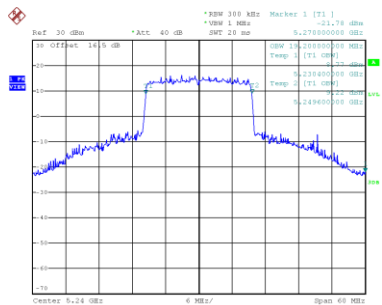


Date: 8.APR.2025 02:30:24

Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	80.600	46.600
46	5230	95.400	50.200

CH38

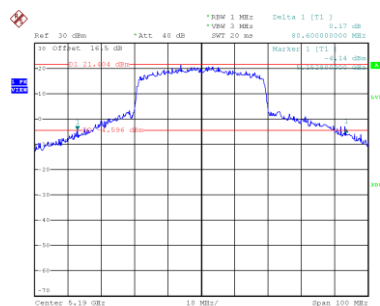


Date: 8.APR.2025 02:42:03

CH46
26 dB Bandwidth

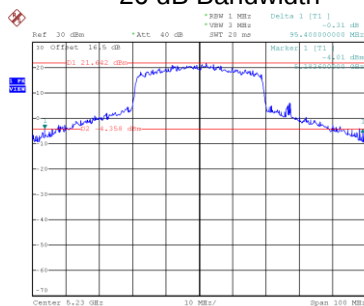


Date: 8.APR.2025 02:42:48

99 % Occupied Bandwidth

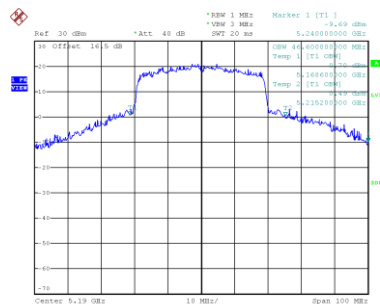

Date: 8.APR.2025 02:42:14

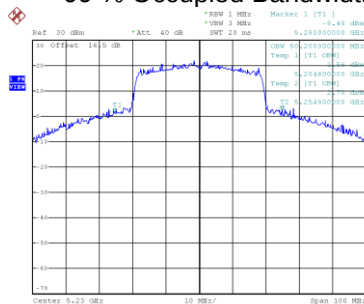


Date: 8.APR.2025 02:42:37

Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	177.200	115.600

CH42 26 dB Bandwidth

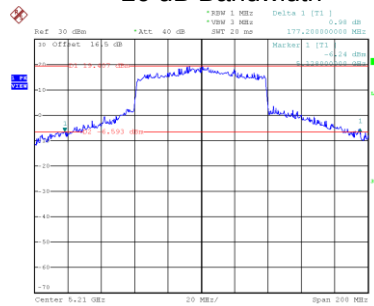

Date: 8.APR.2025 03:10:26

99 % Occupied Bandwidth

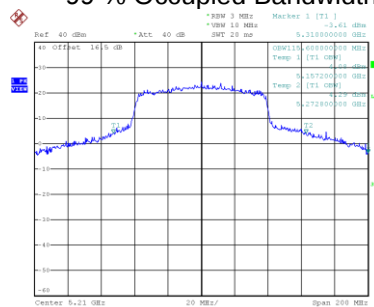


Date: 8.APR.2025 07:06:17

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.120	16.920
60	5300	29.400	17.520
64	5320	30.000	17.400

CH52

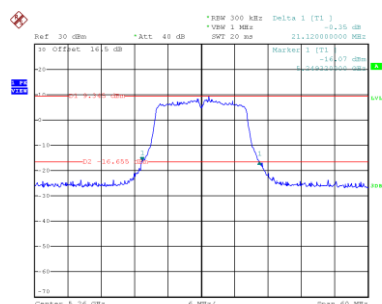


Date: 8.APR.2025 02:05:04

CH60
26 dB Bandwidth

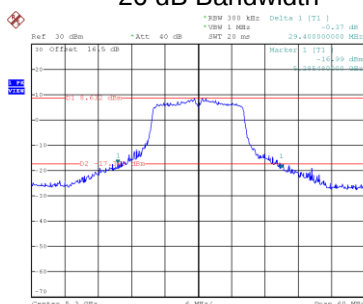


Date: 8.APR.2025 02:05:18

CH64

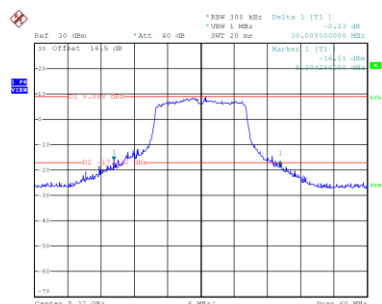


Date: 8.APR.2025 02:06:24


99 % Occupied Bandwidth

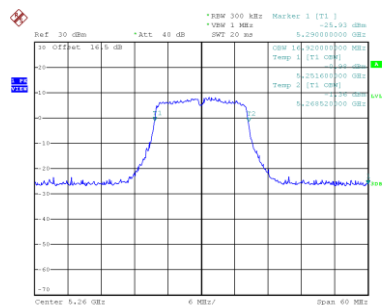

Date: 8.APR.2025 02:05:15

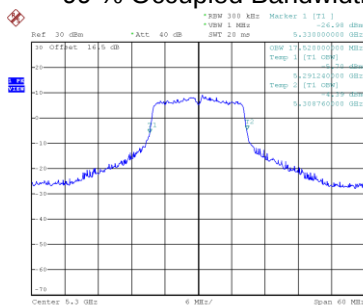

Date: 8.APR.2025 02:05:49

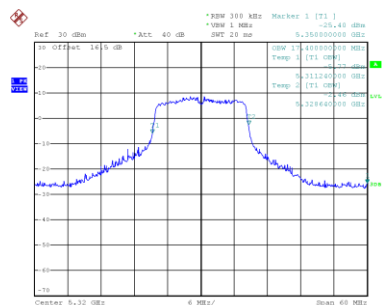


Date: 8.APR.2025 02:06:14

Test Mode UNII-2A_TX AC(VHT20) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.960	17.880
60	5300	31.920	18.480
64	5320	29.760	18.360

CH52

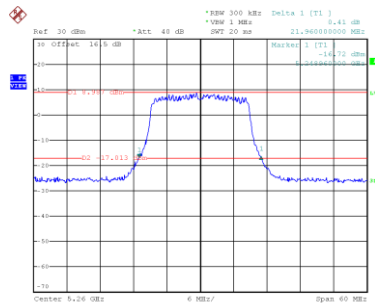


Date: 8.APR.2025 02:20:55

CH60
26 dB Bandwidth

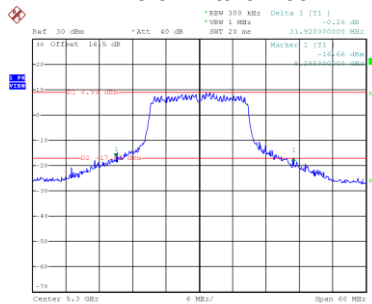


Date: 8.APR.2025 02:21:56

CH64

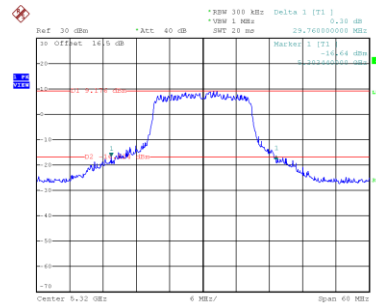


Date: 8.APR.2025 02:23:23


99 % Occupied Bandwidth

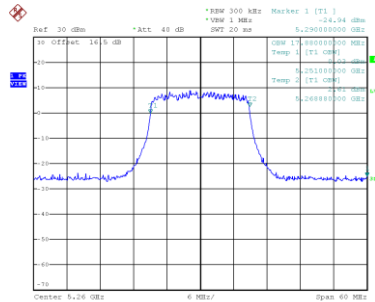

Date: 8.APR.2025 02:20:45

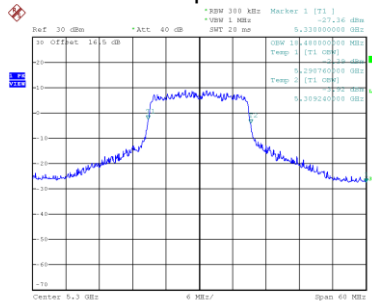

Date: 8.APR.2025 02:21:46

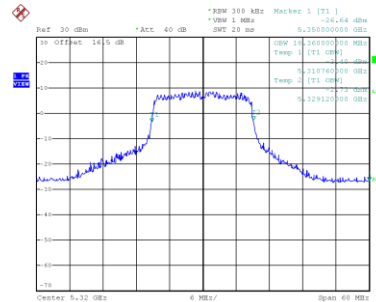


Date: 8.APR.2025 02:23:12

Test Mode UNII-2A_TX AC(VHT40) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	40.400	36.800
62	5310	52.000	37.400

CH54

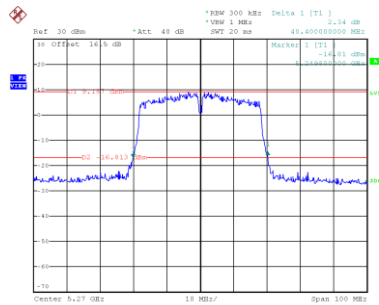


Date: 8.APR.2025 02:53:17

CH62
26 dB Bandwidth

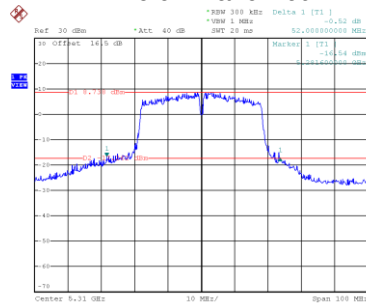


Date: 8.APR.2025 02:53:46

99 % Occupied Bandwidth

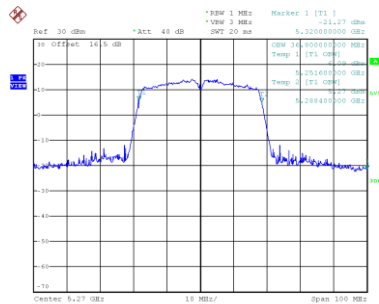

Date: 8.APR.2025 02:53:28

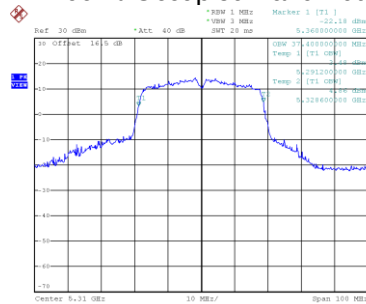


Date: 8.APR.2025 02:53:57

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	115.200	76.400

CH58 26 dB Bandwidth

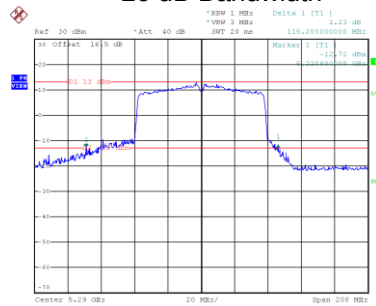

Date: 8.APR.2025 03:05:53

99 % Occupied Bandwidth

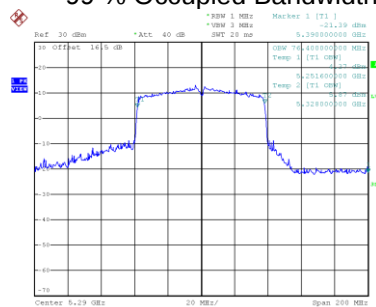


Date: 8.APR.2025 03:05:42

Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.320	19.200
60	5300	29.280	19.440
64	5320	29.760	19.440

CH52

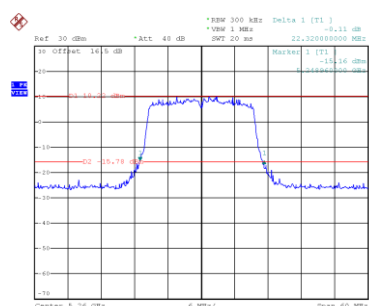


Date: 8.APR.2025 02:30:49

CH60
26 dB Bandwidth

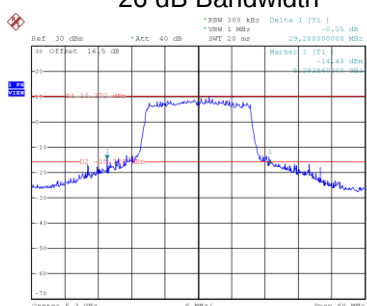


Date: 8.APR.2025 02:31:20

CH64

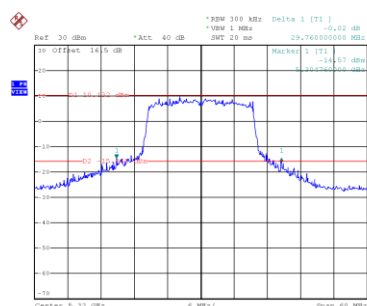


Date: 8.APR.2025 02:32:04


99 % Occupied Bandwidth

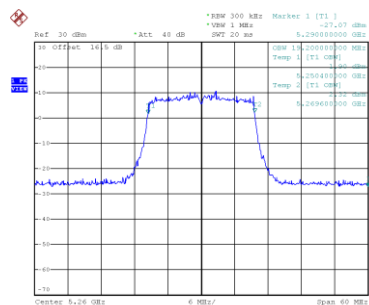

Date: 8.APR.2025 02:31:00

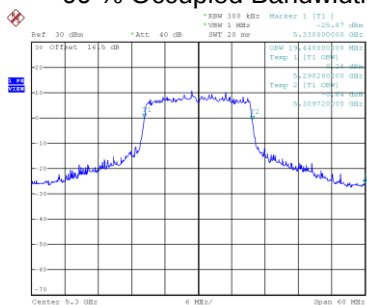

Date: 8.APR.2025 02:31:31

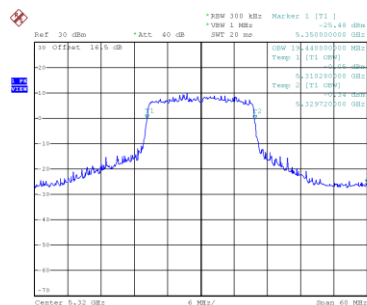


Date: 8.APR.2025 02:31:54

Test Mode	UNII-2A_TX AX(HE40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.400	38.000
62	5310	50.600	38.600

CH54

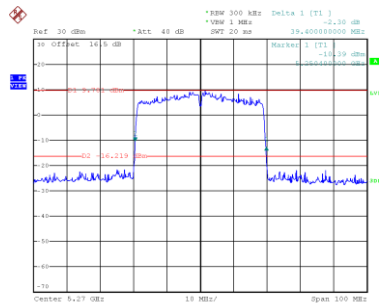


Date: 8.APR.2025 02:44:07

CH62
26 dB Bandwidth

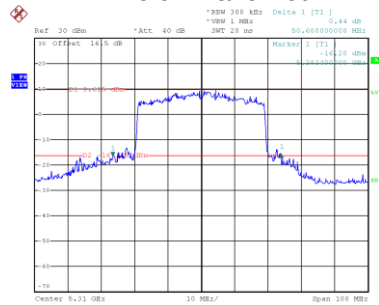


Date: 8.APR.2025 02:45:02

99 % Occupied Bandwidth

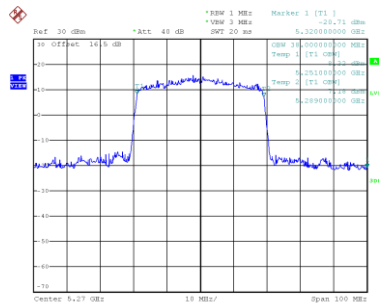

Date: 8.APR.2025 02:44:18

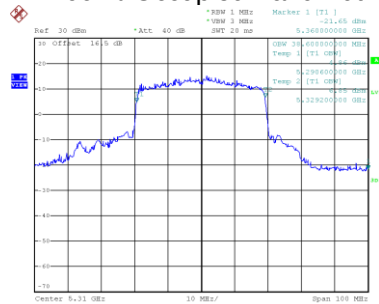


Date: 8.APR.2025 02:45:13

Test Mode	UNII-2A_TX AX(HE80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	104.800	77.600

CH58 26 dB Bandwidth

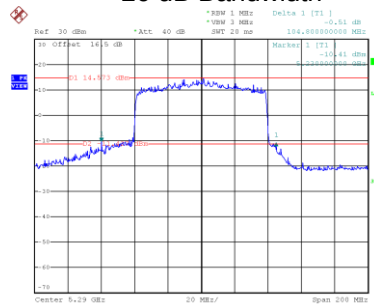

Date: 8.APR.2025 03:11:14

99 % Occupied Bandwidth

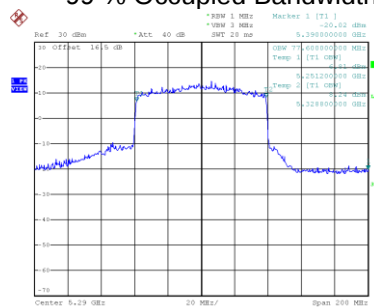


Date: 8.APR.2025 03:11:25

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode
-----------	-----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	171.200	155.200

CH50 26 dB Bandwidth

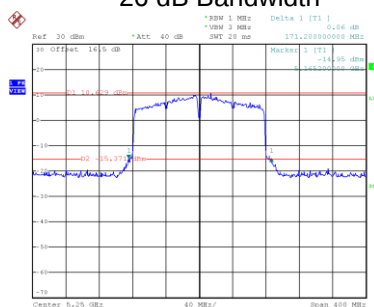

Date: 8.APR.2025 03:20:41

99 % Occupied Bandwidth

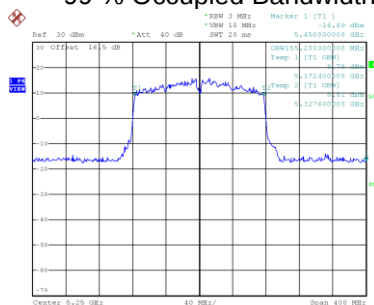


Date: 8.APR.2025 03:20:52

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode
-----------	----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	162.400	157.600

CH50 26 dB Bandwidth

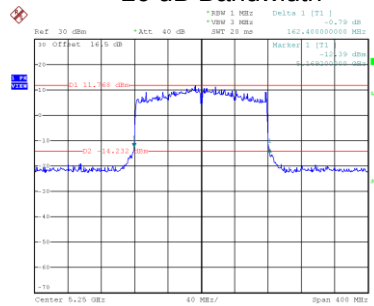

Date: 8.APR.2025 03:19:08

99 % Occupied Bandwidth

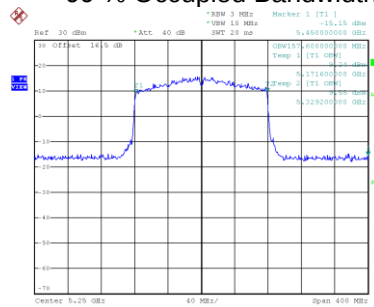


Date: 8.APR.2025 03:19:58

Test Mode UNII-2C_TX A Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	32.520	17.400
116	5580	21.240	16.800
140	5700	28.080	17.280

CH100

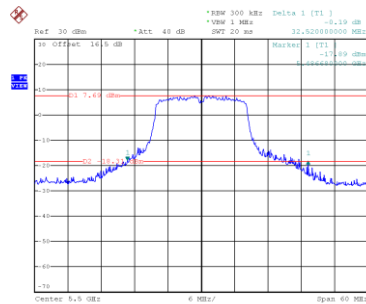


Date: 8.APR.2025 02:08:27

CH116
26 dB Bandwidth

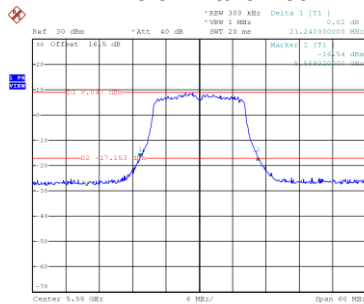


Date: 8.APR.2025 02:10:43

CH140

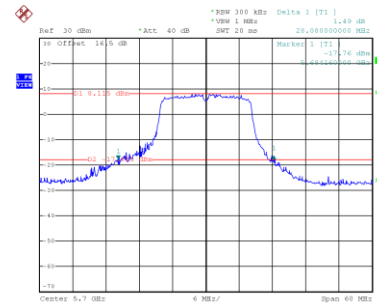


Date: 8.APR.2025 02:11:29


99 % Occupied Bandwidth

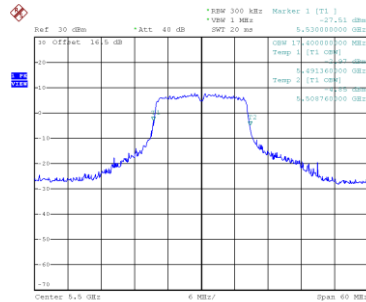

Date: 8.APR.2025 02:08:38

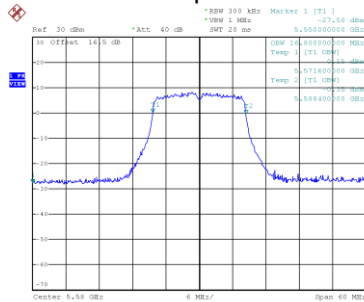

Date: 8.APR.2025 02:10:33

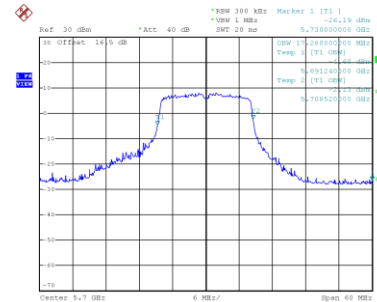


Date: 8.APR.2025 02:11:19

Test Mode UNII-2C_TX AC(VHT20) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	29.160	18.360
116	5580	22.080	18.000
140	5700	30.000	18.240

CH100

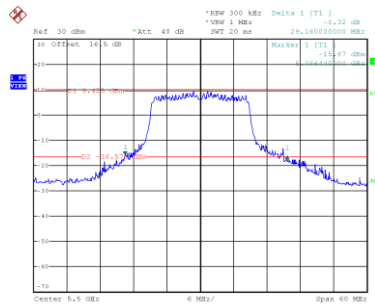


Date: 8.APR.2025 02:23:50

CH116
26 dB Bandwidth

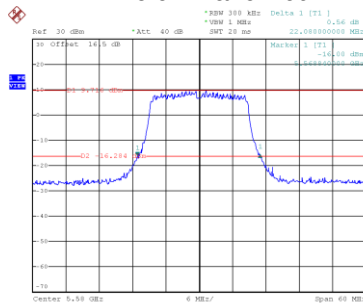


Date: 8.APR.2025 02:24:34

CH140

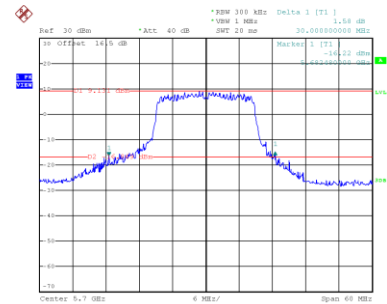


Date: 8.APR.2025 02:25:09


99 % Occupied Bandwidth

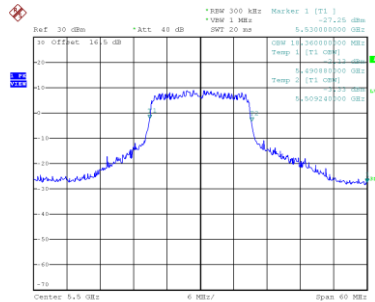

Date: 8.APR.2025 02:24:01

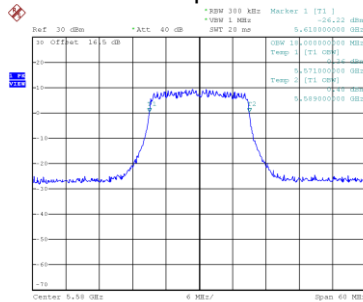

Date: 8.APR.2025 02:24:44

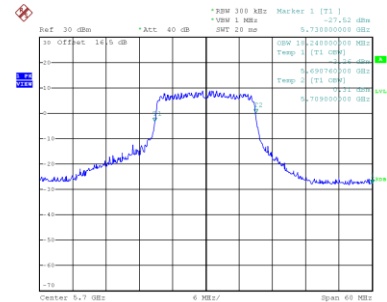


Date: 8.APR.2025 02:25:20

Test Mode UNII-2C_TX AC(VHT40) Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	52.600	37.200
110	5550	40.200	36.800
134	5670	59.000	37.600

CH102

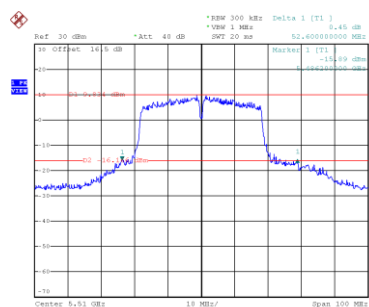


Date: 8.APR.2025 02:15:127

CH110
26 dB Bandwidth

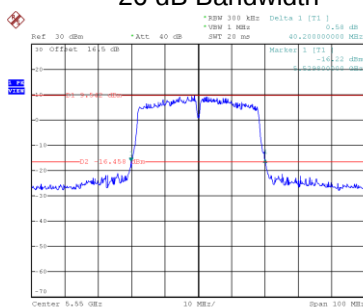


Date: 8.APR.2025 02:15:111

CH134

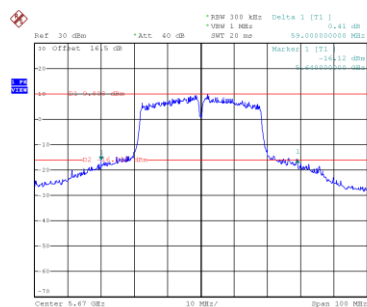


Date: 8.APR.2025 02:15:154


99 % Occupied Bandwidth

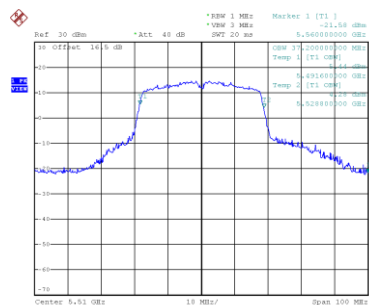

Date: 8.APR.2025 02:15:137

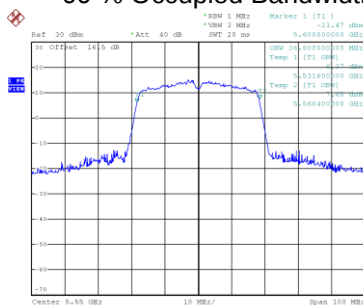

Date: 8.APR.2025 02:15:121

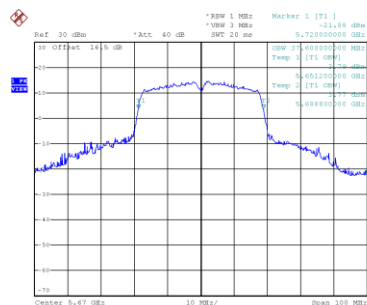

Date: 8.APR.2025 02:15:105