



## Test Report

**Report No. :** CQASZ20250300549E-01

**Applicant:** Shenzhen Yuyin Electronic Co., Ltd

**Address of Applicant:** 601, Building 4, Tongkangfu Industrial Park, Yingrenshi Community, Shiyan Street, Baoan District, Shenzhen

**Equipment Under Test (EUT):**

**Product:** Wireless Pedal

**Model No.:** K24-01

**Test Model No.:** K24-01

**Brand Name:** YUEYINPU

**FCC ID:** 2A4JM-K24-01

**Standards:** 47 CFR Part 15, Subpart C

**Date of Receipt:** 2025-03-20

**Date of Test:** 2022-02-18 to 2022-02-22

**Date of Test:** 2025-03-20 to 2025-03-20

**Date of Issue:** 2025-4-2

**Test Result :** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above.

**Tested By:** lewis zhou  
( Lewis Zhou )

**Reviewed By:** Timo Lei  
( Timo Lei )

**Approved By:** Jack Ai  
( Jack Ai )



## 1 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20220200212E-01	Rev.01	Initial report	2022-02-24
CQASZ20250300549E-01	Rev.02	Update report	2025-4-2

This test report (Ref. No.: CQASZ20250300549E-01)

All test data comes from source test reports (Ref. No.: CQASZ20220200212E-01).

Only on the basis of the original report updated Brand Name.

Because of the different ports, Add Conducted Emission, Radiated Emission test

And Add Photographs of EUT.

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

### 3 Contents

	Page
<b>1 VERSION</b> .....	2
<b>2 TEST SUMMARY</b> .....	3
<b>3 CONTENTS</b> .....	4
<b>4 GENERAL INFORMATION</b> .....	5
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF EUT .....	5
4.3 ADDITIONAL INSTRUCTIONS .....	7
4.4 TEST ENVIRONMENT .....	8
4.5 DESCRIPTION OF SUPPORT UNITS .....	8
4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	9
4.7 TEST LOCATION .....	10
4.8 TEST FACILITY .....	10
4.9 ABNORMALITIES FROM STANDARD CONDITIONS .....	10
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	10
4.11 EQUIPMENT LIST .....	11
<b>5 TEST RESULTS AND MEASUREMENT DATA</b> .....	12
5.1 ANTENNA REQUIREMENT .....	12
5.2 CONDUCTED EMISSIONS .....	13
5.3 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM .....	19
5.4 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS .....	21
5.4.1 <i>Radiated Emission below 1GHz</i> .....	24
<b>6 PHOTOGRAPHS - EUT TEST SETUP</b> .....	28
6.1 RADIATED EMISSION .....	28
6.2 CONDUCTED EMISSION .....	29
<b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b> .....	30

## 4 General Information

### 4.1 Client Information

Applicant:	Shenzhen Yuyin Electronic Co., Ltd
Address of Applicant:	601, Building 4, Tongkangfu Industrial Park, Yingrenshi Community, Shiyan Street, Baoan District, Shenzhen
Manufacturer:	Shenzhen Yuyin Electronic Co., Ltd
Address of Manufacturer:	601, Building 4, Tongkangfu Industrial Park, Yingrenshi Community, Shiyan Street, Baoan District, Shenzhen
Factory:	Shenzhen Yuyin Electronic Co., Ltd
Address of Factory:	601, Building 4, Tongkangfu Industrial Park, Yingrenshi Community, Shiyan Street, Baoan District, Shenzhen

### 4.2 General Description of EUT

Product Name:	Wireless Pedal
Model No.:	K24-01
Test Model No.:	K24-01
Trade Mark:	YUEYINPU
Software Version:	V04
Hardware Version:	V01
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V5.0
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK
Transfer Rate:	1Mbps
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	bluetool1.6.8.6
Antenna Type:	PCB antenna
Antenna Gain:	2.78dBi
Power Supply:	Li-ion battery: DC 3.7V 400mAh, Charge by DC 5V for adapter

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

### 4.3 Additional Instructions


#### EUT Test Software Settings:

Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: *###3646633#**#
EUT Power level:	Class2 (Power level is built-in set parameters and cannot be changed and selected)

Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

Mode	Channel	Frequency(MHz)
DH1/DH3/DH5	CH0	2402
	CH39	2441
	CH78	2480

#### Run Software:

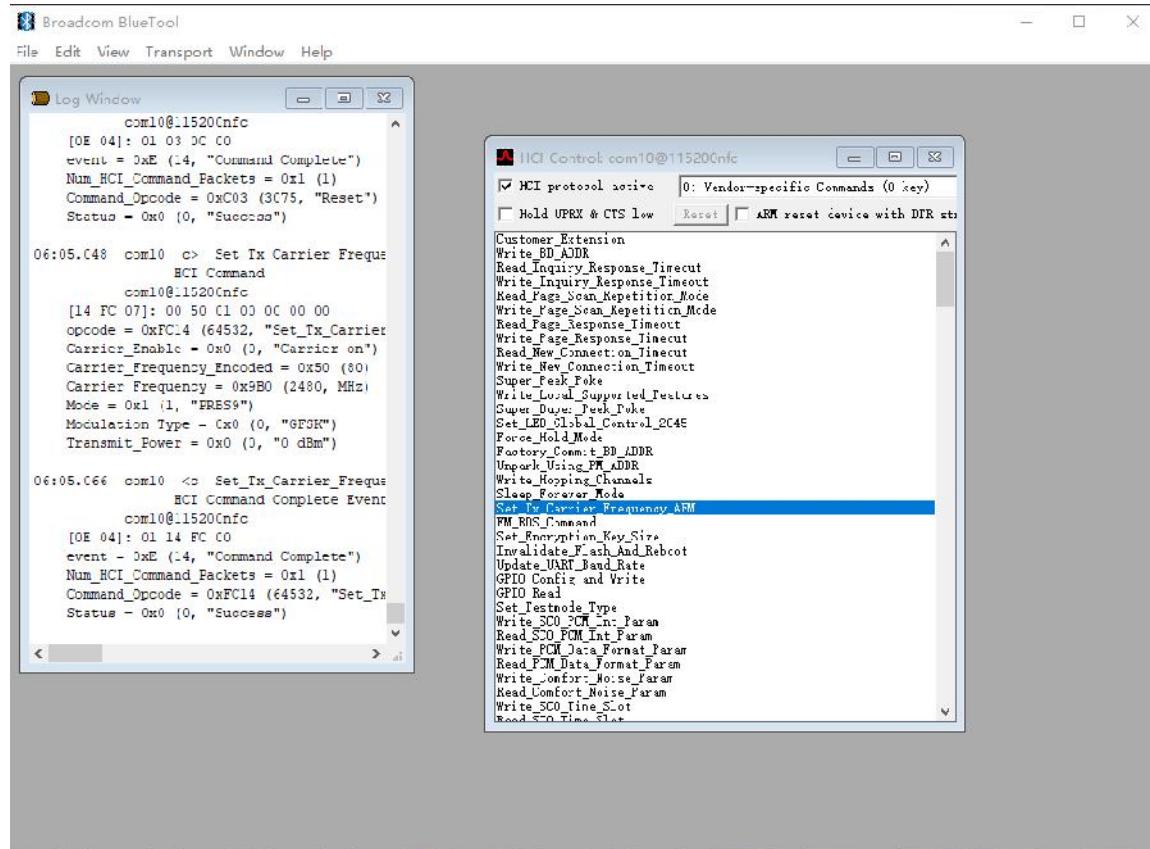

#### 4.4 Test Environment

Operating Environment:	
Temperature:	25 °C
Humidity:	54% RH
Atmospheric Pressure:	1009mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

#### 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
Adapter	/	HW-0502000C01	/	CQA

## 4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	$3 \times 10^{-8}$
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8 °C
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	Frequency Error	5.5 Hz

## 4.7 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

## 4.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**IC Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 4.9 Abnormalities from Standard Conditions

None.

## 4.10 Other Information Requested by the Customer

None.

## 4.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2021/9/10 2024/9/2	2022/9/9 2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2021/9/10 2024/9/2	2022/9/9 2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2021/9/10 2024/9/2	2022/9/9 2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2021/9/10 2024/9/2	2022/9/9 2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/9/16 2023/9/8	2024/9/15 2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2021/9/16 2023/11/01	2024/9/15 2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2021/9/16 2023/11/01	2024/9/15 2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/9/16 2023/9/7	2024/9/15 2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2021/9/10 2024/9/2	2022/9/9 2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2021/9/10 2024/9/2	2022/9/9 2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2021/9/10 2024/9/2	2022/9/9 2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2021/9/10 2024/9/2	2022/9/9 2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2021/9/10 2024/9/2	2022/9/9 2025/9/1
EMI Test Receiver	R&S	ESR7	CQA-005	2021/9/10 2024/9/2	2022/9/9 2025/9/1
LISN	R&S	ENV216	CQA-003	2021/9/10 2024/9/2	2022/9/9 2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2021/9/10 2024/9/2	2022/9/9 2025/9/1

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
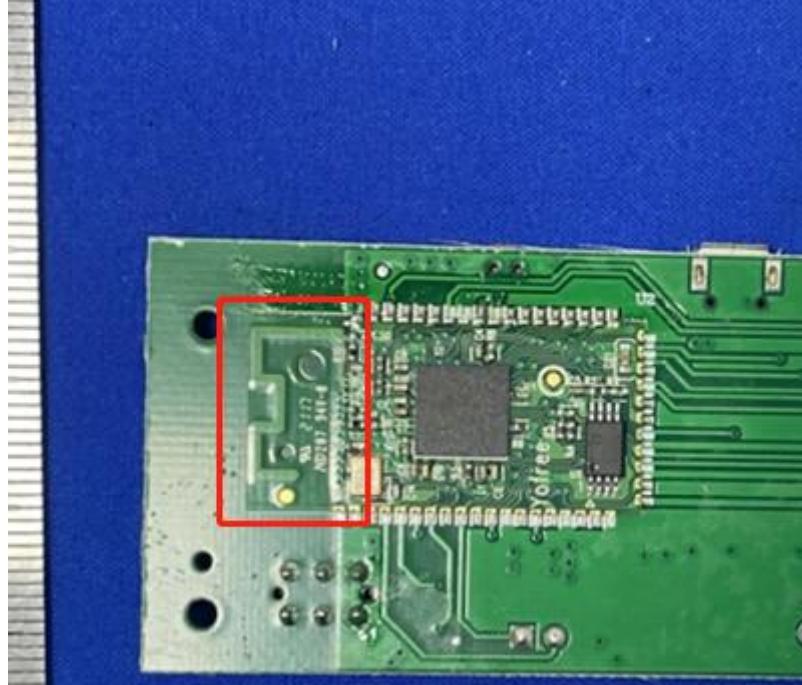
<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:	 <p>The antenna is PCB antenna. The best case gain of the antenna is 2.78 dBi.</p>


## 5.2 Conducted Emissions

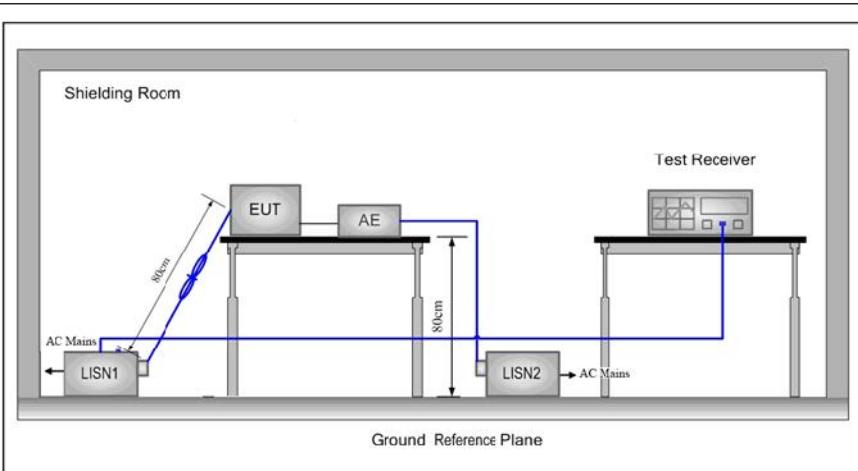Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>		
Test Setup:			

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

**Measurement Data**

Live line:

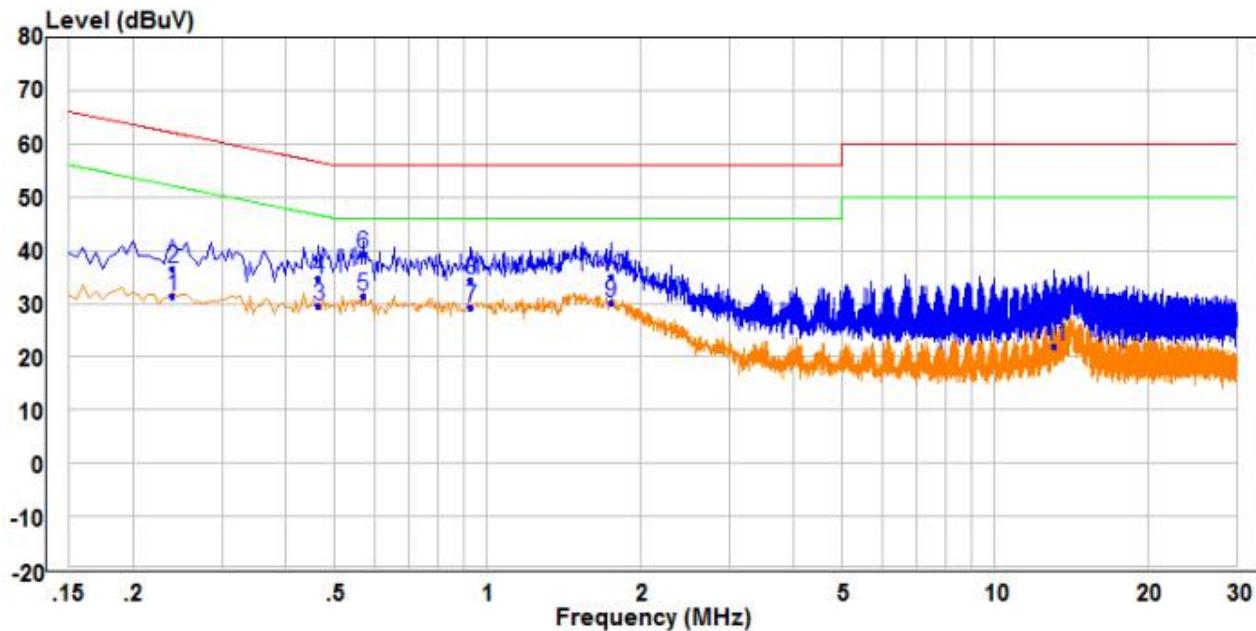


Freq	Read		Level	Limit	Over		Pol/Phase
	MHz	dBuV			Line	Limit	
1	0.240	21.87	9.49	31.36	52.10	-20.74	Average Line
2	0.240	27.07	9.49	36.56	62.10	-25.54	QP Line
3	0.465	19.89	9.52	29.41	46.60	-17.19	Average Line
4	0.465	25.35	9.52	34.87	56.60	-21.73	QP Line
5 PP	0.570	21.58	9.65	31.23	46.00	-14.77	Average Line
6 QP	0.570	29.71	9.65	39.36	56.00	-16.64	QP Line
7	0.930	19.75	9.61	29.36	46.00	-16.64	Average Line
8	0.930	24.84	9.61	34.45	56.00	-21.55	QP Line
9	1.755	20.54	9.53	30.07	46.00	-15.93	Average Line
10	1.755	25.61	9.53	35.14	56.00	-20.86	QP Line
11	13.140	12.04	9.87	21.91	50.00	-28.09	Average Line
12	13.140	18.80	9.87	28.67	60.00	-31.33	QP Line

**Remark:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

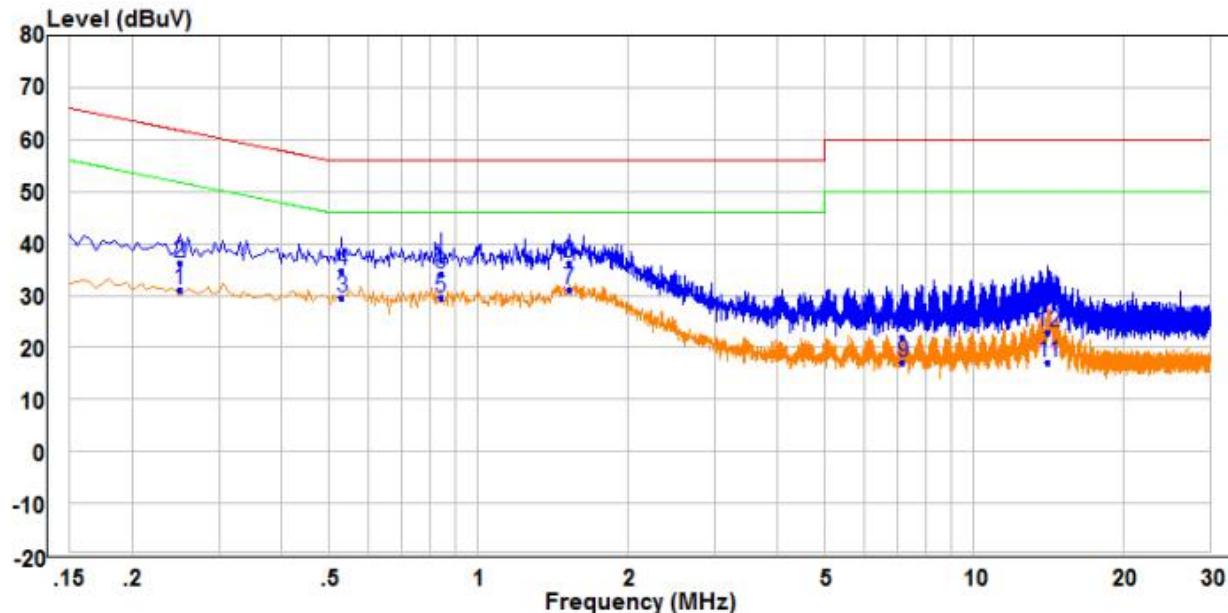

Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz			dBuV	dB		
1	0.250	21.42	9.54	30.96	51.76	-20.80	Average
2	0.250	26.81	9.54	36.35	61.76	-25.41	QP
3	0.530	19.71	9.73	29.44	46.00	-16.56	Average
4	0.530	24.86	9.73	34.59	56.00	-21.41	QP
5	0.840	19.82	9.81	29.63	46.00	-16.37	Average
6	0.840	24.36	9.81	34.17	56.00	-21.83	QP
7	PP	1.525	9.73	30.99	46.00	-15.01	Average
8	QP	1.525	9.73	36.25	56.00	-19.75	QP
9	7.170	7.29	9.81	17.10	50.00	-32.90	Average
10	7.170	12.11	9.81	21.92	60.00	-38.08	QP
11	14.110	7.44	9.76	17.20	50.00	-32.80	Average
12	14.110	13.22	9.76	22.98	60.00	-37.02	QP


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Type-C

**Measurement Data**

Live line:

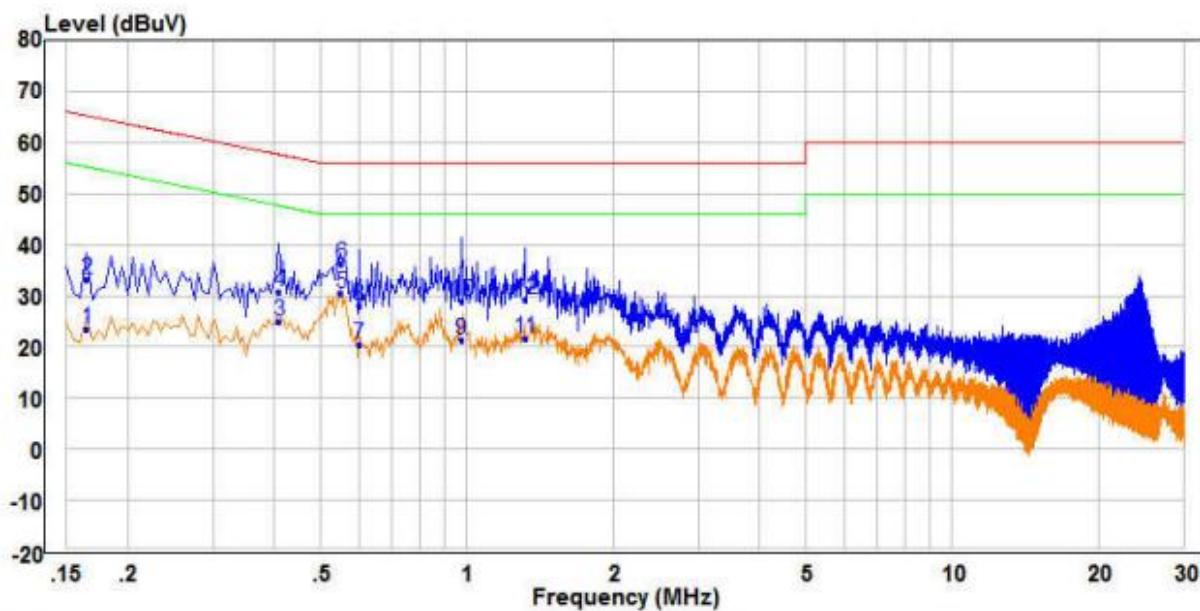


Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz			dBuV	dB		
1	0.165	13.84	9.49	23.33	55.21	-31.88	Average
2	0.165	23.85	9.49	33.34	65.21	-31.87	QP
3	0.410	15.49	9.51	25.00	47.65	-22.65	Average
4	0.410	21.31	9.51	30.82	57.65	-26.83	QP
5 PP	0.550	20.88	9.61	30.49	46.00	-15.51	Average
6 QP	0.550	26.53	9.61	36.14	56.00	-19.86	QP
7	0.600	10.73	9.70	20.43	46.00	-25.57	Average
8	0.600	18.42	9.70	28.12	56.00	-27.88	QP
9	0.975	11.82	9.56	21.38	46.00	-24.62	Average
10	0.975	19.46	9.56	29.02	56.00	-26.98	QP
11	1.315	12.07	9.53	21.60	46.00	-24.40	Average
12	1.315	19.72	9.53	29.25	56.00	-26.75	QP

**Remark:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

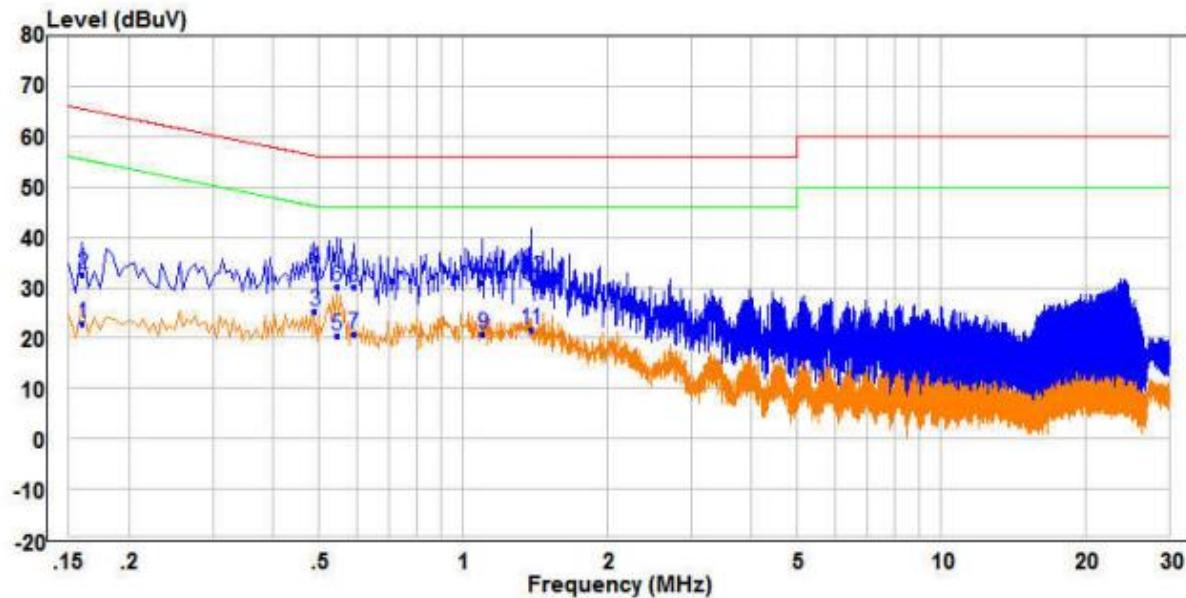


Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase	
	MHz			dBuV	dB			
1	0.160	13.18	9.68	22.86	55.46	-32.60	Average	Neutral
2	0.160	22.82	9.68	32.50	65.46	-32.96	QP	Neutral
3 PP	0.490	15.49	9.69	25.18	46.17	-20.99	Average	Neutral
4 QP	0.490	24.20	9.69	33.89	56.17	-22.28	QP	Neutral
5	0.545	10.62	9.75	20.37	46.00	-25.63	Average	Neutral
6	0.545	20.28	9.75	30.03	56.00	-25.97	QP	Neutral
7	0.590	10.96	9.79	20.75	46.00	-25.25	Average	Neutral
8	0.590	20.31	9.79	30.10	56.00	-25.90	QP	Neutral
9	1.100	11.18	9.71	20.89	46.00	-25.11	Average	Neutral
10	1.100	21.29	9.71	31.00	56.00	-25.00	QP	Neutral
11	1.385	11.86	9.72	21.58	46.00	-24.42	Average	Neutral
12	1.385	22.20	9.72	31.92	56.00	-24.08	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

### 5.3 Other requirements Frequency Hopping Spread Spectrum System

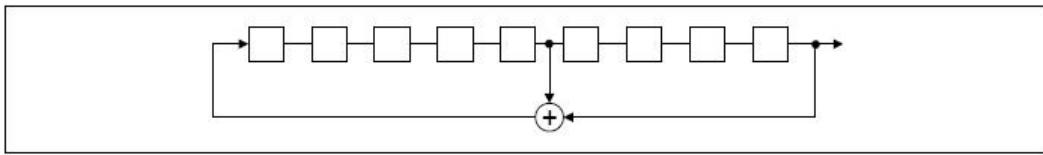Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:																						
	<p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> <p>Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.</p> <p>The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.</p>																						
<b>Compliance for section 15.247(a)(1)</b>																							
<p>According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>Number of shift register stages: 9</li> <li>Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>Longest sequence of zeros: 8 (non-inverted signal)</li> </ul>  <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <table border="1"> <tr> <td>20</td> <td>62</td> <td>46</td> <td>77</td> <td>7</td> <td>64</td> <td>8</td> <td>73</td> <td>16</td> <td>75</td> <td>1</td> </tr> <tr> <td> </td> </tr> </table> <p>Each frequency used equally on the average by each transmitter.</p> <p>According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.</p>		20	62	46	77	7	64	8	73	16	75	1											
20	62	46	77	7	64	8	73	16	75	1													
<b>Compliance for section 15.247(g)</b>																							
<p>According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.</p>																							



**Compliance for section 15.247(h)**

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinate with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

## 5.4 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Peak	100 kHz	300kHz	Peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

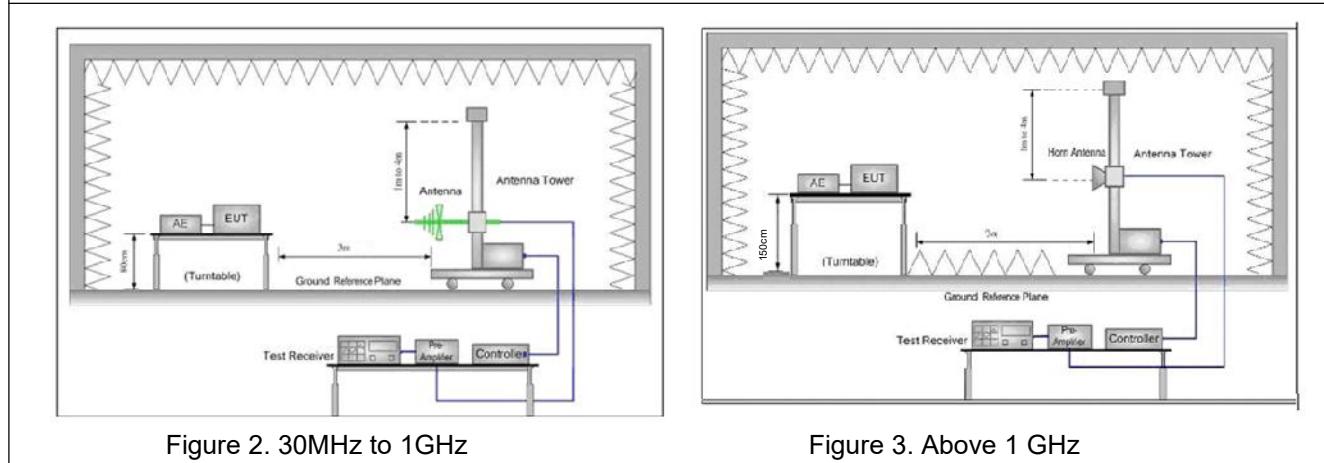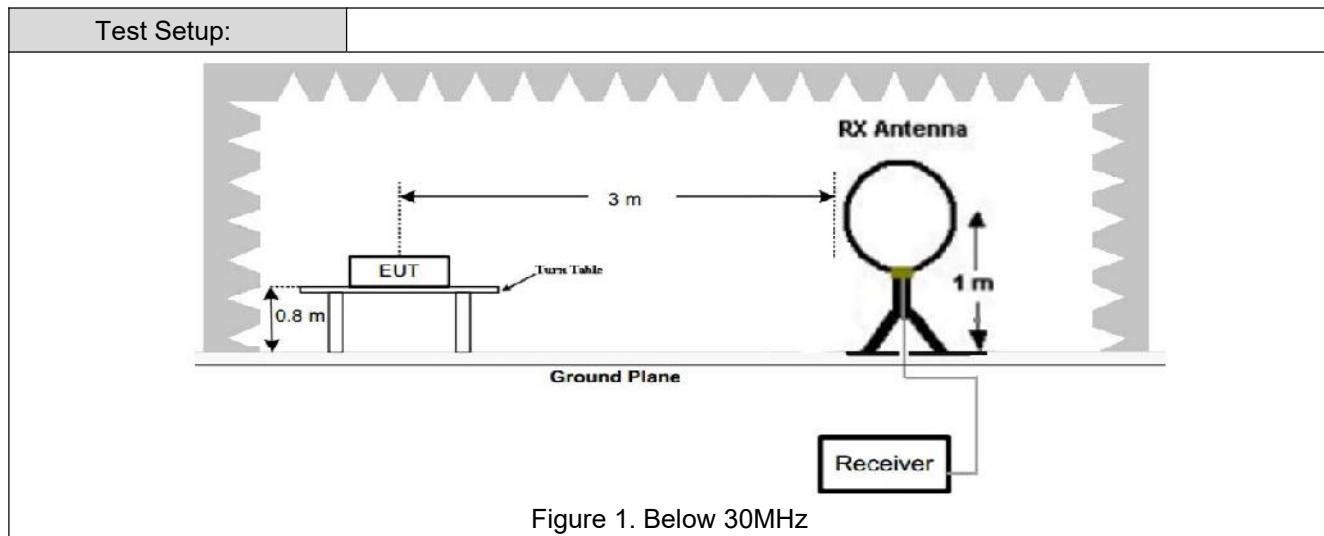


<b>Test Procedure:</b>	<p>a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>Note: For the radiated emission test above 1GHz:  Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p>
------------------------	--

	<ul style="list-style-type: none"> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>g. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
<b>Exploratory Test Mode:</b>	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode
<b>Final Test Mode:</b>	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
<b>Test Results:</b>	Pass

### 5.4.1 Radiated Emission below 1GHz

30MHz~1GHz		
Test mode:	Transmitting	Vertical

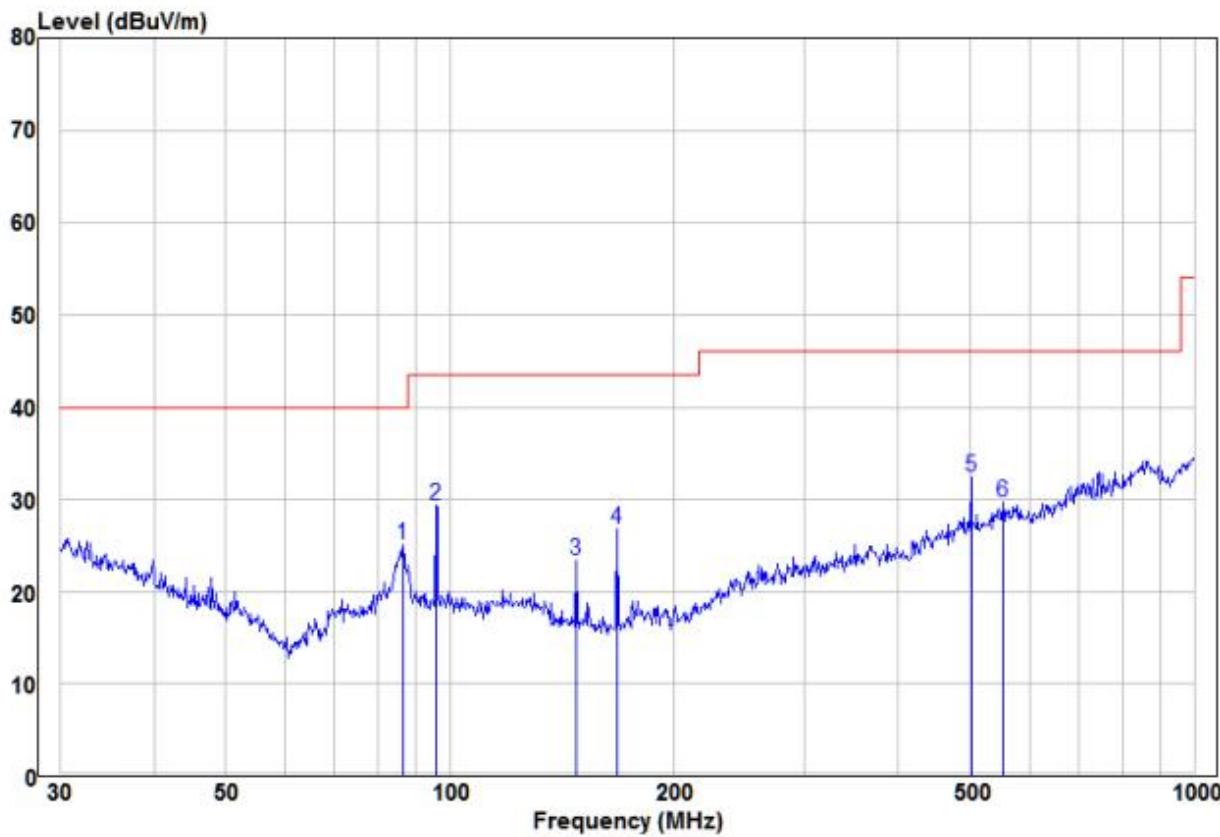

Freq	Read		Limit	Over	Remark	Pol/Phase
	Freq	Level				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	86.50	15.14	9.94	25.08	40.00	-14.92 Peak
2	95.76	18.89	10.39	29.28	43.50	-14.22 Peak
3	147.92	14.90	8.39	23.29	43.50	-20.21 Peak
4	167.82	19.09	7.65	26.74	43.50	-16.76 Peak
5 pp	501.18	14.11	18.29	32.40	46.00	-13.60 Peak
6	552.88	10.94	18.83	29.77	46.00	-16.23 Peak

#### Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

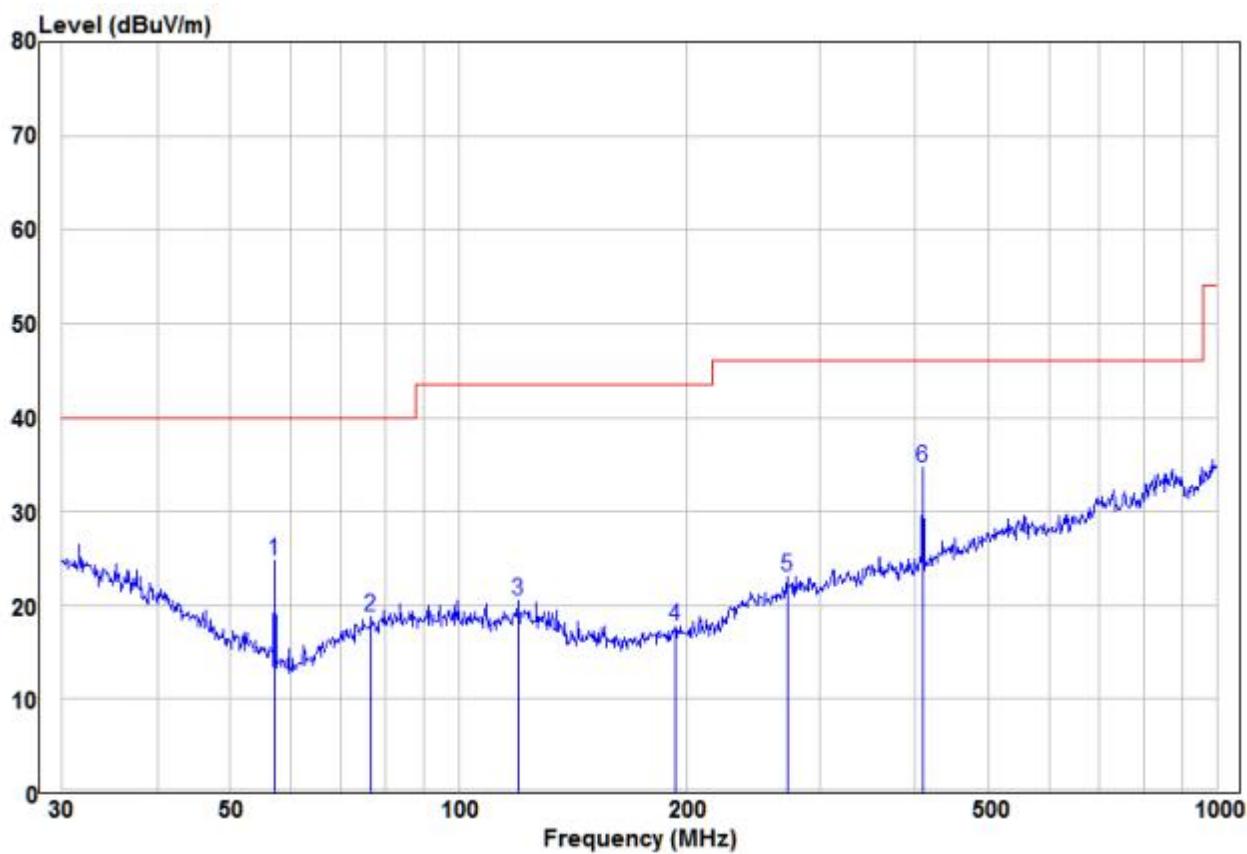

Freq	Read	Factor	Limit		Over	Remark	Pol/Phase
	Freq		Level	Line			
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	57.19	18.58	6.16	24.74	40.00	-15.26	Peak HORIZONTAL
2	76.78	9.54	9.26	18.80	40.00	-21.20	Peak HORIZONTAL
3	119.86	9.70	10.69	20.39	43.50	-23.11	Peak HORIZONTAL
4	193.09	9.56	8.12	17.68	43.50	-25.82	Peak HORIZONTAL
5	271.32	10.31	12.78	23.09	46.00	-22.91	Peak HORIZONTAL
6 pp	408.95	19.24	15.43	34.67	46.00	-11.33	Peak HORIZONTAL

**Remark:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Type-C

Test mode:	Transmitting	Vertical
------------	--------------	----------

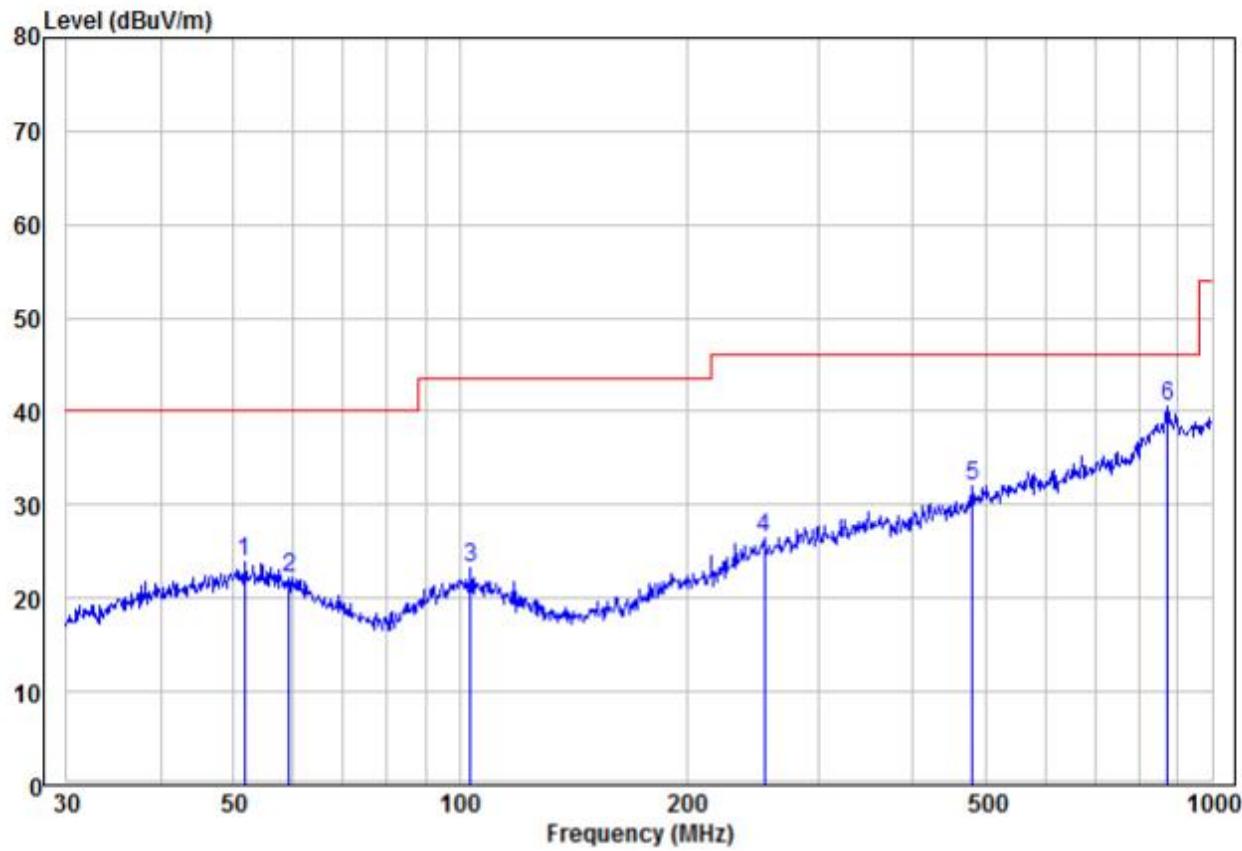

Freq	Read		Limit		Over		Pol/Phase
	Freq	Level	Factor	Level	Line	Limit	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	51.66	10.17	13.79	23.96	40.00	-16.04	Peak VERTICAL
2	59.23	9.20	13.02	22.22	40.00	-17.78	Peak VERTICAL
3	103.44	10.30	12.90	23.20	43.50	-20.30	Peak VERTICAL
4	253.84	10.01	16.48	26.49	46.00	-19.51	Peak VERTICAL
5	480.53	10.77	21.22	31.99	46.00	-14.01	Peak VERTICAL
6 pp	872.18	11.14	29.39	40.53	46.00	-5.47	Peak VERTICAL

**Remark:**


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

Test mode:	Transmitting	Horizontal
------------	--------------	------------

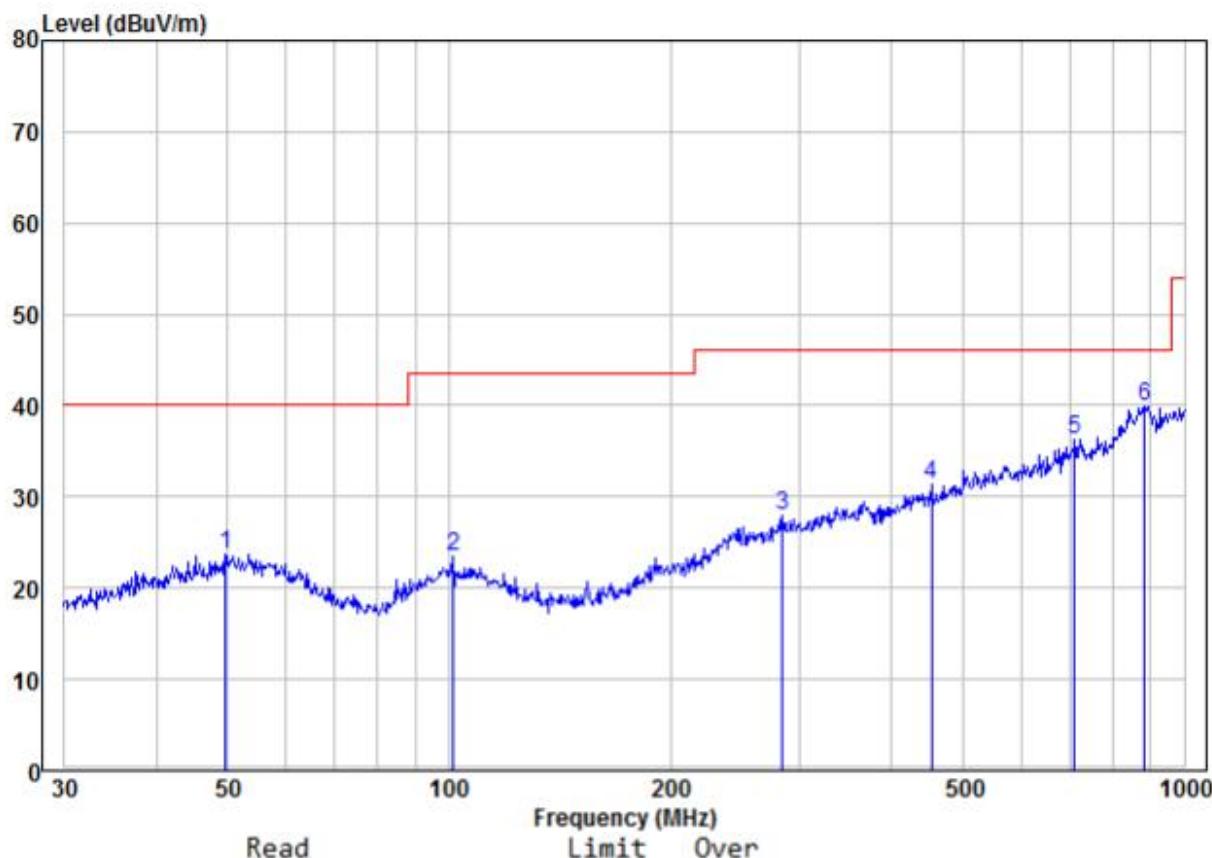

Freq	Read		Limit		Over		Remark	Pol/Phase
	Freq	Level	Factor	Level	Line	Limit		
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	49.71	10.00	13.72	23.72	40.00	-16.28	Peak	HORIZONTAL
2	101.29	10.62	12.95	23.57	43.50	-19.93	Peak	HORIZONTAL
3	283.98	10.59	17.32	27.91	46.00	-18.09	Peak	HORIZONTAL
4	452.72	10.95	20.36	31.31	46.00	-14.69	Peak	HORIZONTAL
5	709.18	11.82	24.46	36.28	46.00	-9.72	Peak	HORIZONTAL
6 pp	884.50	10.39	29.58	39.97	46.00	-6.03	Peak	HORIZONTAL

**Remark:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,


Level = Read Level + Factor,

Over Limit=Level-Limit Line.


## 6 Photographs - EUT Test Setup

### 6.1 Radiated Emission


9KHz~30MHz:

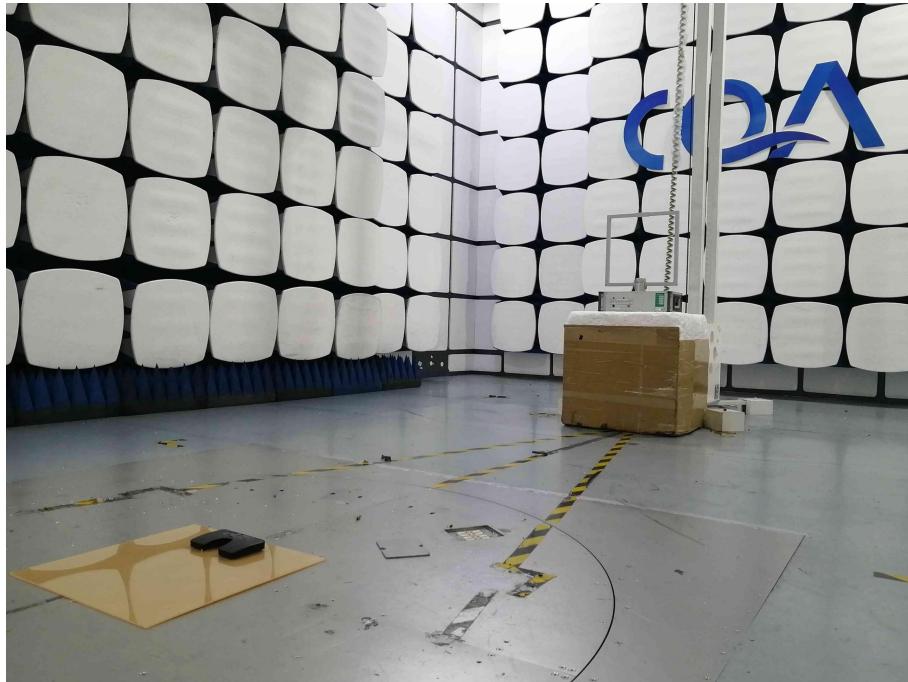

30MHz~1GHz:

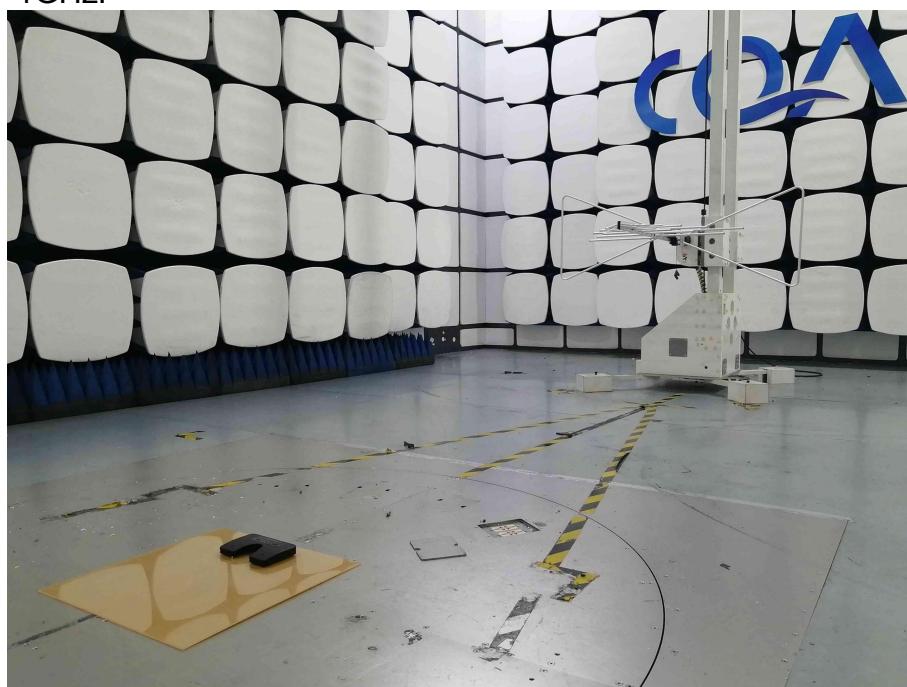

## 6.2 Conducted Emission

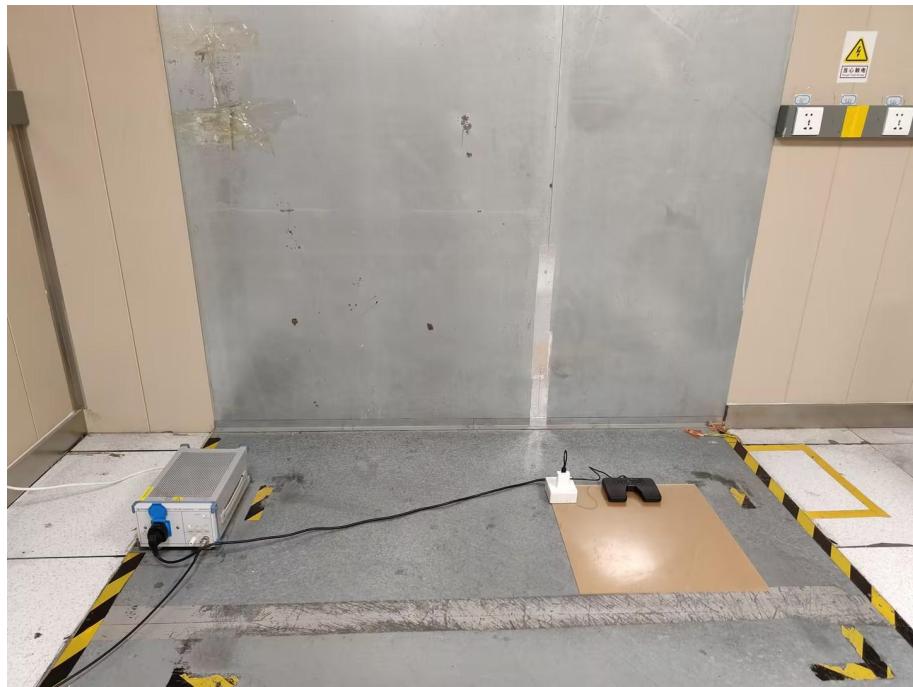

## 7 Photographs - EUT Constructional Details

