



FCC Radio Test Report

FCC ID:2BH7FTBE6500U

This report concerns: Original Grant


Project No. : 2502G010
Equipment : 1) BE6500 Tri-Band Wi-Fi 7 Wireless USB Adapter
2) BE3600 Dual-Band Wi-Fi 7 Wireless USB Adapter
Brand Name : tp-link
Test Model : 1) Archer TBE6500U
Series Model : 2) Archer TBE3600U
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Date of Receipt : Feb. 24, 2025
Date of Test : Feb. 26, 2025 ~ Apr. 02, 2025
Issued Date : Apr. 17, 2025
Report Version : R01
Test Sample : Engineering Sample No.: DG20250224183 and DG20250304416 for AC power line conducted emissions and radiated emissions, DG20250224184 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by

: 
Sheldon Ou

Approved by

: 
Welly Zhou

Room 108-116, 309-310, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	14
3.3 PARAMETERS OF TEST SOFTWARE	16
3.4 DUTY CYCLE	20
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	22
3.6 SUPPORT UNITS	23
3.7 CUSTOMER INFORMATION DESCRIPTION	23
4 . AC POWER LINE CONDUCTED EMISSIONS	24
4.1 LIMIT	24
4.2 TEST PROCEDURE	24
4.3 DEVIATION FROM TEST STANDARD	24
4.4 TEST SETUP	25
4.5 EUT OPERATION CONDITIONS	25
4.6 TEST RESULTS	25
5 . RADIATED EMISSIONS	26
5.1 LIMIT	26
5.2 TEST PROCEDURE	27
5.3 DEVIATION FROM TEST STANDARD	28
5.4 TEST SETUP	29
5.5 EUT OPERATION CONDITIONS	31
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	31
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	31
5.8 TEST RESULTS - ABOVE 1000 MHZ	31
6 . BANDWIDTH	32
6.1 LIMIT	32
6.2 TEST PROCEDURE	32

Table of Contents	Page
6.3 DEVIATION FROM STANDARD	32
6.4 TEST SETUP	32
6.5 EUT OPERATION CONDITIONS	32
6.6 TEST RESULTS	32
7 . MAXIMUM E.I.R.P.	33
7.1 LIMIT	33
7.2 TEST PROCEDURE	33
7.3 DEVIATION FROM STANDARD	33
7.4 TEST SETUP	34
7.5 EUT OPERATION CONDITIONS	34
7.6 TEST RESULTS	34
8 . MAXIMUM POWER SPECTRAL DENSITY (E.I.R.P.)	35
8.1 LIMIT	35
8.2 TEST PROCEDURE	35
8.3 DEVIATION FROM STANDARD	35
8.4 TEST SETUP	36
8.5 EUT OPERATION CONDITIONS	36
8.6 TEST RESULTS	36
9 . IN-BAND EMISSION (MASK)	37
9.1 LIMIT	37
9.2 TEST PROCEDURE	38
9.3 DEVIATION FROM STANDARD	38
9.4 TEST SETUP	38
9.5 EUT OPERATION CONDITIONS	38
9.6 TEST RESULTS	38
10 . CONTENTION BASED PROTOCOL	39
10.1 LIMIT	39
10.2 TEST PROCEDURE	39
10.3 DEVIATION FROM STANDARD	40
10.4 TEST SETUP	40
10.5 EUT OPERATION CONDITIONS	40
10.6 TEST RESULTS	40
11 . LIST OF MEASURING EQUIPMENTS	41
12 . EUT TEST PHOTOS	44

Table of Contents	Page
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	51
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	54
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	59
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	62
APPENDIX E - BANDWIDTH	161
APPENDIX F - MAXIMUM E.I.R.P.	290
APPENDIX G - MAXIMUM POWER SPECTRAL DENSITY (E.I.R.P.)	307
APPENDIX H - IN-BAND EMISSION (MASK)	388
APPENDIX I - CONTENTION BASED PROTOCOL	421

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-4-2502G010	R00	Original Report.	Apr. 16, 2025	Invalid
BTL-FCCP-4-2502G010	R01	Modified the comments of TCB.	Apr. 17, 2025	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 987594 D02 U-NII 6GHz EMC Measurement v03

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum e.i.r.p.	APPENDIX F	PASS	-----
15.407(a)	Maximum Power Spectral Density (e.i.r.p.)	APPENDIX G	PASS	-----
15.407(b)	In-Band Emission (Mask)	APPENDIX H	PASS	-----
15.407(d)	Contention Based Protocol	APPENDIX I	PASS	-----
15.407(g)	Frequency Stability	-----	NOTE (4)	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) Device Type:
 - 6ID: Indoor access point
 - 6PP: Subordinate device (operating under control of a low-power indoor access point)
 - 6XD: Indoor client (operating under control of a low-power indoor access point)
 - 6CD: Dual client (operating under control of either a low-power indoor access point or standard power access point)
 - 6SD: Standard power access point
 - 6FX: Standard client (operating under control of a Standard power access point)
 - 6FC: Fixed client (operating under control of a Standard power access point)
- (4) The item is declared by the manufacturer.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For Radiated Emissions Above 30MHz Items: Room 102 & Room 702, Building 3, No.9, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

For Other Items: 1-2/F, 4/F, Building A, 1-2/F, Building B, 3/F, Building C, No.3, Jinshagang 1st Road, Dalang Town, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-C02	CISPR	150kHz ~ 30MHz	2.88

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB01	CISPR	9kHz ~ 30MHz	2.36

Test Site	Method	Measurement Frequency Range	Ant. H / V	$U_{\text{(dB)}}$
DG-CB17 (3m)	CISPR	30MHz ~ 200MHz	V	4.22
		30MHz ~ 200MHz	H	3.46
		200MHz ~ 1,000MHz	V	5.02
		200MHz ~ 1,000MHz	H	4.22

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB18 (3m)	CISPR	1GHz ~ 6GHz	4.48
		6GHz ~ 18GHz	3.88

Test Site	Method	Measurement Frequency Range	$U_{\text{(dB)}}$
DG-CB17 (1m)	CISPR	18 ~ 26.5 GHz	3.56
		26.5 ~ 40 GHz	3.54

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.90 %
Maximum e.i.r.p.	1.3 dB
Maximum Power Spectral Density (e.i.r.p.)	1.4 dB
Temperature	0.8 °C
Humidity	2.2 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	22°C	53%	AC 120V/60Hz	Hayden Chen	Mar. 12, 2025
Radiated Emissions -9kHz to 30 MHz	22°C	46%	DC 5V	Hayden Chen	Mar. 13, 2025
Radiated Emissions -30MHz to 1000MHz	24°C	48%	DC 5V	Calvin Wen	Mar. 10, 2025
Radiated Emissions-Above 1000 MHz	23°C	48%	DC 5V	Drew Tan	Mar. 14, 2025
	22°C	50%	DC 5V	Drew Tan	Mar. 18, 2025
	22°C	50%	DC 5V	Drew Tan	Mar. 29, 2025
	25°C	46%	DC 5V	Calvin Wen	Mar. 11, 2025
Bandwidth	20-24°C	48-55%	DC 5V	Ilya Zhang	Mar. 12, 2025-Mar. 31, 2025
Maximum e.i.r.p.	25°C	60%	DC 5V	Meers Zhang Alex Yin	Mar. 21, 2025
Maximum Power Spectral Density (e.i.r.p.)	20-24°C	48-55%	DC 5V	Ilya Zhang	Mar. 12, 2025-Mar. 31, 2025
In-Band Emission (Mask)	20-24°C	48-55%	DC 5V	Ilya Zhang	Mar. 12, 2025-Mar. 31, 2025
Contention Based Protocol	19°C	55%	DC 5V	Ilya Zhang	Apr. 02, 2025

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	1) BE6500 Tri-Band Wi-Fi 7 Wireless USB Adapter 2) BE3600 Dual-Band Wi-Fi 7 Wireless USB Adapter	
Brand Name	tp-link	
Test Model	1) Archer TBE6500U	
Series Model	2) Archer TBE3600U	
Model Difference(s)	Archer TBE3600U has the same hardware as Archer TBE6500U, only 6G is turned off in software.	
Software Version	5002.24.117.4	
Hardware Version	1.0	
Power Source	Supplied from PC USB port.	
Power Rating	DC 5V	
Frequency Range	U-NII 5: 5925 MHz ~ 6425 MHz U-NII 6: 6425 MHz ~ 6525 MHz U-NII 7: 6525 MHz ~ 6875 MHz U-NII 8: 6875 MHz ~ 7125 MHz	
Operation Frequency	UNII-5: 5955 MHz ~ 6415 MHz UNII-6: 6425 MHz ~ 6515 MHz UNII-7: 6525 MHz ~ 6875 MHz UNII-8: 6895 MHz ~ 7095 MHz	
Modulation Technology	IEEE 802.11ax/be: OFDMA	
Bit Rate of Transmitter	IEEE 802.11ax: up to 2402 Mbps IEEE 802.11be: up to 2882 Mbps	
NSS1	Maximum e.i.r.p. UNII-5	IEEE 802.11be(EHT160): 15.36 dBm (0.0344 W)
	Maximum e.i.r.p. UNII-6	IEEE 802.11be(EHT160): 15.54 dBm (0.0358 W)
	Maximum e.i.r.p. UNII-7	IEEE 802.11be(EHT160): 15.07 dBm (0.0321 W)
	Maximum e.i.r.p. UNII-8	IEEE 802.11ax(HE160): 16.19 dBm (0.0416 W)
NSS2	Maximum e.i.r.p. UNII-5	IEEE 802.11ax(HE160): 18.88 dBm (0.0773 W)
	Maximum e.i.r.p. UNII-6	IEEE 802.11be(EHT160): 19.00 dBm (0.0794 W)
	Maximum e.i.r.p. UNII-7	IEEE 802.11be(EHT160): 18.22 dBm (0.0664 W)
	Maximum e.i.r.p. UNII-8	IEEE 802.11be(EHT160): 18.93 dBm (0.0782 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

UNII-5							
IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5955	3	5965	7	5985	15	6025
5	5975	11	6005	23	6065	47	6185
9	5995	19	6045	39	6145	79	6345
13	6015	27	6085	55	6225		
17	6035	35	6125	71	6305		
21	6055	43	6165	87	6385		
25	6075	51	6205				
29	6095	59	6245				
33	6115	67	6285				
37	6135	75	6325				
41	6155	83	6365				
45	6175	91	6405				
49	6195						
53	6215						
57	6235						
61	6255						
65	6275						
69	6295						
73	6315						
77	6335						
81	6355						
85	6375						
89	6395						
93	6415						

UNII-6							
IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
97	6435	99	6445	103	6465	111	6505
101	6455	107	6485				
105	6475	115	6525				
109	6495						
113	6515						

UNII-7							
IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
117	6535	123	6565	119	6545	143	6665
121	6555	131	6605	135	6625	175	6825
125	6575	139	6645	151	6705		
129	6595	147	6685	167	6785		
133	6615	155	6725	183	6865		
137	6635	163	6765				
141	6655	171	6805				
145	6675	179	6845				
149	6695						
153	6715						
157	6735						
161	6755						
165	6775						
169	6795						
173	6815						
177	6835						
181	6855						

UNII-8							
IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)		IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)		IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)		IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
185	6875	187	6885	199	6945	207	6985
189	6895	195	6925	215	7025		
193	6915	203	6965				
197	6935	211	7005				
201	6955	219	7045				
205	6975	227	7085				
209	6995						
213	7015						
217	7035						
221	7055						
225	7075						
229	7095						

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	tp-link	2052500895	Monopole	N/A	2.58
2	tp-link	2052500895	Monopole	N/A	3.00

Note:

- 1) This EUT supports CDD, and all antenna gains are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=3.00.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$ and $N_{SS} = 2$.
So the $N_{SS} = 1$ Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 3 + 10\log(2/1)\text{dBi} = 6.01$;
the $N_{SS} = 2$ Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 3 + 10\log(2/2)\text{dBi} = 3.00$.
- 2) Beamforming Gain: 3dB.

4. Operating Mode and Antenna Configuration:

Operating Mode / TX Mode	2TX
IEEE 802.11ax(HE20)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE40)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE80)	V(Ant. 1 + Ant. 2)
IEEE 802.11ax(HE160)	V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT20)	V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT40)	V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT80)	V(Ant. 1 + Ant. 2)
IEEE 802.11be(EHT160)	V(Ant. 1 + Ant. 2)

3.2 TEST MODES

Test Items	Test Mode	Channel	Note
AC Power Line Conducted Emissions	IEEE 802.11be(EHT160)	111	-
Radiated Emissions-9kHz to 30MHz	IEEE 802.11be(EHT160)	111	-
Radiated Emissions-30MHz to 1000MHz	IEEE 802.11be(EHT160)	111	-
Radiated Emissions-Above 1000 MHz	IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)	1,229	Bandedge
	IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)	3,227	
	IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	7,215	
	IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	15,207	
	IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)	1/45/93, 97/105/113, 117/149/181, 185/209/229	Harmonic
	IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)	3/43/91, 99/107/115, 123/155/179, 187/211/227	
	IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	7/39/87, 103, 119/151/183, 199/215	
	IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	15/47/79, 111, 143/175, 207	
Bandwidth. & Maximum e.i.r.p. & Maximum Power Spectral Density(e.i.r.p.) & In - Band Emission(Mask)	IEEE 802.11ax(HE20) IEEE 802.11be(EHT20)	1/45/93, 97/105/113, 117/149/181, 185/209/229	-
	IEEE 802.11ax(HE40) IEEE 802.11be(EHT40)	3/43/91, 99/107/115, 123/155/179, 187/211/227	
	IEEE 802.11ax(HE80) IEEE 802.11be(EHT80)	7/39/87, 103, 119/151/183, 199/215	
	IEEE 802.11ax(HE160) IEEE 802.11be(EHT160)	15/47/79, 111, 143/175, 207	
Contention Based Protocol	IEEE 802.11be(EHT20)	45, 105, 149, 213	-
	IEEE 802.11be(EHT160)	47, 111, 143, 207	
	IEEE 802.11be(EHT320)	63, 95, 159, 191	

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11be(EHT160) channel 111 is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical for Band edge, Horizontal for Harmonic. In this report only recorded the worst case.
- (6) The RF Output Power of the Beamforming mode will be lower than that of the Non Beamforming mode. Only Non Beamforming mode will be evaluated and recorded in the report.
- (7) IEEE 802.11ax mode and IEEE 802.11be mode only support full RU, so only the full RU is evaluated and measured inside report.

3.3 PARAMETERS OF TEST SOFTWARE

NSS1

UNII-5			
Test Software Version	RTL8922A_USB_MP_Package_v2.0.44		
Frequency (MHz)	5955	6175	6415
IEEE 802.11ax(HE20)	0	1	2.5
IEEE 802.11be(EHT20)	-5	1	2
Frequency (MHz)	5965	6165	6405
IEEE 802.11ax(HE40)	2.5	3.5	4.5
IEEE 802.11be(EHT40)	2.5	3.5	4.5
Frequency (MHz)	5985	6145	6385
IEEE 802.11ax(HE80)	5.5	6.5	7.5
IEEE 802.11be(EHT80)	6	7	7.5
Frequency (MHz)	6025	6185	6345
IEEE 802.11ax(HE160)	8.5	9	9.5
IEEE 802.11be(EHT160)	8.5	8.5	9.5

UNII-6

Test Software Version	RTL8922A_USB_MP_Package_v2.0.44		
Frequency (MHz)	6435	6475	6515
IEEE 802.11ax(HE20)	2.5	2.5	1
IEEE 802.11be(EHT20)	2	2	1
Frequency (MHz)	6445	6485	6525
IEEE 802.11ax(HE40)	5	4.5	4
IEEE 802.11be(EHT40)	4.5	4.5	4
Frequency (MHz)	6465		
IEEE 802.11ax(HE80)	7.5		
IEEE 802.11be(EHT80)	7.5		
Frequency (MHz)	6505		
IEEE 802.11ax(HE160)	9.5		
IEEE 802.11be(EHT160)	9.5		

UNII-7			
Test Software Version	RTL8922A_USB_MP_Package_v2.0.44		
Frequency (MHz)	6535	6695	6855
IEEE 802.11ax(HE20)	0.5	-0.5	-0.5
IEEE 802.11be(EHT20)	0.5	-1.5	-0.5
Frequency (MHz)	6565	6725	6845
IEEE 802.11ax(HE40)	2.5	1.5	2.5
IEEE 802.11be(EHT40)	2	2	2
Frequency (MHz)	6545	6705	6865
IEEE 802.11ax(HE80)	6.5	5	5.5
IEEE 802.11be(EHT80)	6	5	5.5
Frequency (MHz)	6665	6825	
IEEE 802.11ax(HE160)	8	8	
IEEE 802.11be(EHT160)	8	8	

UNII-8			
Test Software Version	RTL8922A_USB_MP_Package_v2.0.44		
Frequency (MHz)	6875	6995	7095
IEEE 802.11ax(HE20)	-0.5	1	4.5
IEEE 802.11be(EHT20)	-0.5	1	5
Frequency (MHz)	6925	7005	7085
IEEE 802.11ax(HE40)	3	4	3.5
IEEE 802.11be(EHT40)	3	4.5	4
Frequency (MHz)	6945	7025	
IEEE 802.11ax(HE80)	7	7	
IEEE 802.11be(EHT80)	7	7	
Frequency (MHz)	6985		
IEEE 802.11ax(HE160)	10		
IEEE 802.11be(EHT160)	10		

NSS2

UNII-5			
Test Software Version	RTL8922A_USB_MP_Package_v2.0.44		
Frequency (MHz)	5955	6175	6415
IEEE 802.11ax(HE20)	3	4	5
IEEE 802.11be(EHT20)	3	3.5	5
Frequency (MHz)	5965	6165	6405
IEEE 802.11ax(HE40)	6	7	8
IEEE 802.11be(EHT40)	5	5.5	8
Frequency (MHz)	5985	6145	6385
IEEE 802.11ax(HE80)	8.5	9.5	11
IEEE 802.11be(EHT80)	8.5	9	10.5
Frequency (MHz)	6025	6185	6345
IEEE 802.11ax(HE160)	11.5	11.5	13
IEEE 802.11be(EHT160)	11	11	13

UNII-6

Test Software Version	RTL8922A_USB_MP_Package_v2.0.44		
Frequency (MHz)	6435	6475	6515
IEEE 802.11ax(HE20)	5	5	3.5
IEEE 802.11be(EHT20)	5.5	5.5	4.5
Frequency (MHz)	6445	6485	6525
IEEE 802.11ax(HE40)	8	8	7
IEEE 802.11be(EHT40)	8	7.5	7
Frequency (MHz)	6465		
IEEE 802.11ax(HE80)	11		
IEEE 802.11be(EHT80)	11		
Frequency (MHz)	6505		
IEEE 802.11ax(HE160)	13		
IEEE 802.11be(EHT160)	13		

UNII-7			
Test Software Version	RTL8922A_USB_MP_Package_v2.0.44		
Frequency (MHz)	6535	6695	6855
IEEE 802.11ax(HE20)	4	2.5	3
IEEE 802.11be(EHT20)	4.5	2.5	2.5
Frequency (MHz)	6565	6725	6845
IEEE 802.11ax(HE40)	6	5	5.5
IEEE 802.11be(EHT40)	6	5	5
Frequency (MHz)	6545	6705	6865
IEEE 802.11ax(HE80)	9.5	8	8.5
IEEE 802.11be(EHT80)	9.5	8	8
Frequency (MHz)	6665	6825	
IEEE 802.11ax(HE160)	11.5	11.5	
IEEE 802.11be(EHT160)	11	11.5	


UNII-8			
Test Software Version	RTL8922A_USB_MP_Package_v2.0.44		
Frequency (MHz)	6875	6995	7095
IEEE 802.11ax(HE20)	3.5	4.5	7.5
IEEE 802.11be(EHT20)	3	4.5	7
Frequency (MHz)	6925	7005	7085
IEEE 802.11ax(HE40)	6	7.5	6.5
IEEE 802.11be(EHT40)	6	7	6.5
Frequency (MHz)	6945	7025	
IEEE 802.11ax(HE80)	10	10	
IEEE 802.11be(EHT80)	10	9.5	
Frequency (MHz)	6985		
IEEE 802.11ax(HE160)	13		
IEEE 802.11be(EHT160)	13		


3.4 DUTY CYCLE



If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)	1/On Time (B)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)	1/B Minimum VBW (kHz)
IEEE 802.11ax(HE20)	4.449	1	4.449	4.552	97.74%	0.10	0.225
IEEE 802.11ax(HE40)	2.260	1	2.260	2.364	95.60%	0.20	0.442
IEEE 802.11ax(HE80)	2.160	1	2.160	2.265	95.36%	0.21	0.463
IEEE 802.11ax(HE160)	1.376	1	1.376	1.430	96.22%	0.17	0.727
IEEE 802.11be(EHT20)	4.455	1	4.455	4.561	97.68%	0.10	0.224
IEEE 802.11be(EHT40)	2.268	1	2.268	2.371	95.66%	0.19	0.441
IEEE 802.11be(EHT80)	2.168	1	2.168	2.270	95.51%	0.20	0.461
IEEE 802.11be(EHT160)	1.383	1	1.383	1.437	96.24%	0.17	0.723

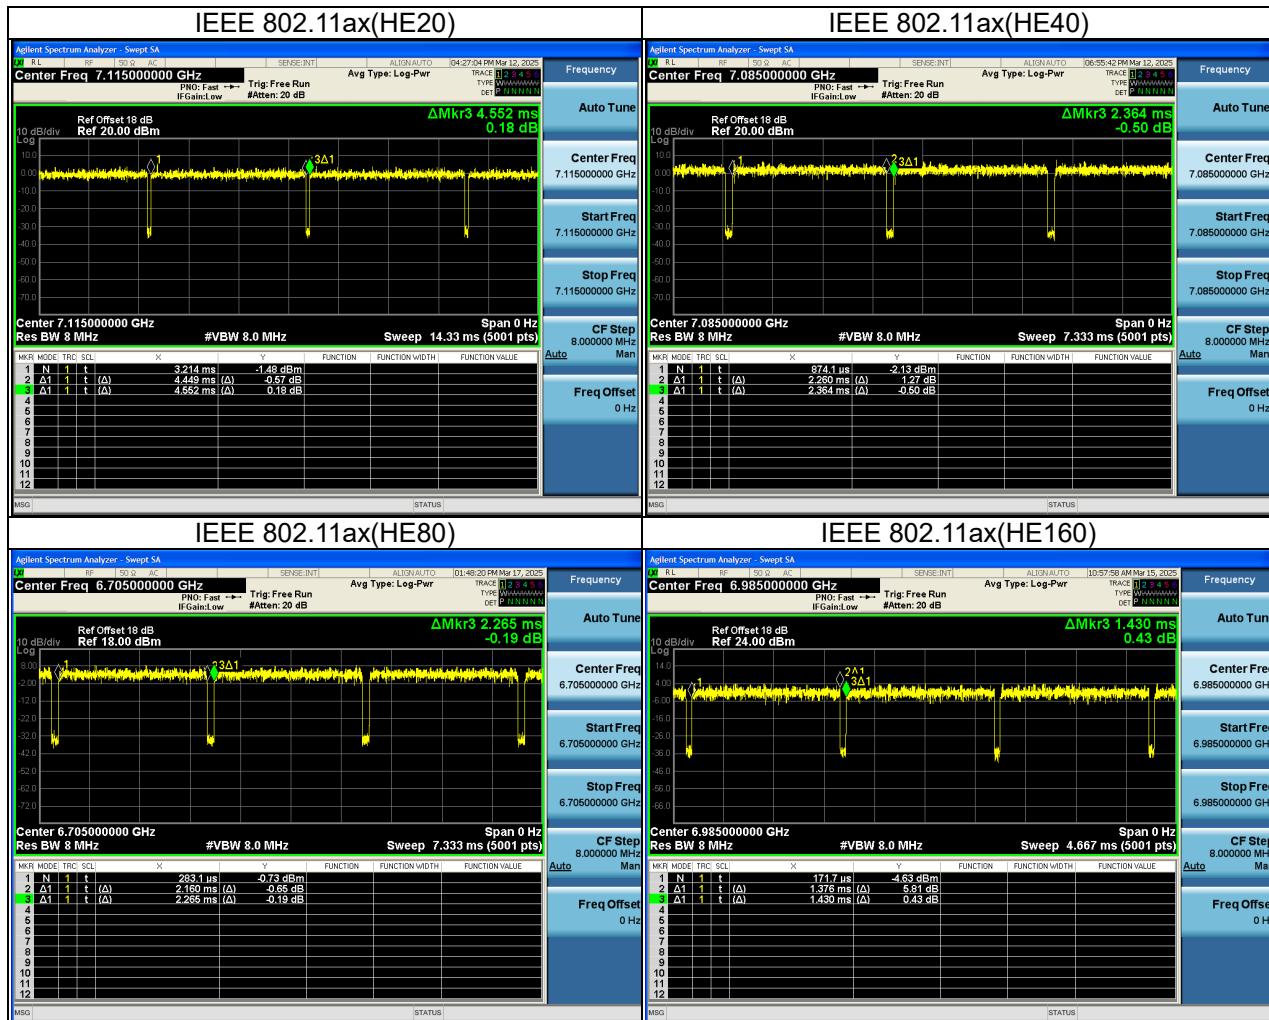

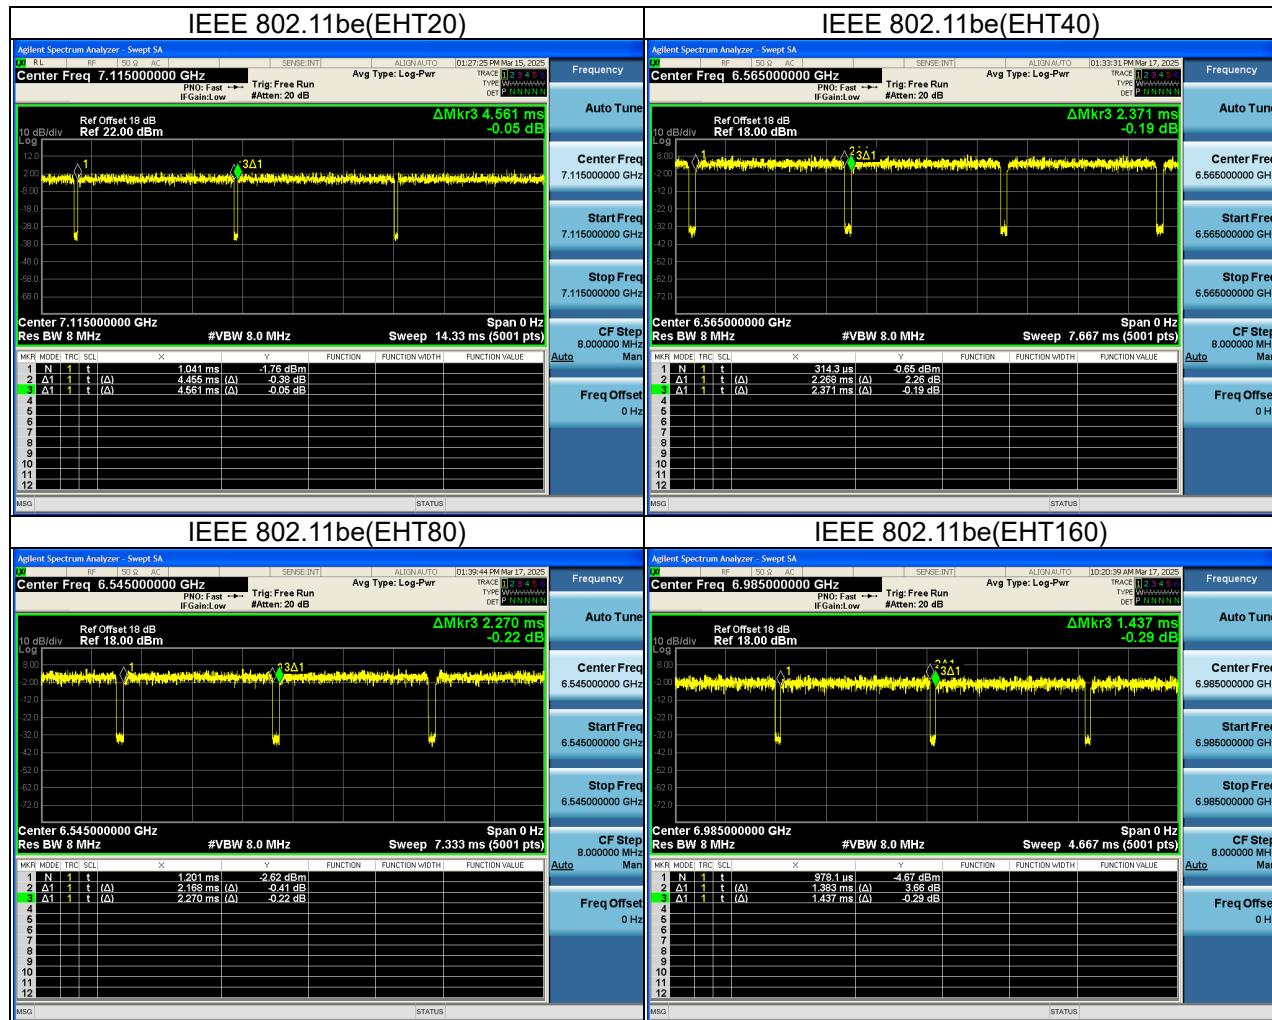

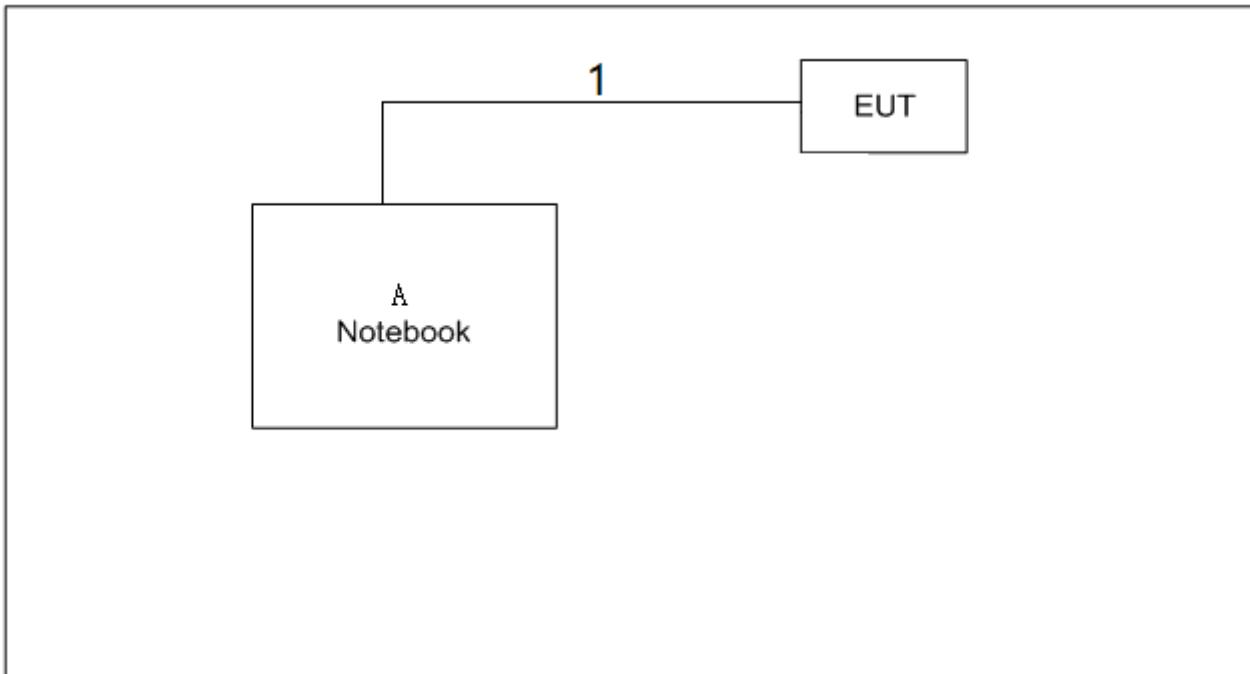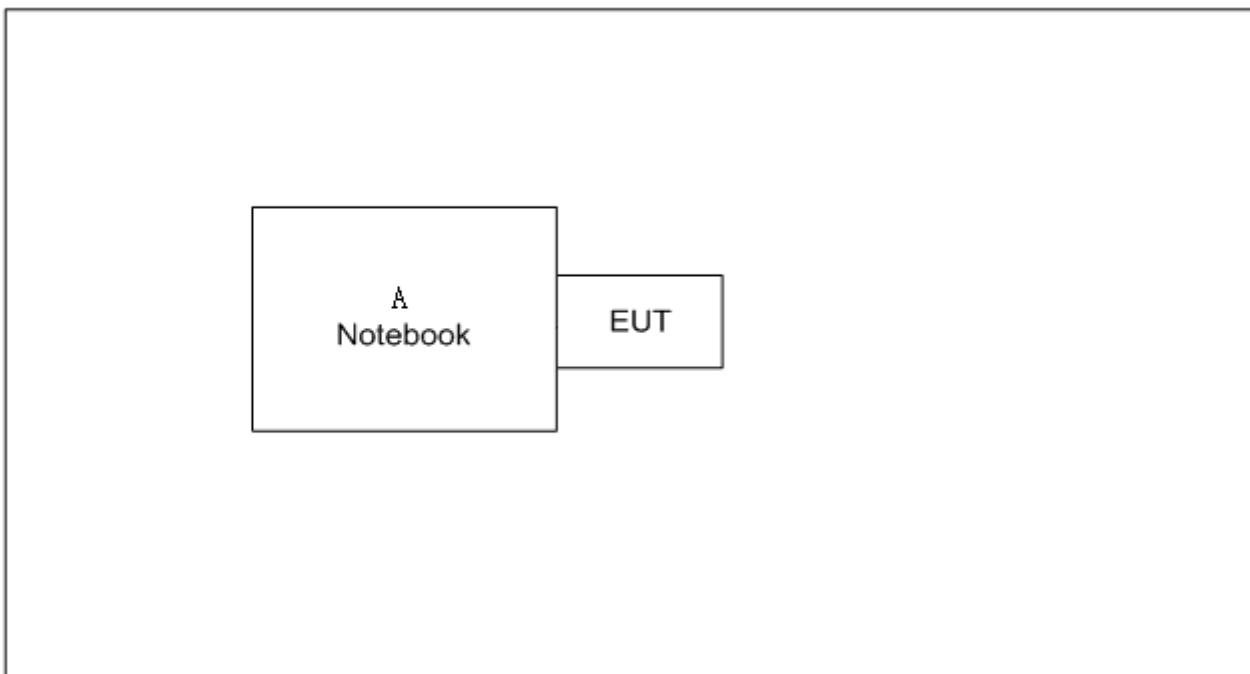3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED**For Radiated Emissions 1-18GHz Item****For Other Items**

3.6 SUPPORT UNITS

For Radiated Emissions 1-18GHz Item

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	INSPIRON 5493	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	USB Cable	NO	NO	0.8m

For Other Items

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	INSPIRON 5493	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
-	-	-	-	-

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

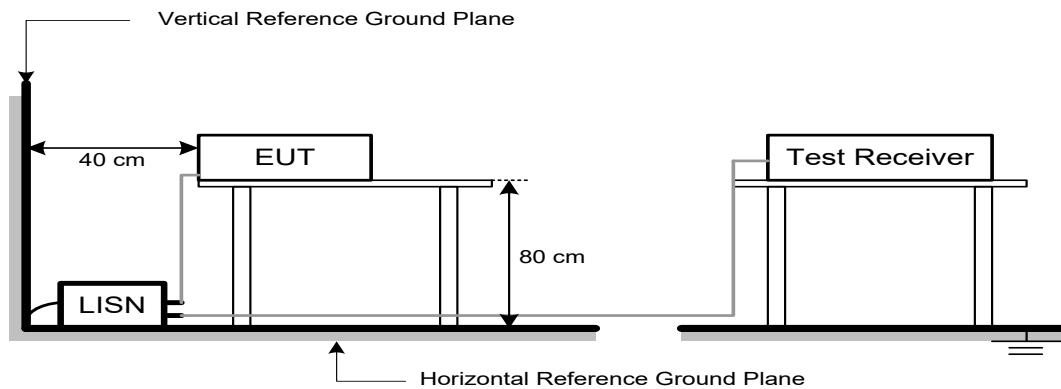

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

According to 15.407(b)(6) the limits are as follows:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz) AND UNWANTED EMISSION WITHIN THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Maximum field strength Limit at 3m (dB μ V/m)	Maximum field strength Limit at 1m (dB μ V/m)
5925-7125	Average: -27	68.2	77.7 (Note 2)

NOTE:

(1) e.i.r.p. Limit (dB μ V/m at 3m) = Power Limit(dBm) + 95.2. (Referring to FCC KDB 987594 D02, clause G.2.d)(iii))

(2)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

20log (d_{limit}/d_{measure})=20log (3/1)=9.5 dB.

FS_{limit}: Harmonic at 3m Peak and Average limit.

FS_{max}: Harmonic at 1m Peak and Average Maximum value.

d_{limit}: Harmonic at 3m test distance.

d_{measure}: Harmonic Actual test distance.

5.2 TEST PROCEDURE

For measurements below 30 MHz:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

For measurements 30 MHz to 40 GHz:

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(30MHz to 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (30MHz to 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

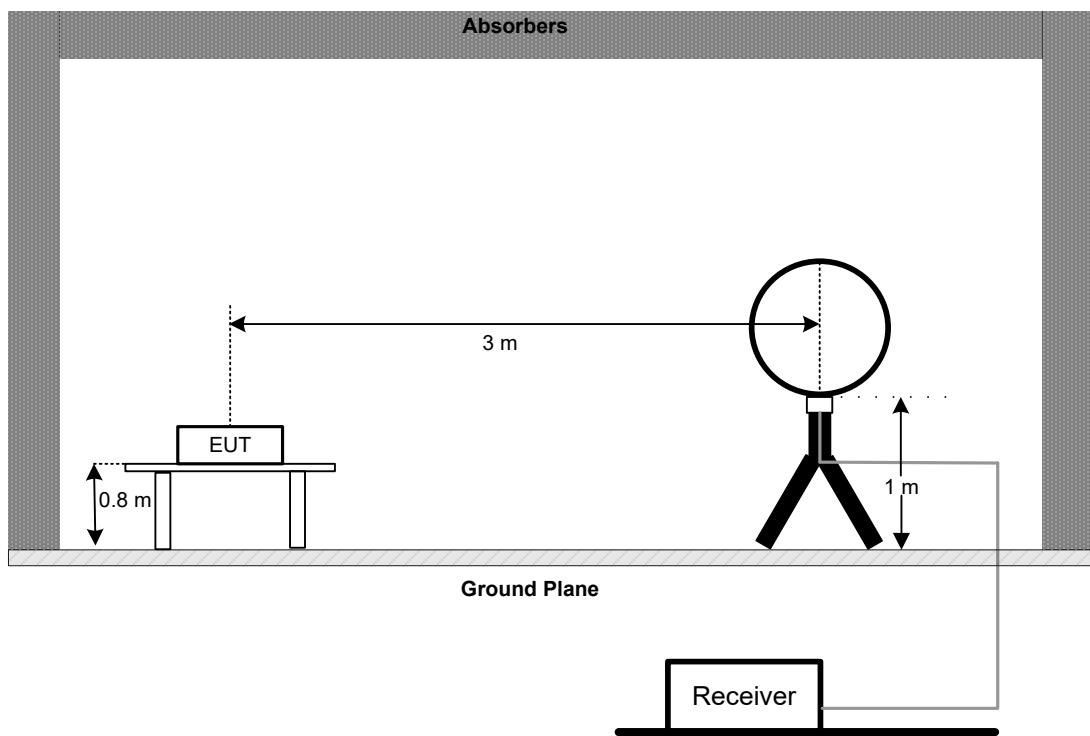


30 MHz to 1 GHz

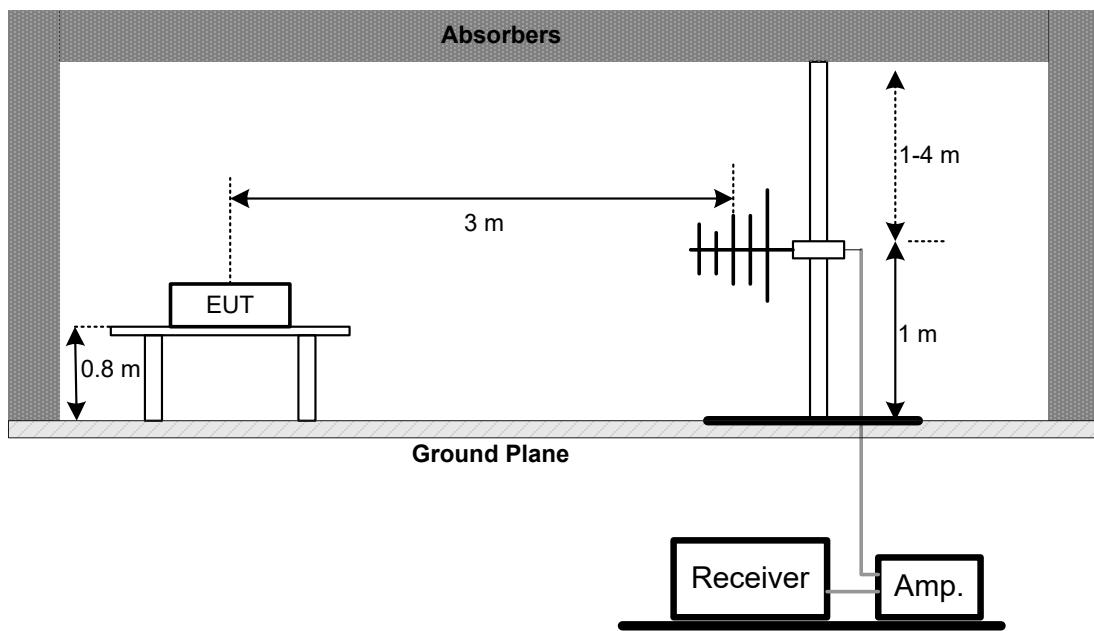

**Above 1 GHz
Band edge & Harmonic (1 GHz to 18 GHz)**

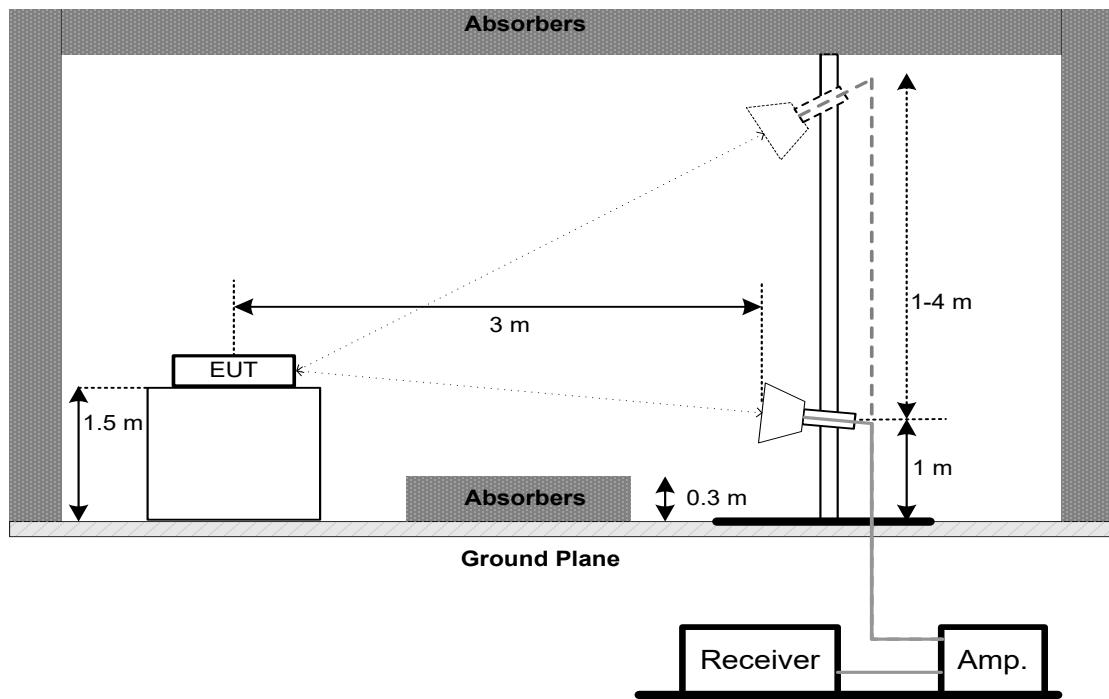

Harmonic (18 GHz to 40 GHz)

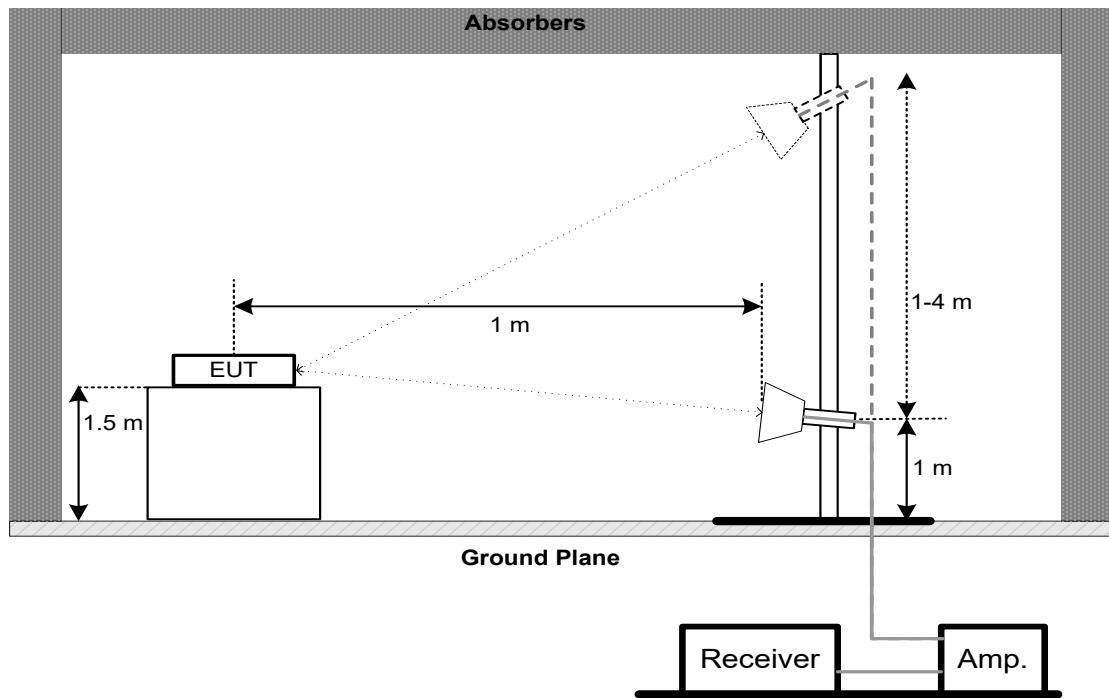

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	26 dB Bandwidth	Maximum 320 MHz	5925-7125

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:
For 26 dB Bandwidth:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- Measured the spectrum width with power higher than 26 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM E.I.R.P.

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum e.i.r.p.	Standard power access point and fixed client device 36 dBm	5925-6425 6525-6875
		Indoor access point 30 dBm	
		Subordinate device operating under the control of an indoor access point 30 dBm	
		Client devices operating under the control of a standard power access point 30 dBm	
		Client devices operating under the control of an indoor access point 24 dBm	6425-6525 6875-7125
		Indoor access point 30 dBm	
		Subordinate device operating under the control of an indoor access point 30 dBm	
		Client devices operating under the control of an indoor access point 24 dBm	


7.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

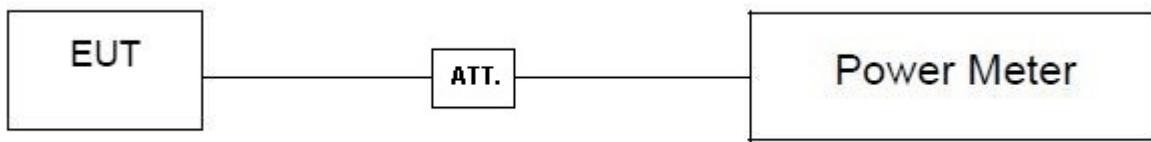

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. MAXIMUM POWER SPECTRAL DENSITY (E.I.R.P.)

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Power Spectral Density (e.i.r.p.)	Standard power access point and fixed client device 23 dBm/MHz	5925-6425 6525-6875
		Indoor access point 5 dBm/MHz	
		Subordinate device operating under the control of an indoor access point 5 dBm/MHz	
		Client devices operating under the control of a standard power access point 17 dBm/MHz	
		Client devices operating under the control of an indoor access point -1 dBm/MHz	6425-6525 6875-7125
		Indoor access point 5 dBm/MHz	
		Subordinate device operating under the control of an indoor access point 5 dBm/MHz	
		Client devices operating under the control of an indoor access point -1 dBm/MHz	

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.


9. IN-BAND EMISSION (MASK)

9.1 LIMIT

Section	Test Item	Frequency Range (MHz)	(X) dBc (Note 1)
FCC 15.407(b)	In-Band Emission (Mask)	At 1MHz outside of channel edge	20
		At one channel bandwidth from the channel center (Note 2)	28
		At one- and one-half times the channel bandwidth away from channel center (Note 3)	40
		More than one- and one-half times the channel bandwidth	40

Note:

1. The power spectral density must be suppressed by "X" dB.
2. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression.
3. At frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression.

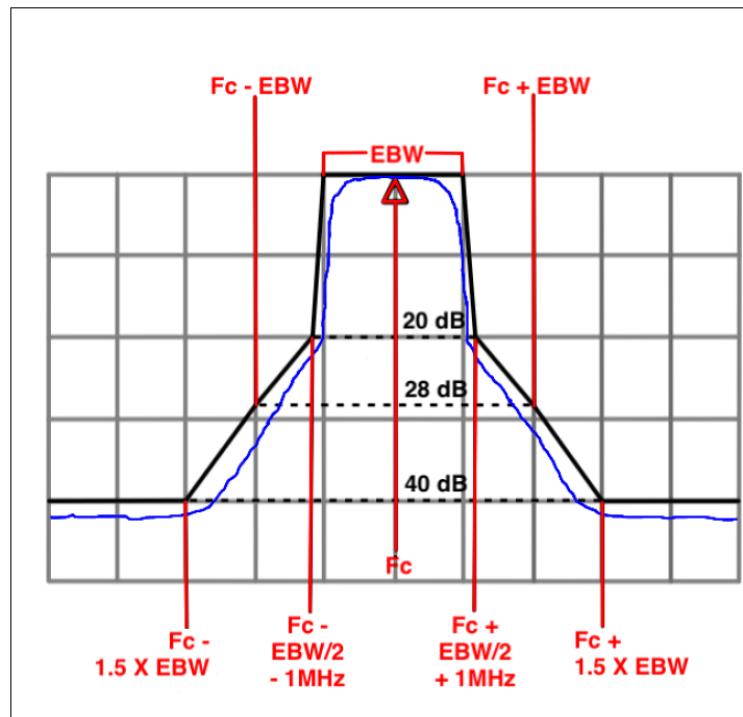

9.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromixately 1% of the emission bandwidth
VBW	$\geq 3 \times \text{RBW}$
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. CONTENTION BASED PROTOCOL

10.1 LIMIT

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. (See note)

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

10.2 TEST PROCEDURE

Number of times detection threshold:

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1}=f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel

Where:

BW_{EUT} : Transmission bandwidth of EUT signal.

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal).

f_{c1} : Center frequency of EUT transmission.

f_{c2} : Center frequency of simulated incumbent signal.

For Conducted measurement:

- a. Configure the EUT to transmit with a constant duty cycle.
- b. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
- c. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
- d. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step b.
- e. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
- f. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT.
- g. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
- h. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
- i. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
- j. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step e, choose a different center frequency for the AWGN signal and repeat the process.

10.3 DEVIATION FROM STANDARD

No deviation.

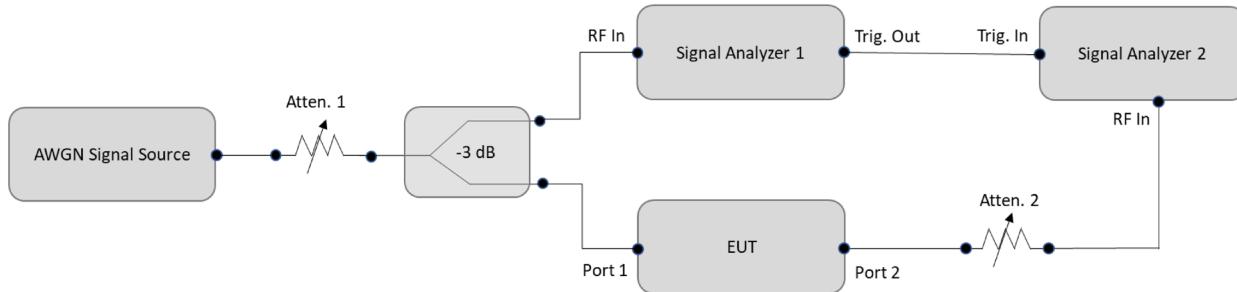
10.4 TEST SETUP**For Conducted measurement:**

Figure 2. Contention-based protocol test setup, conducted method Step-by-Step Procedure, Conducted Setup

10.5 EUT OPERATION CONDITIONS

The EUT was Configured to be in normally transmitting mode with a constant duty cycle.

10.6 TEST RESULTS

Please refer to the APPENDIX I.

11. LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Dec. 06, 2025
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Dec. 06, 2025
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M -001	9M	Nov. 11, 2025
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	1513-60 B-034	Mar. 30, 2025
2	MXE EMI Receiver	Keysight	N9038A	MY56400091	Dec. 06, 2025
3	Cable	N/A	RW4950-3.8A-NMS M-1.5	N/A	Nov. 12, 2025
4	Cable	N/A	LMR400-NMNM-8 M	N/A	Nov. 12, 2025
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	ETS	9*6*6	N/A	May 16, 2025

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1587	Apr. 25, 2025
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06010	Apr. 25, 2025
3	Preamplifier	EMC INSTRUMENT	EMC001330	980865	Oct. 29, 2025
4	Cable	RegalWay	LMR400-NMNM-2. 5m	N/A	Jan. 07, 2026
5	Cable	RegalWay	LMR400-NMNM-7 m	N/A	Jan. 07, 2026
6	Cable	RegalWay	LMR400-NMNM-3 m	N/A	Jan. 07, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jan. 10, 2026
8	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	ETS	9*6*6	N/A	Jan. 02, 2026

Radiated Emissions - 1 GHz - 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Oct. 29, 2025
4	Cable	RegalWay	RWLP50-4.0A-SMS M-1.3M	N/A	Jan. 09, 2025
5	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MRA-3M	N/A	Jan. 09, 2025
6	Cable	RegalWay	RWLP50-4.0A-SMS M-9M	N/A	Jan. 09, 2025
7	966 Chamber room	ETS	RFD-100(SVSWR)	Q2179	Jan. 09, 2025
8	Double Ridged Horn Antenna	EMC INSTRUMENT	DRH18-E	210509A18ES	Aug. 28, 2025
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 31, 2025
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	STI	STI15-9969	N/A	Oct. 29, 2025

Radiated Emissions - Above 18 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63380204	Oct. 29, 2025
2	Cable	RegalWay	RWLP50-2.6A-2.92 M2.92M-2M	N/A	Jan. 07, 2026
3	Cable	RegalWay	RWLP50-2.6A-3.5 M2.92MMRA-6M	N/A	Jan. 07, 2026
4	Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	1227	Oct. 20, 2025
5	Preamplifier	EMC INSTRUMENT	EMC184045SE	980905	Oct. 29, 2025
6	966 Chamber room	ETS	9*6*6	N/A	Jan. 03, 2026
7	Multi-Device Controller	ETS-Lindgren	N/A	N/A	N/A
8	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Bandwidth & Maximum Power Spectral Density & In-Band Emission (Mask)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY54200164	Dec. 06, 2025
2	Cable	RegalWay	20210802 013	RWP50-402-SMSM-1M	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A
4	BTL TestSystem	BTL	TestSoftware	N/A	N/A



Maximum e.i.r.p.					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 31, 2025
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 31, 2025
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A



Contention Based Protocol					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Dec. 06, 2025
2	MXG Vector Signal Generator	Keysight	N5182B	MY57300568	May 31, 2025
3	Frequency Extender	Keysight	N5182BX07	MY59362506	May 31, 2025
4	Cable	RegalWay	20240202 020	RWP50-402-SMSM-1M	N/A
5	Cable	RegalWay	20210802 015	RWP50-402-SMSM-1M	N/A
6	Cable	RegalWay	20210802 016	RWP50-402-SMSM-1M	N/A
7	Cable	RegalWay	20210802 002	RWP50-402-SMSM-1M	N/A
8	Cable	Woke	20210802 005	RWP50-402-SMSM-1M	N/A
9	Cable	RegalWay	20240202 006	RWP50-402-SMSM-2M	N/A
10	Power Splitter	N/A	N/A	SZ201504933	Dec. 06, 2025
11	Gaming Router	Tplink	Archer GE800	N/A	N/A
12	Measurement Software	BTL	WIFI6E TestSystem	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

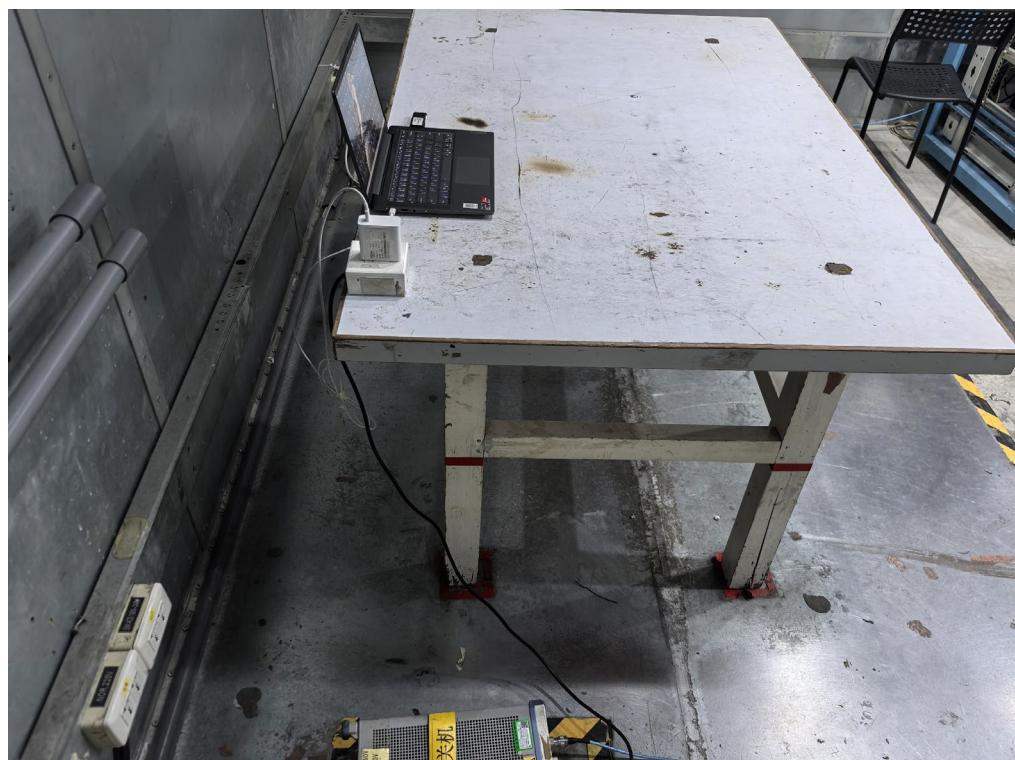12. EUT TEST PHOTOS**AC Power Line Conducted Emissions Test Photos**

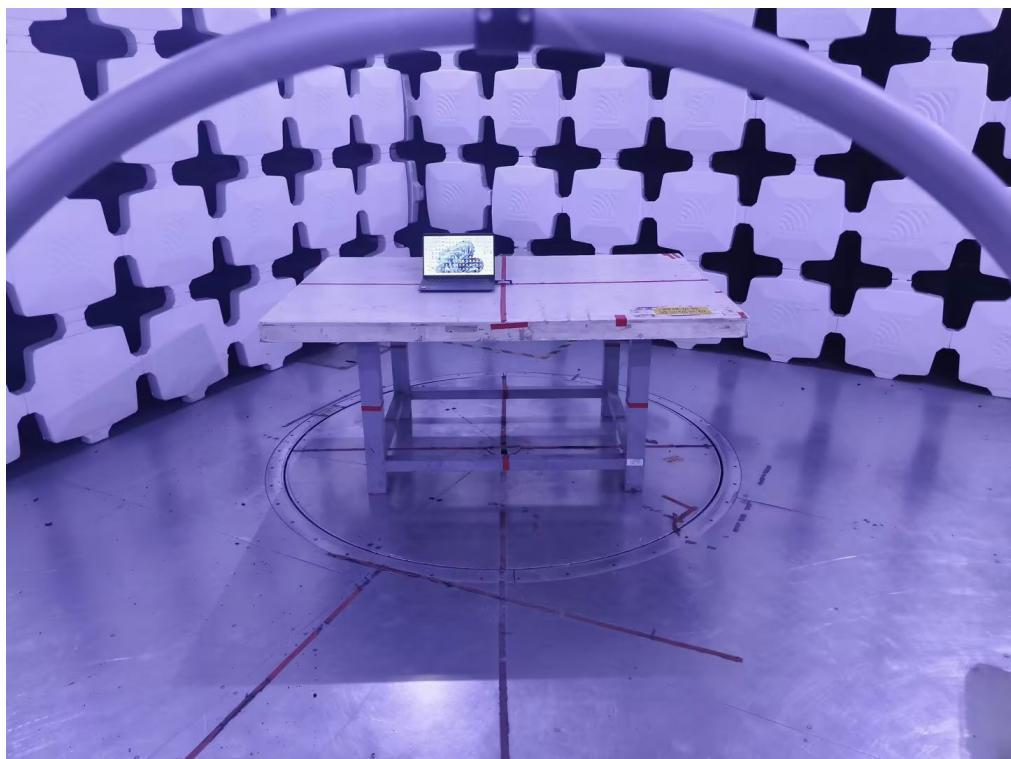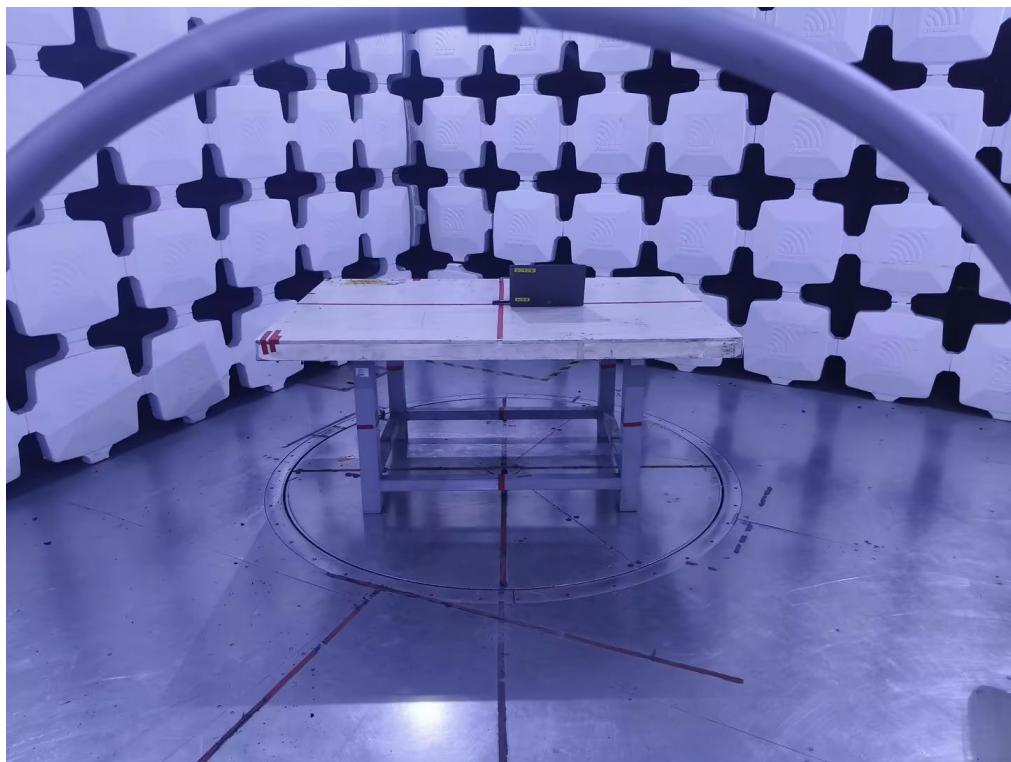
Radiated Emissions Test Photos**9 kHz to 30 MHz**

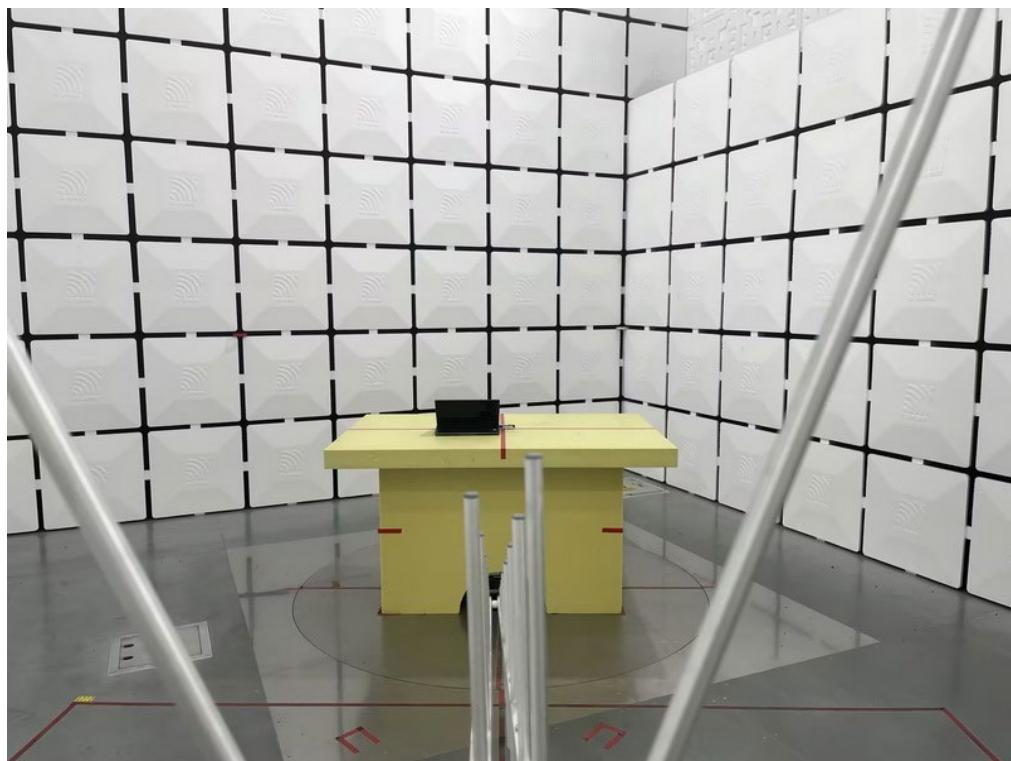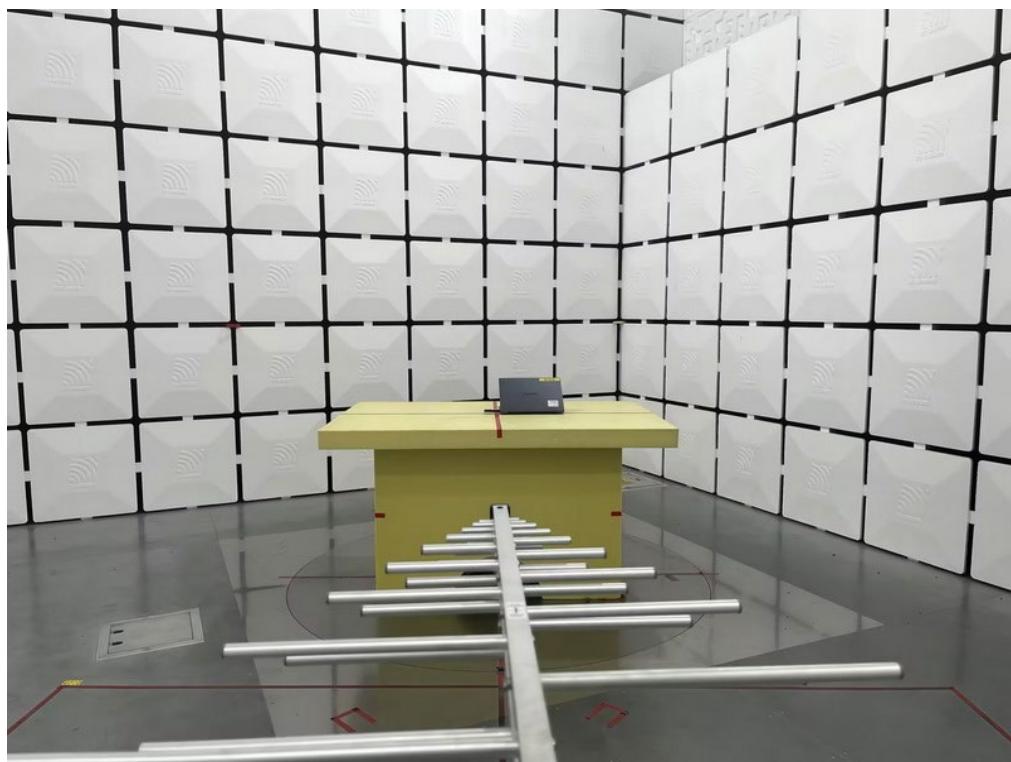Radiated Emissions Test Photos**30 MHz to 1 GHz**

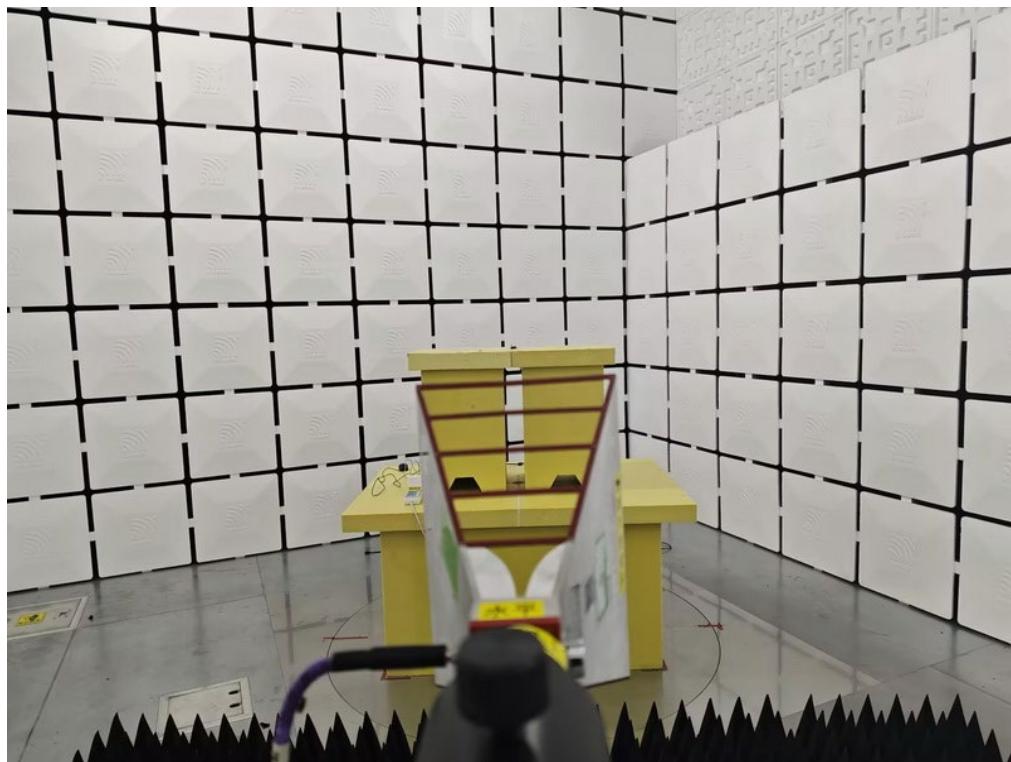Radiated Emissions Test Photos**Band edge & Harmonic(1 GHz to 18 GHz)**


Radiated Emissions Test Photos**Harmonic(18 GHz to 40 GHz)**

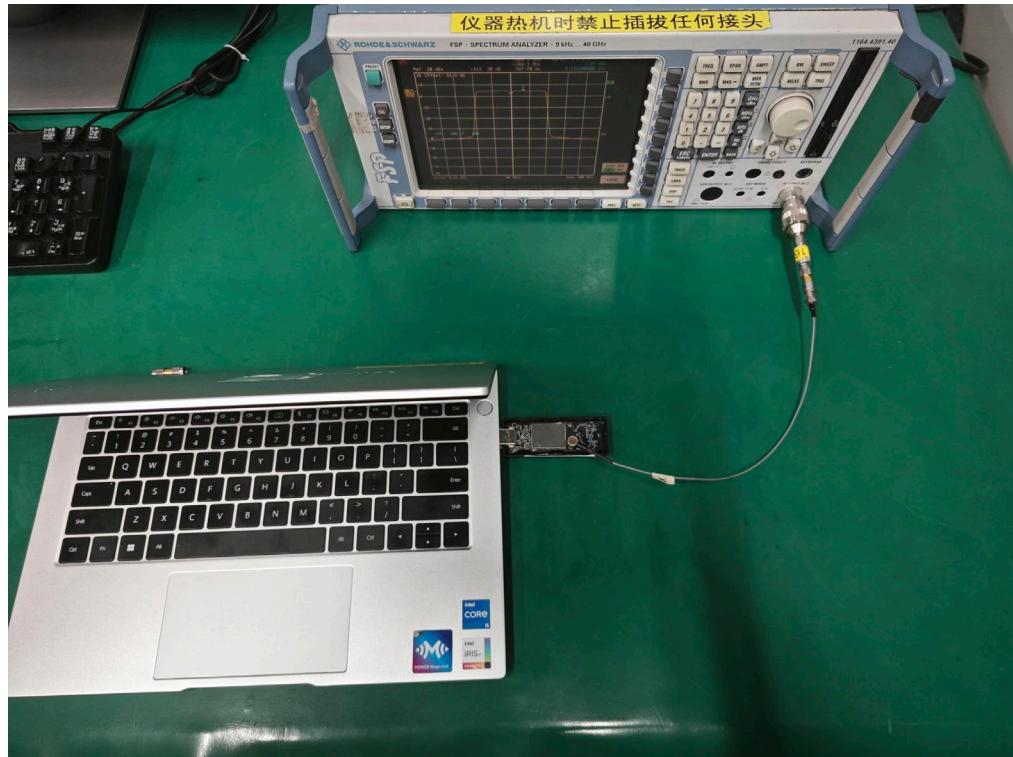

Conducted Test Photos

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX BE(EHT160) Mode Channel 111	Phase	Line
-----------	--------------------------------	-------	------

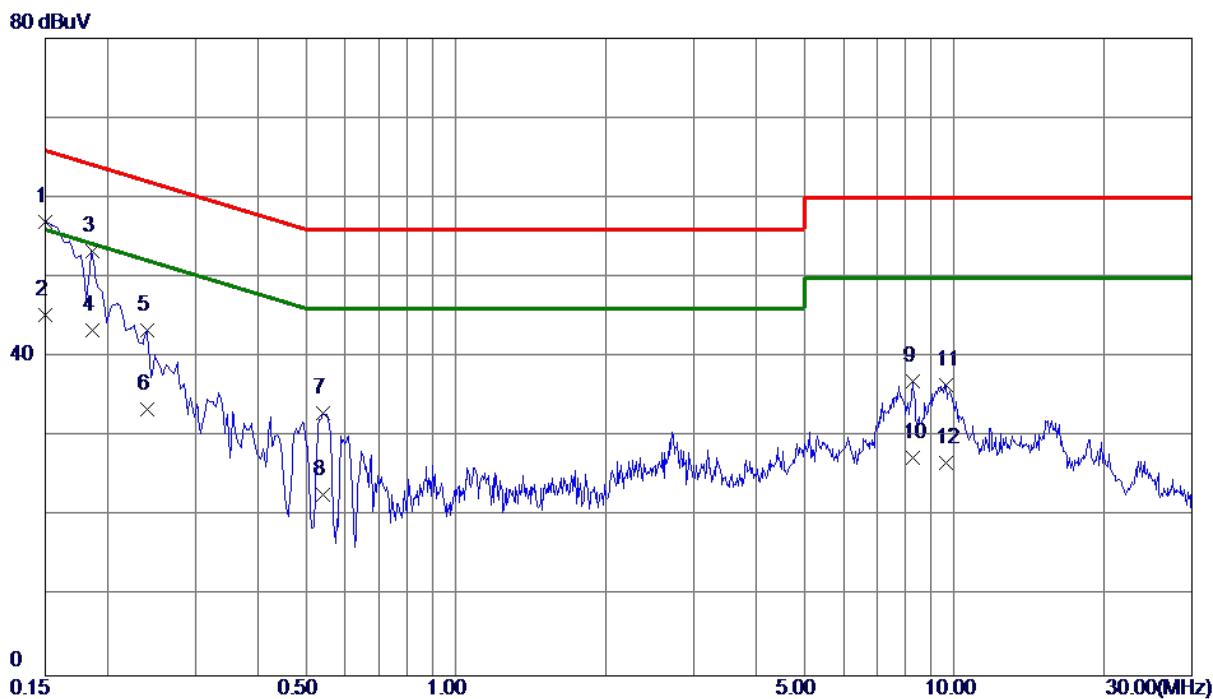


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	47.12	9.90	57.02	66.00	-8.98	QP	
2	0.1500	35.39	9.90	45.29	56.00	-10.71	AVG	
3	0.1860	43.30	9.91	53.21	64.21	-11.00	QP	
4	0.1860	33.50	9.91	43.41	54.21	-10.80	AVG	
5	0.2400	33.45	9.90	43.35	62.10	-18.75	QP	
6	0.2400	23.50	9.90	33.40	52.10	-18.70	AVG	
7	0.5415	22.95	9.97	32.92	56.00	-23.08	QP	
8	0.5415	12.79	9.97	22.76	46.00	-23.24	AVG	
9	8.2770	25.43	11.50	36.93	60.00	-23.07	QP	
10	8.2770	15.90	11.50	27.40	50.00	-22.60	AVG	
11	9.6135	24.67	11.86	36.53	60.00	-23.47	QP	
12	9.6135	14.91	11.86	26.77	50.00	-23.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 111	Phase	Neutral
-----------	--------------------------------	-------	---------

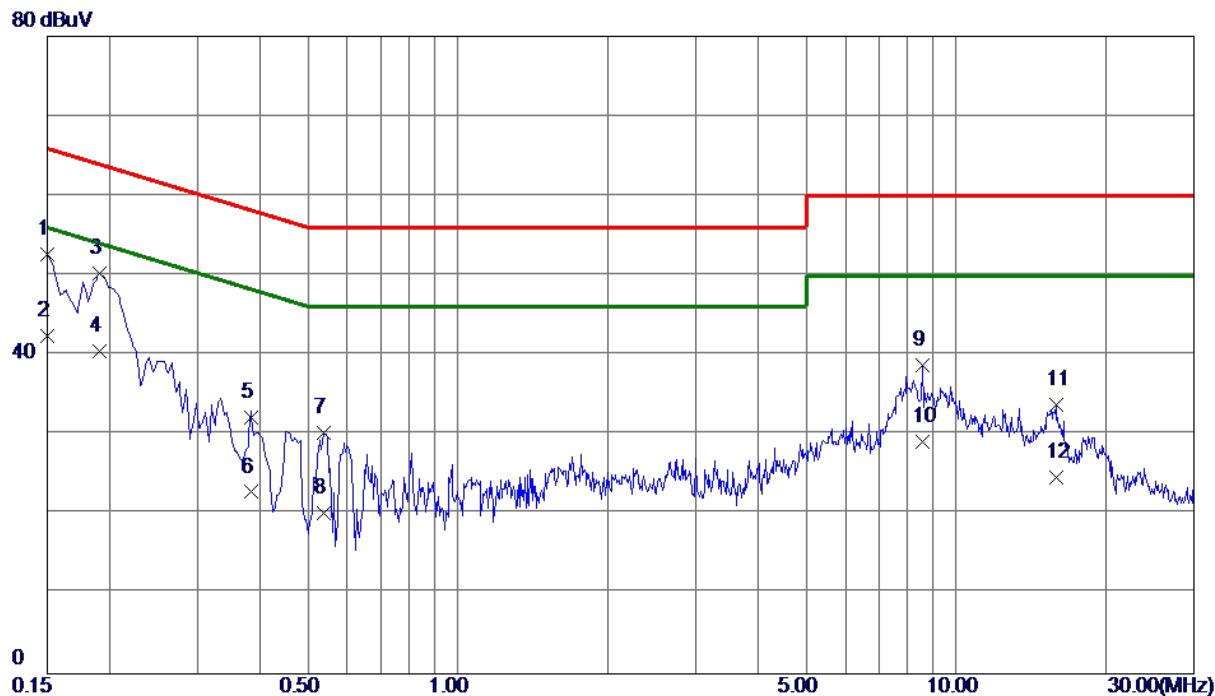


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	42.68	9.97	52.65	66.00	-13.35	QP	
2	0.1500	32.50	9.97	42.47	56.00	-13.53	AVG	
3	0.1905	40.30	9.97	50.27	64.01	-13.74	QP	
4	0.1905	30.50	9.97	40.47	54.01	-13.54	AVG	
5	0.3852	22.15	10.00	32.15	58.17	-26.02	QP	
6	0.3852	12.80	10.00	22.80	48.17	-25.37	AVG	
7	0.5370	20.17	10.04	30.21	56.00	-25.79	QP	
8	0.5370	10.09	10.04	20.13	46.00	-25.87	AVG	
9	8.5605	27.18	11.58	38.76	60.00	-21.24	QP	
10	8.5605	17.60	11.58	29.18	50.00	-20.82	AVG	
11	15.8505	19.95	13.85	33.80	60.00	-26.20	QP	
12	15.8505	10.80	13.85	24.65	50.00	-25.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX BE(EHT160) Mode Channel 111	Polarization	Ant 0°
-----------	--------------------------------	--------------	--------

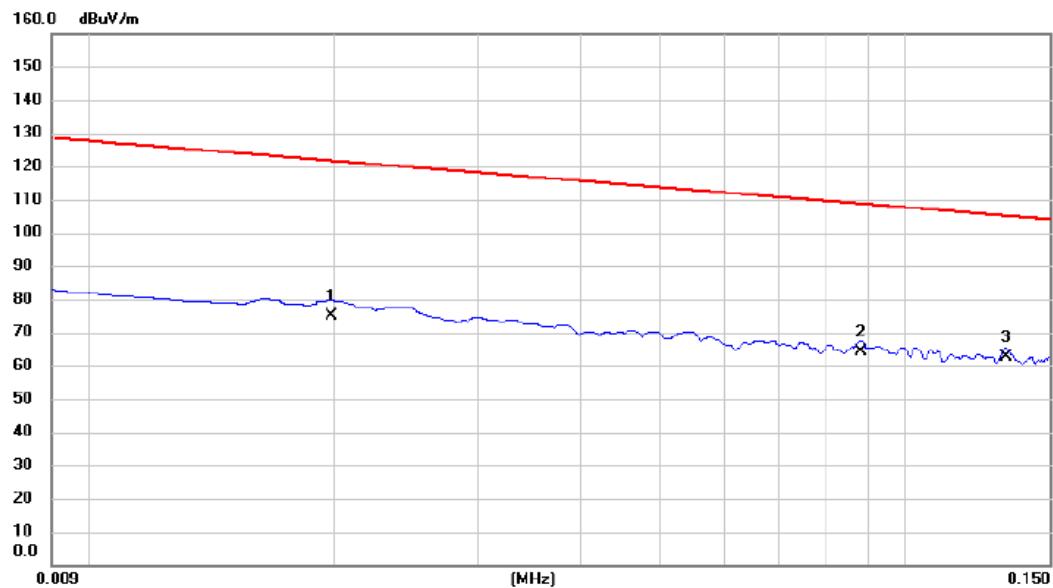


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0198	54.32	20.83	75.15	121.67	-46.52	AVG	
2		0.0882	42.81	21.34	64.15	108.70	-44.55	AVG	
3	*	0.1326	41.13	21.29	62.42	105.16	-42.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 111	Polarization	Ant 0°
-----------	--------------------------------	--------------	--------

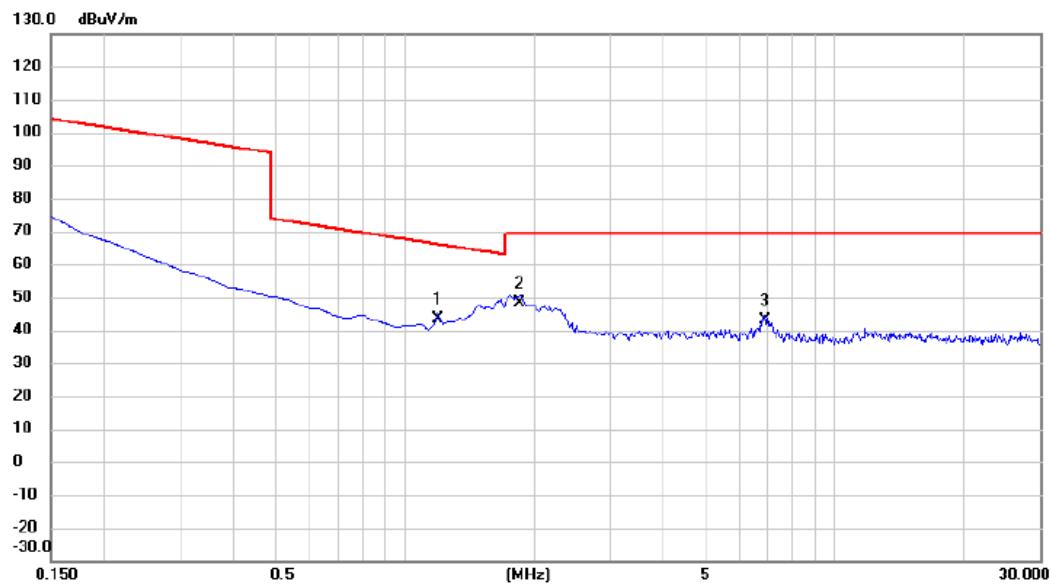


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
<hr/>									
1	1.1947	22.34	21.18	43.52	66.06	-22.54	QP		
2 *	1.8514	27.06	21.12	48.18	69.54	-21.36	QP		
3	6.8961	21.68	21.13	42.81	69.54	-26.73	QP		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 111	Polarization	Ant 90°
-----------	--------------------------------	--------------	---------

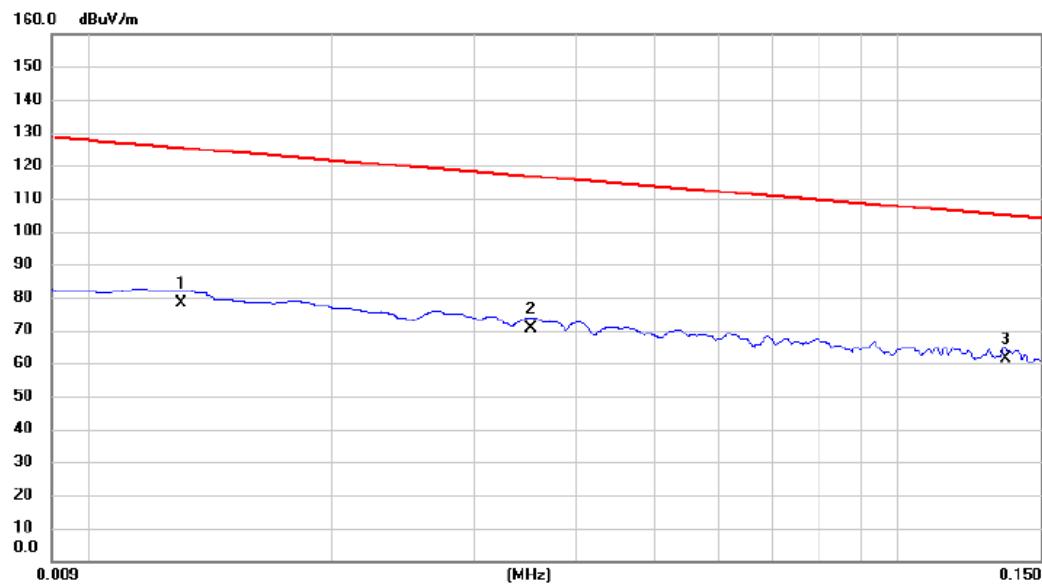


No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		dBuV	dB	dBuV/m	dBuV/m	dB		
1	0.0130	57.48	20.63	78.11	125.33	-47.22	AVG	
2	0.0352	49.36	21.17	70.53	116.67	-46.14	AVG	
3 *	0.1356	40.03	21.29	61.32	104.96	-43.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 111	Polarization	Ant 90°
-----------	--------------------------------	--------------	---------

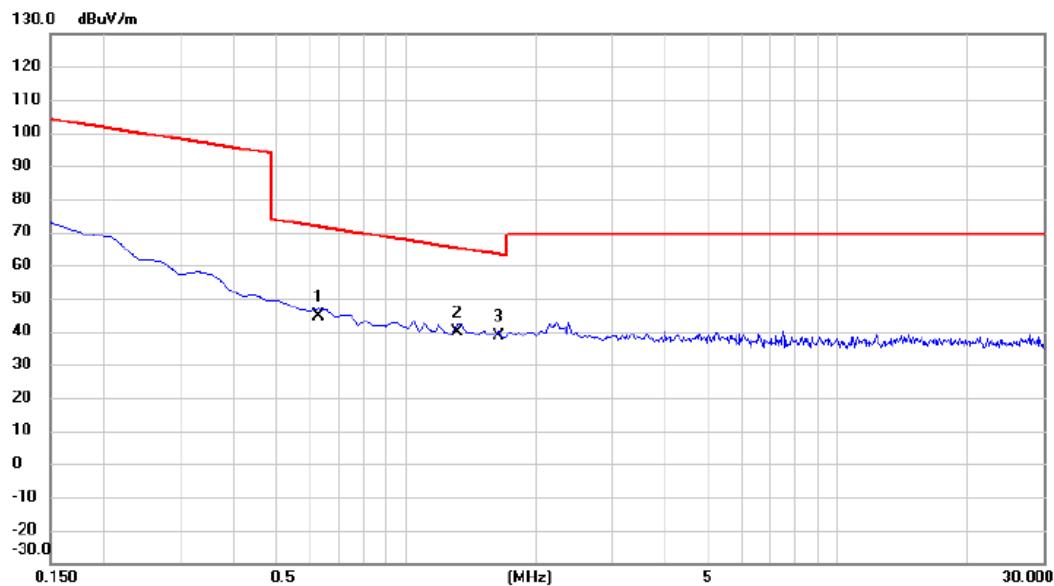


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.6276	23.43	21.10	44.53	71.65	-27.12	QP	
2		1.3141	18.54	21.17	39.71	65.23	-25.52	QP	
3	*	1.6425	17.32	21.15	38.47	63.29	-24.82	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX BE(EHT160) Mode Channel 111	Polarization	Vertical
-----------	--------------------------------	--------------	----------

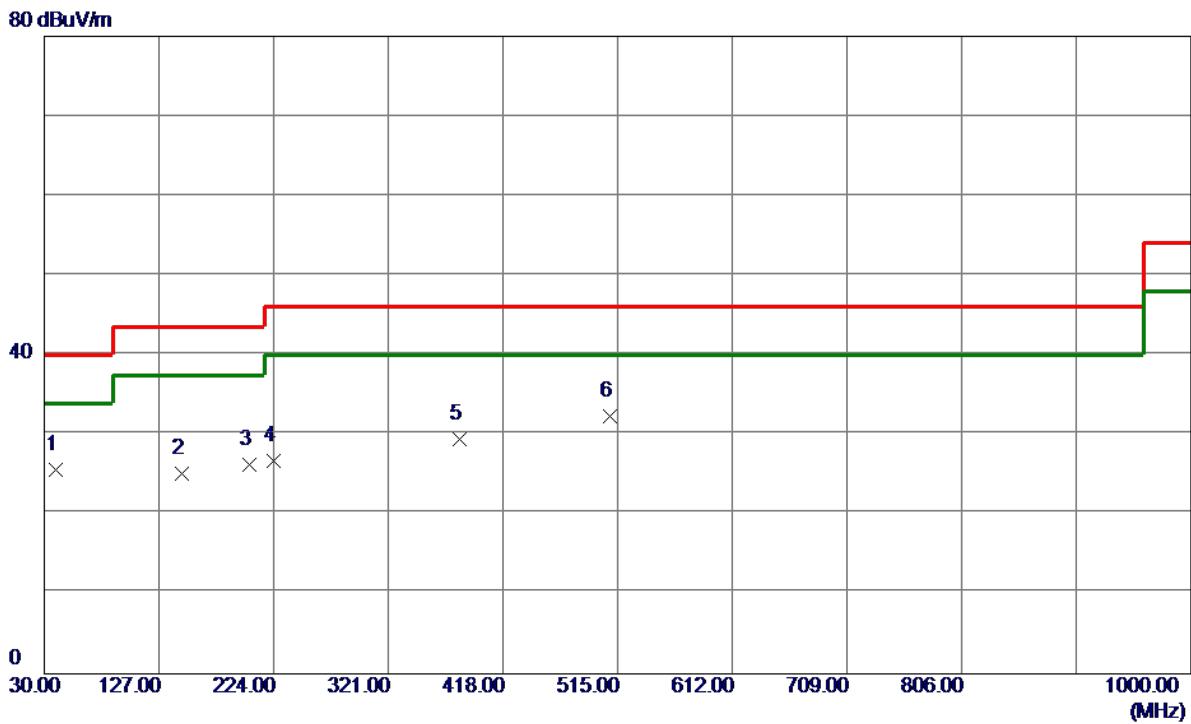


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39.7000	37.60	-11.94	25.66	40.00	-14.34	Peak	
2	146.4000	36.68	-11.54	25.14	43.50	-18.36	Peak	
3	203.6300	40.92	-14.66	26.26	43.50	-17.24	Peak	
4	224.0000	41.02	-14.32	26.70	46.00	-19.30	Peak	
5	381.1400	38.41	-8.98	29.43	46.00	-16.57	Peak	
6 *	508.2100	38.39	-6.14	32.25	46.00	-13.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT160) Mode Channel 111	Polarization	Horizontal
-----------	--------------------------------	--------------	------------

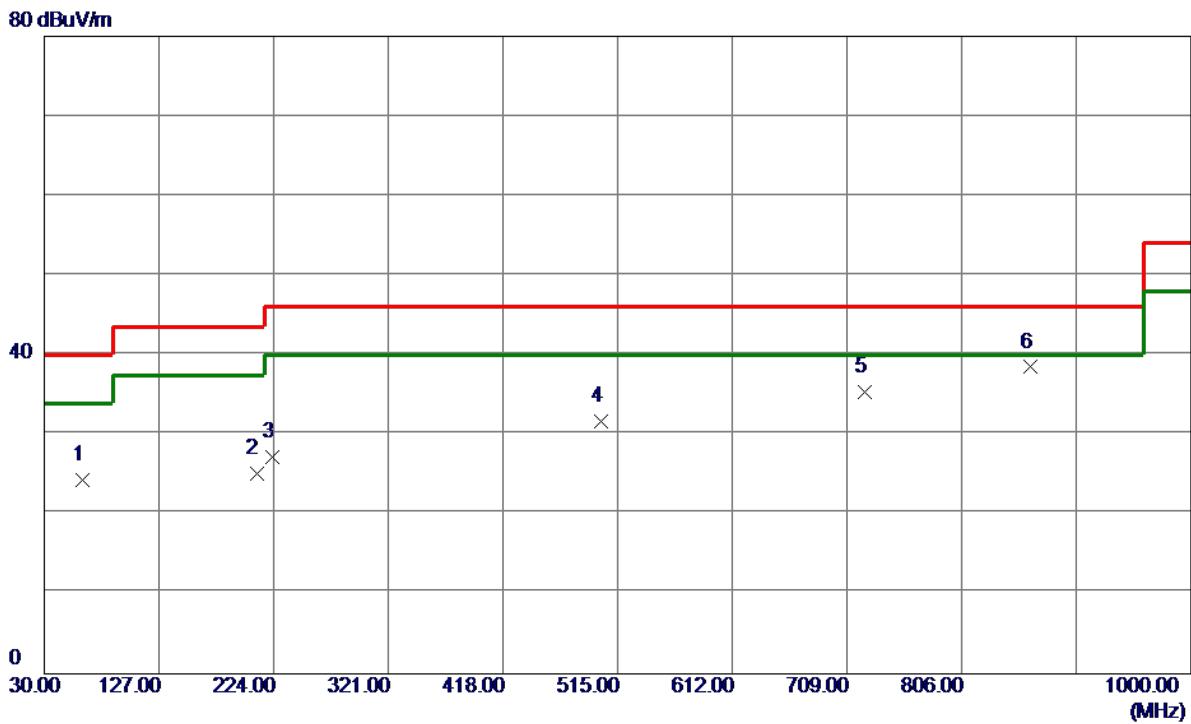

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	62.0100	36.60	-12.26	24.34	40.00	-15.66	Peak	
2	209.4500	39.76	-14.66	25.10	43.50	-18.40	Peak	
3	223.0300	41.57	-14.41	27.16	46.00	-18.84	Peak	
4	501.4200	37.92	-6.21	31.71	46.00	-14.29	Peak	
5	724.5200	37.49	-2.12	35.37	46.00	-10.63	Peak	
6 *	864.2000	38.90	-0.42	38.48	46.00	-7.52	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

NSS2

Test Mode	UNII-5_TX AX20 Mode 5955 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

130 dBuV/m

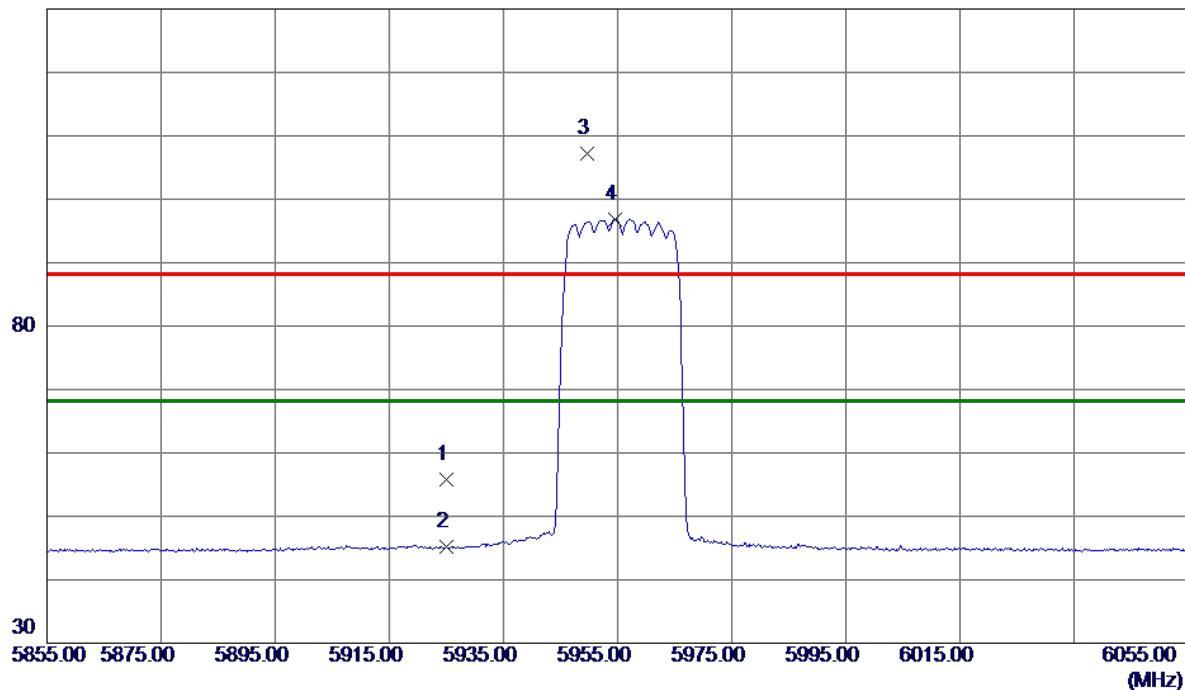


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	40.38	15.33	55.71	88.20	-32.49	Peak	
2	5925.0000	29.89	15.33	45.22	68.20	-22.98	AVG	
3	5949.6000	91.83	15.38	107.21	88.20	19.01	Peak	No Limit
4 *	5954.6000	81.44	15.39	96.83	68.20	28.63	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX20 Mode 7095 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

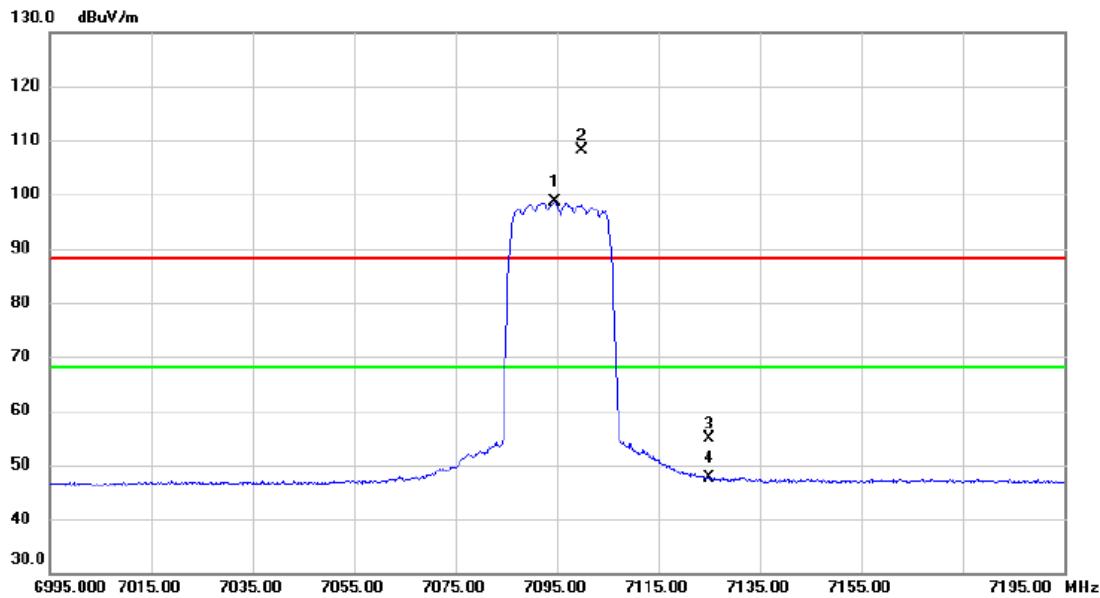


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	7094.600	80.13	18.40	98.53	68.20	30.33	AVG No Limit
2	X	7099.800	89.75	18.41	108.16	88.20	19.96	peak No Limit
3		7125.000	36.53	18.43	54.96	88.20	-33.24	peak
4		7125.000	29.31	18.43	47.74	68.20	-20.46	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX40 Mode 5965 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

130 dBuV/m

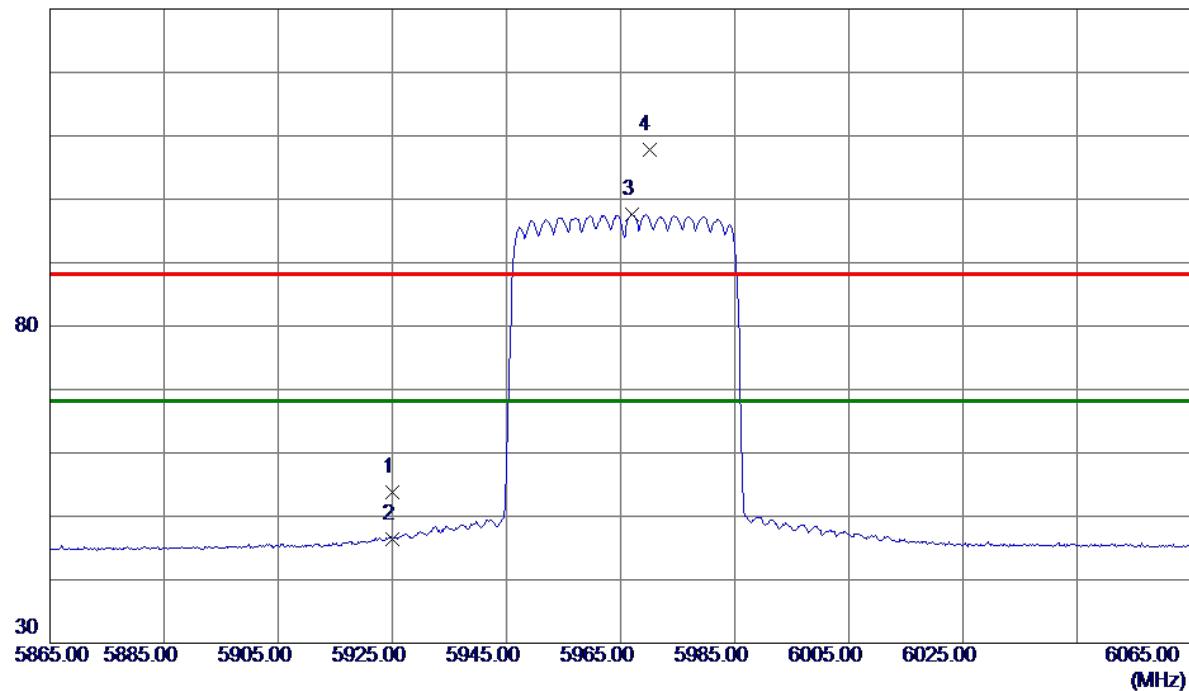


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin	
						Detector	Comment
1	5925.0000	38.54	15.33	53.87	88.20	-34.33	Peak
2	5925.0000	31.12	15.33	46.45	68.20	-21.75	AVG
3 *	5967.0000	82.19	15.42	97.61	68.20	29.41	AVG
4	5970.0000	92.29	15.43	107.72	88.20	19.52	Peak
							No Limit
							No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX40 Mode 7085 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

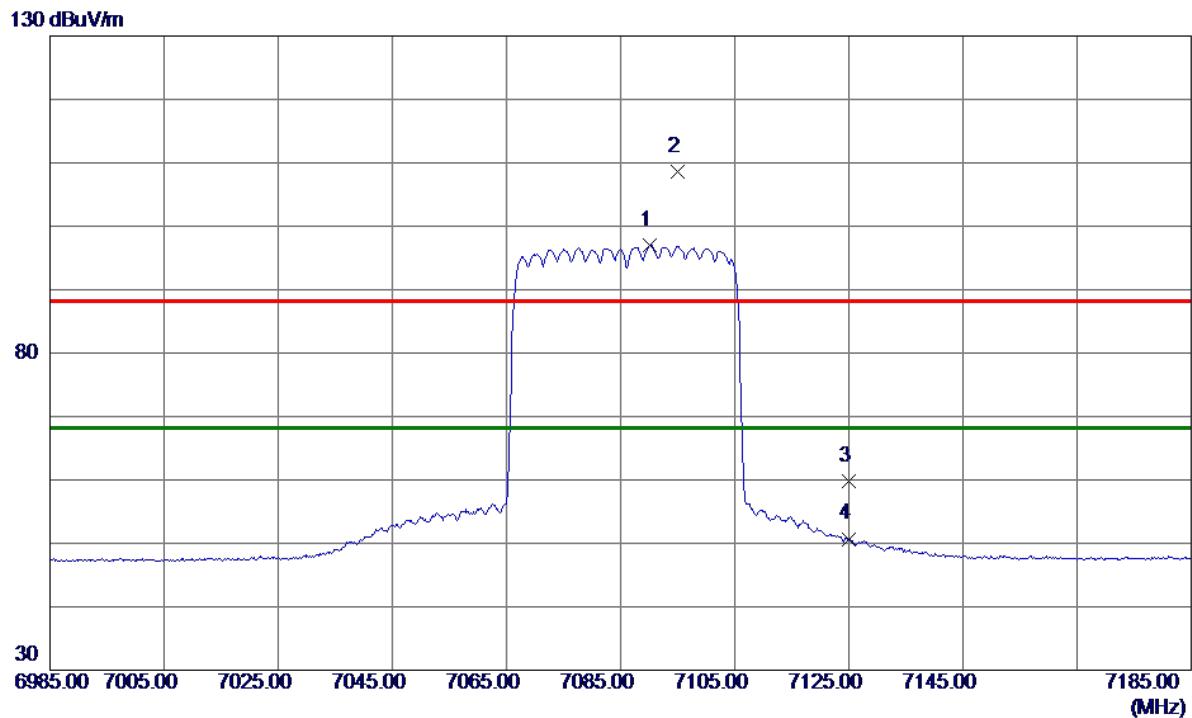


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	7090.000	78.68	18.39	97.07	68.20	28.87	AVG	No Limit
2	7095.0000	90.15	18.40	108.55	88.20	20.35	Peak	No Limit
3	7125.0000	41.29	18.43	59.72	88.20	-28.48	Peak	
4	7125.0000	32.27	18.43	50.70	68.20	-17.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX80 Mode 5985 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

130 dBuV/m

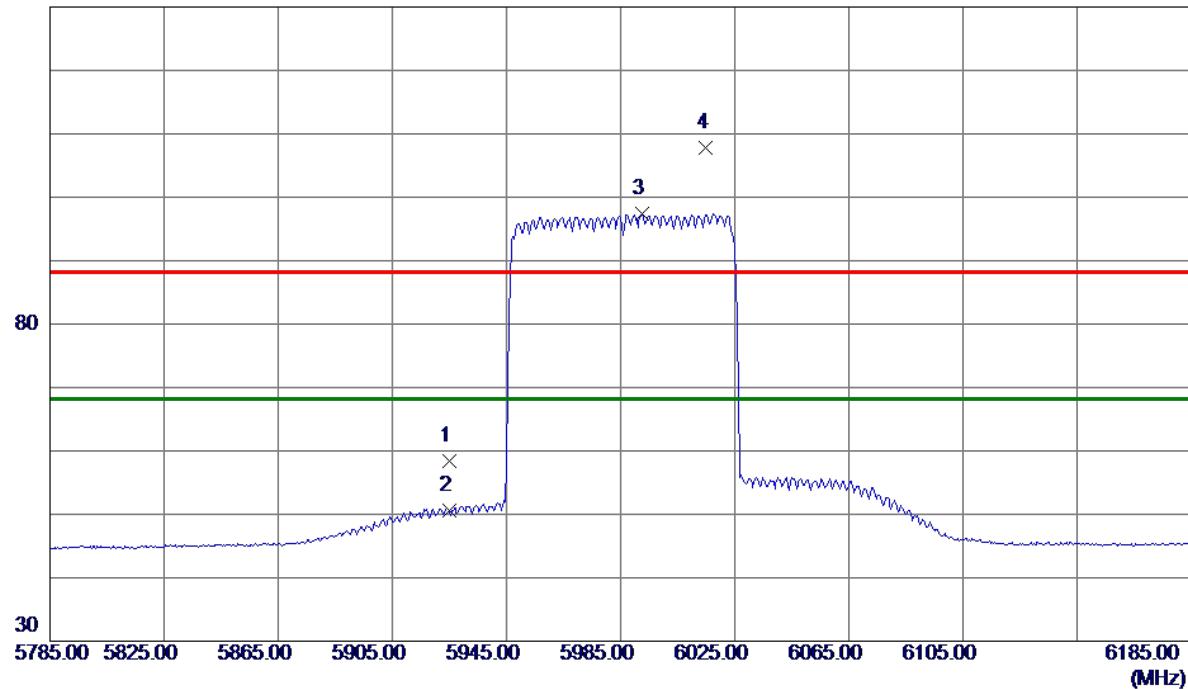


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	43.04	15.33	58.37	88.20	-29.83	Peak	
2	5925.0000	35.31	15.33	50.64	68.20	-17.56	AVG	
3 *	5992.6000	81.85	15.48	97.33	68.20	29.13	AVG	No Limit
4	6015.0000	92.16	15.57	107.73	88.20	19.53	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX80 Mode 7025 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

130 dBuV/m

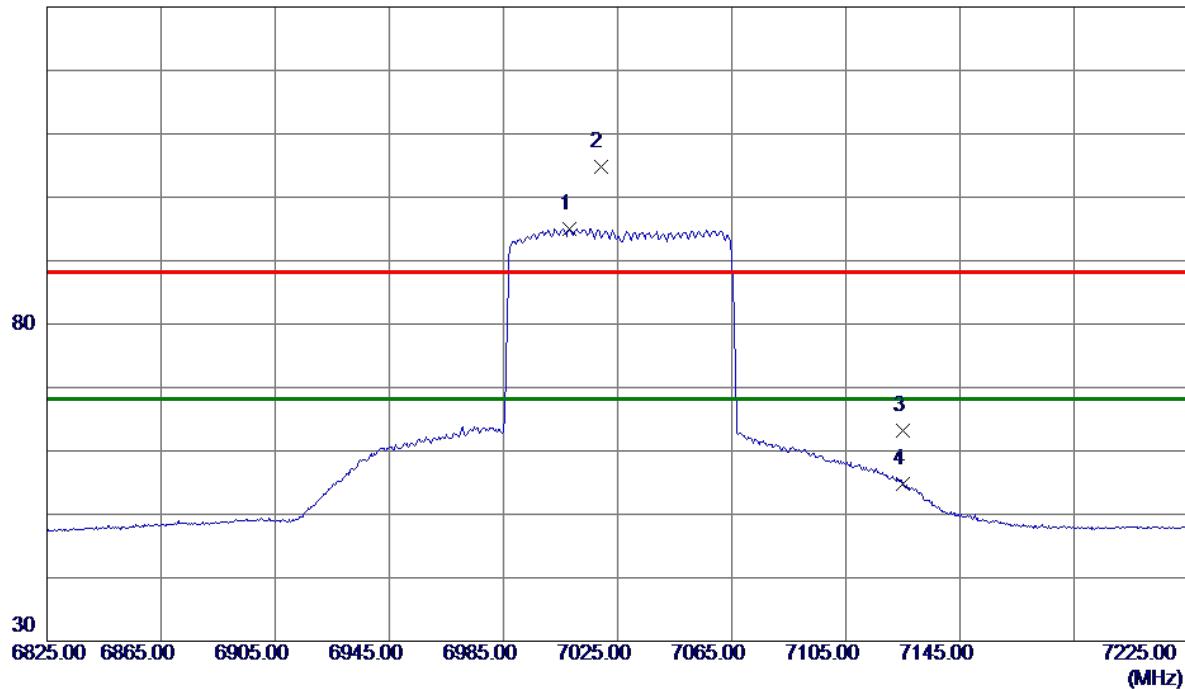


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	dBuV/m	dBuV/m	dB		
1 *	7008.2000	76.76	18.31	95.07	68.20	26.87	AVG	No Limit
2	7019.0000	86.50	18.32	104.82	88.20	16.62	Peak	No Limit
3	7125.0000	44.78	18.43	63.21	88.20	-24.99	Peak	
4	7125.0000	36.37	18.43	54.80	68.20	-13.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX160 Mode 6025 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

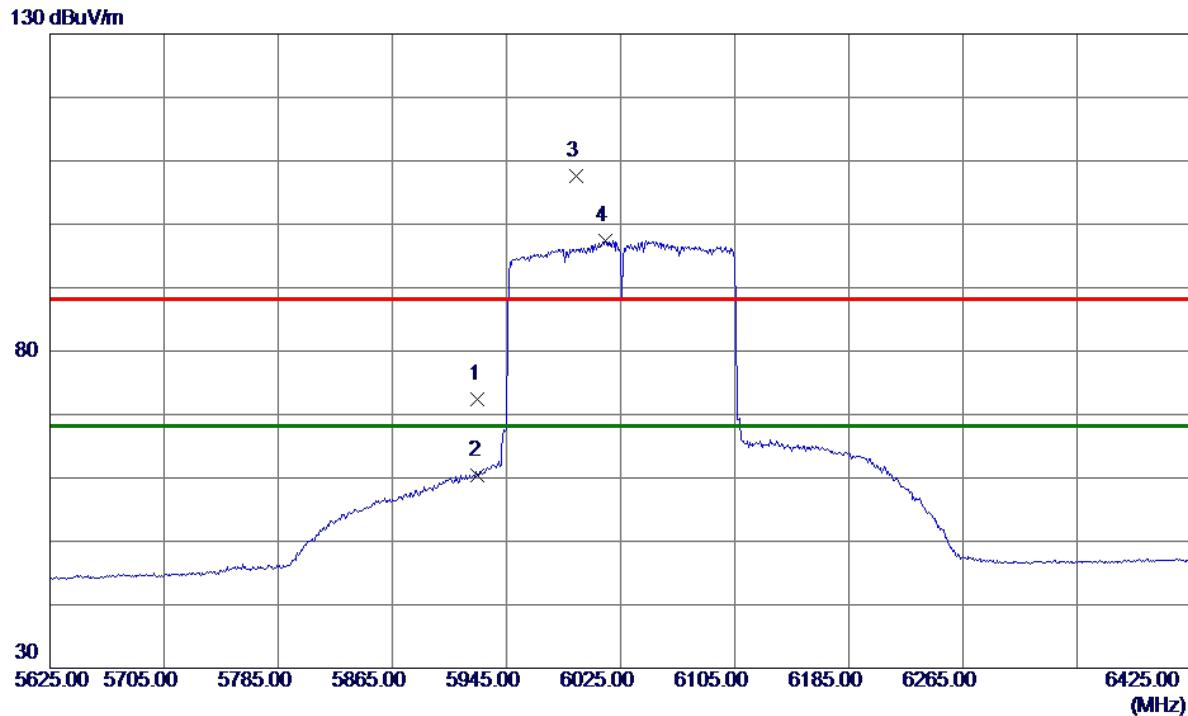


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	57.15	15.33	72.48	88.20	-15.72	Peak	
2	5925.0000	44.98	15.33	60.31	68.20	-7.89	AVG	
3	5993.8000	92.12	15.49	107.61	88.20	19.41	Peak	No Limit
4 *	6014.6000	81.92	15.56	97.48	68.20	29.28	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX160 Mode 6985 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

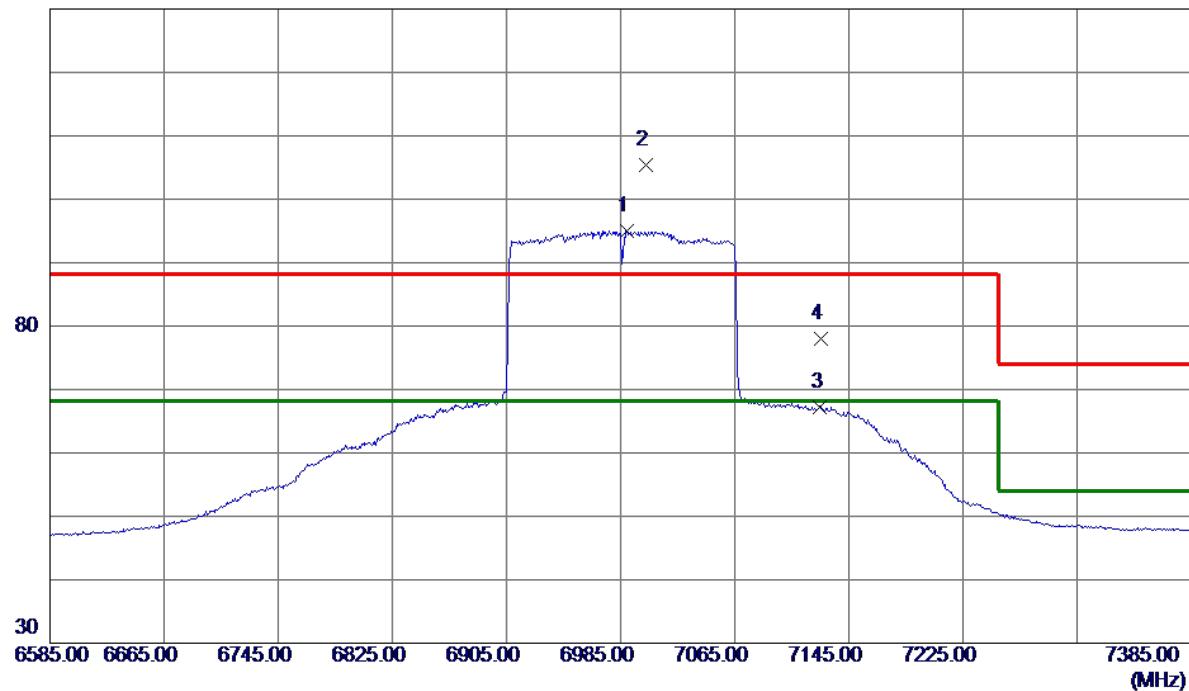


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1 *	6989.8000	76.70	18.29	94.99	68.20	26.79	AVG	No Limit
2	7002.6000	87.12	18.30	105.42	88.20	17.22	Peak	No Limit
3	7125.0000	48.77	18.43	67.20	68.20	-1.00	AVG	
4	7125.8000	59.49	18.43	77.92	88.20	-10.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE20 Mode 5955 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

130 dBuV/m

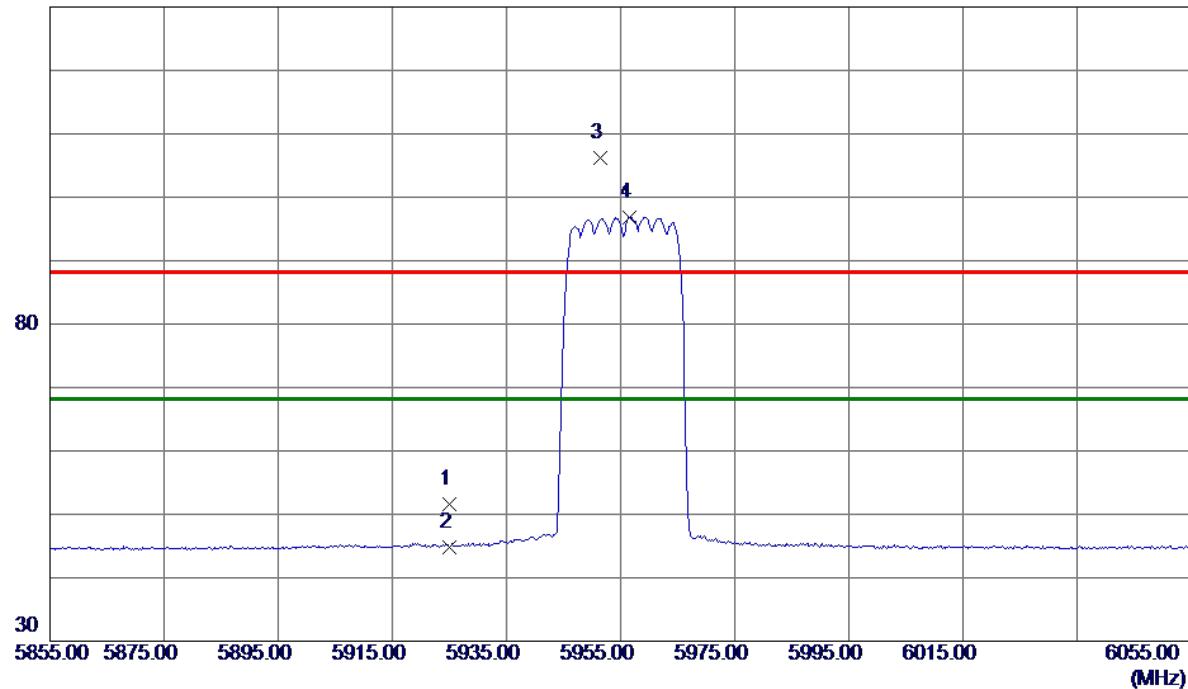


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	5925.0000	36.25	15.33	51.58	88.20	-36.62	Peak	
2	5925.0000	29.55	15.33	44.88	68.20	-23.32	AVG	
3	5951.4000	90.85	15.39	106.24	88.20	18.04	Peak	No Limit
4 *	5956.6000	81.40	15.40	96.80	68.20	28.60	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE20 Mode 7095 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

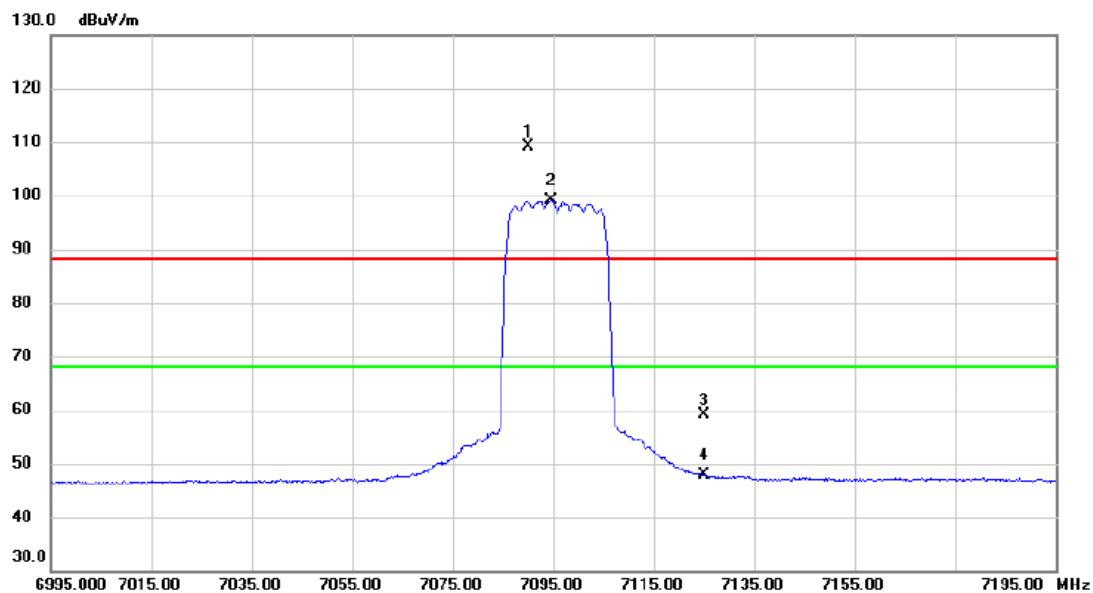


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	X	7090.000	90.75	18.39	109.14	88.20	20.94	peak
2	*	7094.600	80.71	18.40	99.11	68.20	30.91	AVG
3		7125.000	40.71	18.43	59.14	88.20	-29.06	peak
4		7125.000	29.38	18.43	47.81	68.20	-20.39	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE40 Mode 5965 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

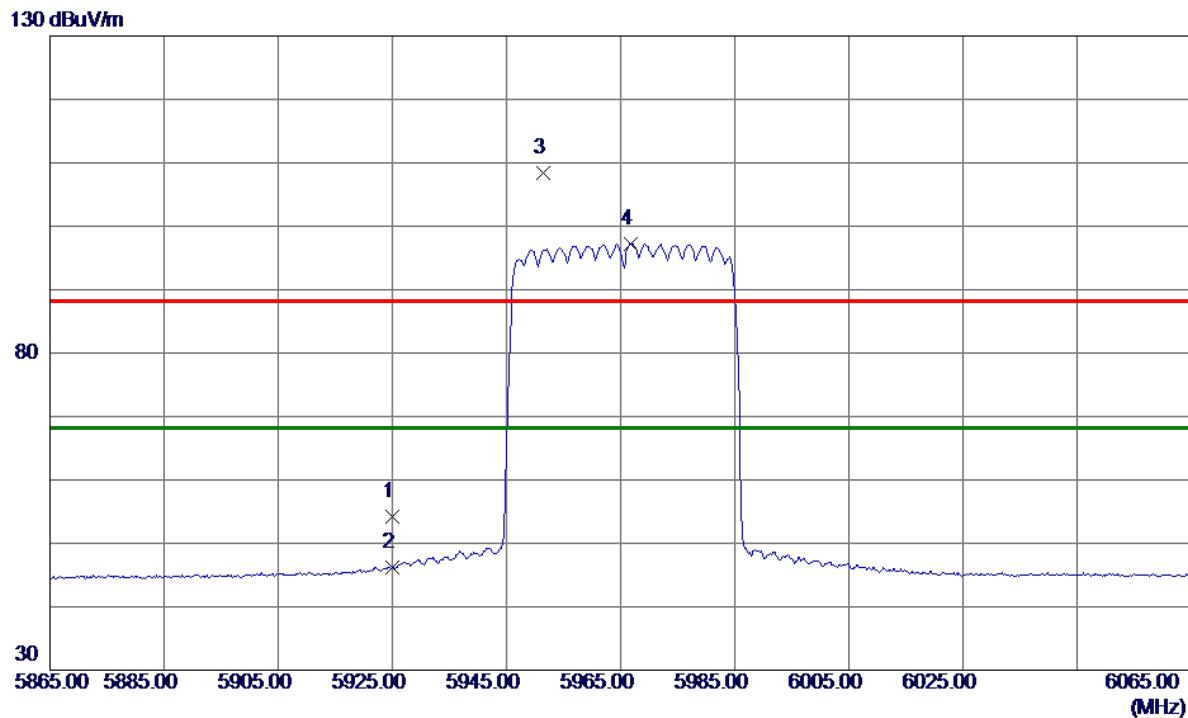


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	38.81	15.33	54.14	88.20	-34.06	Peak	
2	5925.0000	30.84	15.33	46.17	68.20	-22.03	AVG	
3	5951.4000	93.05	15.39	108.44	88.20	20.24	Peak	No Limit
4 *	5966.8000	81.85	15.42	97.27	68.20	29.07	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE40 Mode 7085 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

130 dBuV/m

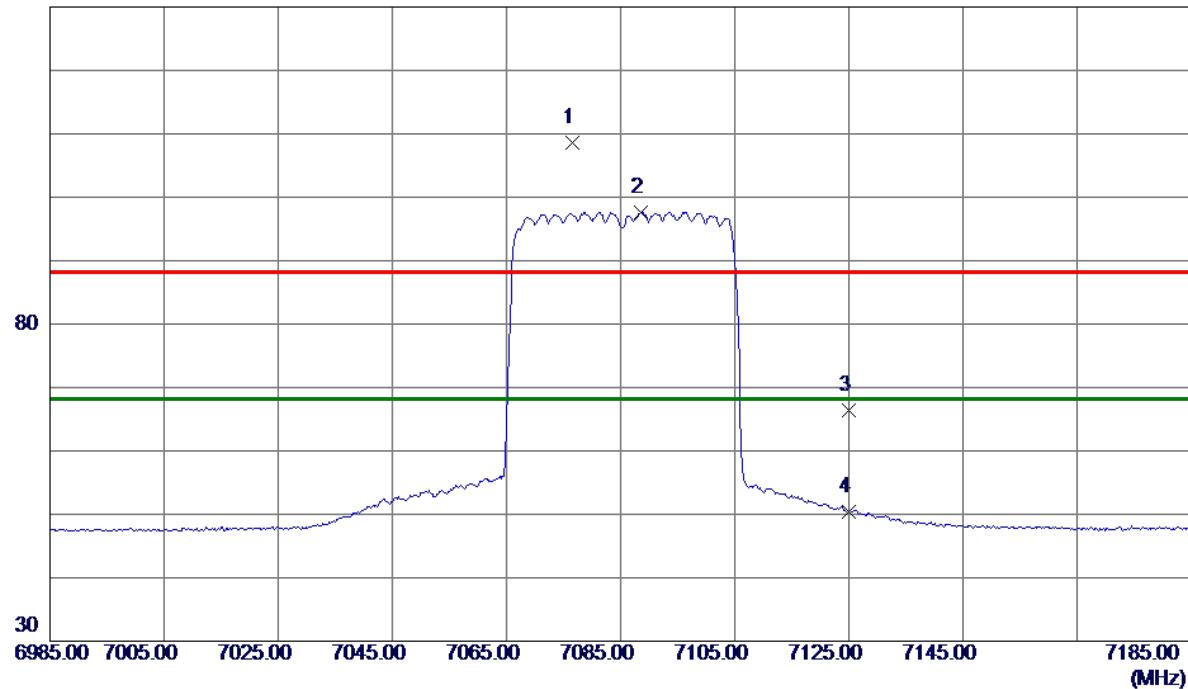


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	dBuV/m	dBuV/m	dB		
1	7076.6000	90.23	18.38	108.61	88.20	20.41	Peak	No Limit
2 *	7088.6000	79.28	18.39	97.67	68.20	29.47	AVG	No Limit
3	7125.0000	47.98	18.43	66.41	88.20	-21.79	Peak	
4	7125.0000	31.91	18.43	50.34	68.20	-17.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE80 Mode 5985 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

130 dBuV/m

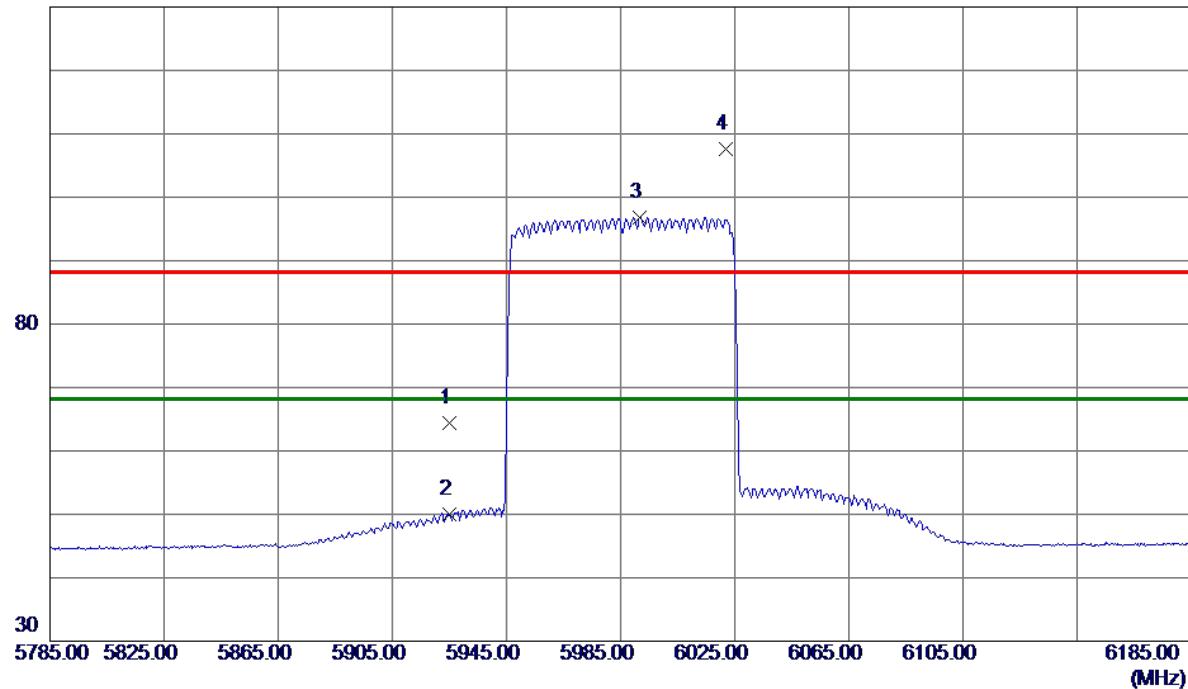


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	49.13	15.33	64.46	88.20	-23.74	Peak	
2	5925.0000	34.63	15.33	49.96	68.20	-18.24	AVG	
3 *	5991.8000	81.38	15.48	96.86	68.20	28.66	AVG	No Limit
4	6021.8000	91.92	15.60	107.52	88.20	19.32	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE80 Mode 7025 MHz	Polarization	Horizontal
-----------	------------------------------	--------------	------------

130 dBuV/m

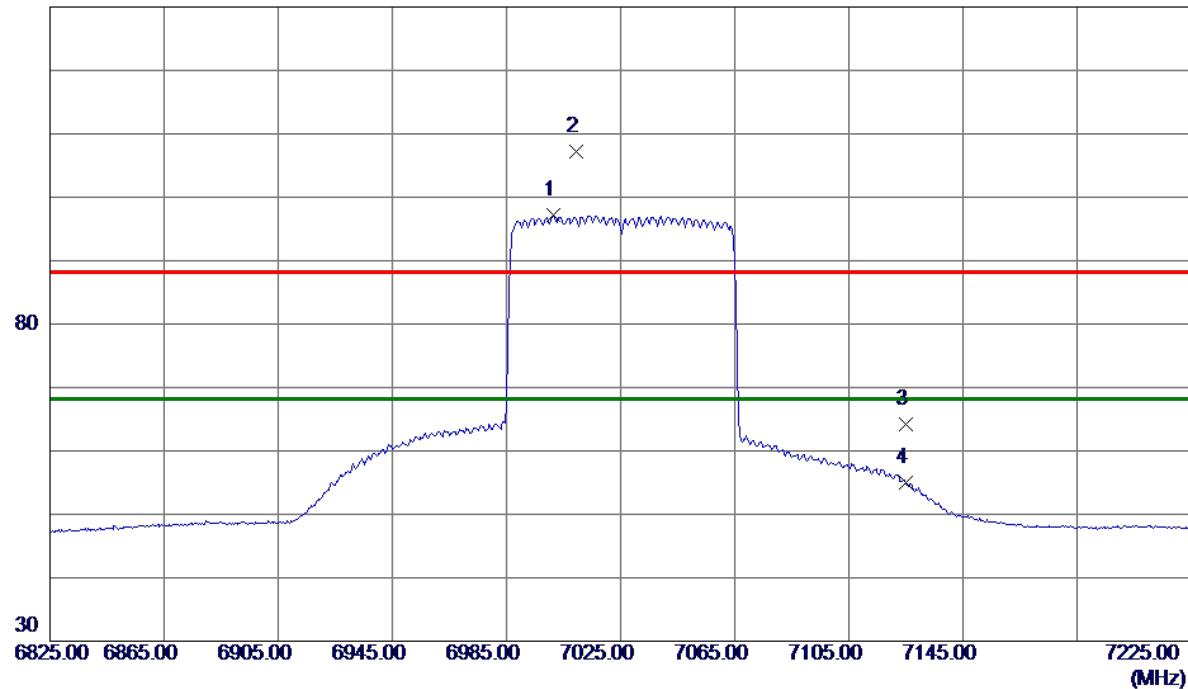


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	7001.4000	78.83	18.30	97.13	68.20	28.93	AVG	No Limit
2	7009.4000	88.81	18.31	107.12	88.20	18.92	Peak	No Limit
3	7125.0000	45.77	18.43	64.20	88.20	-24.00	Peak	
4	7125.0000	36.48	18.43	54.91	68.20	-13.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE160 Mode 6025 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

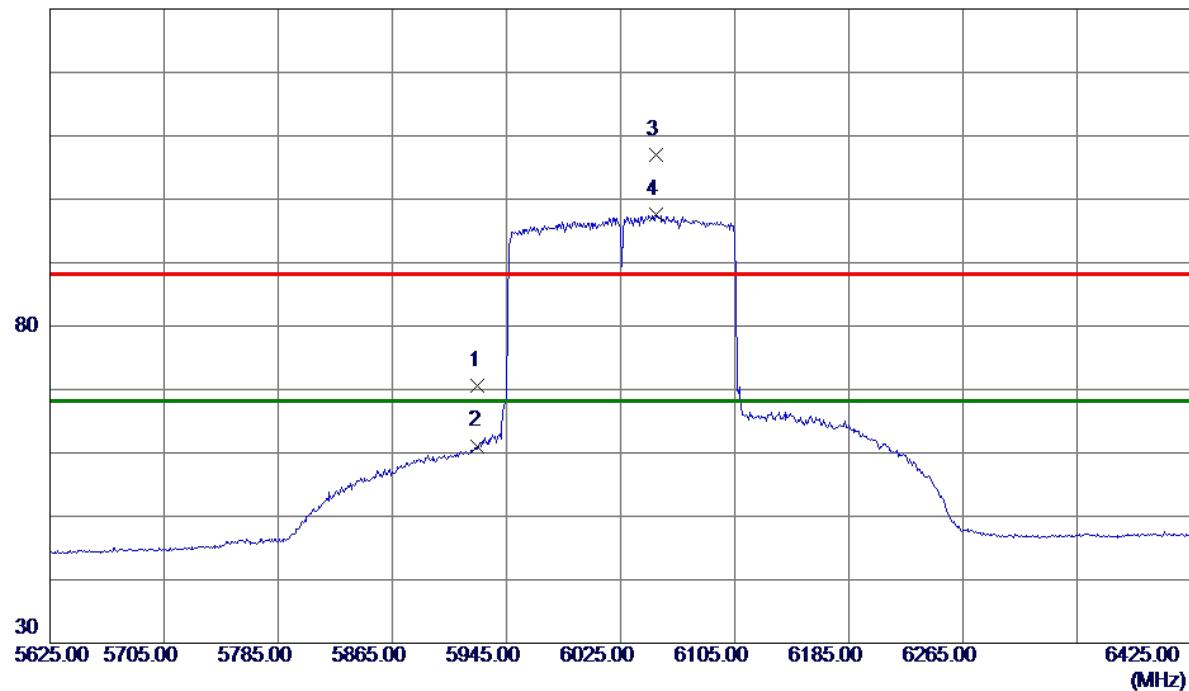


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5925.0000	55.36	15.33	70.69	88.20	-17.51	Peak	
2	5925.0000	45.77	15.33	61.10	68.20	-7.10	AVG	
3	6049.8000	91.33	15.72	107.05	88.20	18.85	Peak	No Limit
4 *	6049.8000	81.83	15.72	97.55	68.20	29.35	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE160 Mode 6985 MHz	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

130 dBuV/m

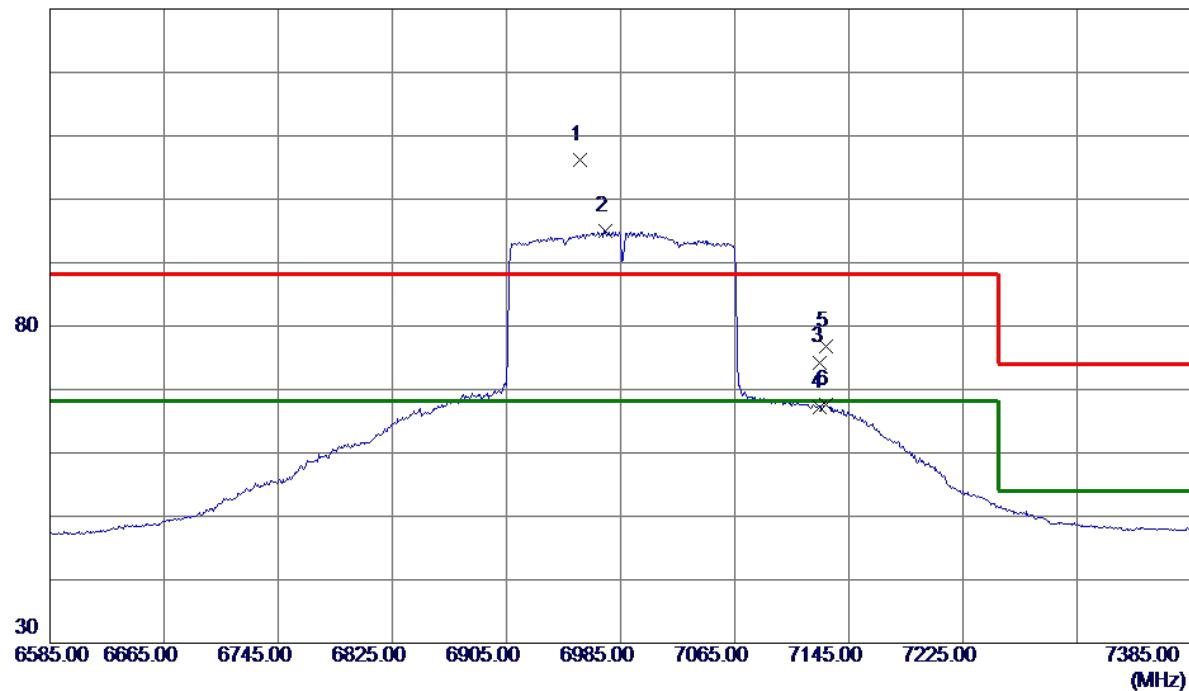


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	6956.2000	88.02	18.25	106.27	88.20	18.07	Peak	No Limit
2 *	6974.6000	76.78	18.27	95.05	68.20	26.85	AVG	No Limit
3	7125.0000	55.87	18.43	74.30	88.20	-13.90	Peak	
4	7125.0000	48.77	18.43	67.20	68.20	-1.00	AVG	
5	7129.0000	58.28	18.43	76.71	88.20	-11.49	Peak	
6	7129.0000	49.13	18.43	67.56	68.20	-0.64	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX20 Mode 5955 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

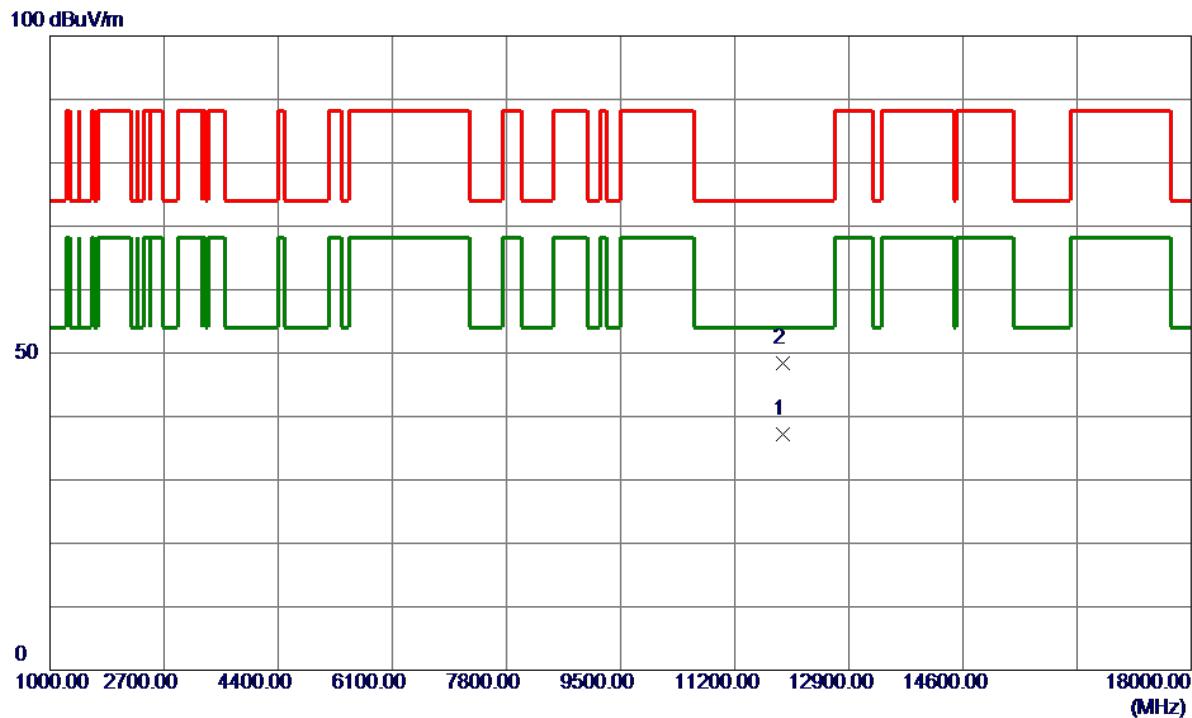
No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000

REMARKS:
(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX20 Mode 6175 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

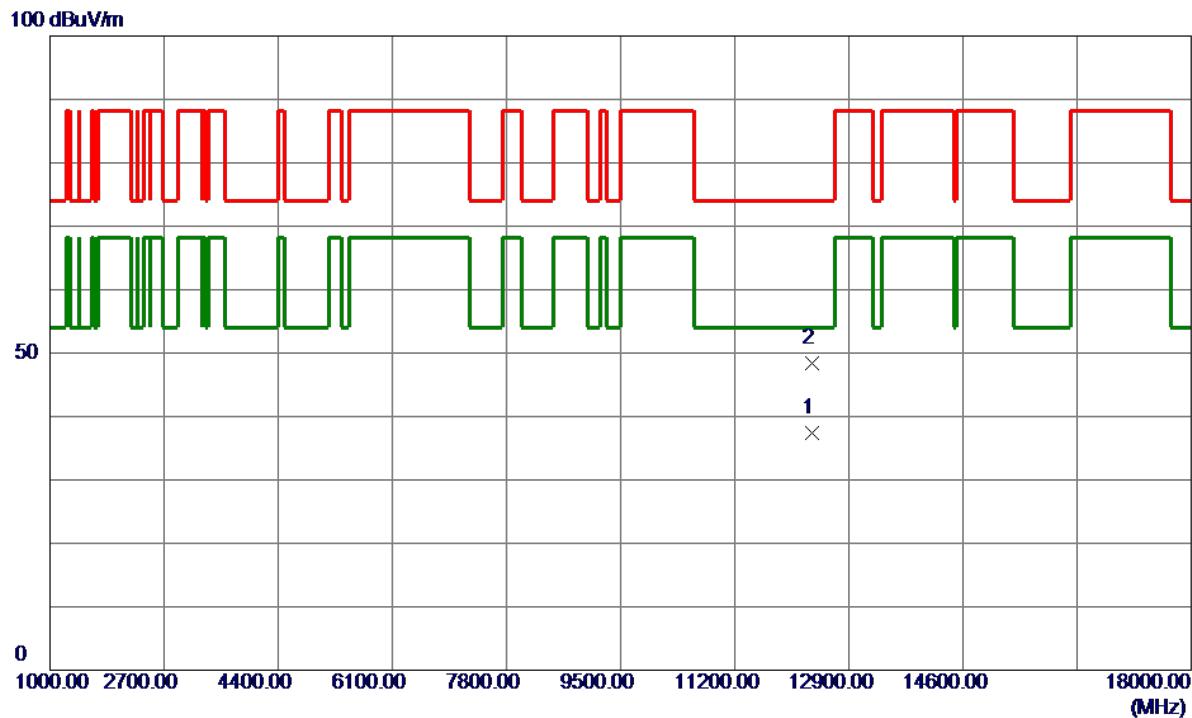


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	dBuV/m	dBuV/m	dB		
1 *	12346.9800	26.18	11.18	37.36	54.00	-16.64	AVG	
2	12359.1400	37.28	11.19	48.47	74.00	-25.53	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX20 Mode 6415 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

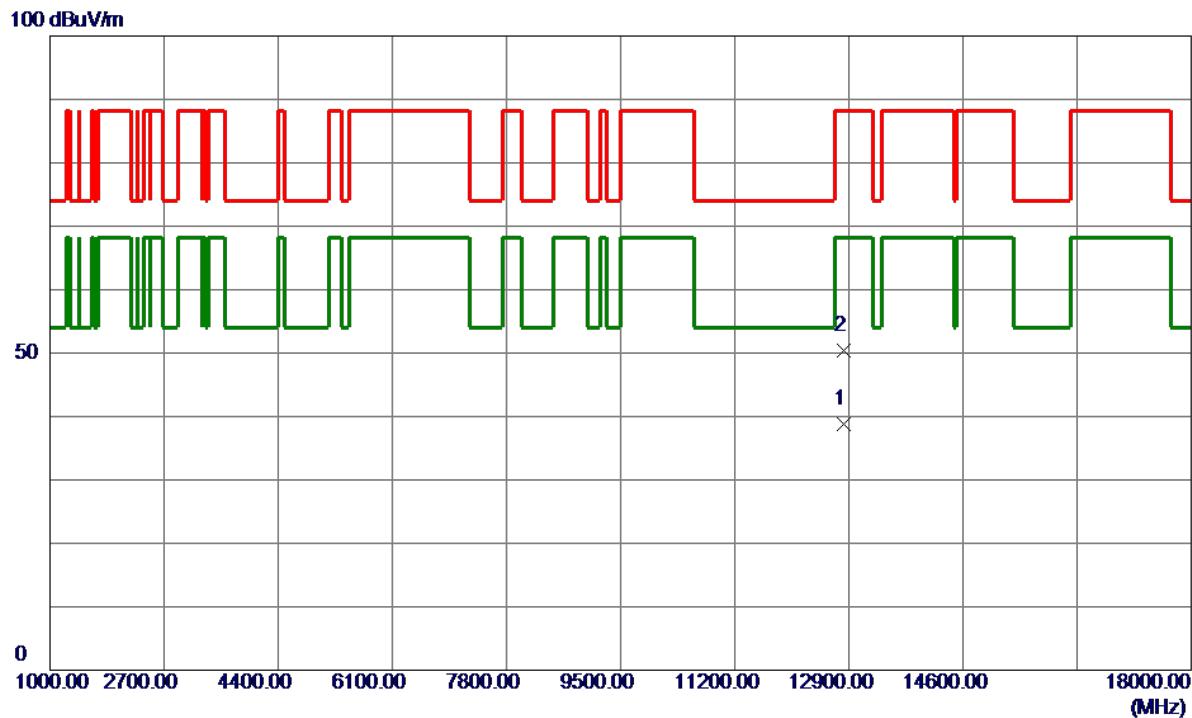


No.	Freq.	Reading Level	Correct Factor	Measure	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	12827.6400	27.37	11.41	38.78	68.20	-29.42	AVG	
2	12833.0800	39.01	11.41	50.42	88.20	-37.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX20 Mode 6435 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

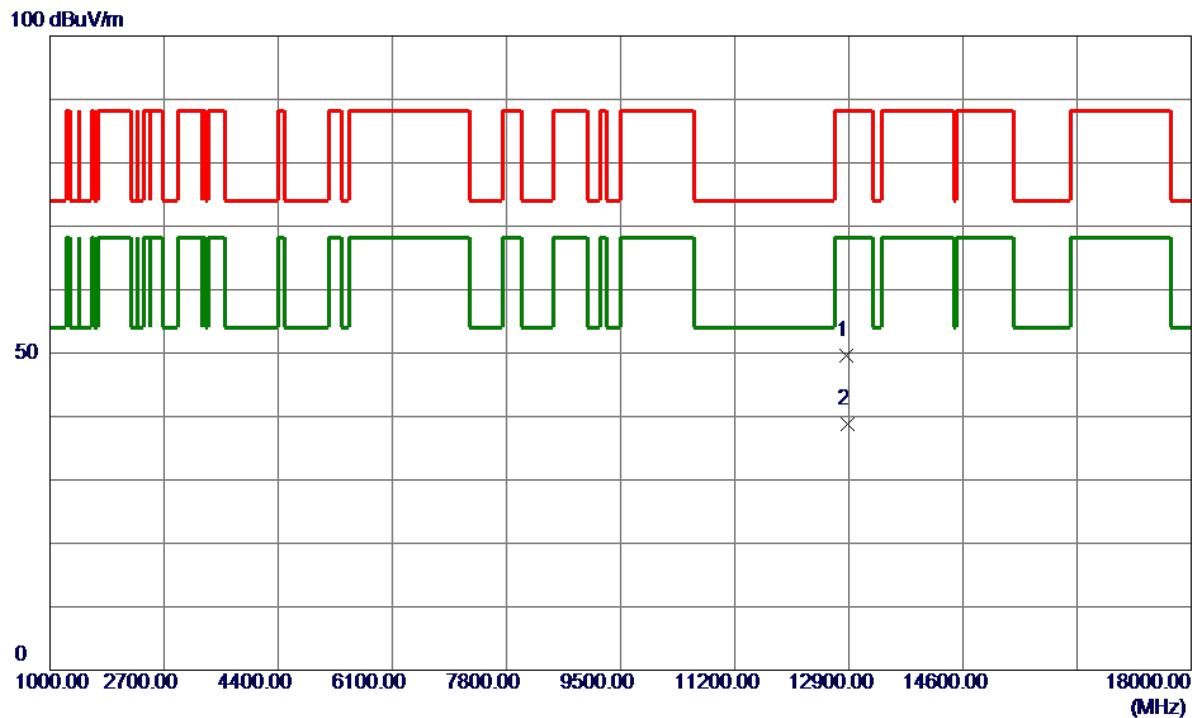


No.	Freq.	Reading Level	Correct Factor	Measure	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	12864.4600	38.22	11.43	49.65	88.20	-38.55	Peak	
2 *	12876.4000	27.30	11.43	38.73	68.20	-29.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX20 Mode 6475 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

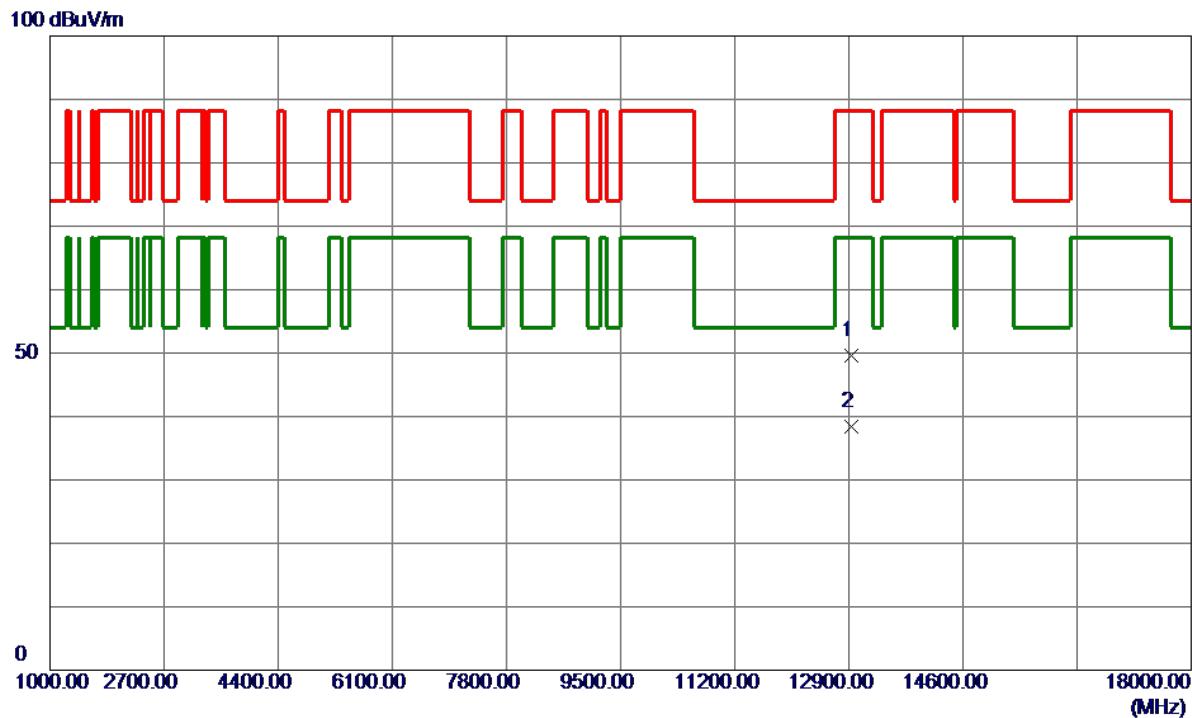


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12945.8200	38.09	11.46	49.55	88.20	-38.65	Peak	
2 *	12946.3400	27.02	11.47	38.49	68.20	-29.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX20 Mode 6515 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

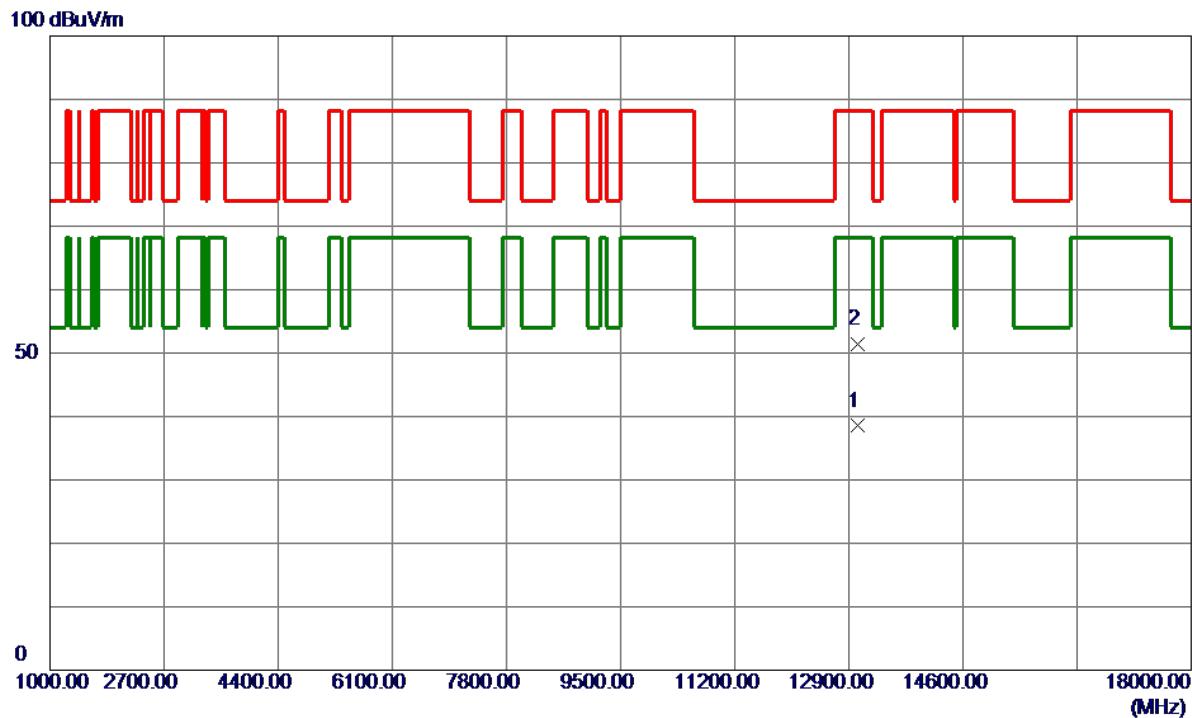

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX20 Mode 6535 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

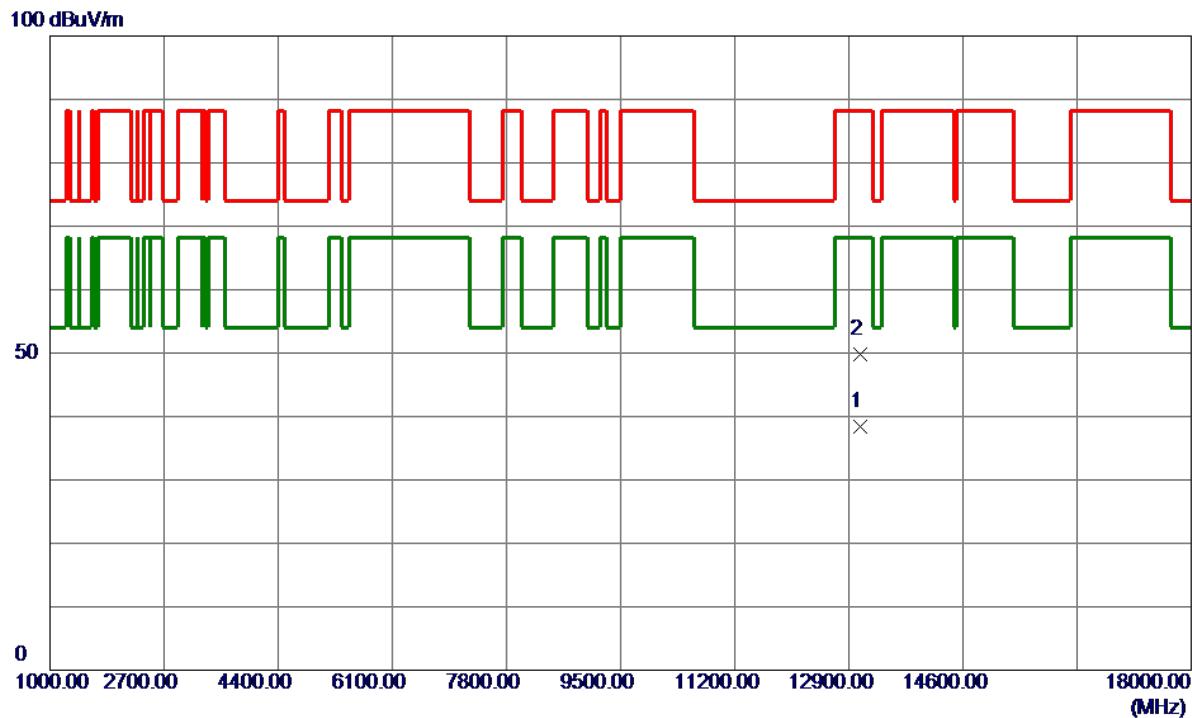


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	13064.0800	26.88	11.47	38.35	68.20	-29.85	AVG	
2	13072.2400	38.30	11.47	49.77	88.20	-38.43	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX20 Mode 6695 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

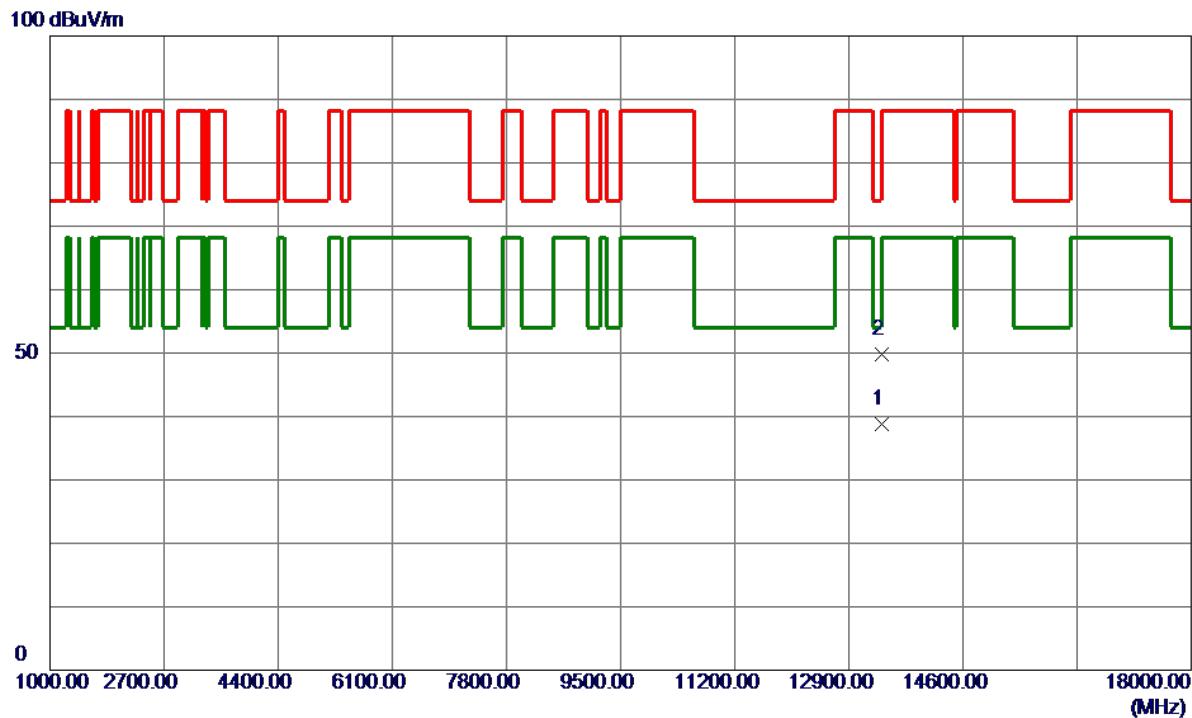


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	13384.6600	27.48	11.39	38.87	54.00	-15.13	AVG	
2	13399.4000	38.41	11.38	49.79	74.00	-24.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX20 Mode 6855 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

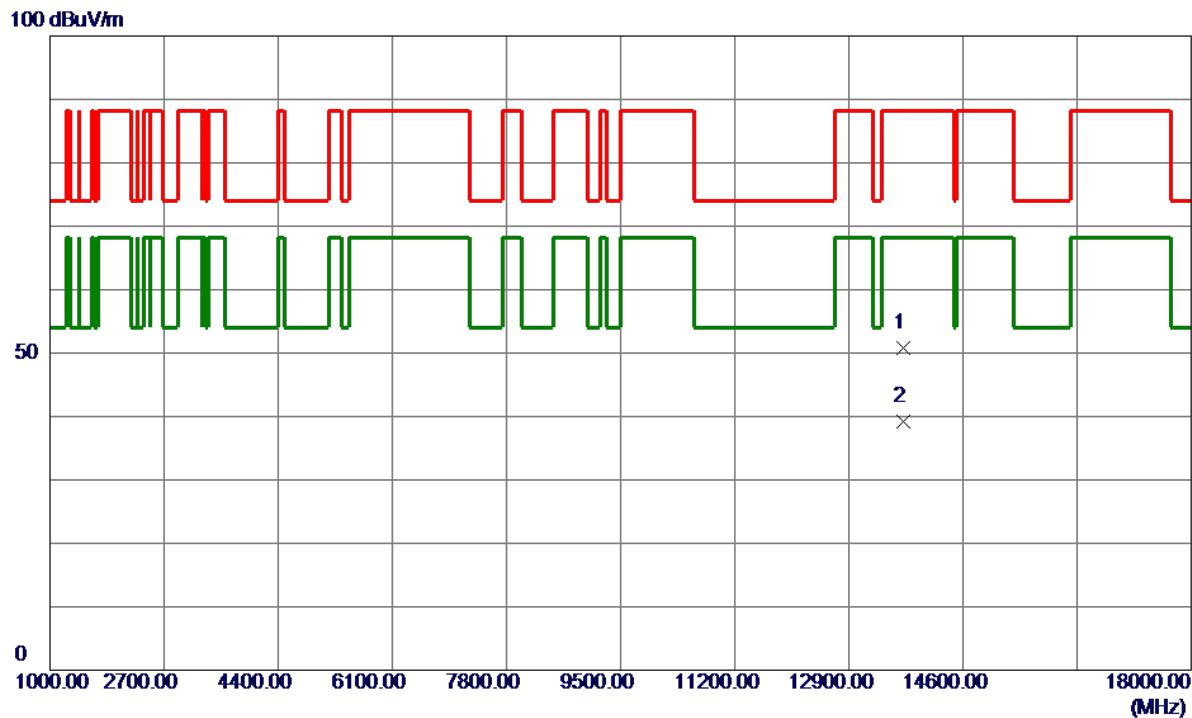


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13707.9000	39.44	11.39	50.83	88.20	-37.37	Peak	
2 *	13708.9400	27.82	11.39	39.21	68.20	-28.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX20 Mode 6875 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

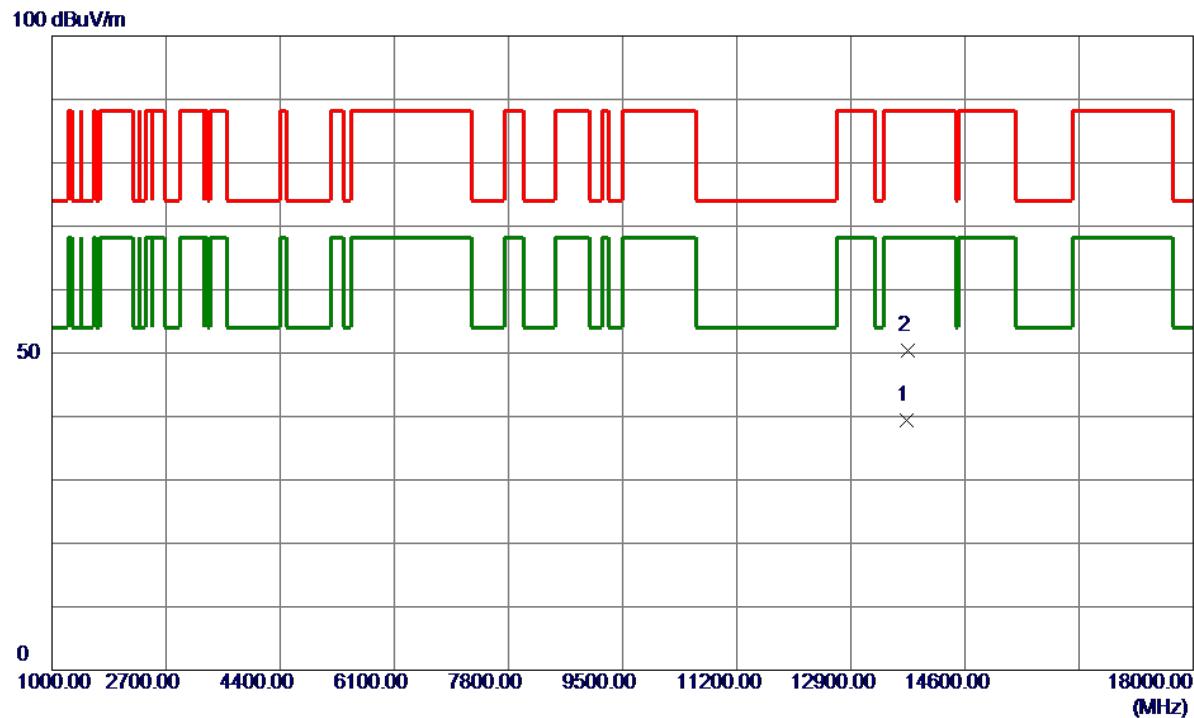


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Comment	
							Detector	
1 *	13740.3200	28.05	11.39	39.44	68.20	-28.76	AVG	
2	13741.3600	38.96	11.39	50.35	88.20	-37.85	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX20 Mode 6995 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

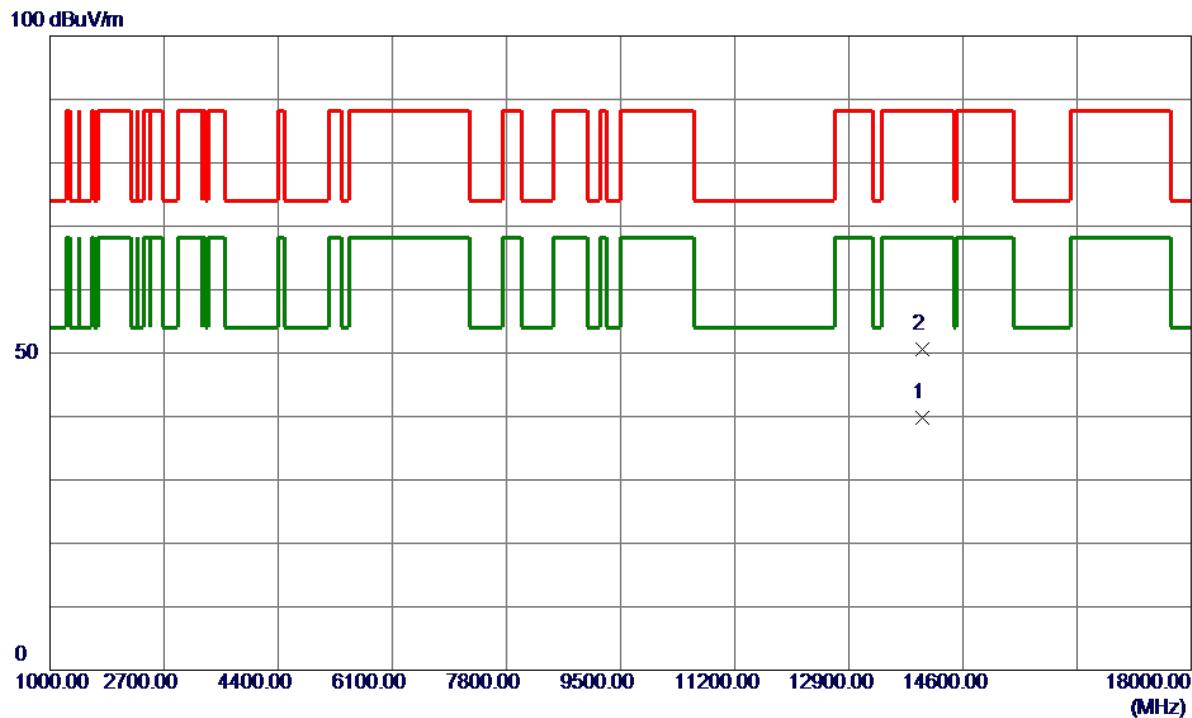


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment							
								1	2	3	4	5	6	7	8
1 *	13997.2800	28.34	11.43	39.77	68.20	-28.43	AVG								
2	13999.0600	39.25	11.43	50.68	88.20	-37.52	Peak								

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX20 Mode 7095 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

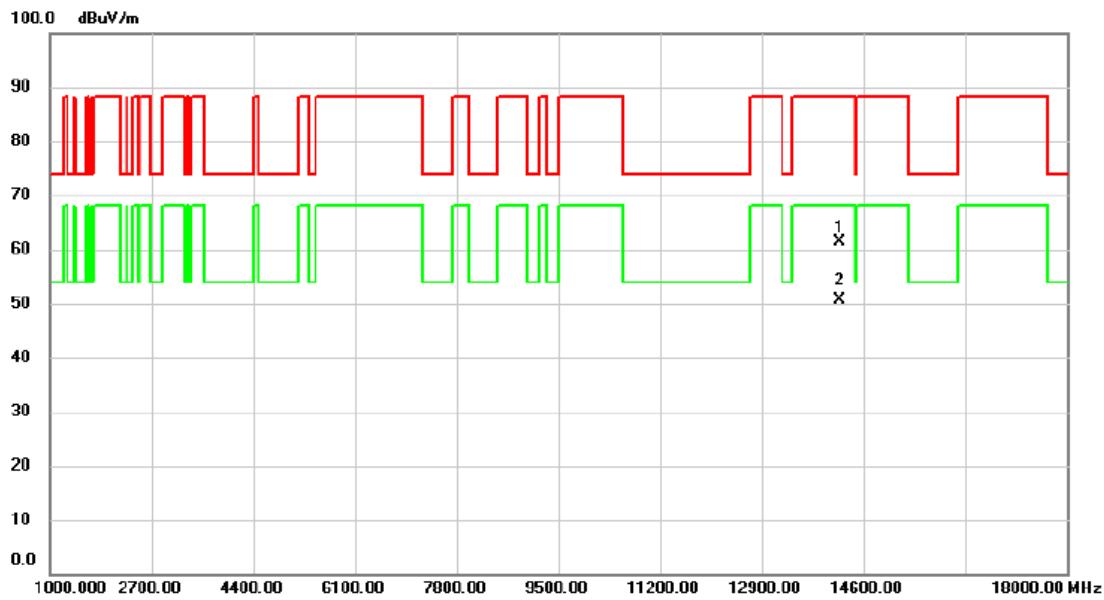


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		14207.250	49.86	11.54	61.40	88.20	-26.80	peak	
2	*	14207.250	38.99	11.54	50.53	68.20	-17.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX40 Mode 5965 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

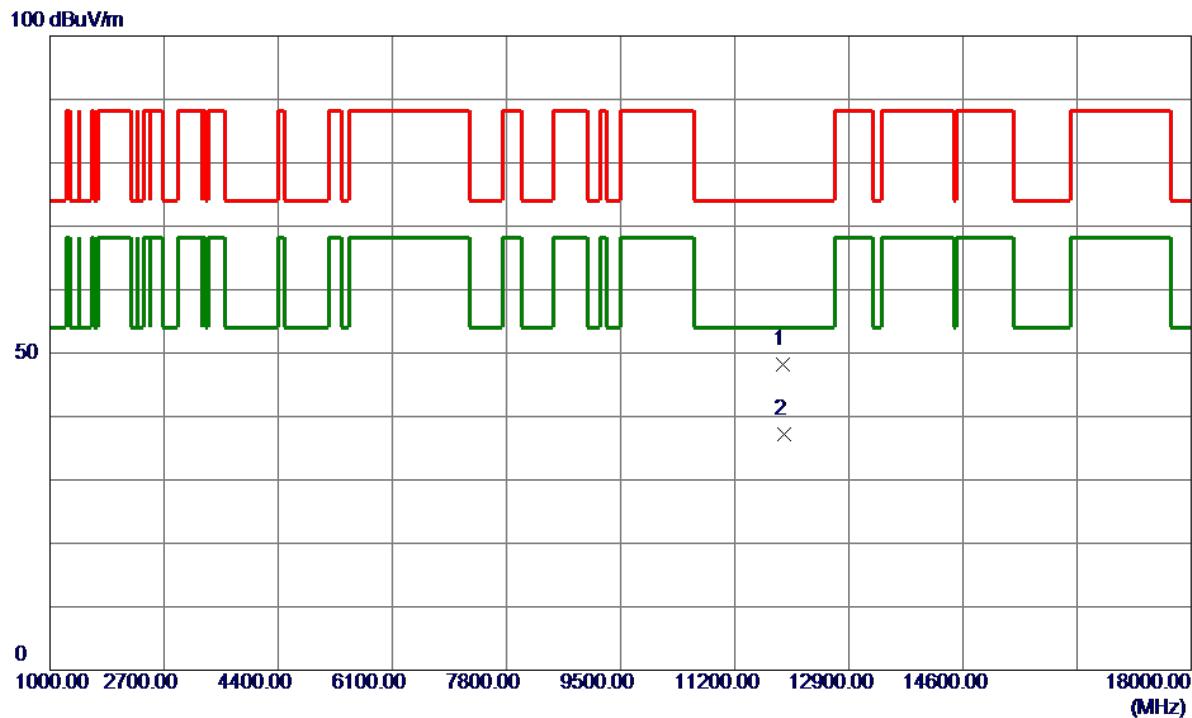


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11918.6800	37.18	11.04	48.22	74.00	-25.78	Peak	
2 *	11936.6400	26.16	11.03	37.19	54.00	-16.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX40 Mode 6165 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

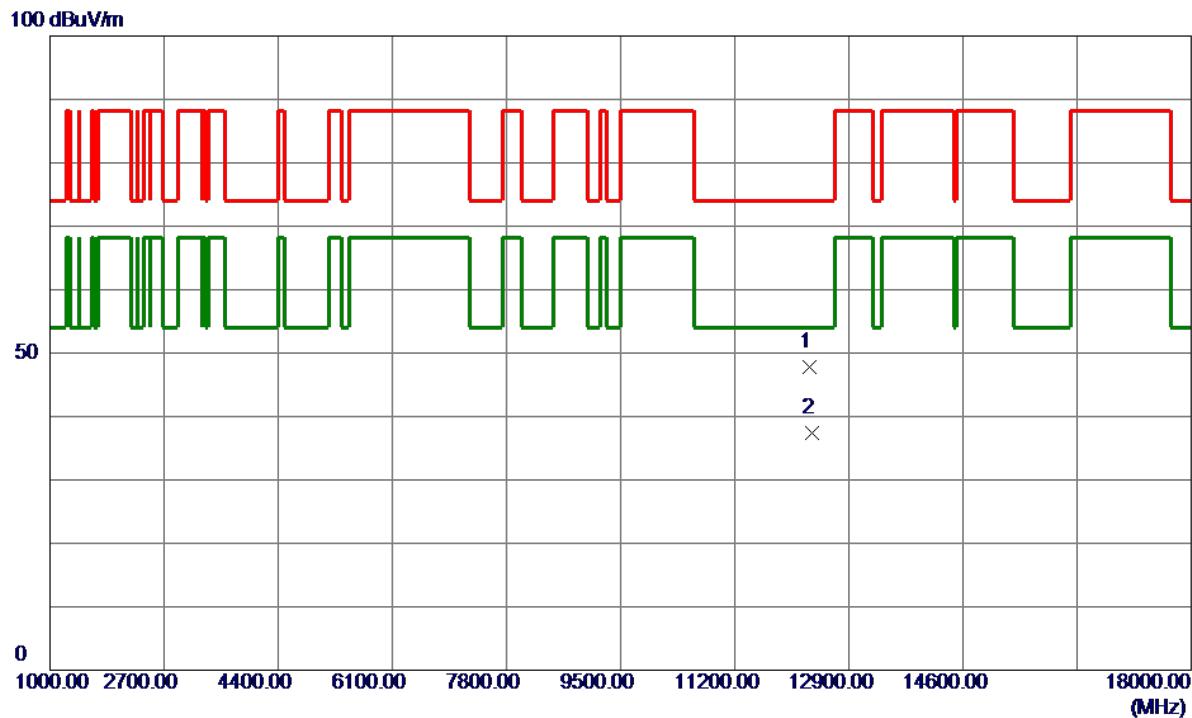


No.	Freq.	Reading Level	Correct Factor	Measure	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	12306.2500	36.64	11.16	47.80	74.00	-26.20	Peak	
2 *	12350.1500	26.12	11.19	37.31	54.00	-16.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-5_TX AX40 Mode 6405 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

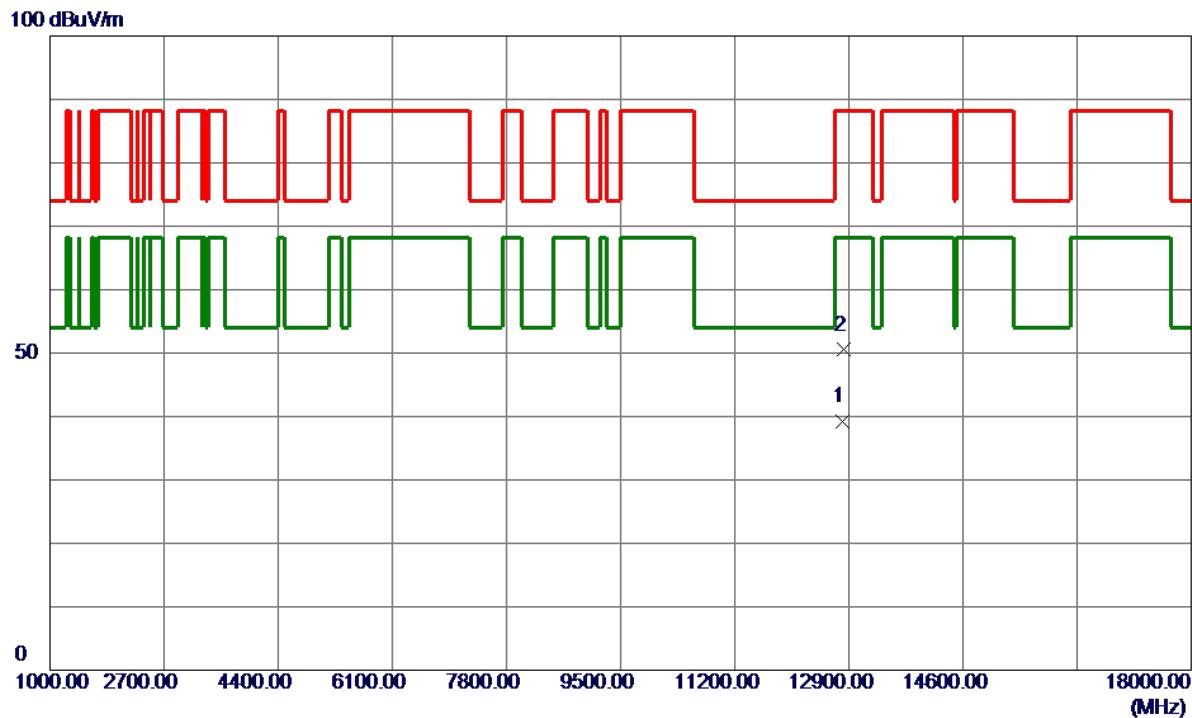
No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX40 Mode 6445 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

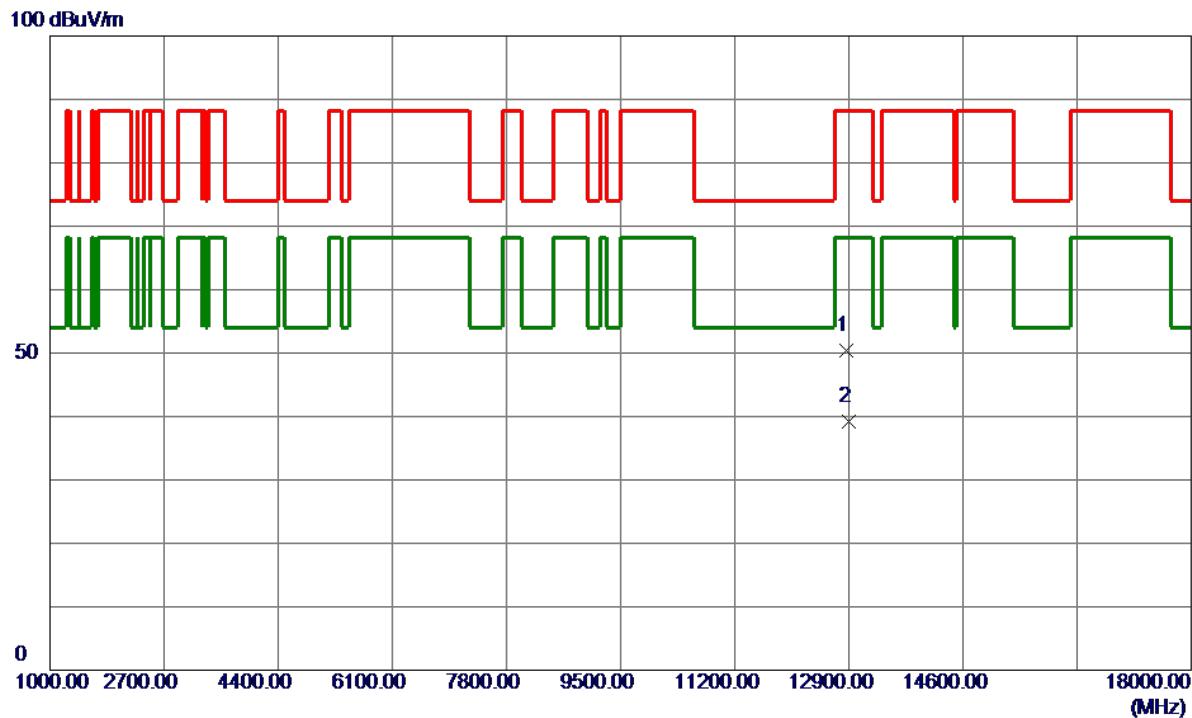


No.	Freq.	Reading Level	Correct Factor	Measure	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	12871.1500	38.92	11.43	50.35	88.20	-37.85	Peak	
2 *	12890.6500	27.82	11.44	39.26	68.20	-28.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX40 Mode 6485 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

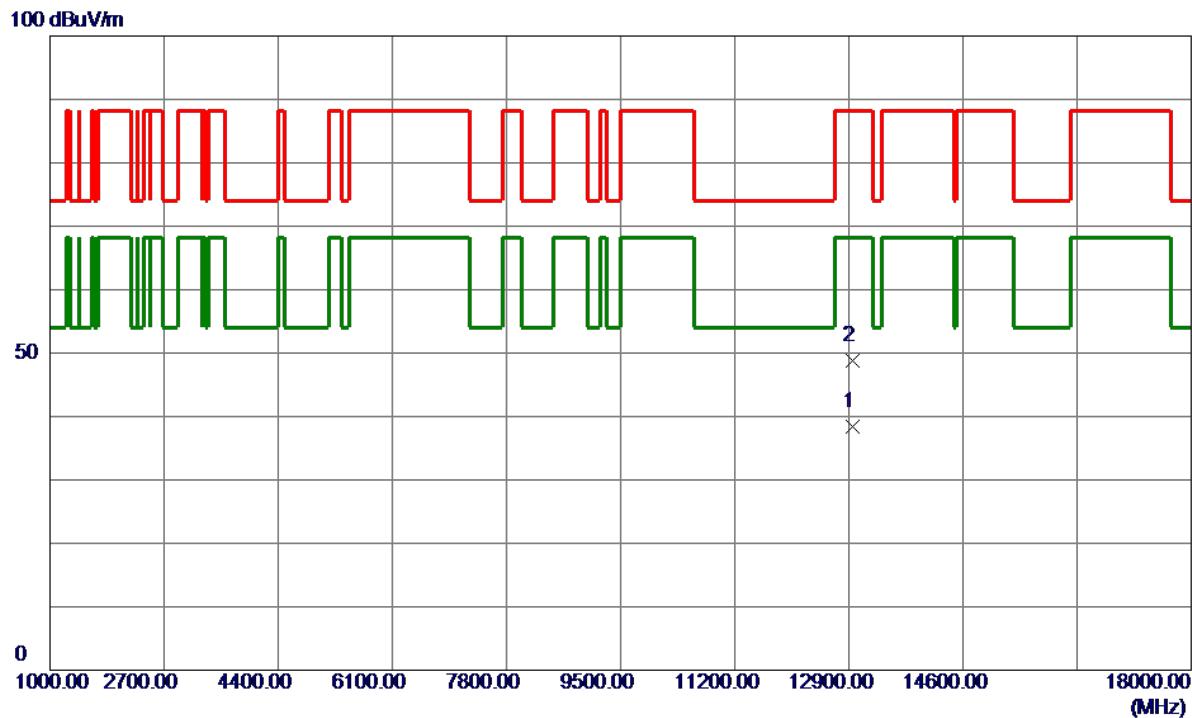


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1 *	12947.5500	26.91	11.47	38.38	68.20	-29.82	AVG	
2	12952.6000	37.39	11.47	48.86	88.20	-39.34	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX40 Mode 6525 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

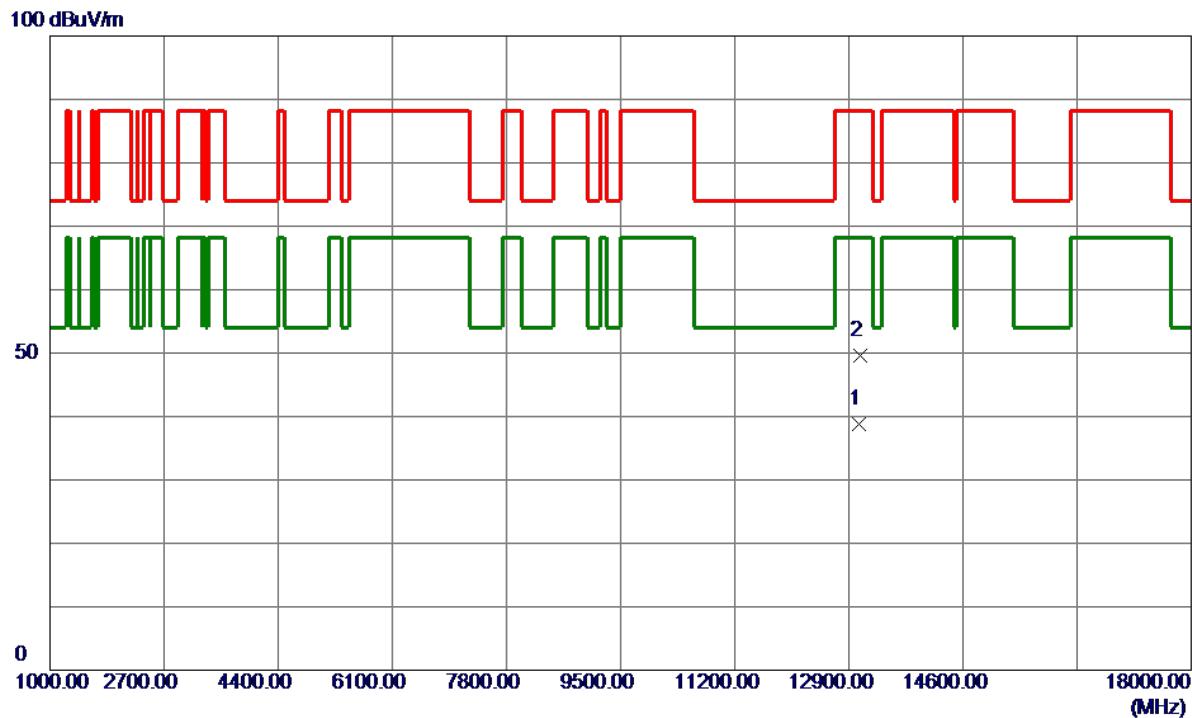


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	13056.0000	27.34	11.47	38.81	68.20	-29.39	AVG	
2	13067.7000	38.19	11.47	49.66	88.20	-38.54	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX40 Mode 6565 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

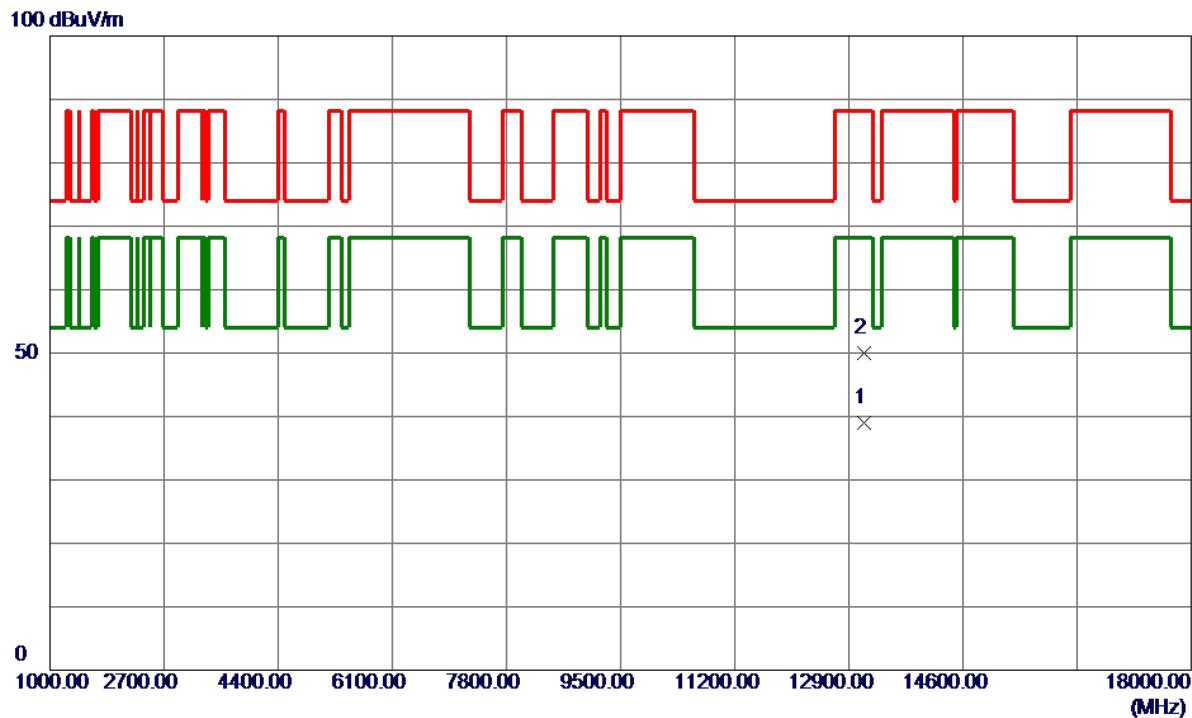


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1 *	13130.8000	27.58	11.45	39.03	68.20	-29.17	AVG	
2	13133.2000	38.48	11.45	49.93	88.20	-38.27	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX40 Mode 6725 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

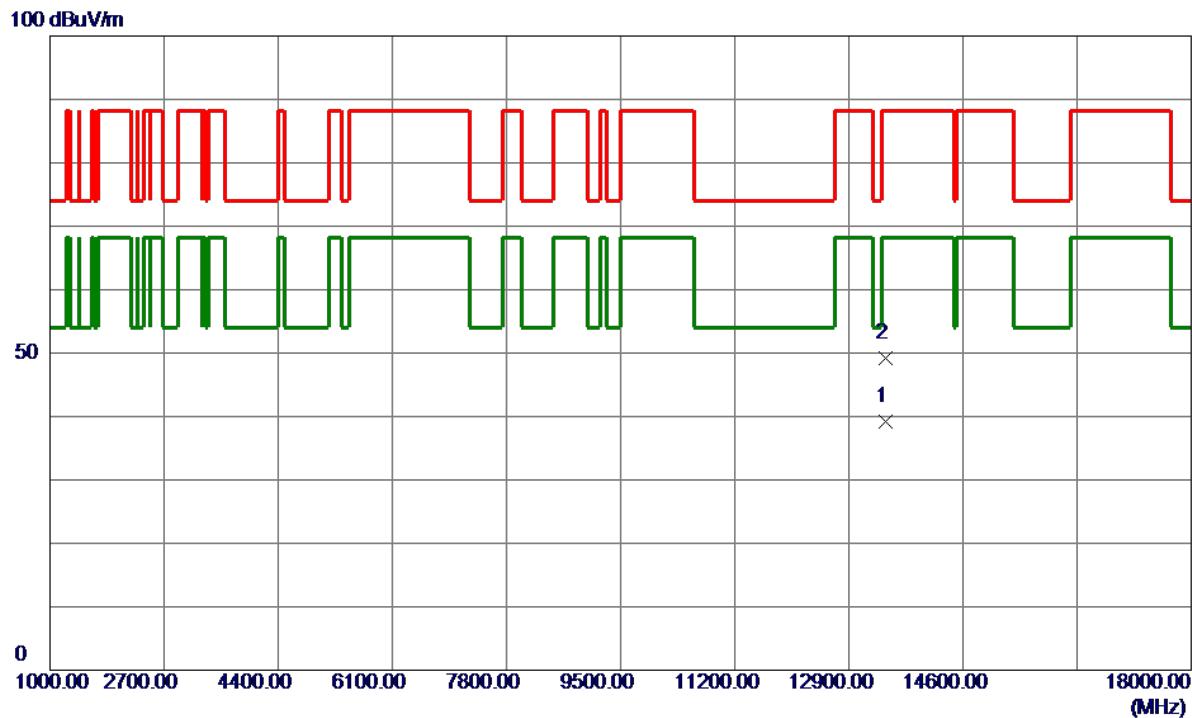


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1 *	13450. 9500	27. 84	11. 37	39. 21	68. 20	-28. 99	AVG	
2	13455. 4000	37. 79	11. 37	49. 16	88. 20	-39. 04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-7_TX AX40 Mode 6845 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

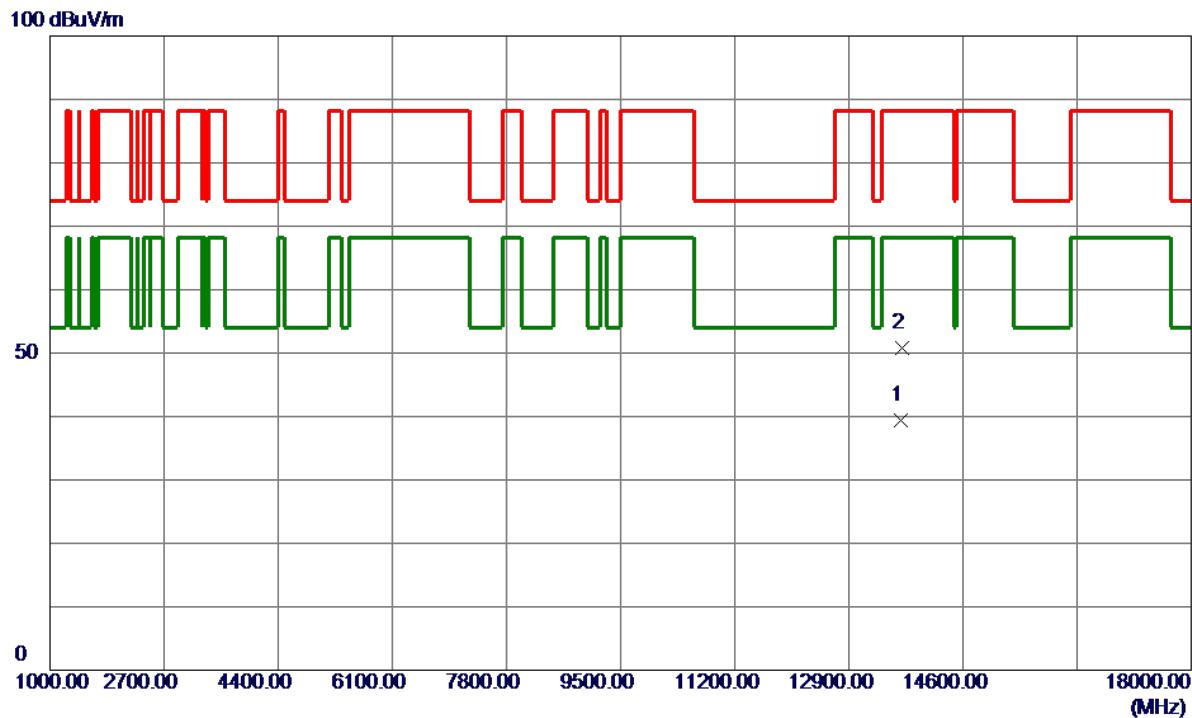
No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX40 Mode 6885 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

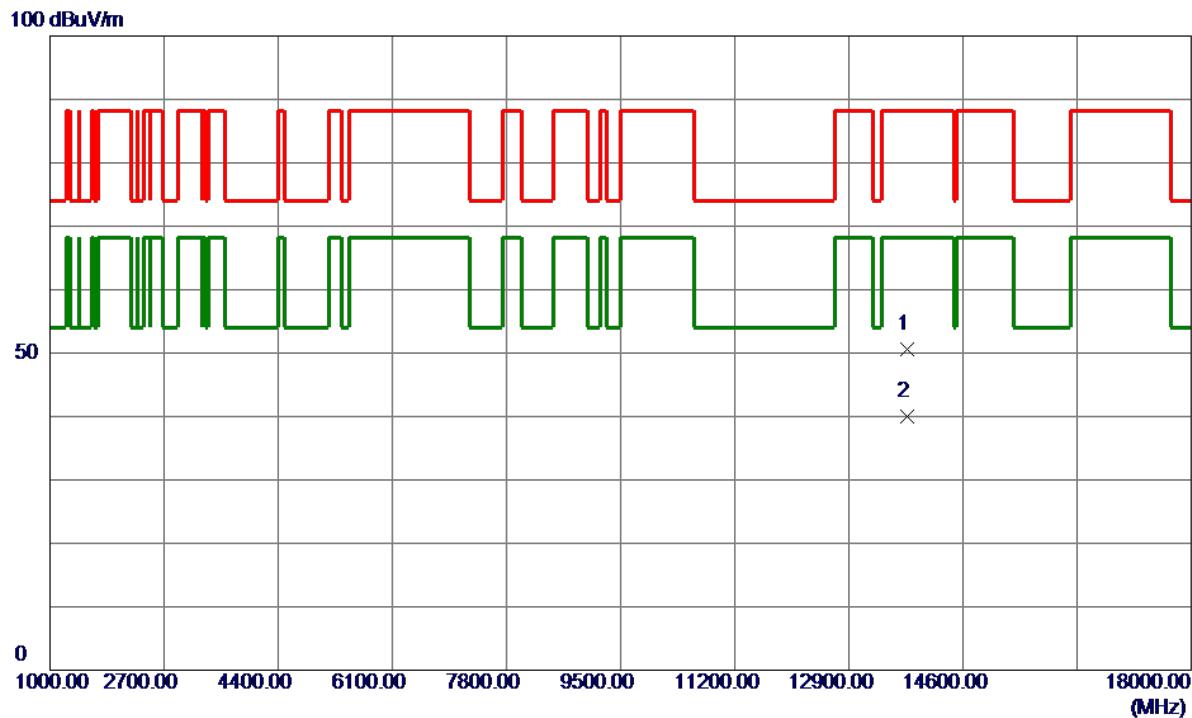


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								1 2 3
1	13769.9500	39.20	11.40	50.60	88.20	-37.60	Peak	
2 *	13770.6000	28.57	11.40	39.97	68.20	-28.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX40 Mode 7005 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

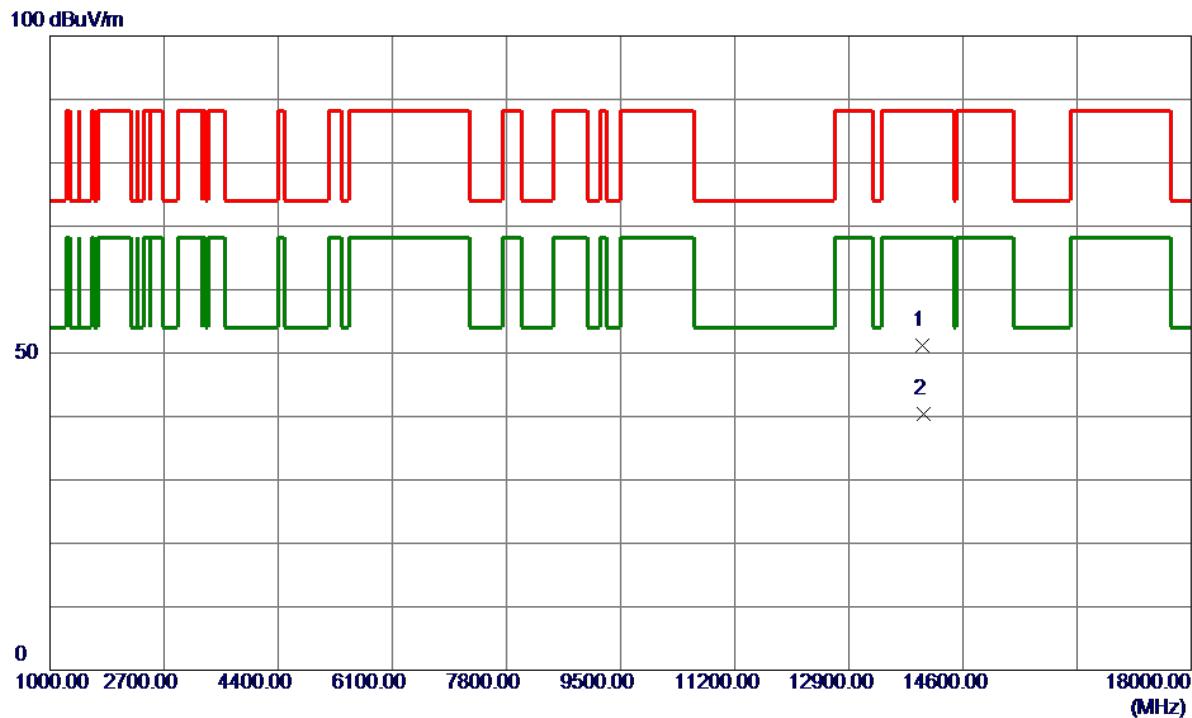


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	13992.7500	39.73	11.43	51.16	88.20	-37.04	Peak	
2 *	14010.8500	29.01	11.44	40.45	68.20	-27.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX40 Mode 7085 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

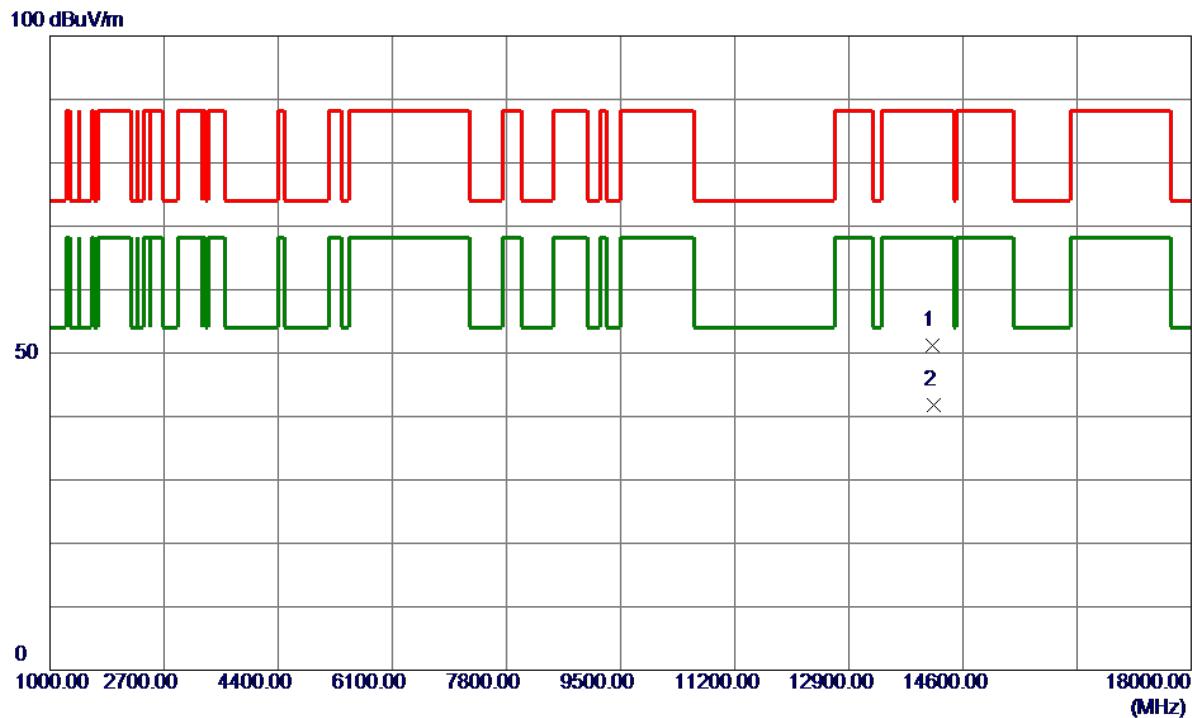


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1	14154.8500	39.63	11.51	51.14	88.20	-37.06	Peak	
2 *	14172.8000	30.28	11.51	41.79	68.20	-26.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX80 Mode 5985 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

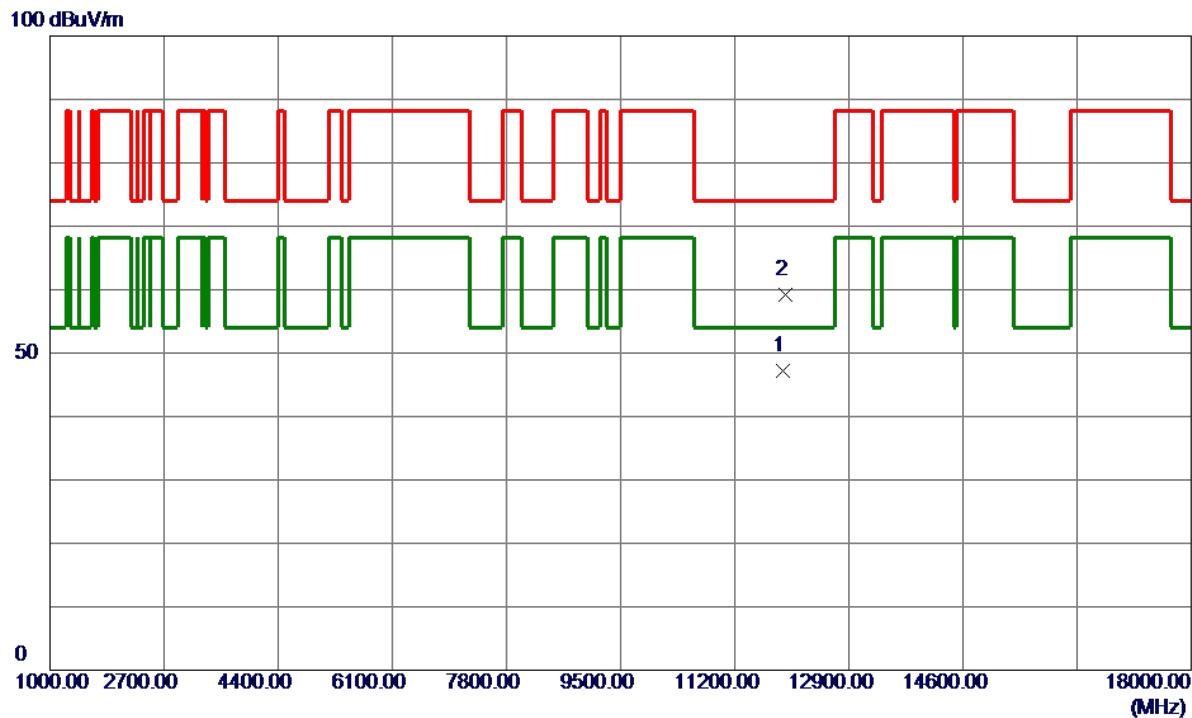


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								1
1 *	11917.1000	26.18	21.04	47.22	54.00	-6.78	AVG	
2	11952.7500	38.10	21.03	59.13	74.00	-14.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX80 Mode 6145 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

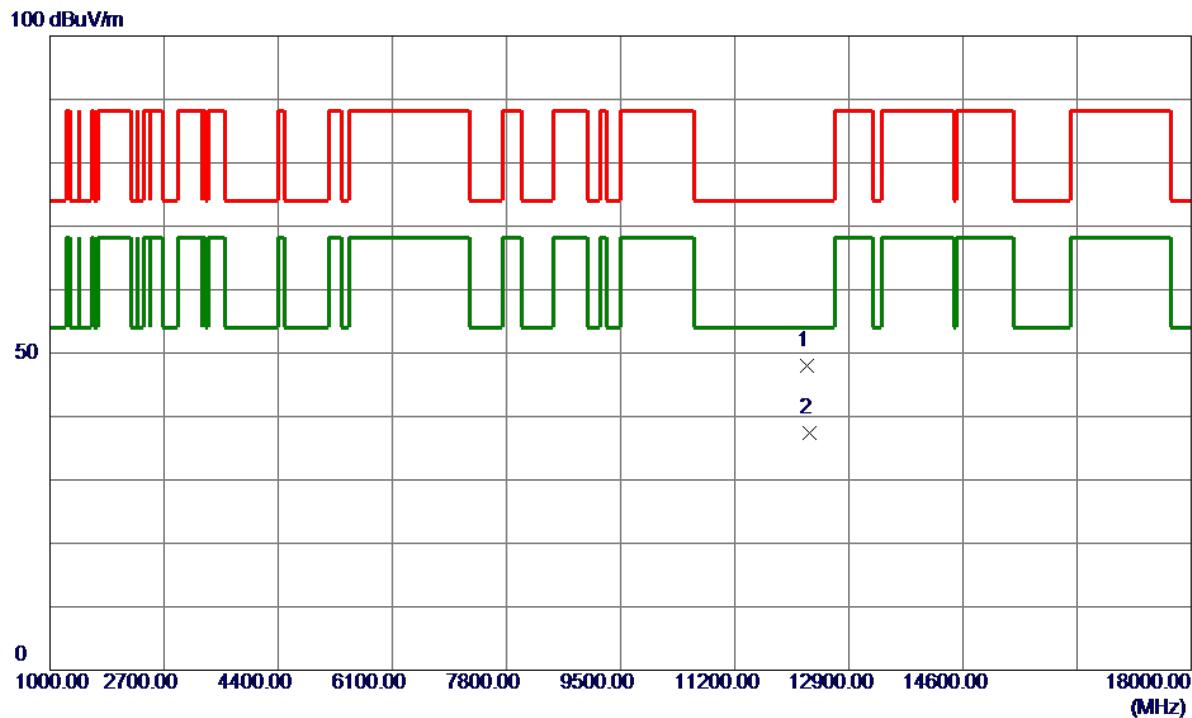


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								1 26.30 36.81 11.15 47.96 74.00 -26.04 Peak
2 *	12315.0000	26.30	11.17	37.47	54.00	-16.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX80 Mode 6385 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

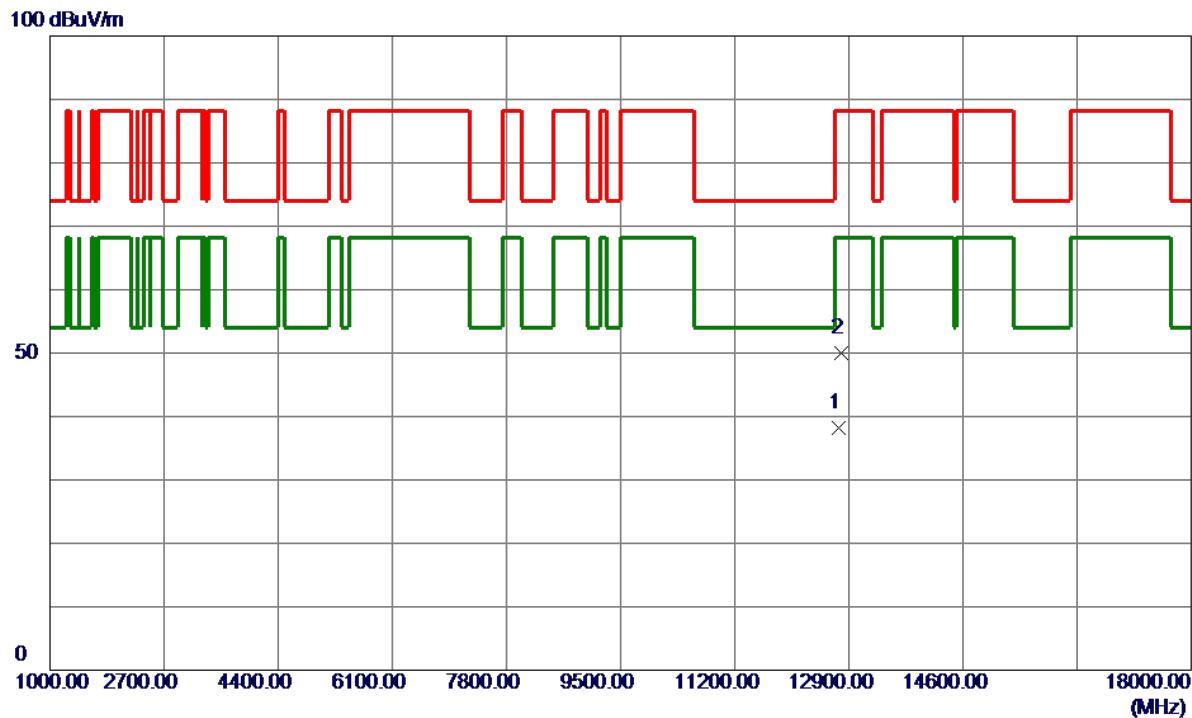


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	12753.9000	26.74	11.38	38.12	68.20	-30.08	AVG	
2	12793.5000	38.60	11.39	49.99	88.20	-38.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX80 Mode 6465 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

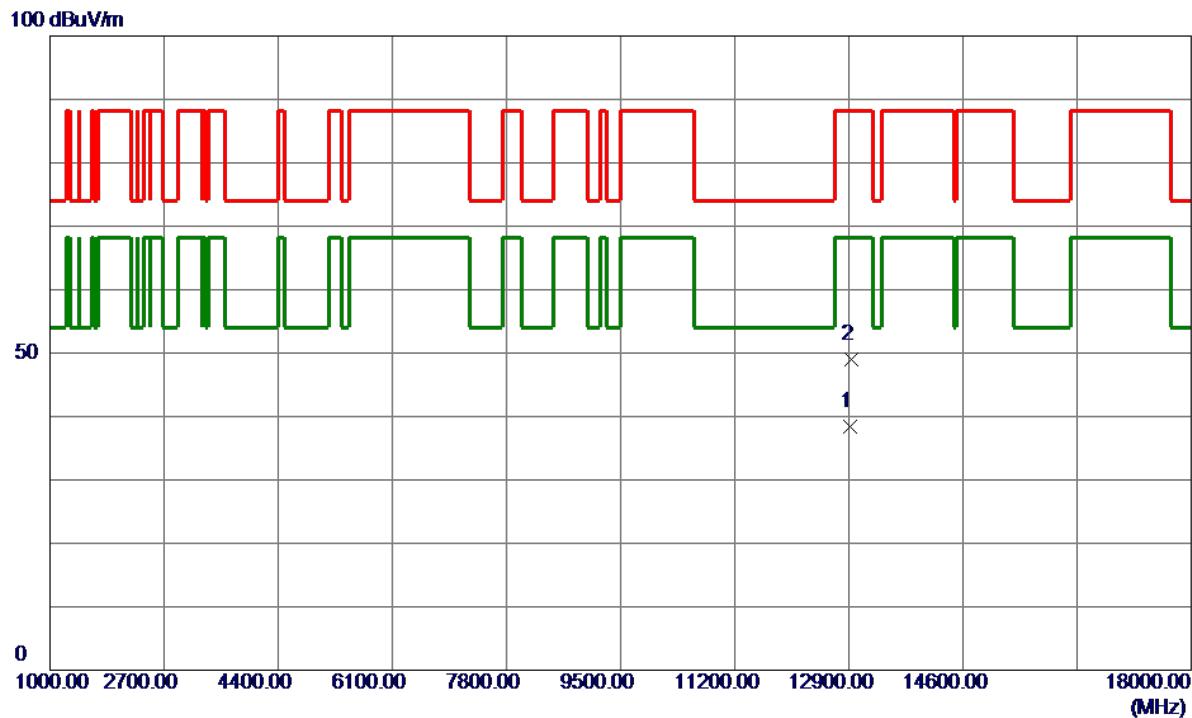


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1 *	12910.8500	27.03	11.45	38.48	68.20	-29.72	AVG	
2	12931.3500	37.54	11.46	49.00	88.20	-39.20	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX80 Mode 6545 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

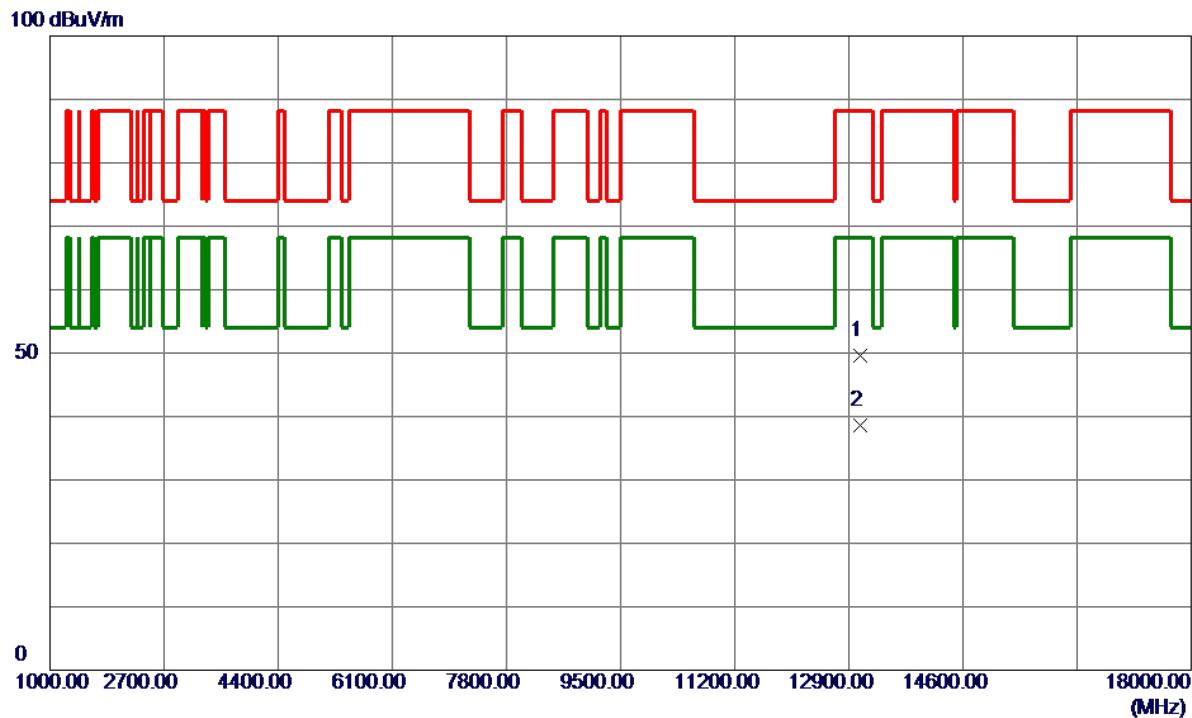


No.	Freq.	Reading Level	Correct Factor	Measure	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	13076.7500	38.04	11.47	49.51	88.20	-38.69	Peak	
2 *	13079.1000	27.12	11.47	38.59	68.20	-29.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX80 Mode 6705 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

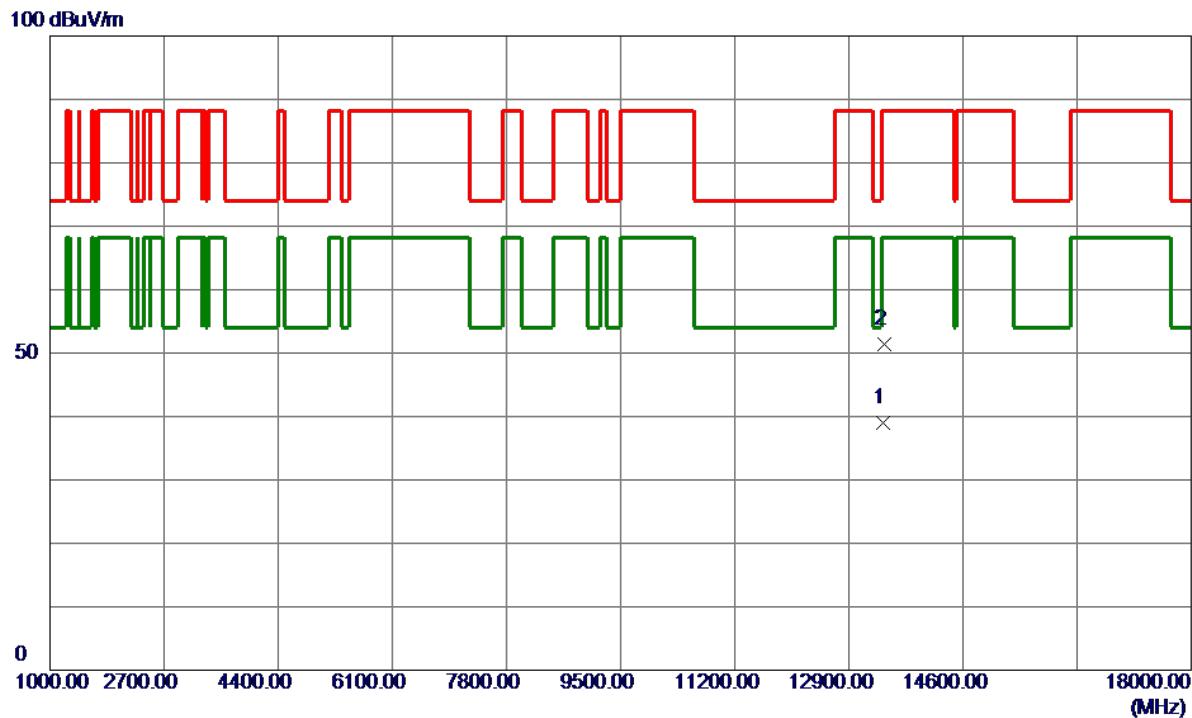


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1 *	13409.0500	27.70	11.38	39.08	68.20	-29.12	AVG	
2	13434.1000	40.10	11.37	51.47	88.20	-36.73	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	UNII-7_TX AX80 Mode 6865 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

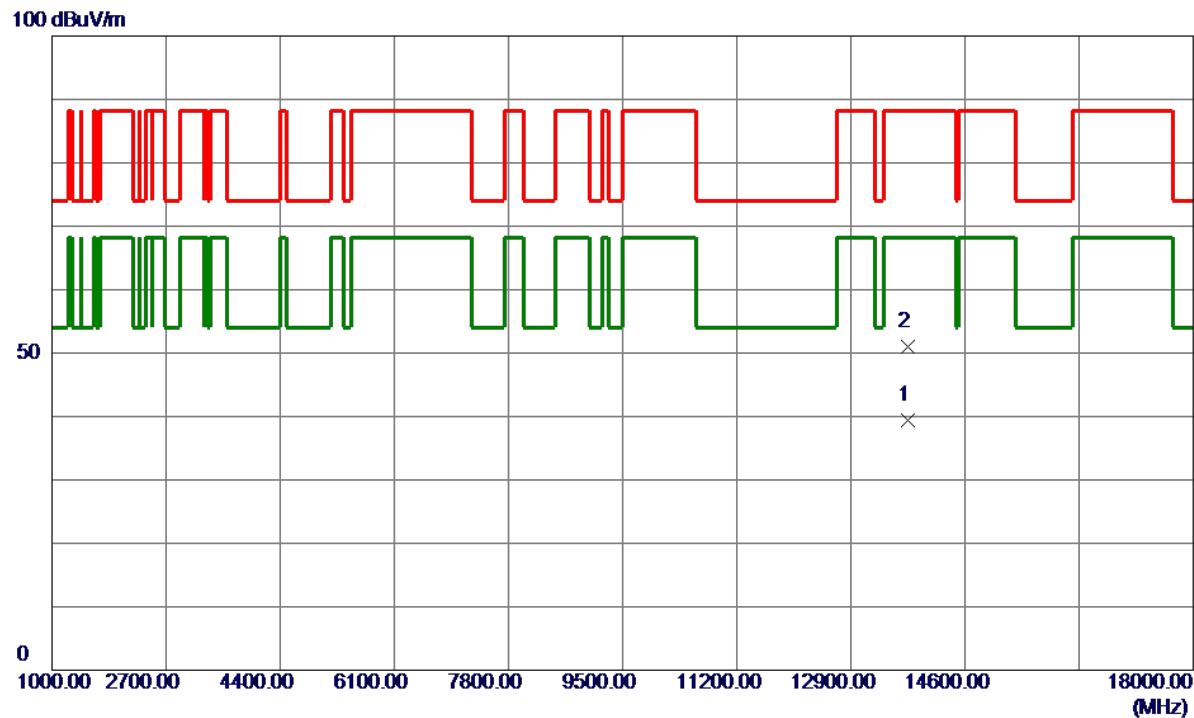
No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX80 Mode 6945 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

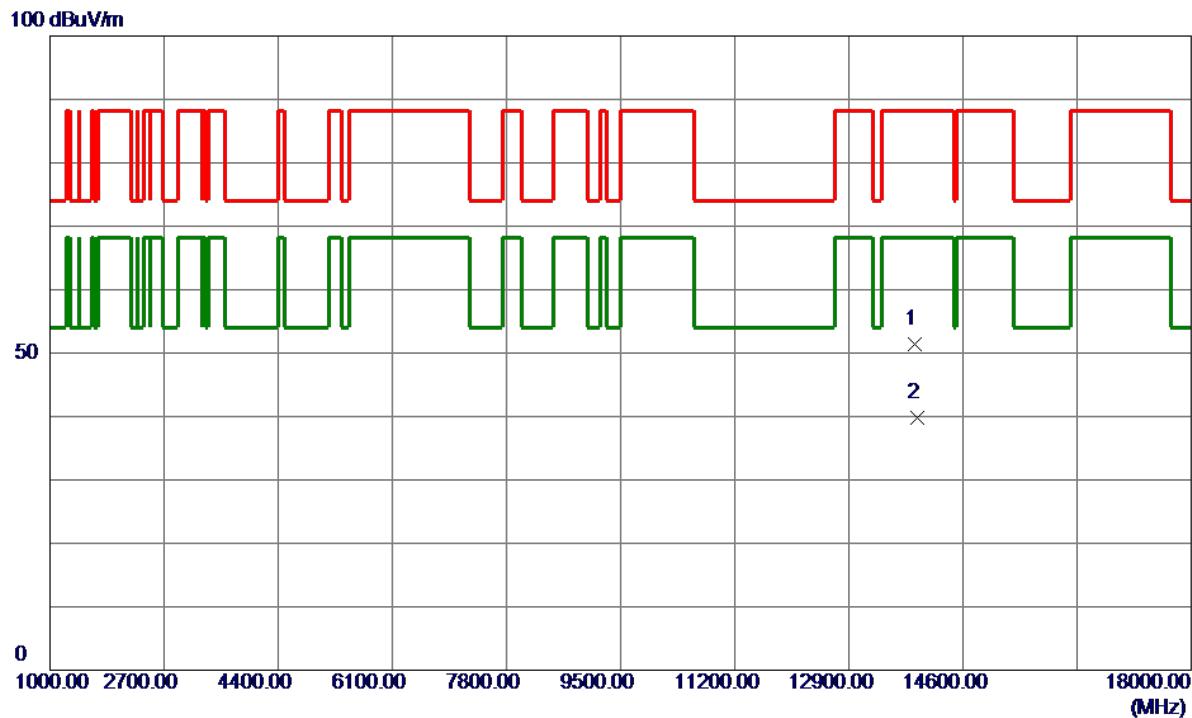


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Comment	
							Detector	
1	13872.9500	39.93	11.41	51.34	88.20	-36.86	Peak	
2 *	13911.0500	28.31	11.42	39.73	68.20	-28.47	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX80 Mode 7025 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

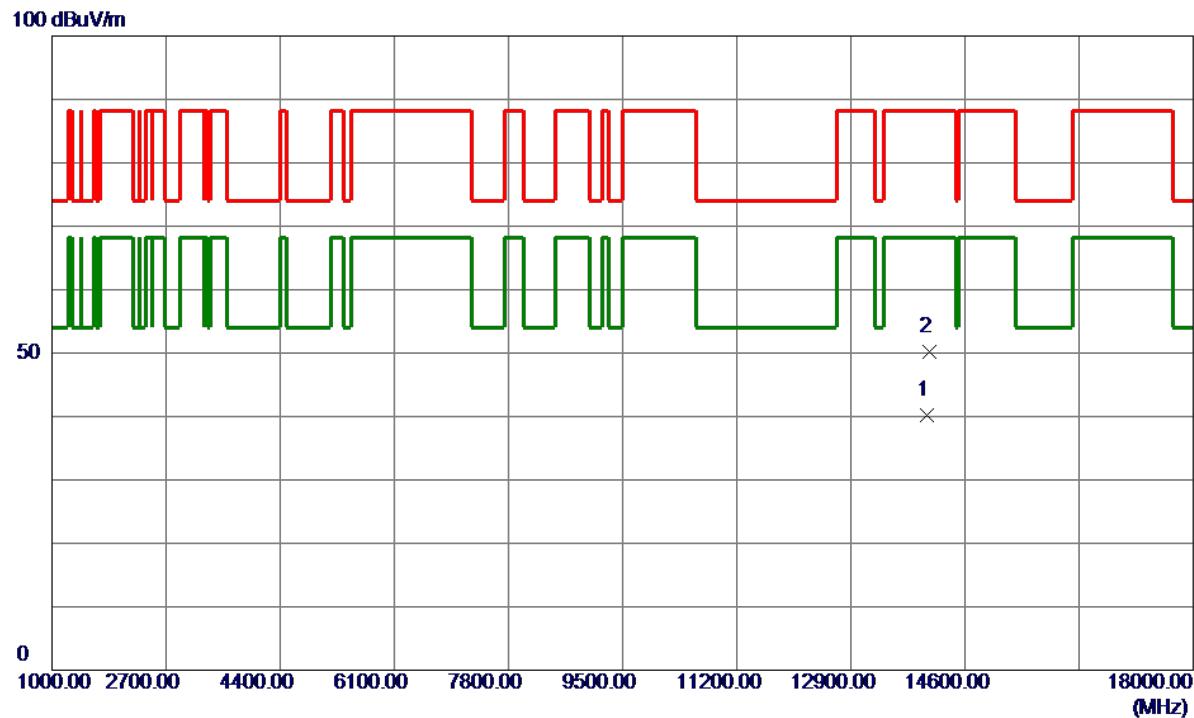


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	
							Detector	Comment
1 *	14030.1000	28.79	11.44	40.23	68.20	-27.97	AVG	
2	14072.0500	38.74	11.47	50.21	88.20	-37.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX160 Mode 6025 MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

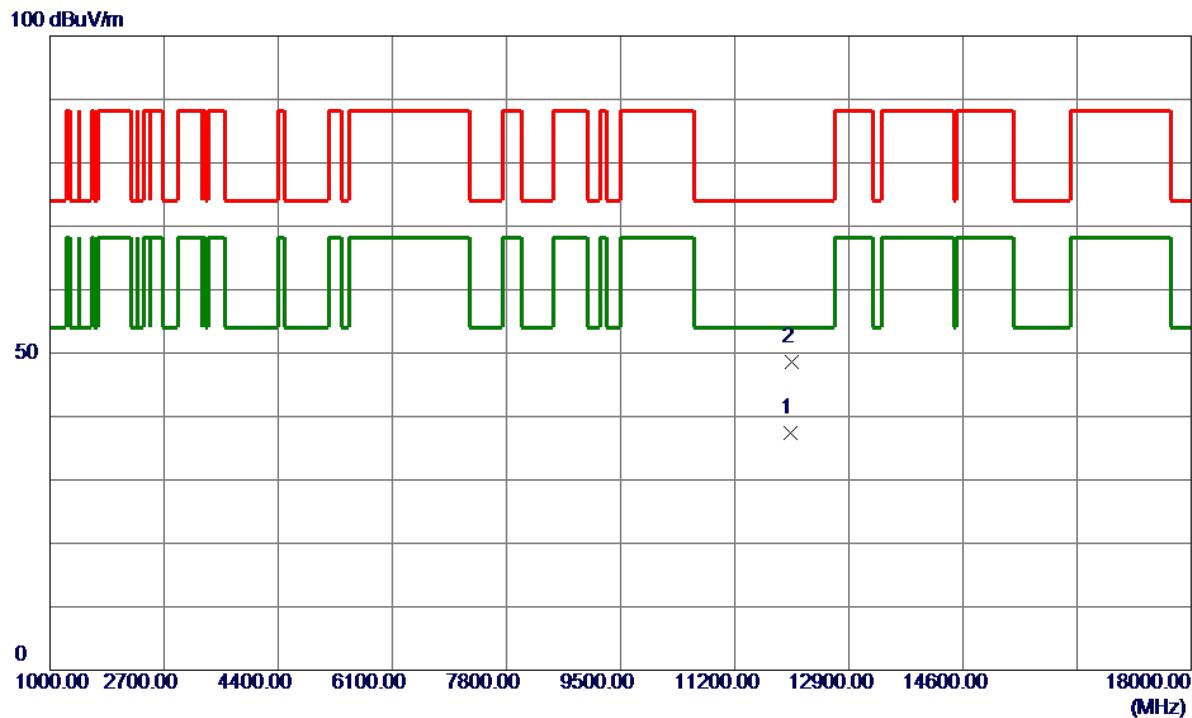


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1 *	12035.7000	26.40	11.03	37.43	54.00	-16.57	AVG	
2	12050.9000	37.56	11.04	48.60	74.00	-25.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX160 Mode 6185 MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

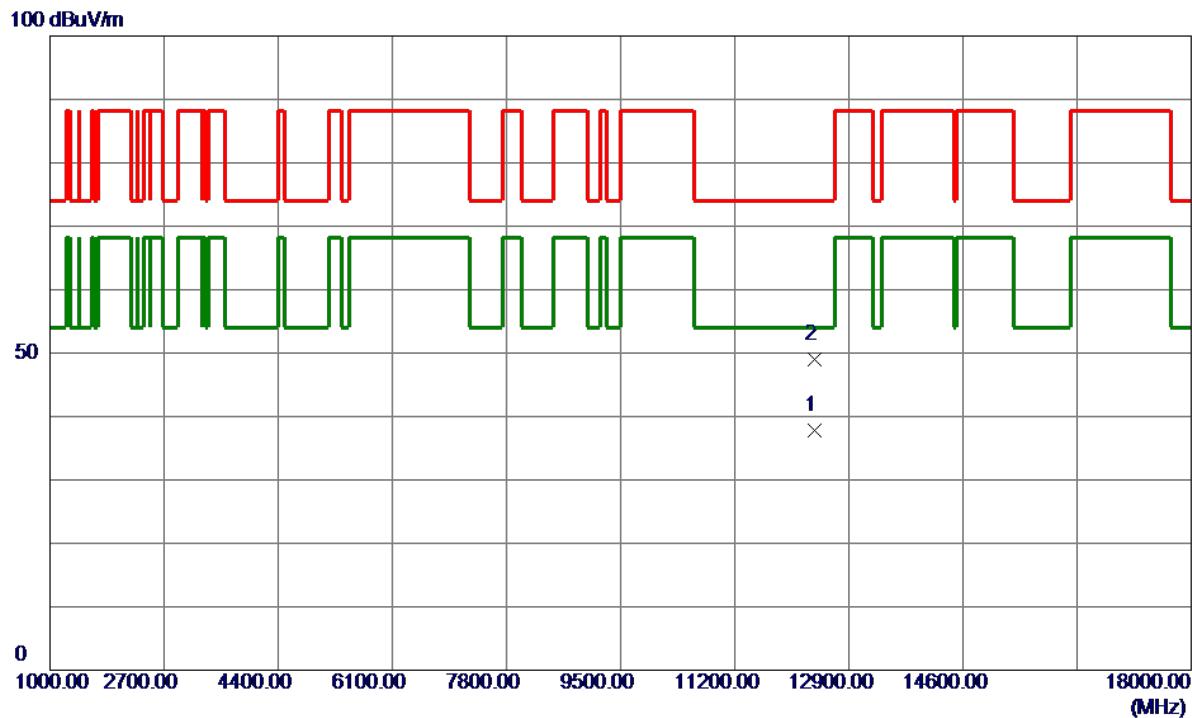


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Comment	
							Detector	
1 *	12382.3500	26.55	11.20	37.75	54.00	-16.25	AVG	
2	12386.8500	37.87	11.20	49.07	74.00	-24.93	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX AX160 Mode 6345 MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

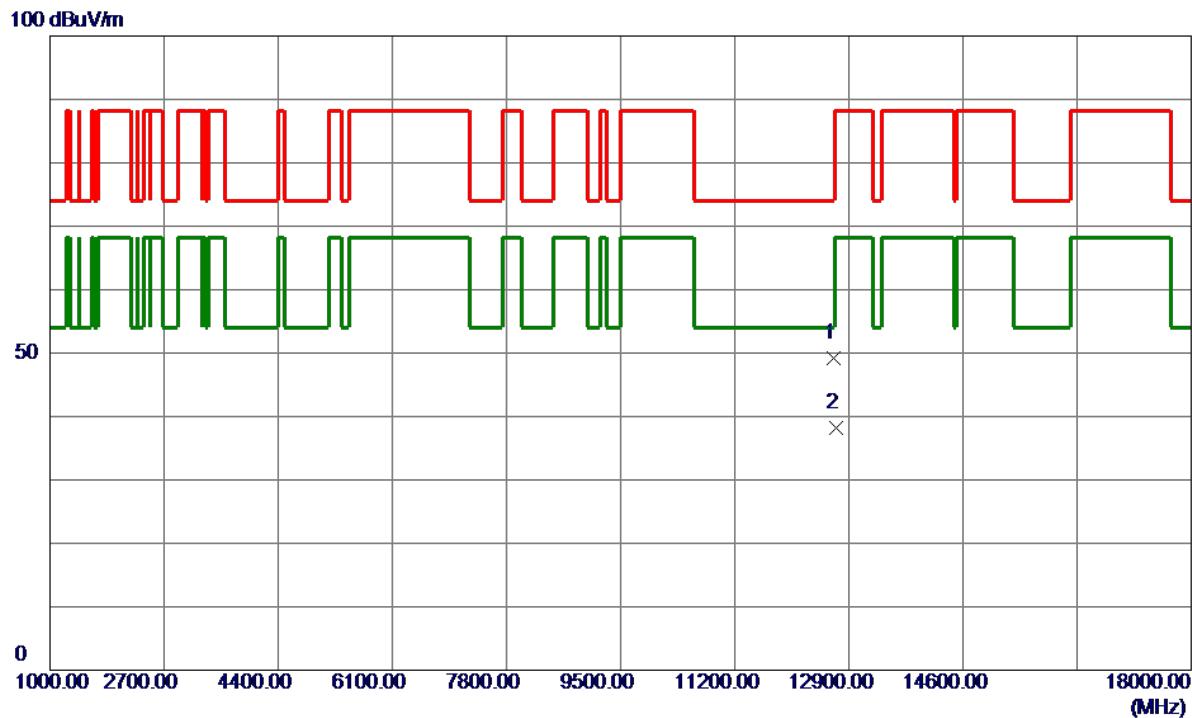


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	12675.7500	37.89	11.34	49.23	74.00	-24.77	Peak	
2	12712.0000	26.76	11.36	38.12	68.20	-30.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX AX160 Mode 6505 MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

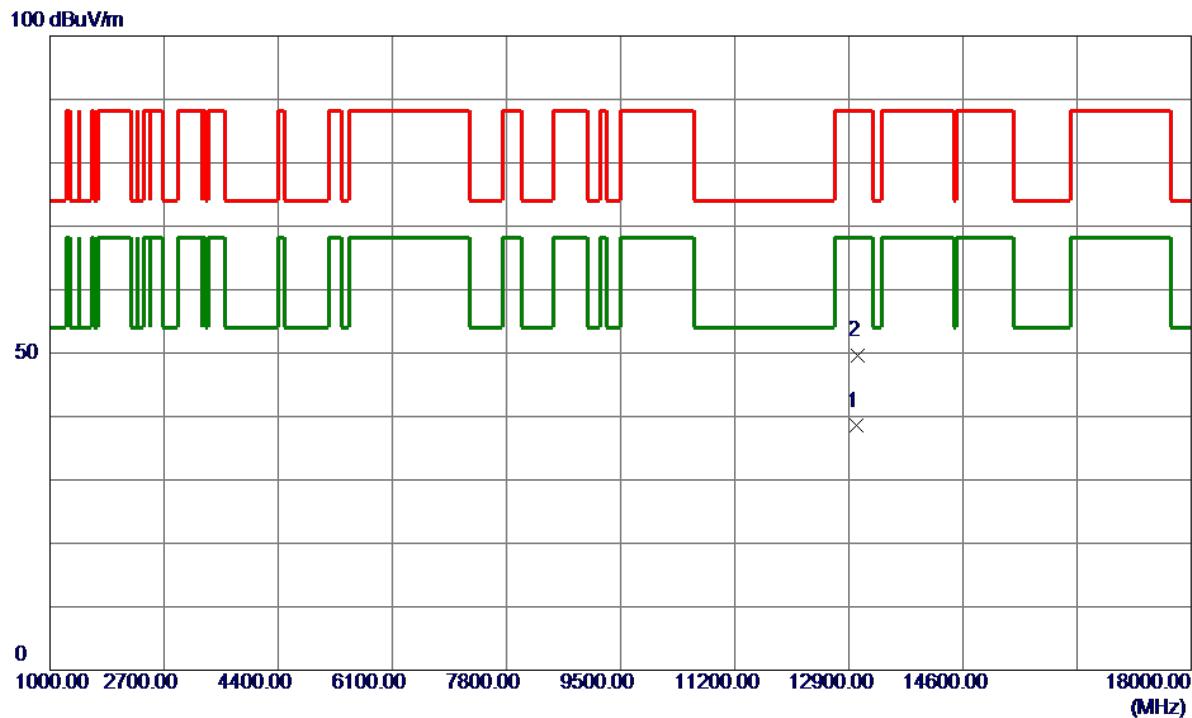


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	13016.0000	27.01	11.49	38.50	68.20	-29.70	AVG	
2	13032.6500	38.21	11.48	49.69	88.20	-38.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX160 Mode 6665 MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

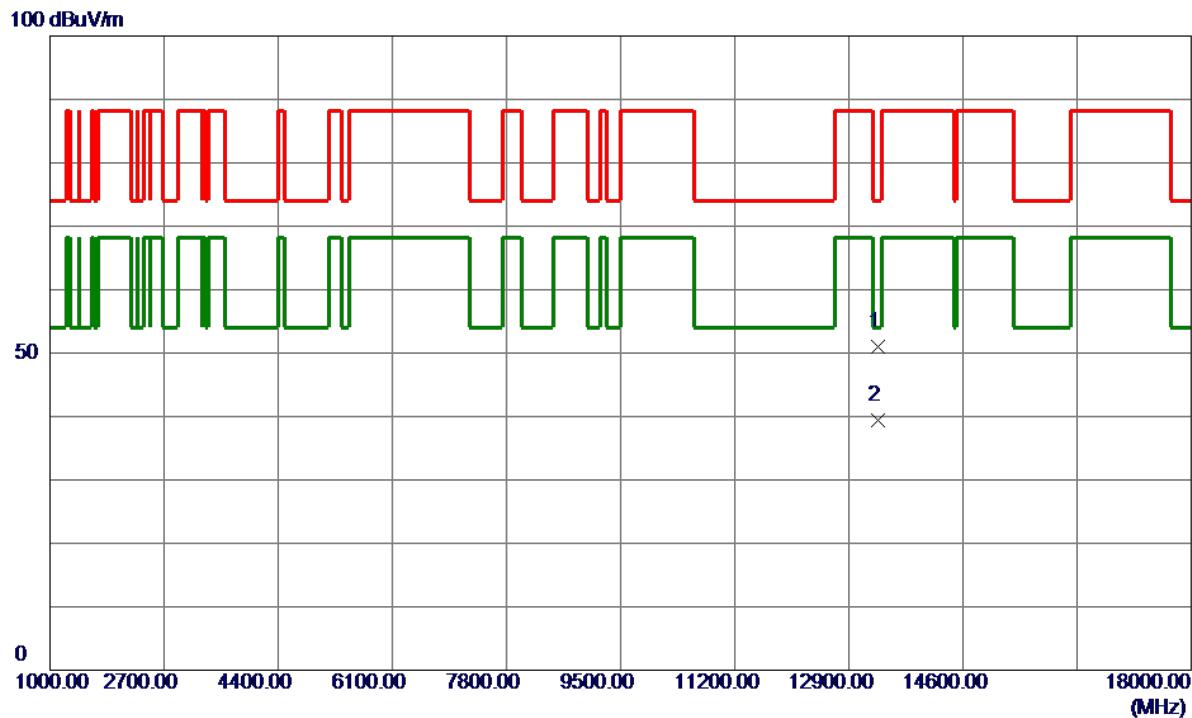


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								1 23.05 Peak
1	13325.7500	39.55	11.40	50.95	74.00	-23.05		
2 *	13330.8000	27.94	11.40	39.34	54.00	-14.66		AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX AX160 Mode 6825 MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

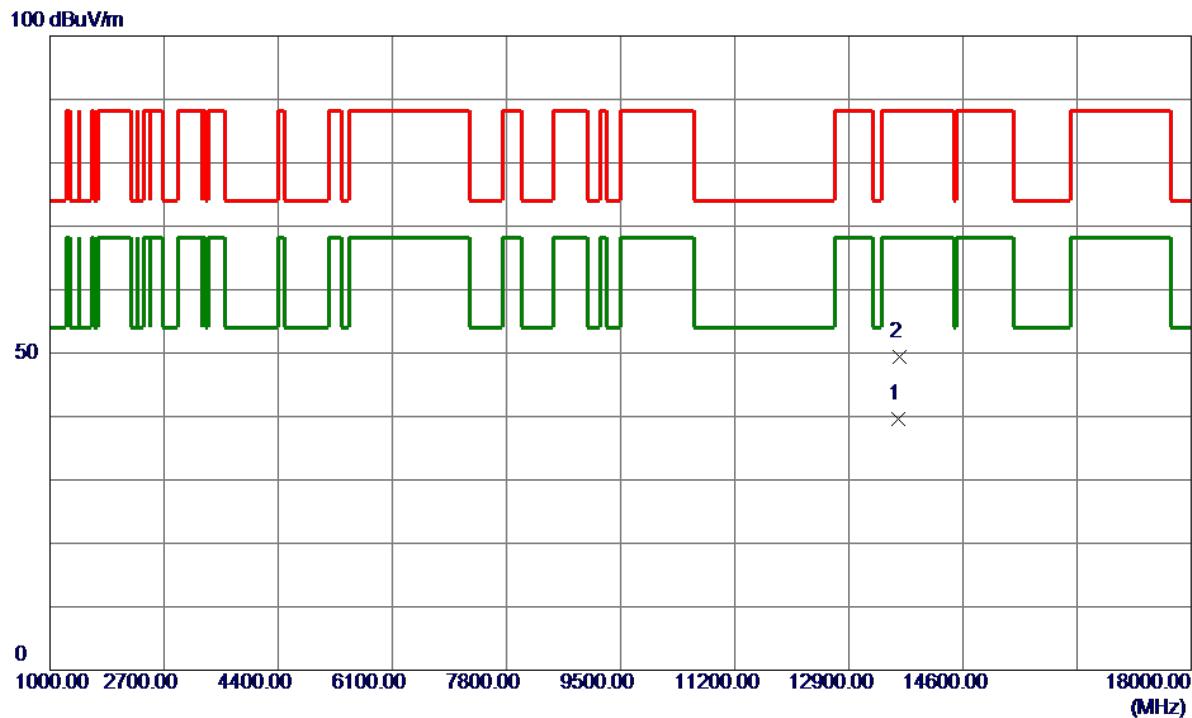


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	13642.1000	28.16	11.38	39.54	68.20	-28.66	AVG	
2	13647.1000	37.93	11.38	49.31	88.20	-38.89	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX AX160 Mode 6985 MHz	Polarization	Vertical
-----------	-------------------------------	--------------	----------

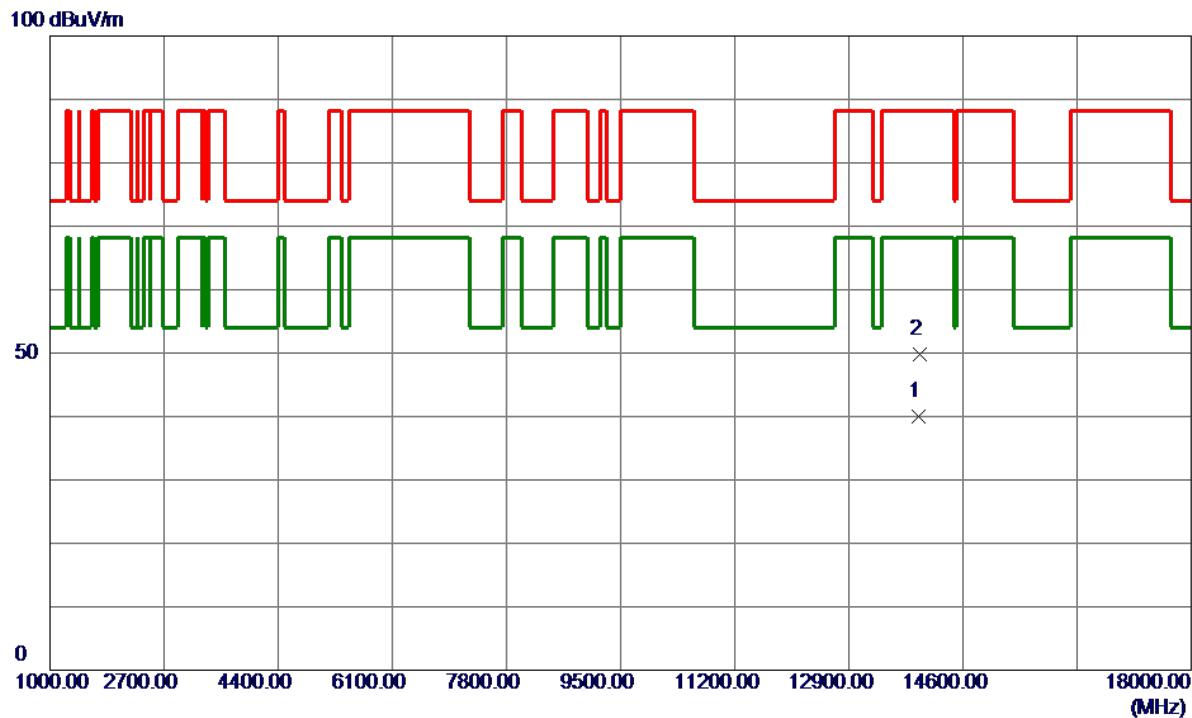


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1 *	13946.8000	28.49	11.42	39.91	68.20	-28.29	AVG	
2	13964.3500	38.30	11.42	49.72	88.20	-38.48	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE20 Mode 5955 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

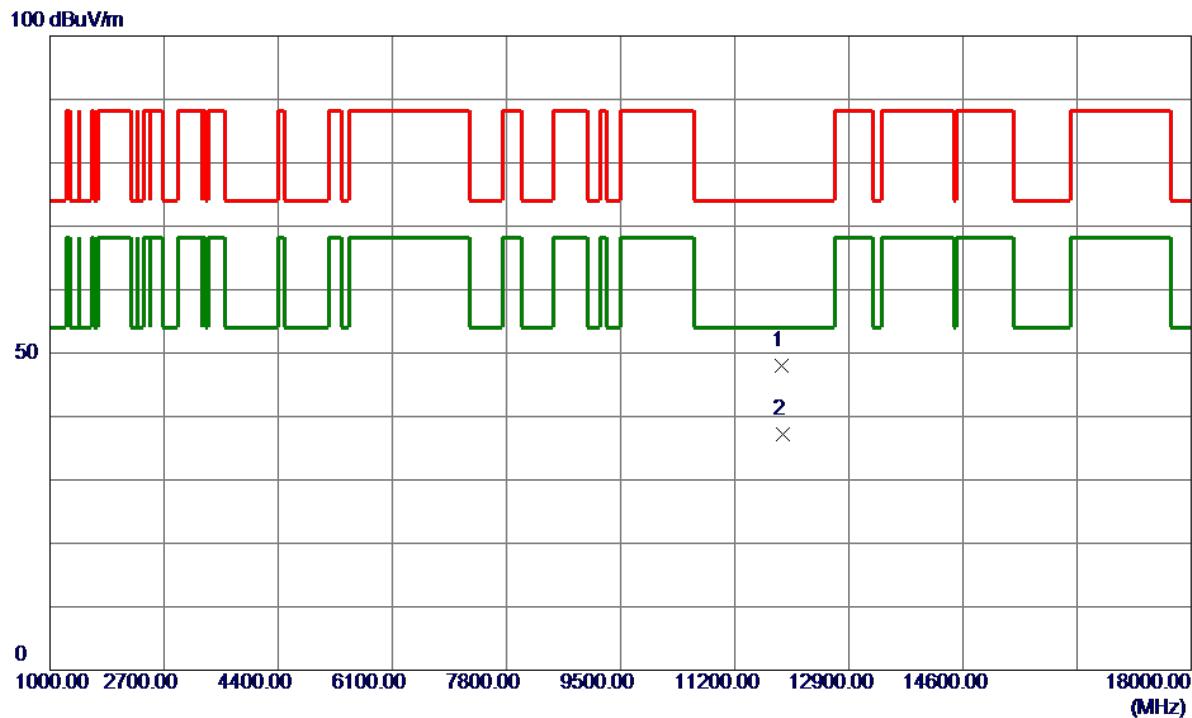


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								1 26.89 36.89 11.05 47.94 74.00 -26.06 Peak
1	11894.8	36.89	11.05	47.94	74.00	-26.06	Peak	
2 *	11913.4	26.22	11.04	37.26	54.00	-16.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE20 Mode 6175 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

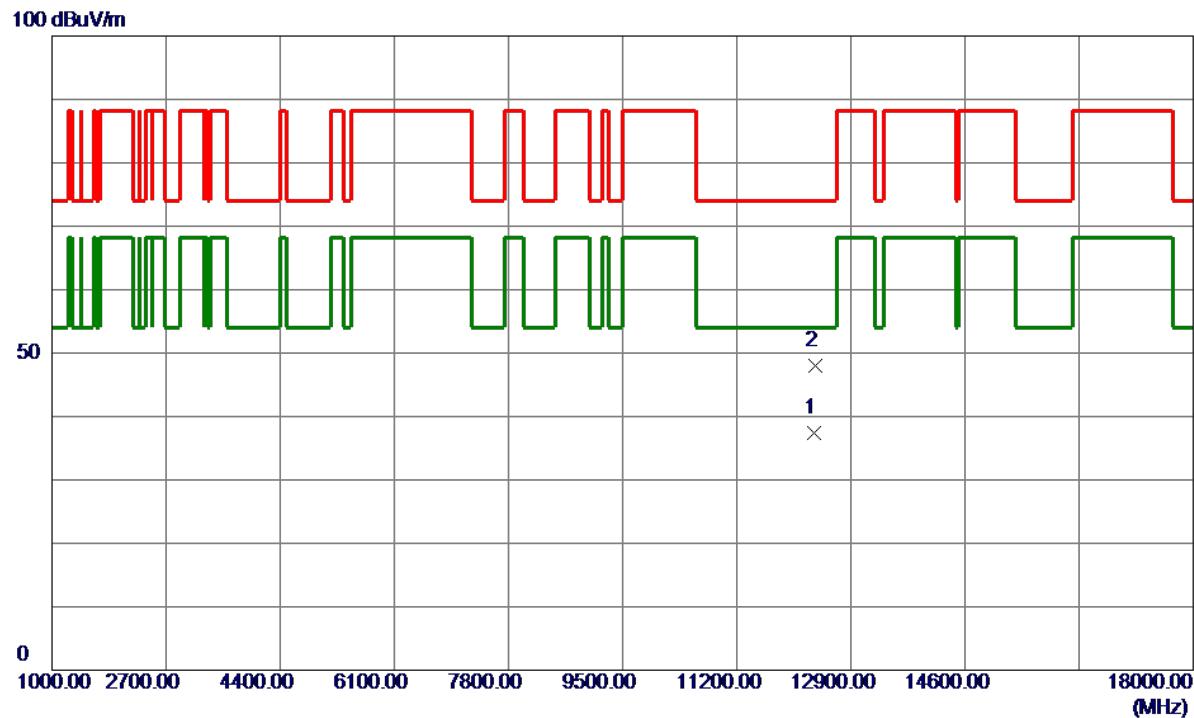


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								1
1 *	12360.1000	26.25	11.19	37.44	54.00	-16.56	AVG	
2	12362.3000	36.89	11.19	48.08	74.00	-25.92	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-5_TX BE20 Mode 6415 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

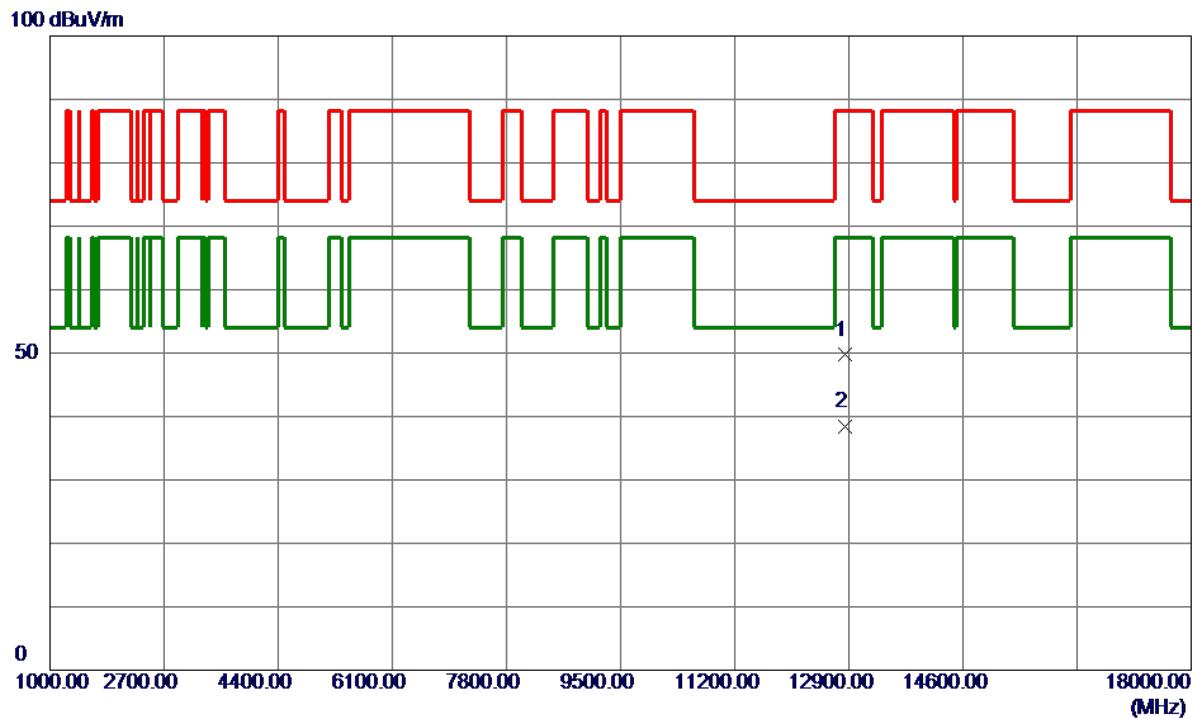


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	12845.8500	38.28	11.42	49.70	88.20	-38.50	Peak	
2 *	12852.6000	27.00	11.42	38.42	68.20	-29.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE20 Mode 6435 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

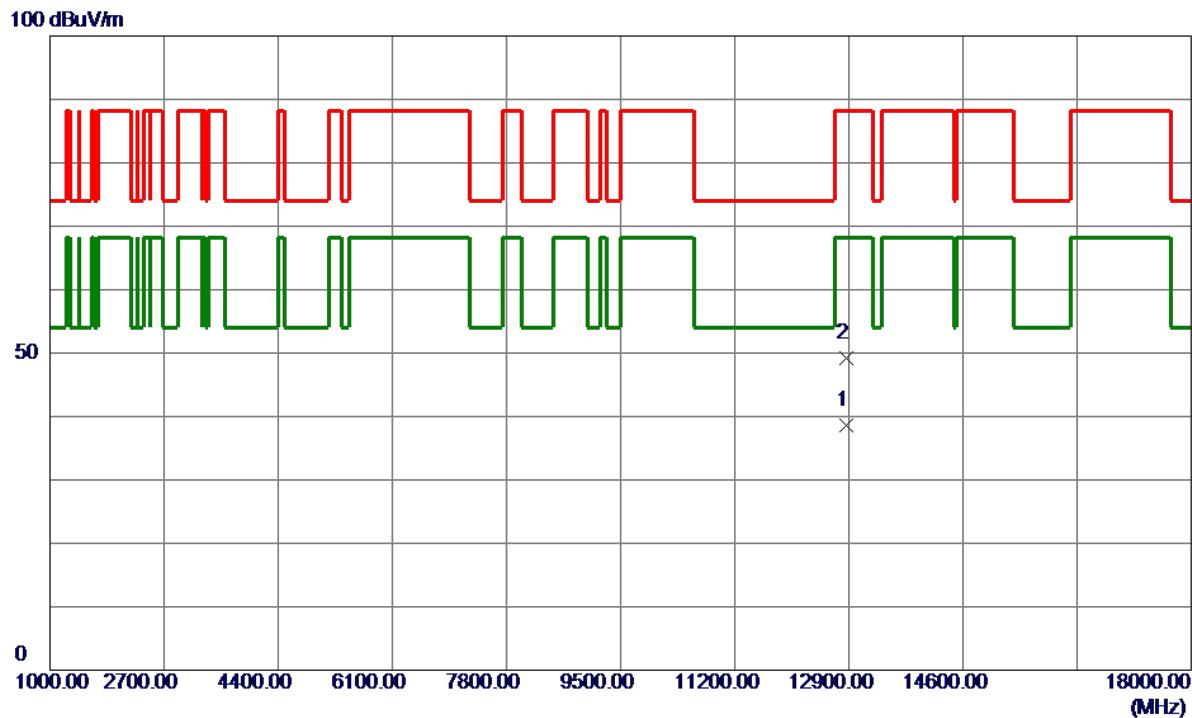


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								11.43
1 *	12868.8000	27.13	11.43	38.56	68.20	-29.64	AVG	
2	12871.3500	37.81	11.43	49.24	88.20	-38.96	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE20 Mode 6475 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

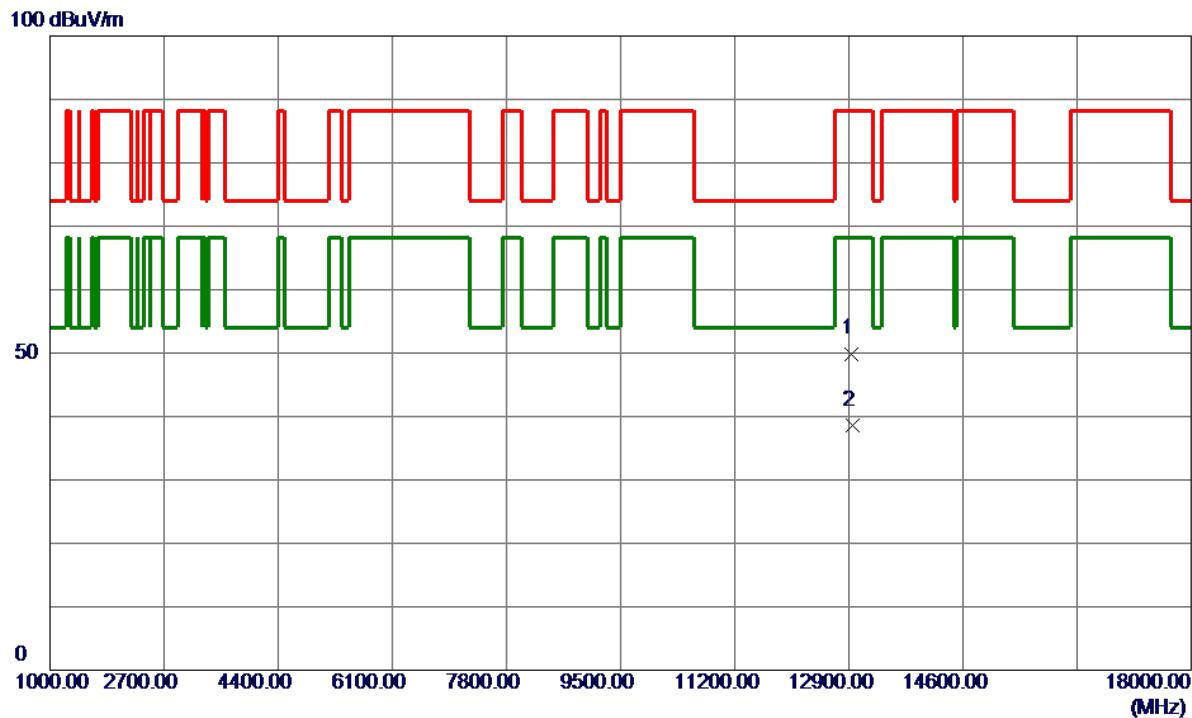


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								1 2 3
1	12946.1000	38.43	11.47	49.90	88.20	-38.30	Peak	
2 *	12949.2000	27.09	11.47	38.56	68.20	-29.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-6_TX BE20 Mode 6515 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

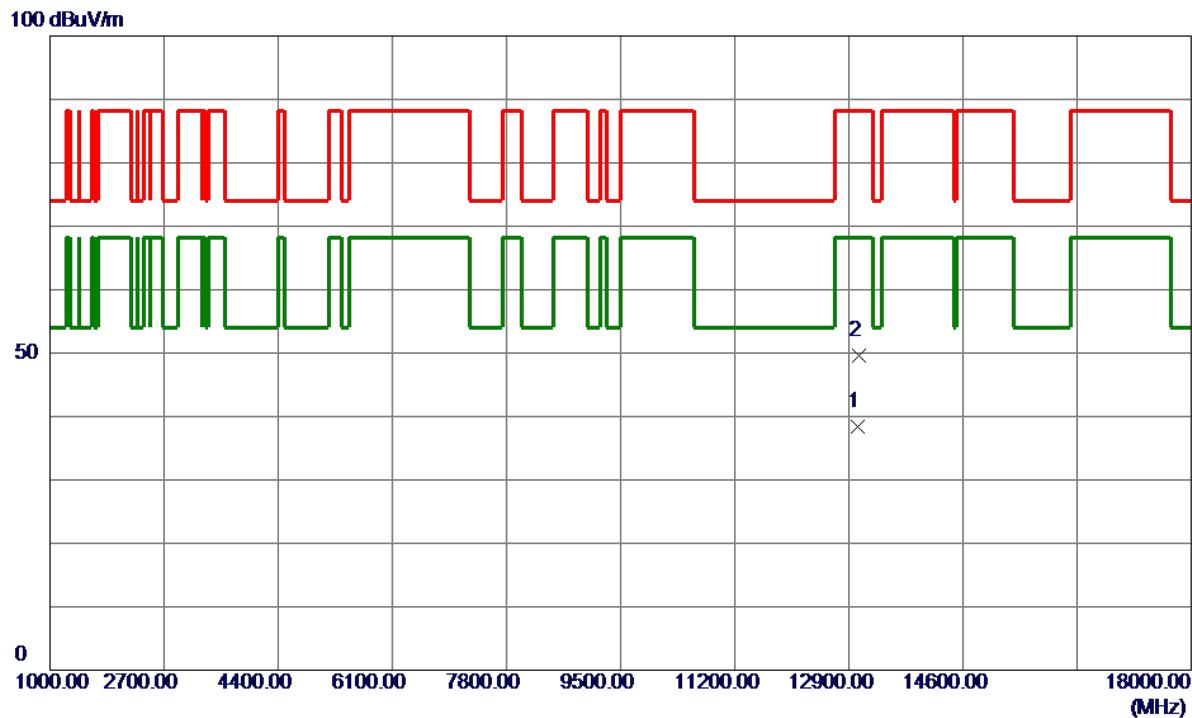


No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	dBuV/m	dBuV/m	dB		
1 *	13032.6000	27.00	11.48	38.48	68.20	-29.72	AVG	
2	13043.6000	38.12	11.48	49.60	88.20	-38.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE20 Mode 6535 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

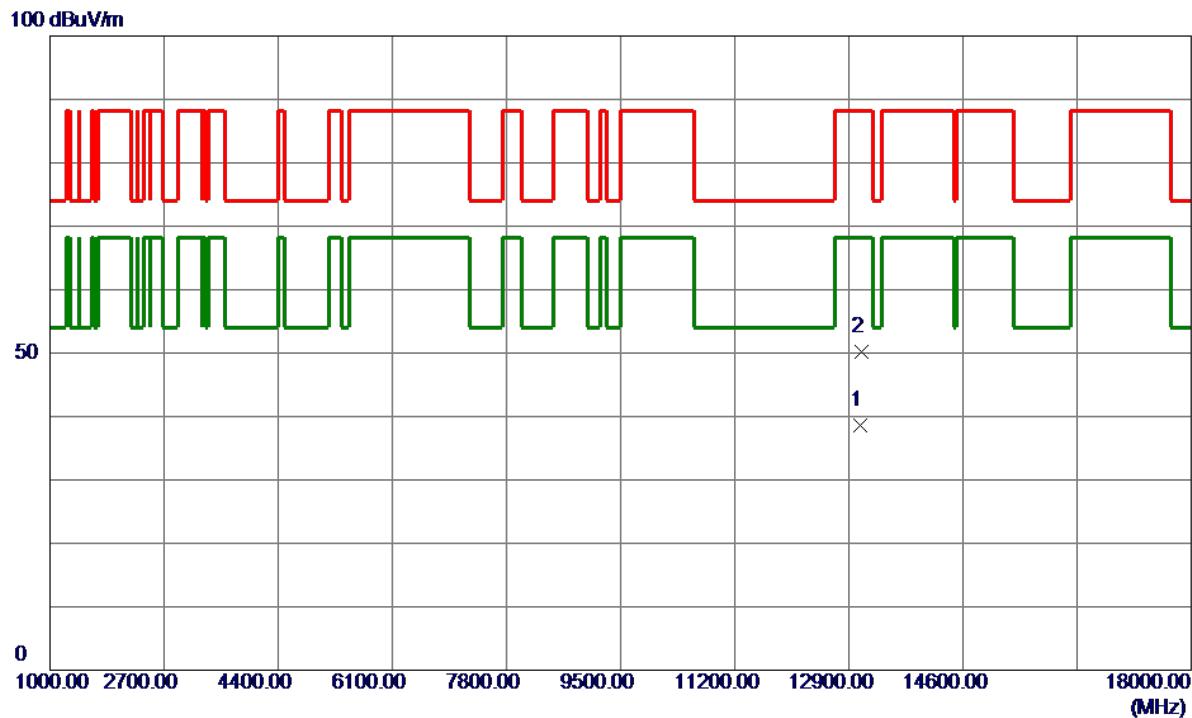


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
								Detector
1 *	13063.0000	27.09	11.47	38.56	68.20	-29.64	AVG	
2	13090.3500	38.65	11.47	50.12	88.20	-38.08	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE20 Mode 6695 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

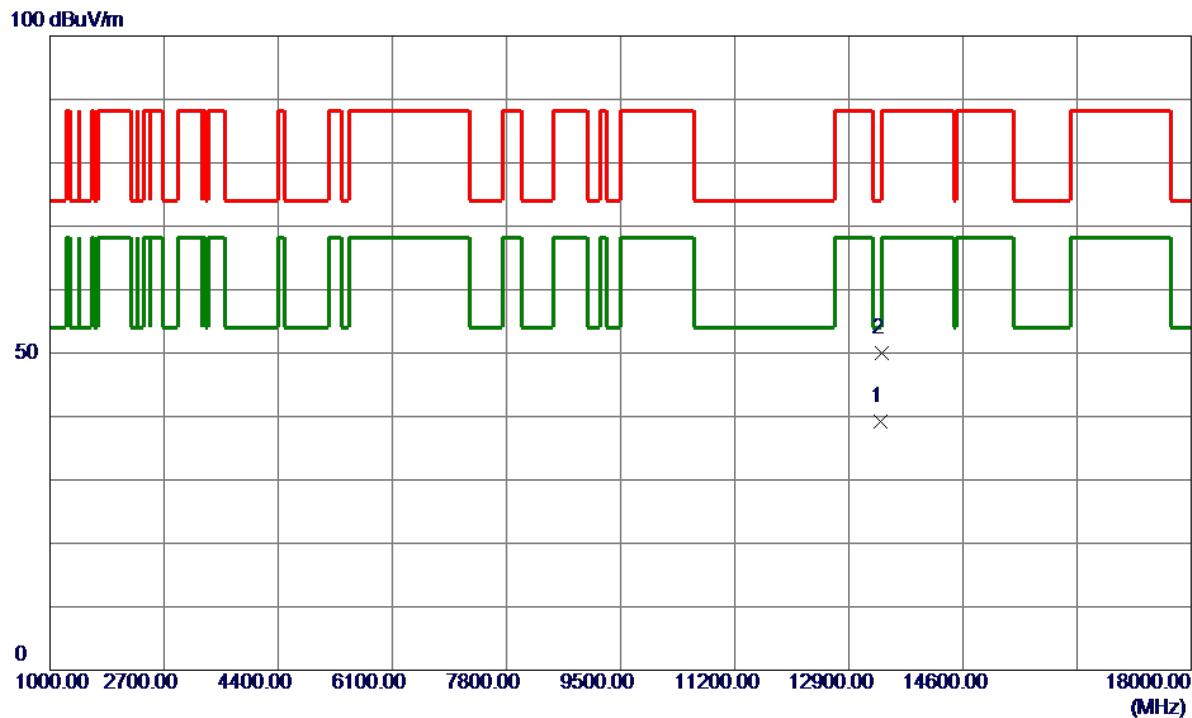


No.	Freq. MHz	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
		dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	13371.4000	27.78	11.39	39.17	54.00	-14.83	AVG	
2	13382.7500	38.54	11.39	49.93	74.00	-24.07	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-7_TX BE20 Mode 6855 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

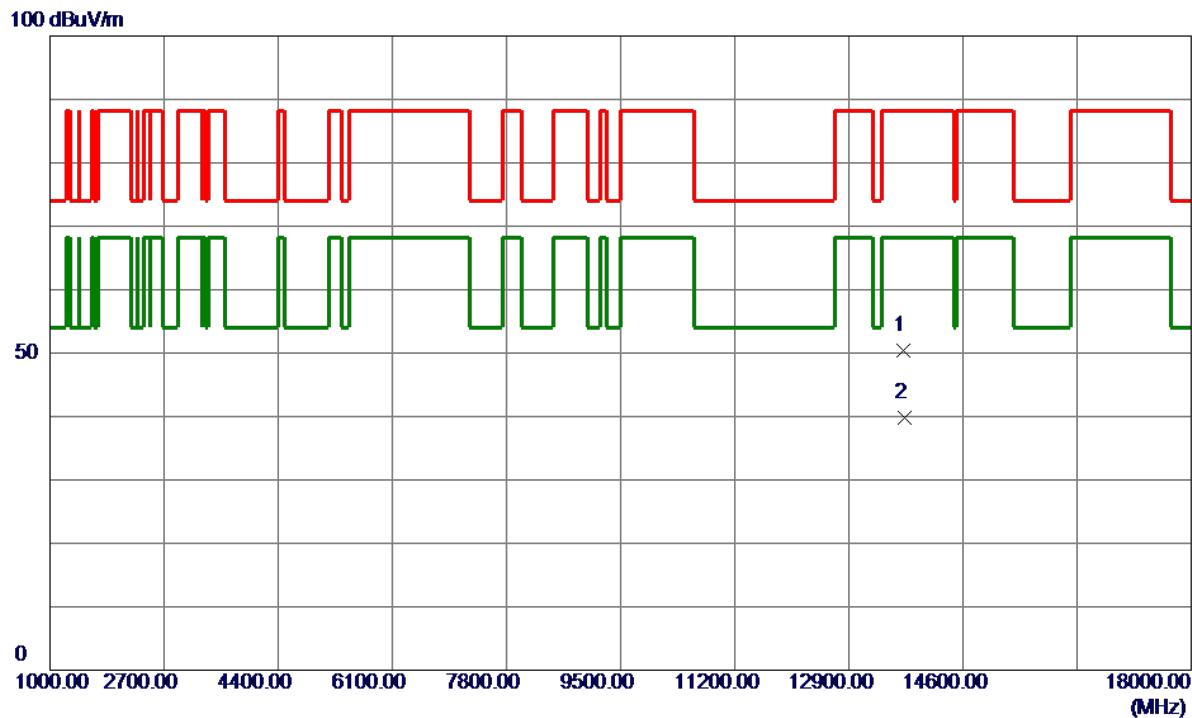


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	
							Peak	AVG
1	13706.6000	39.01	11.39	50.40	88.20	-37.80		
2 *	13734.8000	28.44	11.39	39.83	68.20	-28.37		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-8_TX BE20 Mode 6875 MHz	Polarization	Vertical
-----------	------------------------------	--------------	----------

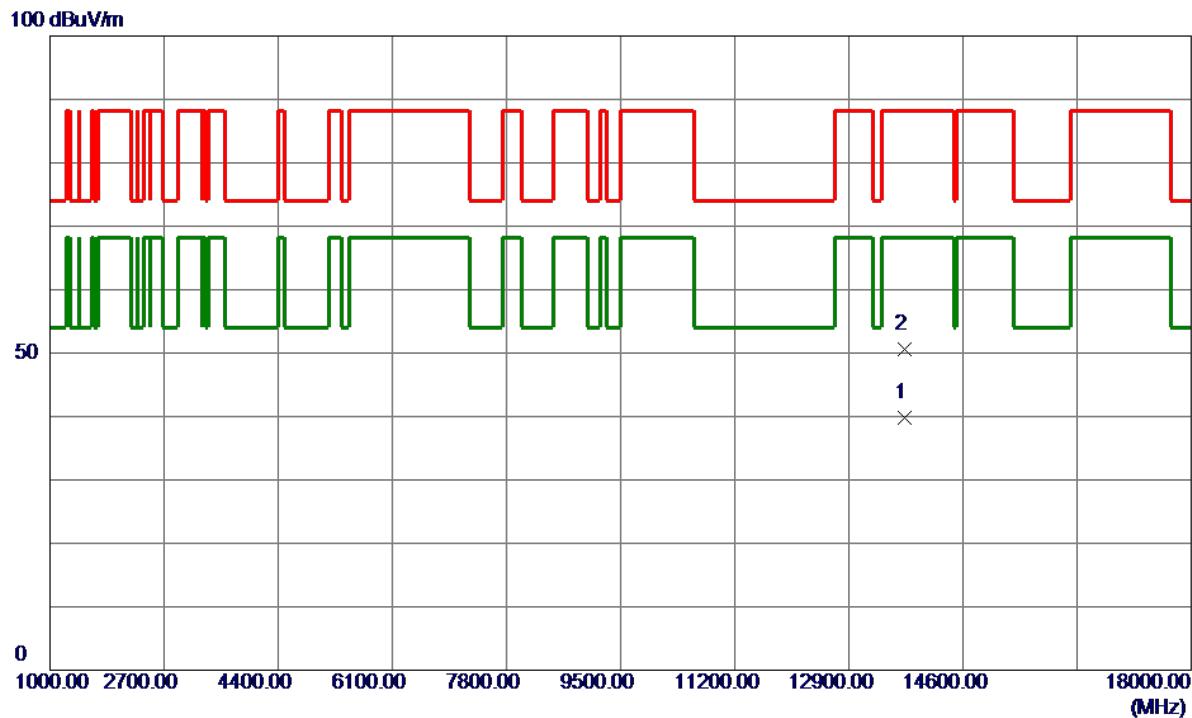

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	13730.5000	28.35	11.39	39.74	68.20	-28.46	AVG	
2	13731.0000	39.25	11.39	50.64	88.20	-37.56	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.