

AUT Report

Product Model: Archer TBE6500U

Manufacturer: TP-Link Systems Inc.

Test Date: 2025.01.16

Tested By: Yu Sunli *Yu Sunli*

TP-Link Systems Inc.
10 Mauchly, Irvine, CA 92618

Index

1. Antenna Distribution.....	3
2. Electrical Characteristics	3
3. Gain and Radiation Pattern	4
3.1 Measurement Procedure.....	4
3.2 Test Setup	5
3.3 S Parameter Test Data	6
3.4 Antenna Peak Gain.....	7
3.5 Antenna Radiation Pattern	7

1. Antenna Distribution



2. Electrical Characteristics

Ant1	
Frequency	2400~2500 & 5150~5895MHz&5925~7125MHz
Impedance	50Ohm
Antenna Type	Monopole
Antenna Gain	1.00dBi@2400~2500MHz 1.54dBi@5150~5250MHz 1.16dBi@5250~5350MHz 3.00dBi@5470~5725MHz 2.38dBi@5725~5895MHz 2.58dBi@5925~6425MHz 1.10dBi@6425~6525MHz 0.90dBi@6525~6875MHz 0.78dBi@6875~7125MHz
Radiation pattern	Omni-Directional
P/N	2052500895

Ant2	
Frequency	2400~2500 & 5150~5895MHz&5925~7125MHz
Impedance	50Ohm
Antenna Type	Monopole
Antenna Gain	0.85dBi@2400~2500MHz 2.38dBi@5150~5250MHz 2.36dBi@5250~5350MHz 2.88dBi@5470~5725MHz 2.97dBi@5725~5895MHz 3.00dBi@5925~6425MHz 2.53dBi@6425~6525MHz

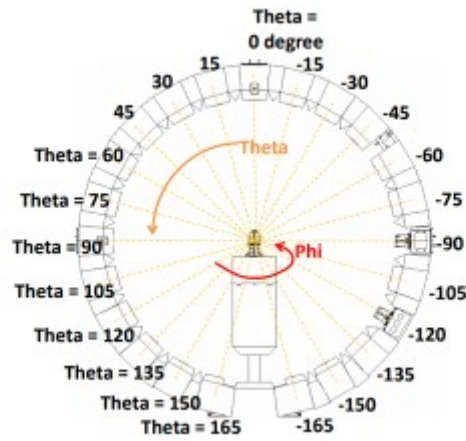


Figure 3-2

Before the measurement, calibrated the vector network analyzer, and then connected the input end of each antenna to the output end of the vector network analyzer, and evenly the antennas to be measured.

Test Equipment listed below:

Equipments	Model	Manufacturer	S/N	Cali. Interval	Cali. Due Date
Chamber	Rayzone2800	GTS(General Test System)	MY5347043 5	12months	2026/01/15
Vector Network Analyzer	E5071C	Keysight	MY46315238	24months	2026/03/13
GTS MaxSign100 Software	V2.1	GTS(General Test System)	/	/	/

3.2 Test Setup

The test setup was shown in Figure 3-3, 3-4:

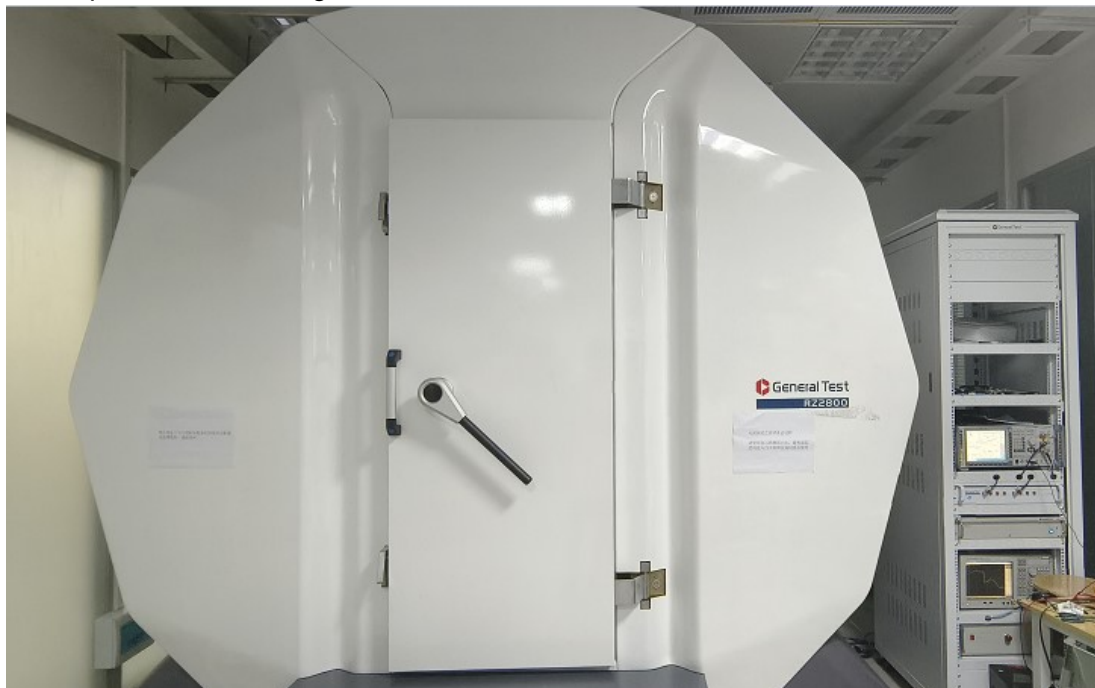


Figure 3-3



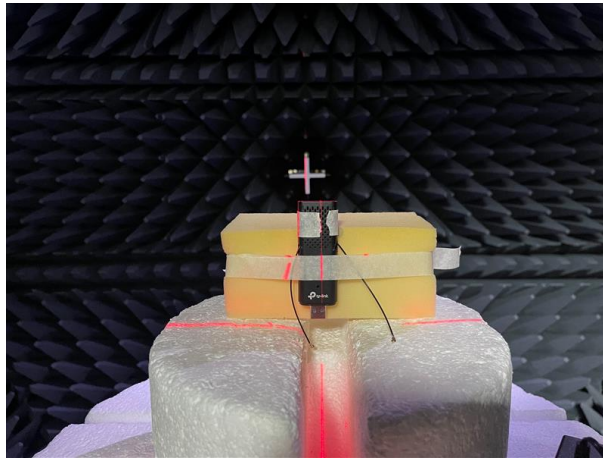


Figure 3-4

3.3 S Parameter Test Data

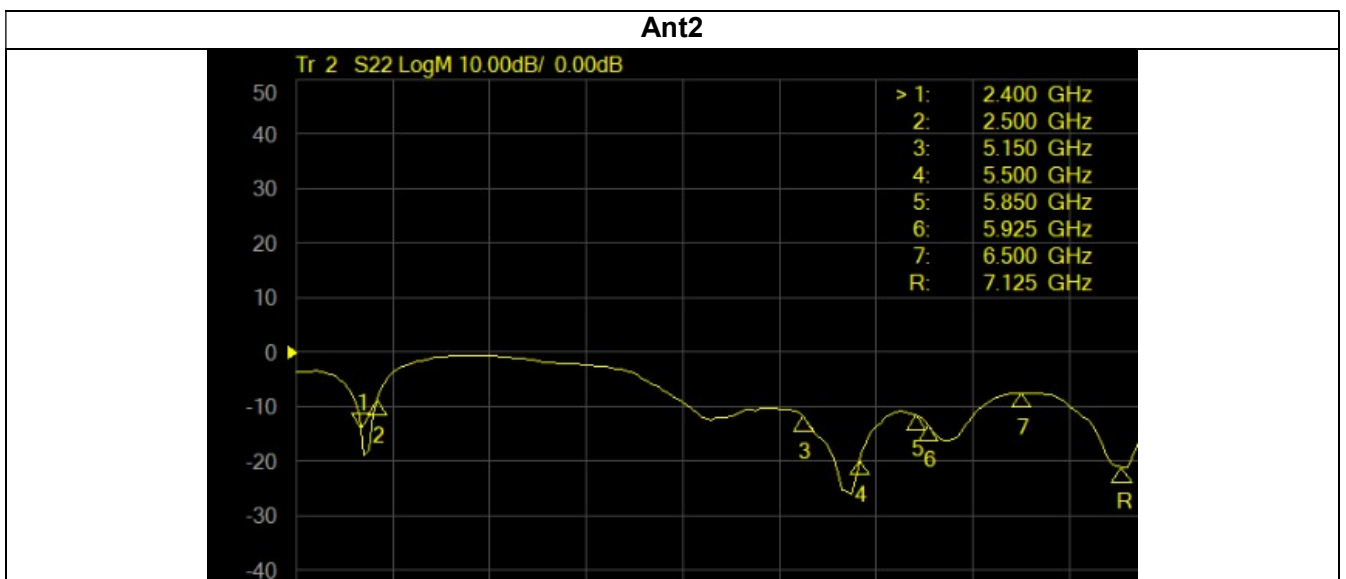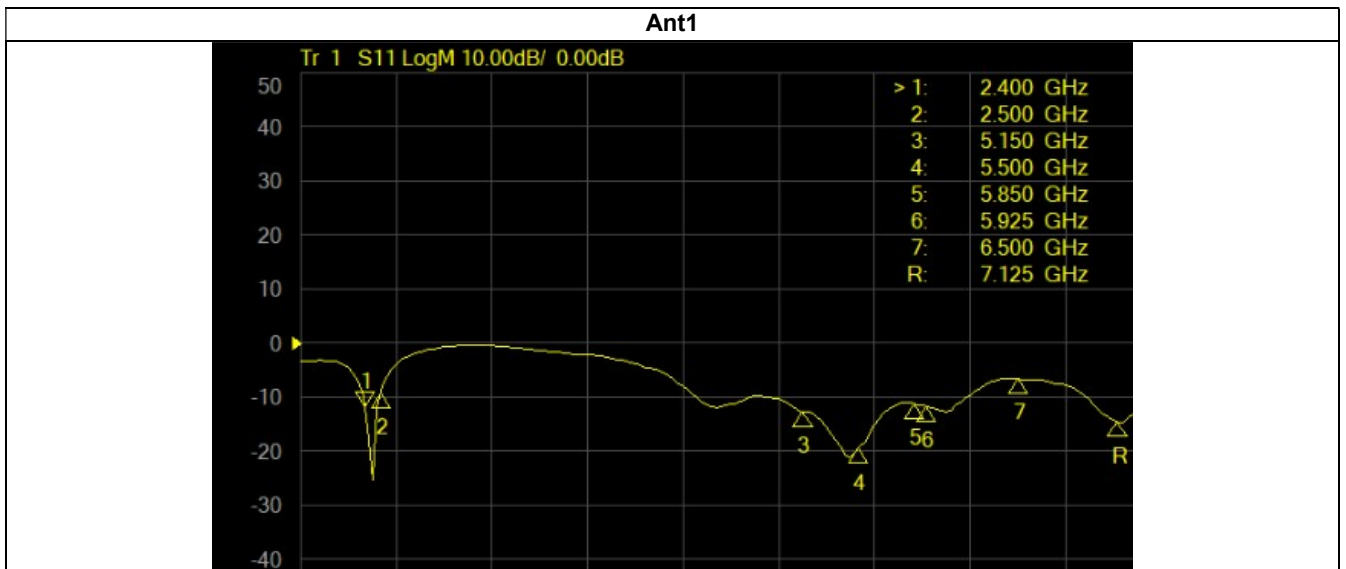

3.4 Antenna Peak Gain

Frequency	2.45GHz 2400~2500MHz	5.2GHz 5150~5250MHz	5.3GHz 5250~5350MHz	5.6GHz 5470~5725MHz
Ant1 MaxGain(dBi)	1.00	1.54	1.16	3.00
Ant2 MaxGain(dBi)	0.88	2.38	2.36	2.88
Ant1 Polarization/ Φ (°) / θ (°)	Theta/120/135	Theta/195/150	Theta/180/105	Theta/180/105
Ant2 Polarization/ Φ (°) / θ (°)	Theta/60/105	Theta/0/105	Theta/0/105	Theta/0/105
Max Gain(dBi)	1.00	2.38	2.36	3.00

Frequency	5.8GHz 5725~5895MHz	6.175GHz 5925~6425MHz	6.475GHz 6425~6525MHz	6.725GHz 6525~6875MHz
Ant1 MaxGain(dBi)	2.38	2.58	1.10	0.90
Ant2 MaxGain(dBi)	2.97	3.00	2.53	2.12
Ant1 Polarization/ Φ (°) / θ (°)	Theta/180/105	Theta/195/105	Theta/210/105	Theta/195/105
Ant2 Polarization/ Φ (°) / θ (°)	Theta/0/105	Theta/0/105	Theta/345/105	Theta/345/105
Max Gain(dBi)	2.97	3.00	2.53	2.12

Frequency	7.025GHz 6875~7125MHz
Ant1 MaxGain(dBi)	0.78
Ant2 MaxGain(dBi)	1.96
Ant1 Polarization/ Φ (°) / θ (°)	Theta/180/120
Ant2 Polarization/ Φ (°) / θ (°)	Theta/345/105
Max Gain(dBi)	1.96

3.5 Antenna Radiation Pattern

