


Antenna data sheet

0.2X1.2X0.65 (mm) WiFi/Bluetooth Ceramic Chip Antenna (YF2012C1) Engineering Specification

1. Product Number

YF 2012 C1 P 2G45
1 2 3 4 5



(1)Product Type	Chip Antenna
(2)Size Code	2.0x1.2x0.65mm
(3)Type Code	C1
(4)Packing	Paper & Reel
(5)Frequency	2.45GHz

Manufacturer : SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD
Address : 412, Building 7, Phase II, Nanshan Yungu Pioneer Park,
No. 2, Pingshan Road, Pingshan Community, Taoyuan Street,
Nanshan District, Shenzhen
China



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : JIEXI	Designed by : Jason	Checked by : Jason	Approved by : MR.FANG
TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF2012C1) Engineering Specification	DOCUMENT NO.	YF2012C1P2G45	REV.

2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Low profile, compact size
- *RoHS compliance
- *SMT processes compatible

3. Applications

- *Bluetooth earphone systems
- *Hand-held devices when WiFi /Bluetooth functions are needed, e.g., Smart phone.
- *IEEE802.11 b/g/n
- *ZigBee
- *Wireless PCMCIA cards or USB dongle

4. Description

Yingfeng chip antenna series are specially designed for WiFi/Bluetooth applications. Based on Yingfeng proprietary design and processes, this chip antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Electrical Specifications (80 x 40 mm² ground plane)

5-1. Electrical Table

Characteristics		Specifications	Unit
Outline Dimensions		2.0x1.2x0.65	mm
Working Frequency		2400~2500	MHz
VSWR		2 Max.	
Impedance		50	Ω
Polarization		Linear Polarization	
Gain	Peak	2.7 (typical)	dBi
	Efficiency	75 (typical)	%



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : **JIEXI**

Designed by : **Jason**

Checked by : **Jason**

Approved by : **MR.FANG**

TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF2012C1) Engineering Specification


DOCUMENT NO.

YF2012C1P2G45

REV.


A

5-2. Return Loss & VSWR

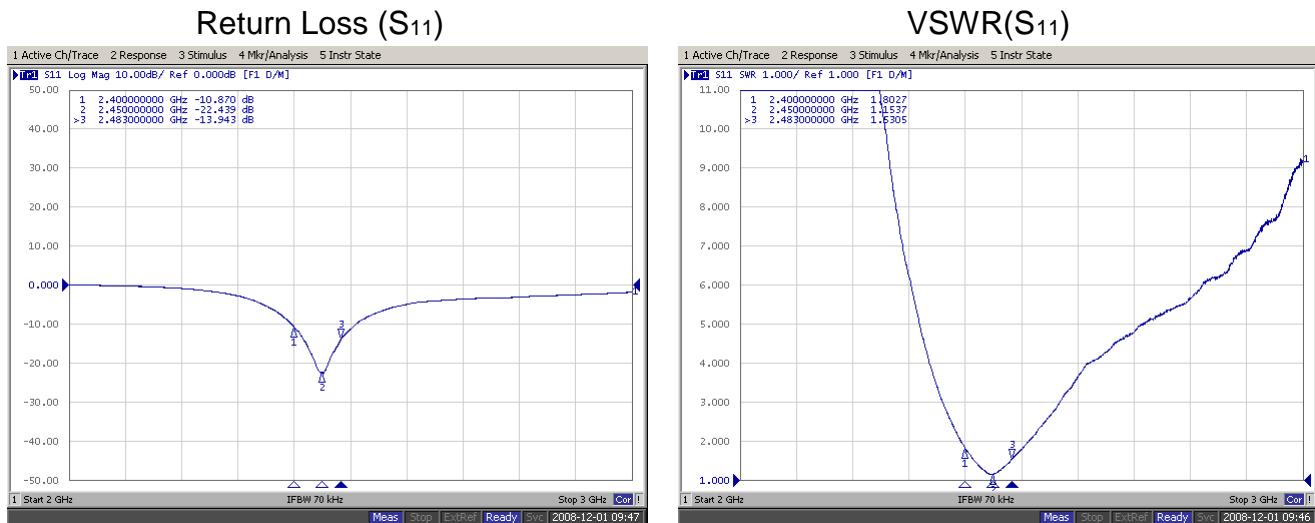

6. Antenna Dimensions & Test Board (unit: mm)

a. Antenna Dimensions

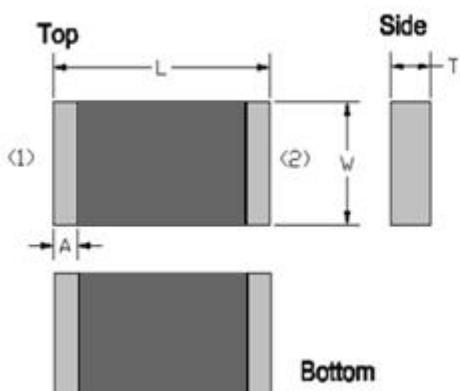

Dimension (mm)	
L	2.05+-0.15
W	1.20+-0.15
T	0.65+-0.10
A	0.20+-0.10

No.	Terminal Name
1	Feeding/GNG
2	GND/Feeding

P.S : Top & down and left & right side are symmetrical, No direction



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : **JIEXI**

Designed by : **Jason**

Checked by : **Jason**

Approved by : **MR.FANG**

TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF2012C1) Engineering Specification

DOCUMENT NO.





YF2012C1P2G45

REV.

A

7. Radiation Pattern (80 x 40 mm² ground plane)

7-1. 3D Gain Pattern @ 2442 MHz

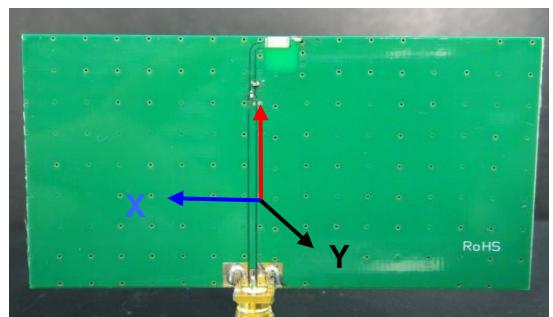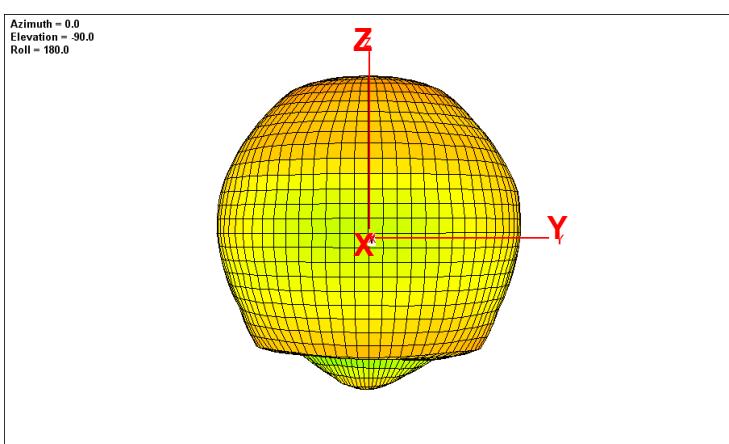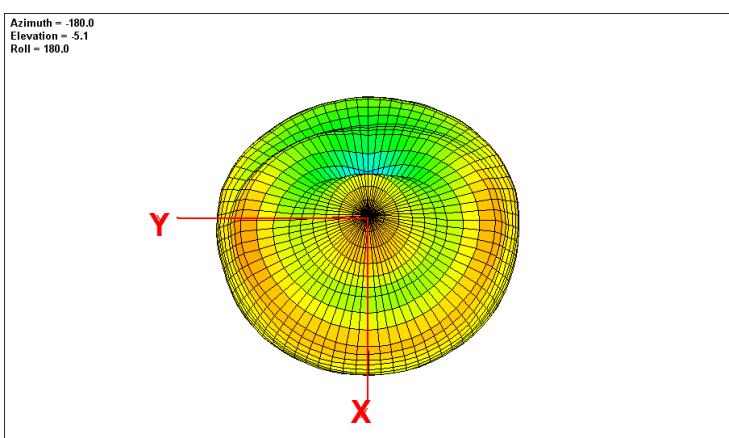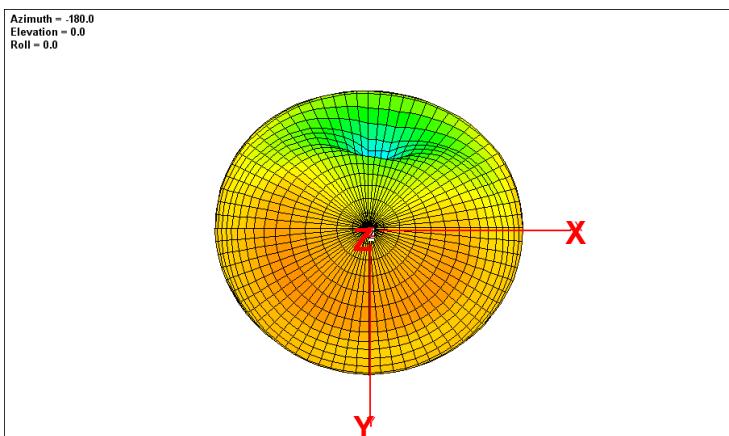

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF2012C1) Engineering Specification

DOCUMENT NO.

YF2012C1P2G45

REV.

A

7-2. 3D Efficiency Table

Frequency(MHz)	2400	2410	2420	2430	2442	2450	2460	2470	2480	2490	2500
Efficiency (dB)	-1.4	-1.0	-0.9	-0.7	-0.7	-0.8	-0.9	-1.1	-1.2	-1.3	-1.4
Efficiency (%)	72.8	73.7	74.3	74.4	75.5	75.0	74.0	73.6	73.1	72.6	71.5
Gain (dBi)	2.1	2.2	2.3	2.4	2.7	2.5	2.4	1.8	1.7	1.6	1.4


8. Layout Guide

a. Solder Land Pattern:


Land pattern for soldering (gray marking areas) is as shown below. Depending on Customer's requirement, matching circuit as shown below is also recommended.

2). PCB Top View :

Type1 :

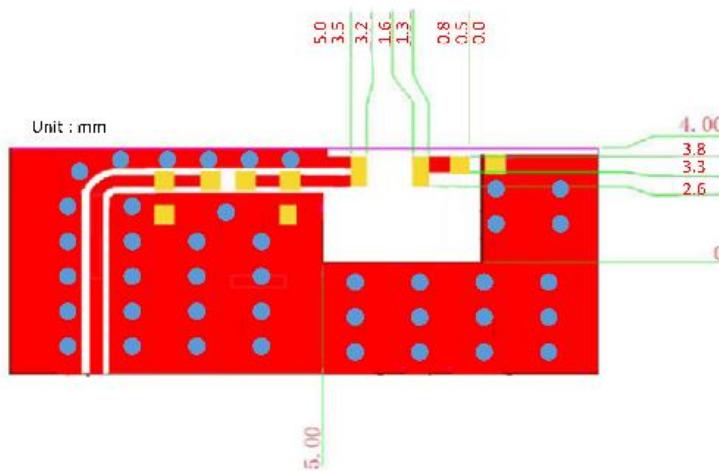

Top View

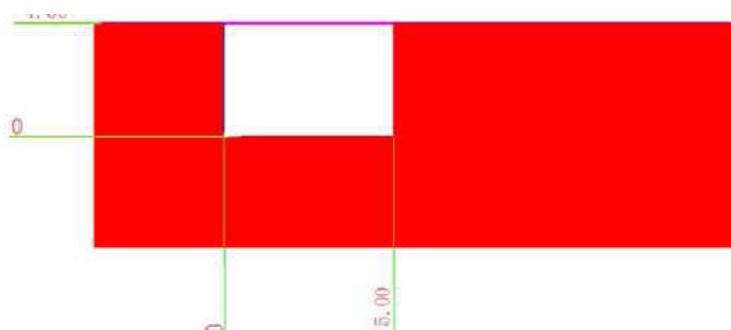

Bottom View

Unit : mm



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF2012C1) Engineering Specification



DOCUMEN
T
NO.

YF2012C1P2G45


REV.

A

b. Test Board with Antenna

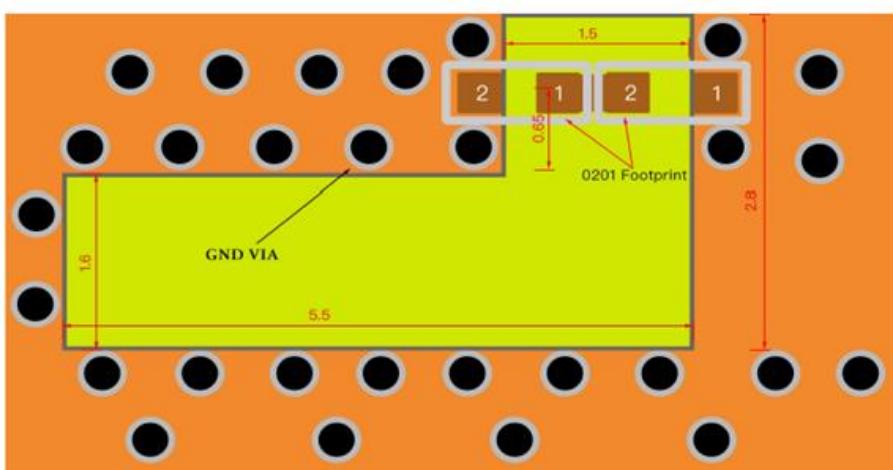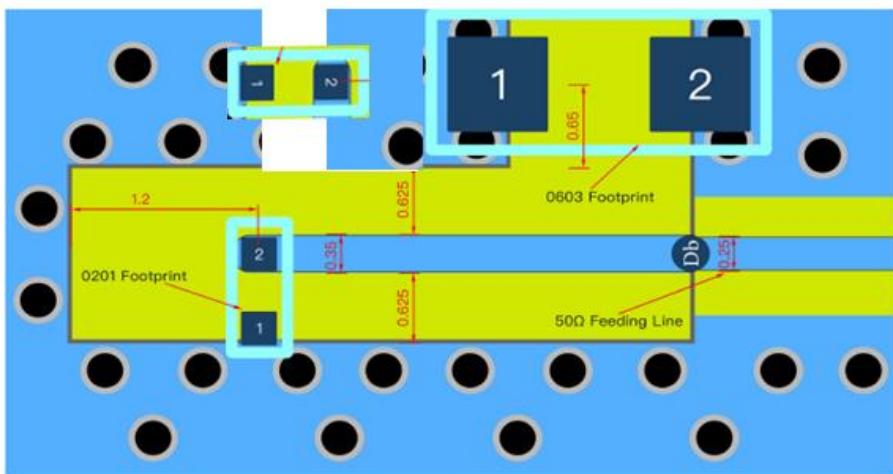

原理图

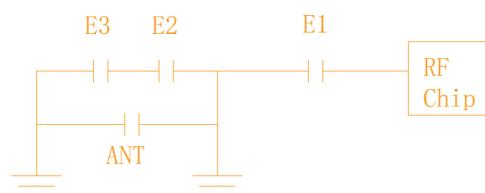

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGY CO., LTD

Prepared by : JIEXI

Designed by : Jason

Checked by : Jason

Approved by : MR.FANG

TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF2012C1) Engineering Specification

DOCUMENT NO.


YF2012C1P2G45

REV.

A

9. Frequency tuning

a. Chip antenna tuning scenario :

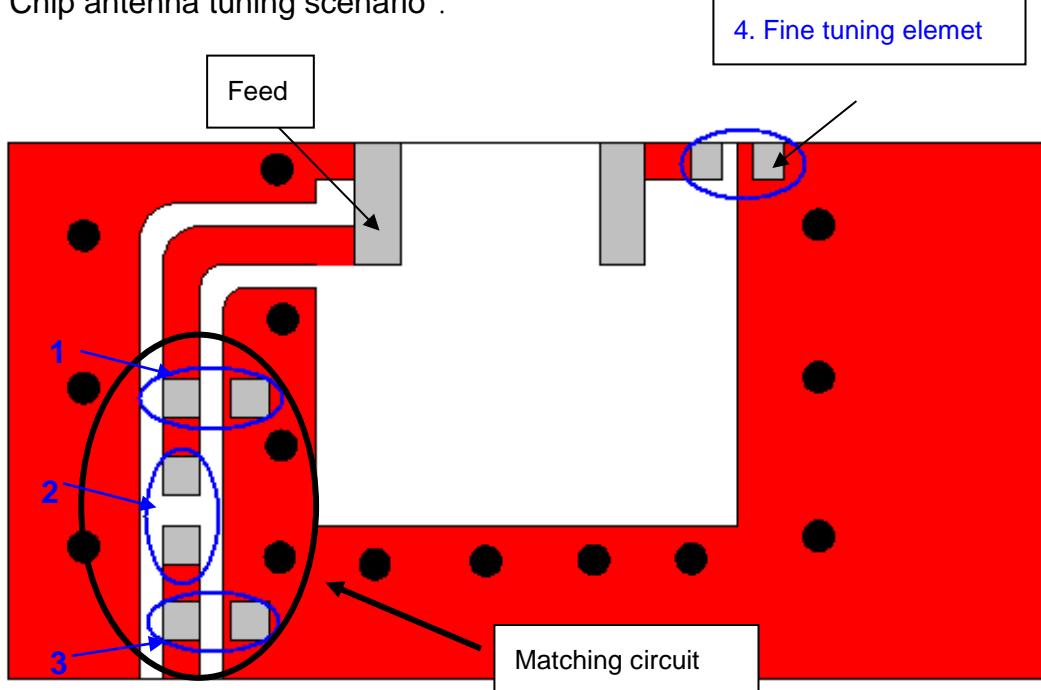

b. Matching circuit : (Center frequency is about 2442 MHz @ 80 x 40 mm² ground plane)

System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	1.2 pF*	Murata (0402)	± 0.1 pF
2	10PF*	Murata(0402)	± 0.5 PF
3	N/A*	-	-
Fine tuning element 4	10 pF*	Murata (0402)	± 0.1 pF

*Typical reference values which may need to be changed when circuit boards or part vendors are different.

c. Fine tuning element vs. Center frequency



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : **JIEXI**

Designed by : **Jason**

Checked by : **Jason**

Approved by : **MR.FANG**


TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip Antenna (YF2012C1) Engineering Specification

DOCUMENT NO.

YF2012C1P2G45


REV.

A

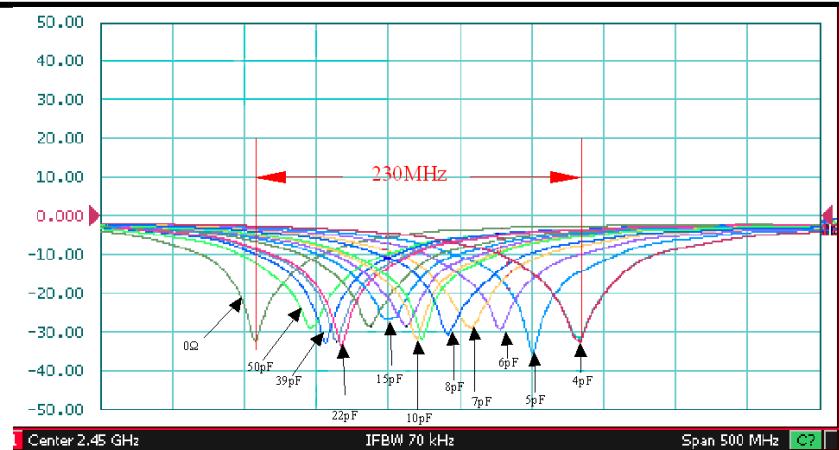

10. Soldering Conditions

a. Typical Soldering Profile for Lead-free Process

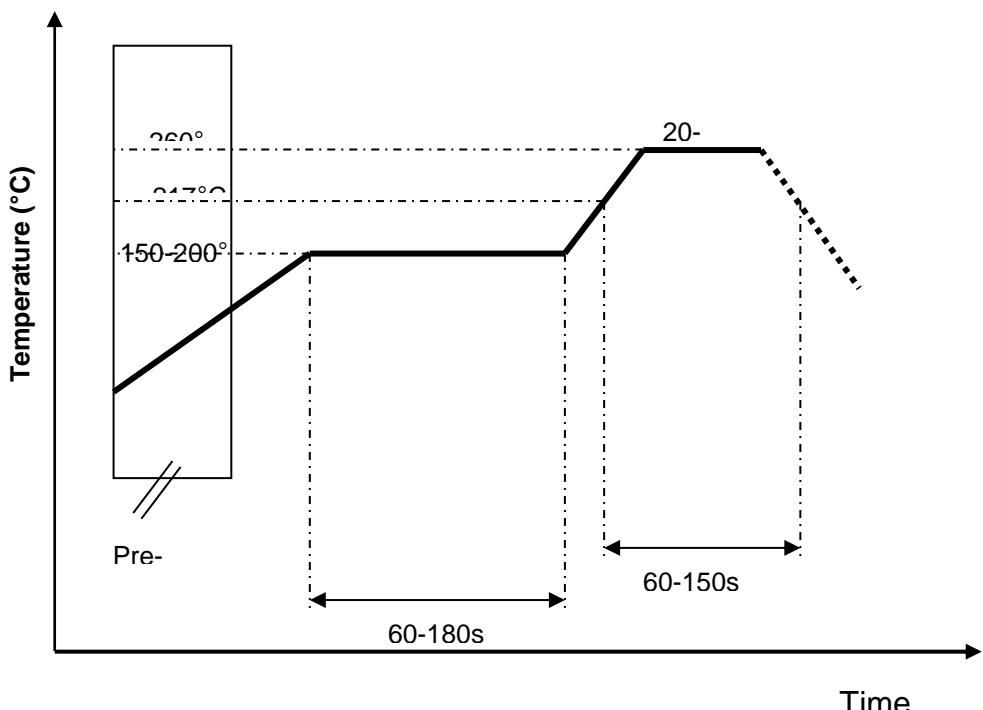

11. Packing

- (1) Quantity/Reel: 4000 pcs/Reel
- (2) Plastic tape:



SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : **JIEXI**

Designed by : **Jason**

Checked by : **Jason**

Approved by : **MR.FANG**


TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF2012C1) Engineering Specification

DOCUMENT NO.

YF2012C1P2G45


REV.

A

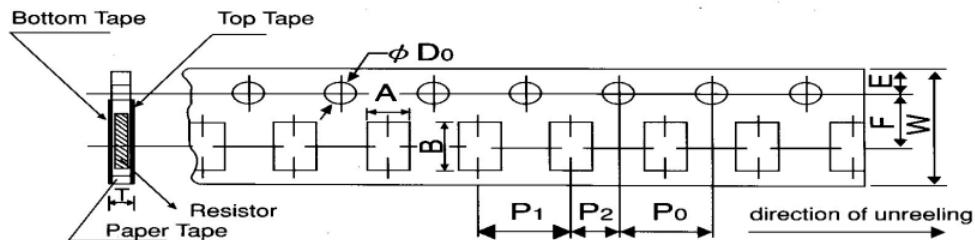

Packing	Style	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Paper	2012	1.6±0.15	2.4±0.2	8.0±0.2	3.5±0.05	1.75±0.1	4.0±0.1	2.0±0.05	4.0±0.1	+0.1 ψ1.5 -0	0.84±0.1

(3) Taping reel dimensions

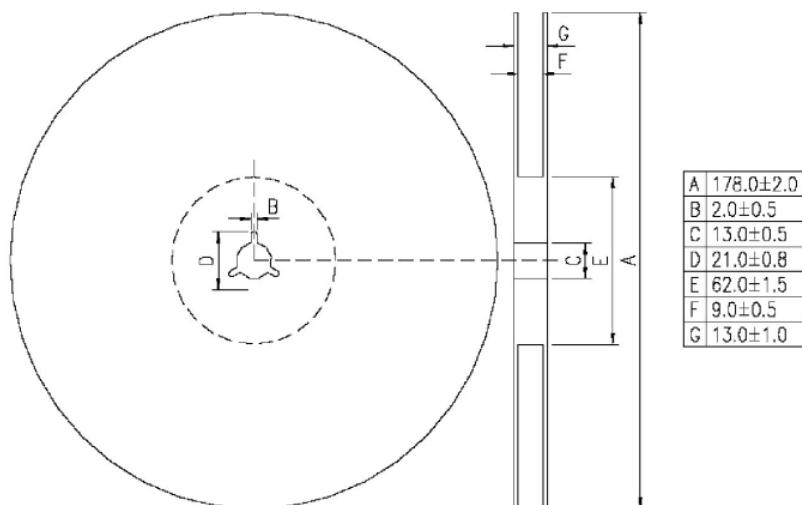

SHEN ZHEN YINGFENG ANTENNA TECHNOLOGYCO.,LTD

Prepared by : **JIEXI**

Designed by : **Jason**

Checked by : **Jason**

Approved by : **MR.FANG**

TITLE : 2.0 x 1.2 x 0.65(mm) WiFi/Bluetooth Ceramic Chip
Antenna (YF2012C1) Engineering Specification

DOCUMENT
NO.

YF2012C1P2G45

REV.

A