




802.11ax(HEW40)_HCH_5795MHz_Ant2_NTNV

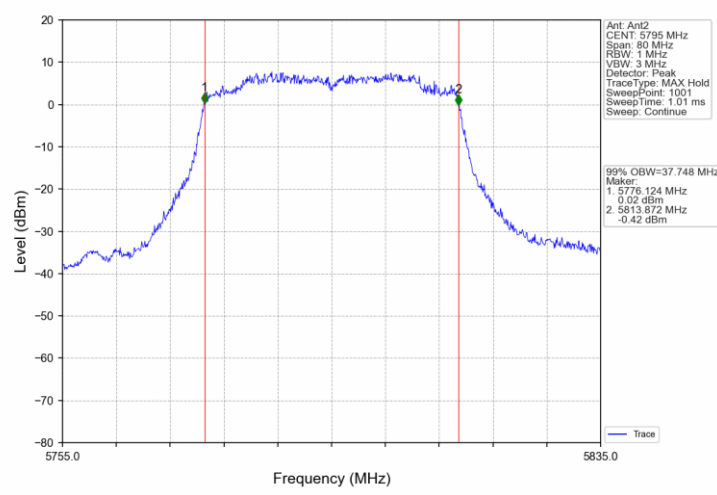


802.11ax(HEW40)_HCH_5710MHz_Ant1_NTNV

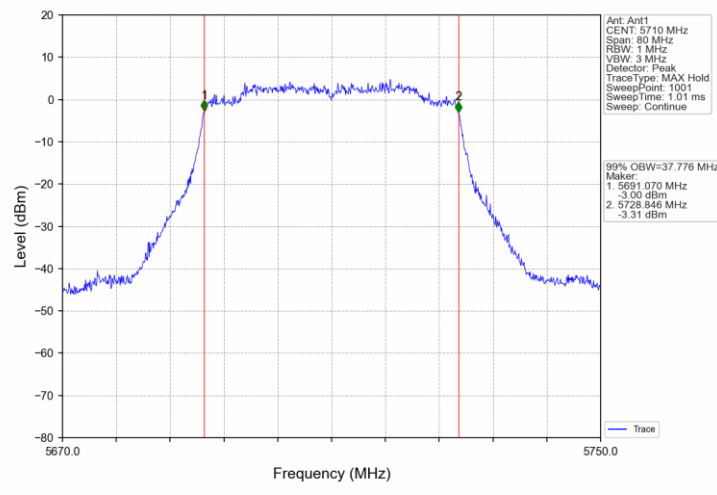


802.11ax(HEW40)_HCH_5710MHz_Ant2_NTNV

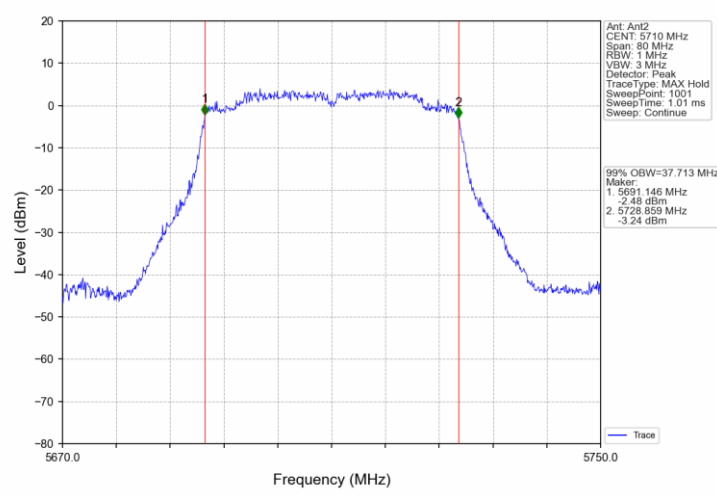


802.11ax(HEW80)_MCH_5210MHz_Ant1_NTNV

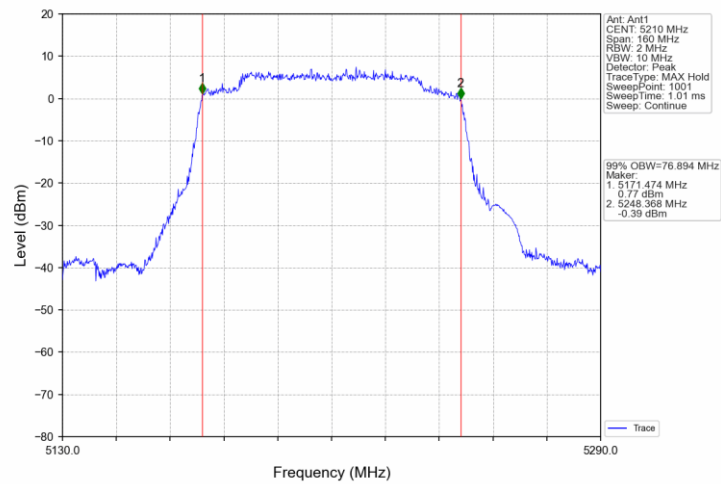


802.11ax(HEW80)_MCH_5210MHz_Ant2_NTNV

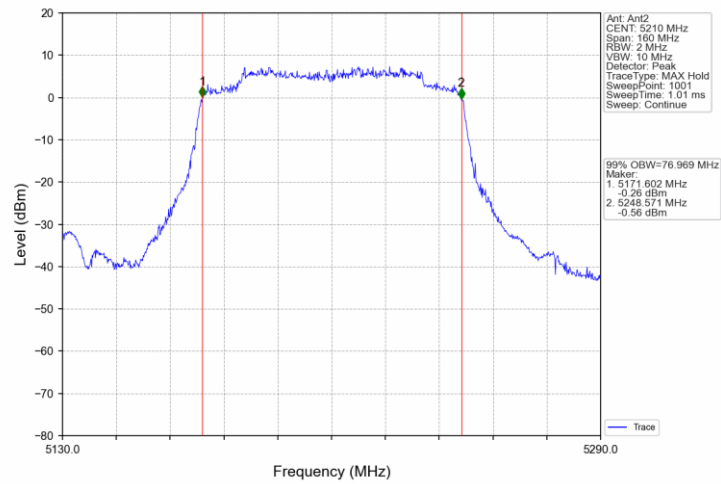


802.11ax(HEW80)_MCH_5290MHz_Ant1_NTNV

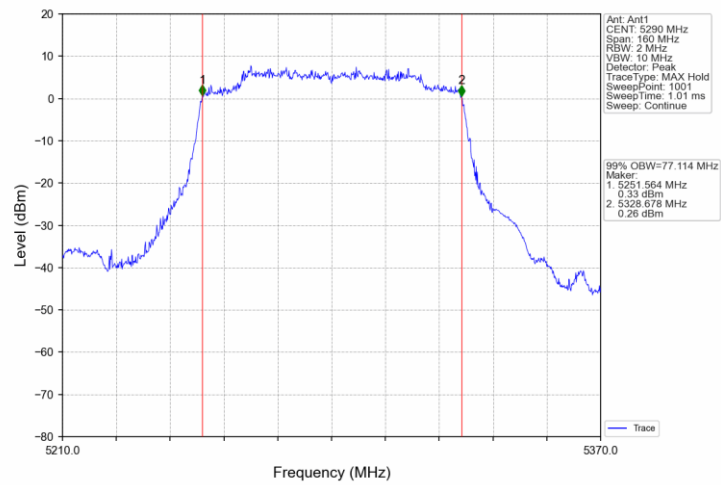


802.11ax(HEW80)_MCH_5290MHz_Ant2_NTNV

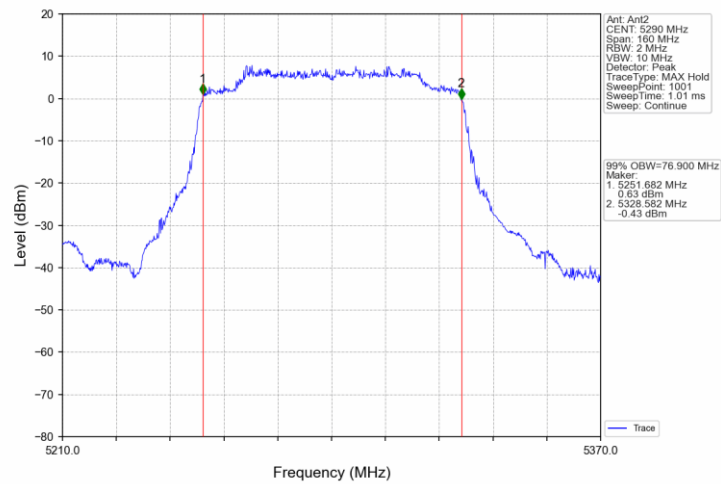


802.11ax(HEW80)_LCH_5530MHz_Ant1_NTNV

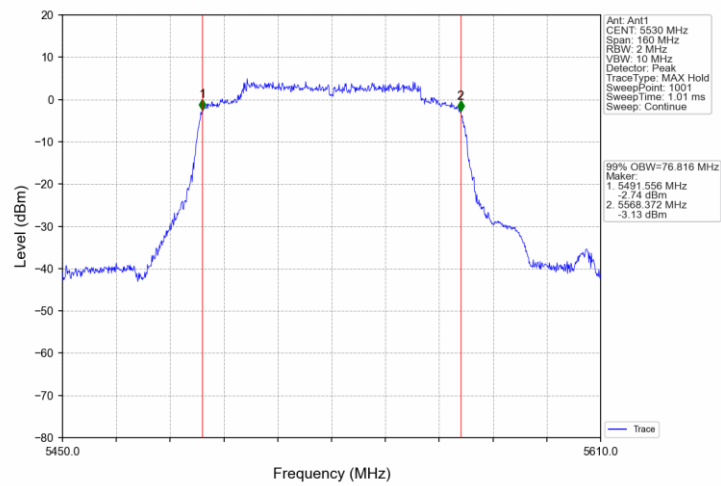


802.11ax(HEW80)_LCH_5530MHz_Ant2_NTNV

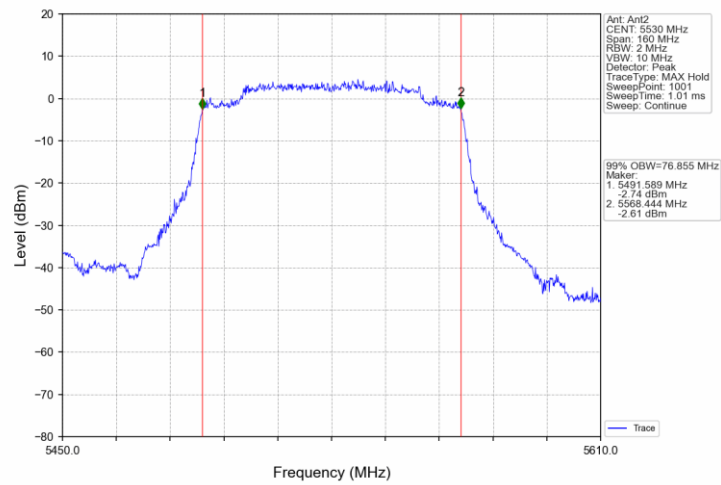


802.11ax(HEW80)_HCH_5610MHz_Ant1_NTNV

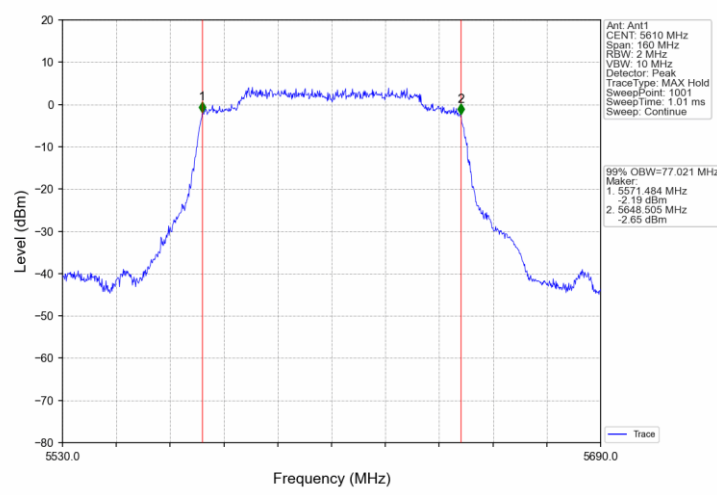


802.11ax(HEW80)_HCH_5610MHz_Ant2_NTNV

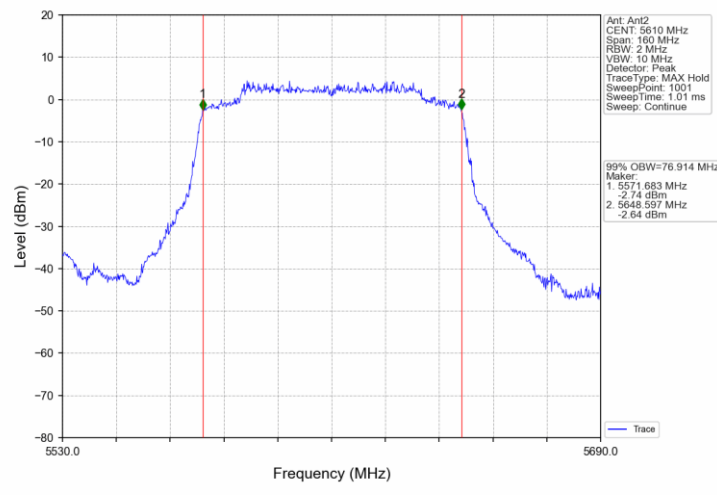


802.11ax(HEW80)_MCH_5775MHz_Ant1_NTNV

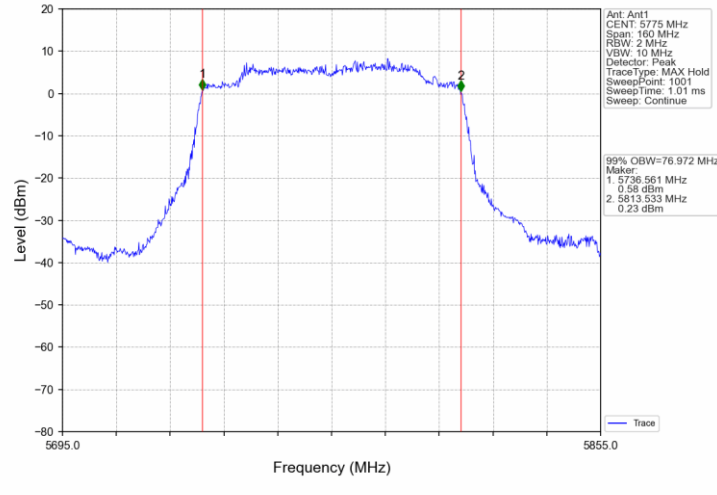


802.11ax(HEW80)_MCH_5775MHz_Ant2_NTNV

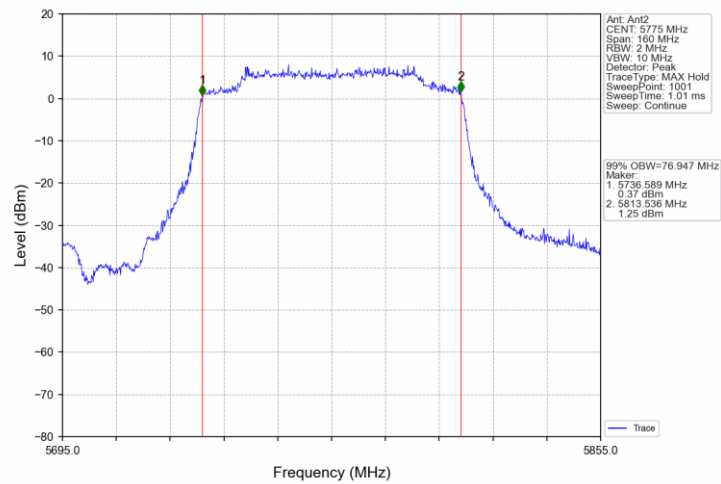


802.11ax(HEW80)_HCH_5690MHz_Ant1_NTNV

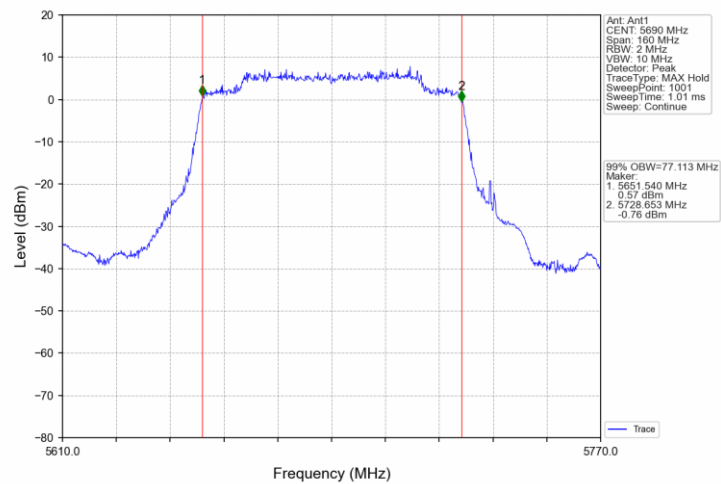


802.11ax(HEW80)_HCH_5690MHz_Ant2_NTNV

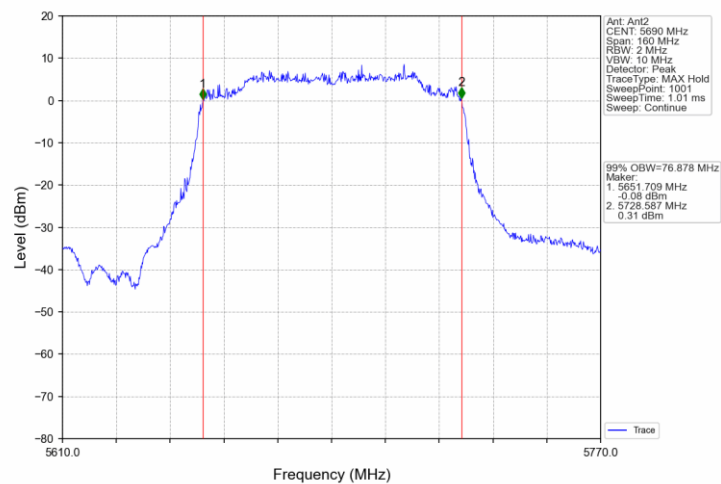


802.11ax(HEW160)_MCH_5570MHz_Ant1_NTNV

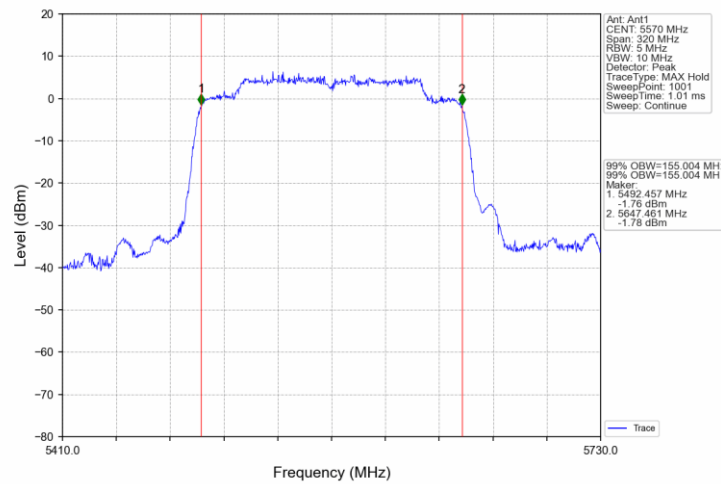


802.11ax(HEW160)_MCH_5570MHz_Ant2_NTNV

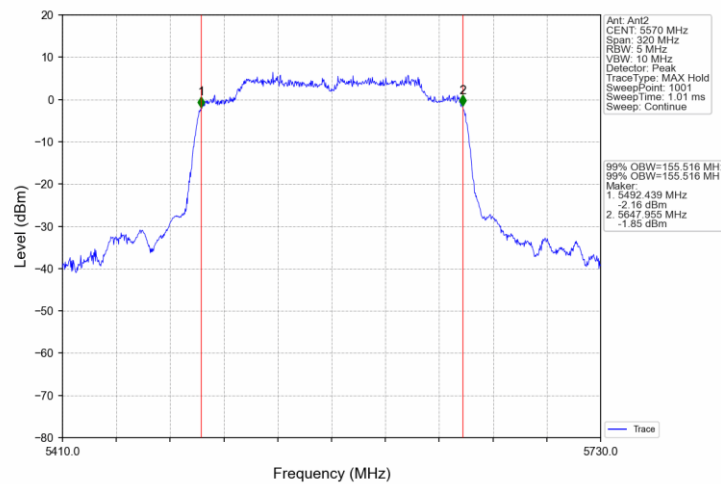

802.11ax(HEW160)_MCH_5250MHz_Ant1_NTNV

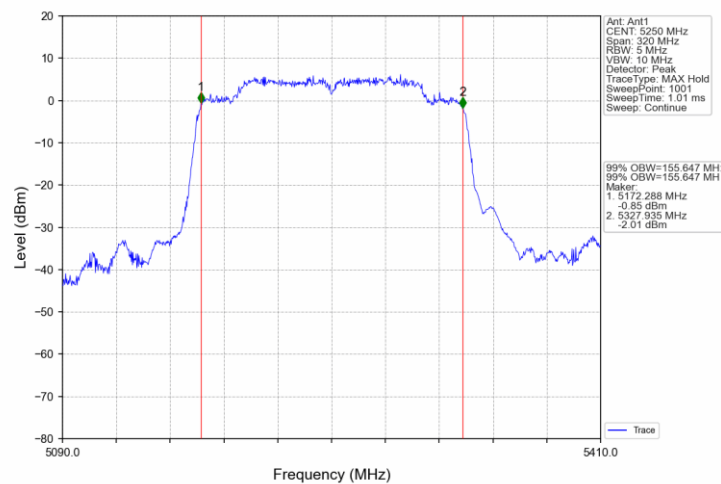

802.11ax(HEW160)_MCH_5250MHz_Ant2_NTNV

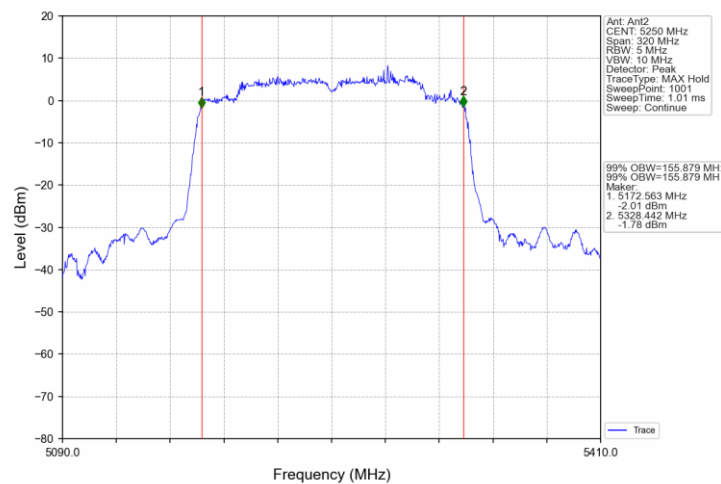

8.3 Maximum conducted output power

Test Method

According to KDB789033 D02

Test Method

According to C63.10, the EUT was placed on 0.8m height table, the RF output of EUT was connected to the test power meter by RF cable. The path loss was compensated to the results for each measurement.

1. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
The EUT is configured to transmit continuously or to transmit with a consistent duty cycle.
At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
2. If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in 12.2 in C63.10-2013.
3. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
4. Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25%).

FCC Limits:

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

NOTE 1: Maximum Conducted Output Power=Conducted Output Power + Correction Factor

NOTE 2: $\text{Power}_{\text{SUM}} = 10 * \log(10^{(\text{PowerAnt1}/10)} + 10^{(\text{PowerAnt2}/10)})$

NOTE 3: The Antenna directional gain is 6.24 dBi. The limit is the above limits - (6.24-6) dB

Test result as below table

IEEE 802.11a modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Conducted Power Limit (dBm)
UNII-1	Low	5180	13.1	13.4	23.74
	Middle	5200	13.6	13.6	23.74
	High	5240	13.2	12.9	23.74
UNII-2A	Low	5260	13.4	12.9	23.74
	Middle	5280	14.0	13.6	23.74
	High	5320	13.8	13.3	23.74
UNII-2C	Low	5500	13.5	13.9	23.74
	Middle	5580	13.4	13.3	23.74
	High	5700	13.9	12.6	23.74
		5720	14.3	13.2	23.74
UNII-3	Low	5745	14.3	13.5	29.76
	Middle	5785	14.4	13.3	29.76
	High	5825	14.3	13.4	29.76

IEEE 802.11n20 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-1	Low	5180	9.9	10.1	13.0	23.74
	Middle	5200	10.4	10.2	13.3	23.74
	High	5240	9.4	9.7	12.6	23.74
UNII-2A	Low	5260	9.9	10.3	13.1	23.74
	Middle	5280	10.8	11.0	13.9	23.74
	High	5320	10.6	10.7	13.7	23.74
UNII-2C	Low	5500	10.3	11.0	13.7	23.74
	Middle	5580	10.1	10.5	13.3	23.74
	High	5700	10.6	9.9	13.3	23.74
		5720	11.0	10.5	13.8	23.74
UNII-3	Low	5745	11.1	10.4	13.8	29.76
	Middle	5785	11.2	10.5	13.9	29.76
	High	5825	11.2	10.4	13.8	29.76

IEEE 802.11n40 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-1	Low	5190	11.9	12.0	15.0	23.74
	High	5230	12.2	12.3	15.3	23.74
UNII-2A	Low	5270	12.4	12.0	15.2	23.74
	High	5310	12.4	11.9	15.2	23.74
UNII-2C	Low	5510	12.0	12.4	15.2	23.74
	Middle	5550	11.4	11.6	14.5	23.74
	High	5670	12.1	11.4	14.8	23.74
		5710	12.5	11.3	15.0	23.74
UNII-3	Low	5755	12.8	11.5	15.2	29.76
	High	5795	12.9	11.9	15.4	29.76

IEEE 802.11ac20 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-1	Low	5180	10.2	10.5	13.4	23.74
	Middle	5200	10.7	10.7	13.7	23.74
	High	5240	9.8	10.1	13.0	23.74
UNII-2A	Low	5260	10.2	10.1	13.2	23.74
	Middle	5280	11.2	10.7	14.0	23.74
	High	5320	11.0	10.5	13.8	23.74
UNII-2C	Low	5500	10.7	10.8	13.8	23.74
	Middle	5580	10.4	10.3	13.4	23.74
	High	5700	10.9	9.7	13.4	23.74
		5720	11.3	10.3	13.8	23.74
UNII-3	Low	5745	11.3	10.3	13.8	29.76
	Middle	5785	11.5	10.3	14.0	29.76
	High	5825	11.5	10.2	13.9	29.76

IEEE 802.11ac40 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-1	Low	5190	11.8	11.8	14.8	23.74
	High	5230	12.1	12.1	15.1	23.74
UNII-2A	Low	5270	12.3	11.9	15.1	23.74
	High	5310	12.3	11.8	15.1	23.74
UNII-2C	Low	5510	11.9	12.2	15.1	23.74
	Middle	5550	11.4	11.4	14.4	23.74
	High	5670	12.0	11.3	14.7	23.74
		5710	12.5	11.2	14.9	23.74
UNII-3	Low	5755	12.8	11.4	15.2	29.76
	High	5795	12.9	11.8	15.4	29.76

IEEE 802.11ac80 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-1	42	5210	12.3	12.2	15.3	23.74
UNII-2A	58	5290	11.6	11.1	14.4	23.74
UNII-2C	Low	5530	11.8	12.0	14.9	23.74
	Middle	5610	12.5	11.9	15.2	23.74
	Hight	5690	12.9	12.0	15.5	23.74
UNII-3	155	5775	13.4	12.2	15.9	29.76

IEEE 802.11ac160 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-2A	50	5250	8.8	8.7	11.8	23.74
UNII-2C	114	5570	9.9	9.8	12.9	23.74

IEEE 802.11ax20 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-1	Low	5180	9.9	10.2	13.1	23.74
	Middle	5200	10.5	10.3	13.4	23.74
	High	5240	9.5	9.8	12.7	23.74
UNII-2A	Low	5260	10.0	9.7	12.9	23.74
	Middle	5280	10.9	10.4	13.7	23.74
	High	5320	10.7	10.2	13.5	23.74
UNII-2C	Low	5500	10.4	10.5	13.5	23.74
	Middle	5580	10.2	10.0	13.1	23.74
	High	5700	10.5	9.5	13.0	23.74
		5720	11.0	10.1	13.6	23.74
UNII-3	Low	5745	11.1	10.1	13.6	29.76
	Middle	5785	11.3	10.1	13.8	29.76
	High	5825	11.3	10.0	13.7	29.76

IEEE 802.11ax40 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-1	Low	5190	11.5	11.3	14.4	23.74
	High	5230	11.7	11.7	14.7	23.74
UNII-2A	Low	5270	11.9	11.4	14.7	23.74
	High	5310	11.9	11.3	14.6	23.74
UNII-2C	Low	5510	11.5	11.8	14.7	23.74
	Middle	5550	11.0	10.9	14.0	23.74
	High	5670	11.7	11.0	14.4	23.74
		5710	12.1	10.8	14.5	23.74
UNII-3	Low	5755	12.4	11.1	14.8	29.76
	High	5795	12.5	11.4	15.0	29.76

IEEE 802.11ax80 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-1	42	5210	11.9	11.8	14.9	23.74
UNII-2A	58	5290	11.2	10.7	14.0	23.74
UNII-2C	Low	5530	11.5	11.6	14.6	23.74
	Middle	5610	12.2	11.5	14.9	23.74
	Hight	5690	12.5	11.6	15.1	23.74
UNII-3	155	5775	13.1	11.9	15.6	29.76

IEEE 802.11ax160 modulation Test Result

Band	Channel	Frequency (MHz)	Ant1 Conducted Power (dBm)	Ant2 Conducted Power (dBm)	Total Conducted (dBm)	Conducted Power Limit (dBm)
UNII-2A	50	5250	8.5	8.3	11.4	23.74
UNII-2C	114	5570	9.7	9.6	12.7	23.74

8.4 Maximum power spectral density

Test Method (Method SA-2 in C63.10-2013)

The EUT was placed on 0.8m height table, the RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement. (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. Measure the duty cycle.
2. Set span to encompass the entire emission bandwidth (EBW) of the signal.
3. Set RBW = 1 MHz.
4. Set VBW $\geq$ 3 MHz.
5. Number of points in sweep $\geq$ 2 Span / RBW.
6. Sweep time = auto.
7. Detector = RMS
8. Trace average at least 100 traces in power averaging mode.
9. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

Limit:

FCC Limits:

The maximum power spectral density shall not exceed 11dBm for the 5.15-5.25GHz, 5.25-5.35GHz, 5.47-5.725 GHz Band in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500kHz band.

NOTE 1: $PSD^{SUM} = 10 * \log(10^{(PsdAnt1/10)} + 10^{(PsdAnt2/10)})$

NOTE 2: The Antenna directional gain is 6.24 dBi. The limit is the above limits - (6.24-6) dB

Test Result


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/MHz)				Verdict
			ANT1	ANT2	MIMO	Limit	
802.11a	SISO	5180	2.10	2.32	/	<=10.76	Pass
		5200	1.77	1.97	/	<=10.76	Pass
		5240	1.59	1.41	/	<=10.76	Pass
		5260	-1.23	1.49	/	<=10.76	Pass
		5300	1.46	0.50	/	<=10.76	Pass
		5320	2.18	2.14	/	<=10.76	Pass
		5500	1.62	2.15	/	<=10.76	Pass
		5580	1.53	1.88	/	<=10.76	Pass
		5700	1.95	1.21	/	<=10.76	Pass
802.11n (HT20)	MIMO	5180	-1.10	-1.18	1.71	<=10.76	Pass
		5200	-0.95	-0.91	1.67	<=10.76	Pass
		5240	-1.78	-1.85	1.08	<=10.76	Pass
		5260	-1.52	-1.74	1.29	<=10.76	Pass
		5300	-1.04	-1.31	1.72	<=10.76	Pass
		5320	-0.58	-1.17	1.96	<=10.76	Pass
		5500	-1.50	-1.75	1.24	<=10.76	Pass
		5580	-1.76	-1.77	1.13	<=10.76	Pass
		5700	-1.42	-2.23	1.06	<=10.76	Pass
802.11n (HT40)	MIMO	5190	-3.09	-2.97	-0.23	<=10.76	Pass
		5230	-2.95	-3.07	-0.27	<=10.76	Pass
		5270	-2.82	-3.11	-0.11	<=10.76	Pass
		5310	-3.03	-3.43	-0.26	<=10.76	Pass
		5510	-3.58	-3.15	-0.59	<=10.76	Pass
		5550	-3.67	-3.79	-0.97	<=10.76	Pass
		5670	-3.31	-4.23	-0.91	<=10.76	Pass
802.11ac (VHT20)	MIMO	5180	-2.17	-2.77	0.47	<=10.76	Pass
		5200	-2.12	-2.67	0.31	<=10.76	Pass
		5240	-2.21	-1.97	0.73	<=10.76	Pass
		5260	-2.59	-2.86	0.20	<=10.76	Pass
		5300	-2.53	-2.35	0.42	<=10.76	Pass
		5320	-2.39	-2.49	0.42	<=10.76	Pass
		5500	-3.50	-4.33	-1.07	<=10.76	Pass
		5580	-3.73	-3.10	-0.45	<=10.76	Pass
		5700	-4.32	-3.38	-0.85	<=10.76	Pass
802.11ac (VHT40)	MIMO	5190	-4.16	-4.14	-1.23	<=10.76	Pass
		5230	-6.94	-6.83	-3.96	<=10.76	Pass
		5270	-3.23	-3.12	-0.26	<=10.76	Pass
		5310	-3.74	-3.76	-0.82	<=10.76	Pass
		5510	-6.62	-7.05	-4.01	<=10.76	Pass
		5550	-6.68	-7.05	-4.11	<=10.76	Pass
		5670	-7.08	-7.24	-4.32	<=10.76	Pass
		5710	-6.32	-6.74	-3.65	<=10.76	Pass
802.11ac (VHT80)	MIMO	5210	-5.89	-5.63	-3.12	<=10.76	Pass
		5290	-5.82	-5.65	-3.00	<=10.76	Pass
		5530	-8.78	-8.60	-5.90	<=10.76	Pass
		5610	-9.16	-9.22	-6.18	<=10.76	Pass
		5690	-6.71	-7.21	-4.13	<=10.76	Pass
802.11ac (VHT160)	MIMO	5570	-11.73	-11.63	-9.03	<=10.76	Pass
		5250	-11.21	-11.07	-8.35	<=10.76	Pass
802.11ax (HEW20)	MIMO	5180	-1.83	-2.05	0.97	<=10.76	Pass
		5200	-1.92	-2.11	0.87	<=10.76	Pass
		5240	-2.02	-1.63	1.08	<=10.76	Pass
		5260	-1.95	-2.06	0.70	<=10.76	Pass
		5300	-1.96	-1.89	0.93	<=10.76	Pass

		5320	-1.95	-2.00	0.91	<=10.76	Pass
		5500	-3.03	-4.04	-0.68	<=10.76	Pass
		5580	-3.57	-3.55	-0.69	<=10.76	Pass
		5700	-3.52	-3.82	-0.90	<=10.76	Pass
		5720	-3.65	-4.22	-1.11	<=10.76	Pass
802.11ax (HEW40)	MIMO	5190	-4.25	-3.92	-1.15	<=10.76	Pass
		5230	-6.86	-6.44	-3.76	<=10.76	Pass
		5270	-3.28	-3.22	-0.33	<=10.76	Pass
		5310	-3.48	-3.45	-0.70	<=10.76	Pass
		5510	-6.40	-6.76	-3.80	<=10.76	Pass
		5550	-6.43	-6.82	-3.94	<=10.76	Pass
		5670	-6.93	-7.17	-4.14	<=10.76	Pass
802.11ax (HEW80)	MIMO	5710	-7.06	-7.37	-4.30	<=10.76	Pass
		5210	-6.60	-6.45	-3.59	<=10.76	Pass
		5290	-6.50	-6.23	-3.40	<=10.76	Pass
		5530	-9.30	-9.29	-6.52	<=10.76	Pass
		5610	-9.84	-9.48	-6.73	<=10.76	Pass
802.11ax (HEW160)	MIMO	5690	-6.85	-7.04	-4.06	<=10.76	Pass
		5570	-11.88	-12.05	-9.21	<=10.76	Pass
		5250	-11.53	-11.38	-8.58	<=10.76	Pass


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/500kHz)				Verdict
			ANT1	ANT2	MIMO	Limit	
802.11a	SISO	5745	-0.78	-1.99	/	<=29.76	Pass
		5785	-4.23	-2.37	/	<=29.76	Pass
		5825	-4.42	-2.27	/	<=29.76	Pass
		5720	-2.42	-3.50	/	<=29.76	Pass
802.11n (HT20)	MIMO	5745	-4.35	-5.85	-2.27	<=29.76	Pass
		5785	-4.74	-5.81	-2.23	<=29.76	Pass
		5825	-4.74	-5.89	-2.38	<=29.76	Pass
		5720	-6.49	-6.79	-3.73	<=29.76	Pass
802.11n (HT40)	MIMO	5755	-6.36	-7.56	-3.92	<=29.76	Pass
		5795	-6.46	-7.23	-3.97	<=29.76	Pass
		5710	-9.15	-9.71	-6.56	<=29.76	Pass
802.11ac (VHT20)	MIMO	5745	-3.40	-3.62	-0.65	<=29.76	Pass
		5785	-2.66	-2.95	0.06	<=29.76	Pass
		5825	-3.34	-2.72	-0.13	<=29.76	Pass
		5720	-6.03	-6.60	-3.48	<=29.76	Pass
802.11ac (VHT40)	MIMO	5755	-6.72	-6.59	-3.77	<=29.76	Pass
		5795	-6.06	-6.13	-3.25	<=29.76	Pass
		5710	-9.80	-9.71	-6.95	<=29.76	Pass
802.11ac (VHT80)	MIMO	5775	-8.31	-8.80	-5.56	<=29.76	Pass
		5690	-9.45	-9.79	-6.64	<=29.76	Pass
802.11ax (HEW20)	MIMO	5745	-3.12	-3.10	-0.31	<=29.76	Pass
		5785	-2.92	-3.16	-0.17	<=29.76	Pass
		5825	-3.57	-3.01	-0.42	<=29.76	Pass
		5720	-5.92	-6.46	-3.37	<=29.76	Pass
802.11ax (HEW40)	MIMO	5755	-6.33	-6.34	-3.53	<=29.76	Pass
		5795	-5.80	-6.16	-3.19	<=29.76	Pass
		5710	-8.93	-9.25	-6.17	<=29.76	Pass
802.11ax (HEW80)	MIMO	5775	-8.96	-9.07	-6.14	<=29.76	Pass
		5690	-9.62	-9.59	-6.70	<=29.76	Pass

Test Graphs


802.11a_LCH_5180MHz_Ant1_NTNV

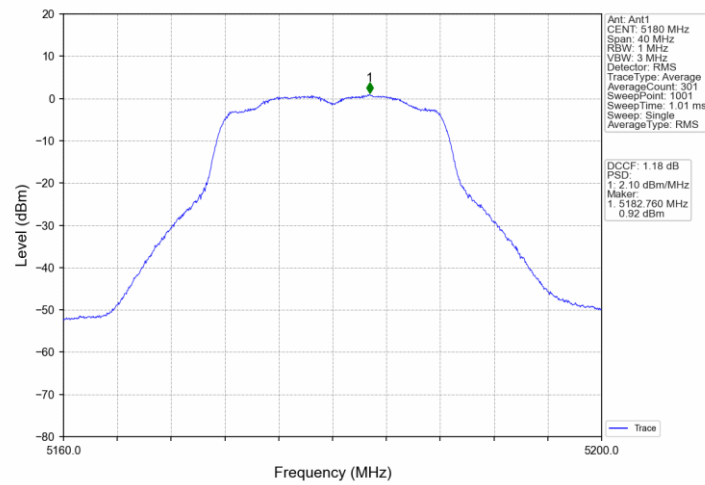


802.11a_LCH_5180MHz_Ant2_NTNV

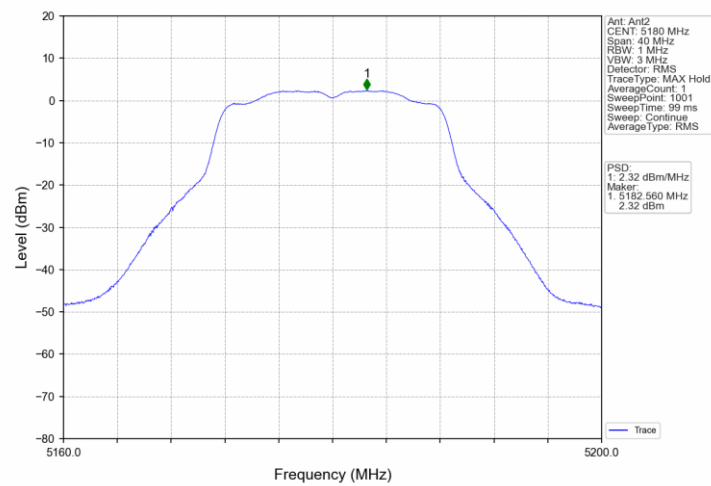


802.11a_MCH_5200MHz_Ant1_NTNV

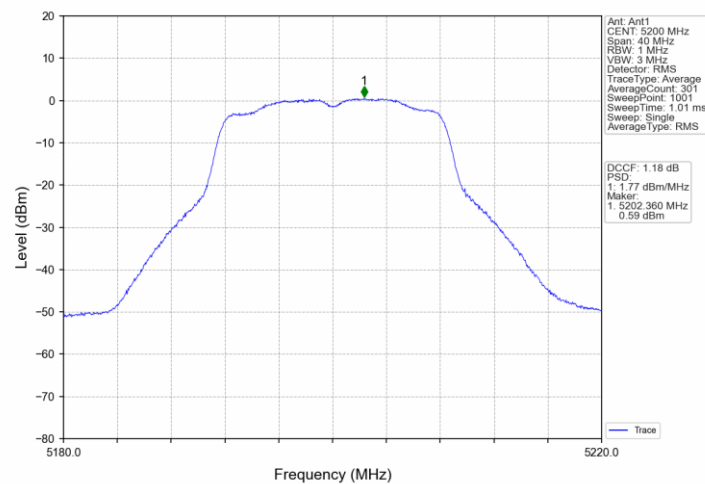


802.11a_MCH_5200MHz_Ant2_NTNV

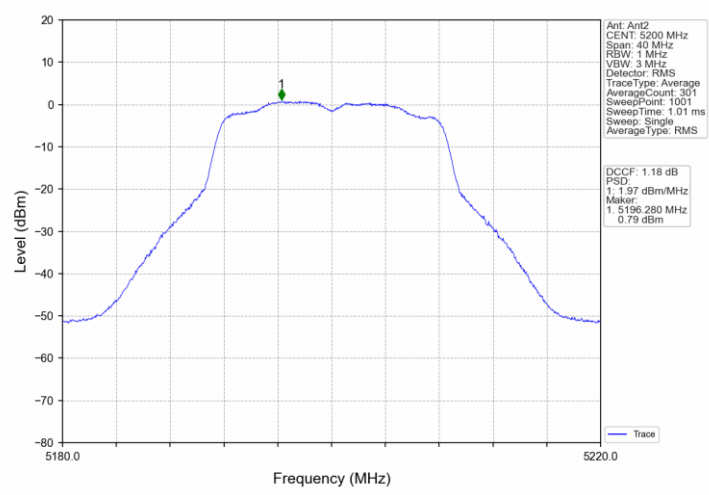


802.11a_HCH_5240MHz_Ant1_NTNV

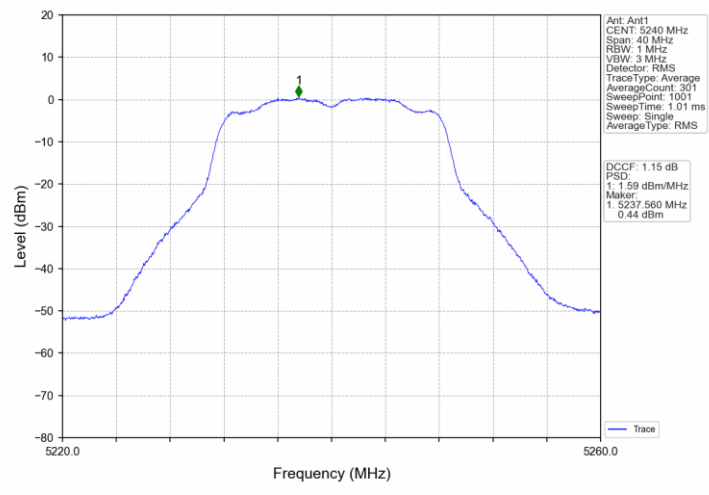


802.11a_HCH_5240MHz_Ant2_NTNV

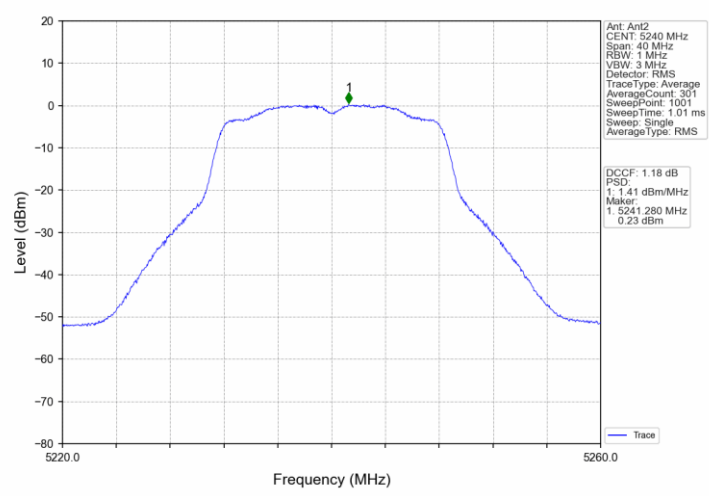


802.11a_LCH_5260MHz_Ant1_NTNV

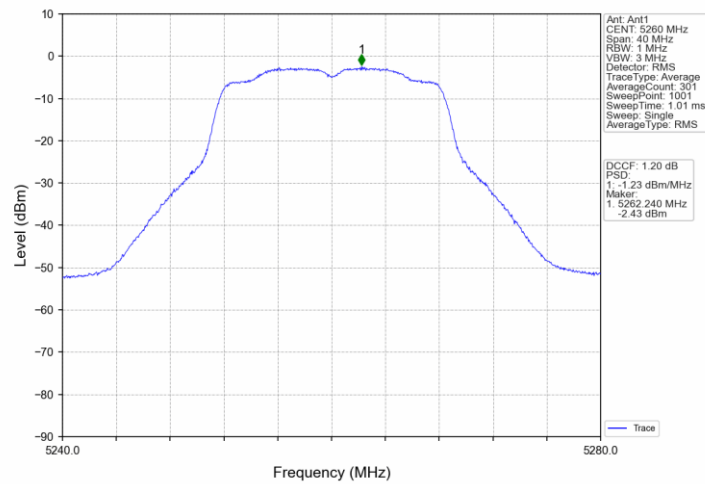


802.11a_LCH_5260MHz_Ant2_NTNV

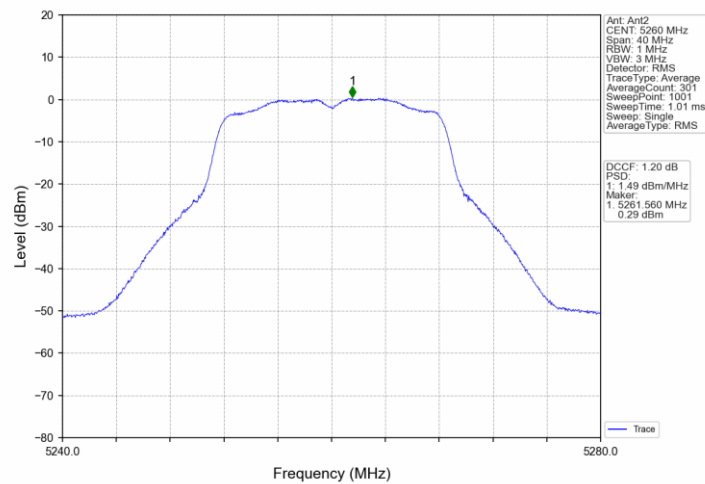


802.11a_MCH_5300MHz_Ant1_NTNV

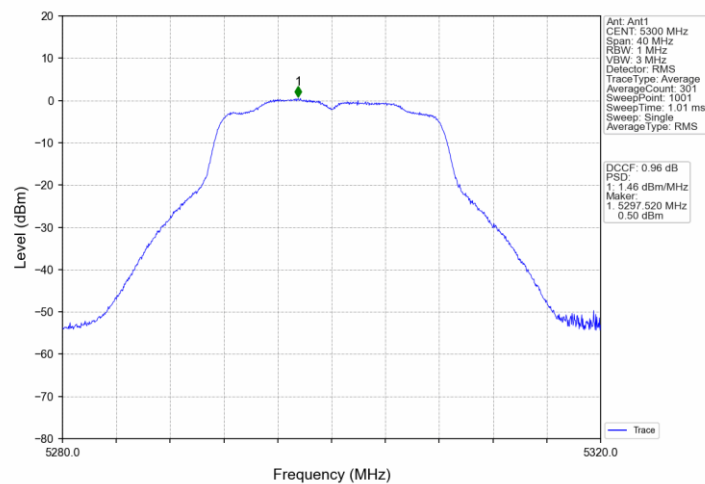


802.11a_MCH_5300MHz_Ant2_NTNV

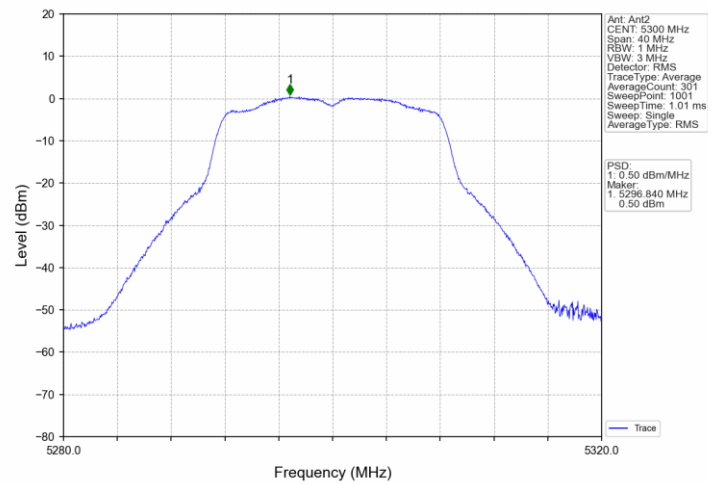


802.11a_HCH_5320MHz_Ant1_NTNV

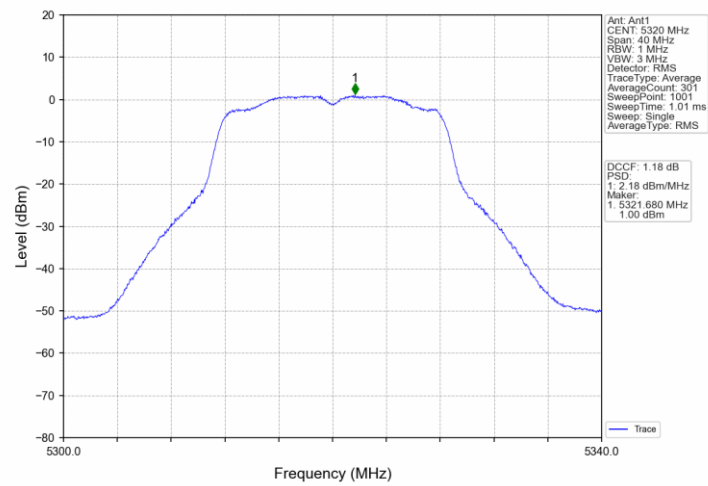


802.11a_HCH_5320MHz_Ant2_NTNV

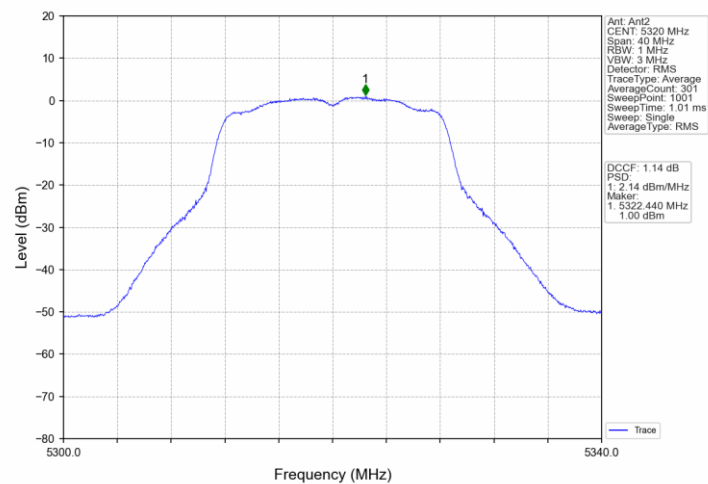


802.11a_LCH_5500MHz_Ant1_NTNV

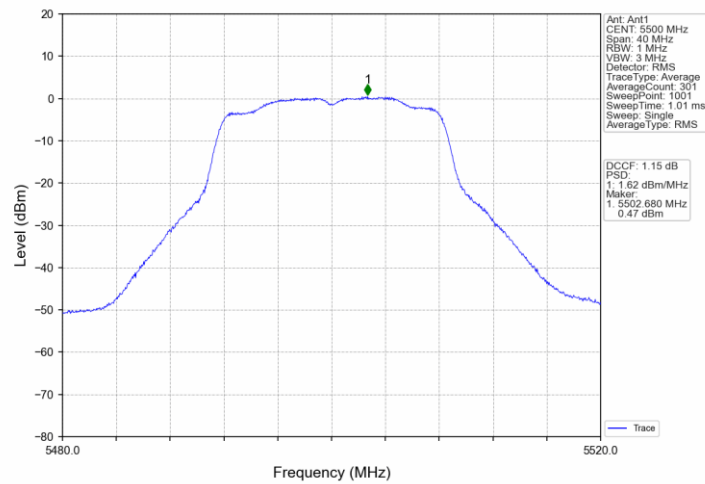


802.11a_LCH_5500MHz_Ant2_NTNV

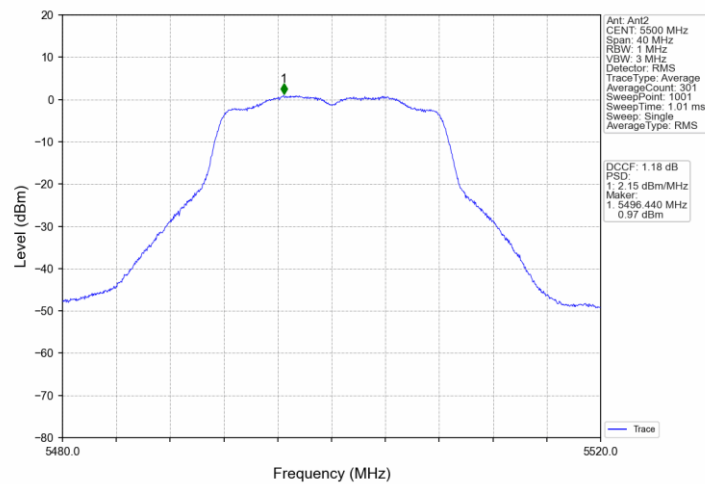


802.11a_MCH_5580MHz_Ant1_NTNV

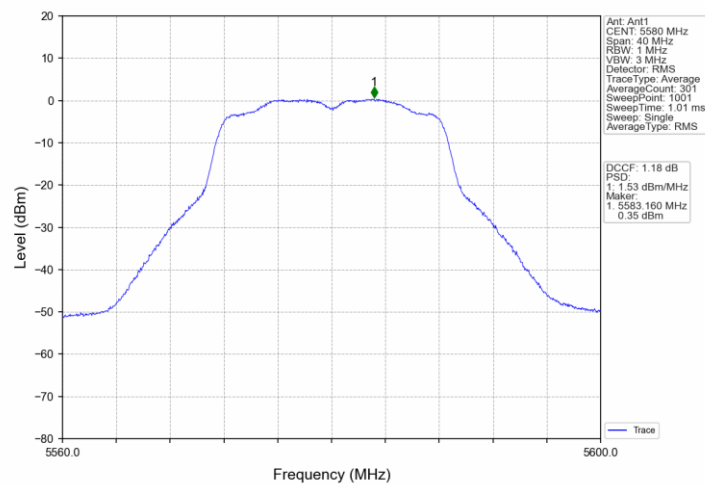


802.11a_MCH_5580MHz_Ant2_NTNV

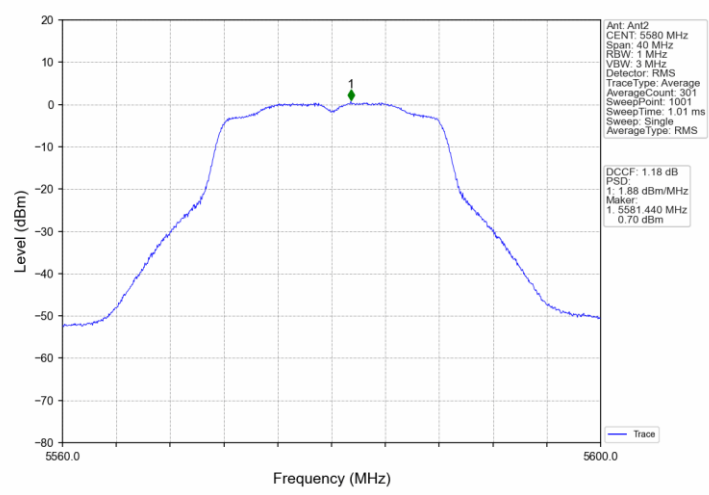


802.11a_HCH_5700MHz_Ant1_NTNV

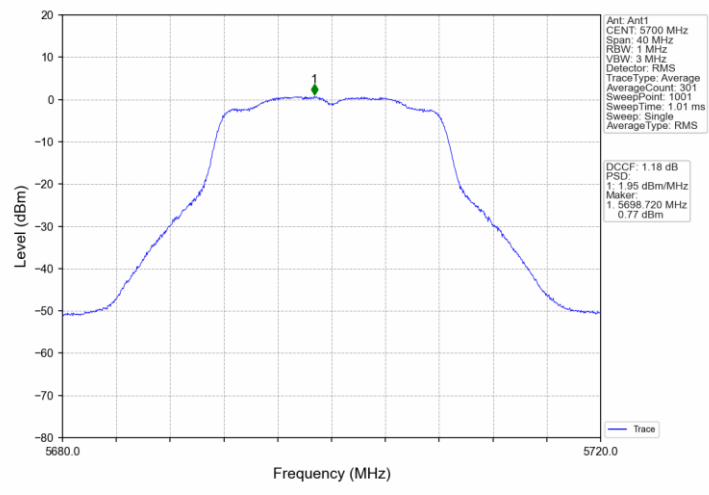


802.11a_HCH_5700MHz_Ant2_NTNV

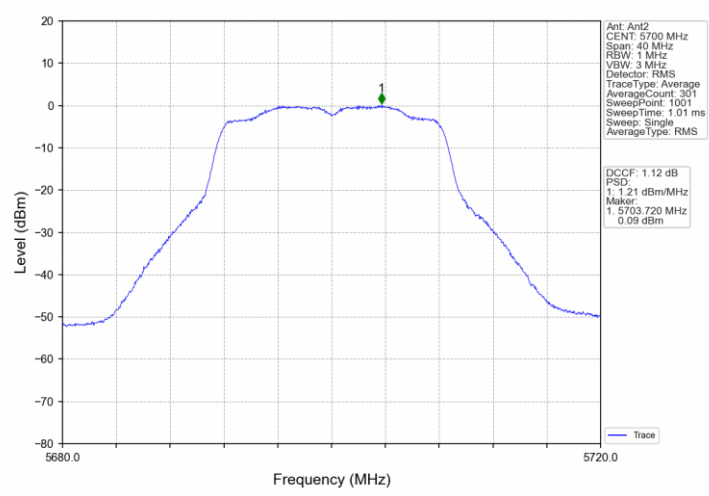


802.11a_HCH_5720MHz_Ant1_NTNV

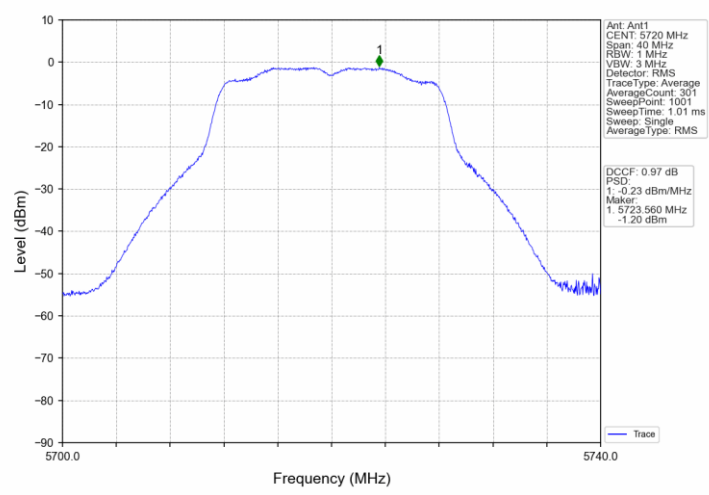


802.11a_HCH_5720MHz_Ant2_NTNV

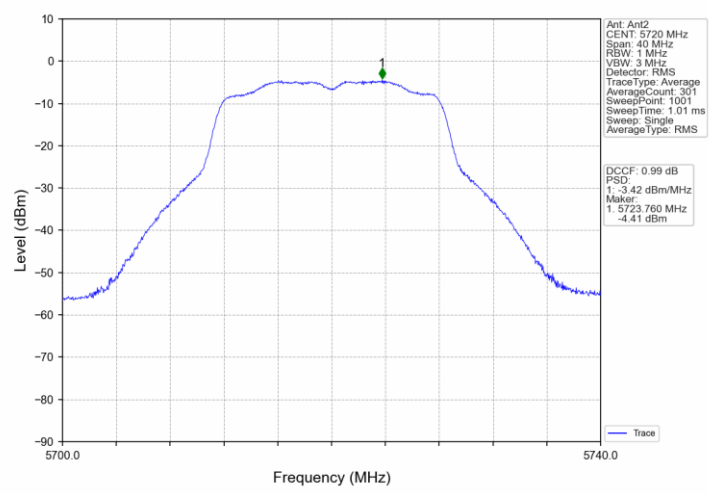


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

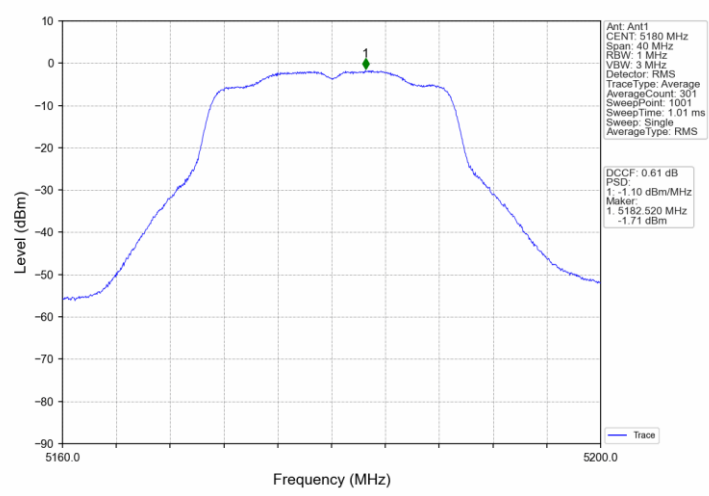


802.11n(HT20)_LCH_5180MHz_Ant2_NTNV

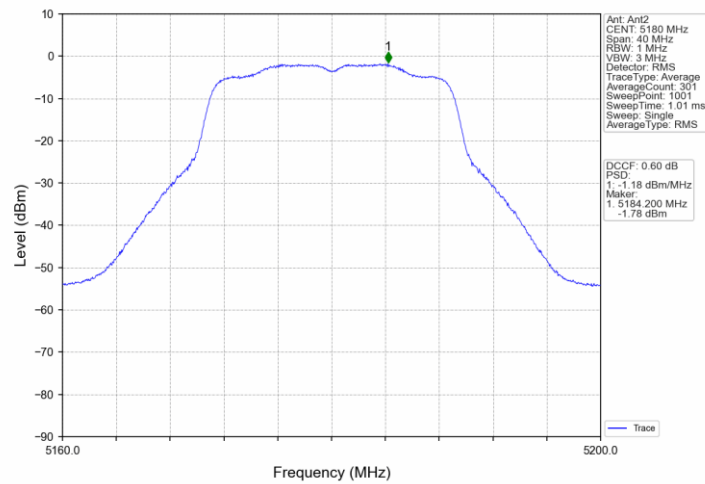


802.11n(HT20)_LCH_5180MHz_MIMO_NTNV

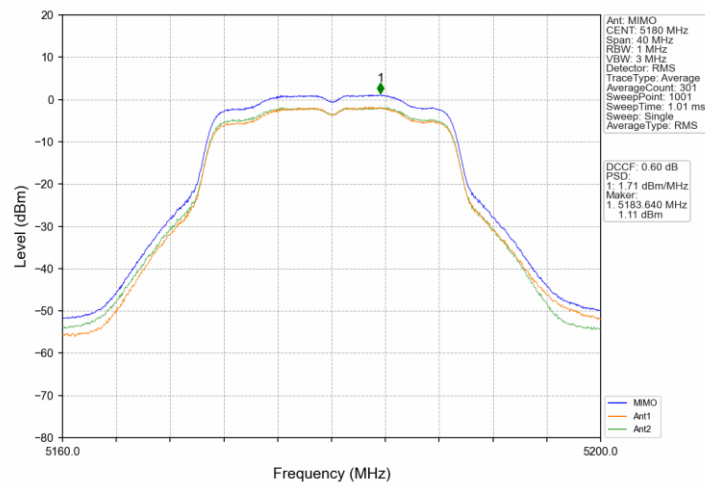


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

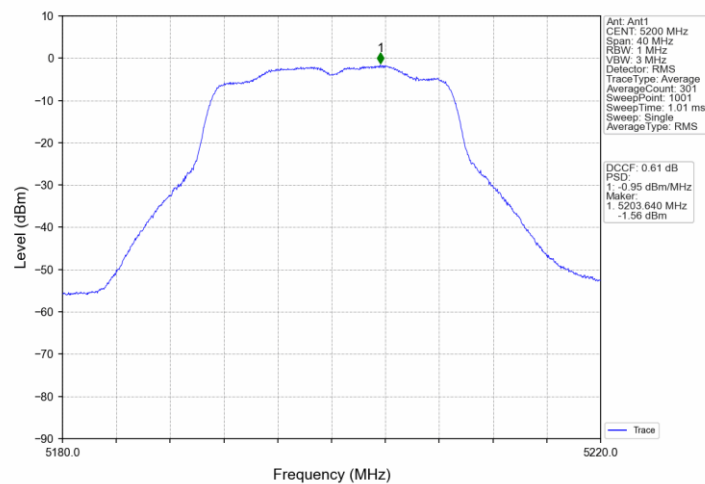


802.11n(HT20)_MCH_5200MHz_Ant2_NTNV

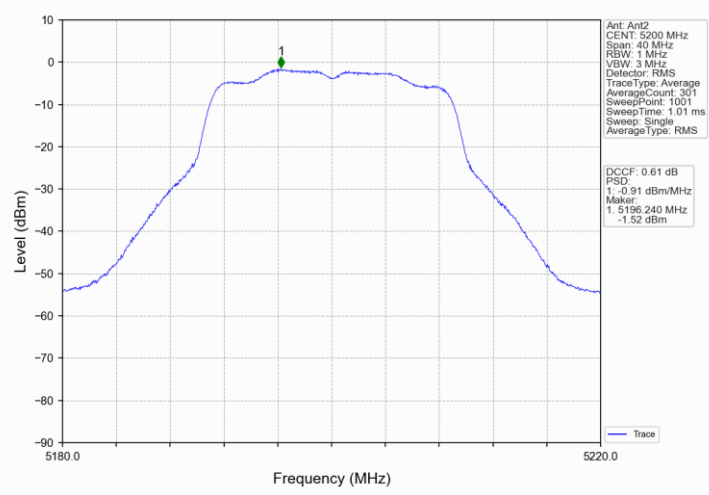


802.11n(HT20)_MCH_5200MHz_MIMO_NTNV

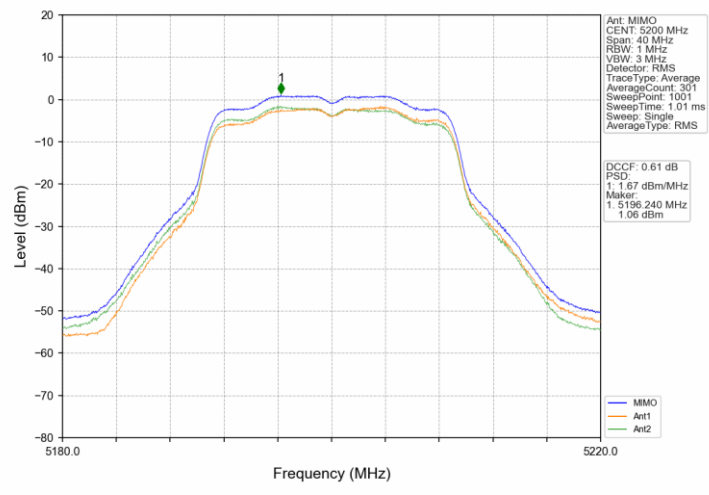


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

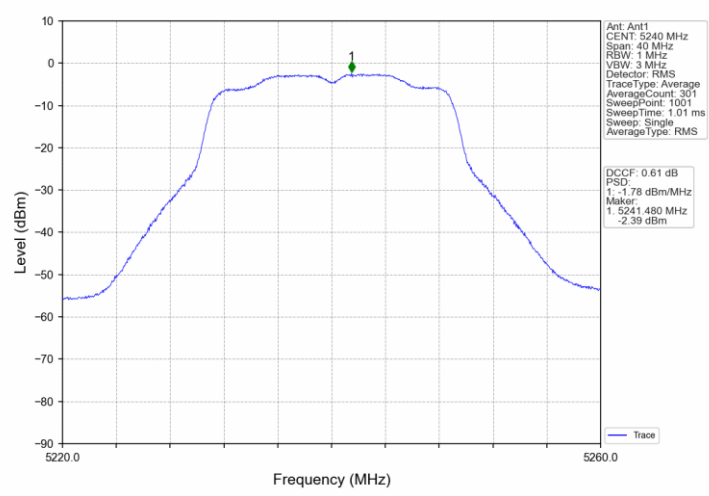


802.11n(HT20)_HCH_5240MHz_Ant2_NTNV

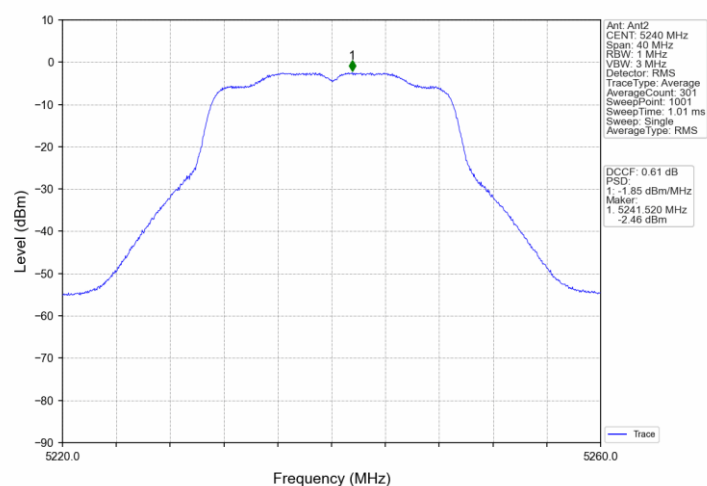


802.11n(HT20)_HCH_5240MHz_MIMO_NTNV

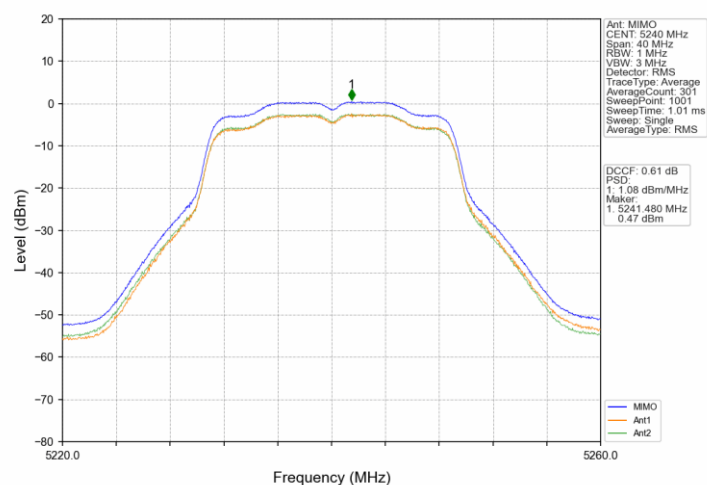


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

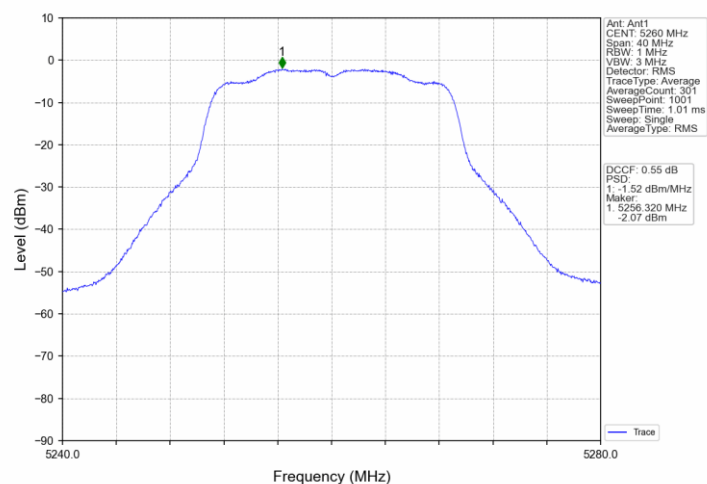


802.11n(HT20)_LCH_5260MHz_Ant2_NTNV

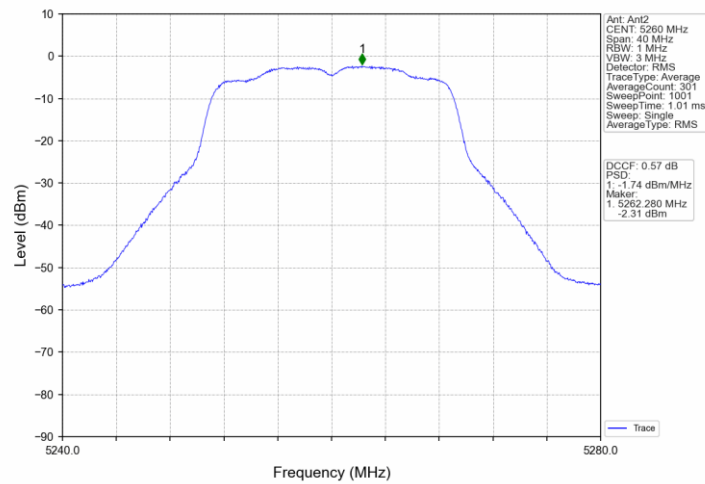


802.11n(HT20)_LCH_5260MHz_MIMO_NTNV

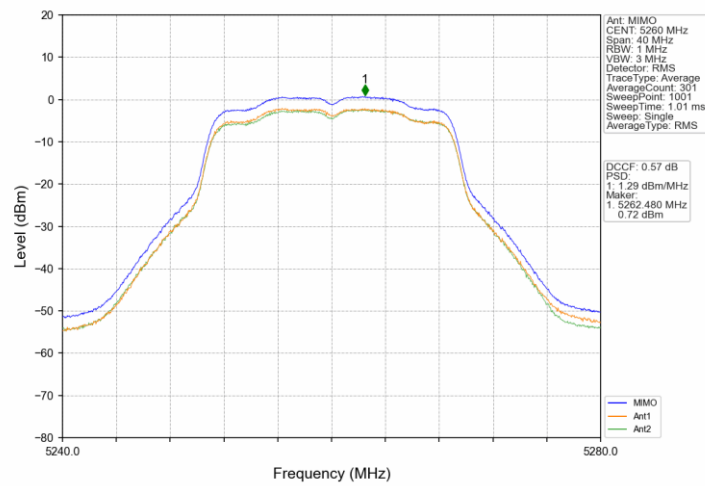


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV

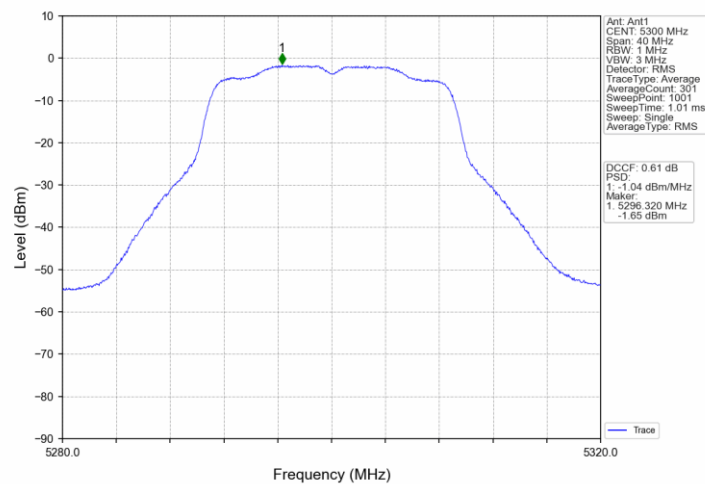


802.11n(HT20)_MCH_5300MHz_Ant2_NTNV

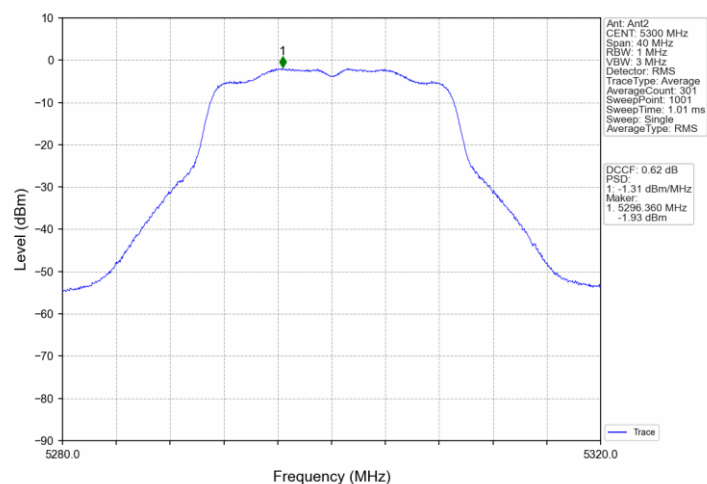


802.11n(HT20)_MCH_5300MHz_MIMO_NTNV

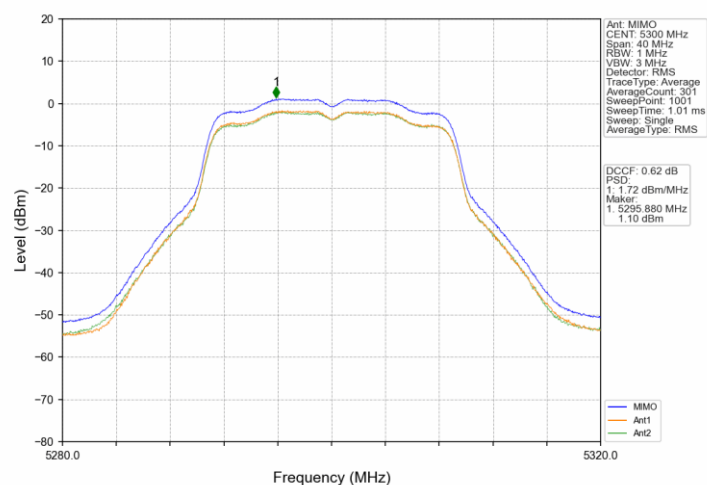


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

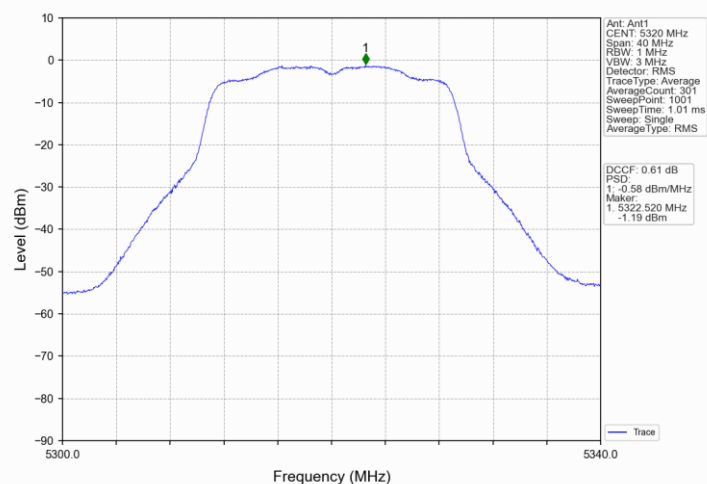


802.11n(HT20)_HCH_5320MHz_Ant2_NTNV

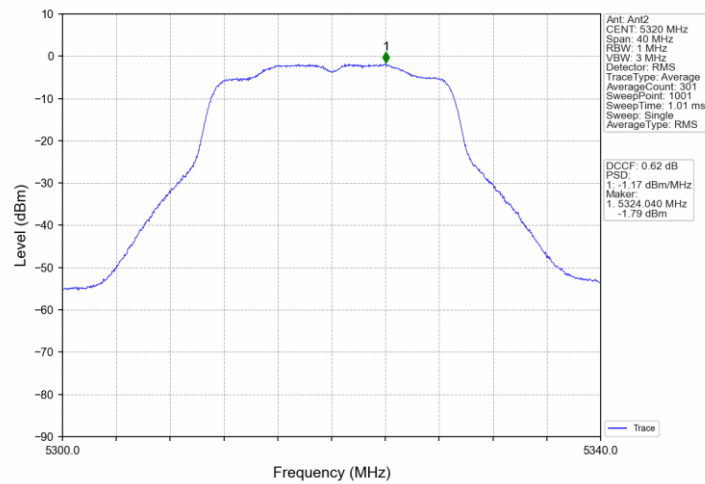


802.11n(HT20)_HCH_5320MHz_MIMO_NTNV

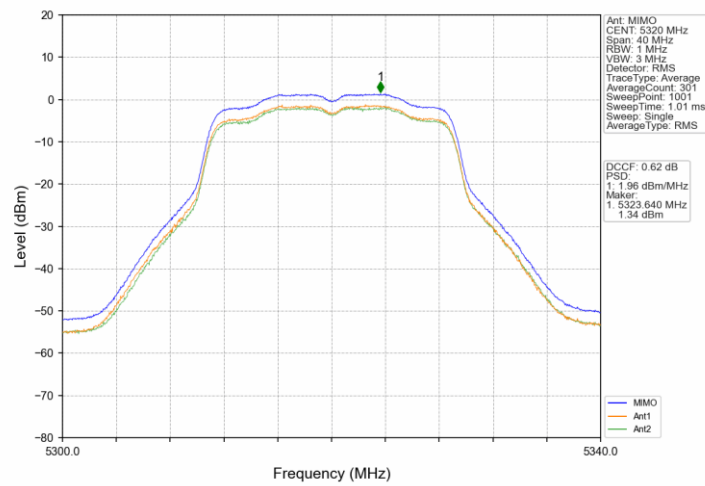


802.11n(HT20)_LCH_5500MHz_Ant1_NTNV

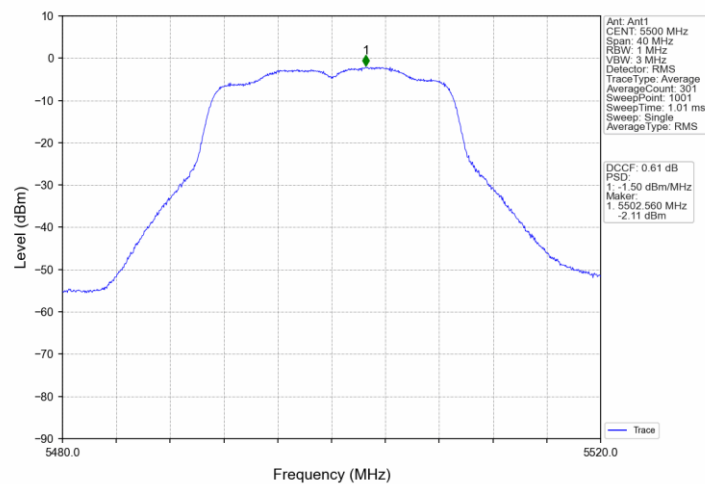


802.11n(HT20)_LCH_5500MHz_Ant2_NTNV

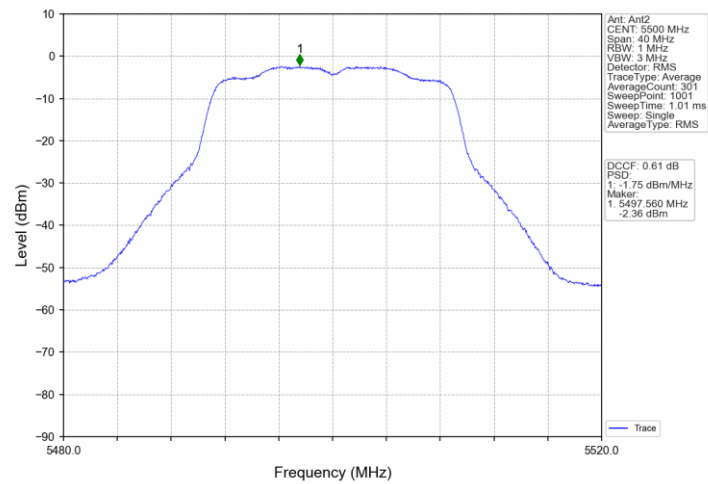


802.11n(HT20)_LCH_5500MHz_MIMO_NTNV

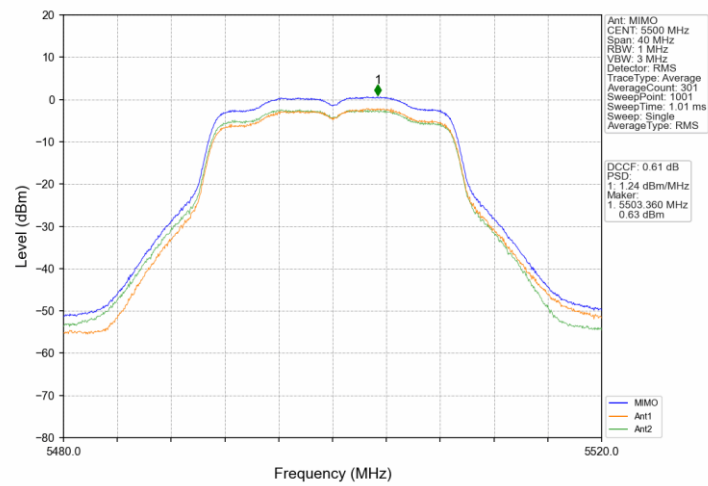


802.11n(HT20)_MCH_5580MHz_Ant1_NTNV

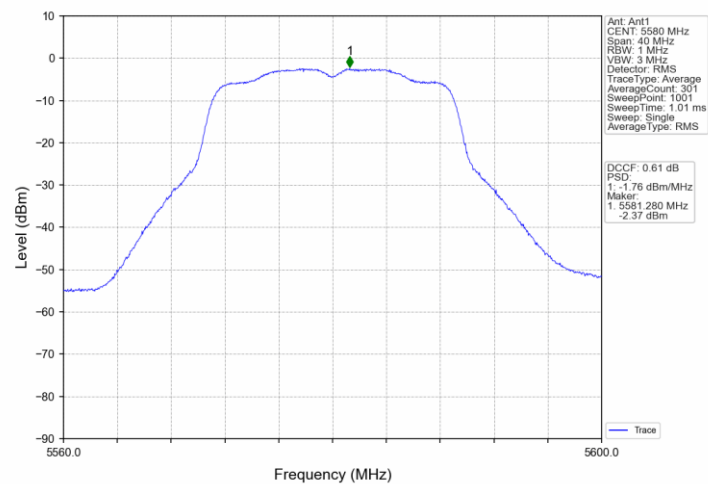


802.11n(HT20)_MCH_5580MHz_Ant2_NTNV

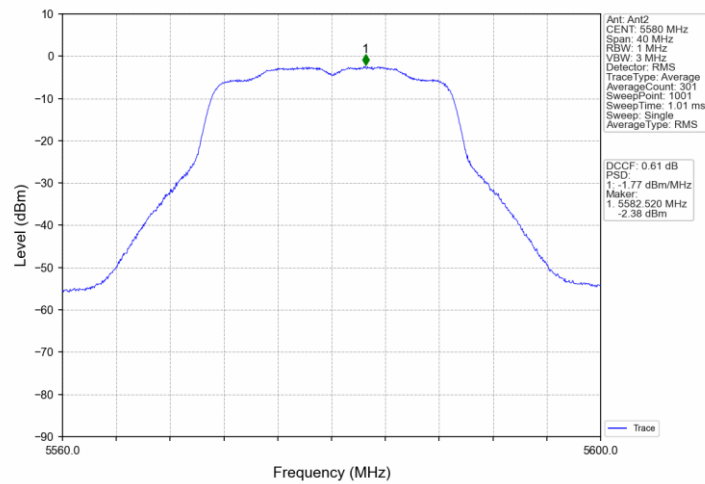


802.11n(HT20)_MCH_5580MHz_MIMO_NTNV

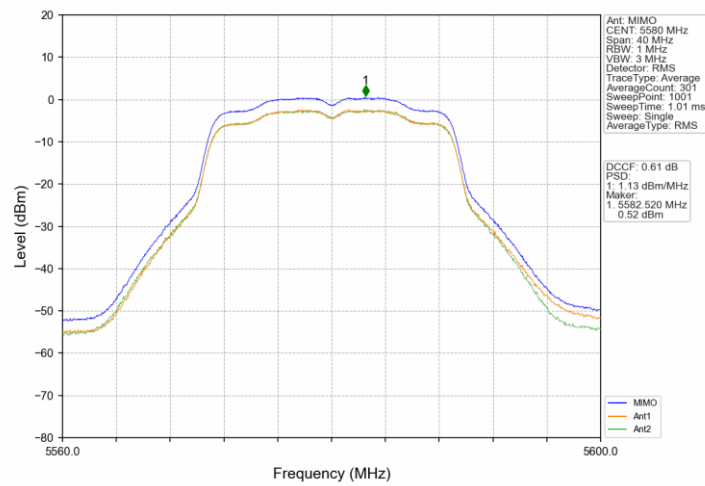


802.11n(HT20)_HCH_5700MHz_Ant1_NTNV

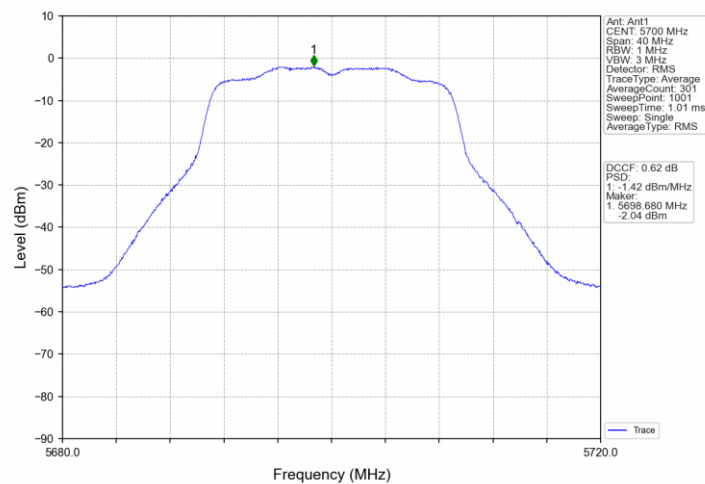


802.11n(HT20)_HCH_5700MHz_Ant2_NTNV

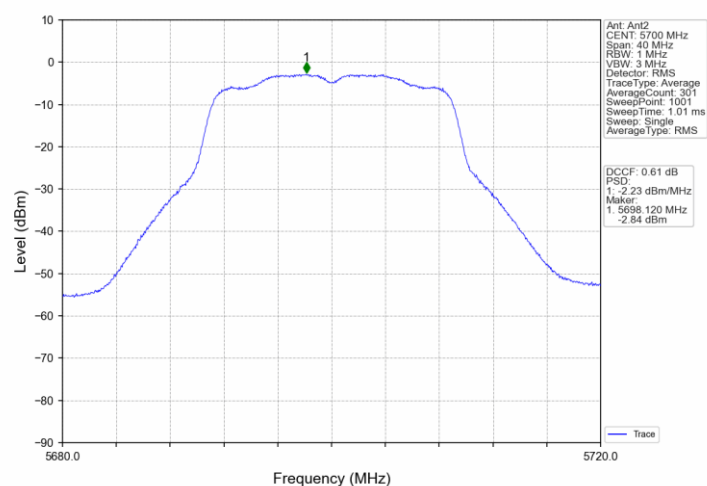


802.11n(HT20)_HCH_5700MHz_MIMO_NTNV

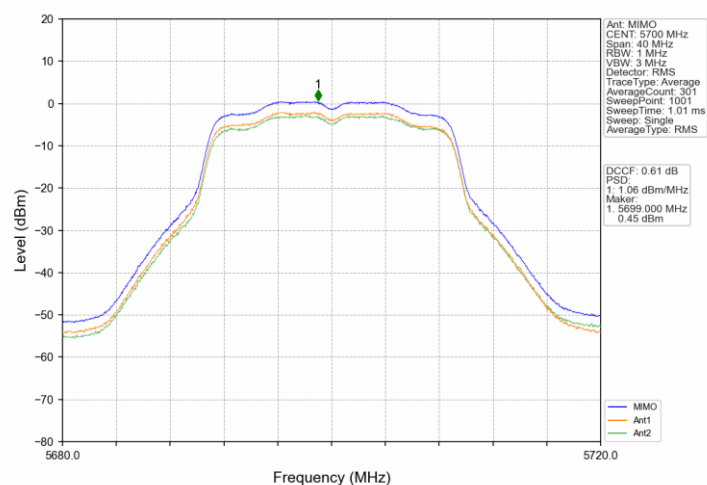


802.11n(HT20)_HCH_5720MHz_Ant1_NTNV

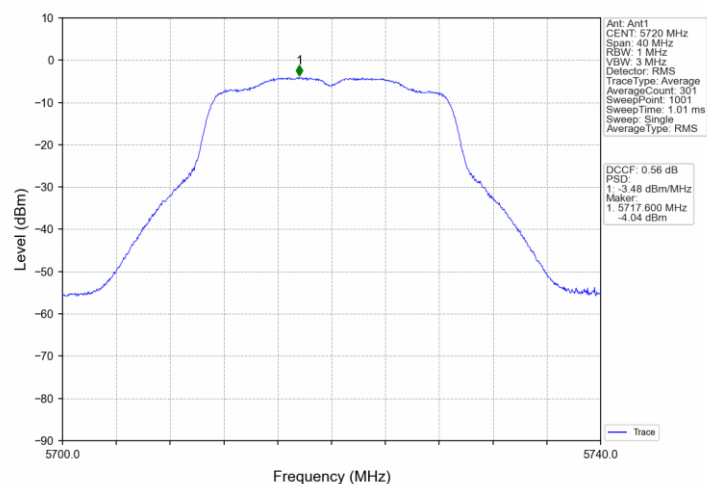


802.11n(HT20)_HCH_5720MHz_Ant2_NTNV

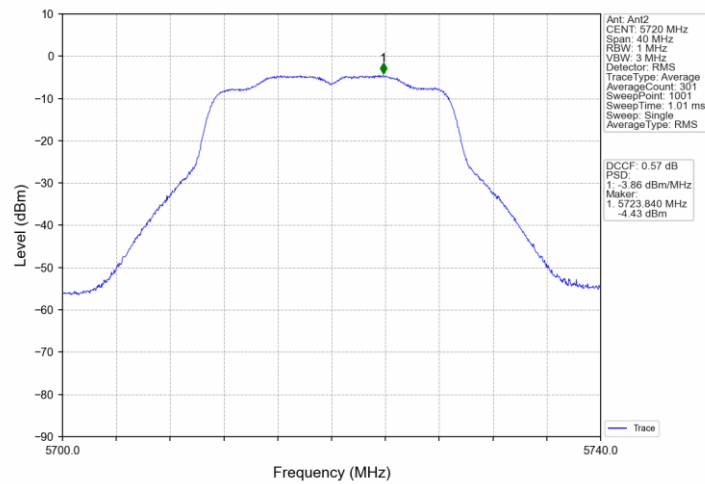


802.11n(HT20)_HCH_5720MHz_MIMO_NTNV

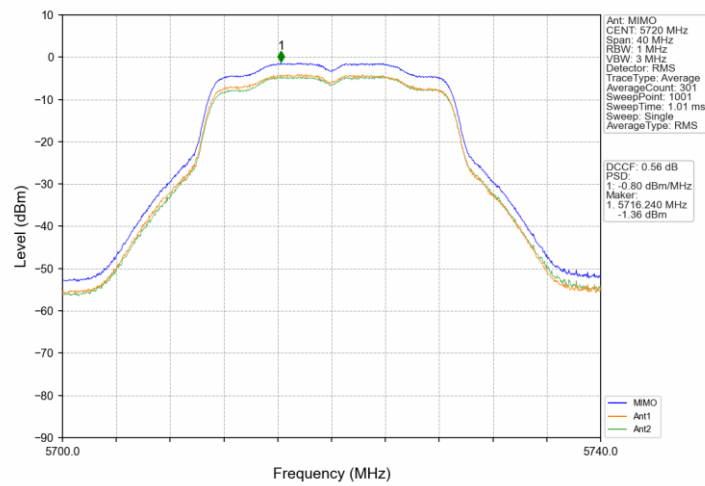


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

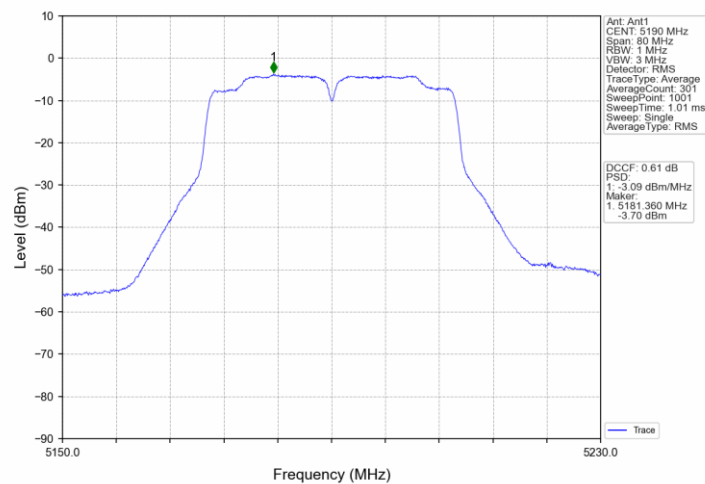


802.11n(HT40)_LCH_5190MHz_Ant2_NTNV

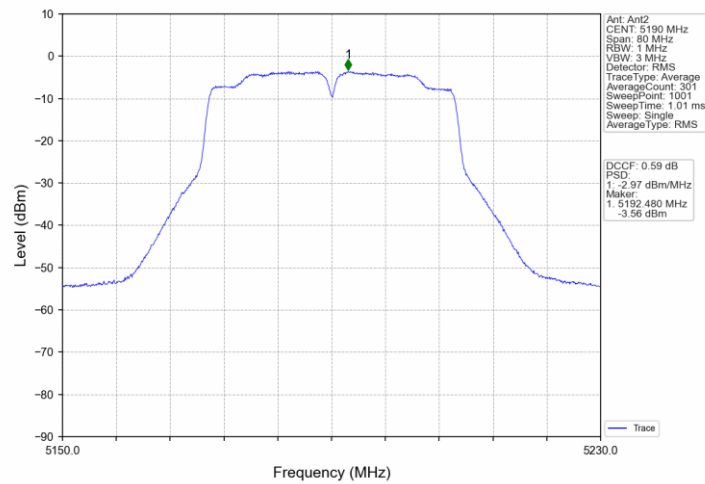


802.11n(HT40)_LCH_5190MHz_MIMO_NTNV

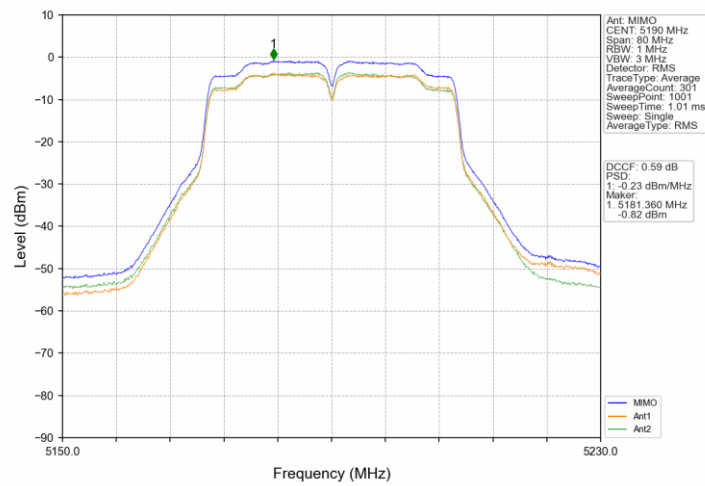


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

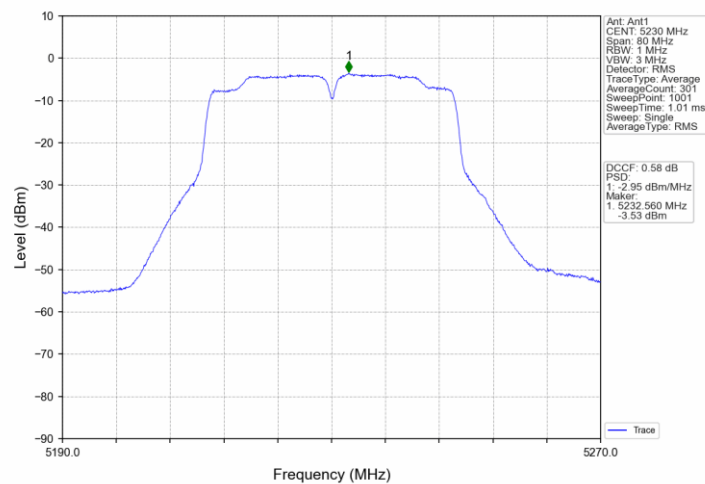

802.11n(HT40)_HCH_5230MHz_Ant2_NTNV

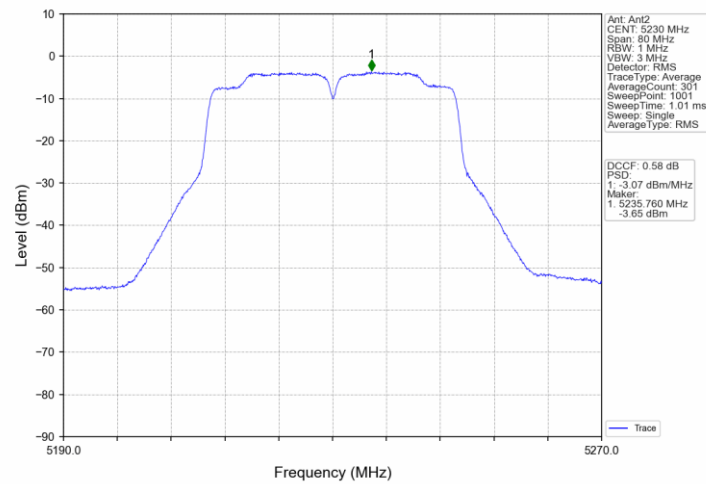

802.11n(HT40)_HCH_5230MHz_MIMO_NTNV

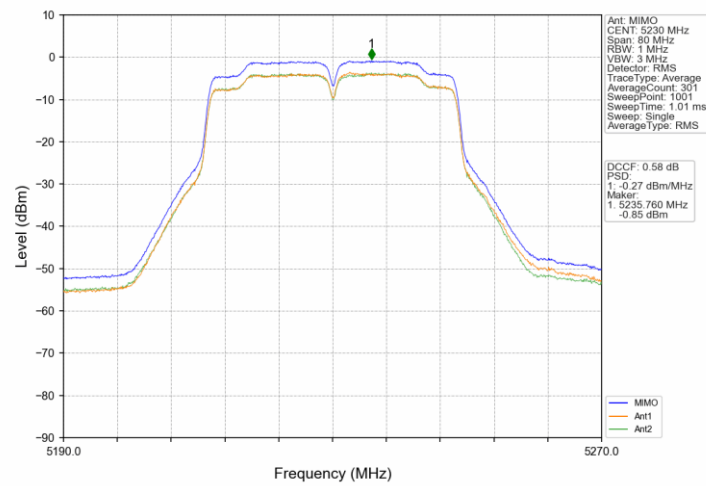

802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

