




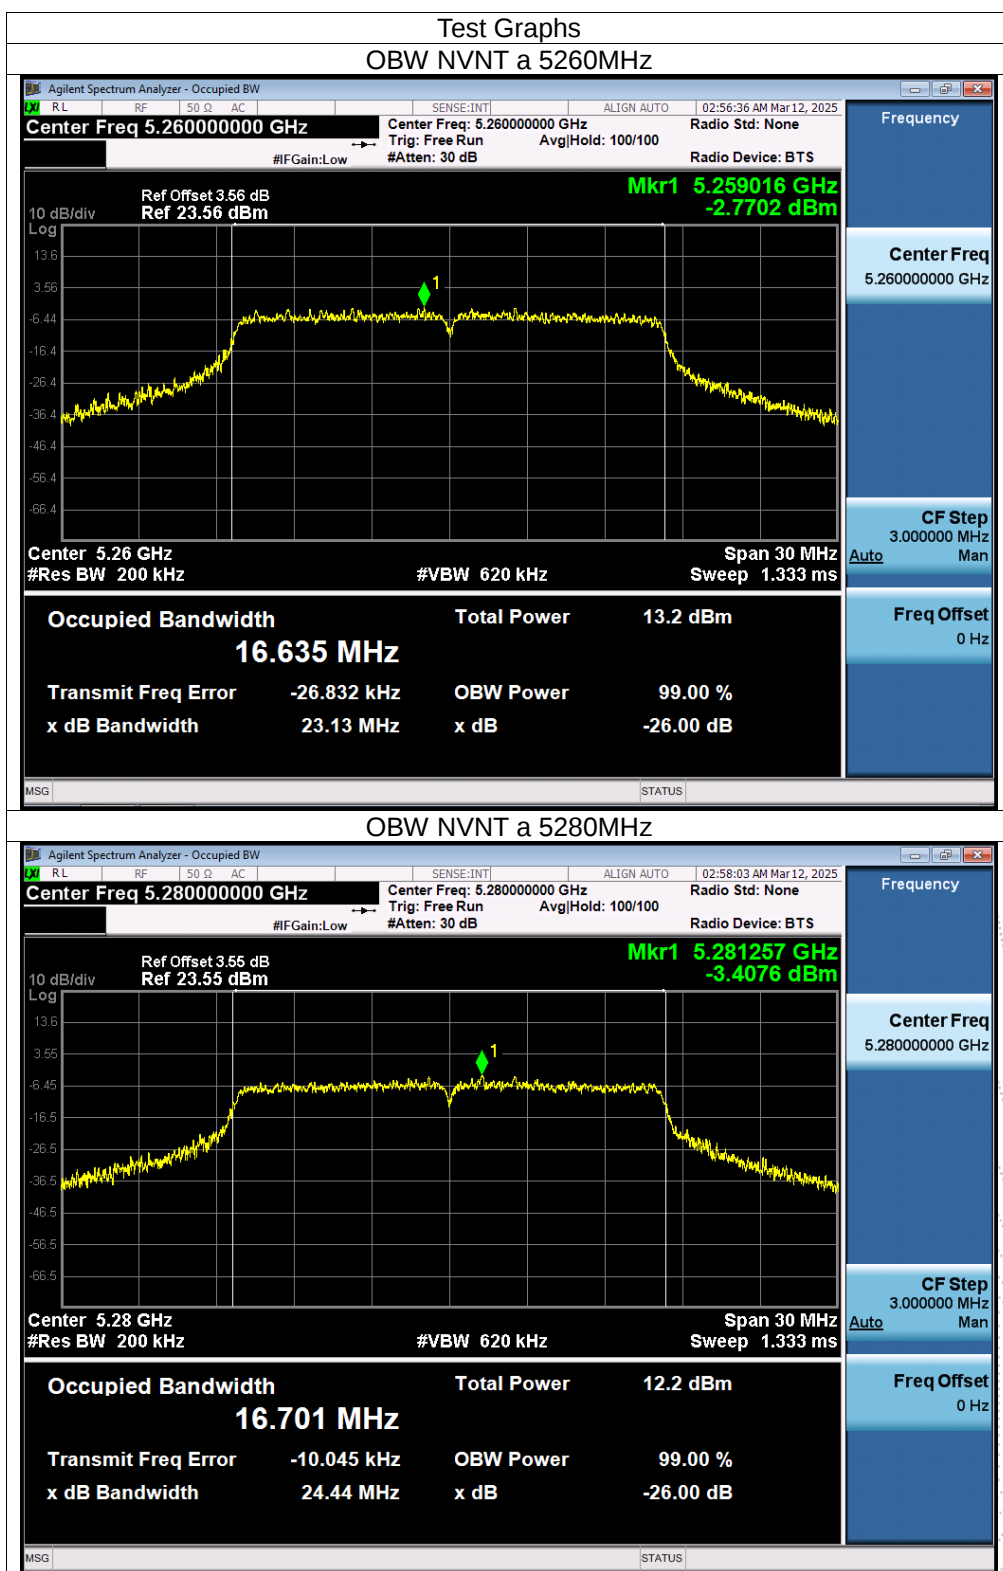
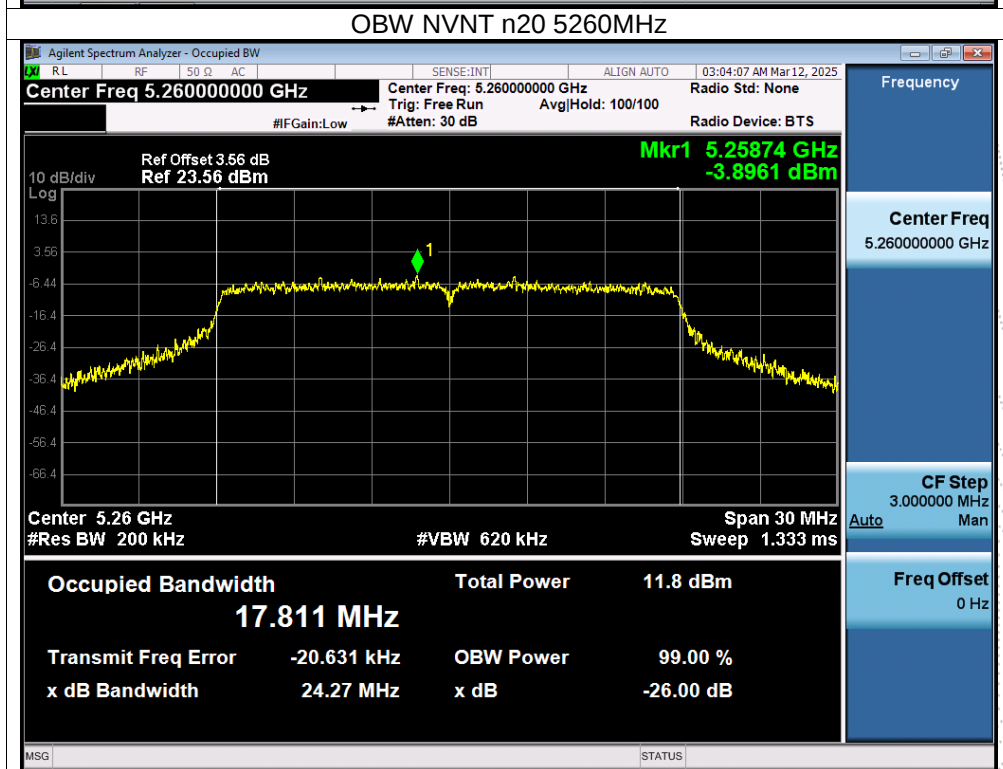
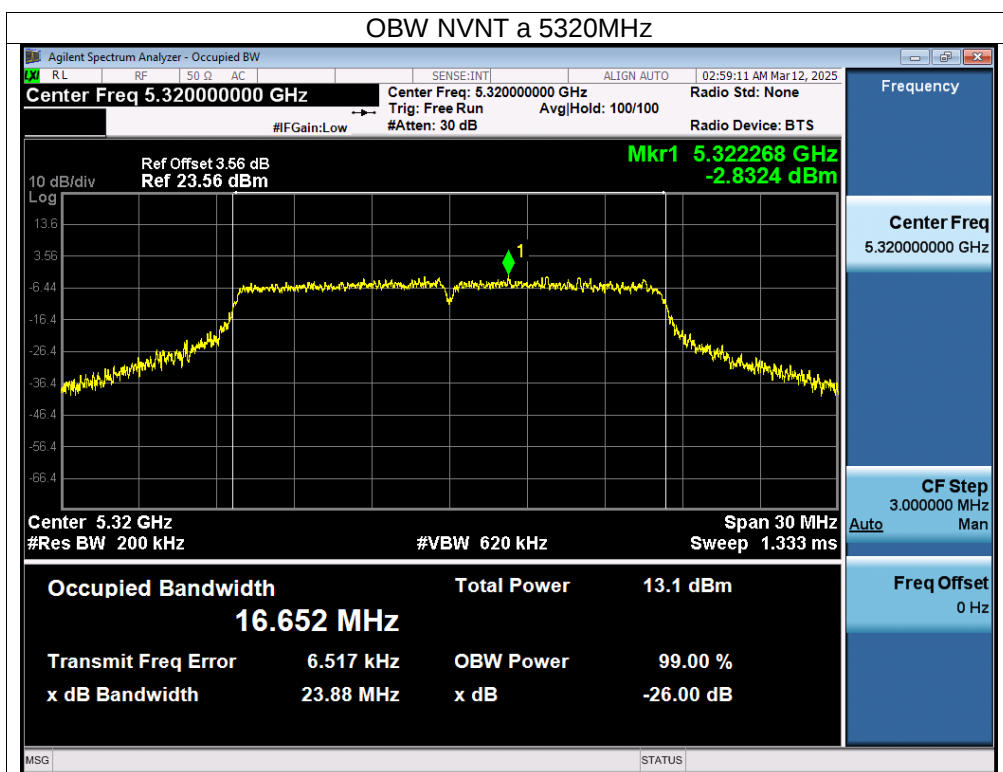
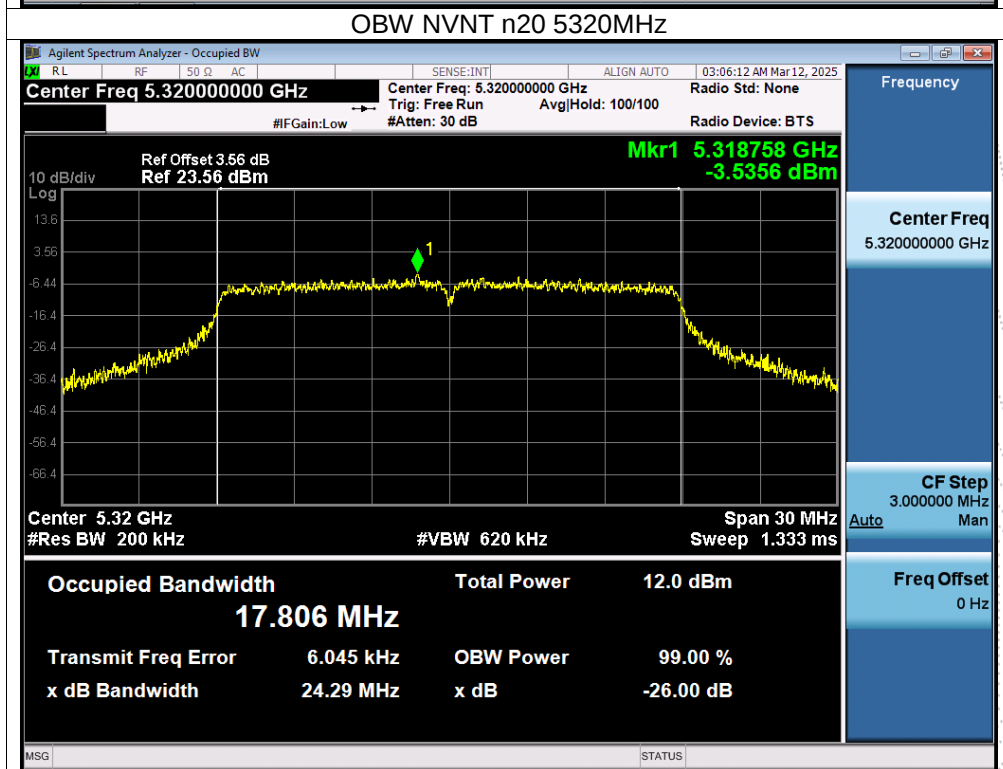


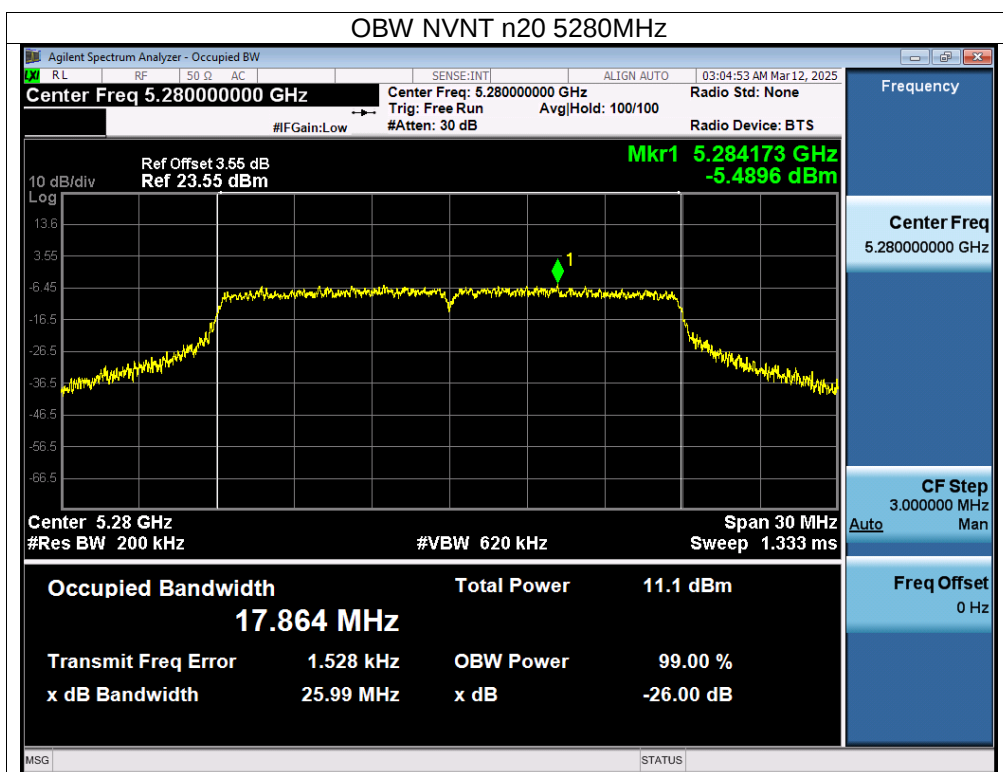



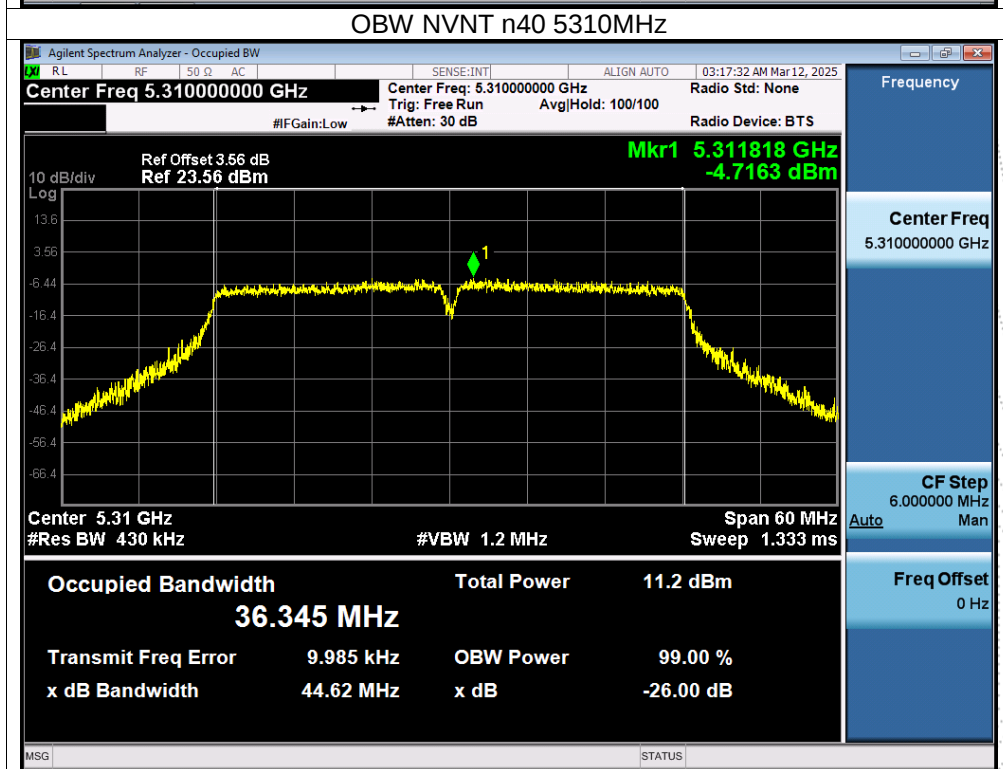


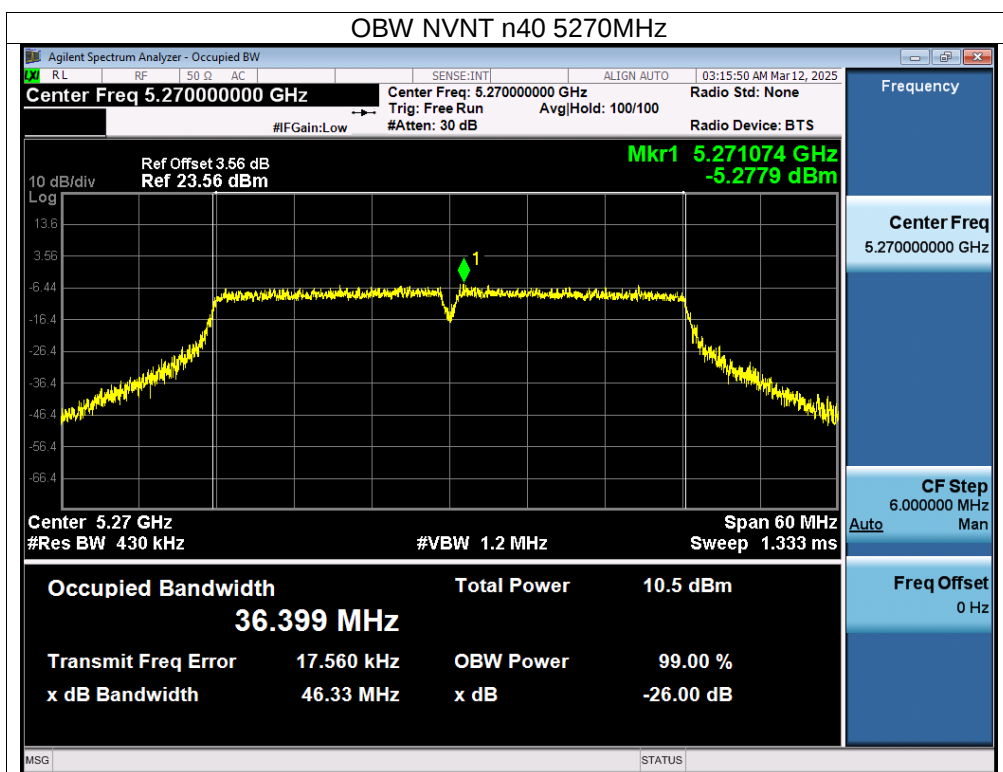


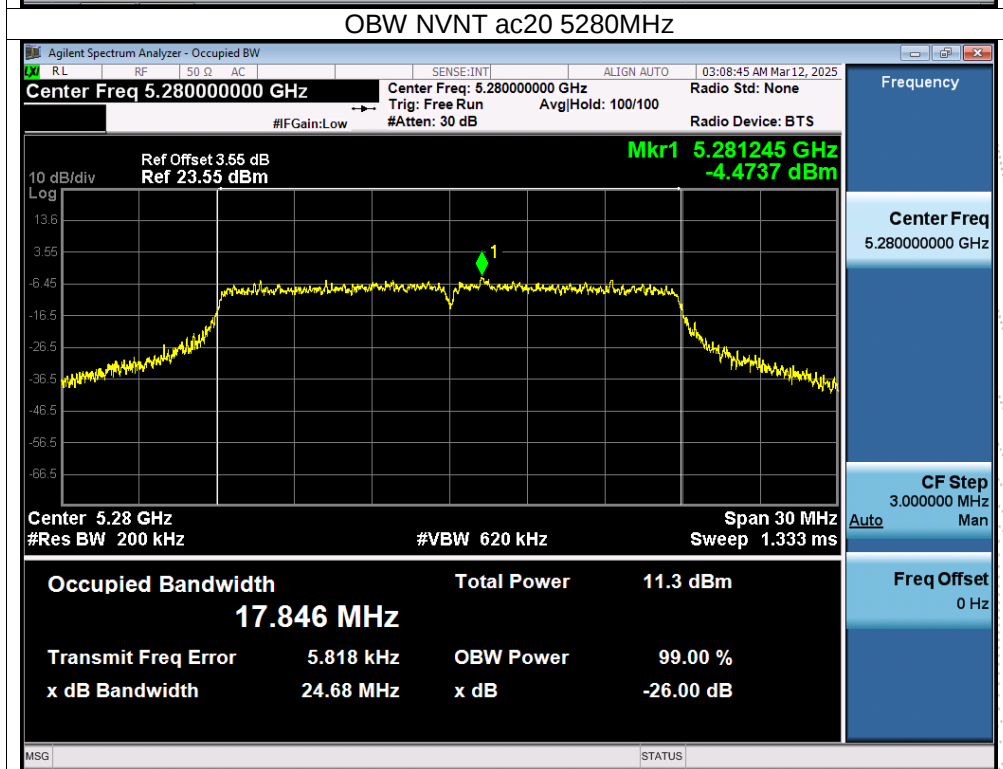



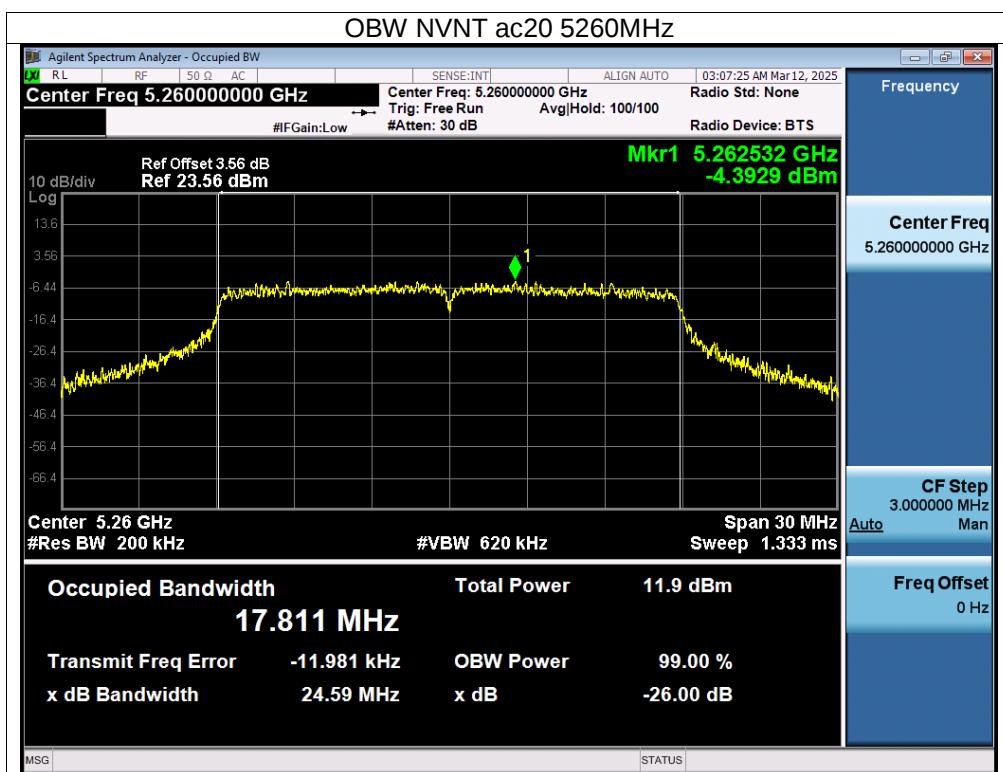


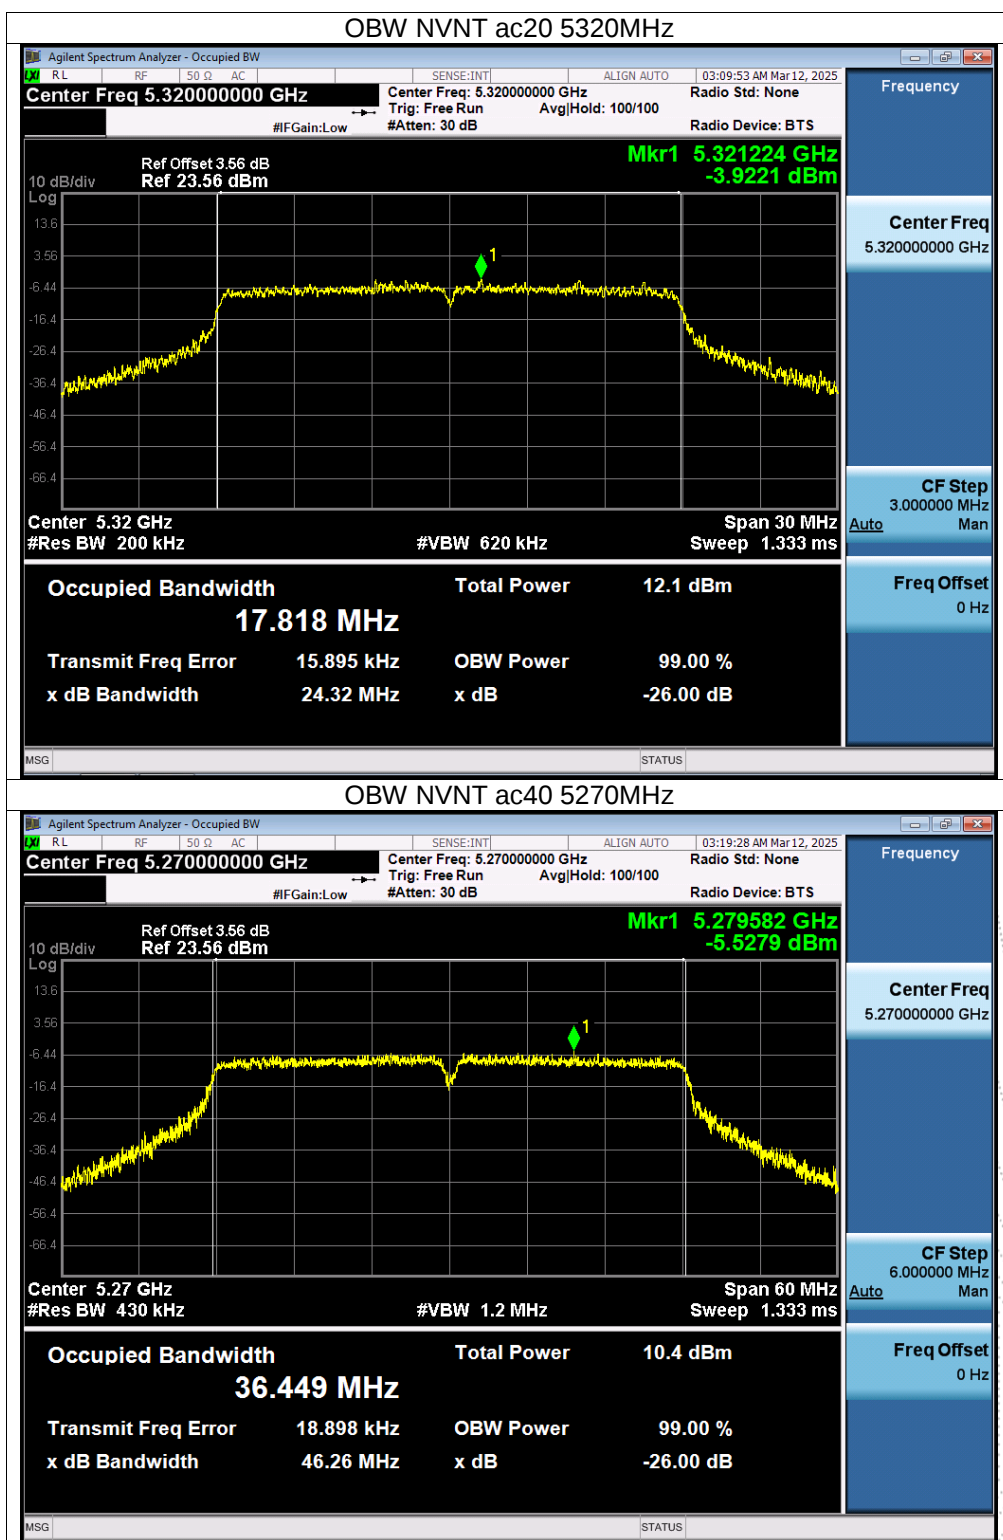

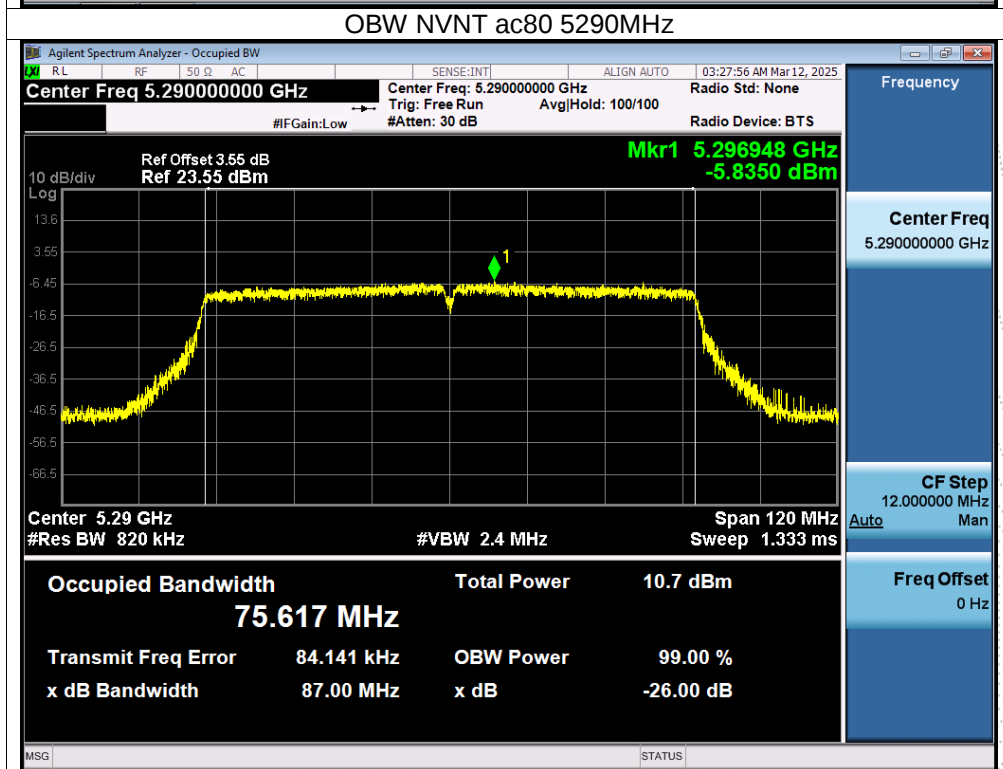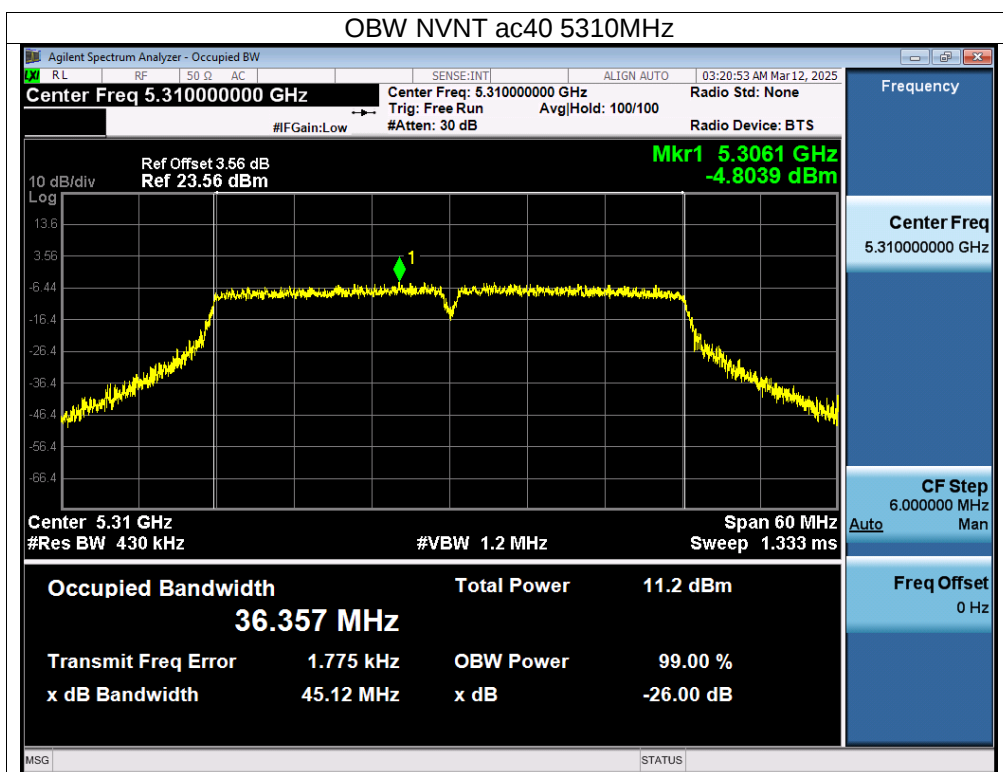

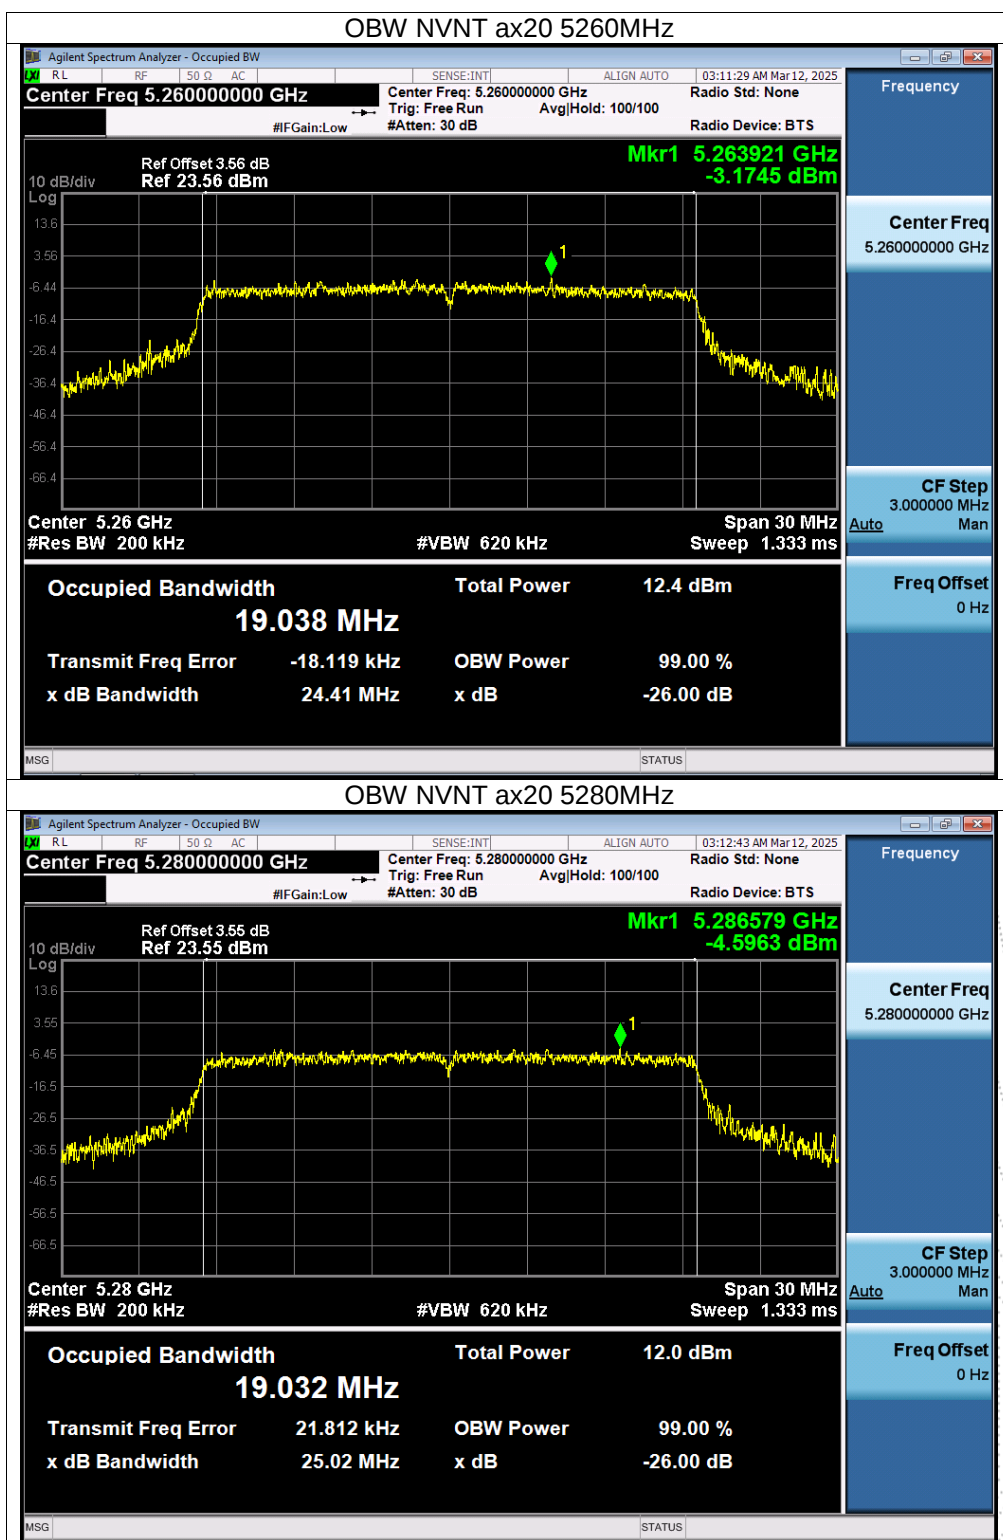

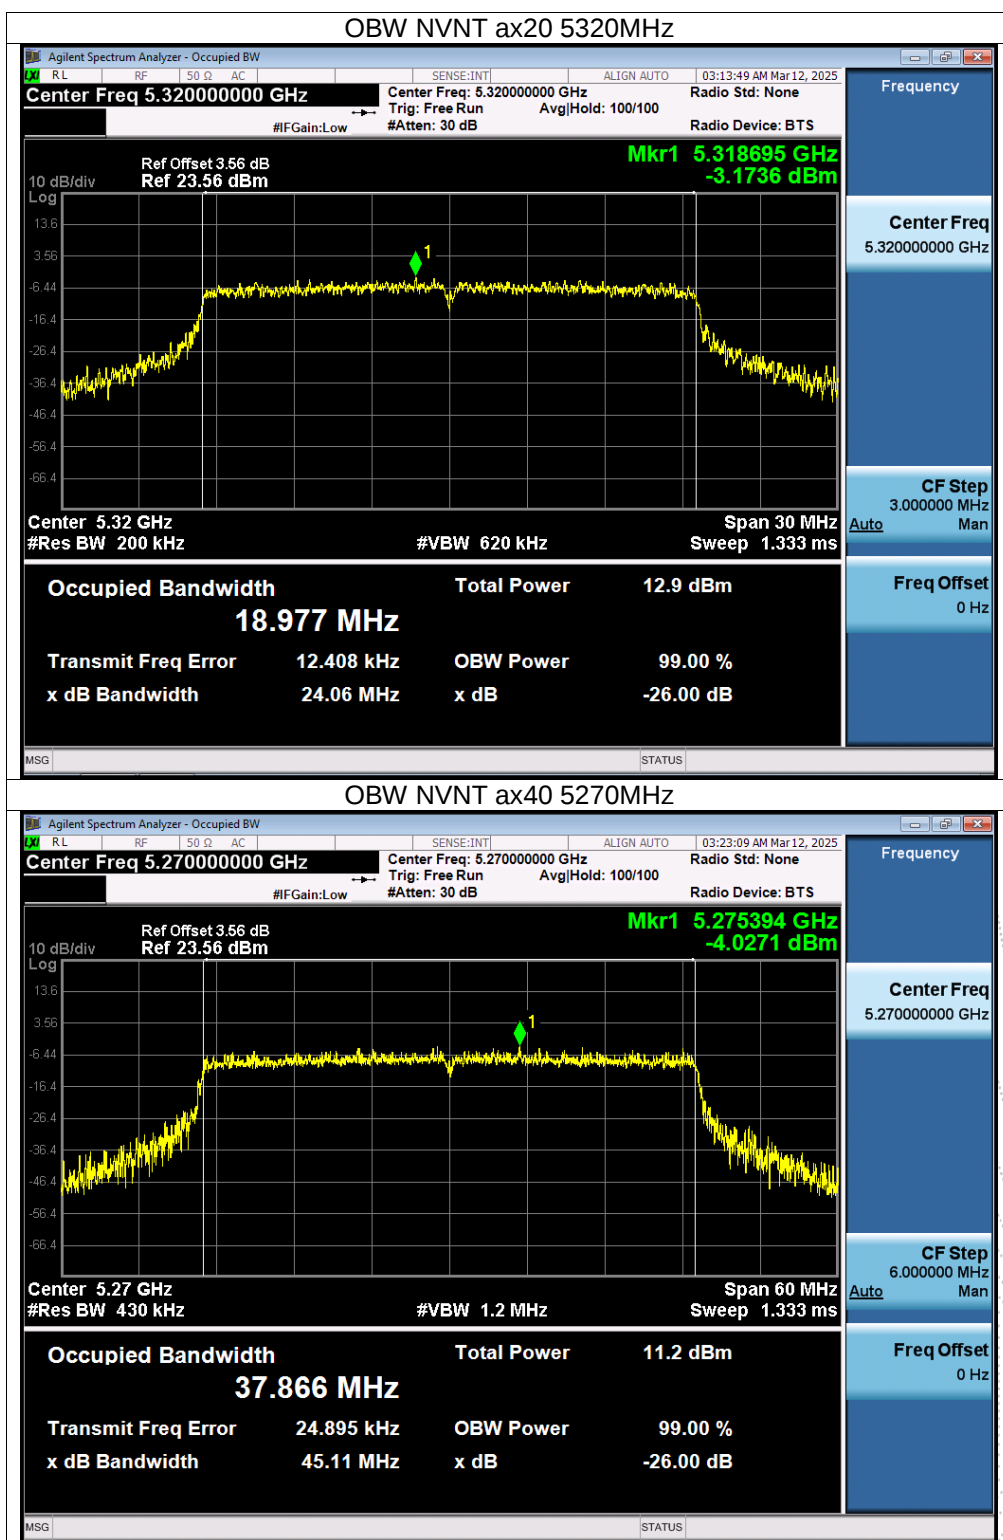


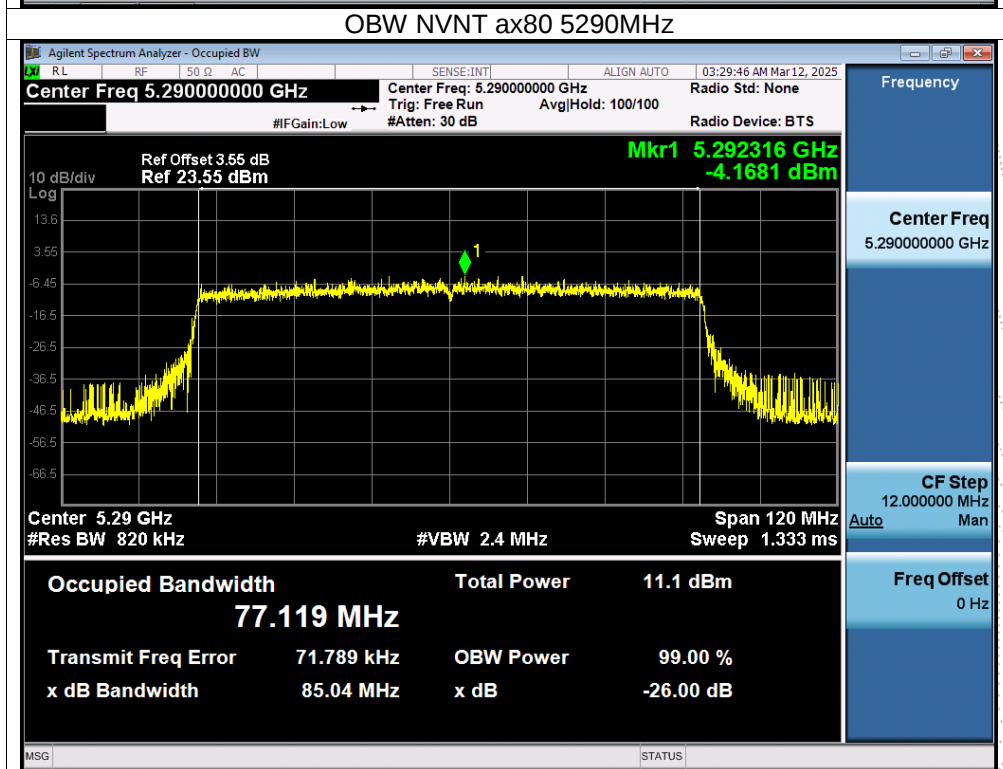
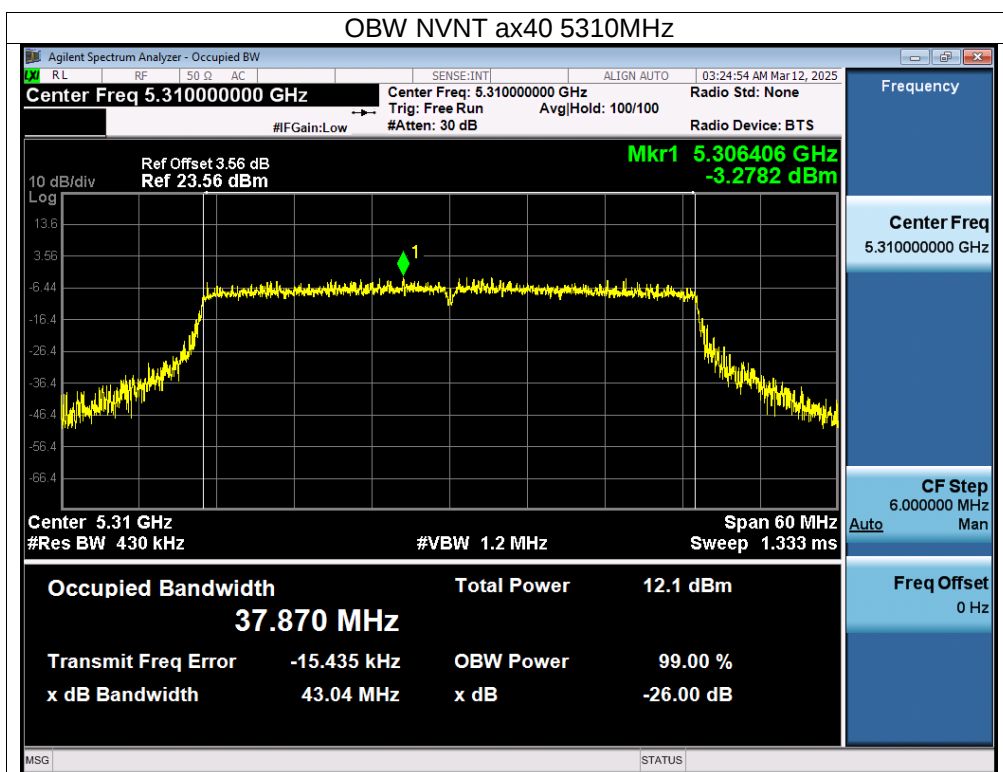




Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	(5500-5700MHz)		



Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-26dB bandwidth (MHz)	Result
NVNT	a	5500	24.050	16.754	Pass
NVNT	a	5580	24.117	16.753	Pass
NVNT	a	5700	25.014	16.769	Pass
NVNT	n20	5500	25.503	17.896	Pass
NVNT	n20	5580	25.030	17.987	Pass
NVNT	n20	5700	24.566	17.960	Pass
NVNT	n40	5510	46.506	36.562	Pass
NVNT	n40	5550	45.866	36.533	Pass
NVNT	n40	5670	46.358	36.599	Pass
NVNT	ac20	5500	25.520	17.945	Pass
NVNT	ac20	5580	26.490	17.940	Pass
NVNT	ac20	5700	25.982	17.981	Pass
NVNT	ac40	5510	46.574	36.549	Pass
NVNT	ac40	5550	46.677	36.528	Pass
NVNT	ac40	5670	47.478	36.613	Pass
NVNT	ac80	5530	87.119	75.967	Pass
NVNT	ax20	5500	25.454	19.120	Pass
NVNT	ax20	5580	25.417	19.134	Pass
NVNT	ax20	5700	25.150	19.143	Pass
NVNT	ax40	5510	46.243	37.989	Pass
NVNT	ax40	5550	44.931	37.942	Pass
NVNT	ax40	5670	45.632	37.975	Pass
NVNT	ax80	5530	85.002	77.459	Pass



STING
ED


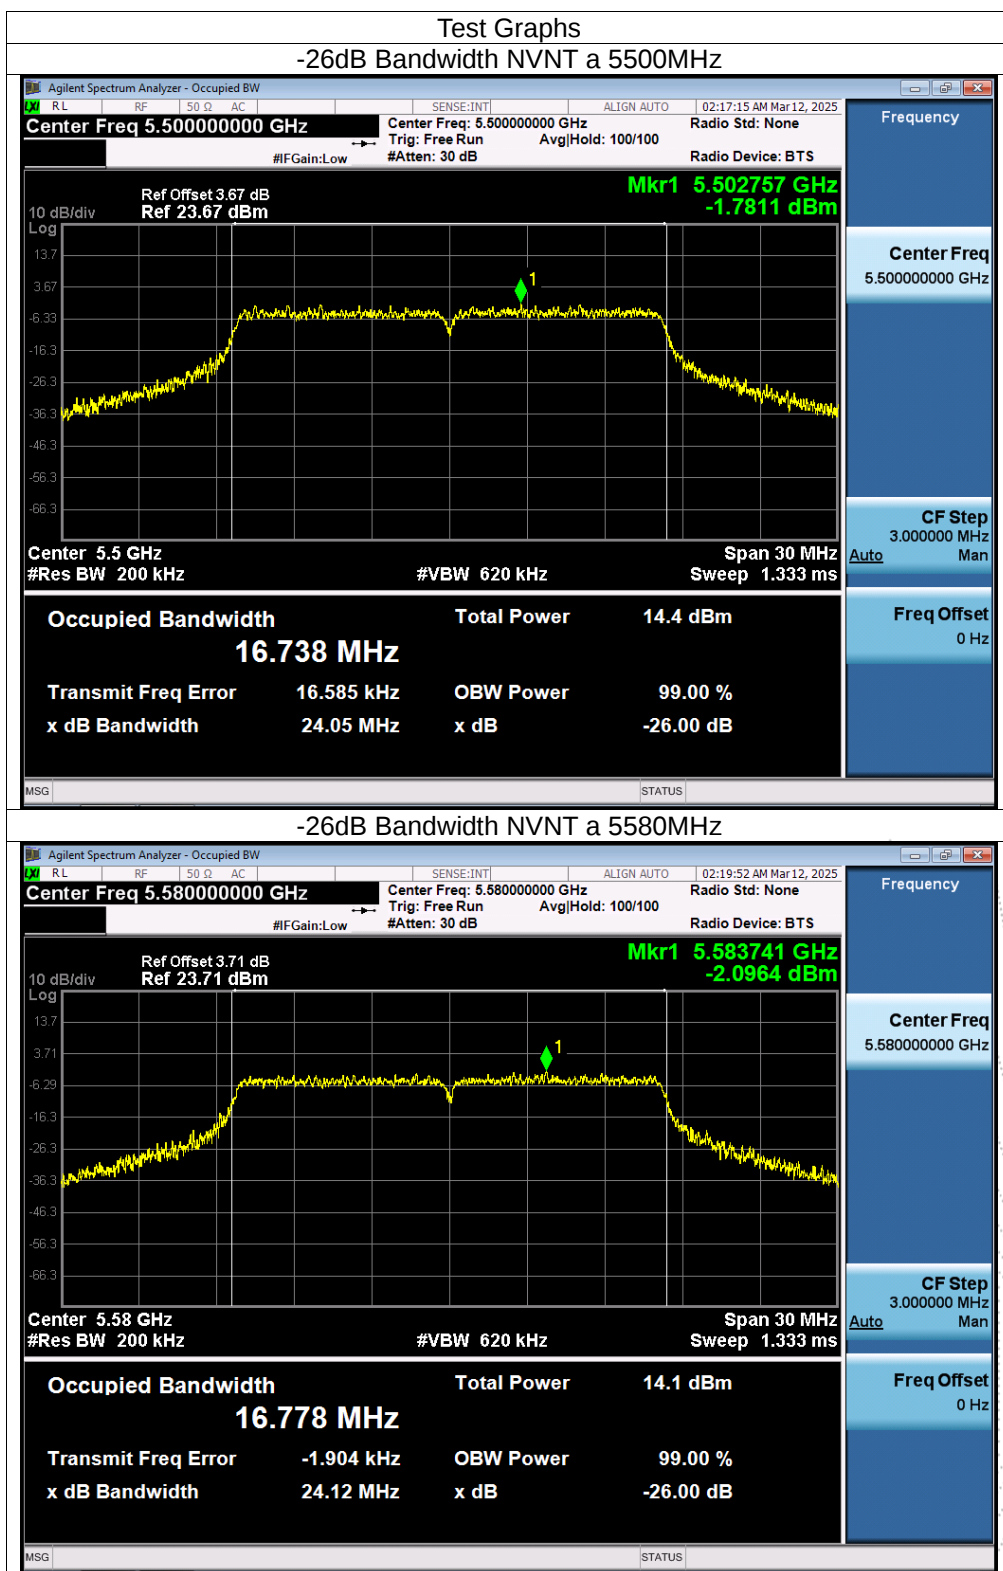


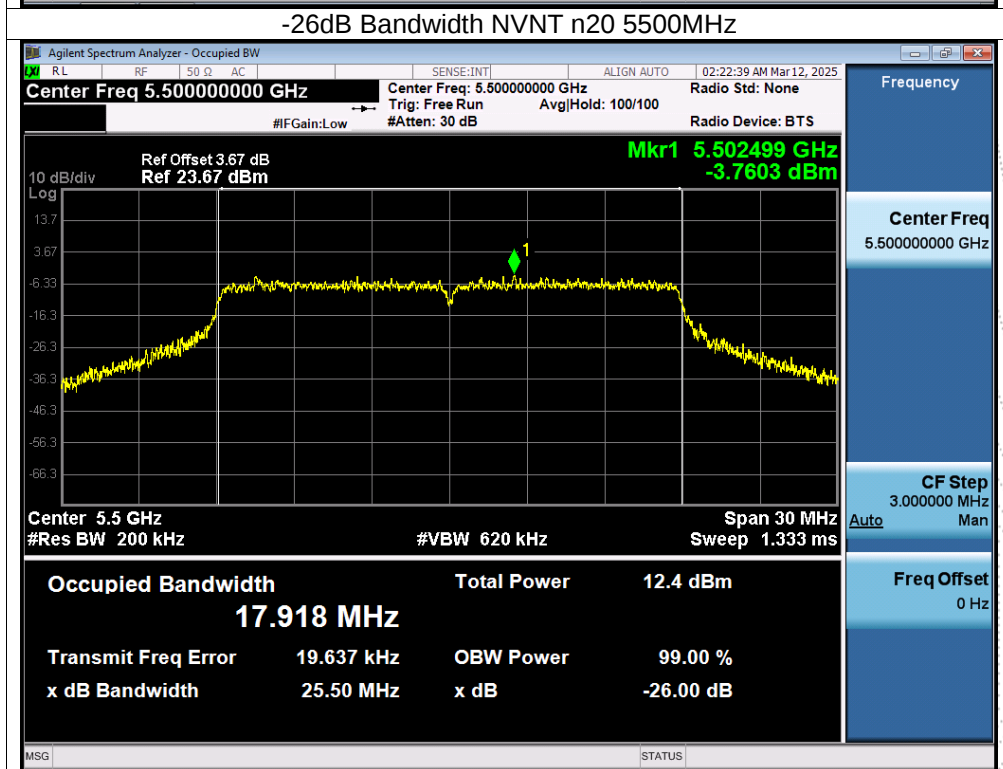
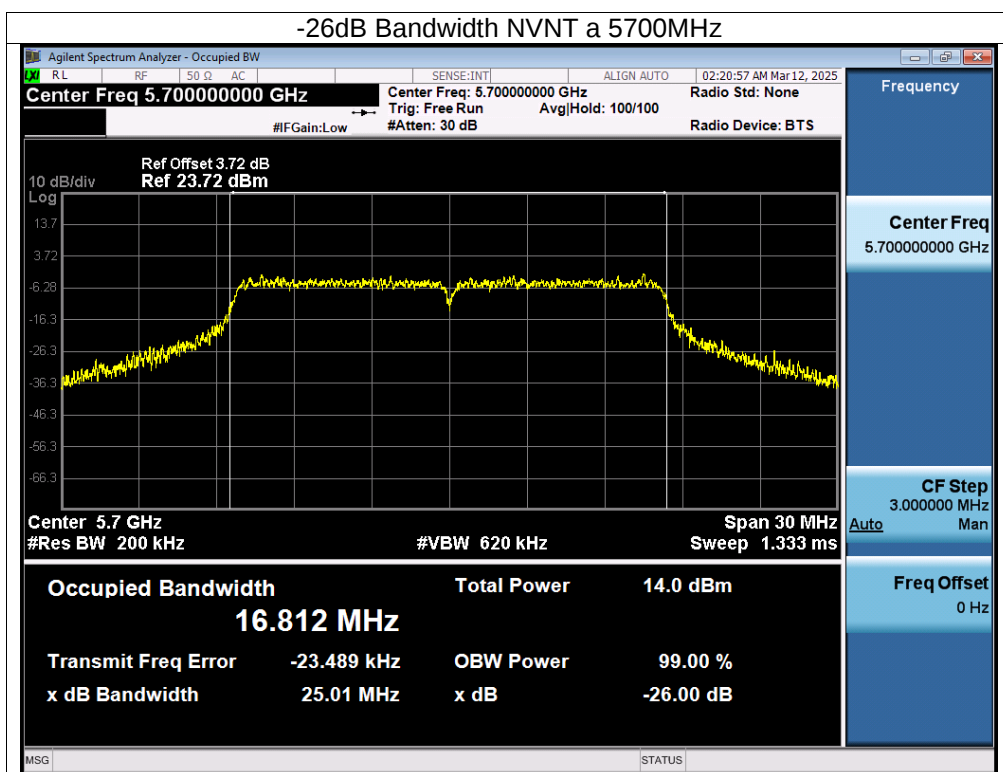


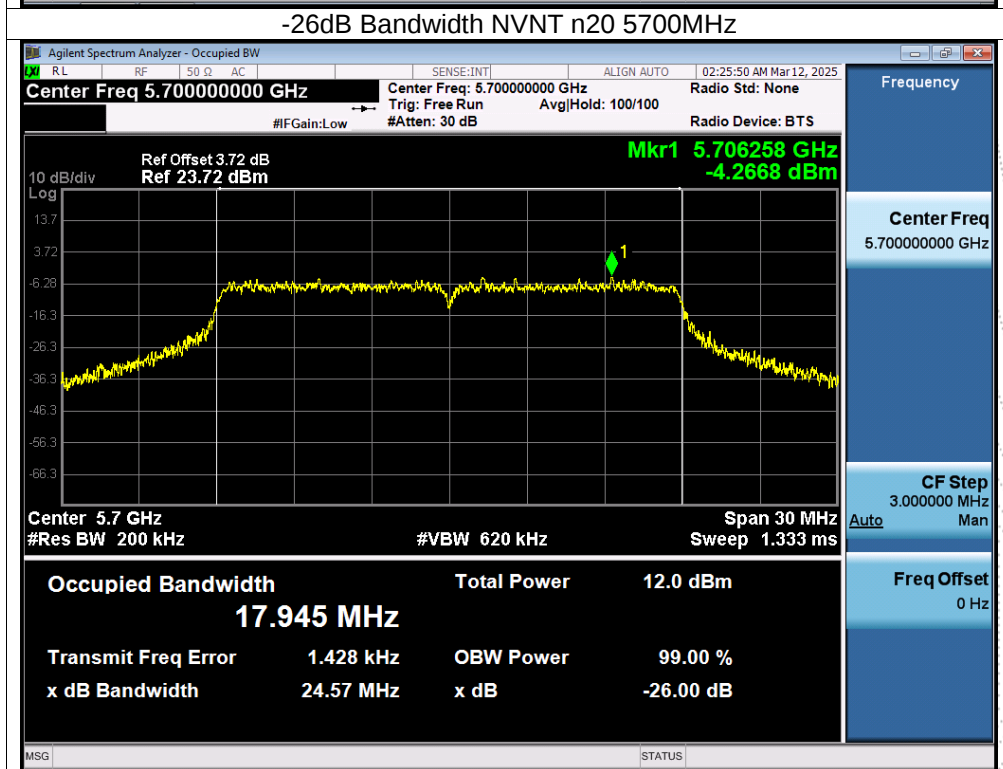
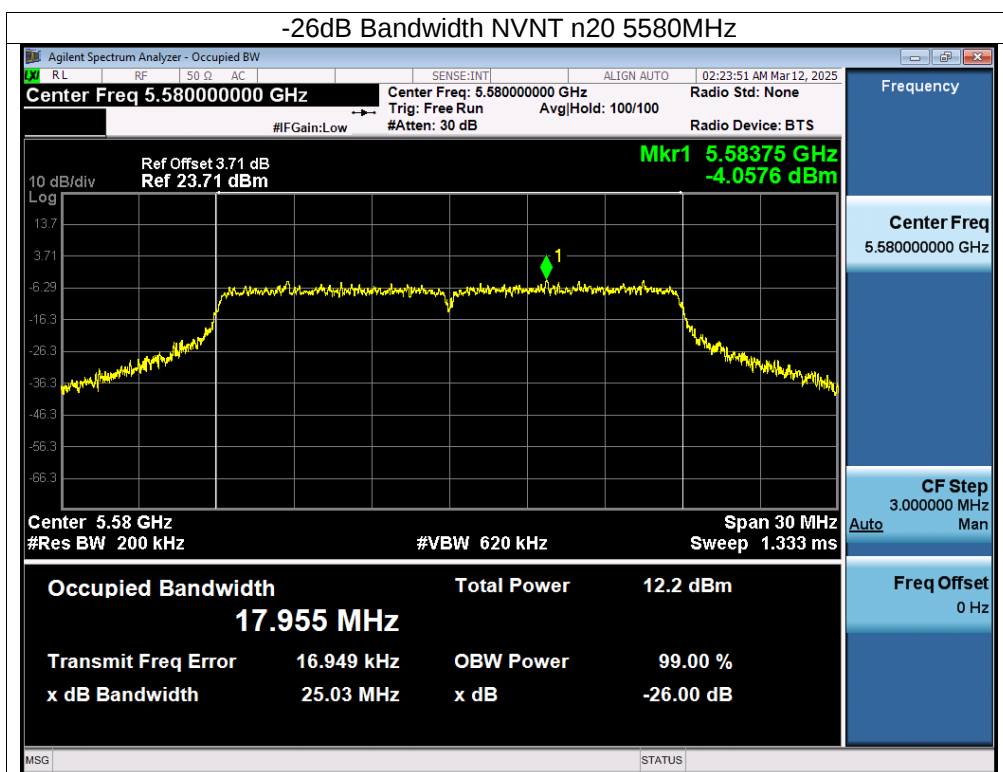


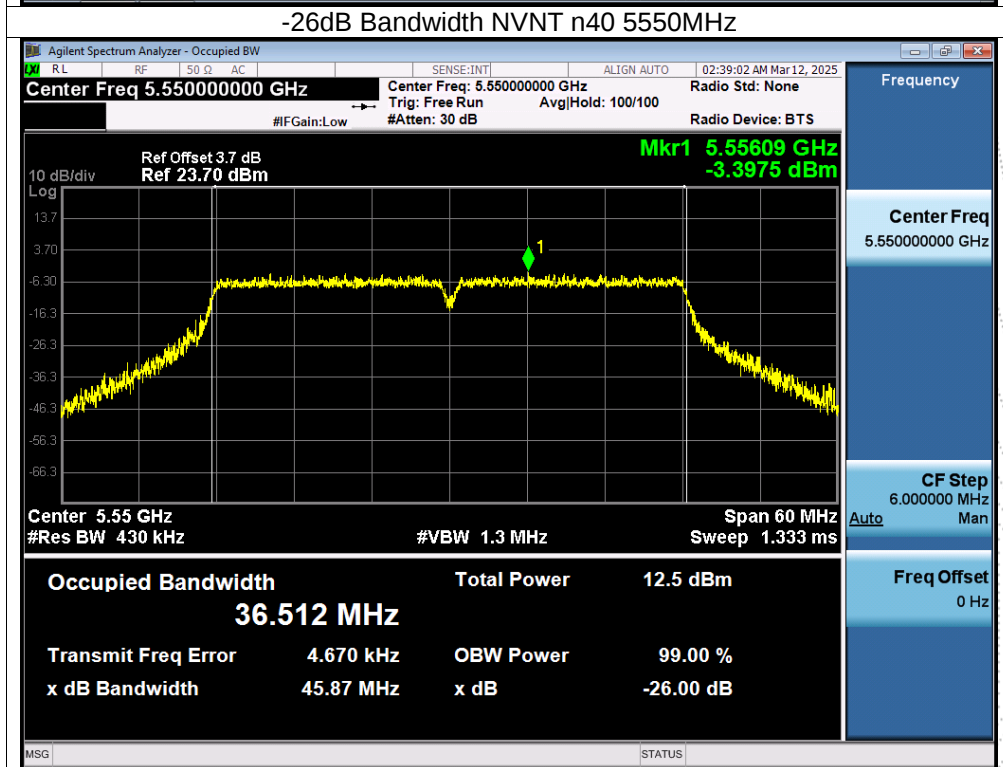
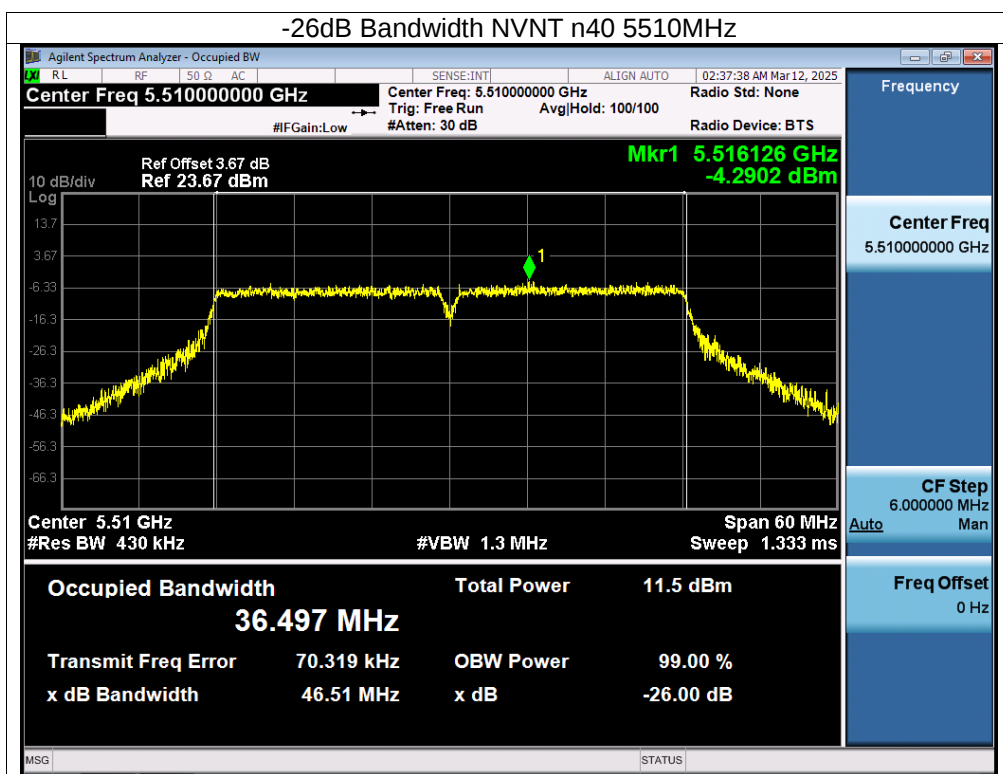


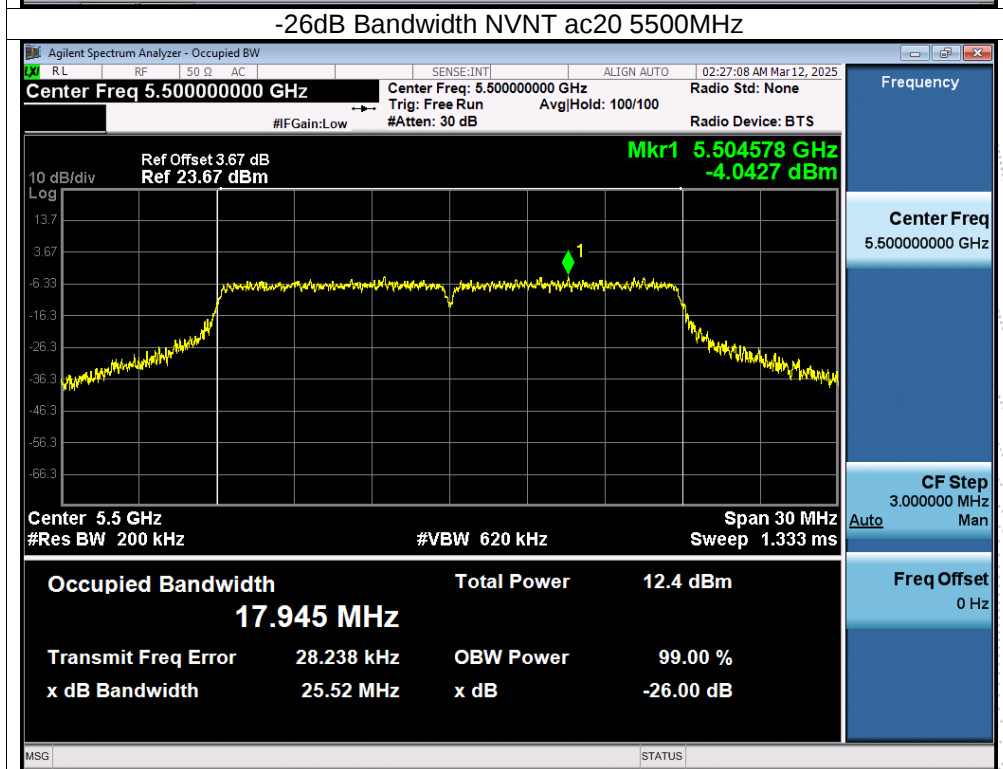
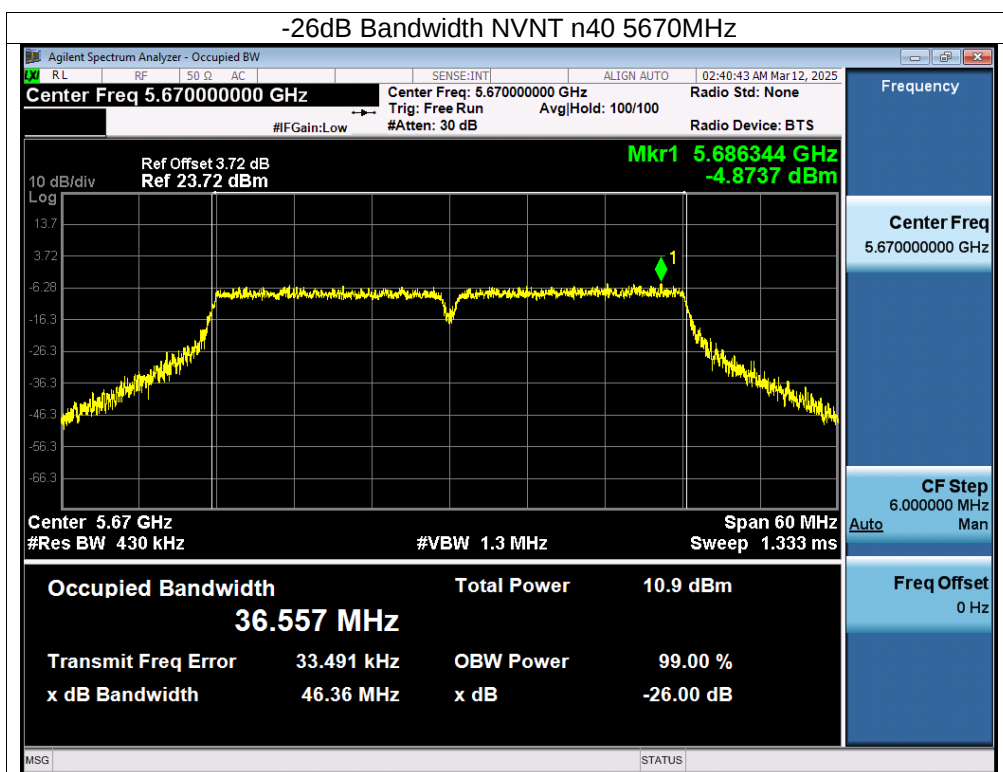


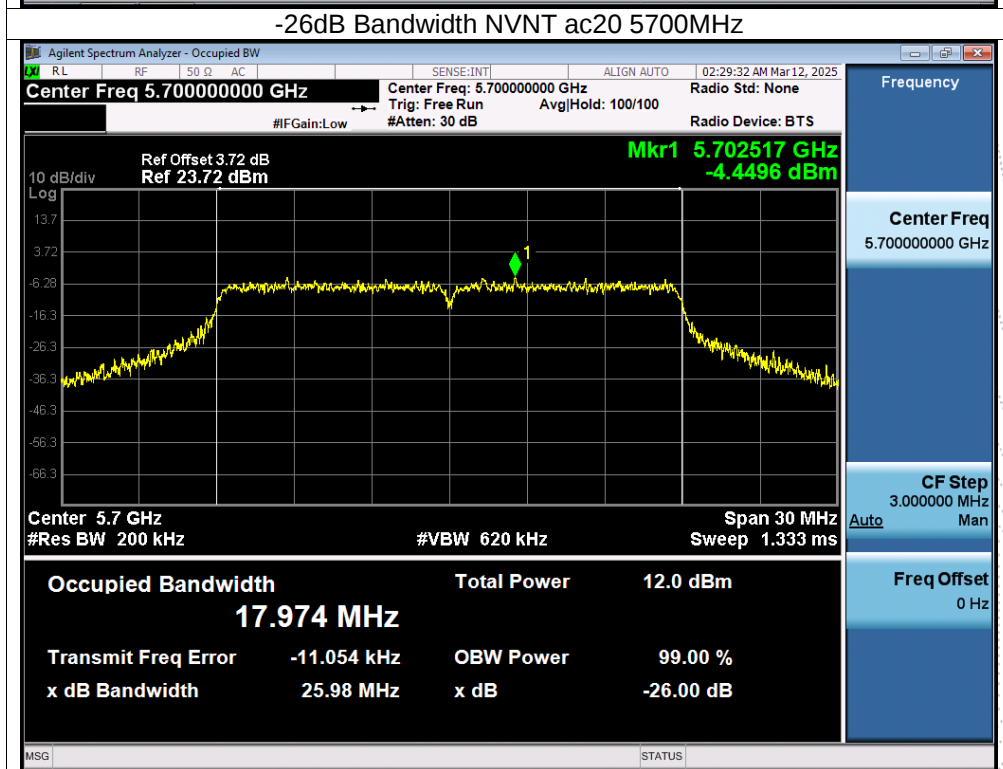
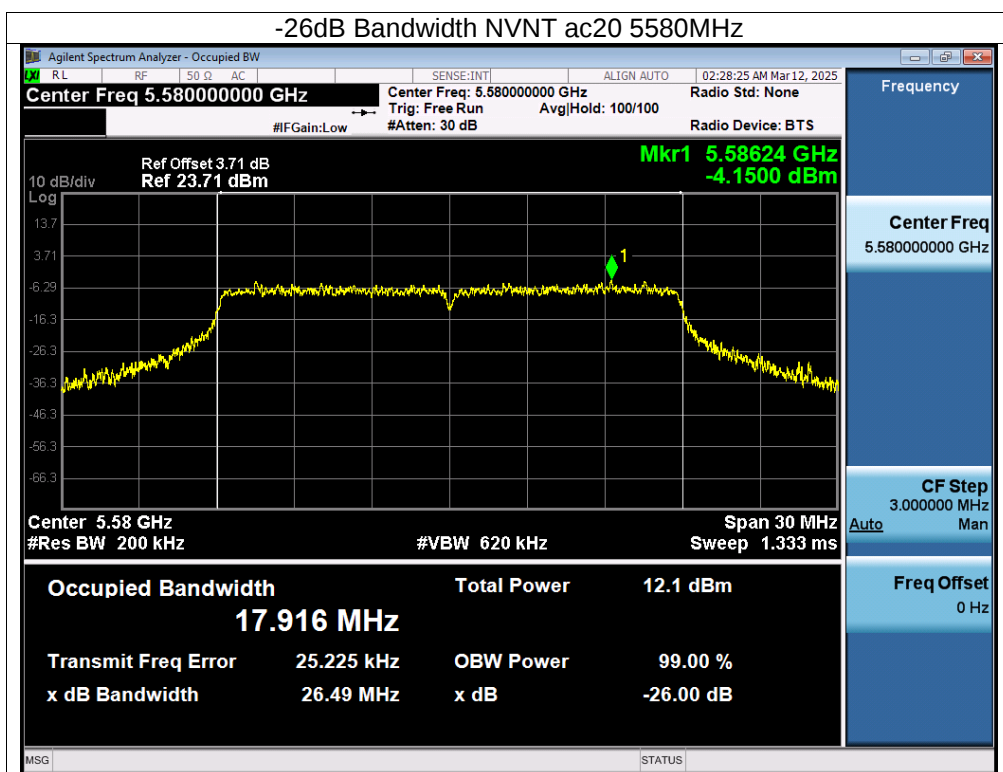


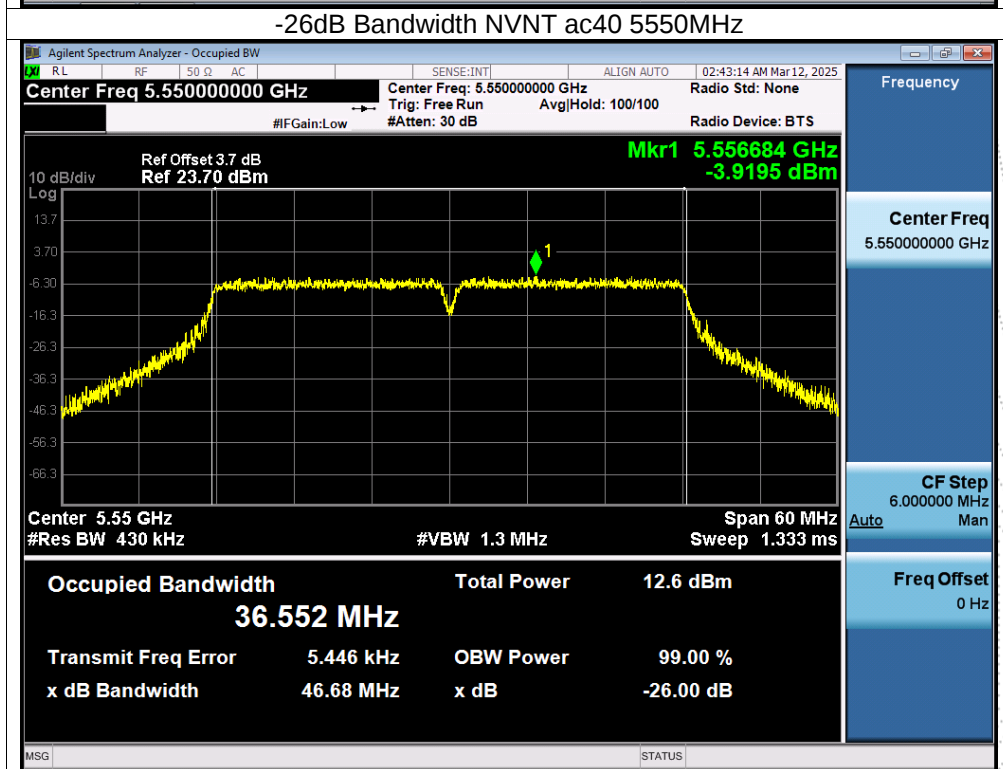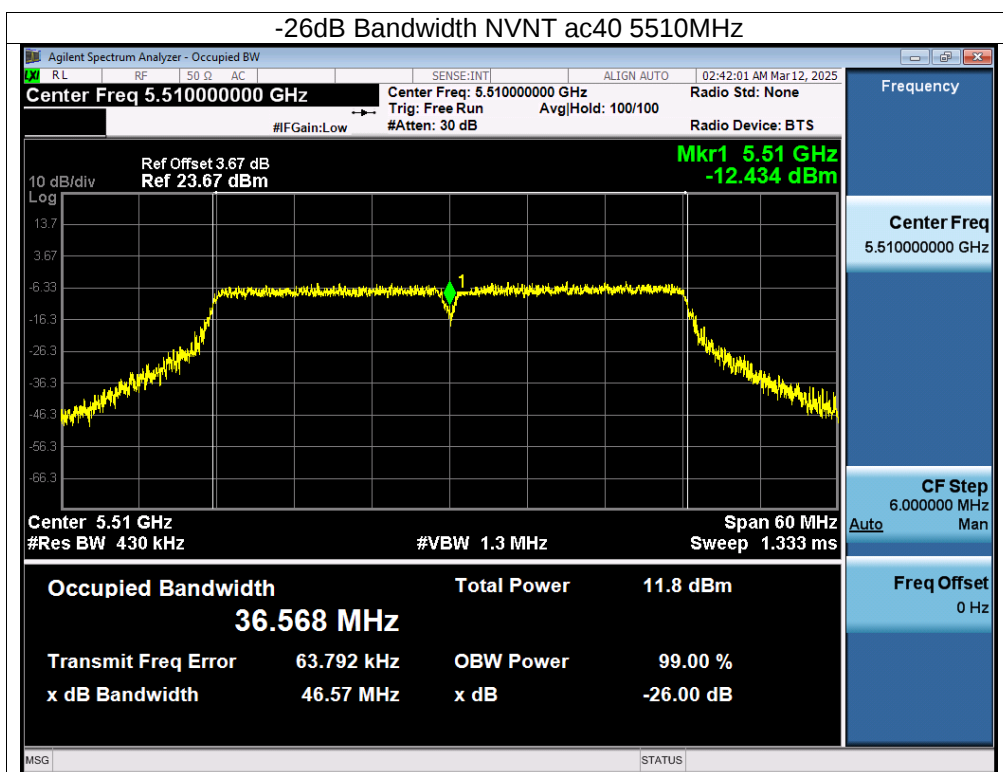


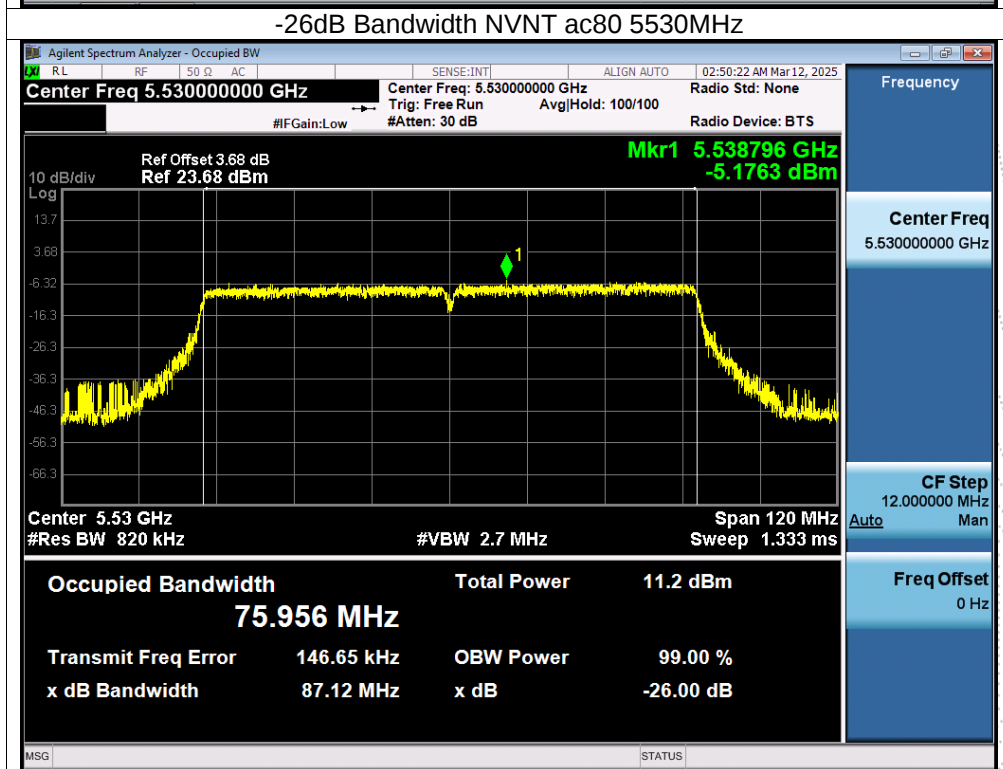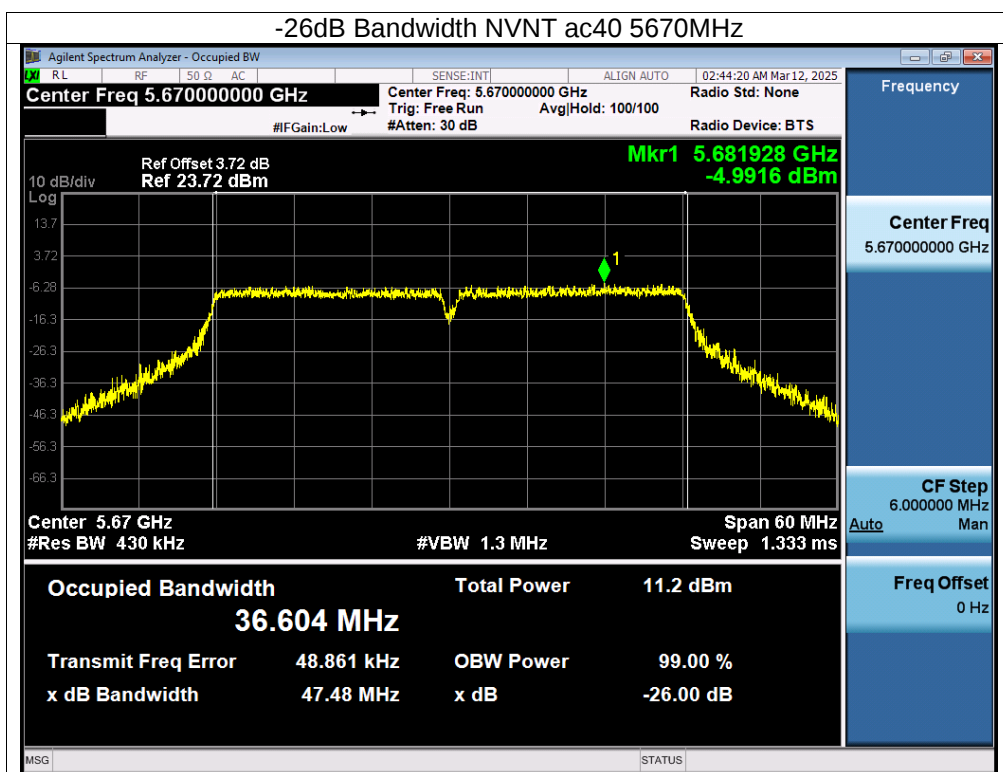


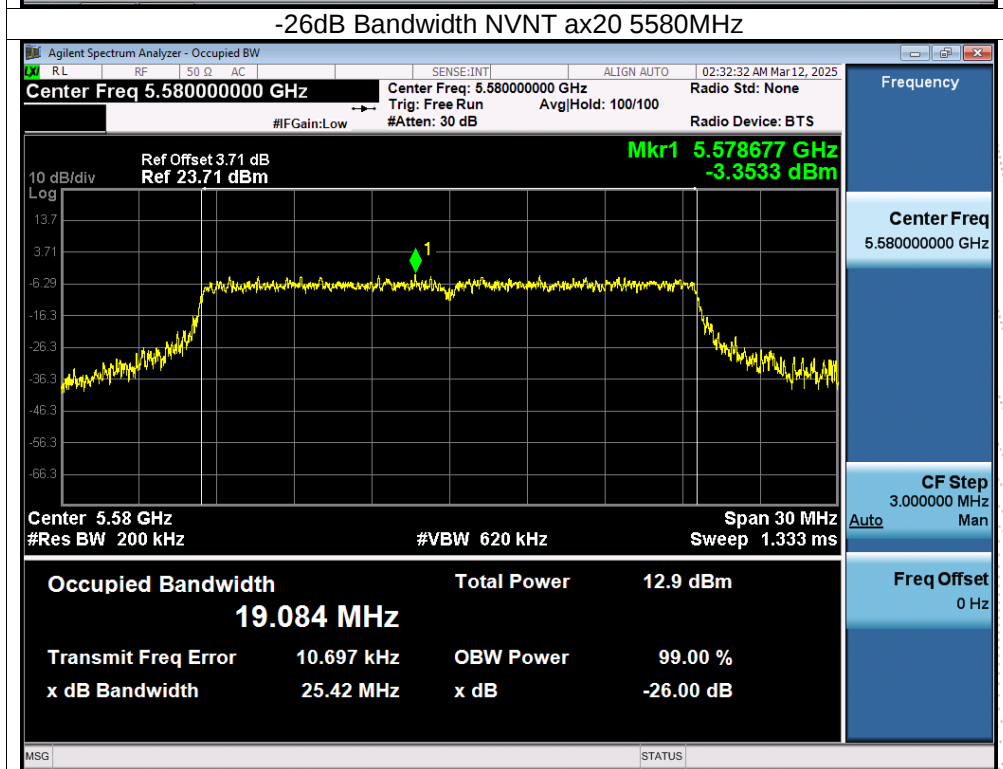
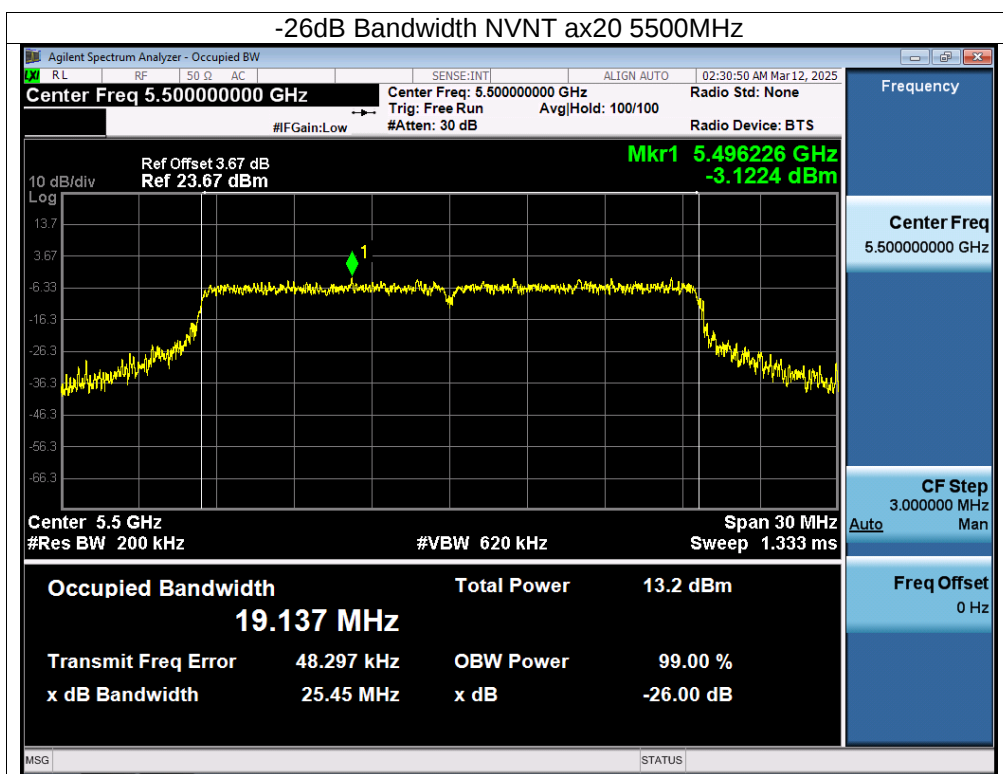


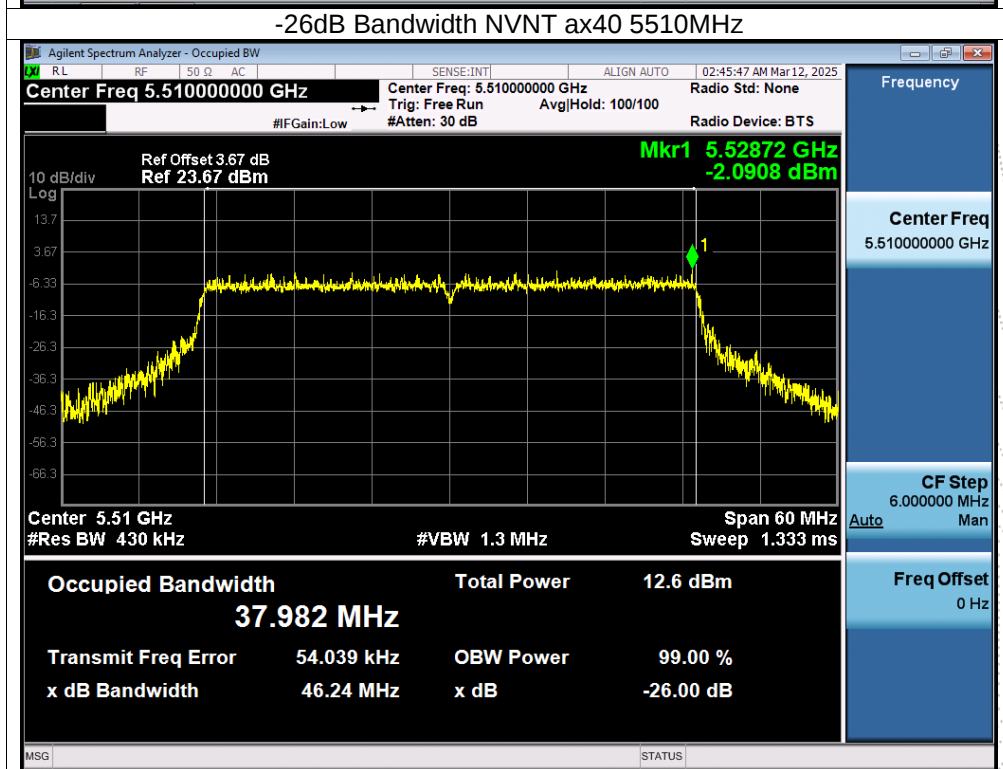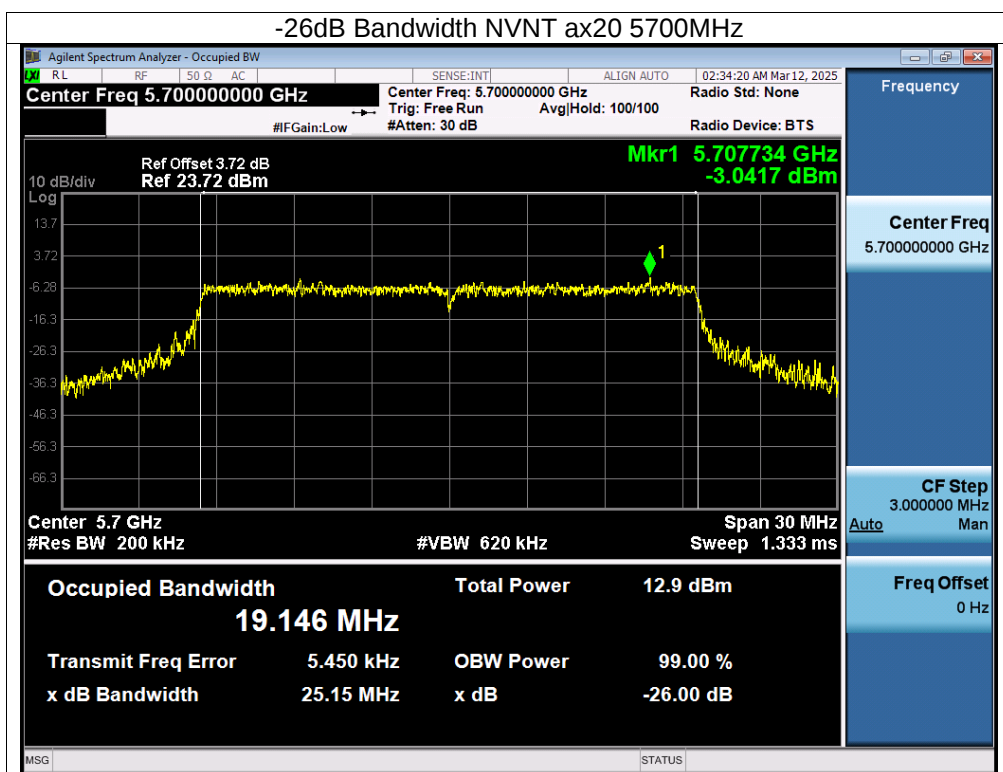


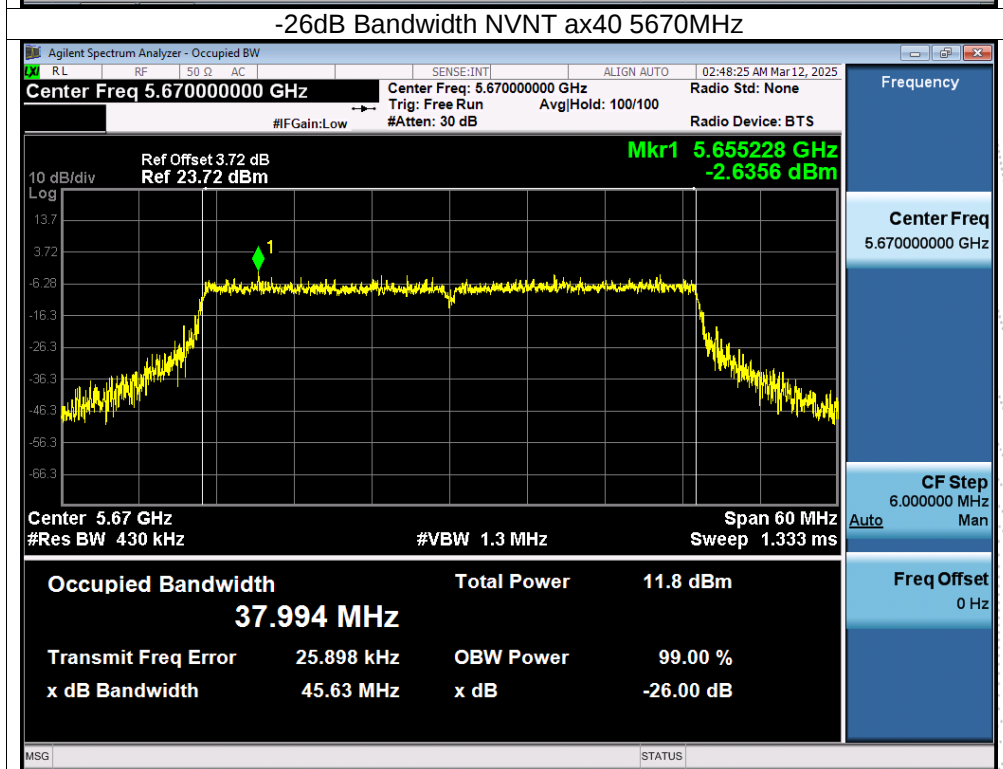
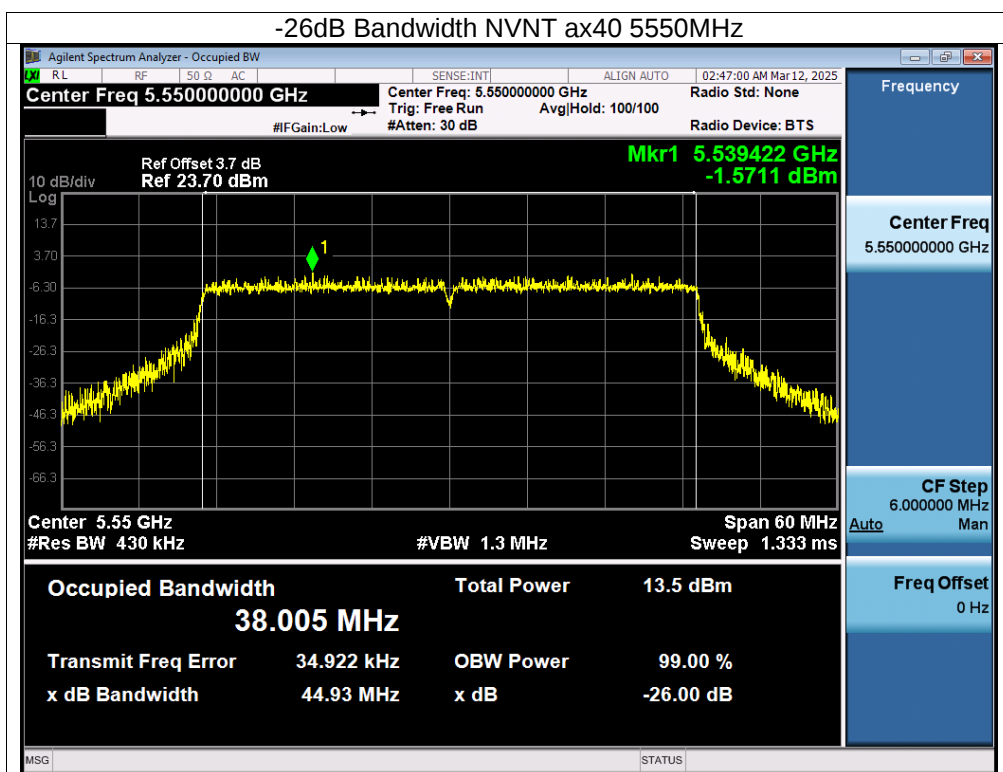



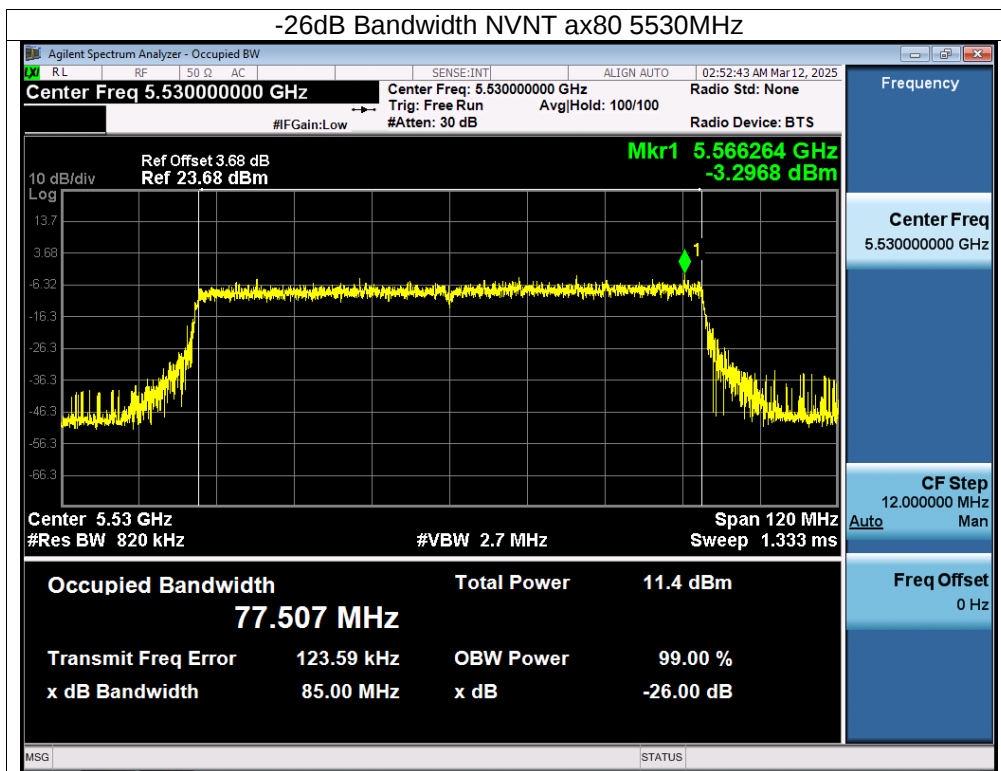



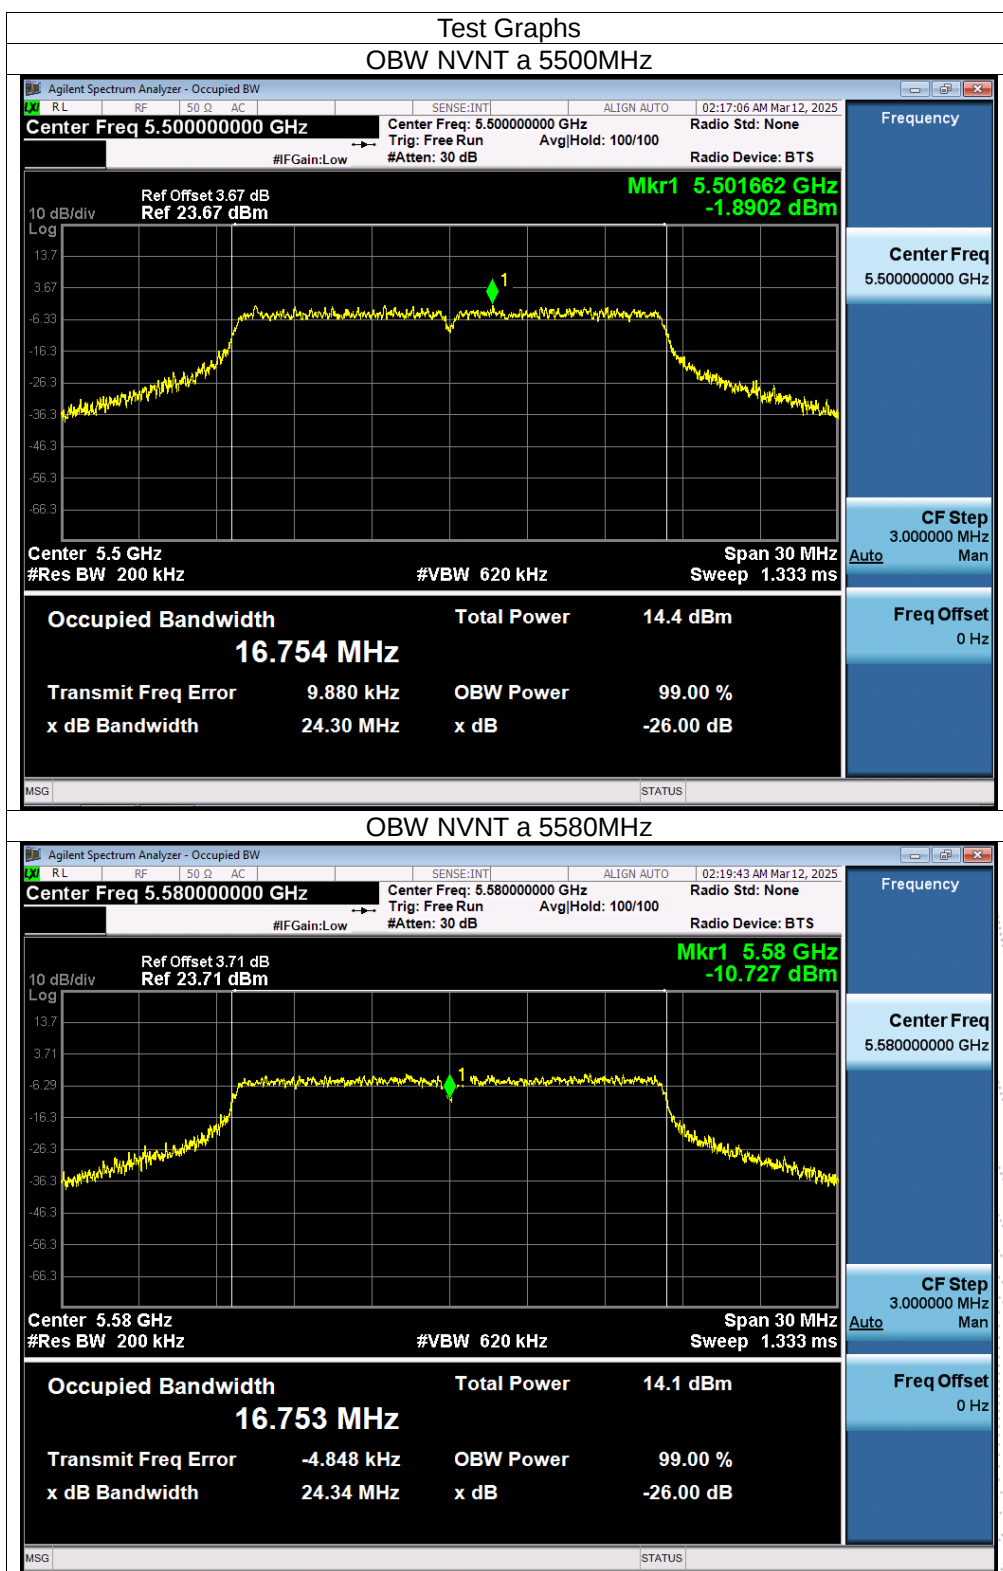


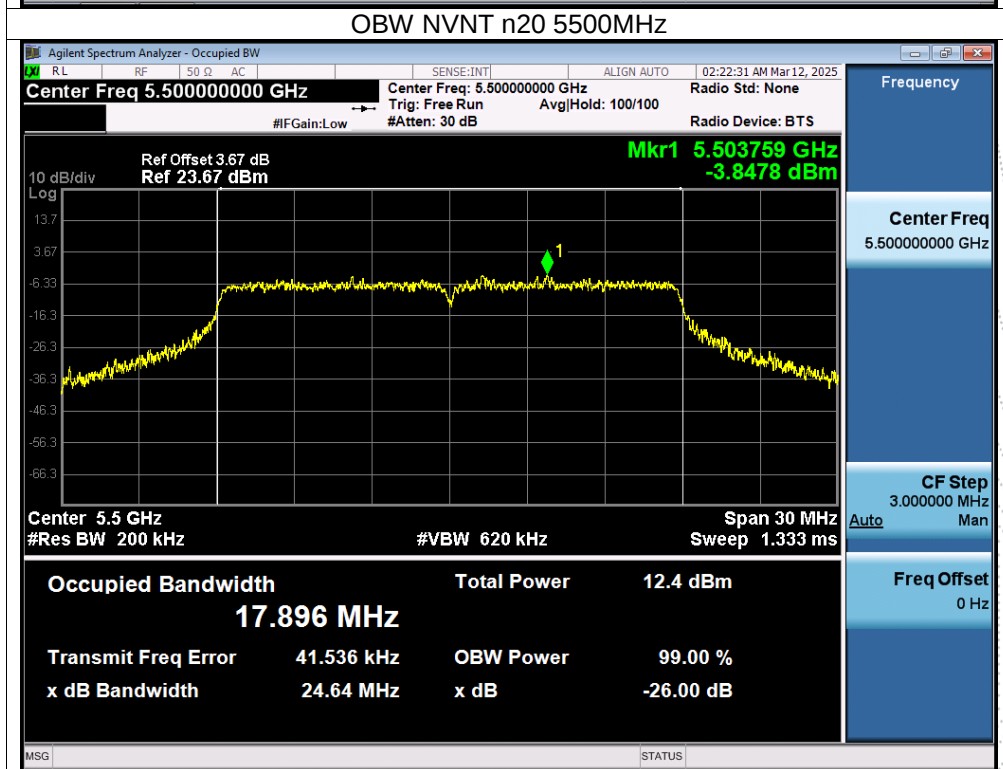
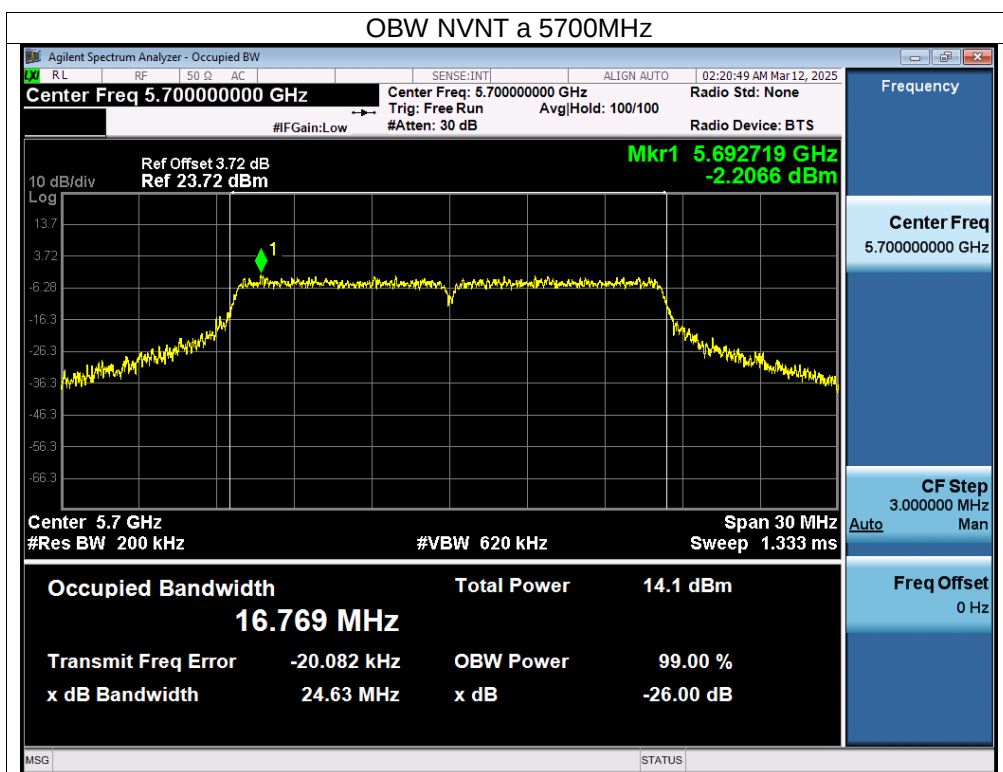



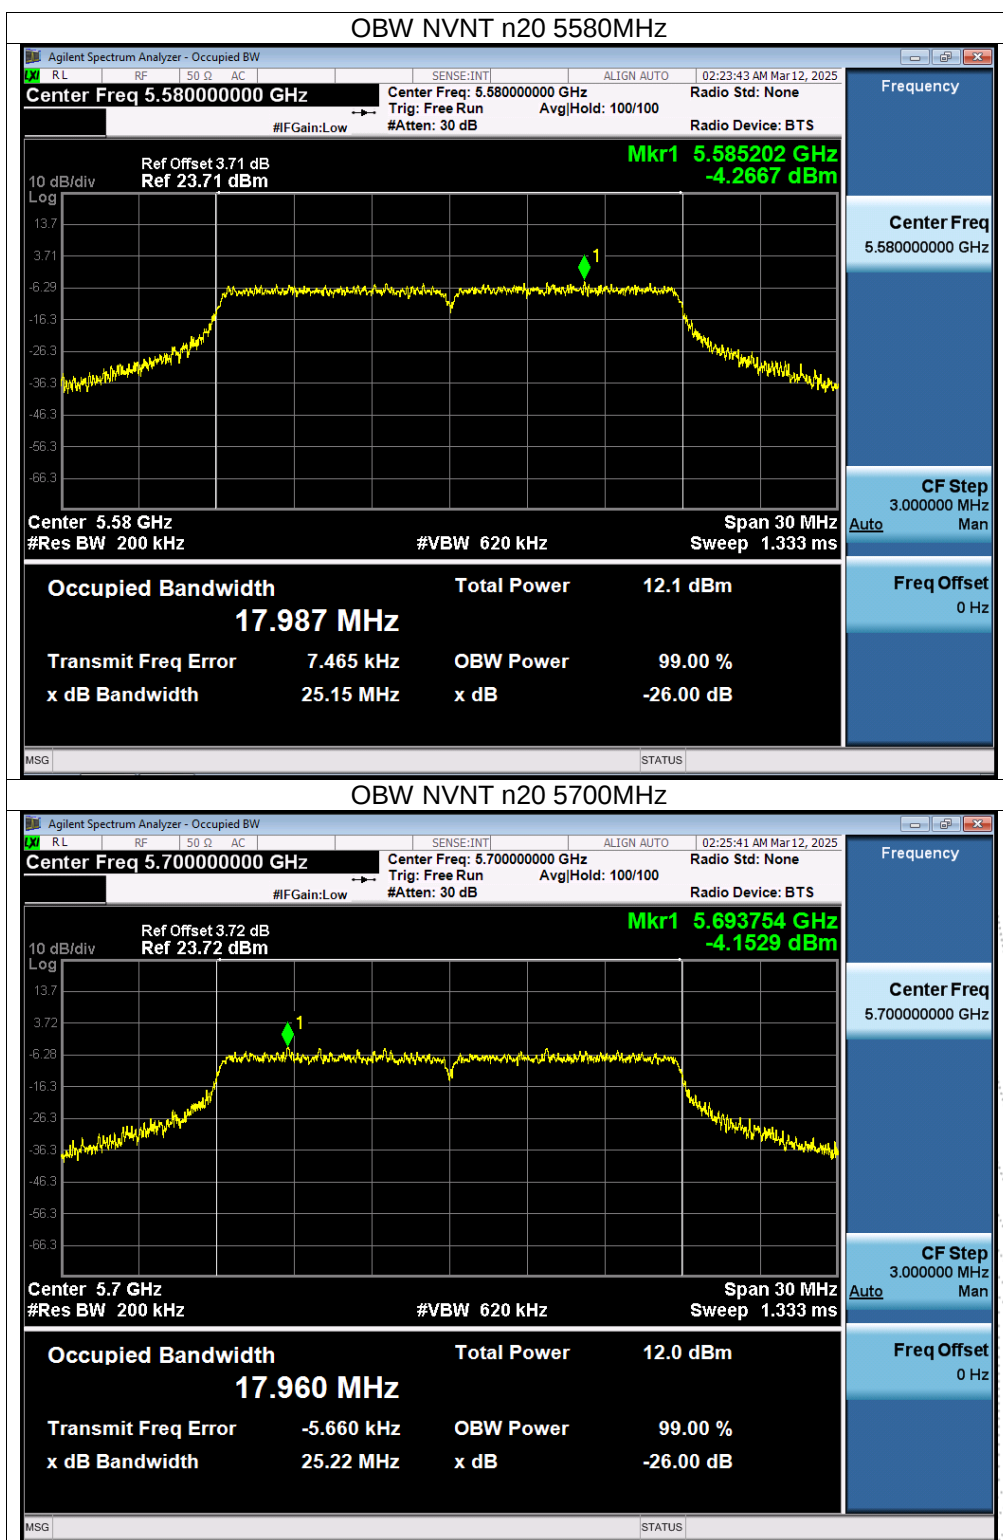


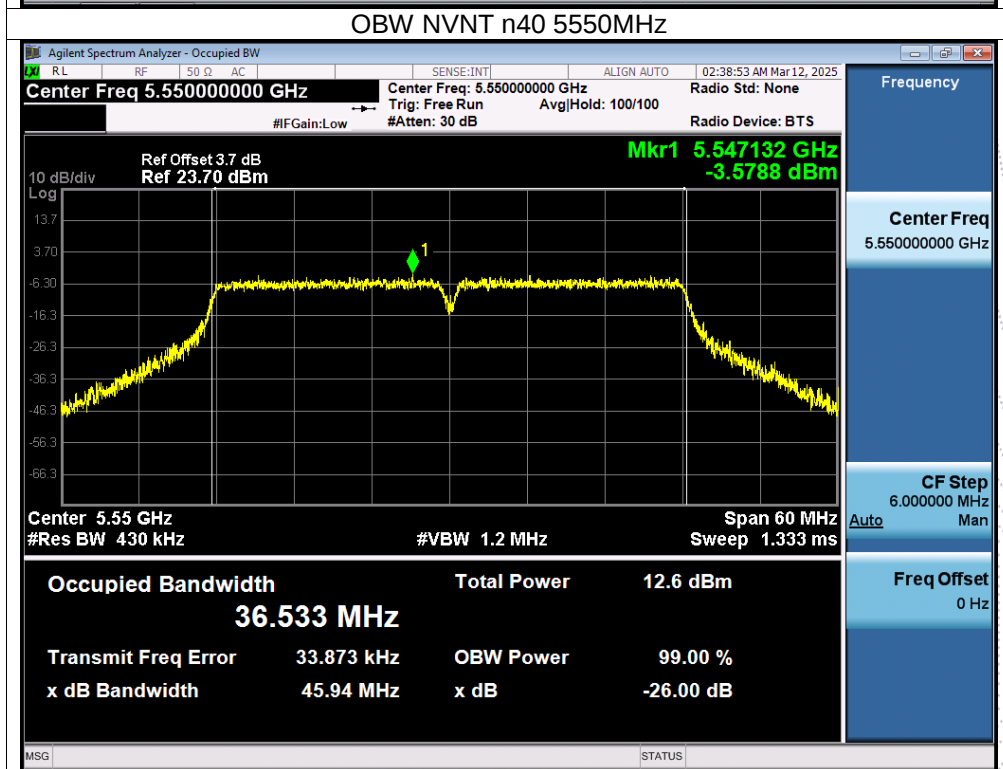
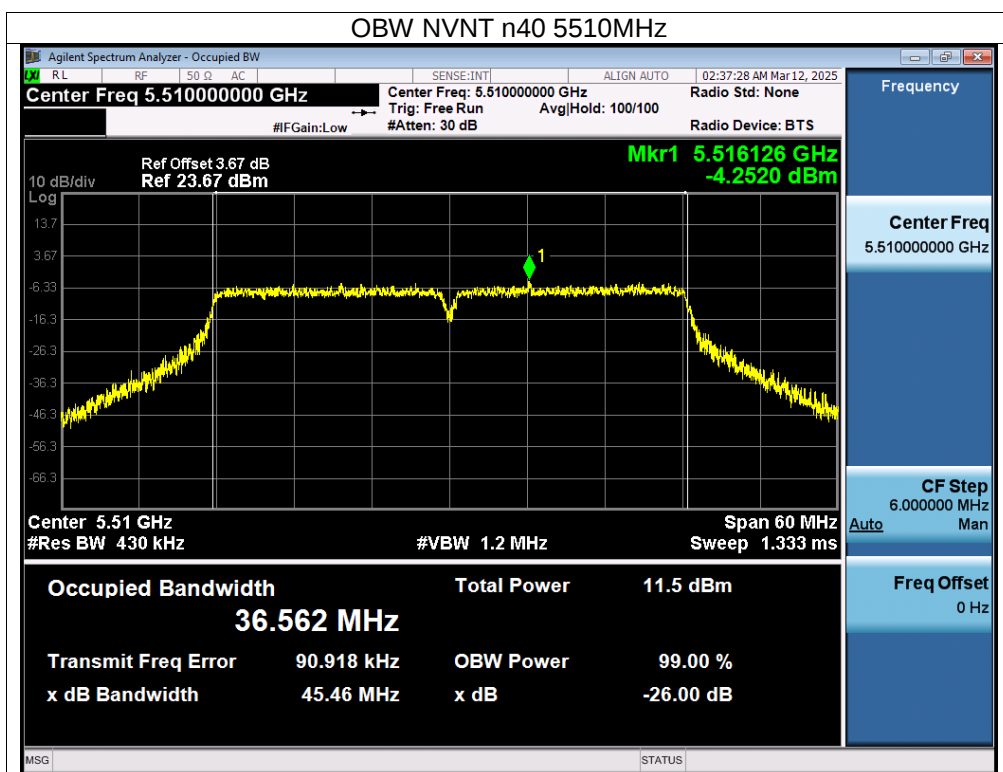


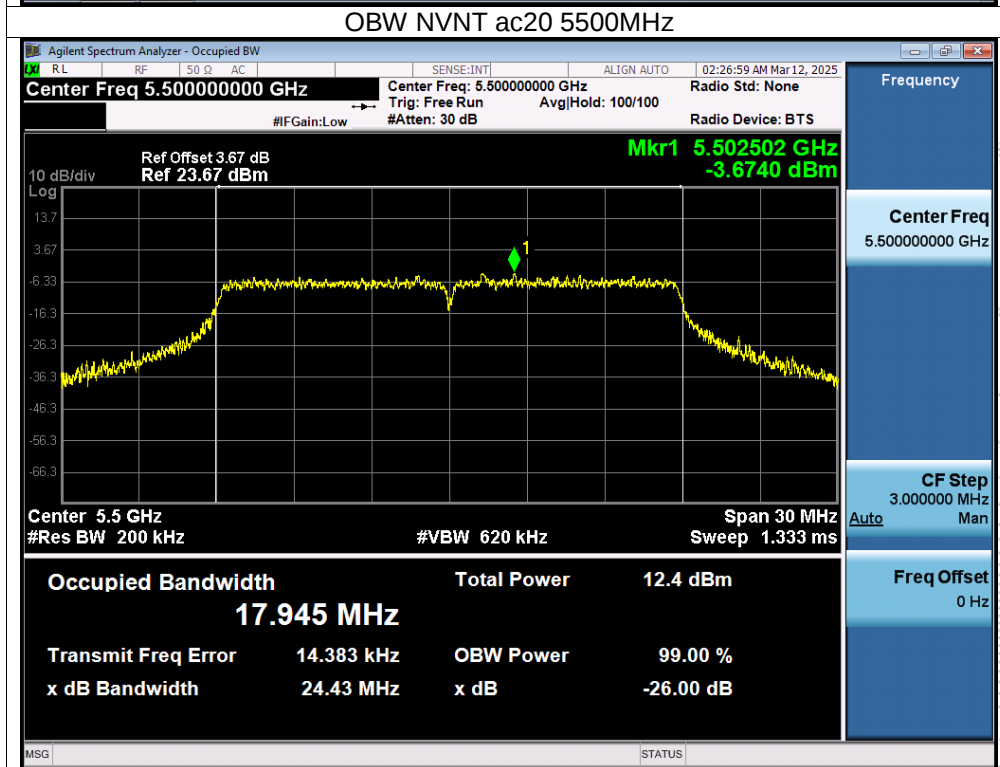
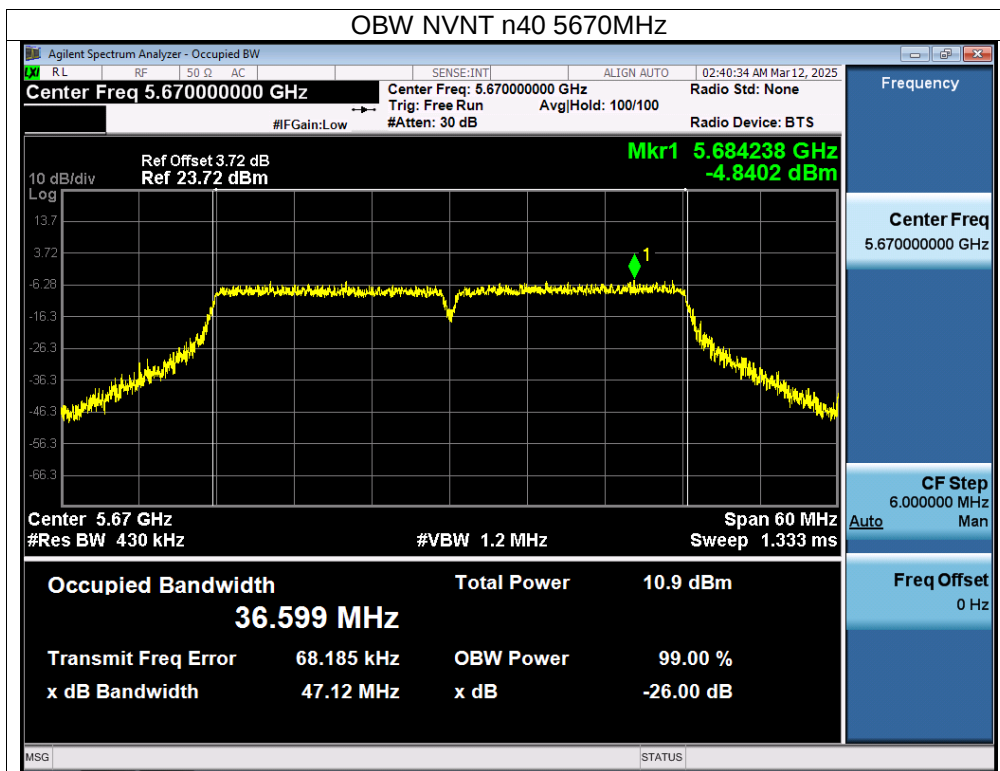


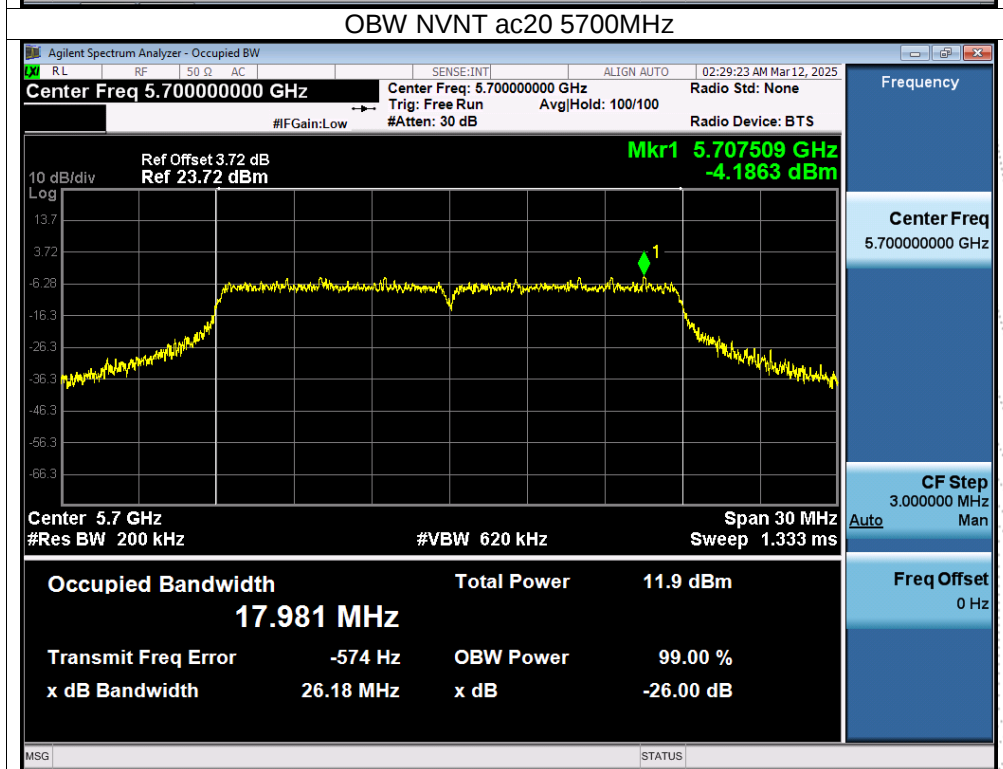
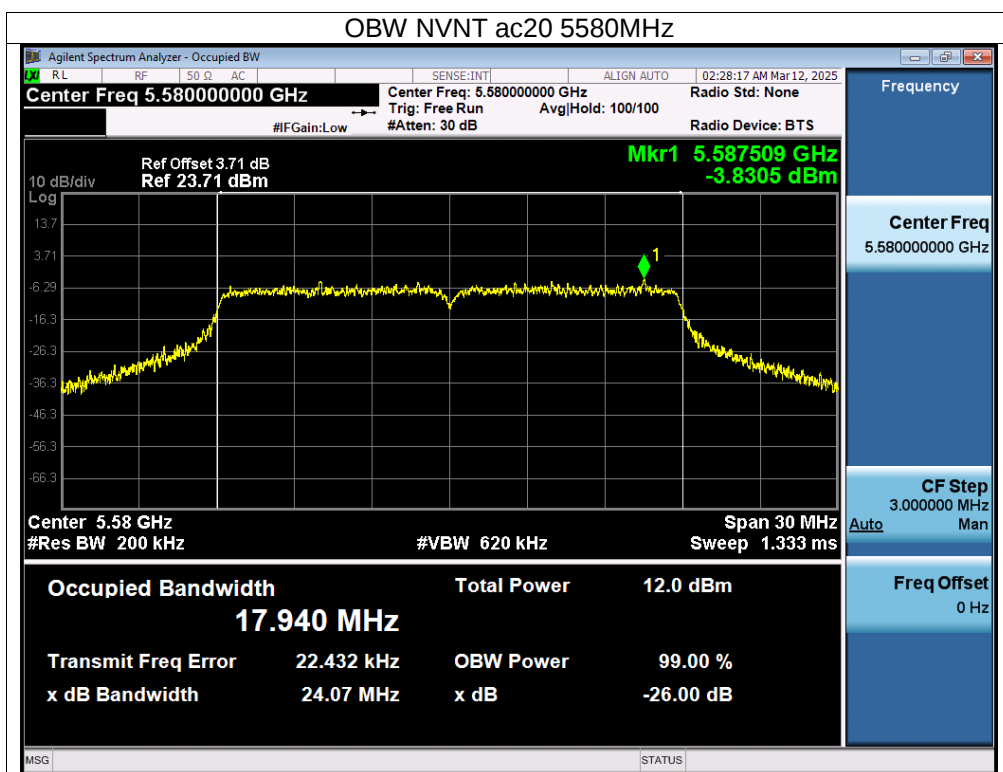


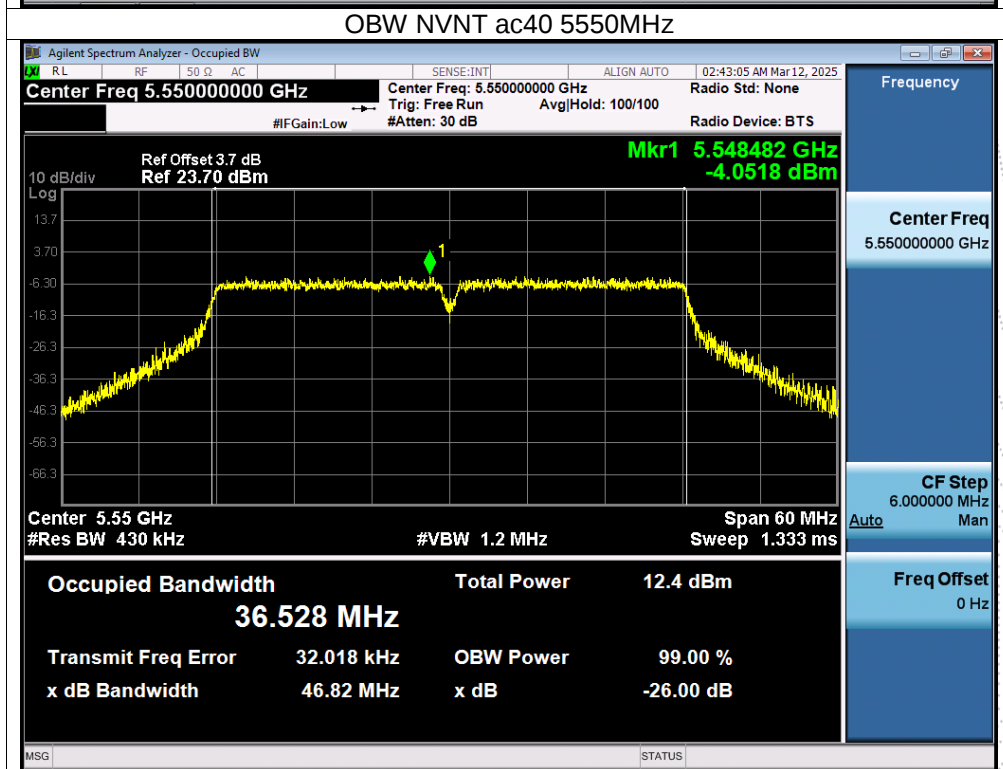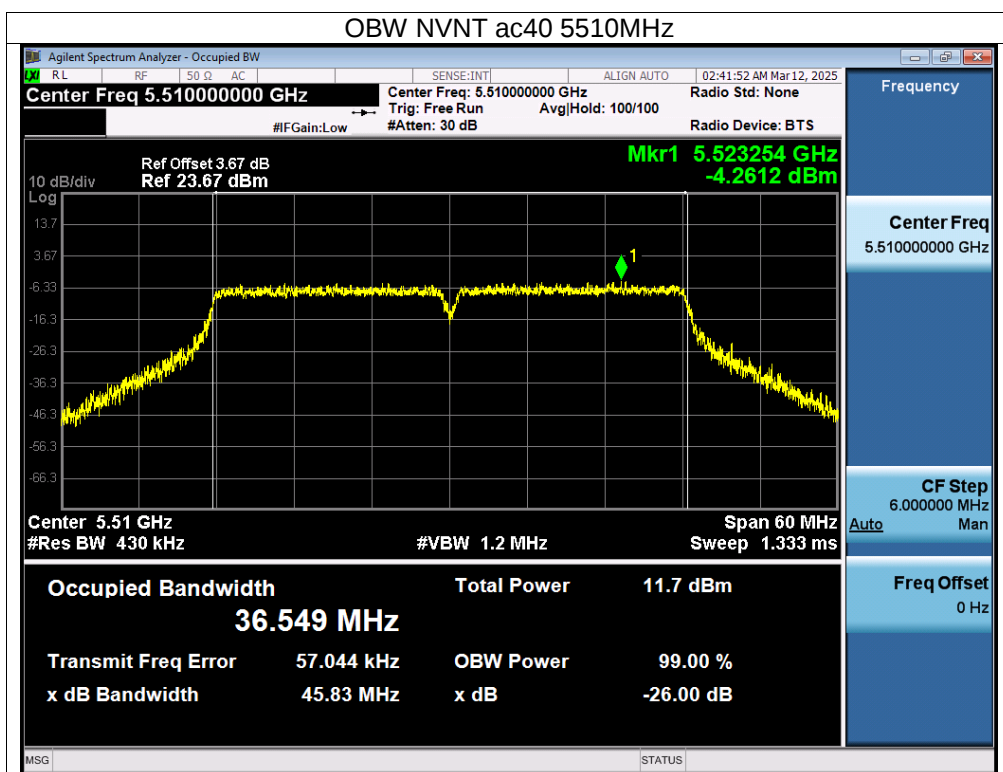


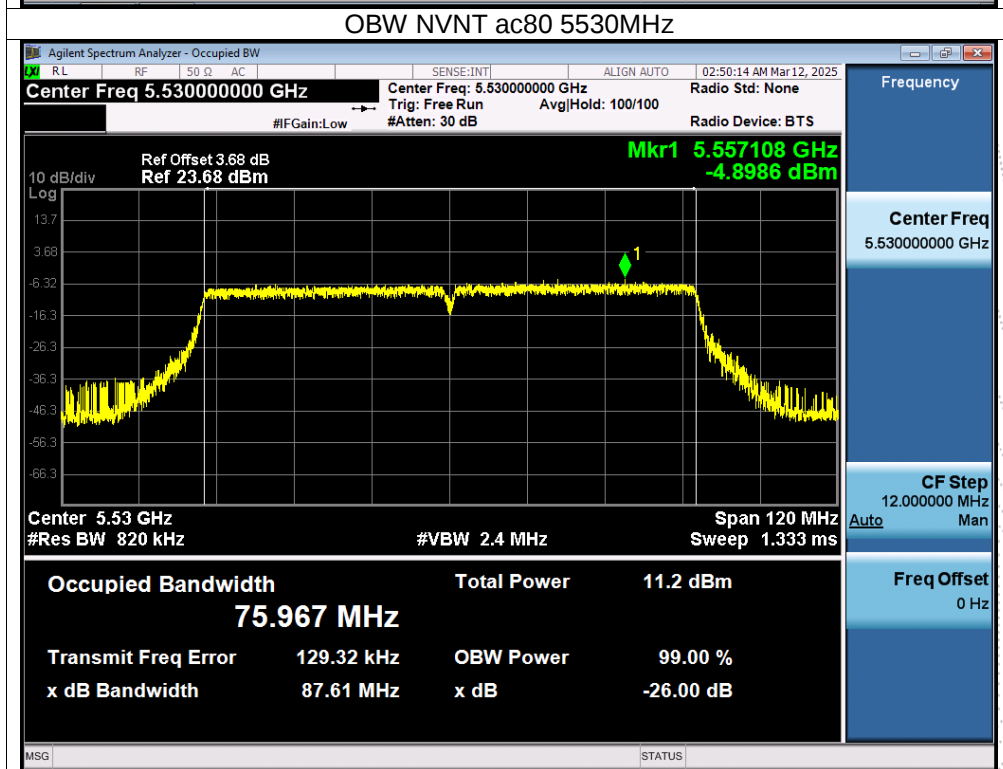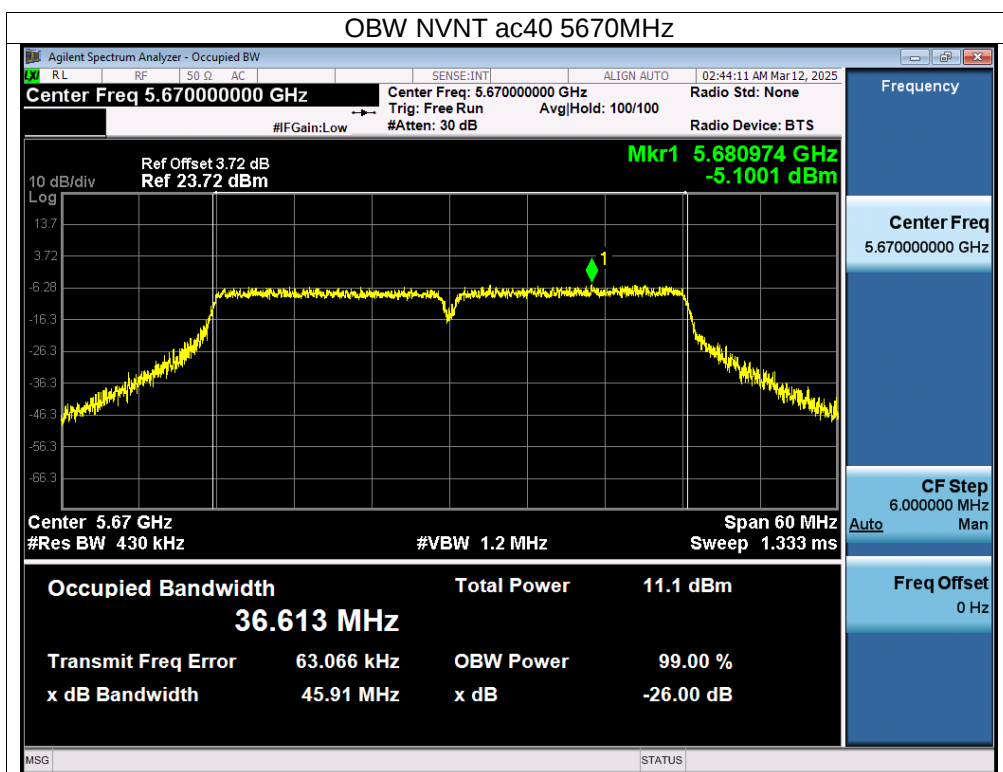

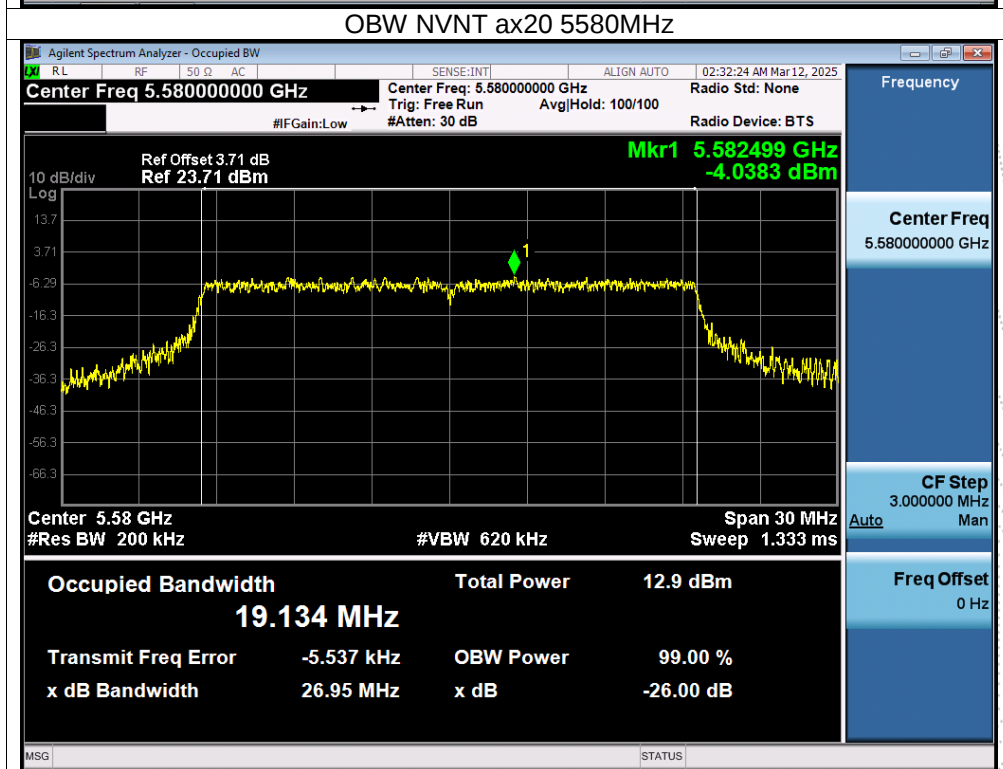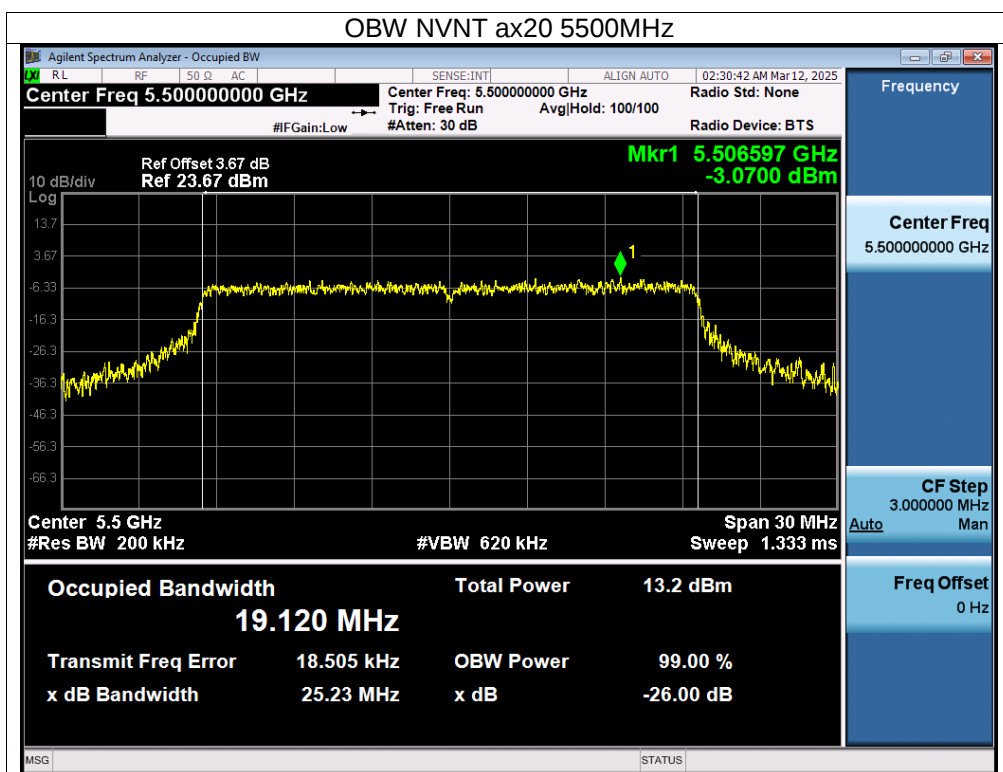

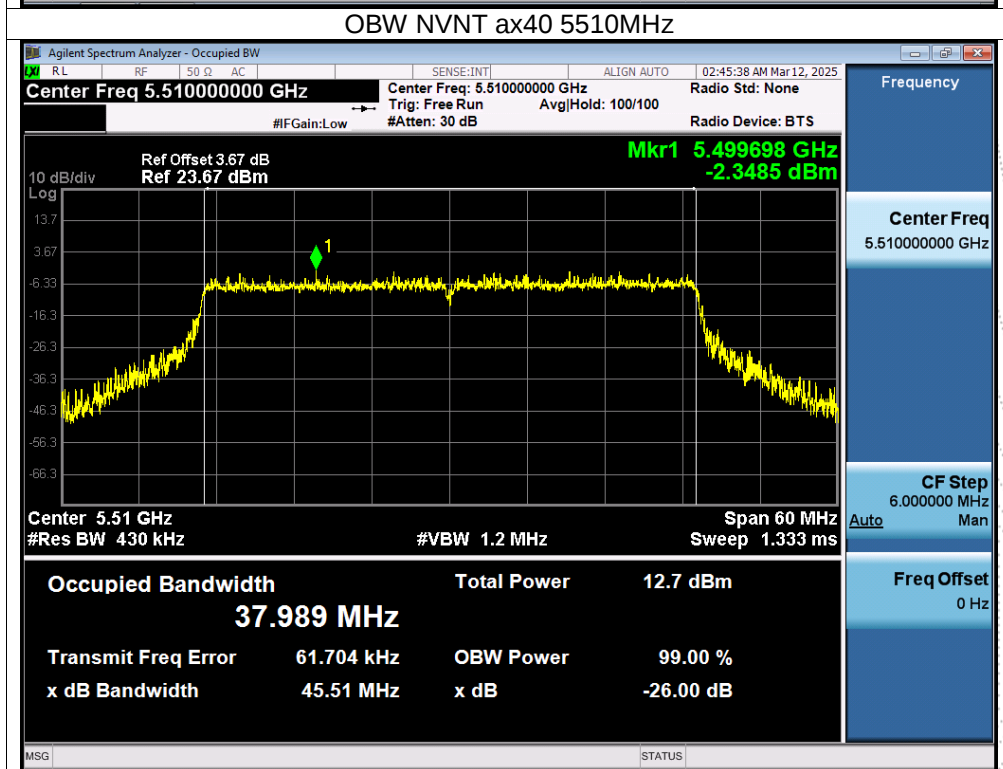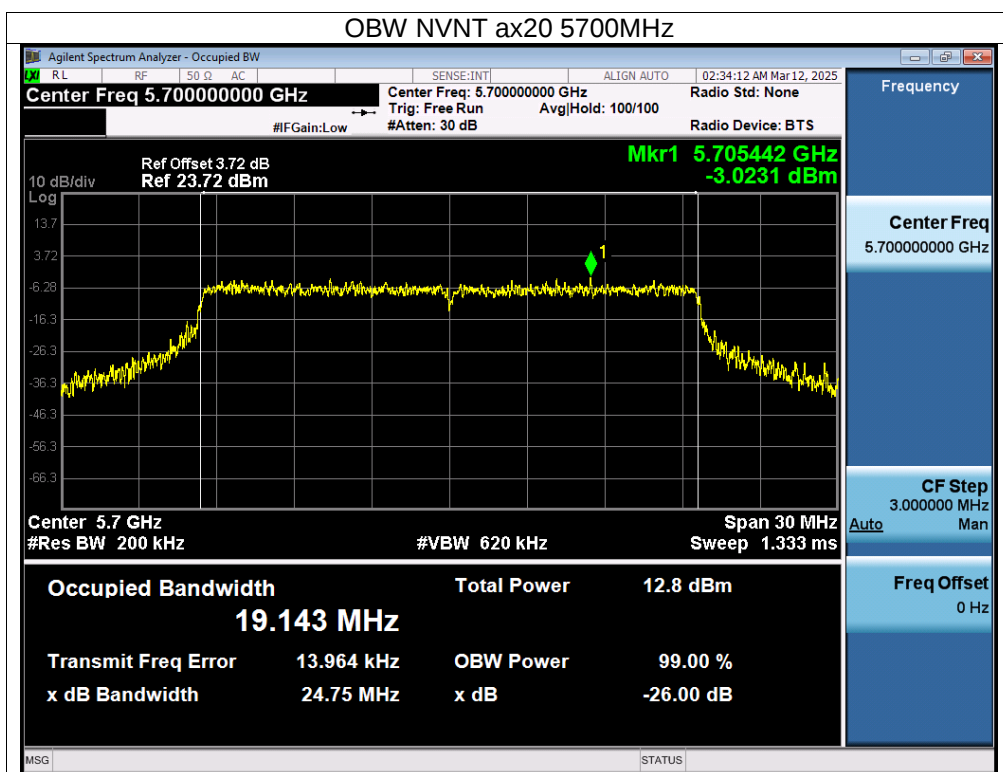

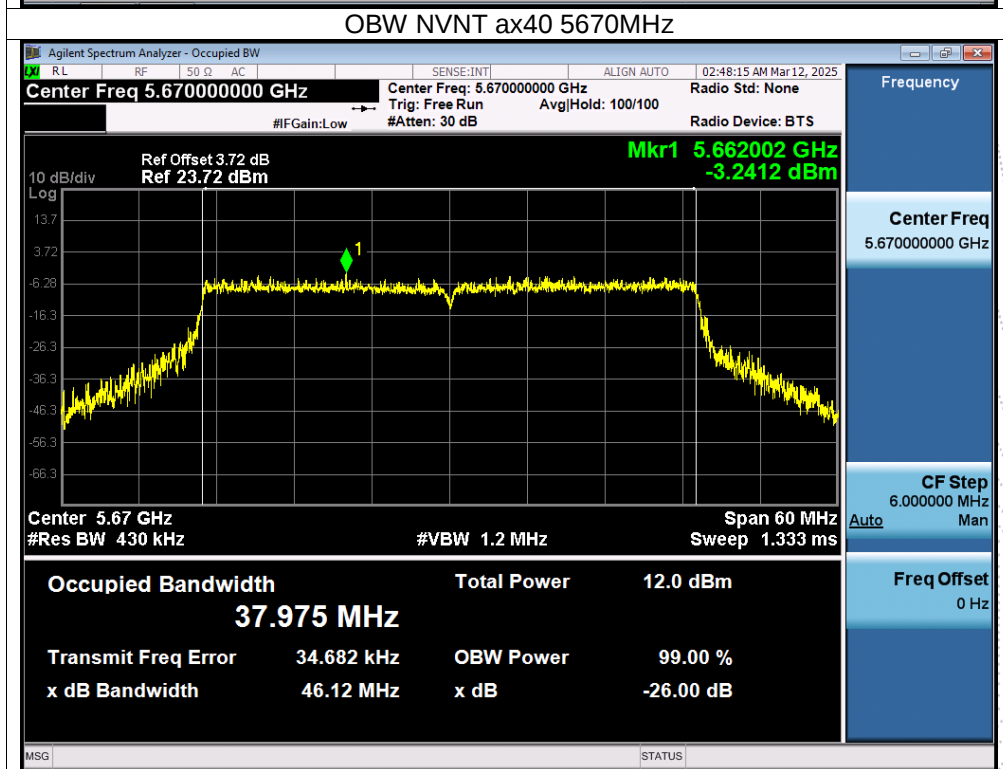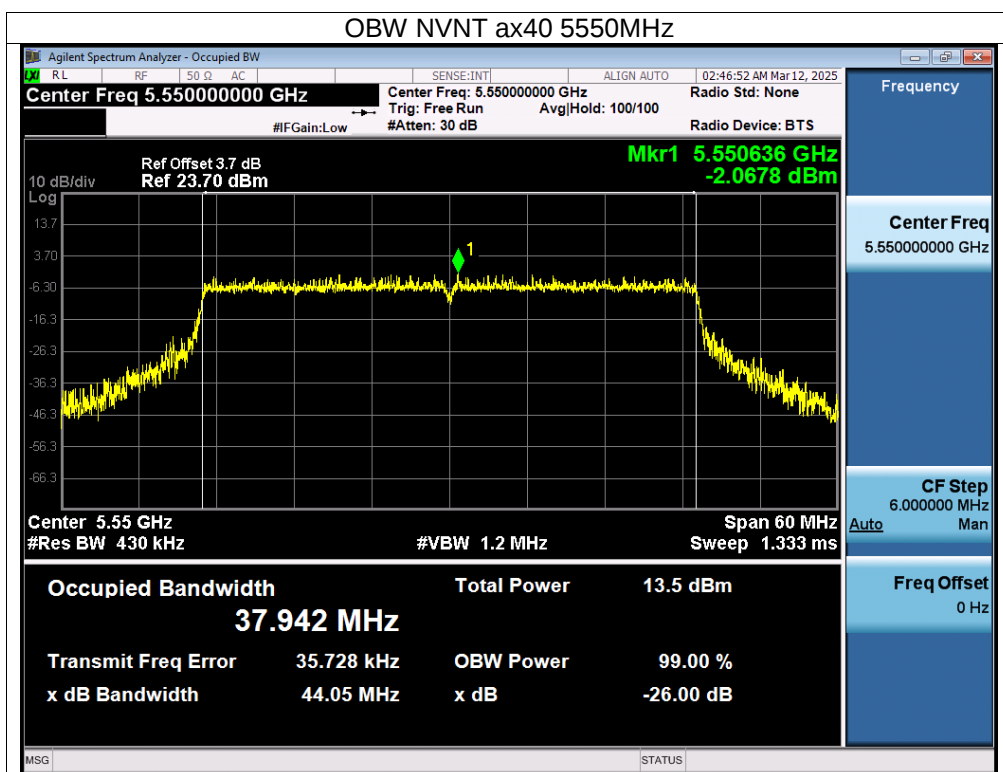



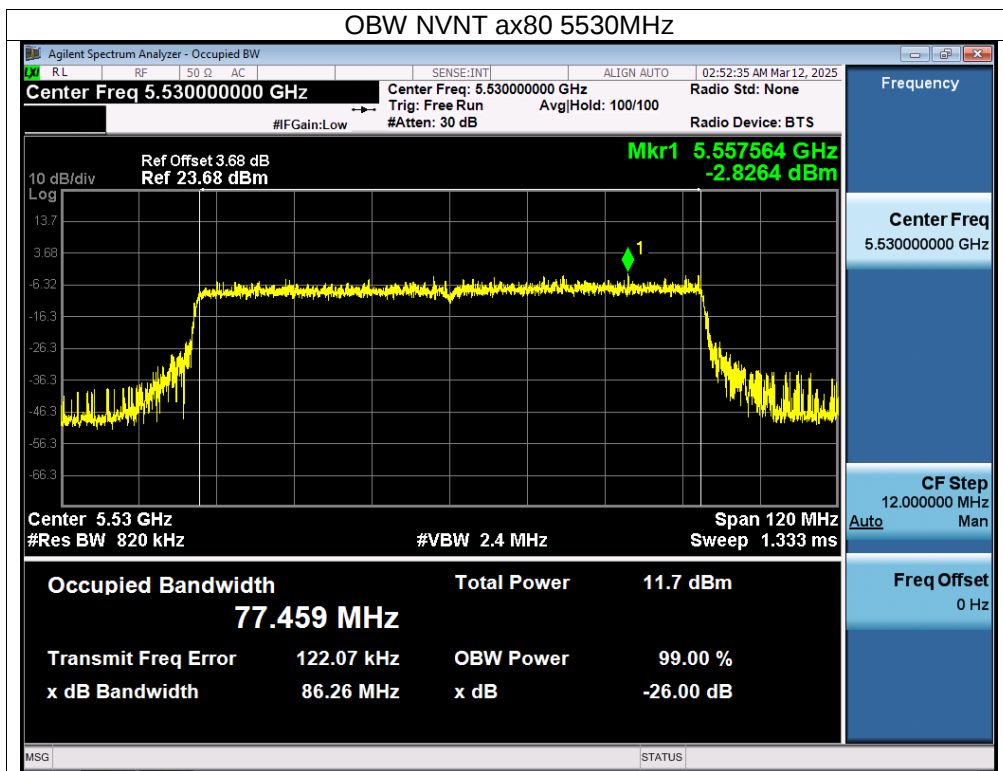




Temperature:	26 °C	Relative Humidity:	54%RH
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	(5745-5825MHz)		

Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-6dB bandwidth (MHz)	Limit -6dB bandwidth (MHz)	Result
NVNT	a	5745	16.367	16.751	0.5	Pass
NVNT	a	5785	16.361	16.755	0.5	Pass
NVNT	a	5825	16.406	16.756	0.5	Pass
NVNT	n20	5745	17.613	17.888	0.5	Pass
NVNT	n20	5785	17.599	17.953	0.5	Pass
NVNT	n20	5825	17.585	17.918	0.5	Pass
NVNT	n40	5755	36.339	36.562	0.5	Pass
NVNT	n40	5795	36.341	36.591	0.5	Pass
NVNT	ac20	5745	17.588	17.923	0.5	Pass
NVNT	ac20	5785	17.595	17.948	0.5	Pass
NVNT	ac20	5825	17.596	17.954	0.5	Pass
NVNT	ac40	5755	36.325	36.490	0.5	Pass
NVNT	ac40	5795	36.321	36.590	0.5	Pass
NVNT	ac80	5775	75.897	75.956	0.5	Pass
NVNT	ax20	5745	18.802	19.086	0.5	Pass
NVNT	ax20	5785	18.946	19.093	0.5	Pass
NVNT	ax20	5825	18.976	19.151	0.5	Pass
NVNT	ax40	5755	37.916	38.035	0.5	Pass
NVNT	ax40	5795	37.570	37.982	0.5	Pass
NVNT	ax80	5775	76.553	77.452	0.5	Pass

CO.LTD

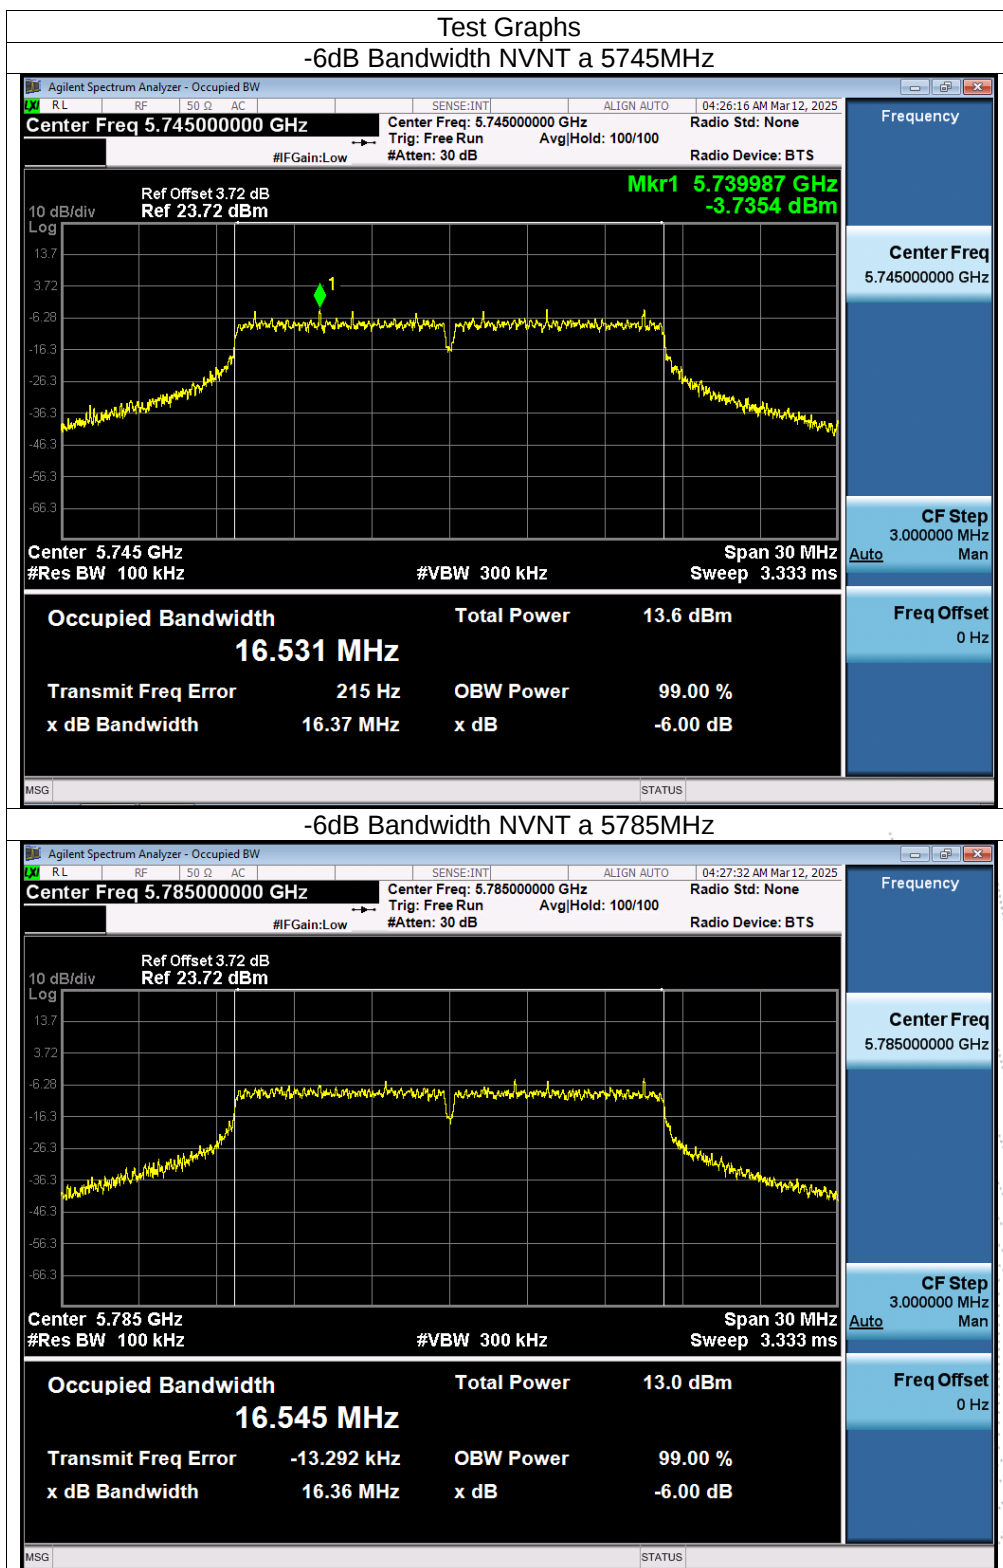

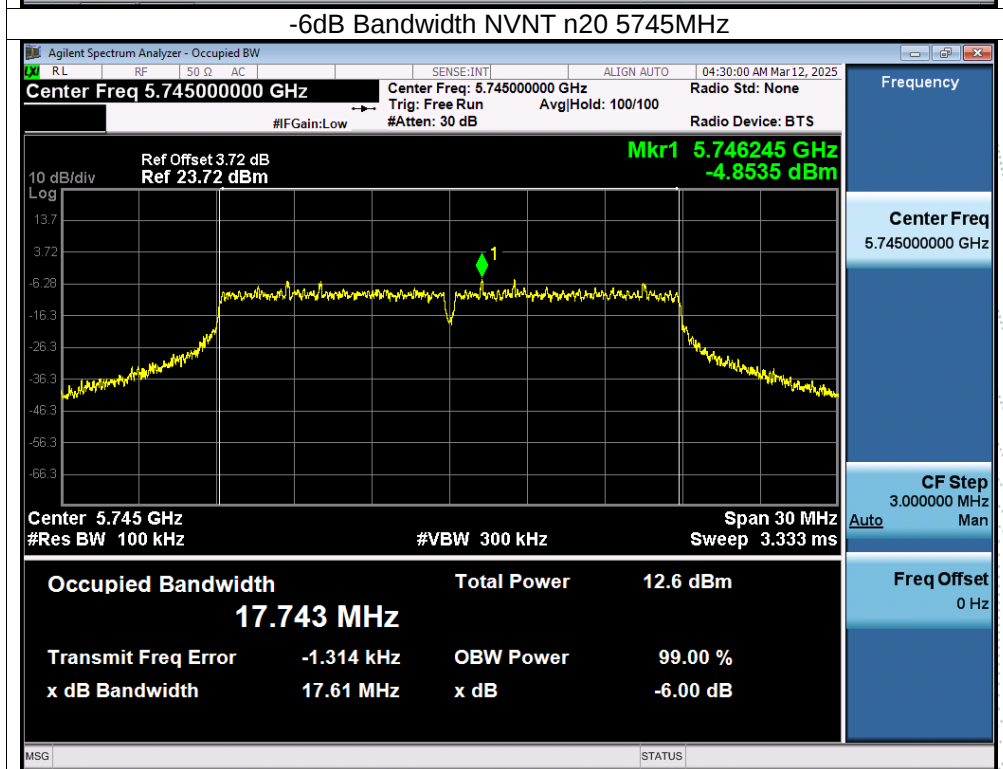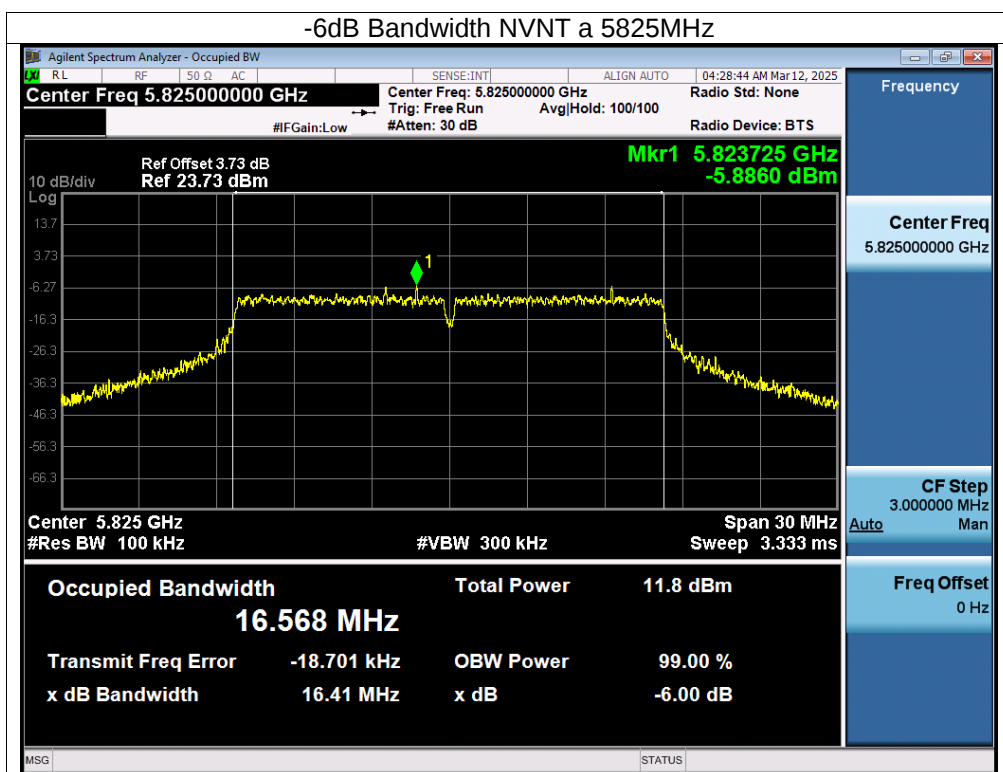

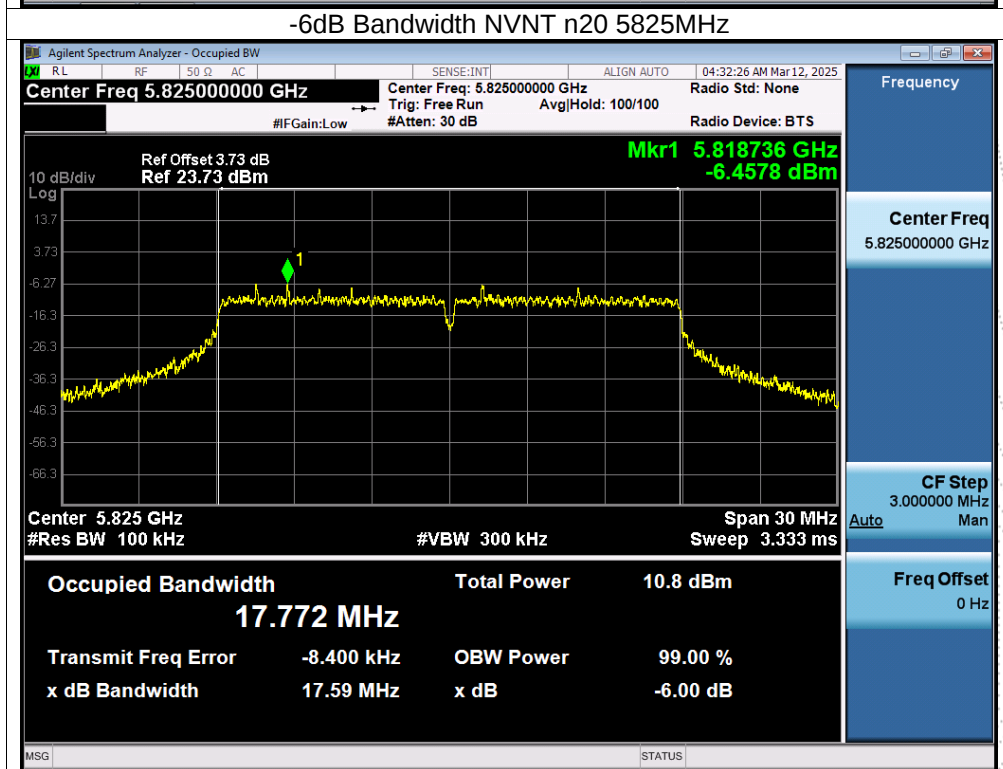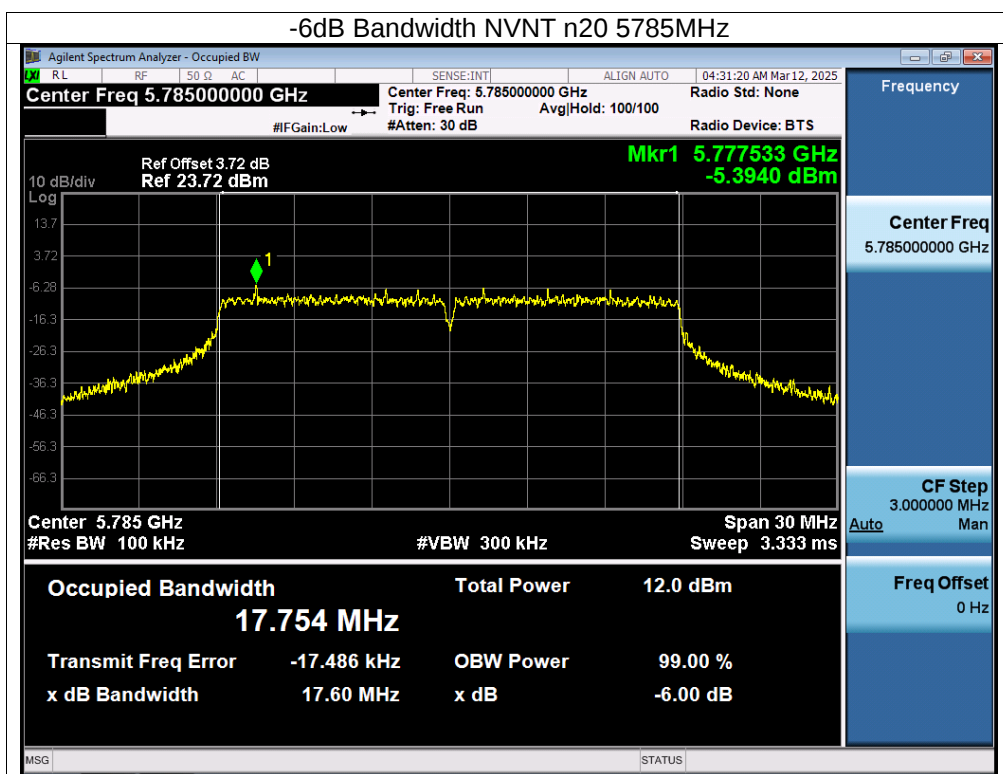

TEST
TC
OVED
t Seal

