

**GRIMTRON® PISTOLS SAFE**  
**VT06**  
**USER MANUAL**



**SETUP GUIDANCE**

USE PHONE CAMERA

*\*Tip: Lower the volume  
before scanning.*



<Contact in a second>

—Lock Away Worries—



At Grimtron®, we stand by our product and our customers. On behalf of the entire team, we sincerely thank you for your purchase. We believe that personal defense should be taken seriously, and we are thrilled for you to experience the ultimate performance in smart security.

## TABLE OF CONTENTS

- P1 - 1.1 Warnings
- 1.2 Disclaimers
- 1.3 Customer Support
- P2 - 2 Product Introduction
- P3 - 3 Unlock the Safe
- 4 Battery Installation
- P4 - 5 Set Password
- P5 - 6.1 Biometric Scanner
- P6 - 6.2 Set Fingerprints
- 6.3 Delete fingerprints
- P7 - 7 Lockout Mechanism
- 8 Wireless Charging
- 9 Internal LED
- P8 - 10 Emergency Port
- 11 Silent Mode
- 12 Security the Safe
- P9 - \* Return/Exchange Process
- \* Linked Warranty (Terms and Conditions)

## QUICK SETUP GUIDANCE

- Step 1** Battery Installation (Page 3)
- Step 2** Set Password (Page 4)
- Step 3** Set Fingerprints (Page 6)

*Please visit [www.grimtrons.com](http://www.grimtrons.com) to access the setup instructions, Registration, guides, and FAQs.*

## 1.1 WARNINGS

1. **DO NOT** use rechargeable batteries or any other type of non-alkaline battery.
2. **DO NOT** mix old and new batteries. **DO NOT** mix alkaline and standard batteries.
3. **DO NOT** lock the keys of this safe.
4. **DO NOT** leave the safe in extreme weather conditions. Battery power may be affected.
5. **DO NOT** store loaded firearms in this unit. Firearms are serious in nature and must be treated with respect and stored responsibly.

## 1.2 DISCLAIMERS

NEITHER THE SELLER NOR THE MANUFACTURER SHALL BE LIABLE FOR UNAUTHORIZED ACCESS, ANY INJURY, LOSS, OR DAMAGE TO PERSONAL PROPERTY DIRECT OR CONSEQUENTIAL ARISING OUT OF THE USE OF, OR THE INABILITY TO USE THE GRIMTRON® SAFE.

THE USER SHALL DETERMINE THE SUITABILITY OF THE GRIMTRON® SAFE FOR THE INTENDED USE, AND THE USER ASSUMES RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. GRIMTRON® SAFE ARE NOT INTENDED TO PROTECT AGAINST ENVIRONMENTAL HAZARDS INCLUDING FIRE AND WATER.

## 1.3 CUSTOMER SUPPORT

If you have any issues with your safe deposit box, please Contact in a second through *grimtrons.com* or email (*service@grimtrons.com*).


We will respond to within 12 hours of receiving it.



<SCAN IT TO CONTACT IN A SECOND>

## 2 PRODUCT INTRODUCTION


The Grimtron® Pistols Safe is a rugged and durable biometric access safe. Its sturdy structure and penetration-resistant design make it ideal for storing valuable items such as firearms, jewelry, cash, and personal belongings. The safe combines advanced security with comprehensive access control.

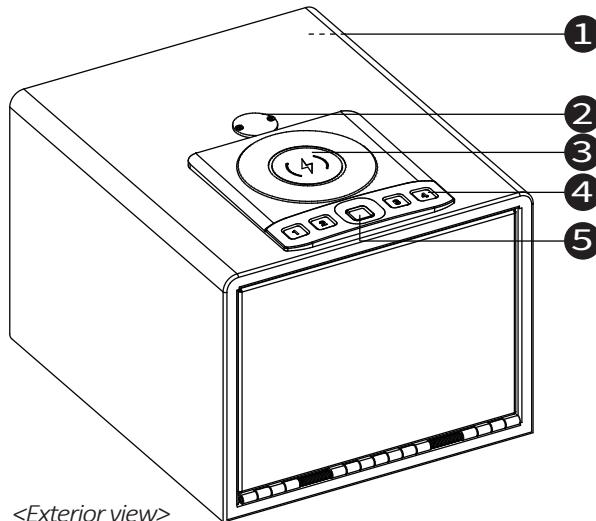

*<Exterior view>*

- 1 Adapter Port
- 2 Keyhole
- 3 Wireless Charger Pad

- 4 Digital Keypad
- 5 Biometric Scanner

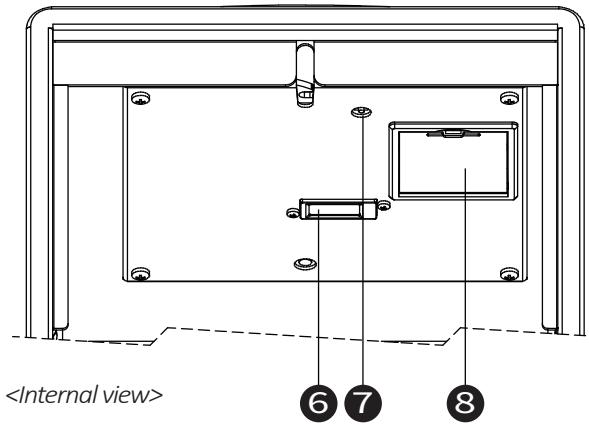

*<Internal view>*

- 6 Internal LED
- 7 Program Button
- 8 Battery Compartment

If you need further assistance or require additional keys, please contact our customer support team at [service@grimtrons.com](mailto:service@grimtrons.com).

### 3 UNLOCK THE SAFE

The keyhole is concealed beneath the keyhole cover. Please remove the keyhole cover before using the key. When not using the key, we recommend placing the keyhole cover back onto the keyhole.

**Step 1** Unscrew the screws on the keyhole cover, then remove the keyhole cover. (a in Figure A).

**Step 2** Insert the key and rotate it counterclockwise. The safe will be successfully unlocked.



### 4 BATTERY INSTALLATION

**STEP 1** Locate the battery compartment at the top inside the box, open the battery cover downward, and remove the battery tray.

**STEP 2** Install 4 AAA batteries (not included) according to the instructions, making sure to align the grooves in the battery tray (b in Figure B).

**STEP 3** Press firmly to close the battery cover.

**STEP 4** The keypad's BLUE light will light up, and the safe will emit a beep.

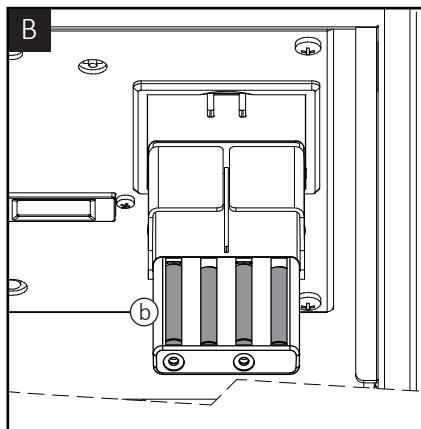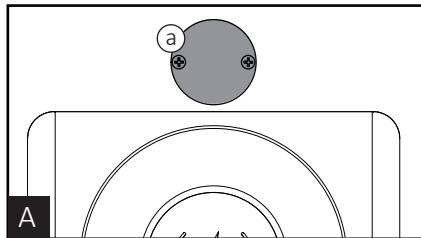

#### TIPS

- ▶ The positive terminal of the battery is usually slightly raised and may have a plus sign (+) next to it.
- ▶ The negative terminal is typically flat and may have a minus sign(-) next to it.
- ▶ Ensure that you align the positive terminal of the battery with the positive indication in the slot and the negative terminal with the negative indication.

#### NOTE

- (1) Please use alkaline or carbon batteries.
- (2) Using other types of batteries may render the safe inoperable.
- (3) **Do not** mix old and new batteries.
- (4) The safe **cannot** be powered by rechargeable batteries.
- (5) **Do not** attempt to charge any batteries inside the safe.

# 5 SET PASSWORD

**First time users should change the default password as soon as possible to prevent unauthorized access to your safe.**

**STEP 1** When the safe is unlocked, press and hold the **program** button for 5s, the keyboard BLUE light flashes 2 times, after releasing the **program** button, the biometric scanner BLUE light is on, enter the setting procedure (c in Figure C).

**STEP 2** Enter your NEW 4-8 bit password (touch the keyboard once the keyboard BLUE light flashes once, the beeps once).


**STEP 3** After then press (immediately release) the **program** button to confirm.

**STEP 4** Password set successfully, the keyboard light BLUE light flashes twice, while the beeps twice.

**STEP 5** You can test the password to confirm the charge was successful. Touch any of the digital keys, the keypad BLUE light up, enter the password you just set.

**\*\* When testing the new password, please keep the door open and only turn the lock.**

**!! If you make a mistake and the new password will not work, simply start over with STEP 1.**

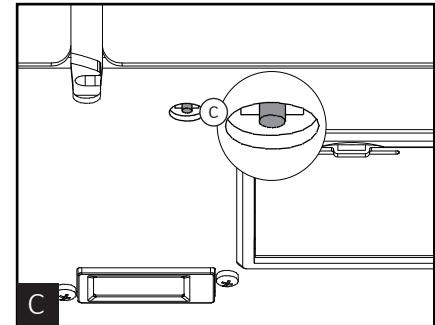

## TIPS

- ▶ Default password os 1234.
- ▶ Once the new password is successfully set, the old password will become invalid.
- ▶ Only one password can be set. Repeat the process of setting only to change the password.
- ▶ Passwords cannot be deleted; they can only be overwritten.
- ▶ The **program** button cannot be used as any of the digits in the password.

## NOTE

In the process of setting the password, if the BLUE light of the safe keyboard flashes 5 times, and beeps 5 times, the password are set failed.

Please avoid the following situations.

- (1) The new password entered is less than 4 digits and more than 8 digits.
- (2) After entering the setting procedure, there is no operation.
- (3) After entering the password, press the **program** button for 5s.

## 6.1 BIOMETRIC SCANNER

Biometric fingerprint functionality is a highly secure and reliable identity verification technology. It utilizes the unique fingerprint characteristics of each individual to ensure that only authorized users can access it. By analyzing the patterns of ridges, valleys, and minutiae points on the fingerprint, biometric fingerprint functionality can accurately identify and verify user identities within milliseconds.


Due to the uniqueness of each person's fingerprint, biometric fingerprint functionality offers higher security than traditional authentication methods such as passwords or cards. It is nearly impossible to impersonate or forge, thereby safeguarding critical information and valuable assets of individuals and organizations.

The safe can store fingerprint data for up to 80 authorized users, ensuring that this data is encrypted and protected. The registration of a user involves scanning the same finger three times. Even in the event of device loss or theft, unauthorized individuals cannot access sensitive information or resources.

### Tips for Setting up Fingerprints

Place the core of the fingerprint flat over the center of the scanner (this allows the scanner to read where most of the fingerprint detail is located) (see Figure D).

- Rotate your finger slightly between registration scans to store print variations for increased accuracy.
- Excessive moisture, lotions, or dirt will affect your fingerprint and may cause inaccurate sensor reading.
- Troubleshooting! If you are having difficulty with your print, set the same fingerprint 4 or 5 times. You have 80 slots available for setting and you can also try your thumb as it has more surface area to read.

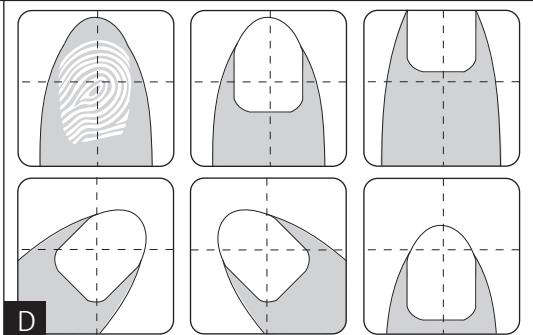

D

### NOTE

- Place your finger on the biometric scanner. The biometric scanner will light up with a BLUE light. If the fingerprint is correct, the biometric scanner will light up with a GREEN light, and the keypad will illuminate with a BLUE light, indicating that the safe is successfully unlocked.
- If the fingerprint comparison fails, the biometric scanner will light up with a RED light, and the keypad will flash with a BLUE light 5 times and 5 beeps.

## 6.2 SET FINGERPRINTS

**STEP 1** When the safe is in the unlocked state, press and hold the **program** button (c in Figure C) for more than 5s. The keypad's BLUE light will flash twice. After releasing the **program** button, the biometric scanner's BLUE light will illuminate, entering the setup procedure.

**STEP 2** Place your finger on the biometric scanner three times. Each successful enrollment will be indicated by a brief flash of the GREEN light and a beep. Remove your finger and place it on the biometric scanner again, repeating this process three times consecutively.

**STEP 3** Upon successful fingerprint setup, the biometric scanner will emit a GREEN light, and the keypad's BLUE light will flash twice and beeps twice.

**STEP 4** You can test the fingerprint to confirm the charge was successful. Touch any of the keypad BLUE light up, enter the fingerprint you just set.

**\*\* When testing the new fingerprint, please keep the door open and only turn the lock.**

**!! If you make a mistake and the new fingerprints will not work, simply start over with STEP 1.**

### TIPS

- ▶ Each fingerprint requires 3 registration scans to be enrolled into the safe.
- ▶ The process of repeating the fingerprint setup allows you to store the second, third... up to the eightieth fingerprint.

### NOTE

- Fingerprint storage limit reached notification:  
When you try to enroll a new fingerprint and the storage capacity has been reached, the keypad's BLUE light will flash 10 times, accompanied by 10 beeps.


## 6.3 DELETE FINGERPRINTS

**STEP 1** Press and hold the **program** button (c in Figure C), and you will hear a beep (3s). The keypad's BLUE light will flash briefly.

**STEP 2** Continue holding the **program** button until you hear two beeps (6s). The keypad's BLUE light will flash twice. The fingerprint scanner will illuminate with a GREEN light.

**STEP 3** Release the **program** button. The fingerprint data has been successfully deleted.

NOTE: Pressing and holding the **program** button will only clear the fingerprint data. The password will not be deleted and will remember the last correctly set password.

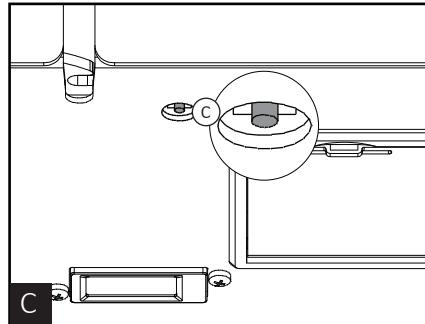

## 7 LOCKOUT MECHANISM

The safe will be locked for 5 minutes in the following two situations:

- <1> If the password or fingerprint is entered incorrectly 5 times in a row.
- <2> If there are a cumulative total of 5 incorrect entries, combining both password and fingerprint.

The alarm and lockout will stop once the power is disconnected, and the safe can be unlocked by entering the correct password or fingerprint.

### NOTE

- (1) All keypad buttons will be disabled.
- (2) During the lockout period, entering the password or fingerprint will be ineffective.
- (3) The keypad's BLUE light will flash and the safe will emit beeping sounds during the lockout period.

## 8 WIRELESS CHARGING

Wireless charging must be used in the power supply mode by connecting to adapter interface.

Place a smartphone with wireless charging capability on the wireless charging pad (e in Figure E), and the wireless module will automatically detect the phone for charging. You can observe the charging symbol on the phone screen, indicating that the charging process is in progress.

### NOTE

- (1) When the safe is equipped with batteries and not connected to an adapter, wireless charging will not work.
- (2) Phones without wireless charging capability cannot use the wireless charging pad.
- (3) To ensure proper functionality of wireless charging, please use a thin phone case or remove the phone case altogether.



## 9 INTERNAL LED

When the safe is equipped with batteries or connected to an adapter interface, after entering the password or fingerprint and successfully unlocking the safe, the internal LED light will turn on (f in Figure F).

### NOTE

*(The LED light will not turn on)*

- (1) Entering the incorrect password.
- (2) Using the key to unlock the safe.

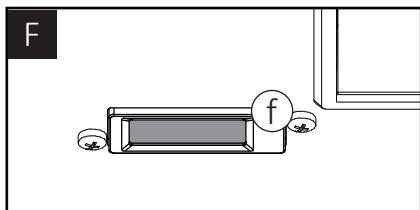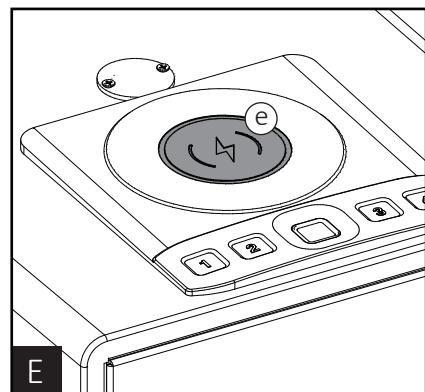

## 10 EMERGENCY PORT


If the battery of the safe is low or no batteries are installed, resulting in the inability to unlock the safe, you can use the emergency interface as an auxiliary method to unlock the safe.

There is an emergency interface on the back of the safe (g in Figure G), which can only be used with an adapter. Connect the output plug of the adapter to the emergency interface of your safe. Insert the plug of the adapter into the power outlet.

If batteries are installed and the adapter is connected, the adapter takes priority in providing power to the safe.

### NOTE

- (1) Can only provide power to the safe.
- (2) Cannot be used to charge the safe.

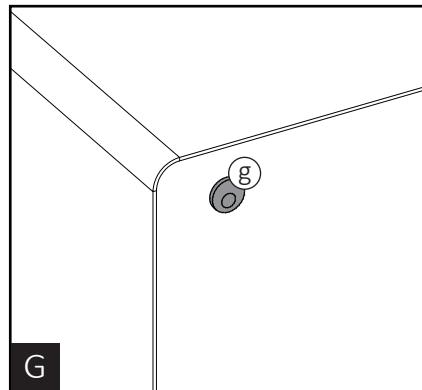

## 11 SILENT MODE


### Entering silent mode

**STEP 1** Press any key to wake up the keyboard. Once the keyboard light is on, press and hold the **1** button (h in Figure H) on the keypad for 4s without releasing it.

**STEP 2** The safe will emit a beep sound, and the keypad's BLUE light will flash twice.

**STEP 3** Release the **1** button. Silent mode has been successfully activated.

To exit the silent mode, repeat the steps to enter the silent mode again.

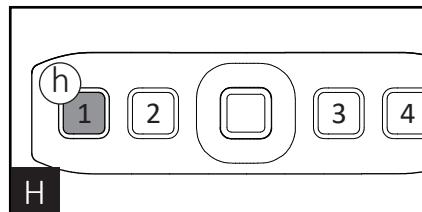

## 12 SECURITY THE SAFE

**STEP 1** Fix the safe in the place which is not easy to move.

**STEP 2** Drill holes for expansion screws in the right place.

**STEP 3** Turn the expansion screws counter clockwise to separate.

**STEP 4** Use the expansion screws to secure the safe to the platform.

**STEP 5** Make sure the safe is mounted in place as required and then tighten all screws.

## \* RETURN/EXCHANGE PROCESS

If you decide to return/exchange the safe, you can contact the customer service department of the merchant through email ([service@grimtrons.com](mailto:service@grimtrons.com)) or online chat on [grimtrons.com](http://grimtrons.com).

Provide relevant information such as the order number, product details, and the reason for the return/exchange, so that they can assist you better in handling the return/exchange process.

## \* LINKED WARRANTY(TERMS AND CONDITIONS)

Grimtron® is committed to building high-quality products and will make every effort to ensure our products are free from any defects. We warrant to the purchaser that the Grimtron® safe will be free from defects in materials or workmanship for a period one year from the date of purchase.

This warranty does not cover abuse, misuse, use in any manner for which is not designed, neglect, modification, damage inadvertently caused by the owner, accidents, and/or tampering. Any damage to the Grimtron® safe as a result of misuse, tampering, abuse, neglect, accident, improper installation, modification, unauthorized service, destruction, or the alteration of the serial number, or use violation of the instructions furnished by the Company will void this warranty.

These warranties are not assignable or transferable to any other person. The sole responsibility of the Company shall be limited to the repair or replacement (in its sole discretion) of any component of the Grimtron® safe which fails to conform to this warranty at no cost to the purchaser for the period of the warranty.

If your safe is determined to be defective, and we are responsible for the cause, we will have it repaired at our expense, or we will send a new replacement at no cost to you. You will be required to return your existing unit as well as all included accessories to Grimtron® prior to replacement of the defective unit along with your order of purchase.

If it is determined your safe needs to be returned, please contact our customer support team, and they will provide you with a return detail.



[www.grimtrons.com](http://www.grimtrons.com)

The Grimtron® word mark and logo are trademarks owned by Grimtron® owner.

[service@grimtrons.com](mailto:service@grimtrons.com)

## FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.