





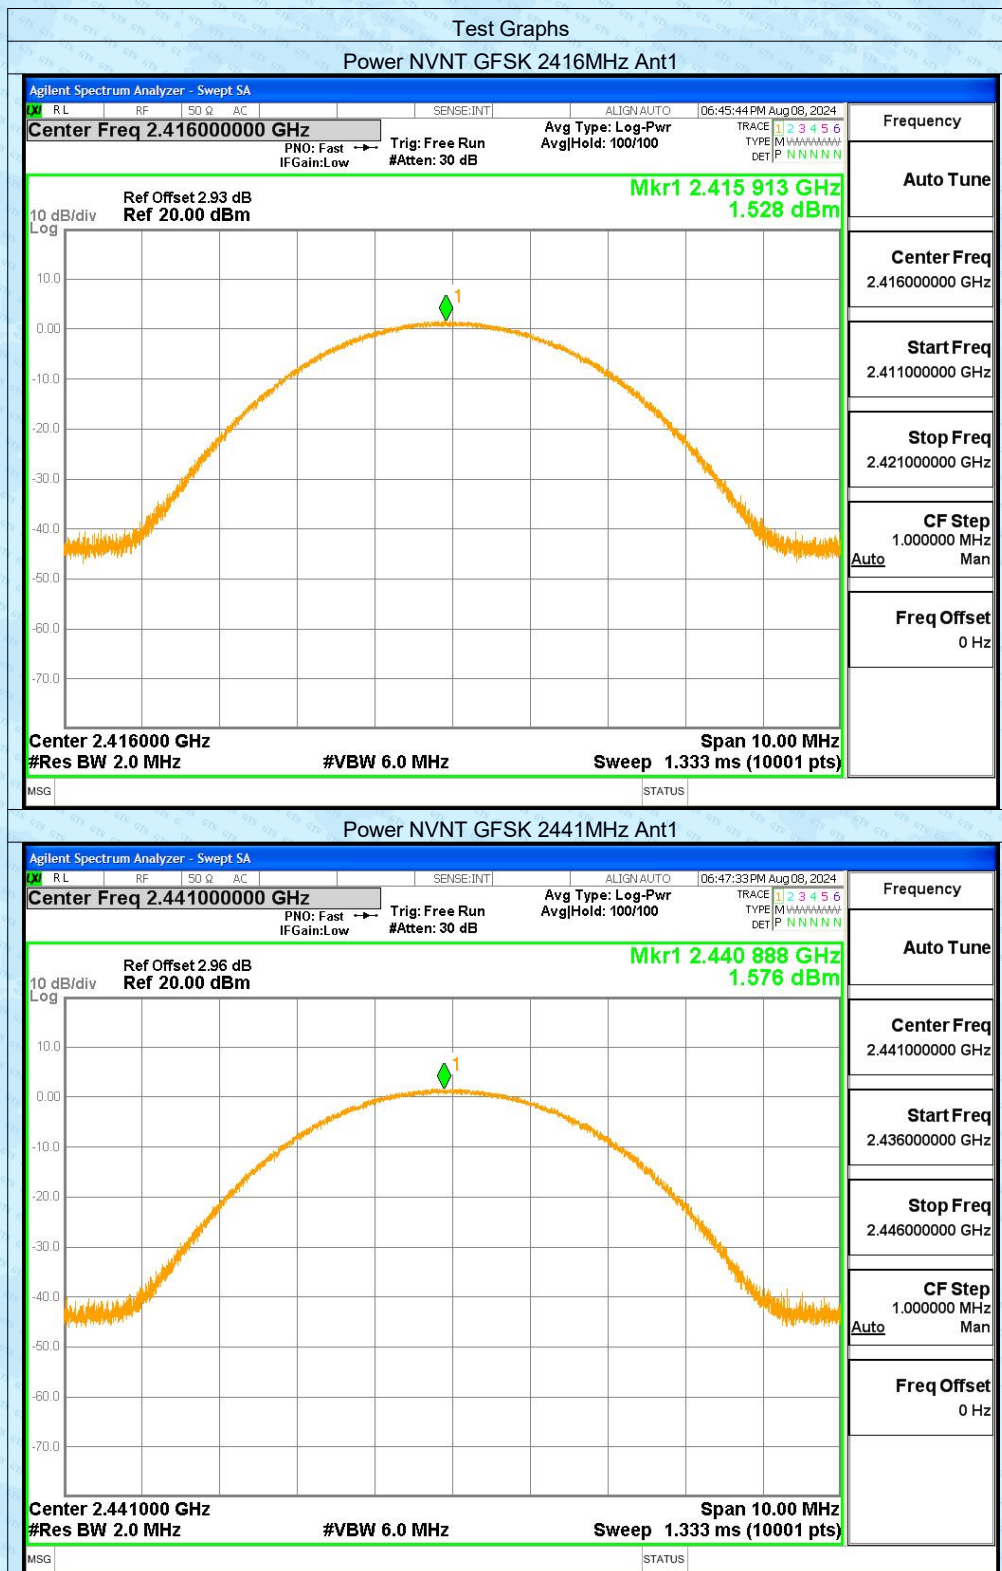


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	GFSK	2416	Ant1	1.53	30	Pass
		2441		1.58	30	Pass
		2466		1.96	30	Pass
		2416	Ant2	1.5	30	Pass
		2441		2	30	Pass
		2466		1.85	30	Pass

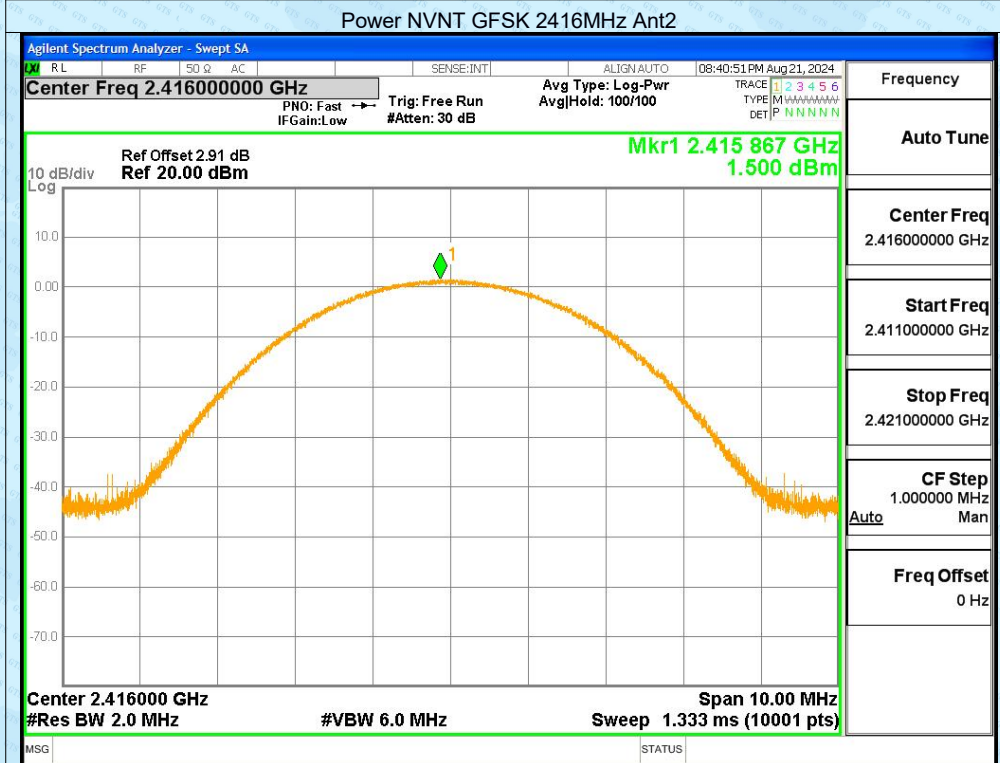


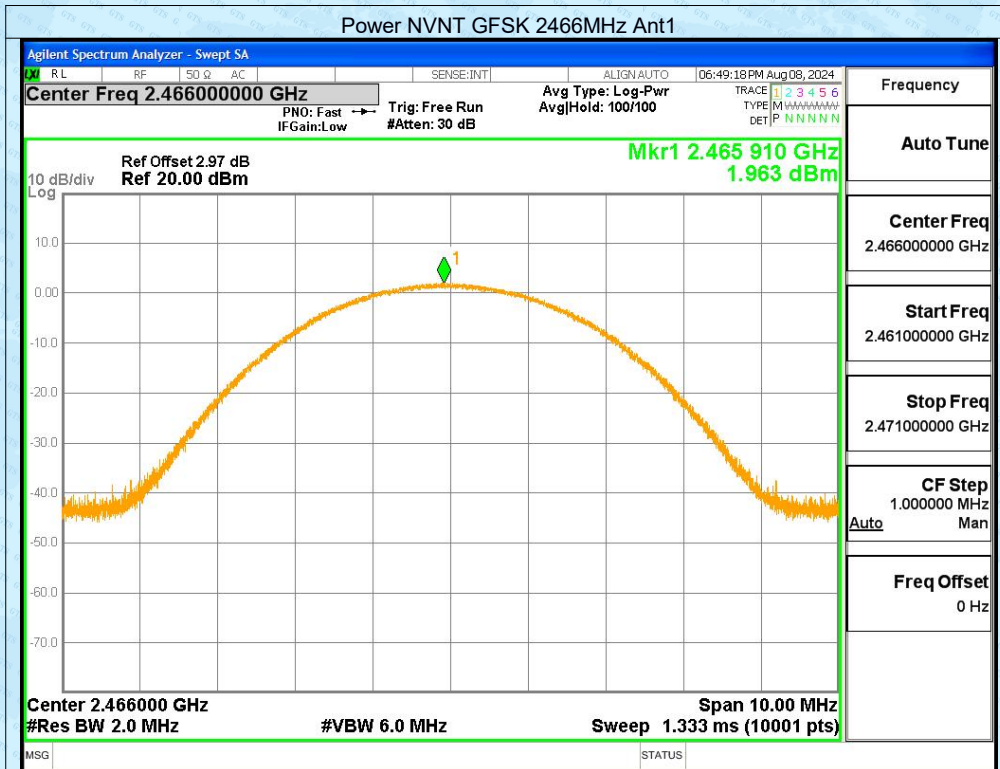


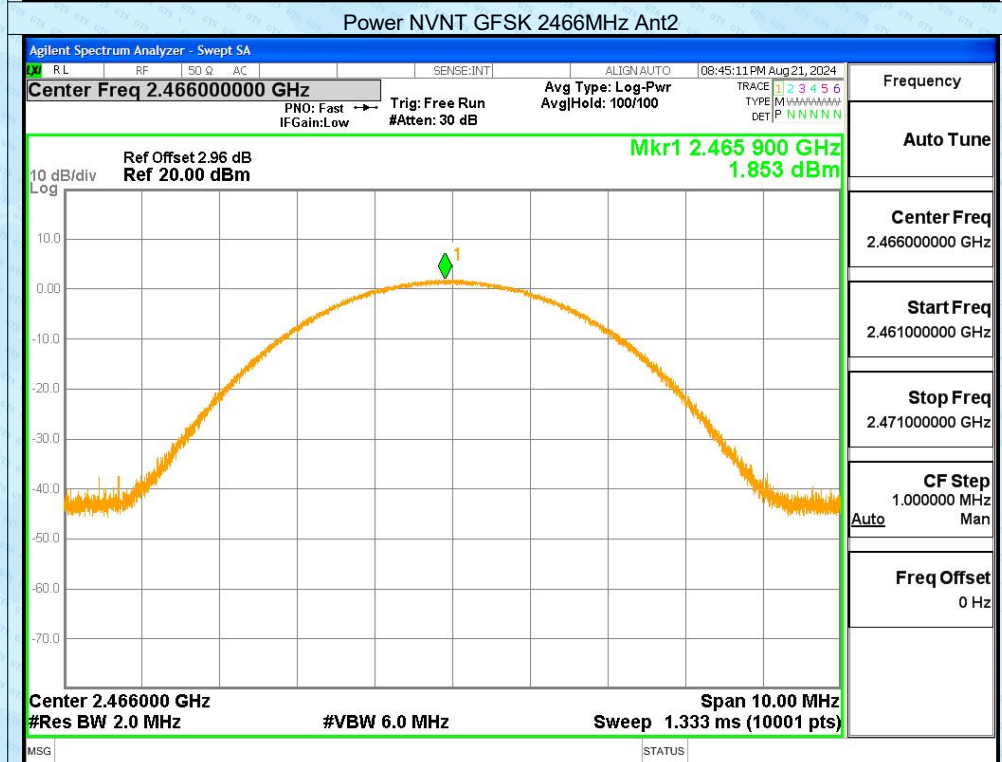
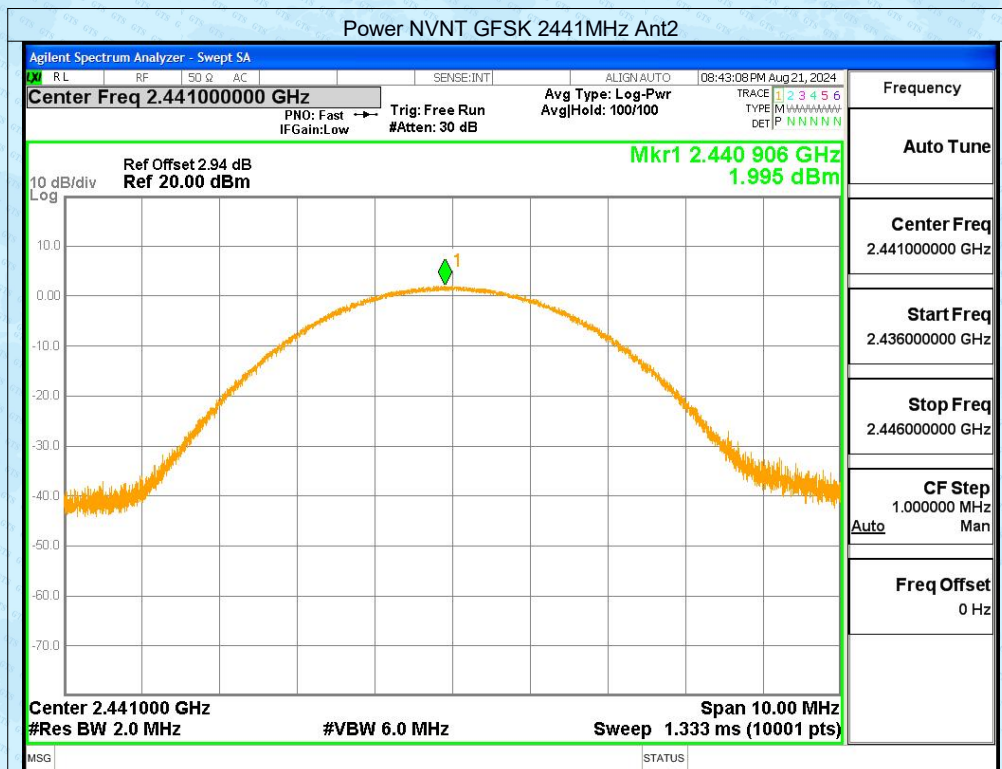


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	GFSK	2416	Ant1	0.96	0.5	Pass
		2441		0.929	0.5	Pass
		2466		0.912	0.5	Pass
		2416	Ant2	0.909	0.5	Pass
		2441		0.897	0.5	Pass
		2466		0.92	0.5	Pass



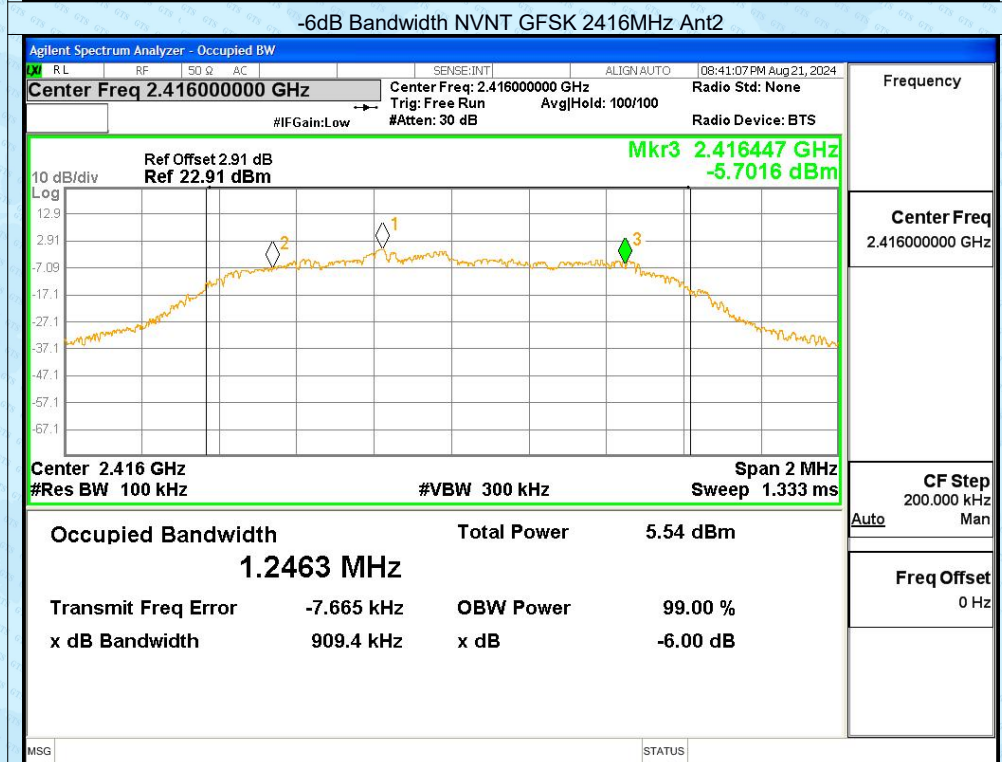
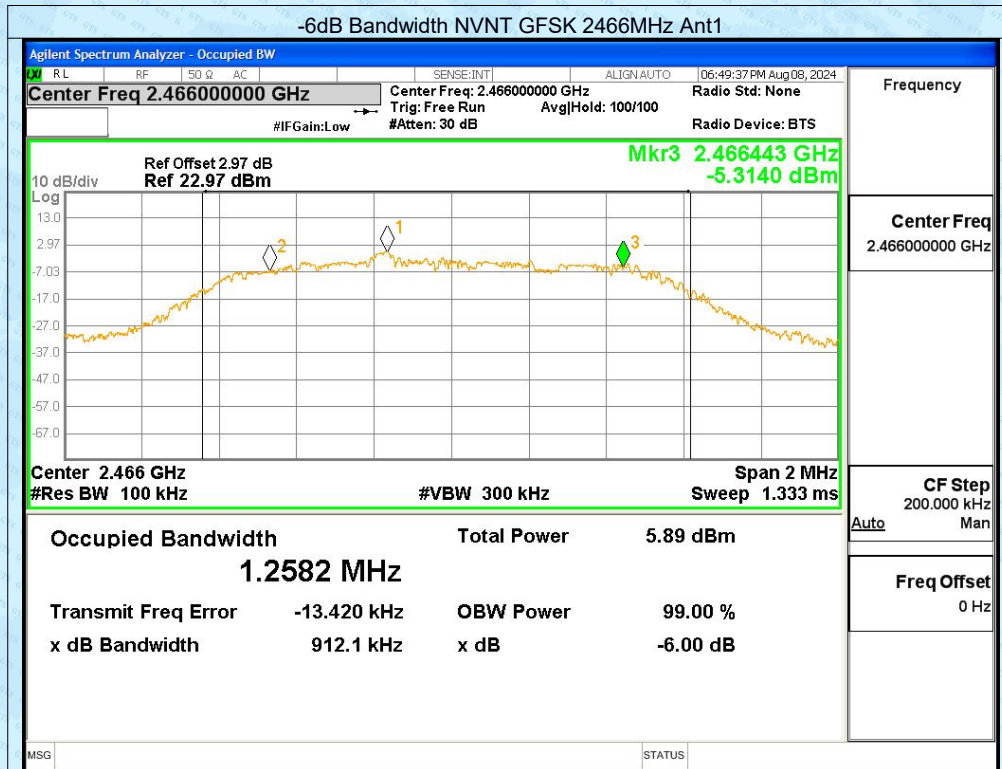


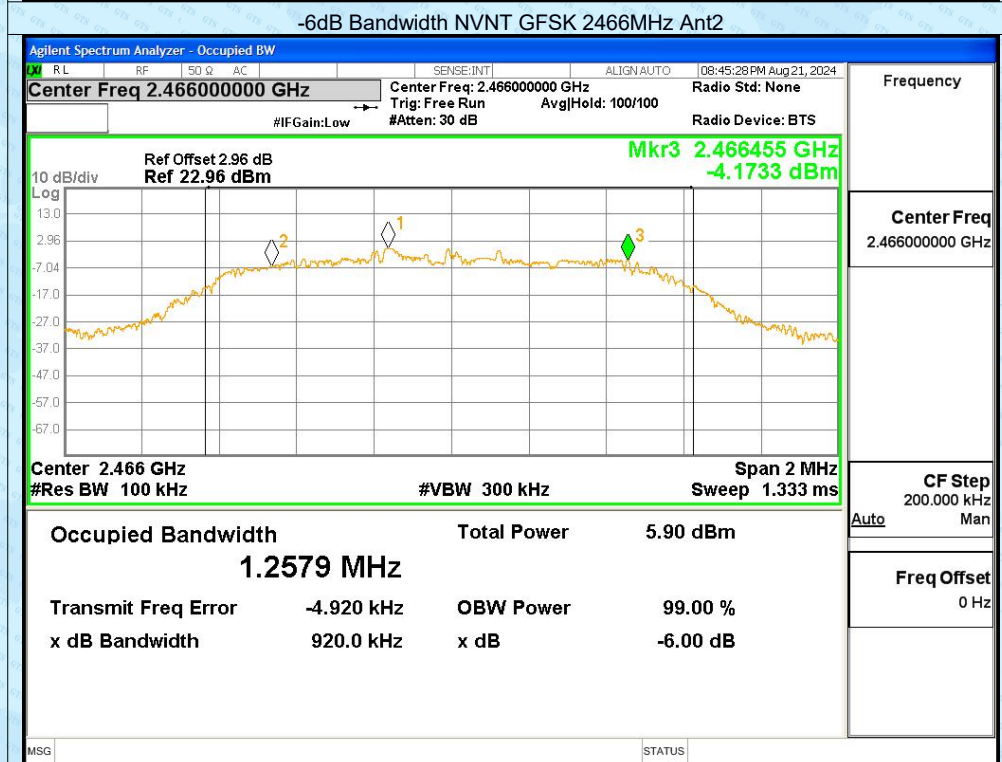
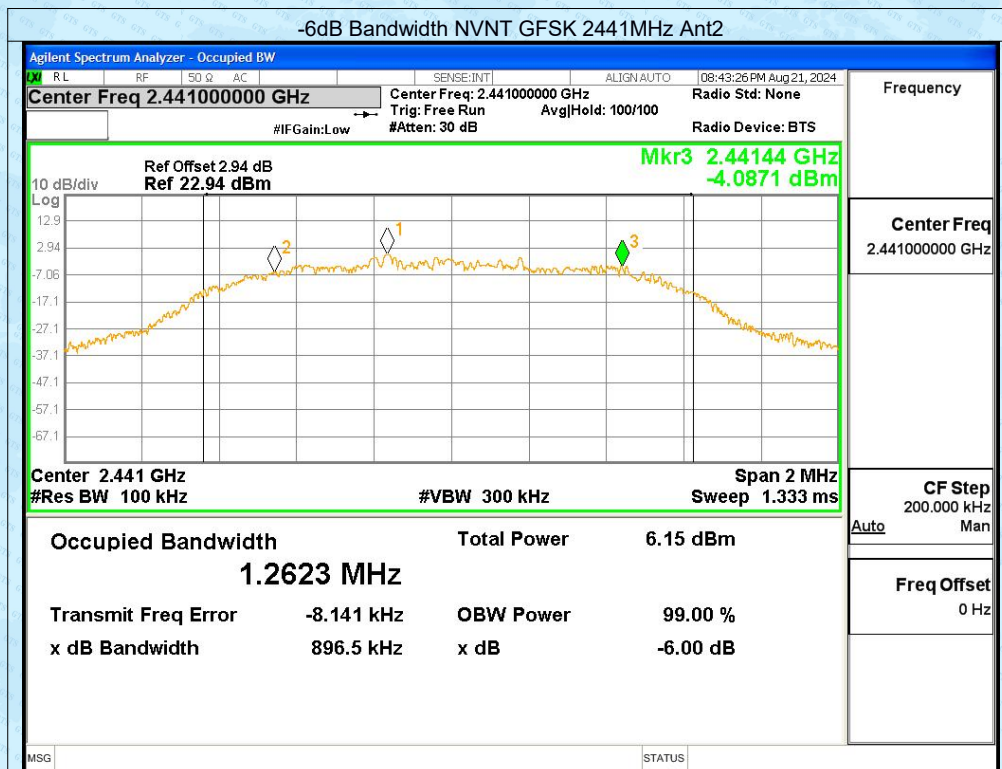


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	GFSK	2416	Ant1	1.216
		2441		1.23
		2466		1.233
		2416	Ant2	1.227
		2441		1.217
		2466		1.231



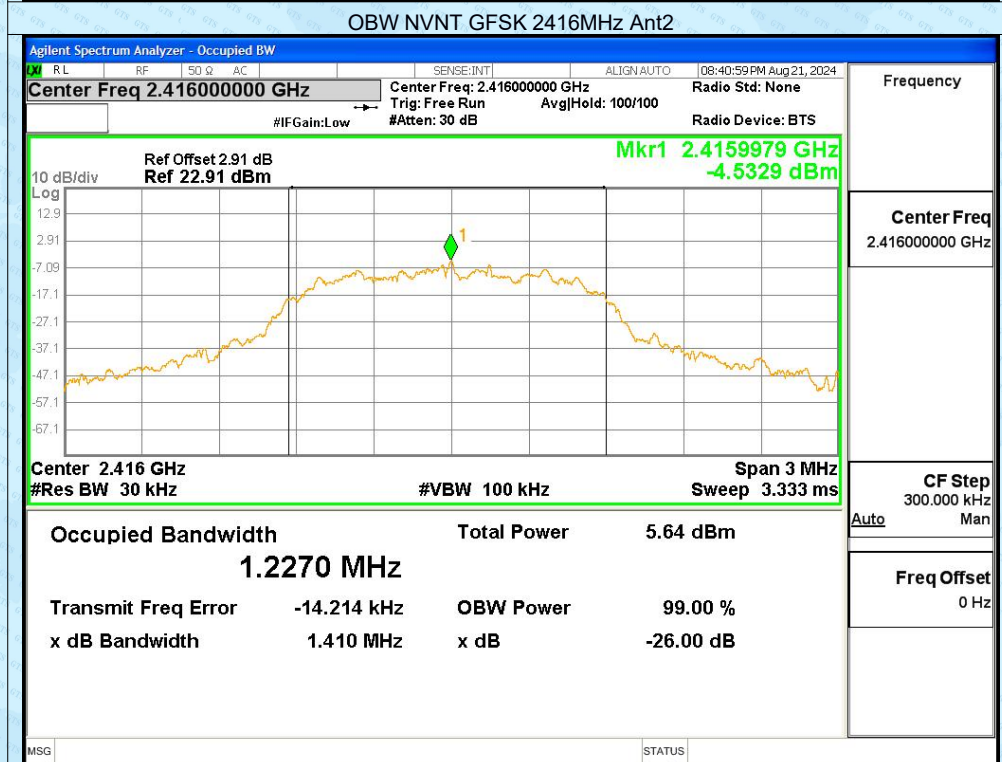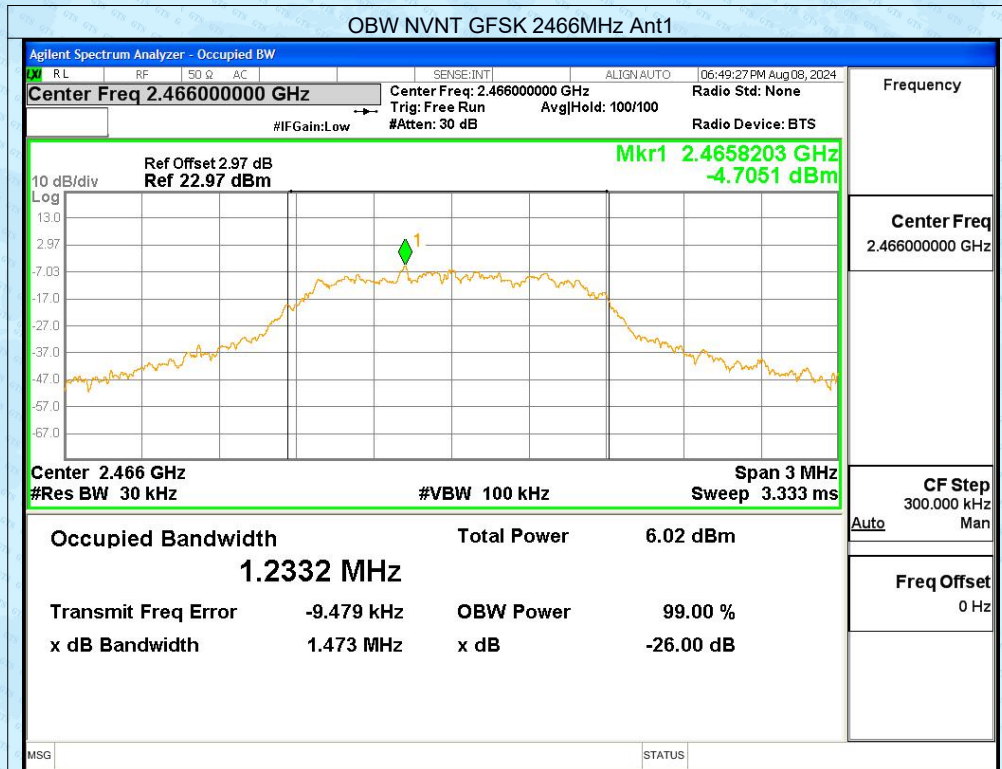


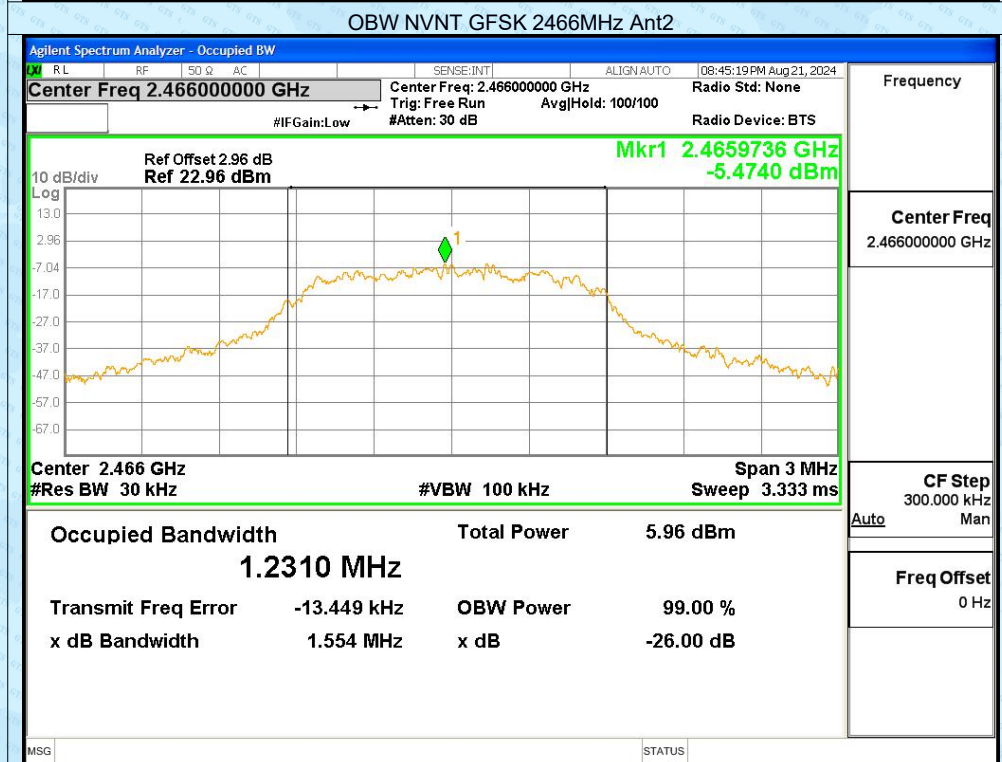
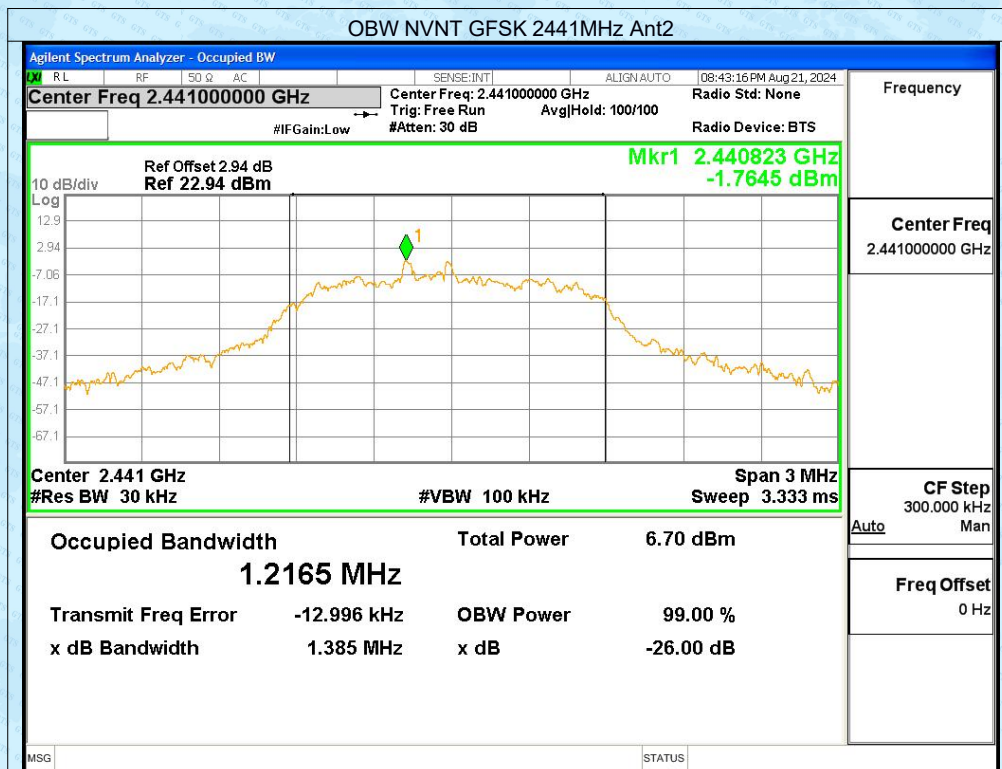




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/100kHz)	RB factor (db)	result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	GFSK	2416	Ant1	-0.22	-15.2	-15.42	8	Pass
		2441		-0.13	-15.2	-15.33	8	Pass
		2466		0.18	-15.2	-15.02	8	Pass
		2416	Ant2	-0.1	-15.2	-15.3	8	Pass
		2441		0.34	-15.2	-14.86	8	Pass
		2466		-0.16	-15.2	-15.36	8	Pass

Note: RB factor=10log(3k/100k)

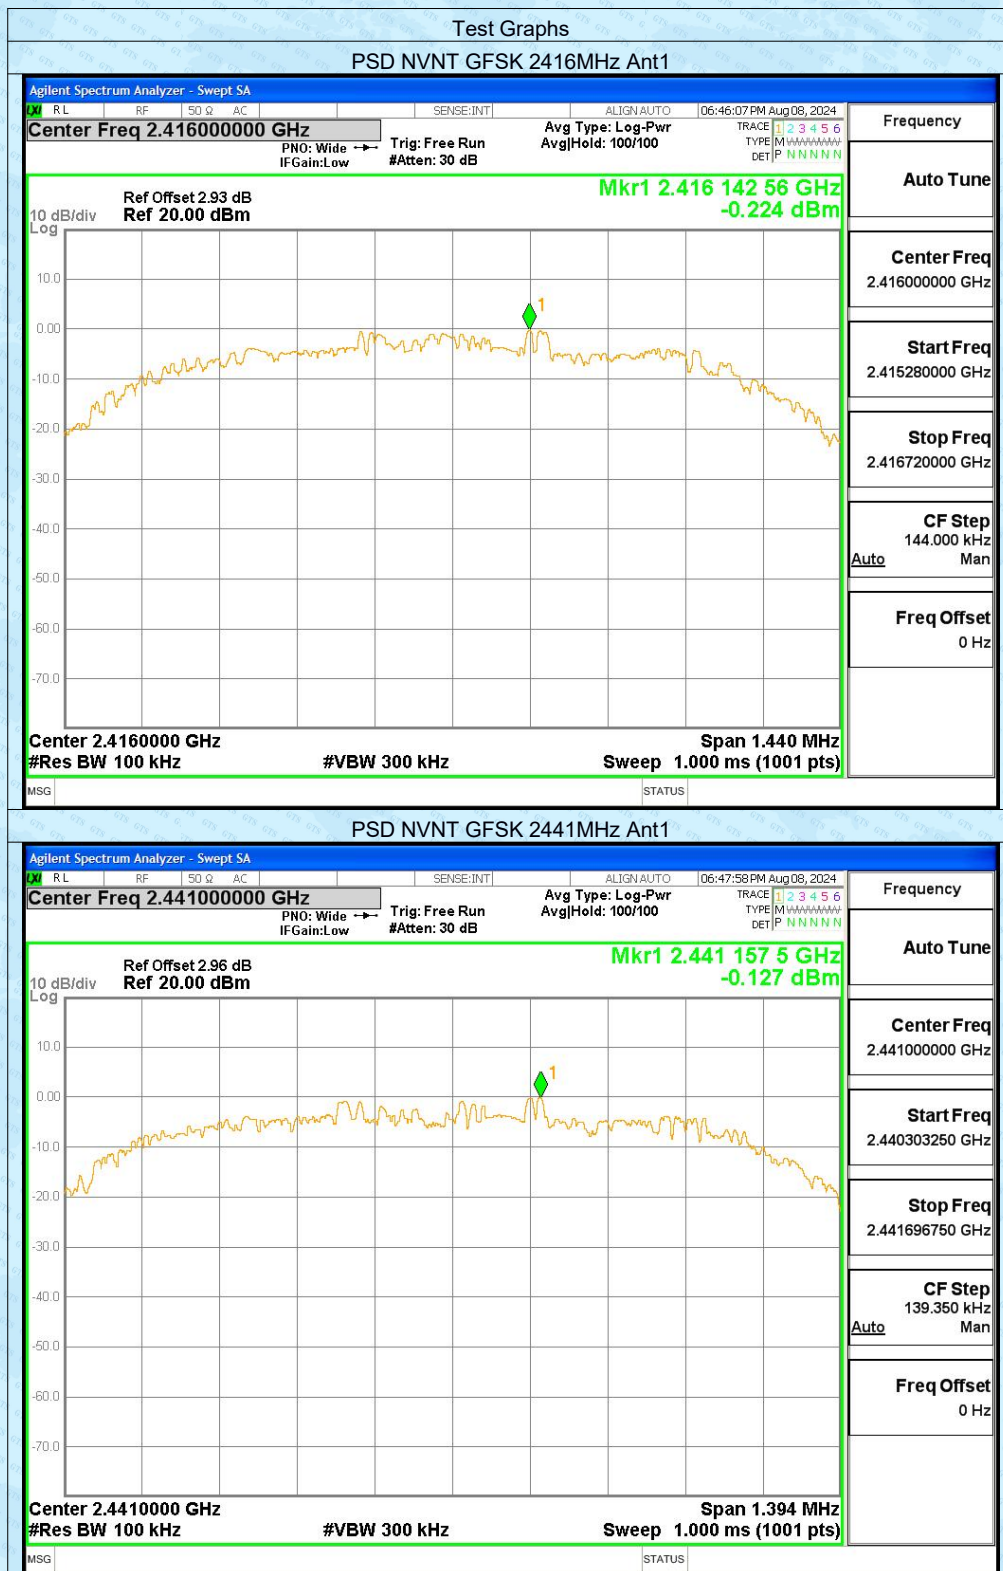


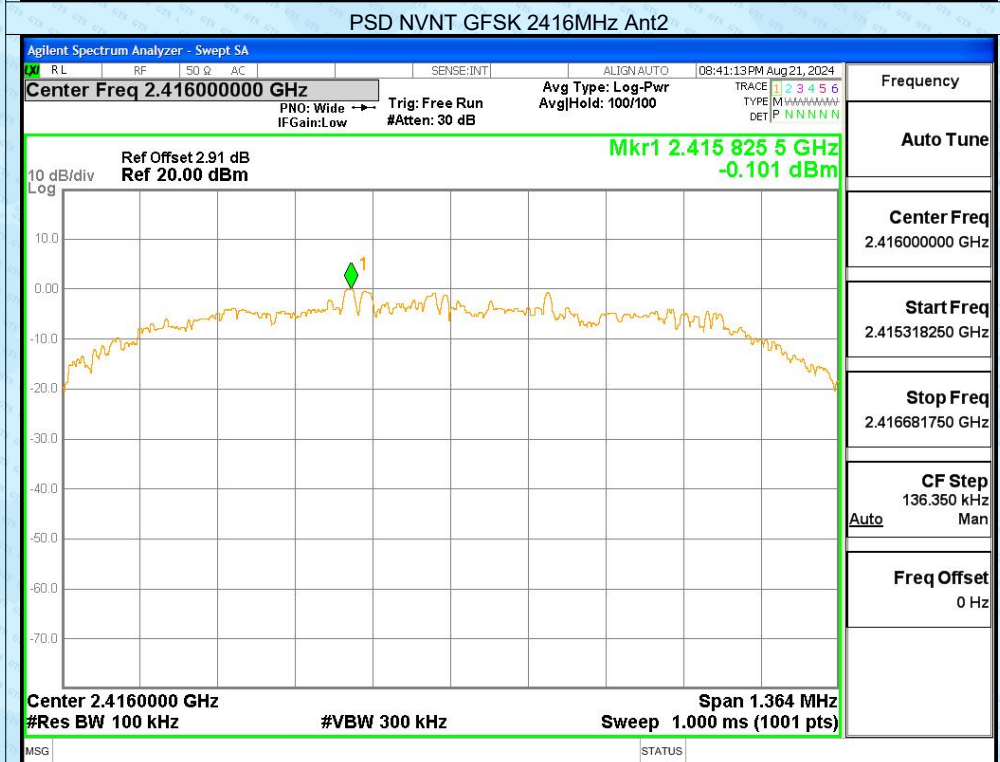
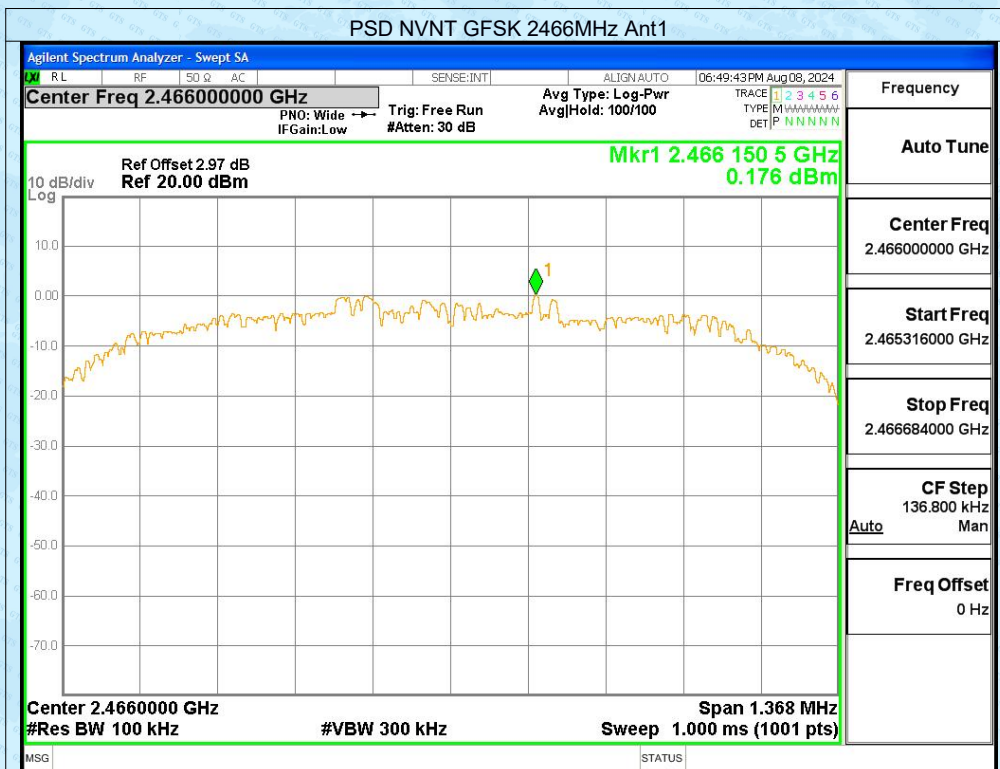


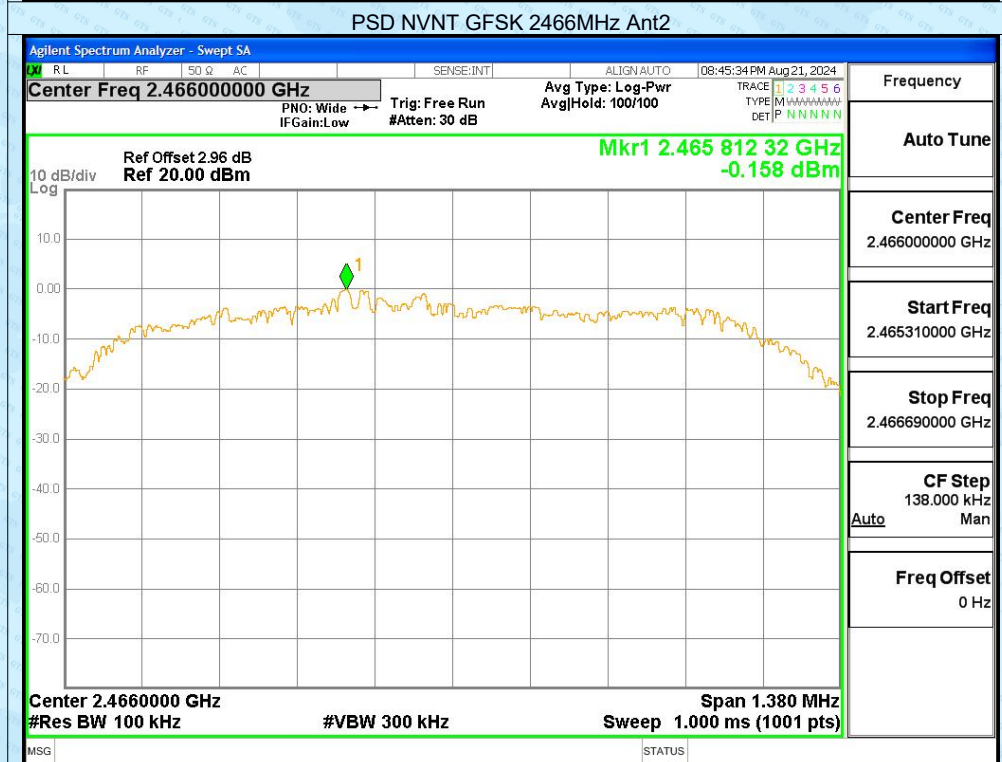
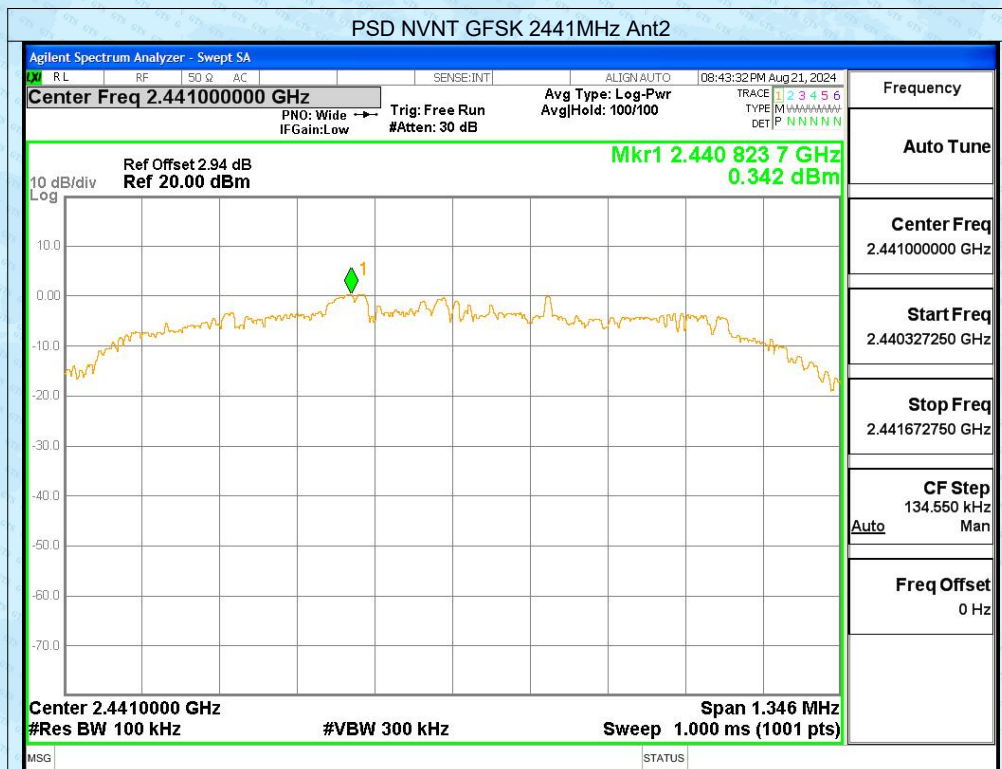




Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	GFSK	2416	Ant1	-51.77	-20	Pass
		2466		-51	-20	Pass
		2416	Ant2	-52.21	-20	Pass
		2466		-50.3	-20	Pass

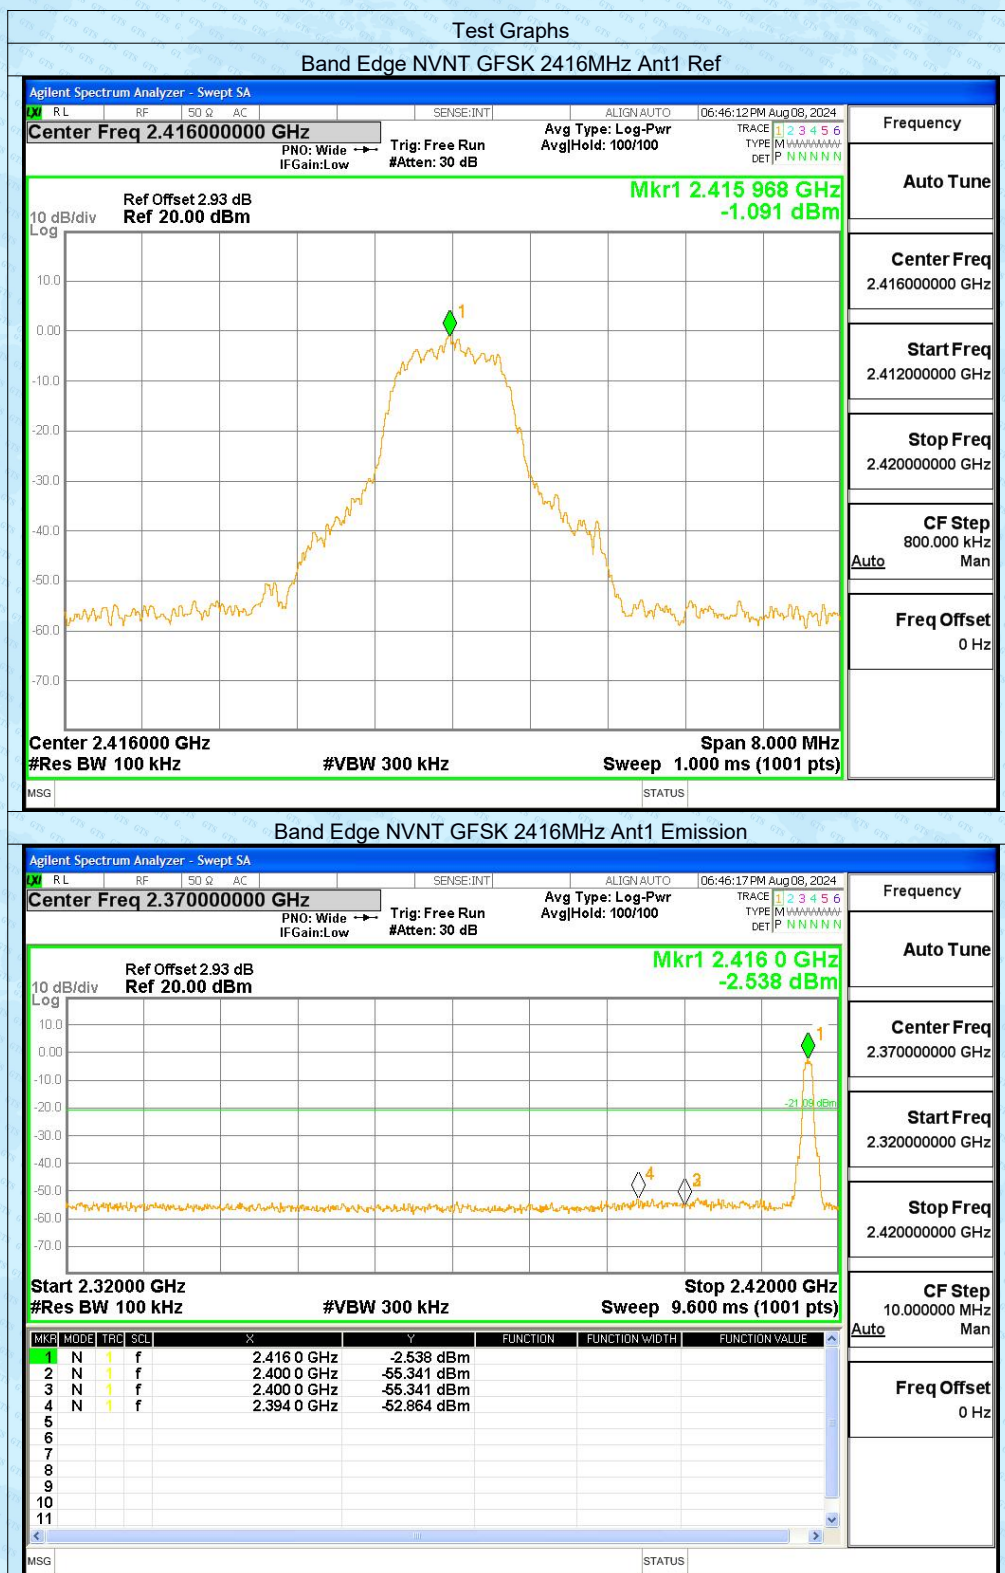

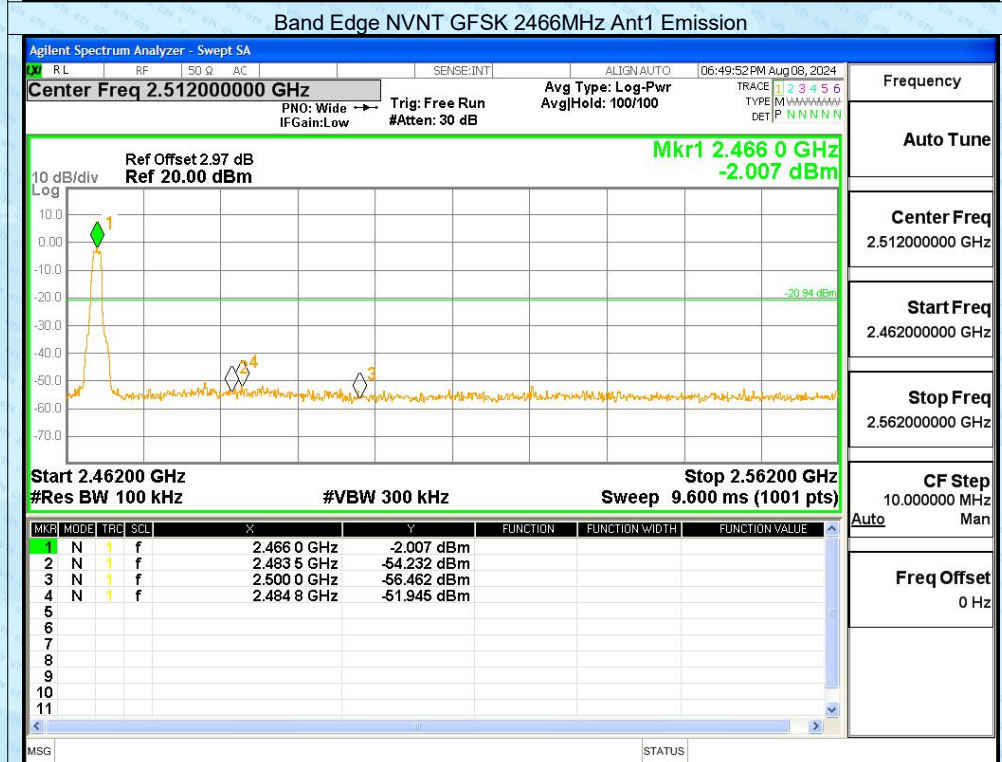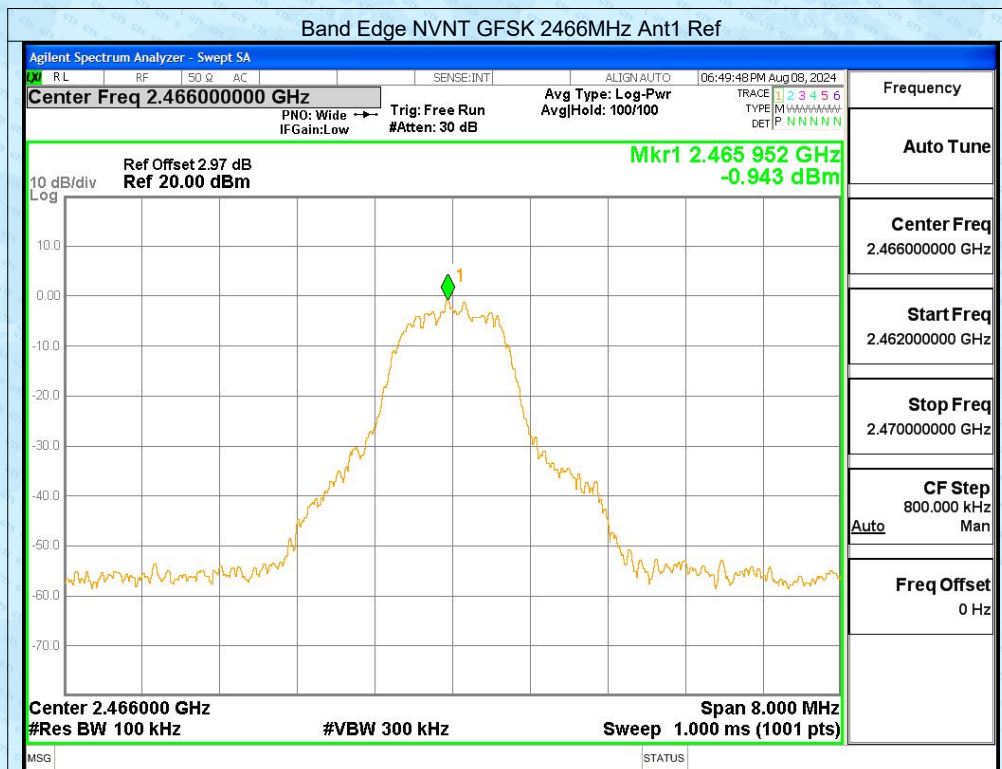


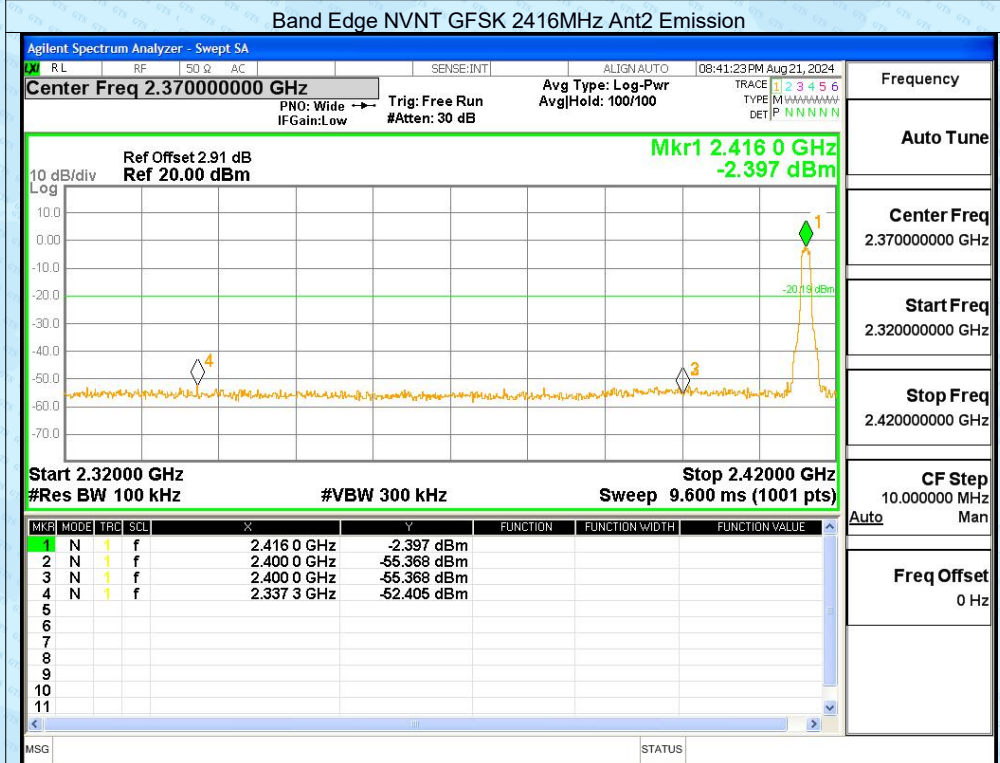
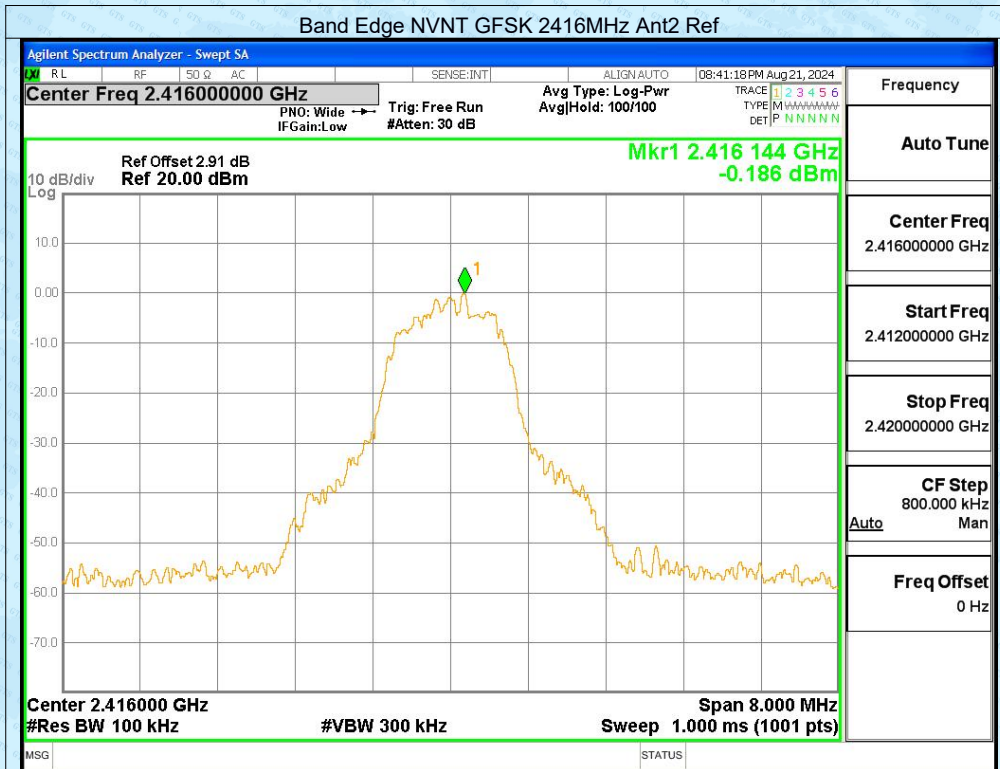


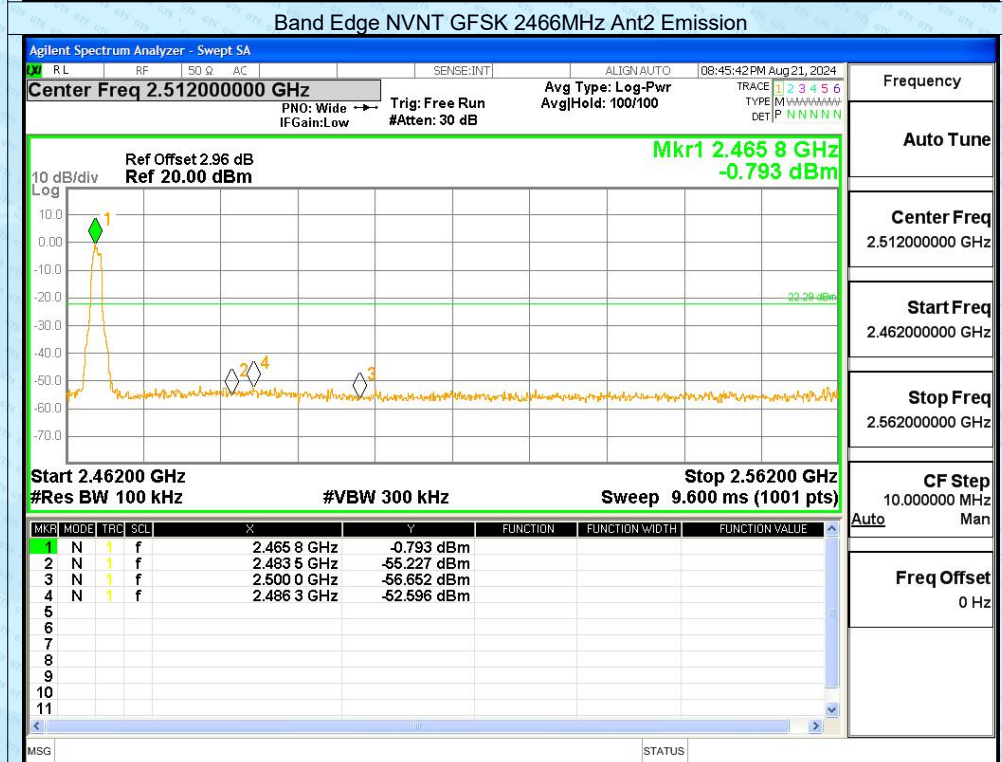
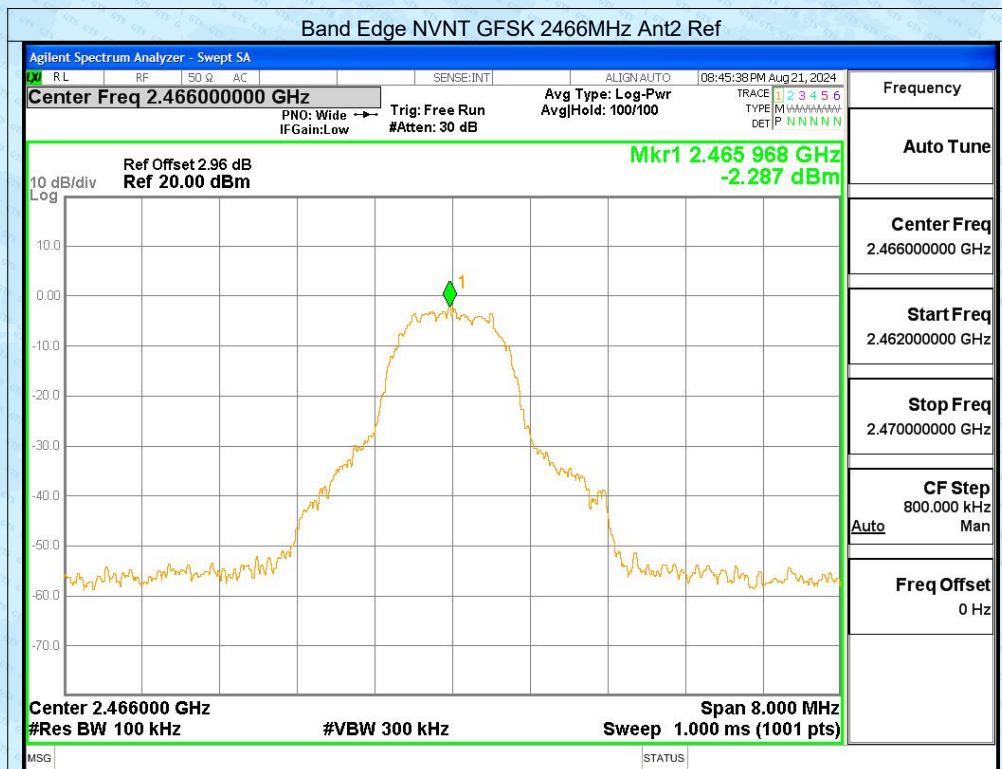




Conducted RF Spurious Emission



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	GFSK	2416	Ant1	-41.71	-20	Pass
		2441		-42.74	-20	Pass
		2466		-43.64	-20	Pass
		2416	Ant2	-42.42	-20	Pass
		2441		-41.51	-20	Pass
		2466		-42.6	-20	Pass


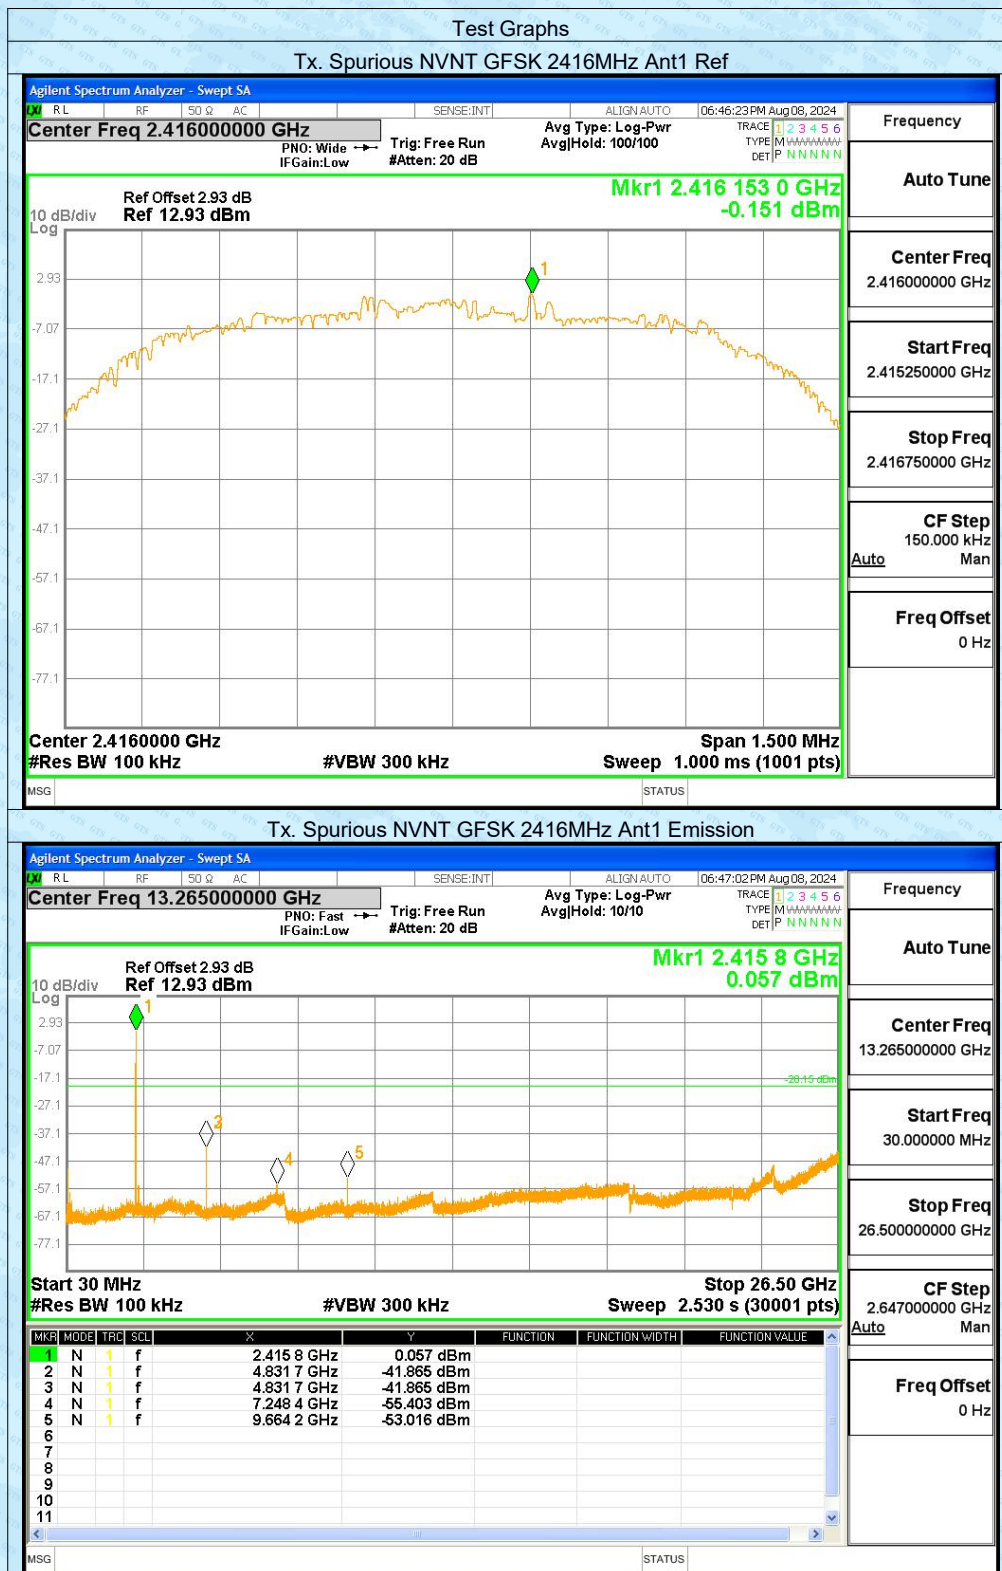


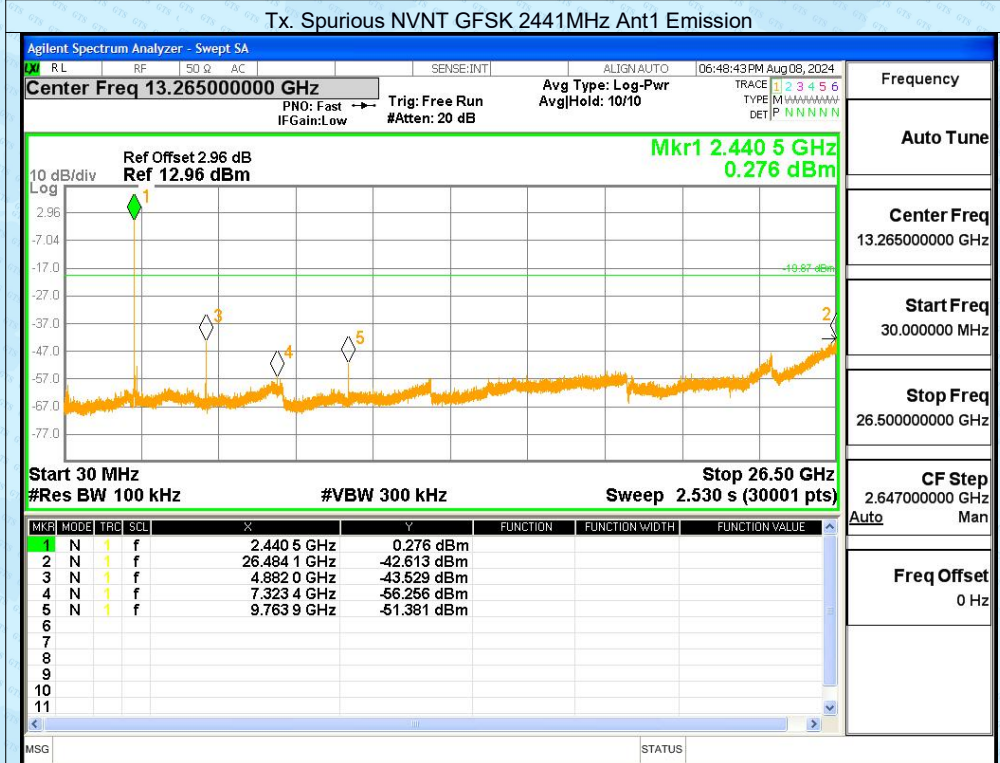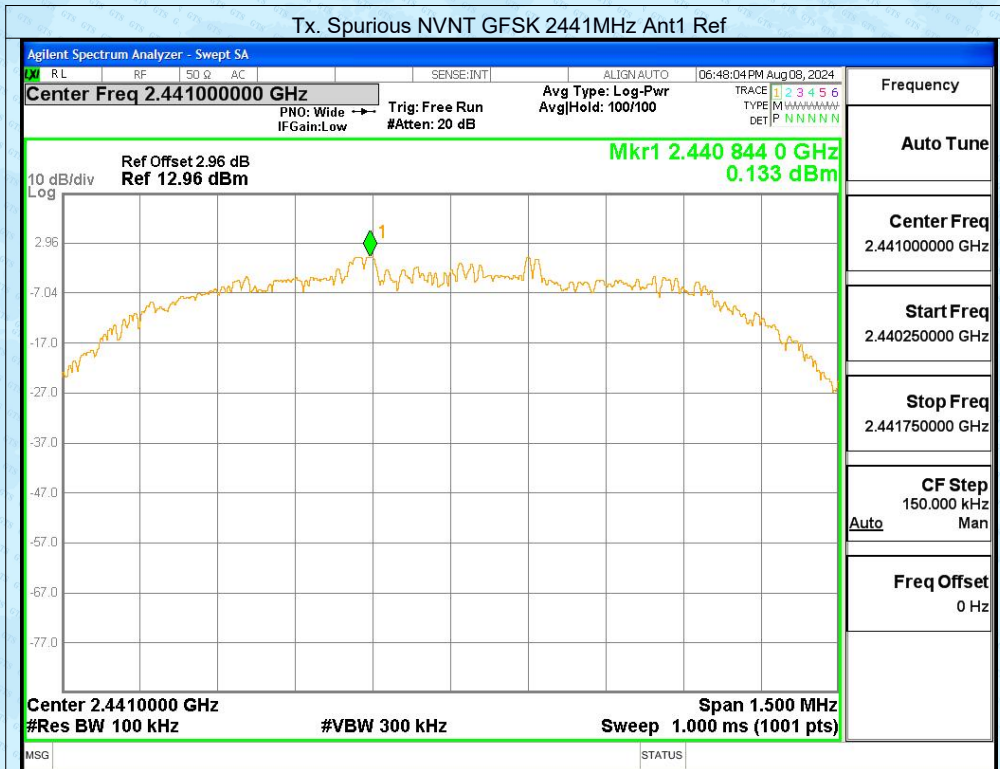

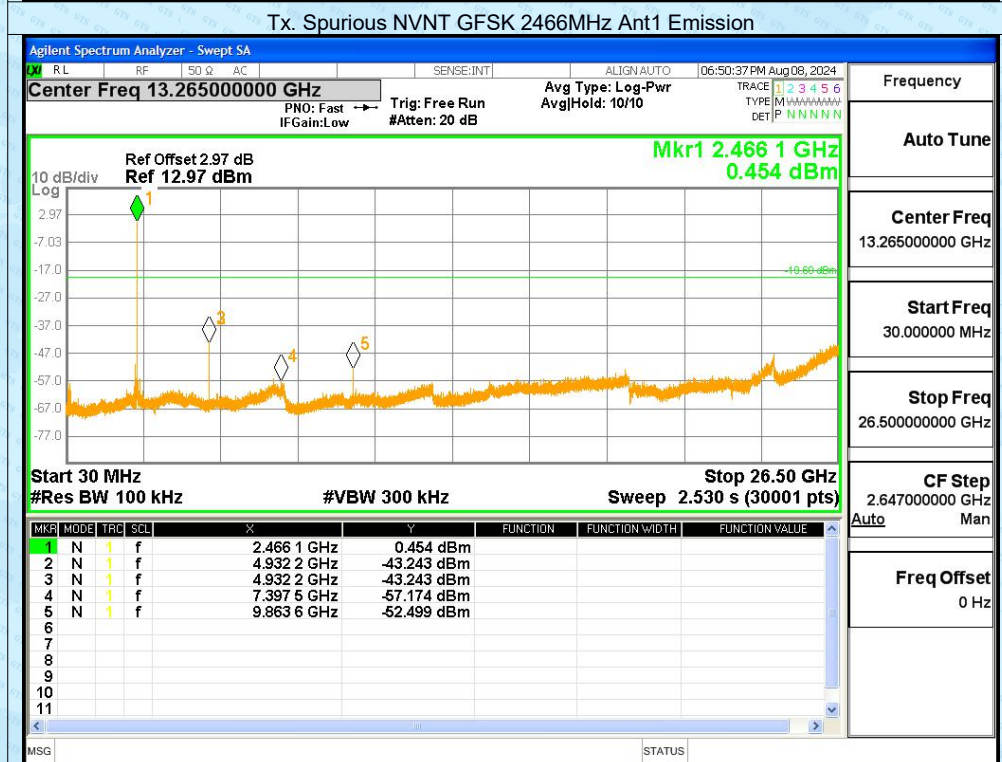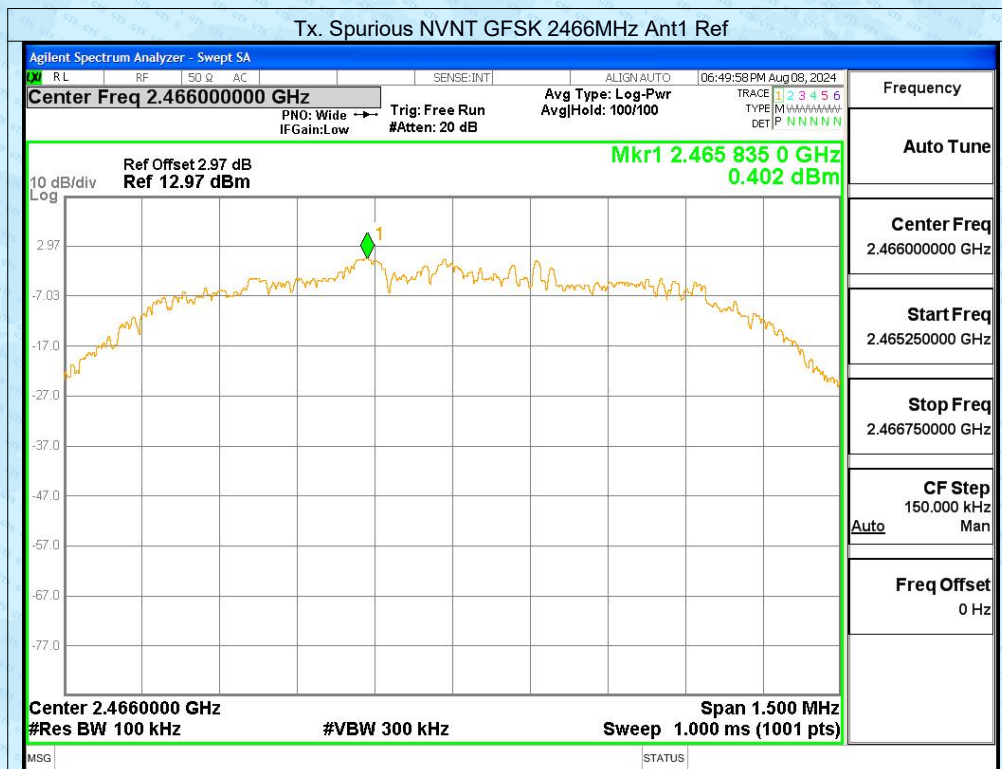

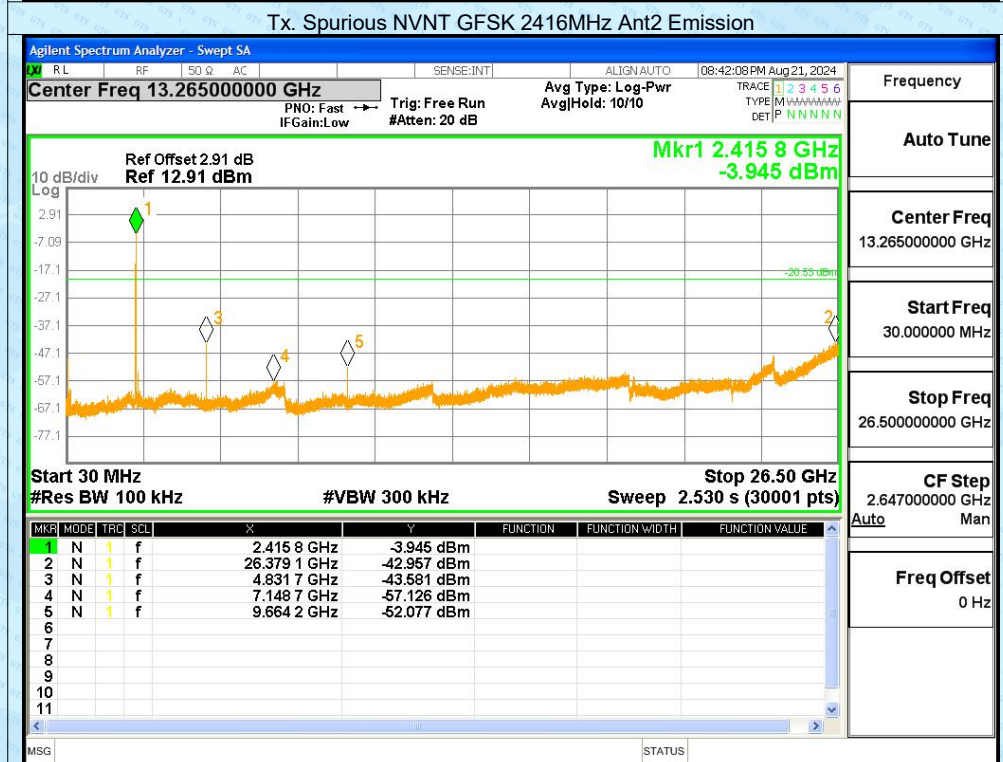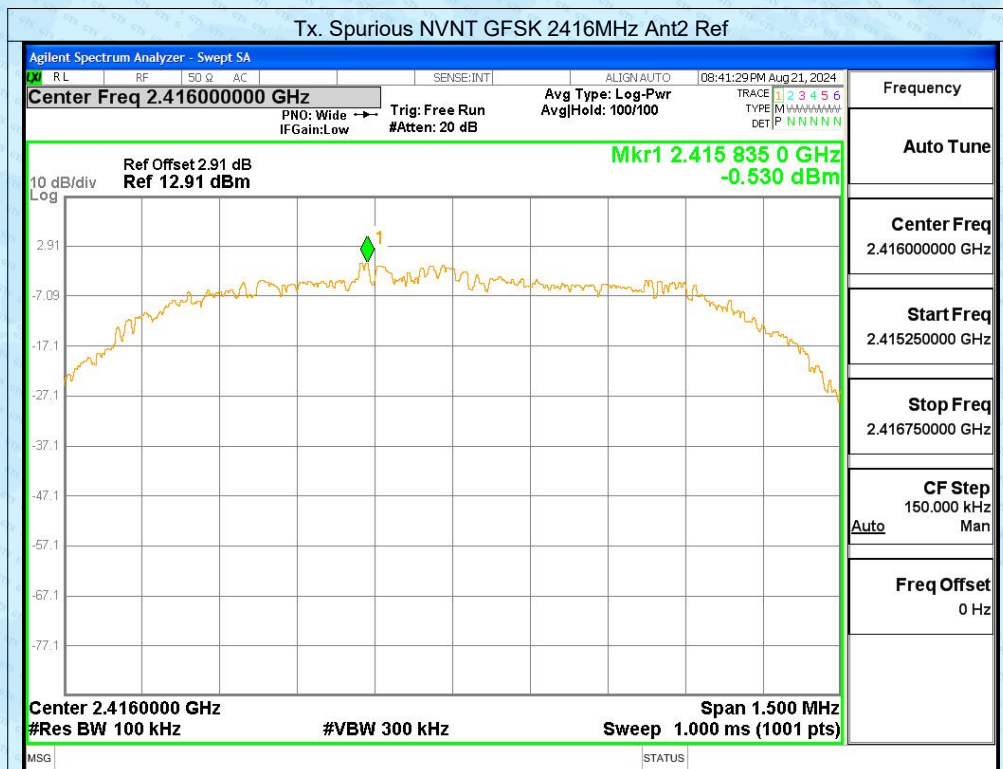

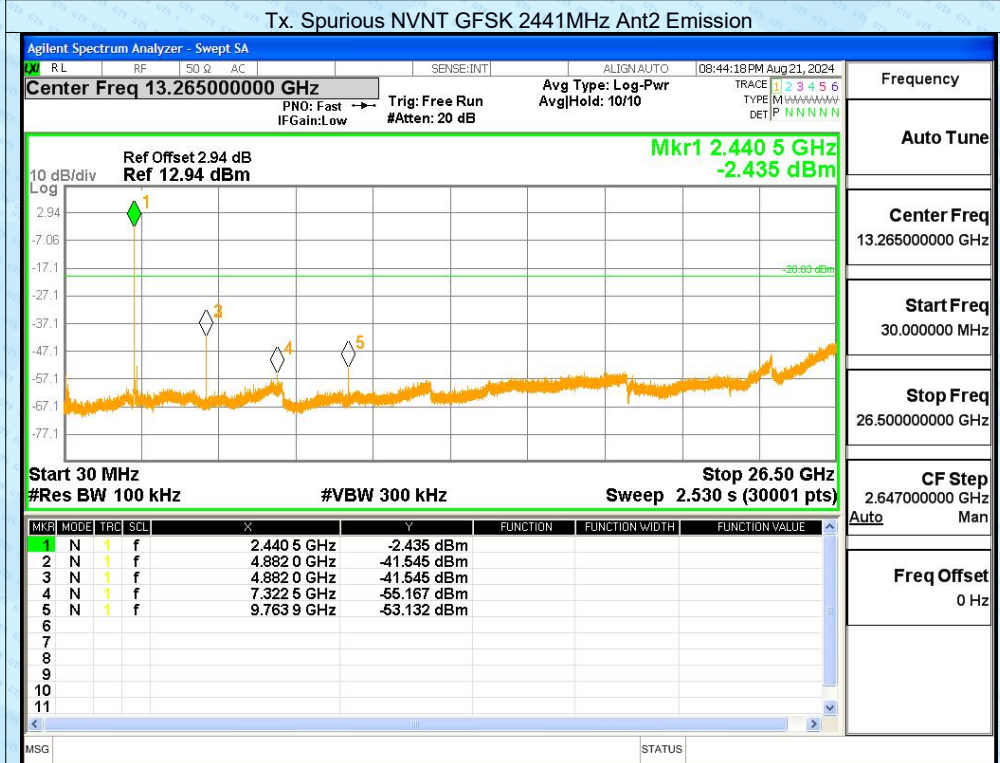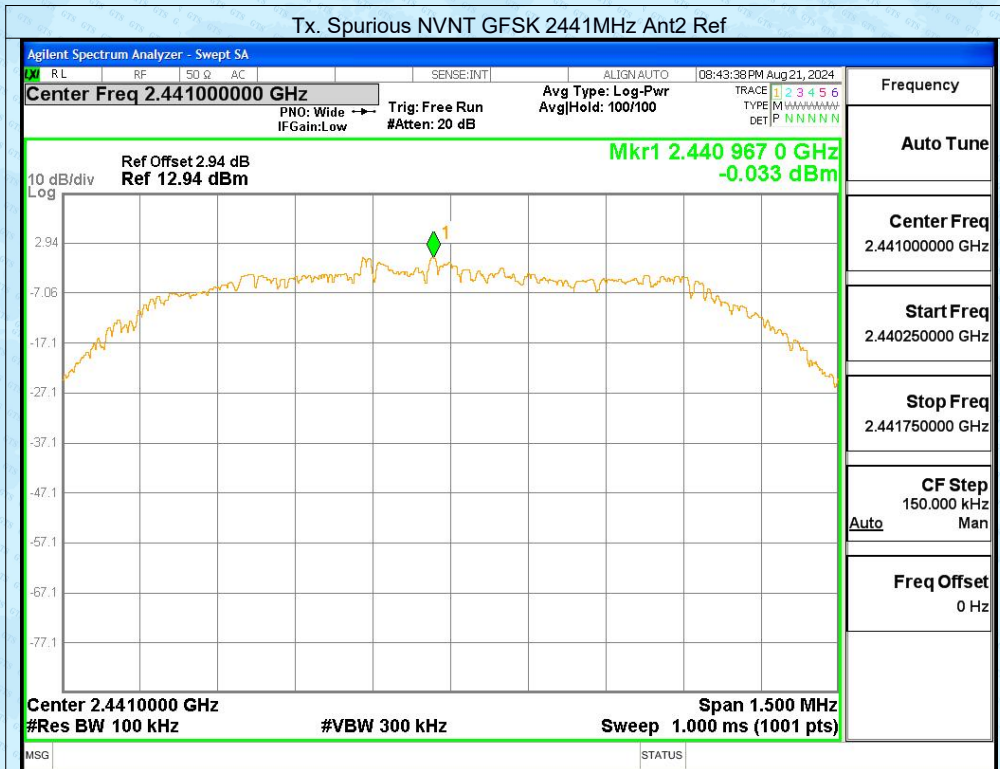

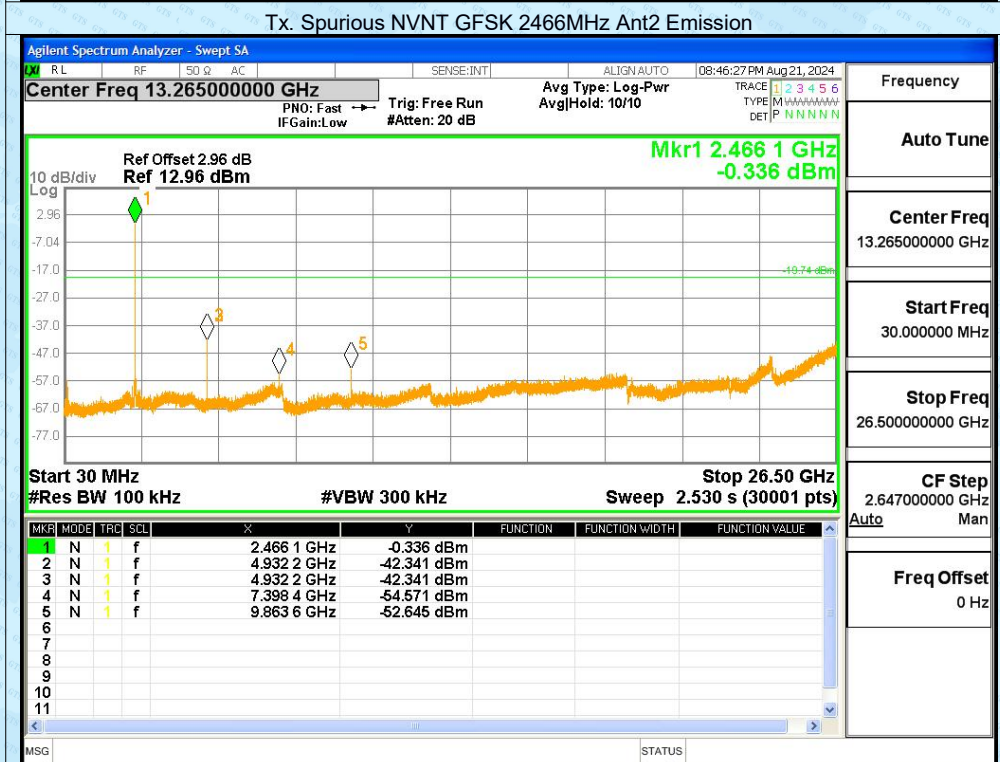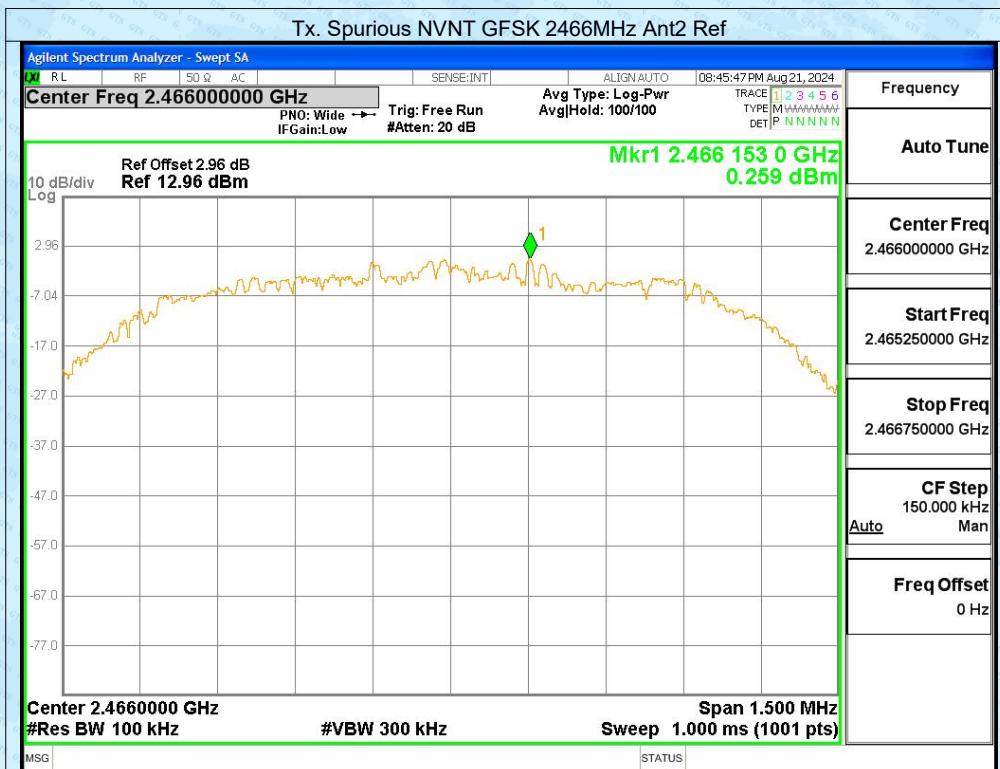

---End---