


Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	GFSK	2406	Ant1	76.85	1.14	0.35
		2443		76.8	1.15	0.35
		2480		76.8	1.15	0.35


Test Graphs

Duty Cycle NVNT GFSK 2406MHz Ant1

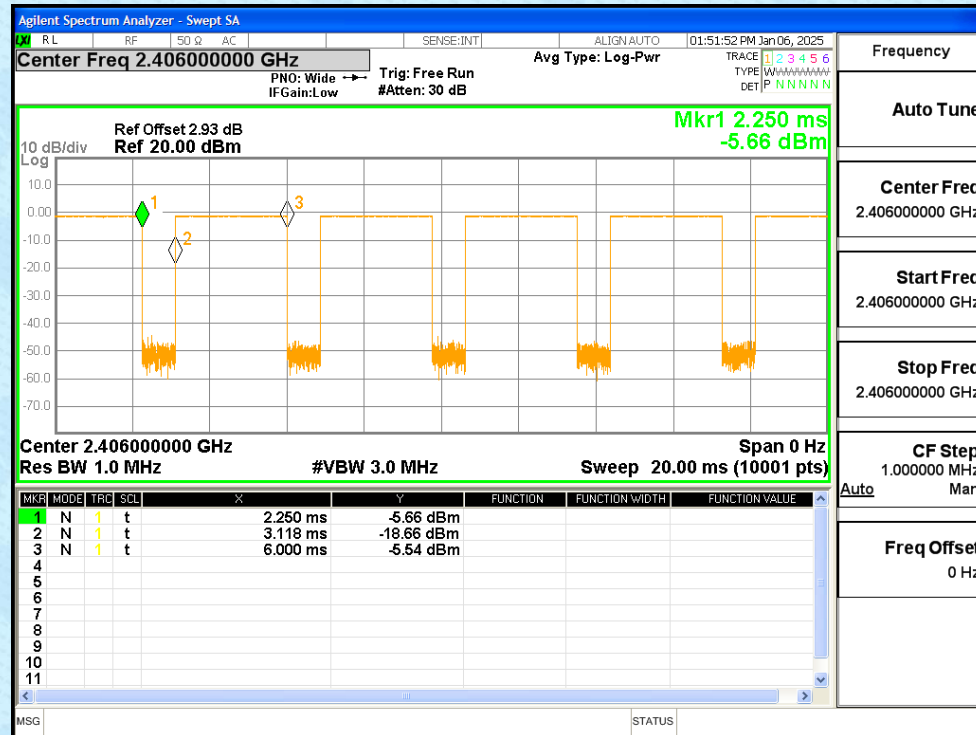


Duty Cycle NVNT GFSK 2443MHz Ant1

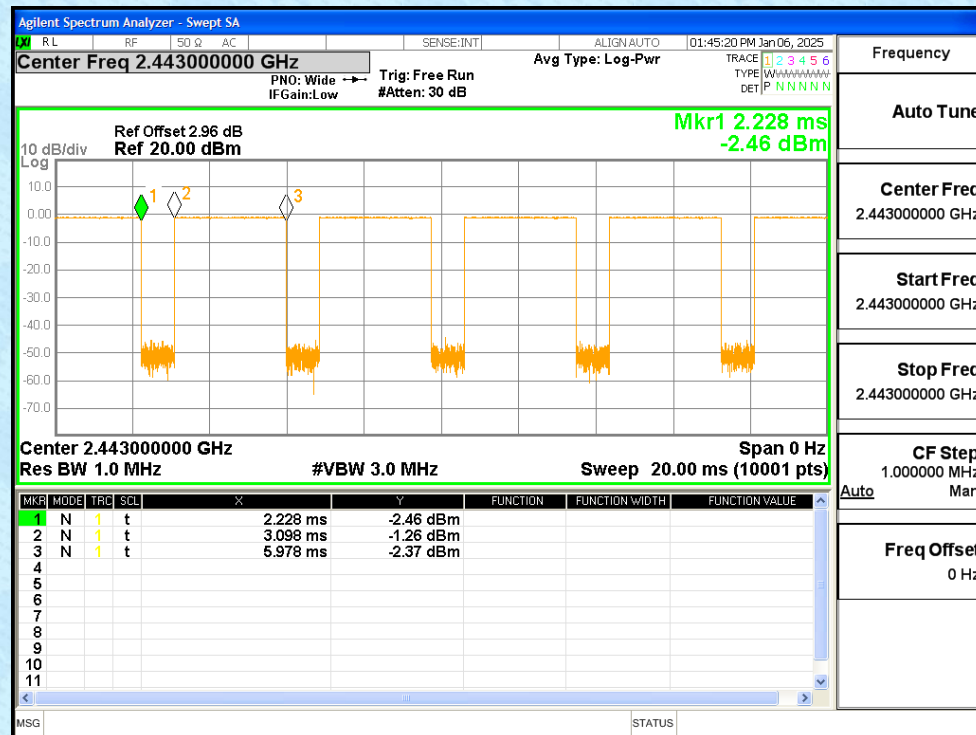


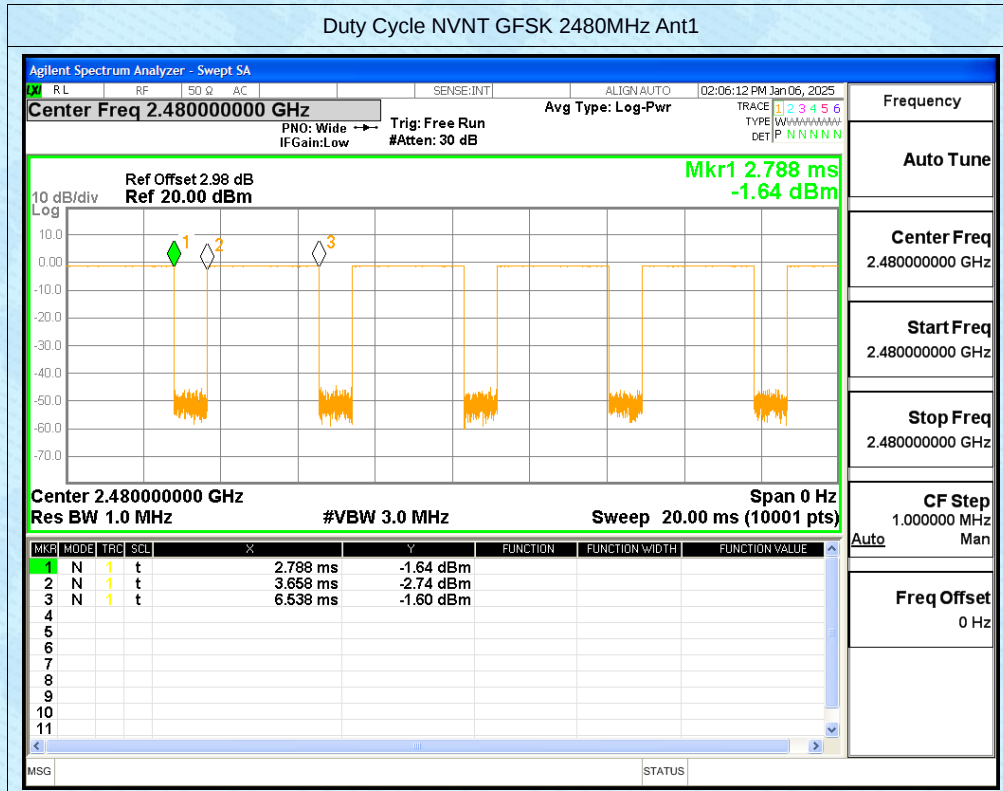

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	GFSK	2406	Ant1	-1.18	30	Pass
		2443		-0.91	30	Pass
		2480		-1	30	Pass

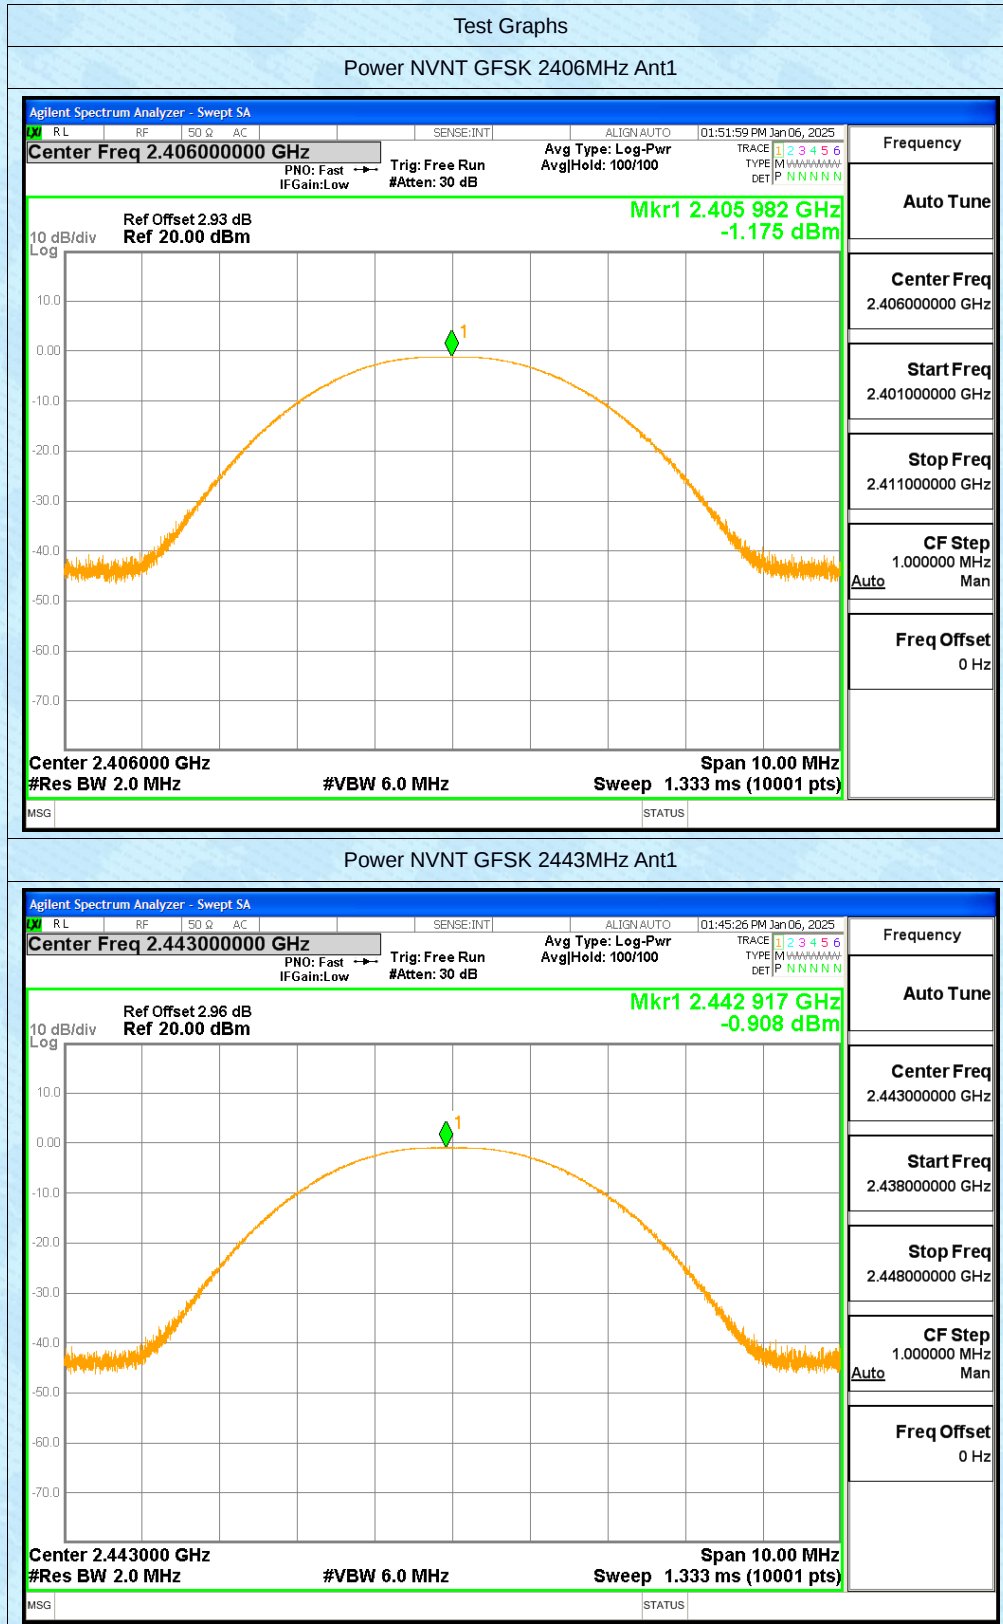

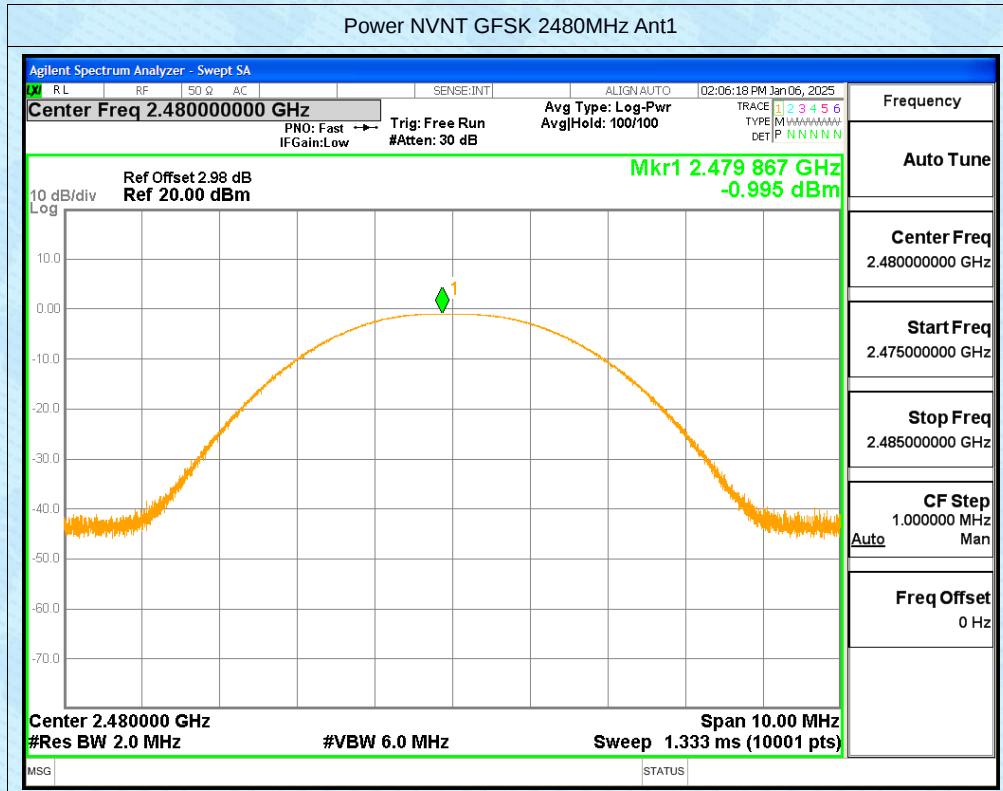


-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	GFSK	2406	Ant1	0.503	0.5	Pass
		2443		0.506	0.5	Pass
		2480		0.508	0.5	Pass


Test Graphs

-6dB Bandwidth NVNT GFSK 2406MHz Ant1

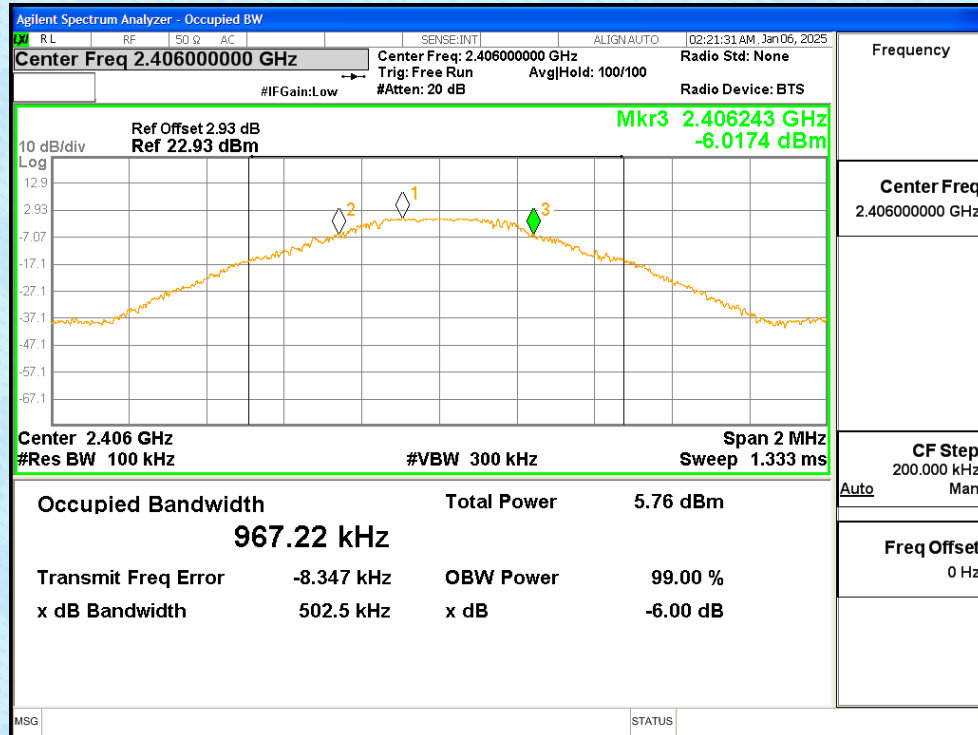

-6dB Bandwidth NVNT GFSK 2443MHz Ant1

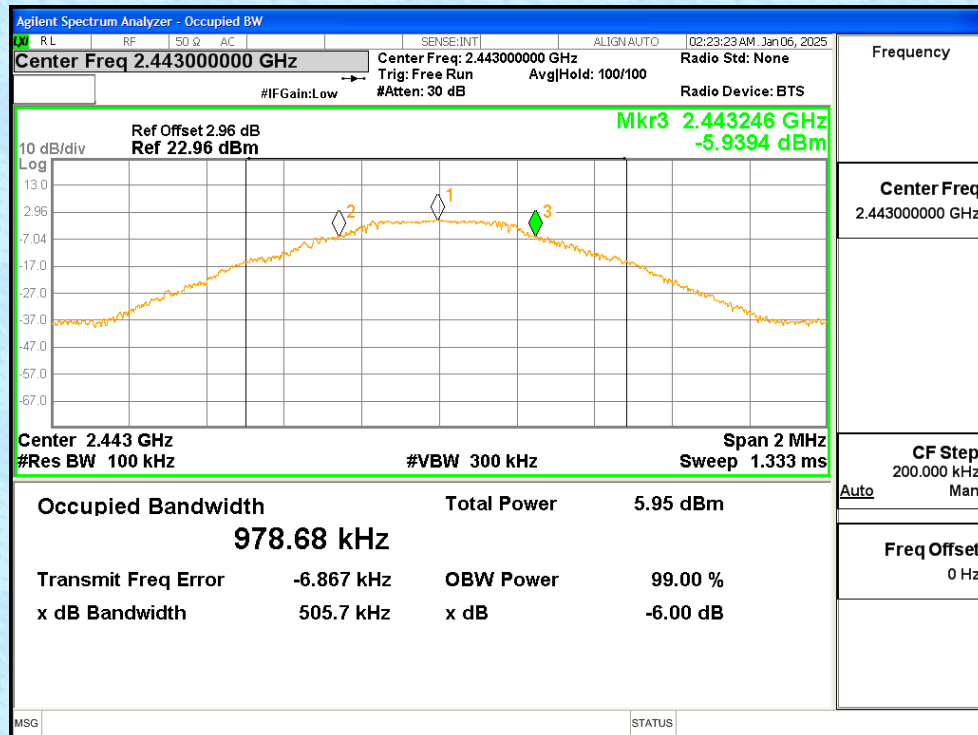

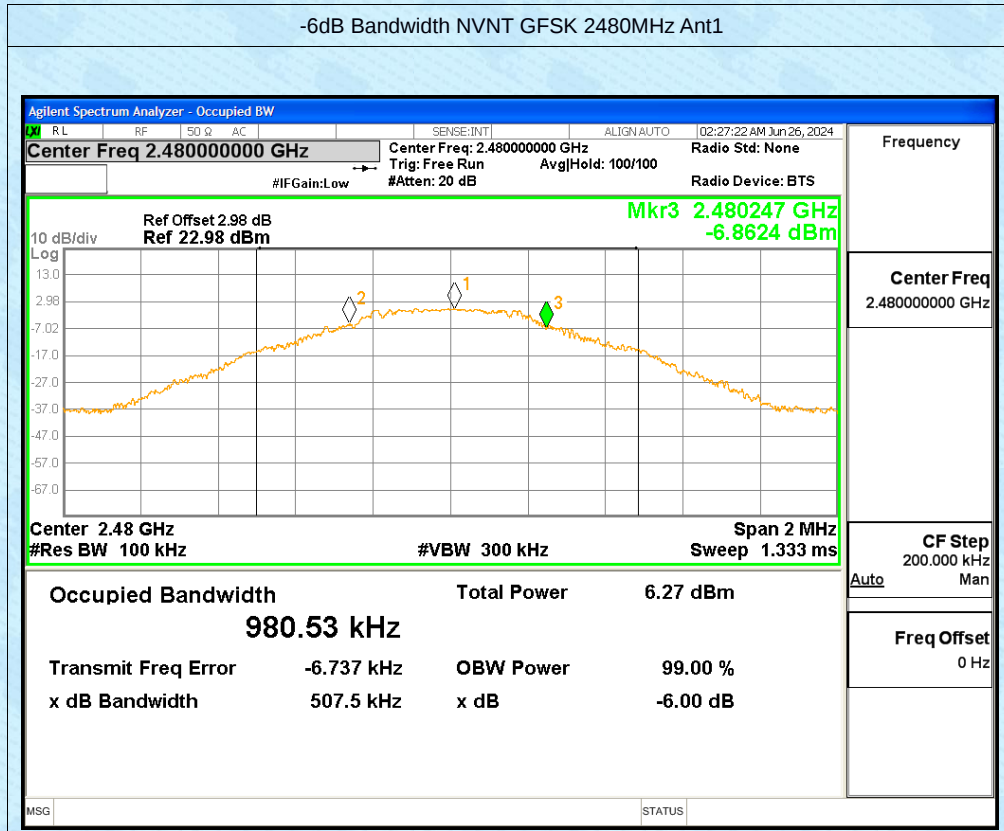


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	GFSK	2406	Ant1	0.934
		2443		0.935
		2480		0.962


Test Graphs

OBW NVNT GFSK 2406MHz Ant1

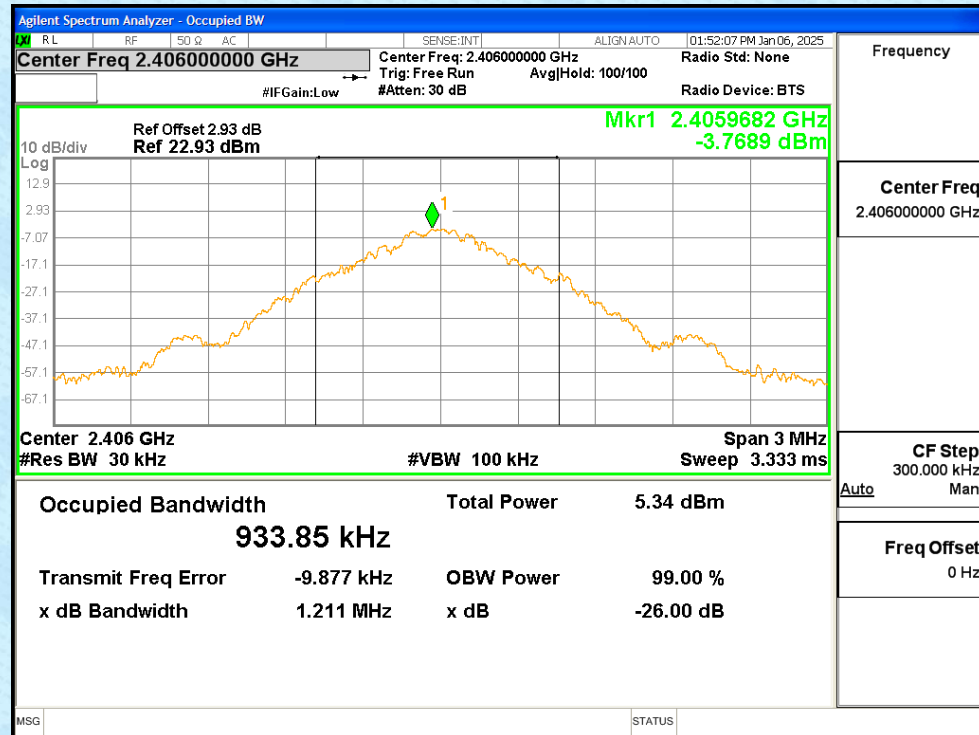


OBW NVNT GFSK 2443MHz Ant1

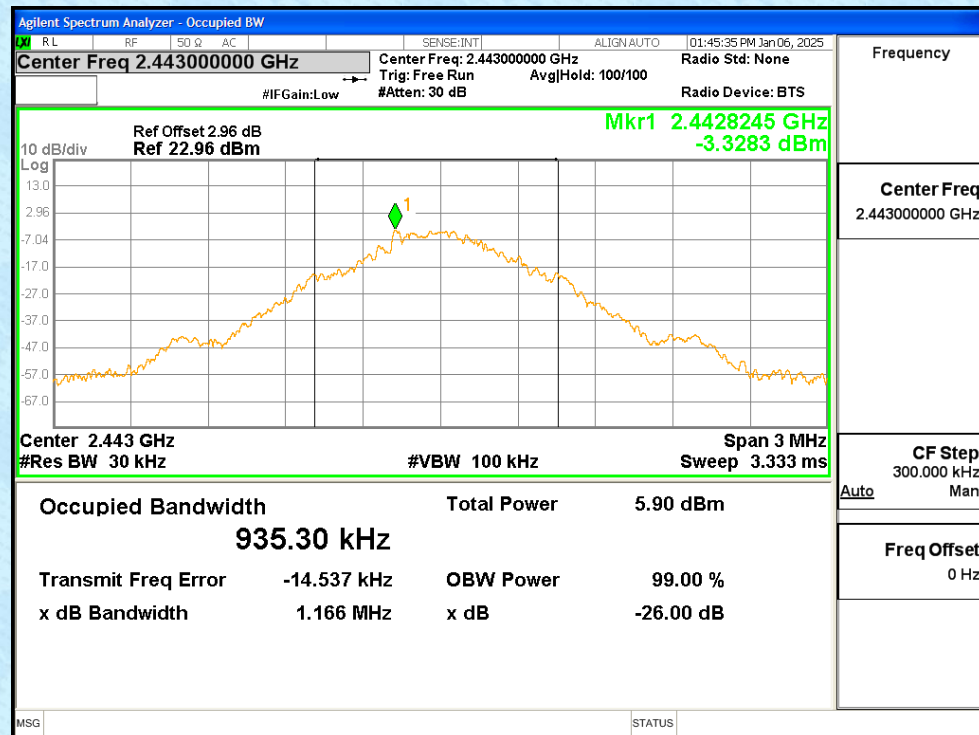


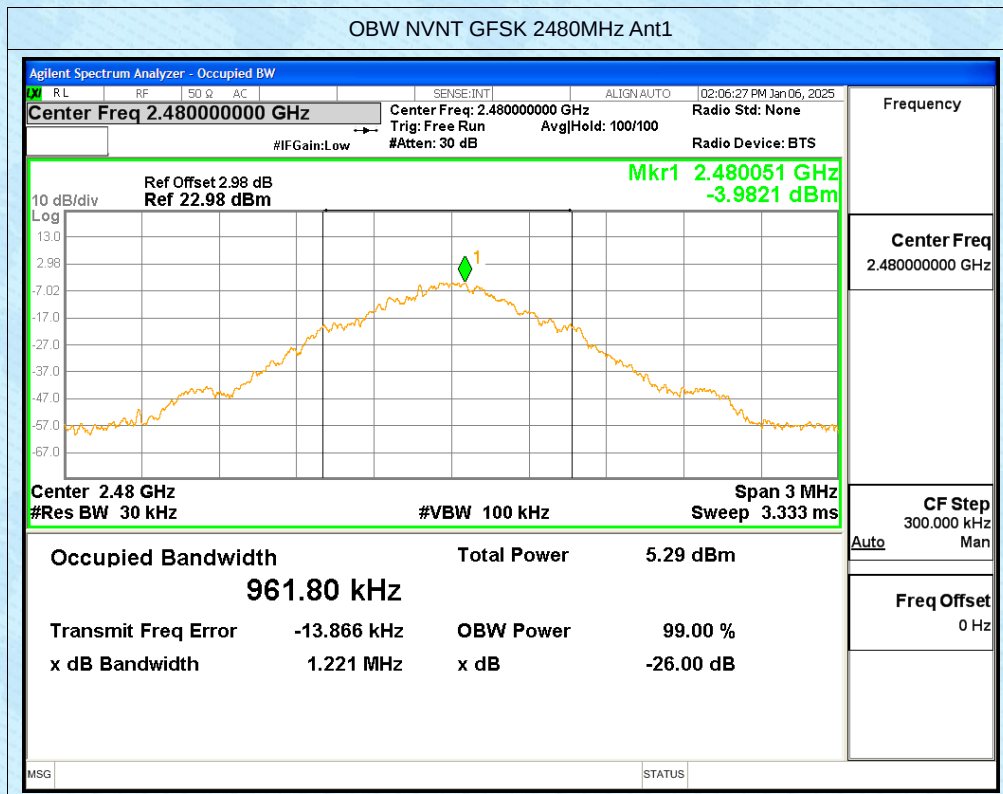

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	GFSK	2406	Ant1	-1.5	8	Pass
		2443		-1.44	8	Pass
		2480		-1.31	8	Pass

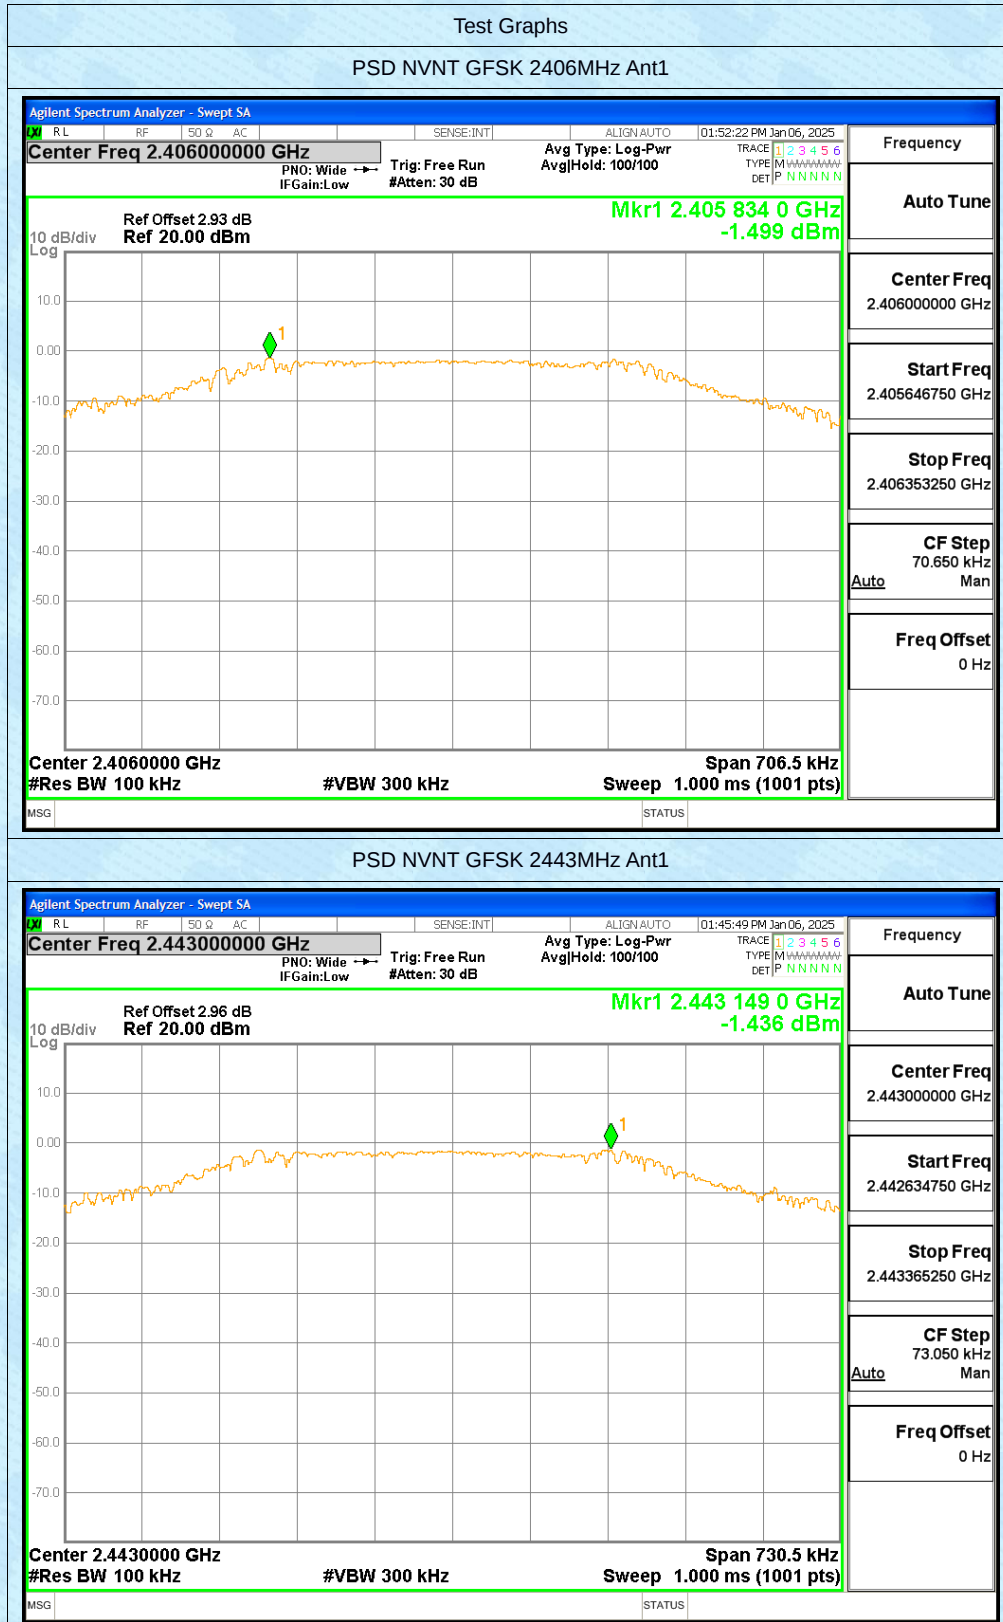

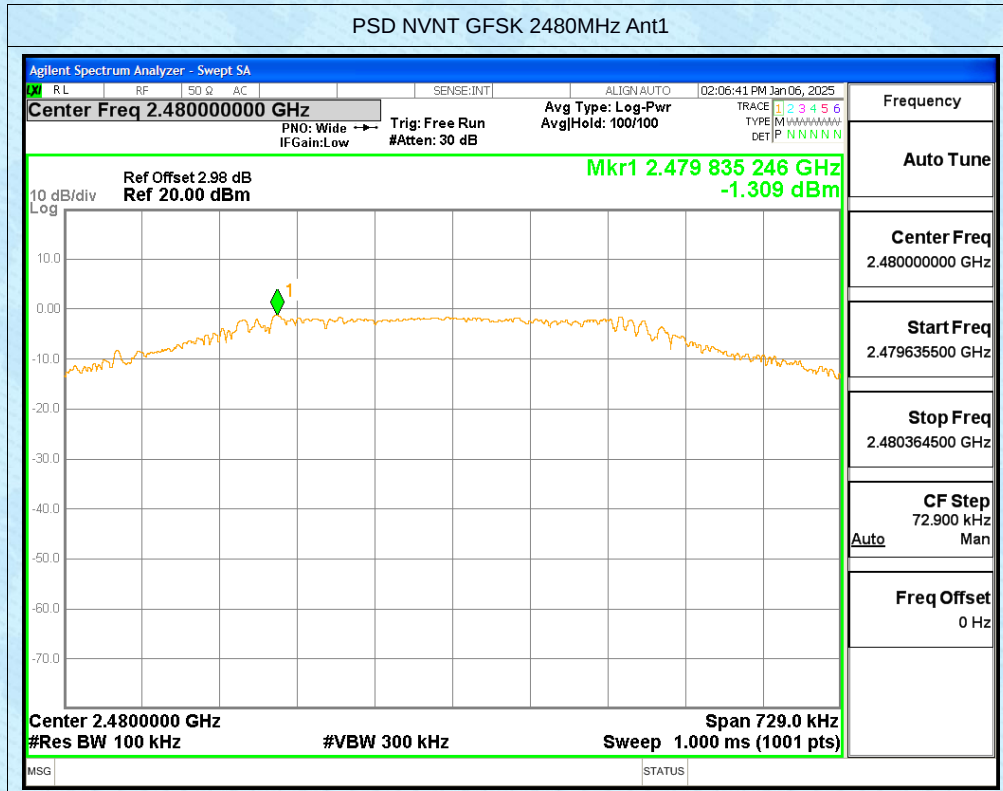


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	GFSK	2406	Ant1	-50.6	-20	Pass
		2480		-51.94	-20	Pass


Test Graphs

Band Edge NVNT GFSK 2406MHz Ant1 Ref

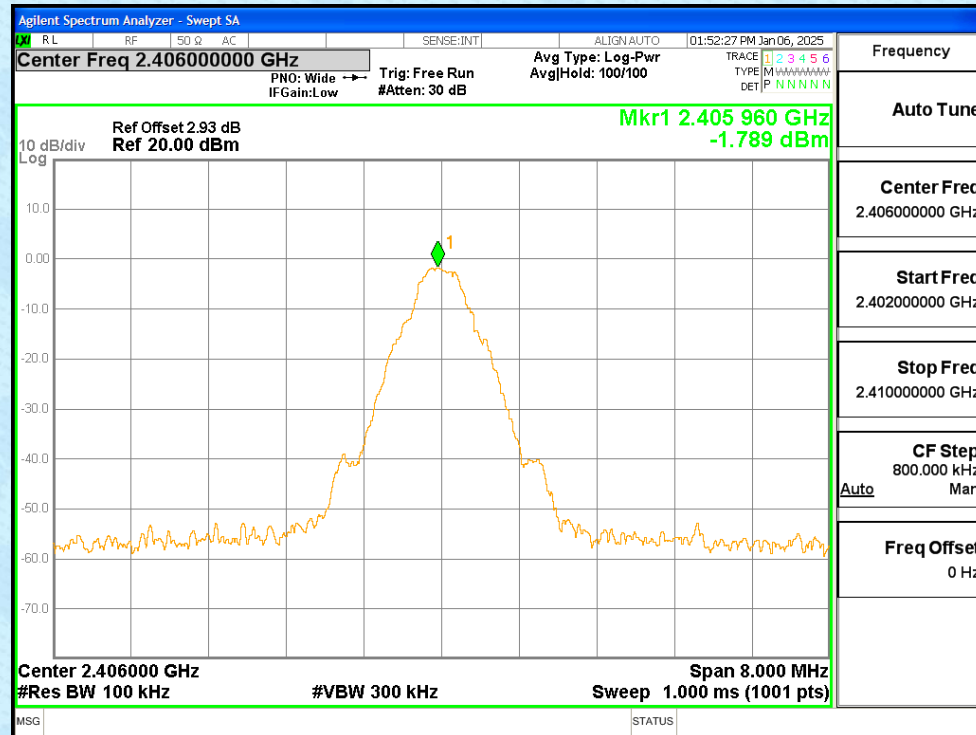

Band Edge NVNT GFSK 2406MHz Ant1 Emission

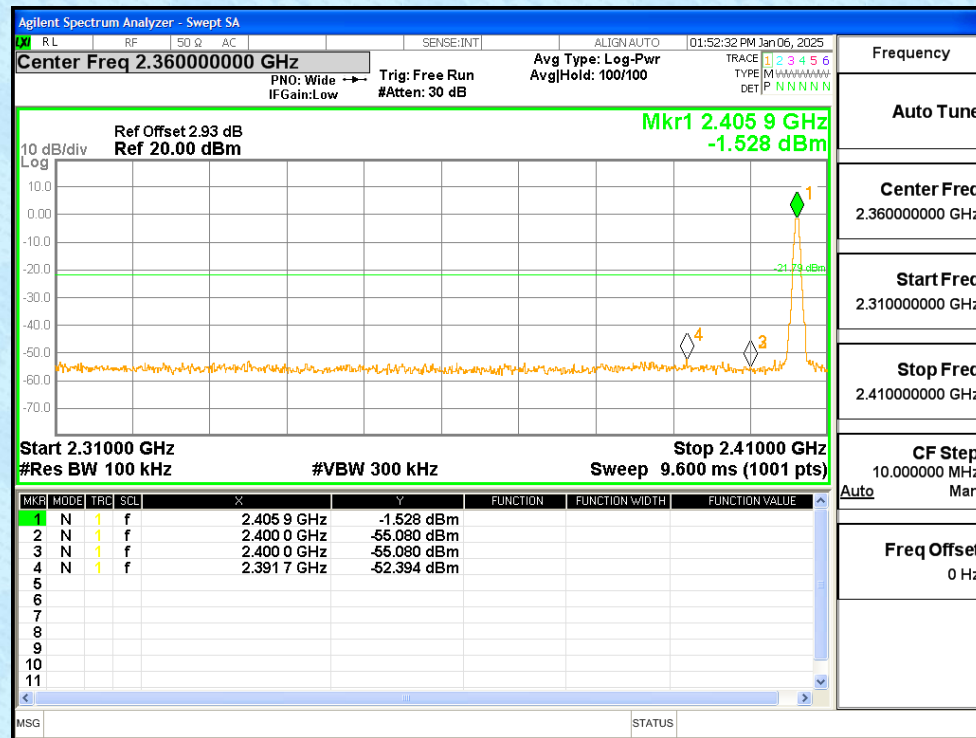

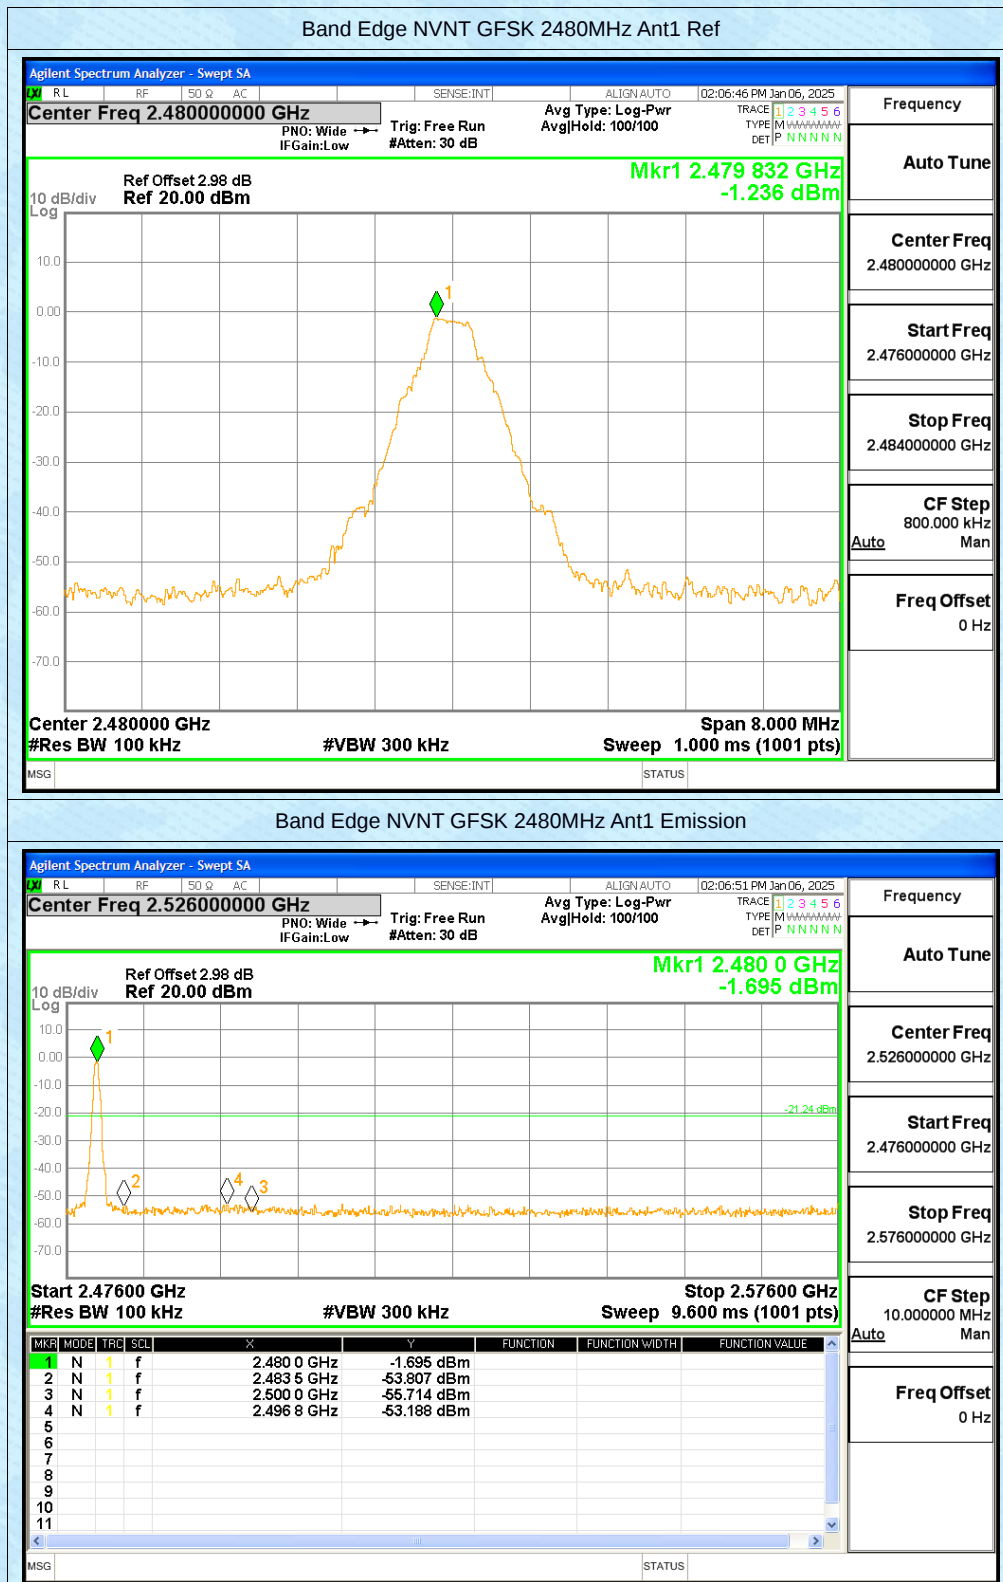


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	GFSK	2406	Ant1	-38.24	-20	Pass
		2443		-38.62	-20	Pass
		2480		-40.14	-20	Pass

Test Graphs

Tx. Spurious NVNT GFSK 2406MHz Ant1 Ref

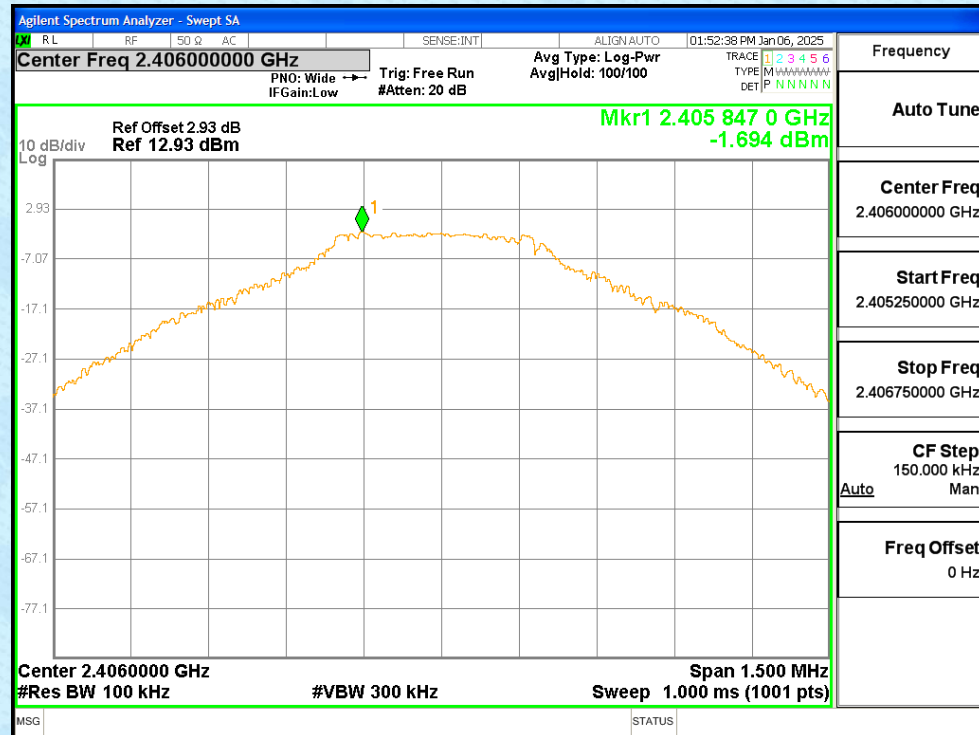

Tx. Spurious NVNT GFSK 2406MHz Ant1 Emission

