



TEST REPORT

Product Name: All-in-One Computer
FCC ID: 2BHNU-AFC5A
Trademark: AVITA
Model Number: AFC5A
Prepared For: Digital Instrument Co., Ltd
Address: 45 Soi Ngamwongwan 19, Bangkrasor, MueangNonthaburi, Nonthaburi 11000, Thailand
Manufacturer: Shenzhen Hasee Innovation Co., Ltd
Address: Hasee Building, Xintianxia Industrial Park, Bantian Street, Longgang District, Shenzhen, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jun. 18, 2024
Sample tested Date: Jun. 18, 2024 to Jul. 09, 2024
Issue Date: Jul. 09, 2024
Report No.: CTB240709035RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHZ band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSION	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	51
8.1 Block Diagram Of Test Setup	51
8.2 Limit	51
8.3 Test procedure	51
8.4 Test Result	52
9. CONDUCTED OUTPUT POWER	76
9.1 Block Diagram Of Test Setup	76
9.2 Limit	76
9.3 Test procedure	76
9.4 Test Result	77
10. 6DB OCCUPIED BANDWIDTH	78
10.1 Block Diagram Of Test Setup	78
10.2 Limit	78
10.3 Test procedure	78
10.4 Test Result	79
11. POWER SPECTRAL DENSITY	93
11.1 Block Diagram Of Test Setup	93

11.2	Limit	93
11.3	Test procedure	93
11.4	Test Result	94
12.	ANTENNA REQUIREMENT	107
13.	EUT TEST SETUP PHOTOGRAPHS	108

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240709035RFX	Jul. 09, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59℃
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	AFC5A
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n/ax
Hardware Version:	v1.3
Software Version:	v6001.15.147.0_Drv_3.00.0044.L
Operation Frequency:	WiFi: IEEE 802.11b/g/n20/ax20: 2412-2462MHz/ 11 channel IEEE 802.11n40/ax40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 17.618dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: FPC antenna
Antenna Gain:	WiFi (2.4G): Ant1: 1.58dBi Ant2: 1.58dBi
Ratings:	AC 110-240V~50/60Hz 3A DC 19V=6.32A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Keyboard	DELL	KB216t	N/A	N/A
2	Mouse	DELL	MS116c	N/A	N/A
3	Monitor	DELL	SE2218HV	N/A	N/A
4	Router	Huawei	AX2 Pro	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40/ax40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40/ax40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 1.58dbi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=0.79dB,

So the directional gain for PSD is 2.37dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1.58dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M
802.11/ax20	65M
802.11/ax40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28


Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/11/16
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_ 7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-N MS-80	/	/	2025/6/28

10	Coaxial cable	ETS	RFC-SN-100-N MS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-S MS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100- NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

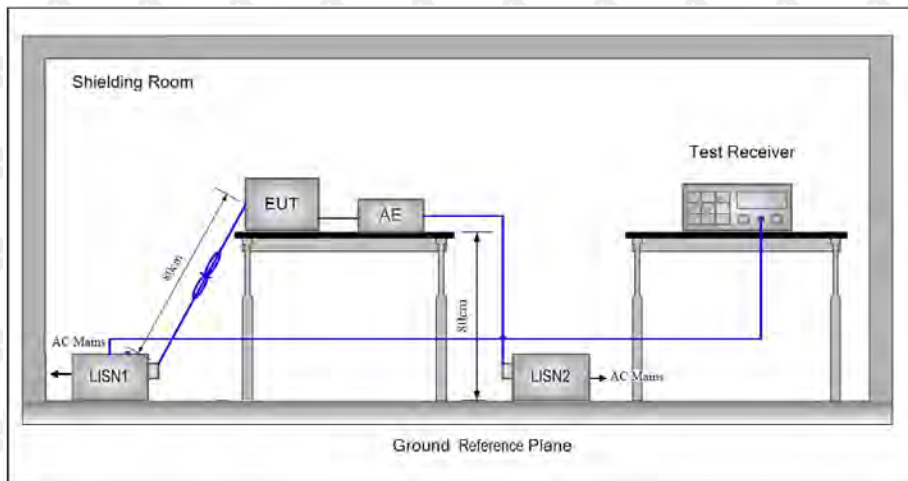

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

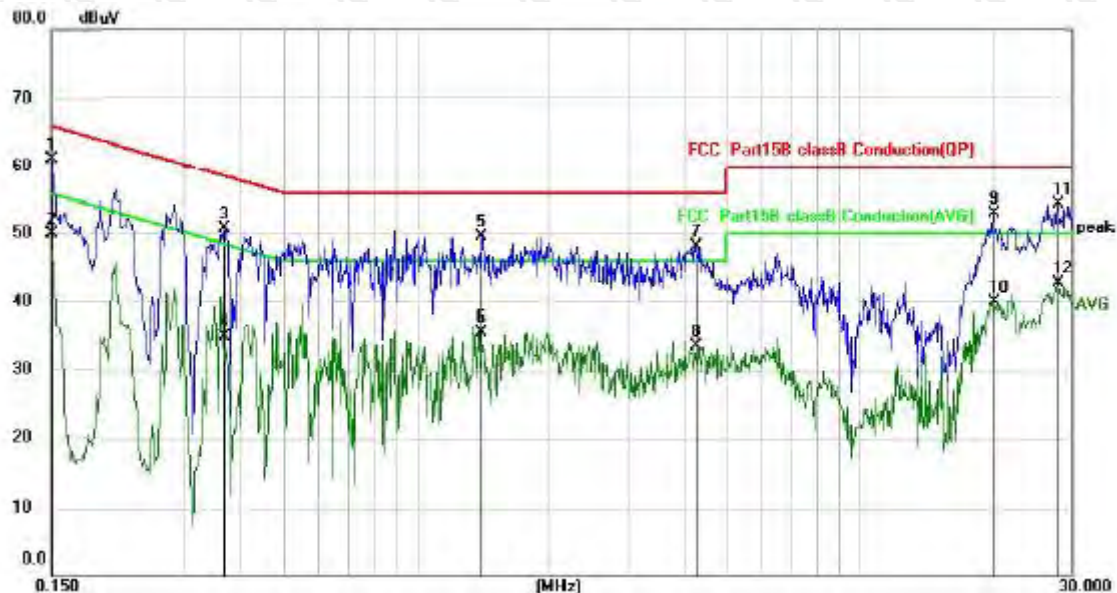

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	51.24	9.95	61.19	66.00	-4.81	QP
2		0.1500	39.87	9.95	49.82	56.00	-6.18	AVG
3		0.3673	40.65	9.97	50.62	58.56	-7.94	QP
4		0.3673	25.13	9.97	35.10	48.56	-13.46	AVG
5		1.3976	39.50	10.04	49.54	56.00	-6.46	QP
6		1.3976	25.59	10.04	35.63	46.00	-10.37	AVG
7		4.2618	37.80	10.31	48.11	56.00	-7.89	QP
8		4.2618	23.46	10.31	33.77	46.00	-12.23	AVG
9		19.9618	42.08	10.82	52.90	60.00	-7.10	QP
10		19.9618	29.14	10.82	39.96	50.00	-10.04	AVG
11		27.8900	42.95	11.26	54.21	60.00	-5.79	QP
12		27.8900	31.43	11.26	42.69	50.00	-7.31	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

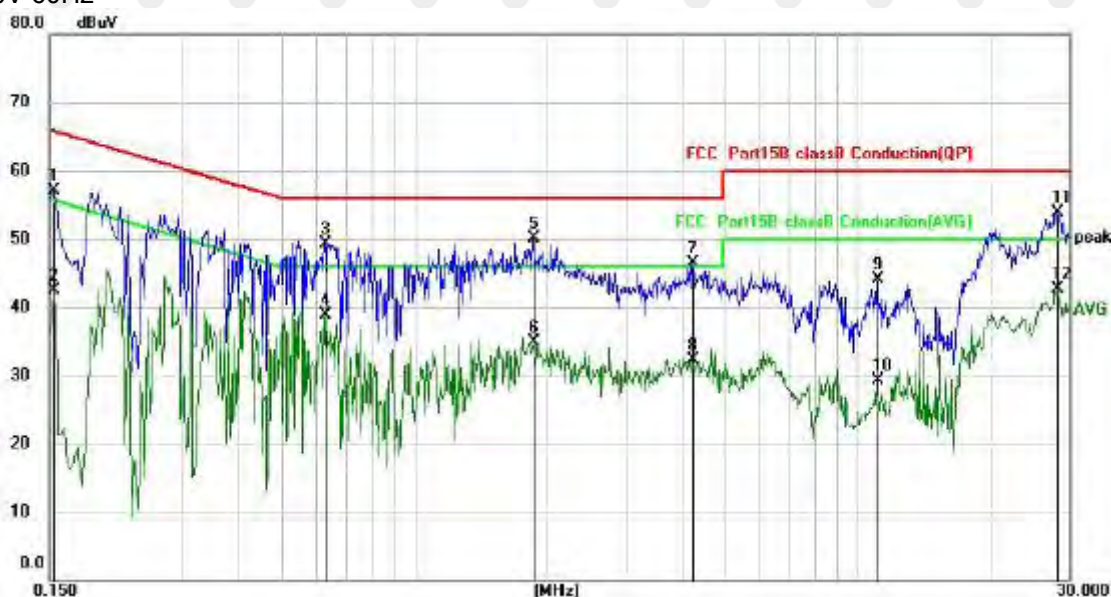

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1532	47.21	9.95	57.16	65.82	-8.66	QP
2		0.1532	32.49	9.95	42.44	55.82	-13.38	AVG
3		0.6300	39.24	10.01	49.25	56.00	-6.75	QP
4		0.6300	28.85	10.01	38.86	46.00	-7.14	AVG
5	*	1.8580	39.96	10.08	50.04	56.00	-5.96	QP
6		1.8580	24.88	10.08	34.96	46.00	-11.04	AVG
7		4.2300	36.18	10.31	46.49	56.00	-9.51	QP
8		4.2300	22.01	10.31	32.32	46.00	-13.68	AVG
9		11.0777	33.51	10.61	44.12	60.00	-15.88	QP
10		11.0777	18.78	10.61	29.39	50.00	-20.61	AVG
11		28.0335	42.67	11.27	53.94	60.00	-6.06	QP
12		28.0335	31.47	11.27	42.74	50.00	-7.26	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

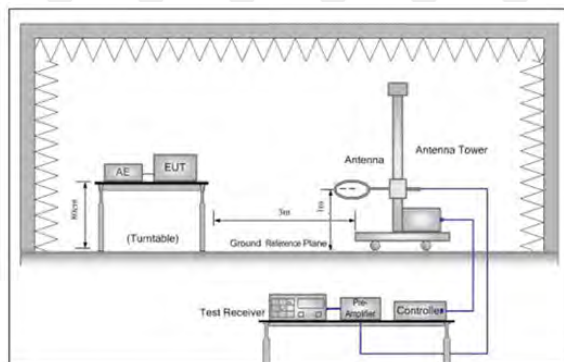


Figure 1. Below 30MHz

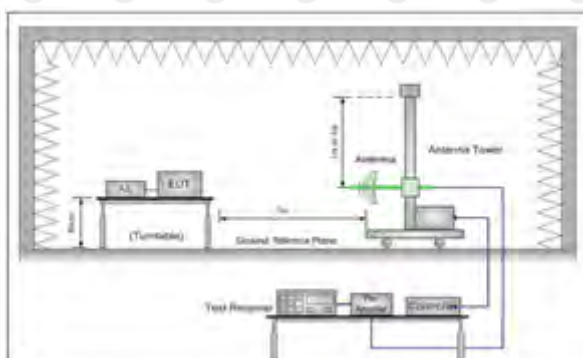


Figure 2. 30MHz to 1GHz

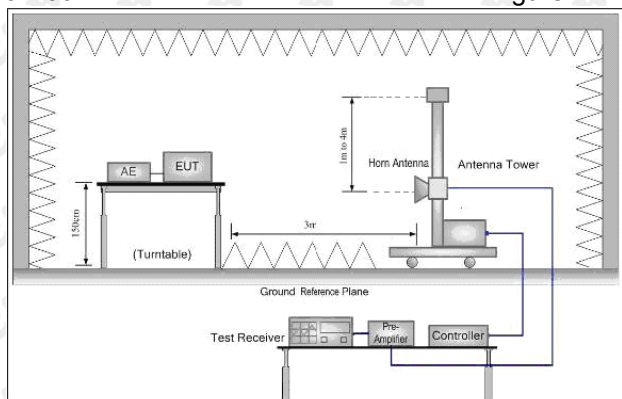


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:


Antenna polarity: H

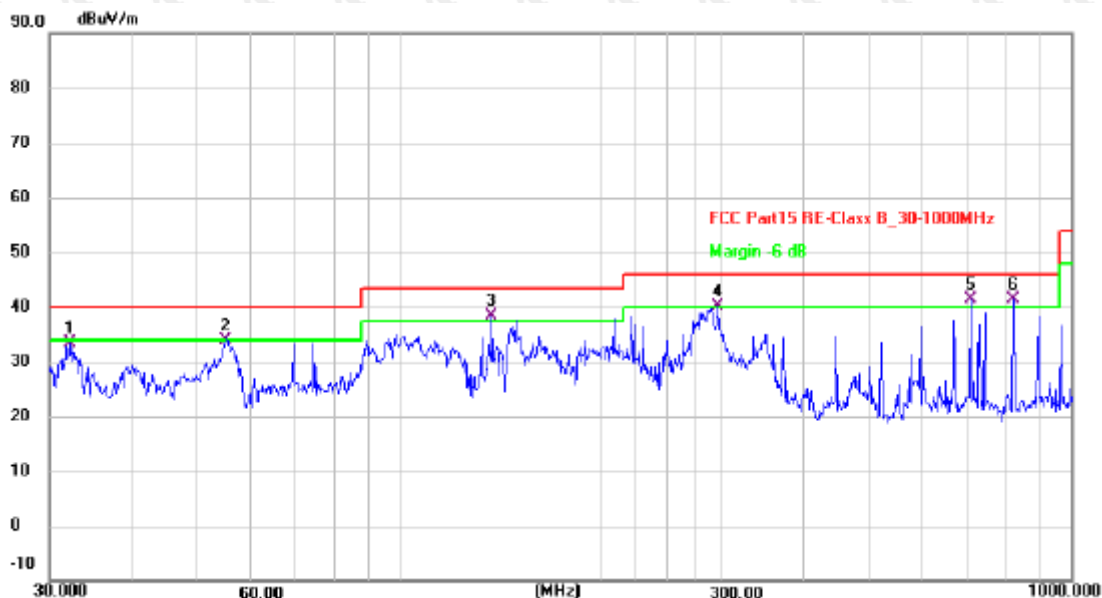

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.2924	47.46	-14.10	33.36	40.00	-6.64	QP
2	54.8348	49.12	-15.31	33.81	40.00	-6.19	QP
3 !	136.9390	52.38	-14.01	38.37	43.50	-5.13	QP
4 !	297.2240	53.28	-13.15	40.13	46.00	-5.87	QP
5 *	709.1820	45.18	-3.86	41.32	46.00	-4.68	QP
6 !	818.8340	42.05	-0.75	41.30	46.00	-4.70	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit - Level

Antenna polarity: V

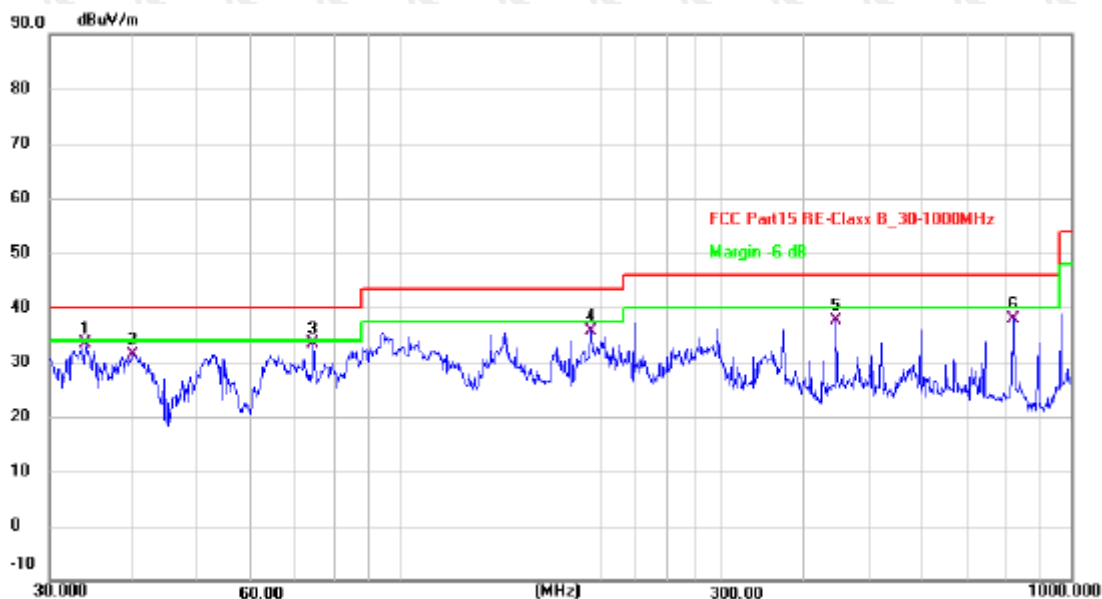

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.9172	47.52	-14.17	33.35	40.00	-6.65	QP
2	39.9941	45.00	-13.55	31.45	40.00	-8.55	QP
3 *	74.1350	51.80	-18.36	33.44	40.00	-6.56	QP
4	192.4182	51.95	-16.29	35.66	43.50	-7.84	QP
5	446.4140	47.70	-10.00	37.70	46.00	-8.30	QP
6	818.8340	38.68	-0.75	37.93	46.00	-8.07	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.77	-3.64	61.13	74	-12.87	peak
4824	50.88	-3.64	47.24	54	-6.76	AVG
7236	58.31	-0.95	57.36	74	-16.64	peak
7236	44.22	-0.95	43.27	54	-10.73	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.30	-3.64	62.66	74	-11.34	peak
4824	48.78	-3.64	45.14	54	-8.86	AVG
7236	56.50	-0.95	55.55	74	-18.45	peak
7236	43.10	-0.95	42.15	54	-11.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	66.03	-3.51	62.52	74	-11.48	peak
4874	48.97	-3.51	45.46	54	-8.54	AVG
7311	57.53	-0.82	56.71	74	-17.29	peak
7311	45.84	-0.82	45.02	54	-8.98	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	65.55	-3.51	62.04	74	-11.96	peak
4874	46.63	-3.51	43.12	54	-10.88	AVG
7311	58.04	-0.82	57.22	74	-16.78	peak
7311	42.81	-0.82	41.99	54	-12.01	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.48	-3.43	60.05	74	-13.95	peak
4924	46.33	-3.43	42.90	54	-11.10	AVG
7386	57.46	-0.75	56.71	74	-17.29	peak
7386	43.66	-0.75	42.91	54	-11.09	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.74	-3.43	59.31	74	-14.69	peak
4924	47.02	-3.43	43.59	54	-10.41	AVG
7386	56.35	-0.75	55.60	74	-18.40	peak
7386	42.72	-0.75	41.97	54	-12.03	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.67	-3.64	60.03	74	-13.97	peak
4824	49.10	-3.64	45.46	54	-8.54	AVG
7236	56.96	-0.95	56.01	74	-17.99	peak
7236	46.04	-0.95	45.09	54	-8.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.43	-3.64	61.79	74	-12.21	peak
4824	49.40	-3.64	45.76	54	-8.24	AVG
7236	57.30	-0.95	56.35	74	-17.65	peak
7236	43.61	-0.95	42.66	54	-11.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	65.26	-3.51	61.75	74	-12.25	peak
4874	48.67	-3.51	45.16	54	-8.84	AVG
7311	58.00	-0.82	57.18	74	-16.82	peak
7311	45.33	-0.82	44.51	54	-9.49	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.06	-3.51	59.55	74	-14.45	peak
4874	46.89	-3.51	43.38	54	-10.62	AVG
7311	59.25	-0.82	58.43	74	-15.57	peak
7311	42.64	-0.82	41.82	54	-12.18	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	64.20	-3.43	60.77	74	-13.23	peak
4924	46.39	-3.43	42.96	54	-11.04	AVG
7386	57.43	-0.75	56.68	74	-17.32	peak
7386	43.60	-0.75	42.85	54	-11.15	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	62.63	-3.43	59.20	74	-14.80	peak
4924	48.47	-3.43	45.04	54	-8.96	AVG
7386	56.30	-0.75	55.55	74	-18.45	peak
7386	43.80	-0.75	43.05	54	-10.95	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.83	-3.64	62.19	74	-11.81	peak
4824	50.50	-3.64	46.86	54	-7.14	AVG
7236	58.59	-0.95	57.64	74	-16.36	peak
7236	45.39	-0.95	44.44	54	-9.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.99	-3.64	63.35	74	-10.65	peak
4824	48.39	-3.64	44.75	54	-9.25	AVG
7236	58.28	-0.95	57.33	74	-16.67	peak
7236	43.27	-0.95	42.32	54	-11.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	64.34	-3.51	60.83	74	-13.17	peak
4874	50.63	-3.51	47.12	54	-6.88	AVG
7311	57.56	-0.82	56.74	74	-17.26	peak
7311	44.01	-0.82	43.19	54	-10.81	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	64.76	-3.51	61.25	74	-12.75	peak
4874	48.66	-3.51	45.15	54	-8.85	AVG
7311	60.44	-0.82	59.62	74	-14.38	peak
7311	43.95	-0.82	43.13	54	-10.87	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.51	-3.43	61.08	74	-12.92	peak
4924	48.40	-3.43	44.97	54	-9.03	AVG
7386	58.03	-0.75	57.28	74	-16.72	peak
7386	43.00	-0.75	42.25	54	-11.75	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.89	-3.43	61.46	74	-12.54	peak
4924	46.93	-3.43	43.50	54	-10.50	AVG
7386	56.71	-0.75	55.96	74	-18.04	peak
7386	42.13	-0.75	41.38	54	-12.62	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.80	-3.63	62.17	74	-11.83	peak
4844	47.90	-3.63	44.27	54	-9.73	AVG
7266	59.61	-0.94	58.67	74	-15.33	peak
7266	46.77	-0.94	45.83	54	-8.17	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.66	-3.63	61.03	74	-12.97	peak
4844	48.20	-3.63	44.57	54	-9.43	AVG
7266	58.03	-0.94	57.09	74	-16.91	peak
7266	44.61	-0.94	43.67	54	-10.33	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.72	-3.51	59.21	74	-14.79	peak
4874	49.12	-3.51	45.61	54	-8.39	AVG
7311	59.02	-0.82	58.20	74	-15.80	peak
7311	44.31	-0.82	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.43	-3.51	42.92	54	-11.08	AVG
7311	56.70	-0.82	55.88	74	-18.12	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	65.09	-3.43	61.66	74	-12.34	peak
4904	49.52	-3.43	46.09	54	-7.91	AVG
7356	56.03	-0.75	55.28	74	-18.72	peak
7356	43.04	-0.75	42.29	54	-11.71	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	61.75	-3.43	58.32	74	-15.68	peak
4904	47.97	-3.43	44.54	54	-9.46	AVG
7356	57.47	-0.75	56.72	74	-17.28	peak
7356	43.90	-0.75	43.15	54	-10.85	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.09	-3.64	61.45	74	-12.55	peak
4824	49.08	-3.64	45.44	54	-8.56	AVG
7236	58.93	-0.95	57.98	74	-16.02	peak
7236	44.67	-0.95	43.72	54	-10.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	63.31	-3.64	59.67	74	-14.33	peak
4824	50.67	-3.64	47.03	54	-6.97	AVG
7236	58.55	-0.95	57.60	74	-16.40	peak
7236	45.77	-0.95	44.82	54	-9.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.61	-3.51	61.10	74.00	-12.90	peak
4874.00	50.52	-3.51	47.01	54.00	-6.99	AVG
7311.00	57.26	-0.82	56.44	74.00	-17.56	peak
7311.00	44.67	-0.82	43.85	54.00	-10.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.54	-3.51	59.03	74.00	-14.97	peak
4874.00	45.73	-3.51	42.22	54.00	-11.78	AVG
7311.00	57.03	-0.82	56.21	74.00	-17.79	peak
7311.00	44.35	-0.82	43.53	54.00	-10.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH11 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.48	-3.43	59.05	74	-14.95	peak
4924	46.08	-3.43	42.65	54	-11.35	AVG
7386	56.64	-0.75	55.89	74	-18.11	peak
7386	42.99	-0.75	42.24	54	-11.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.40	-3.43	61.97	74	-12.03	peak
4924	45.58	-3.43	42.15	54	-11.85	AVG
7386	58.24	-0.75	57.49	74	-16.51	peak
7386	42.46	-0.75	41.71	54	-12.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.40	-3.63	60.77	74	-13.23	peak
4844	47.74	-3.63	44.11	54	-9.89	AVG
7266	58.69	-0.94	57.75	74	-16.25	peak
7266	46.10	-0.94	45.16	54	-8.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.29	-3.63	61.66	74	-12.34	peak
4844	49.53	-3.63	45.90	54	-8.10	AVG
7266	57.94	-0.94	57.00	74	-17.00	peak
7266	45.70	-0.94	44.76	54	-9.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.53	-3.51	60.02	74	-13.98	peak
4874	47.93	-3.51	44.42	54	-9.58	AVG
7311	60.97	-0.82	60.15	74	-13.85	peak
7311	44.49	-0.82	43.67	54	-10.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.44	-3.51	42.93	54	-11.07	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.29	-3.43	60.86	74	-13.14	peak
4904	48.99	-3.43	45.56	54	-8.44	AVG
7356	56.94	-0.75	56.19	74	-17.81	peak
7356	42.76	-0.75	42.01	54	-11.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.16	-3.43	58.73	74	-15.27	peak
4904	45.77	-3.43	42.34	54	-11.66	AVG
7356	56.97	-0.75	56.22	74	-17.78	peak
7356	43.82	-0.75	43.07	54	-10.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.97	-5.81	52.16	74	-21.84	peak
2390	/	-5.81	/	54	/	AVG
2399	63.60	-5.84	57.76	74	-16.24	peak
2399	49.47	-5.84	43.63	54	-10.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.40	-5.81	51.59	74	-22.41	peak
2390	/	-5.81	/	54	/	AVG
2399	62.05	-5.84	56.21	74	-17.79	peak
2399	46.38	-5.84	40.54	54	-13.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.57	-5.65	50.92	74	-23.08	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.54	-5.65	50.89	74	-23.11	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.75	-5.81	52.94	74	-21.06	peak
2390	/	-5.81	/	54	/	AVG
2399	62.25	-5.84	56.41	74	-17.59	peak
2399	45.64	-5.84	39.80	54	-14.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.47	-5.81	51.66	74	-22.34	peak
2390	/	-5.81	/	54	/	AVG
2399	62.33	-5.84	56.49	74	-17.51	peak
2399	46.14	-5.84	40.30	54	-13.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.86	-5.65	51.21	74	-22.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.43	-5.65	50.78	74	-23.22	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.07	-5.81	50.26	74	-23.74	peak
2390	/	-5.81	/	54	/	AVG
2399	63.83	-5.84	57.99	74	-16.01	peak
2399	47.04	-5.84	41.20	54	-12.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.46	-5.81	50.65	74	-23.35	peak
2390	/	-5.81	/	54	/	AVG
2399	61.04	-5.84	55.20	74	-18.80	peak
2399	47.44	-5.84	41.60	54	-12.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.84	-5.65	51.19	74	-22.81	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.06	-5.65	50.41	74	-23.59	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.73	-5.81	52.92	74	-21.08	peak
2390	/	-5.81	/	54	/	AVG
2399	63.75	-5.84	57.91	74	-16.09	peak
2399	45.92	-5.84	40.08	54	-13.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.12	-5.81	51.31	74	-22.69	peak
2390	/	-5.81	/	54	/	AVG
2399	62.17	-5.84	56.33	74	-17.67	peak
2399	46.33	-5.84	40.49	54	-13.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.65	-5.65	51.00	74	-23.00	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.66	-5.65	52.01	74	-21.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.61	-5.81	50.80	74	-23.20	peak
2390	/	-5.81	/	54	/	AVG
2399	63.31	-5.84	57.47	74	-16.53	peak
2399	47.56	-5.84	41.72	54	-12.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.48	-5.81	51.67	74	-22.33	peak
2390	/	-5.81	/	54	/	AVG
2399	61.16	-5.84	55.32	74	-18.68	peak
2399	47.31	-5.84	41.47	54	-12.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.70	-5.65	51.05	74	-22.95	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.67	-5.65	50.02	74	-23.98	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.81	-5.81	53.00	74	-21.00	peak
2390	/	-5.81	/	54	/	AVG
2399	63.93	-5.84	58.09	74	-15.91	peak
2399	46.88	-5.84	41.04	54	-12.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.63	-5.81	51.82	74	-22.18	peak
2390	/	-5.81	/	54	/	AVG
2399	61.49	-5.84	55.65	74	-18.35	peak
2399	46.01	-5.84	40.17	54	-13.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.07	-5.65	52.42	74	-21.58	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.80	-5.65	52.15	74	-21.85	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

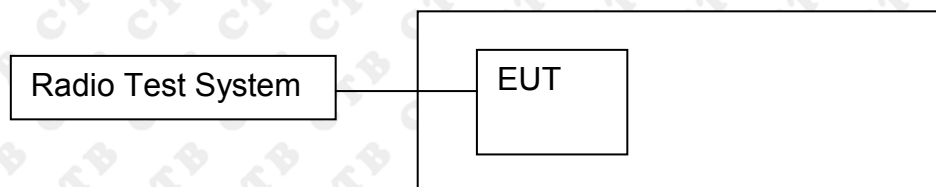

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result


ANT1:

BAND EDGE Graphs

802.11b/LCH

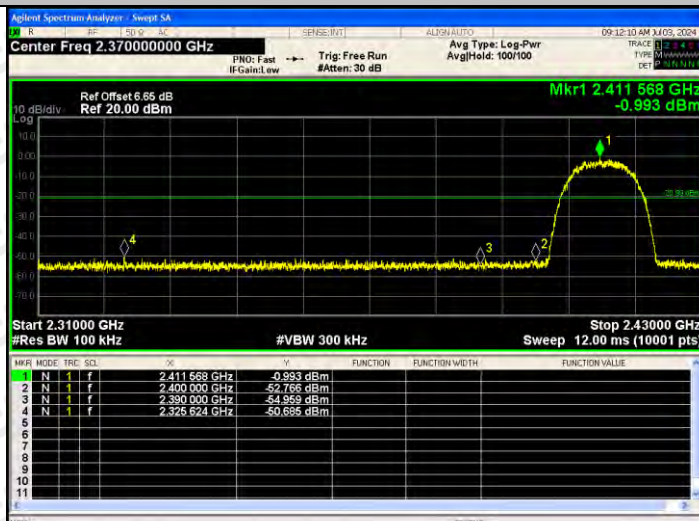


802.11b/HCH

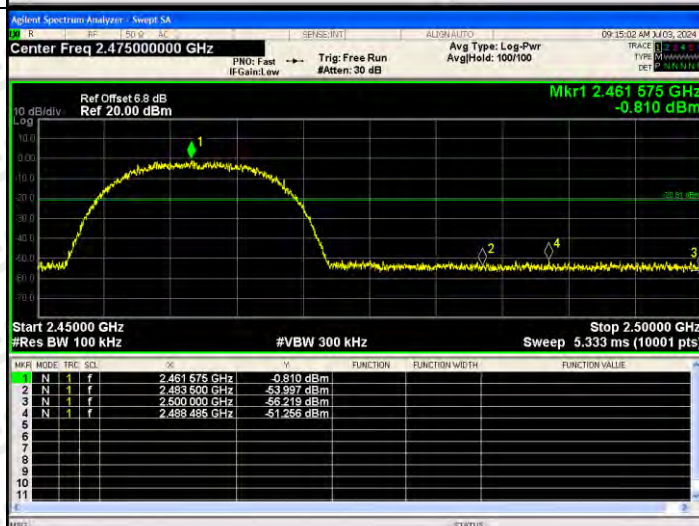


BAND EDGE Graphs

802.11g/LCH

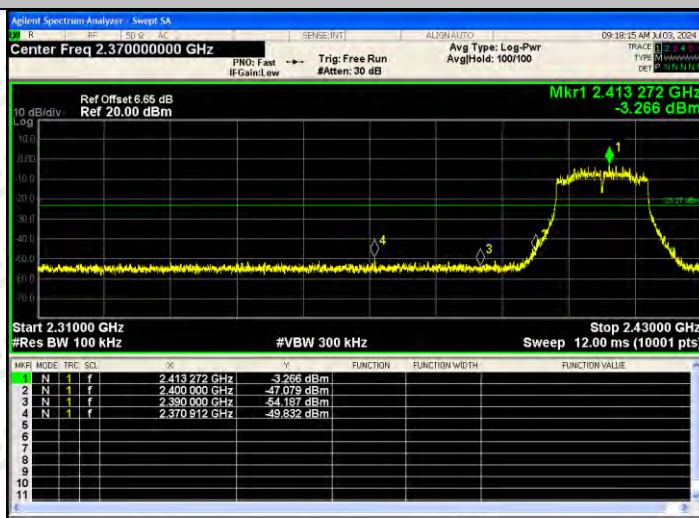


802.11g/HCH

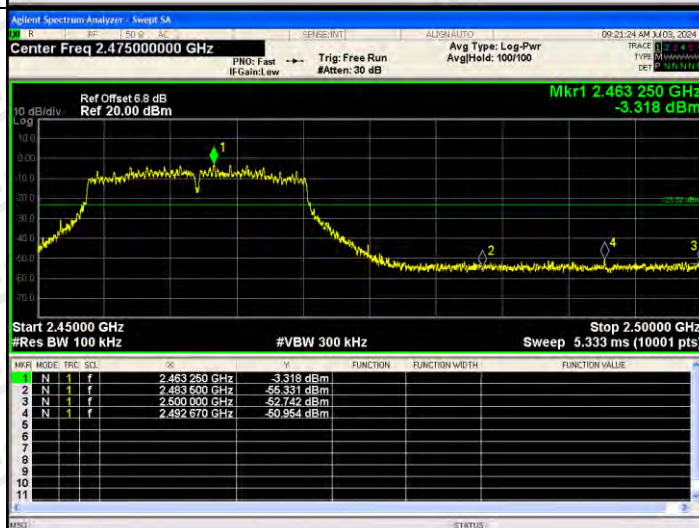


BAND EDGE Graphs

802.11n(HT20)/LCH

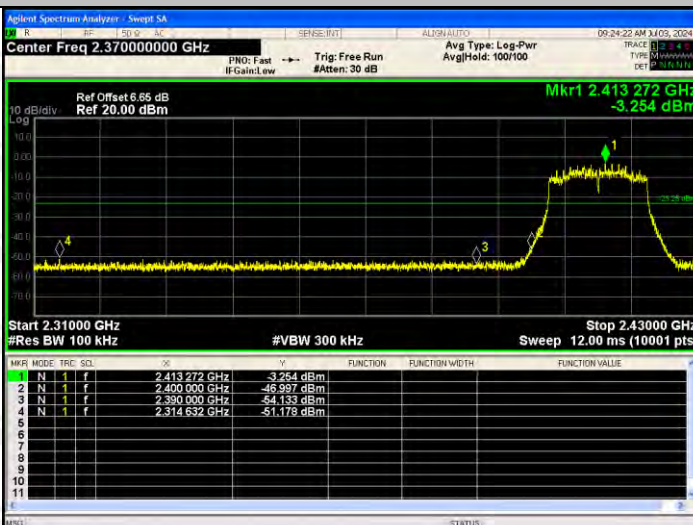


802.11n(HT20)/HCH

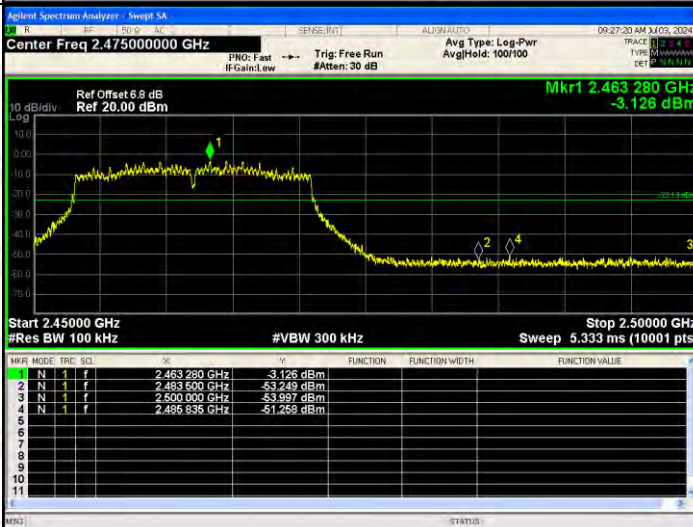


BAND EDGE Graphs

802.11n(HT40)/LCH

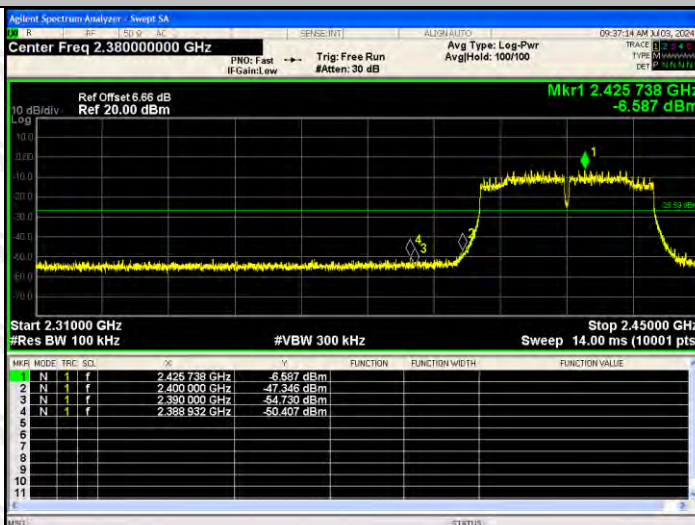


802.11n(HT40)/HCH

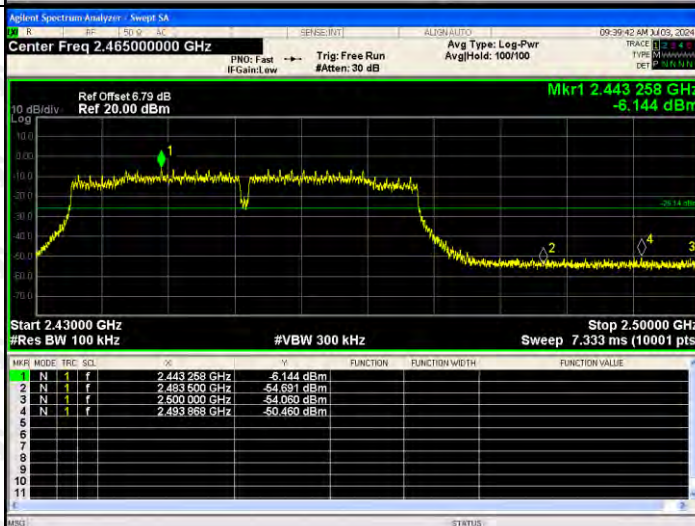


BAND EDGE Graphs

802.11ax(HT20)/
LCH

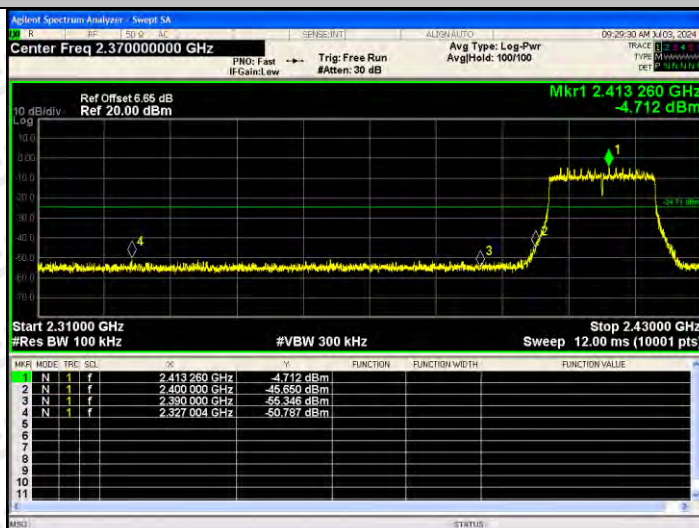


802.11ax(HT20)/
HCH

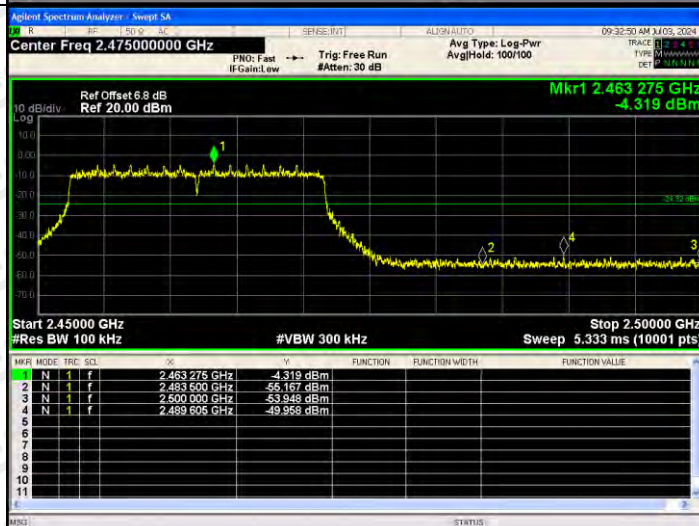


BAND EDGE Graphs

802.11ax(HT40)/
LCH

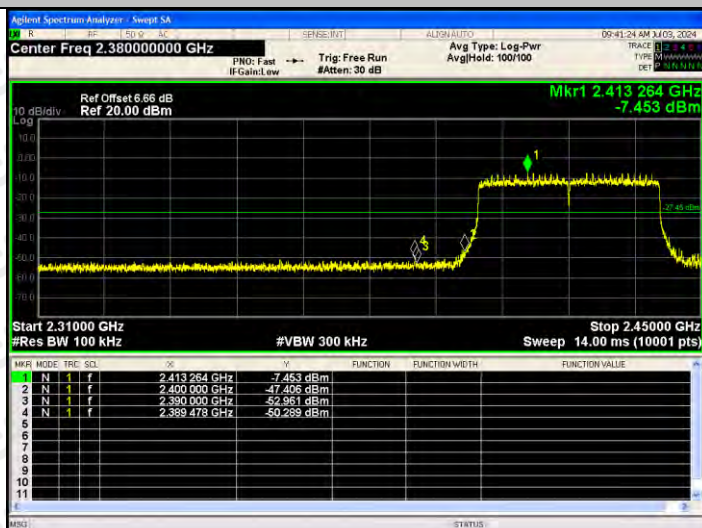


802.11ax(HT40)/
HCH

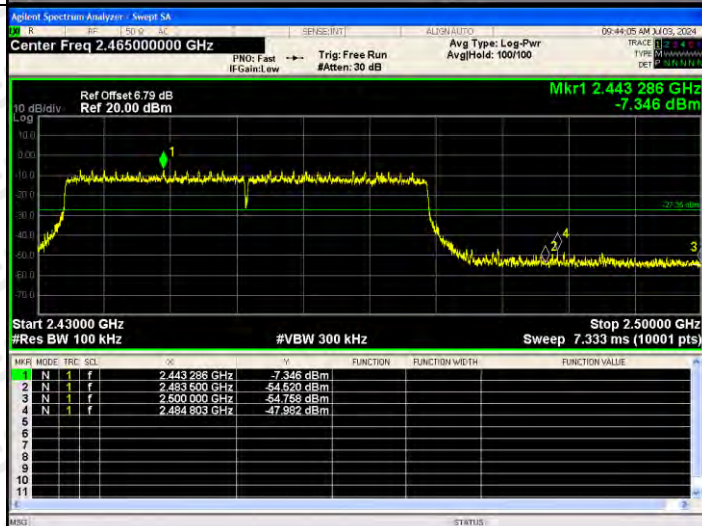


RF Conducted Spurious Emissions Graphs


802.11b/LCH

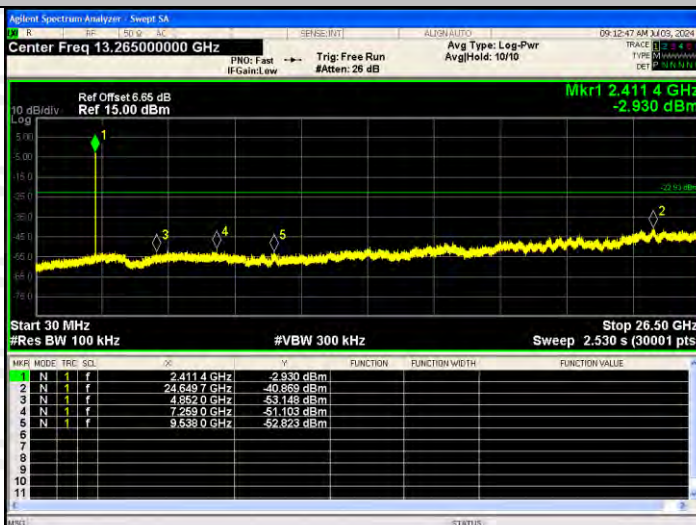

802.11b/MCH

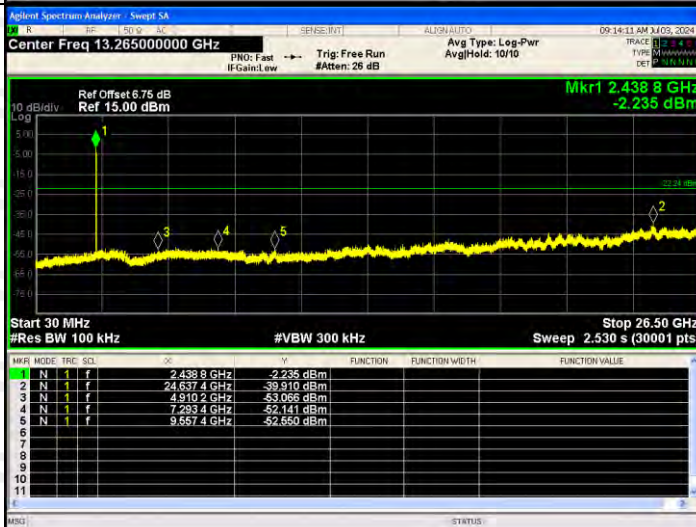


802.11b/HCH

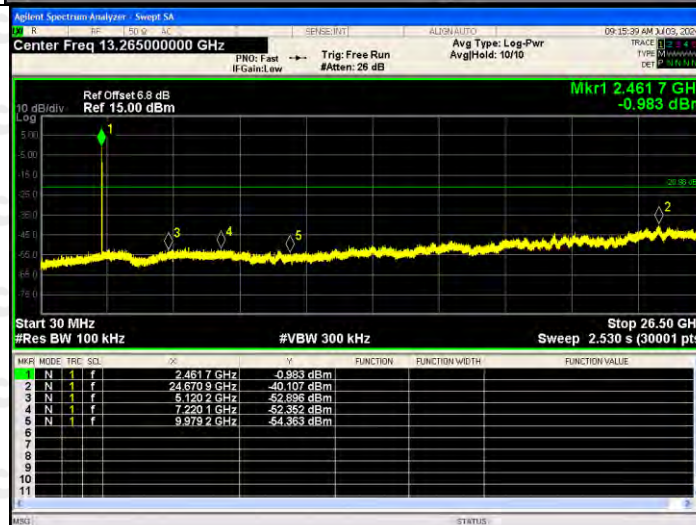


RF Conducted Spurious Emissions Graphs


802.11g/LCH

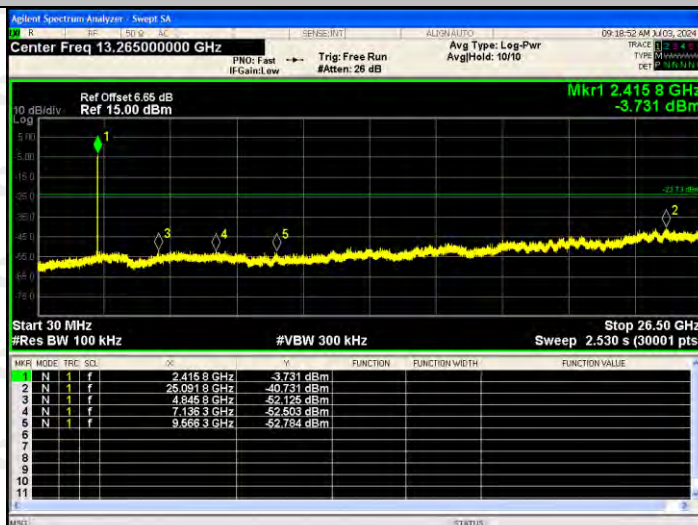




802.11g/MCH



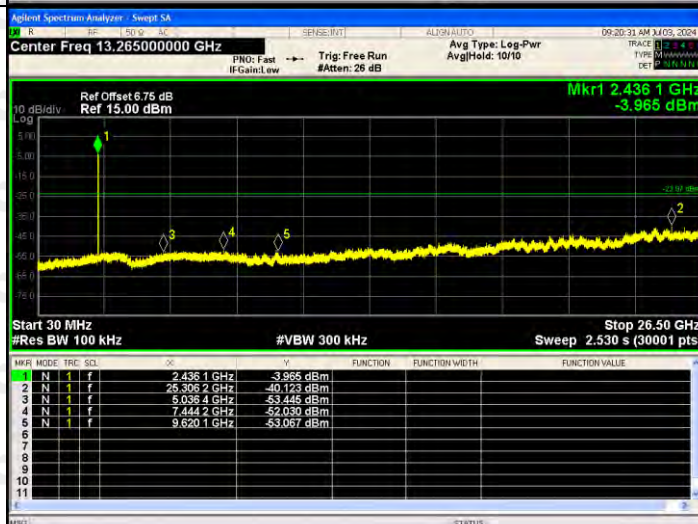


802.11g/HCH

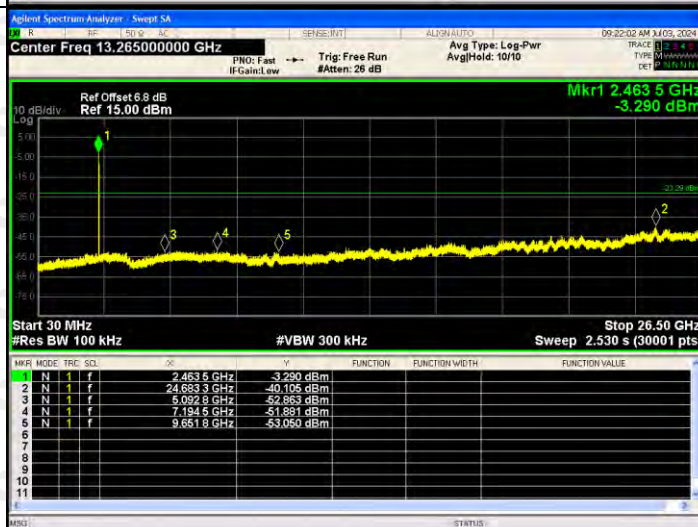


RF Conducted Spurious Emissions Graphs

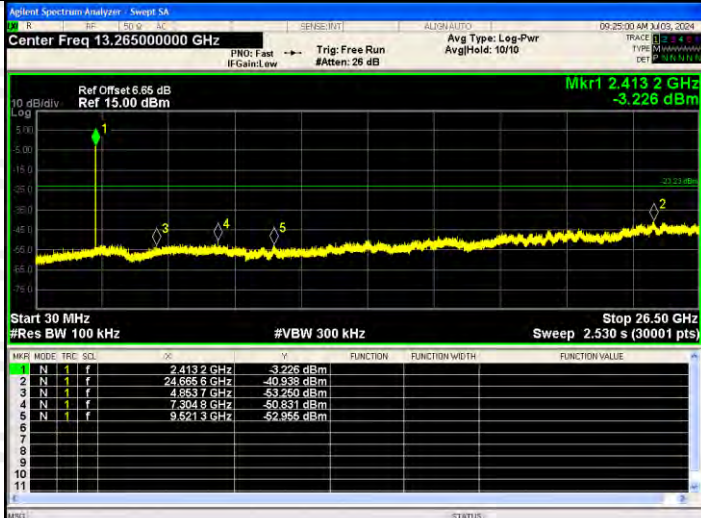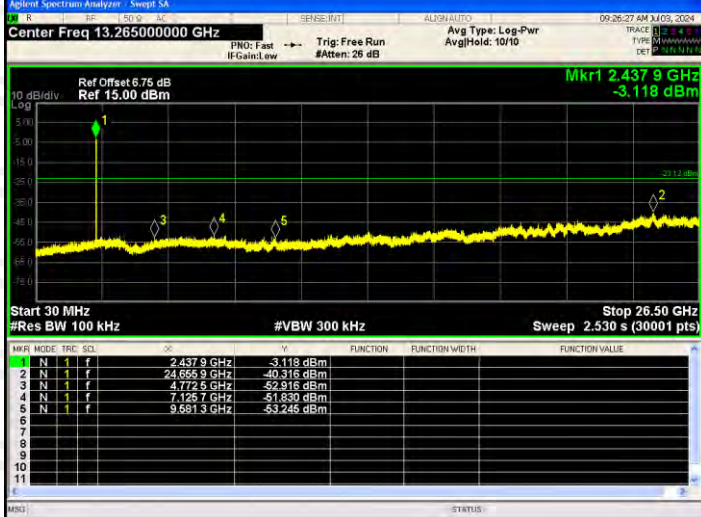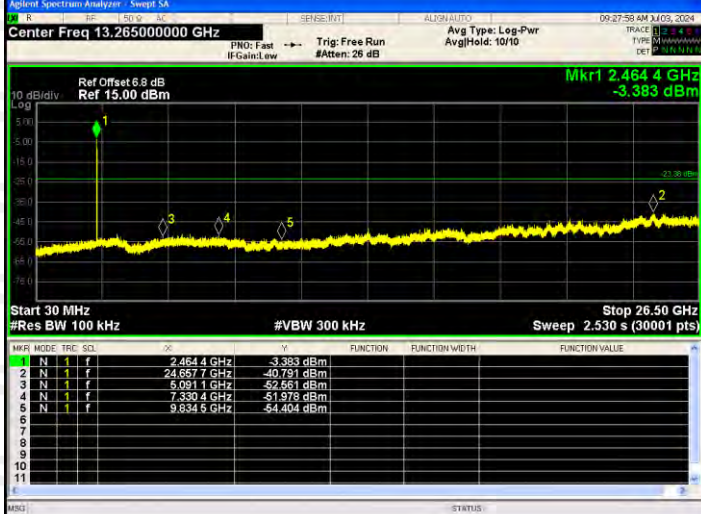802.11n(HT20)/ LCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>PS</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4132 GHz</td><td>-3.226 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.6656 GHz</td><td>-40.938 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.6637 GHz</td><td>-53.260 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.5048 GHz</td><td>-50.831 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.5213 GHz</td><td>-52.955 dBm</td><td></td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SQL	PS	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4132 GHz	-3.226 dBm					2	N	24.6656 GHz	-40.938 dBm					3	N	4.6637 GHz	-53.260 dBm					4	N	7.5048 GHz	-50.831 dBm					5	N	9.5213 GHz	-52.955 dBm				
MNR	MODE	FREQ	SQL	PS	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.4132 GHz	-3.226 dBm																																														
2	N	24.6656 GHz	-40.938 dBm																																														
3	N	4.6637 GHz	-53.260 dBm																																														
4	N	7.5048 GHz	-50.831 dBm																																														
5	N	9.5213 GHz	-52.955 dBm																																														
802.11 n(HT20)/MCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>PS</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4379 GHz</td><td>-3.118 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.6656 GHz</td><td>-40.316 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.7725 GHz</td><td>-52.915 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.1257 GHz</td><td>-51.830 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.6813 GHz</td><td>-53.245 dBm</td><td></td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SQL	PS	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4379 GHz	-3.118 dBm					2	N	24.6656 GHz	-40.316 dBm					3	N	4.7725 GHz	-52.915 dBm					4	N	7.1257 GHz	-51.830 dBm					5	N	9.6813 GHz	-53.245 dBm				
MNR	MODE	FREQ	SQL	PS	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.4379 GHz	-3.118 dBm																																														
2	N	24.6656 GHz	-40.316 dBm																																														
3	N	4.7725 GHz	-52.915 dBm																																														
4	N	7.1257 GHz	-51.830 dBm																																														
5	N	9.6813 GHz	-53.245 dBm																																														
802.11 n(HT20)/HCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>PS</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4644 GHz</td><td>-3.383 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.6577 GHz</td><td>-40.791 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>5.0911 GHz</td><td>-52.561 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.3304 GHz</td><td>-51.978 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.6345 GHz</td><td>-54.404 dBm</td><td></td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	SQL	PS	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4644 GHz	-3.383 dBm					2	N	24.6577 GHz	-40.791 dBm					3	N	5.0911 GHz	-52.561 dBm					4	N	7.3304 GHz	-51.978 dBm					5	N	9.6345 GHz	-54.404 dBm				
MNR	MODE	FREQ	SQL	PS	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	2.4644 GHz	-3.383 dBm																																														
2	N	24.6577 GHz	-40.791 dBm																																														
3	N	5.0911 GHz	-52.561 dBm																																														
4	N	7.3304 GHz	-51.978 dBm																																														
5	N	9.6345 GHz	-54.404 dBm																																														

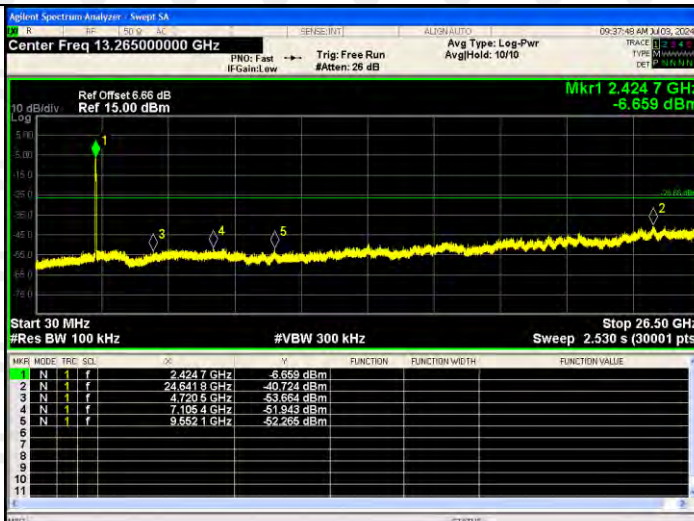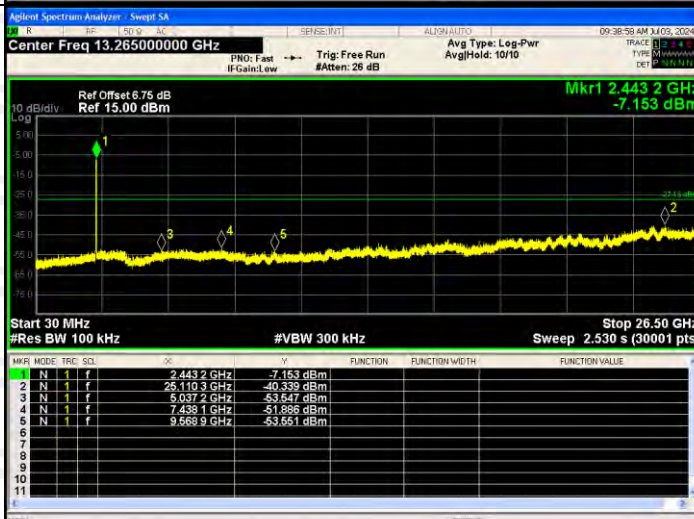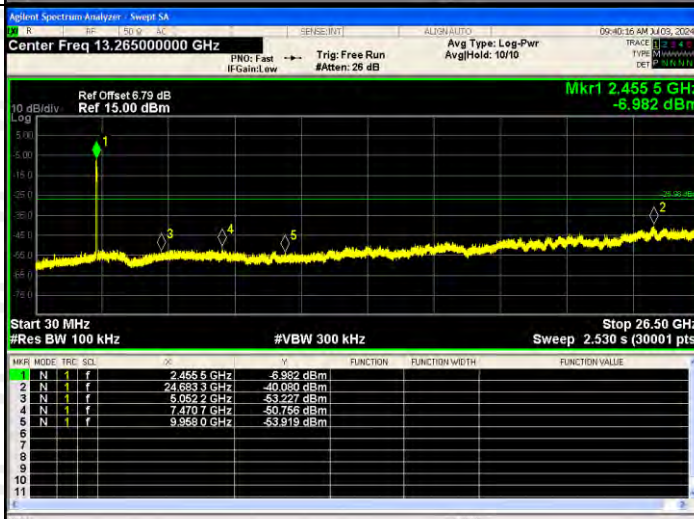
802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.65 dB Ref 15.00 dBm Mkr1 2.424 7 GHz -6.659 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.424 7 GHz</td><td>-6.659 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.641 8 GHz</td><td>-40.724 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.720 4 GHz</td><td>-53.664 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.105 4 GHz</td><td>-51.943 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.652 1 GHz</td><td>-52.265 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.424 7 GHz	-6.659 dBm				2	N	1	f	24.641 8 GHz	-40.724 dBm				3	N	1	f	4.720 4 GHz	-53.664 dBm				4	N	1	f	7.105 4 GHz	-51.943 dBm				5	N	1	f	9.652 1 GHz	-52.265 dBm			
MKR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.424 7 GHz	-6.659 dBm																																																		
2	N	1	f	24.641 8 GHz	-40.724 dBm																																																		
3	N	1	f	4.720 4 GHz	-53.664 dBm																																																		
4	N	1	f	7.105 4 GHz	-51.943 dBm																																																		
5	N	1	f	9.652 1 GHz	-52.265 dBm																																																		
802.11 n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.75 dB Ref 15.00 dBm Mkr1 2.443 2 GHz -7.153 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.443 2 GHz</td><td>-7.153 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.110 3 GHz</td><td>-40.339 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.937 2 GHz</td><td>-53.541 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.438 1 GHz</td><td>-51.886 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.669 9 GHz</td><td>-53.551 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.443 2 GHz	-7.153 dBm				2	N	1	f	25.110 3 GHz	-40.339 dBm				3	N	1	f	5.937 2 GHz	-53.541 dBm				4	N	1	f	7.438 1 GHz	-51.886 dBm				5	N	1	f	9.669 9 GHz	-53.551 dBm			
MKR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.443 2 GHz	-7.153 dBm																																																		
2	N	1	f	25.110 3 GHz	-40.339 dBm																																																		
3	N	1	f	5.937 2 GHz	-53.541 dBm																																																		
4	N	1	f	7.438 1 GHz	-51.886 dBm																																																		
5	N	1	f	9.669 9 GHz	-53.551 dBm																																																		
802.11 n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 6.79 dB Ref 15.00 dBm Mkr1 2.455 5 GHz -6.982 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.455 5 GHz</td><td>-6.982 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.683 3 GHz</td><td>-40.090 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.052 2 GHz</td><td>-53.227 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.470 7 GHz</td><td>-50.756 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.958 0 GHz</td><td>-53.919 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.455 5 GHz	-6.982 dBm				2	N	1	f	24.683 3 GHz	-40.090 dBm				3	N	1	f	5.052 2 GHz	-53.227 dBm				4	N	1	f	7.470 7 GHz	-50.756 dBm				5	N	1	f	9.958 0 GHz	-53.919 dBm			
MKR	MODE	TRIG	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.455 5 GHz	-6.982 dBm																																																		
2	N	1	f	24.683 3 GHz	-40.090 dBm																																																		
3	N	1	f	5.052 2 GHz	-53.227 dBm																																																		
4	N	1	f	7.470 7 GHz	-50.756 dBm																																																		
5	N	1	f	9.958 0 GHz	-53.919 dBm																																																		

RF Conducted Spurious Emissions Graphs


802.11ax(HT20)/LCH

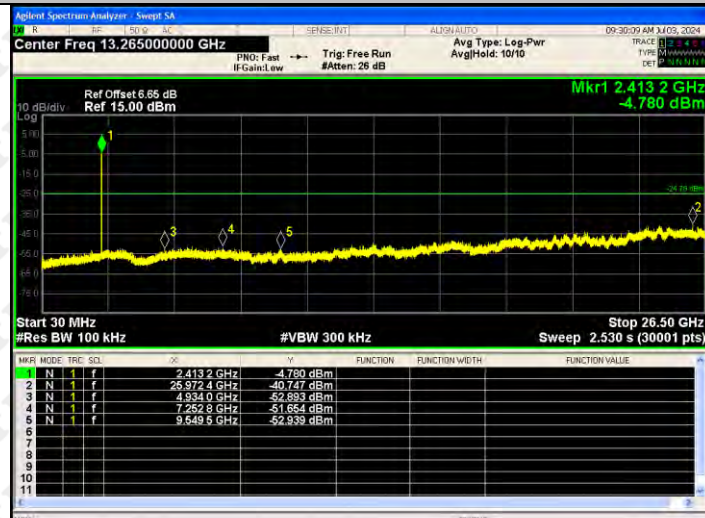

802.11 ax(HT20)/MCH

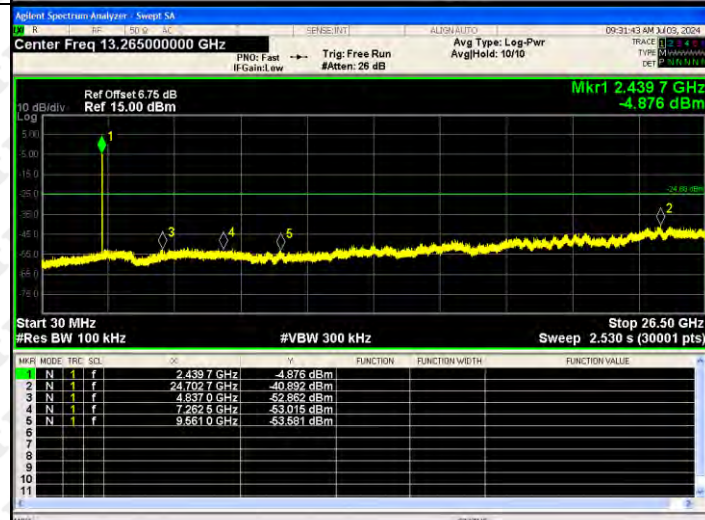


802.11 ax(HT20)/HCH

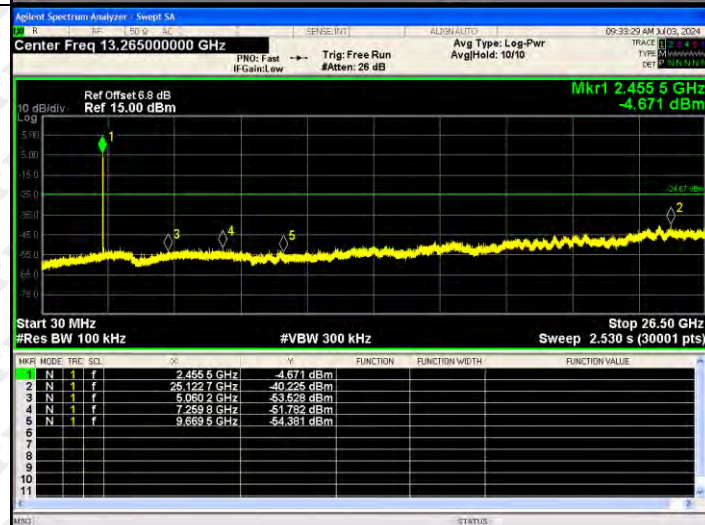


RF Conducted Spurious Emissions Graphs


802.11ax(HT40)/LCH

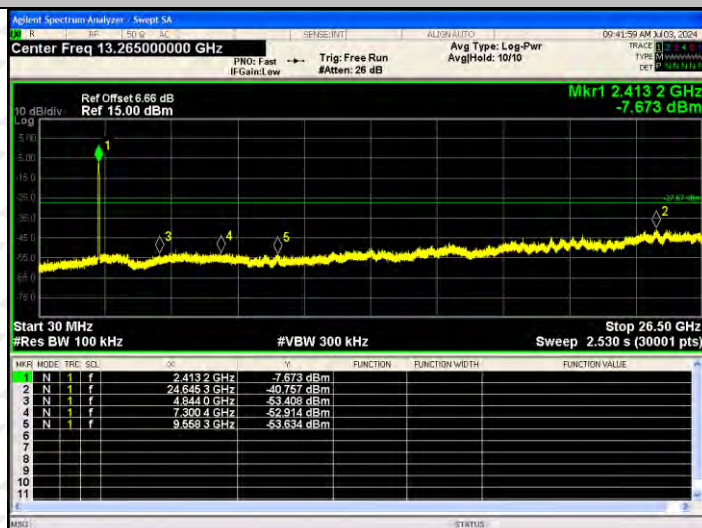

802.11 ax(HT40)/MCH

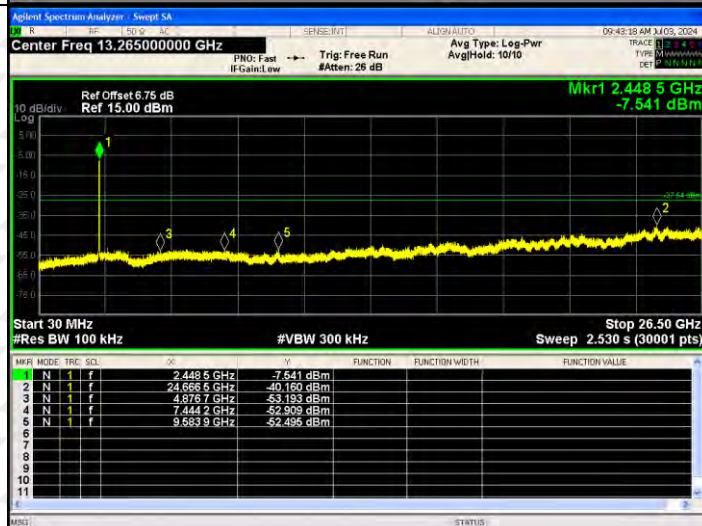

802.11 ax(HT40)/HCH

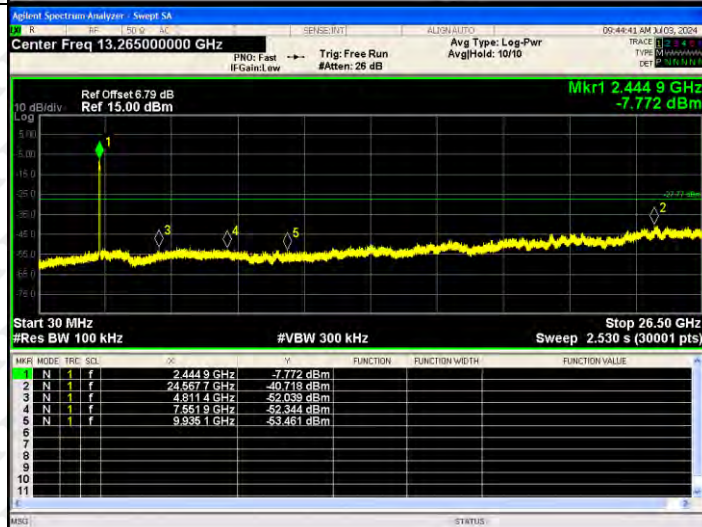


ANT2:




BAND EDGE Graphs

802.11g/LCH

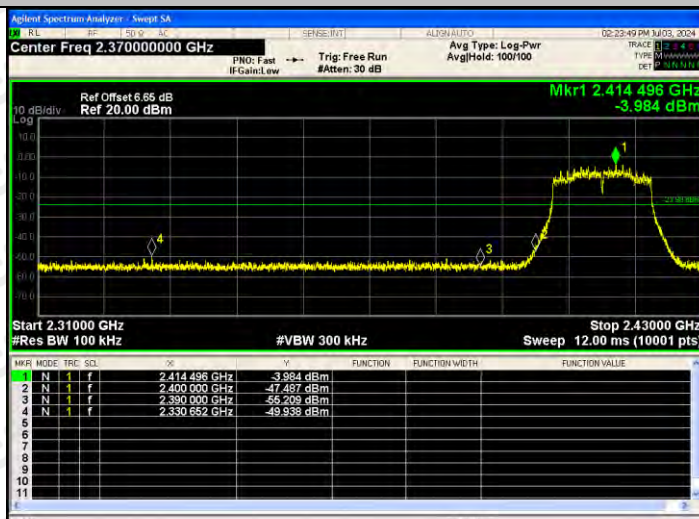


802.11g/HCH

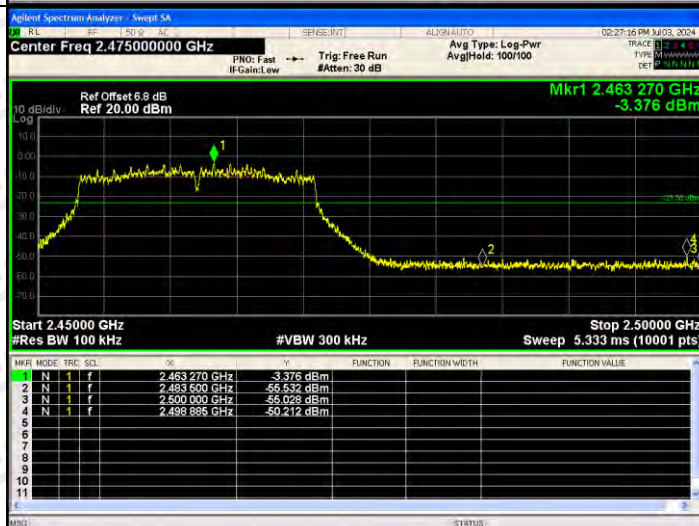


BAND EDGE Graphs

802.11n(HT20)/
LCH

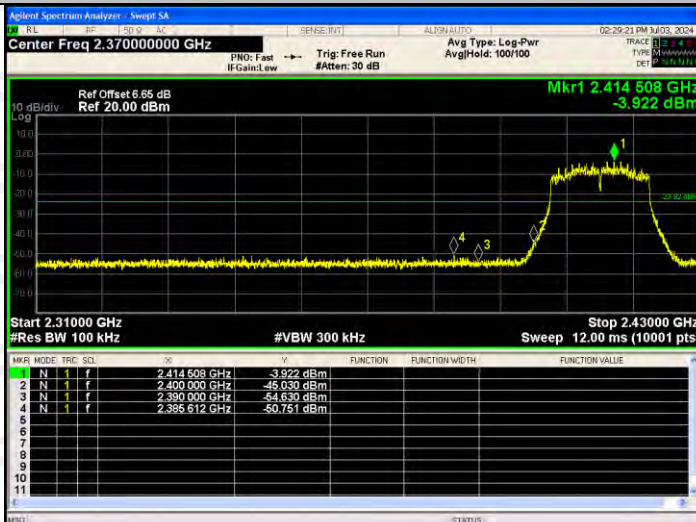


802.11n(HT20)/
HCH

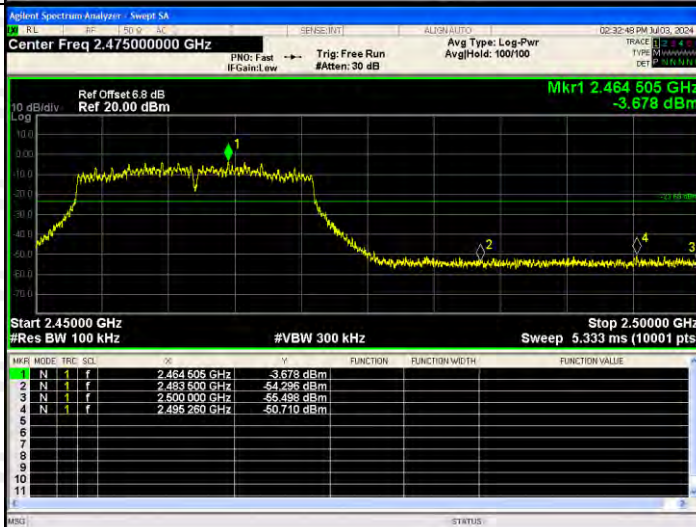

BAND EDGE Graphs

802.11n(HT40)/
LCH

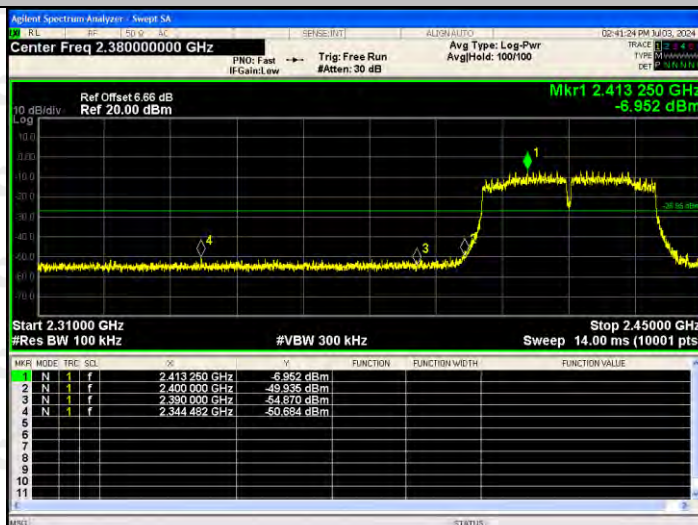


802.11n(HT40)/
HCH




BAND EDGE Graphs

802.11ax(HT20)/
LCH

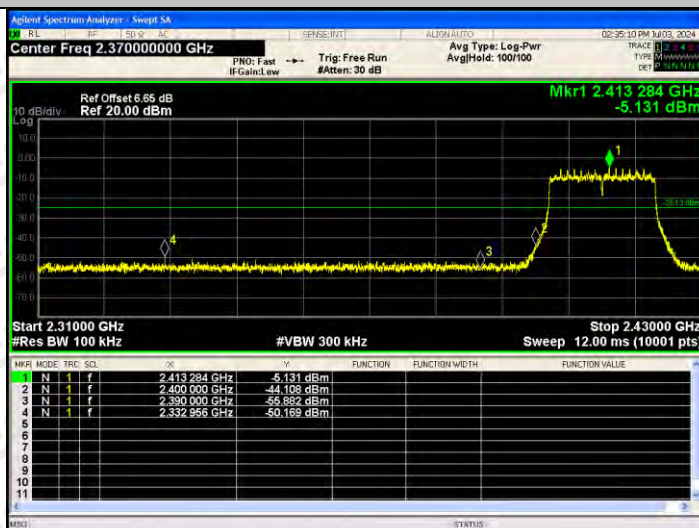


802.11ax(HT20)/
HCH

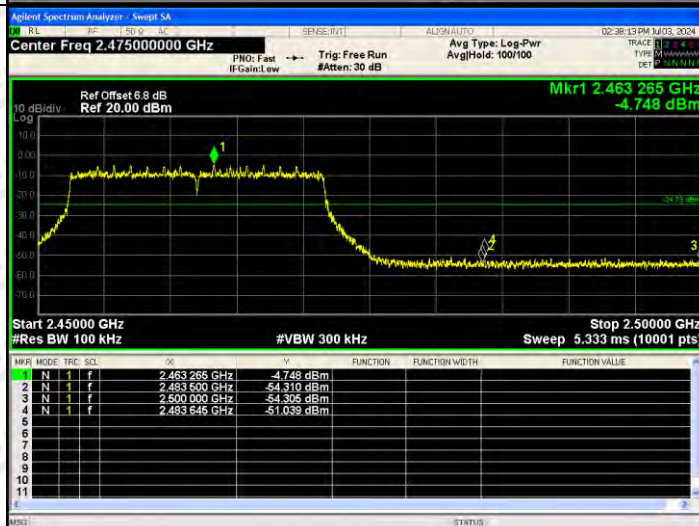


BAND EDGE Graphs

802.11ax(HT40)/
LCH

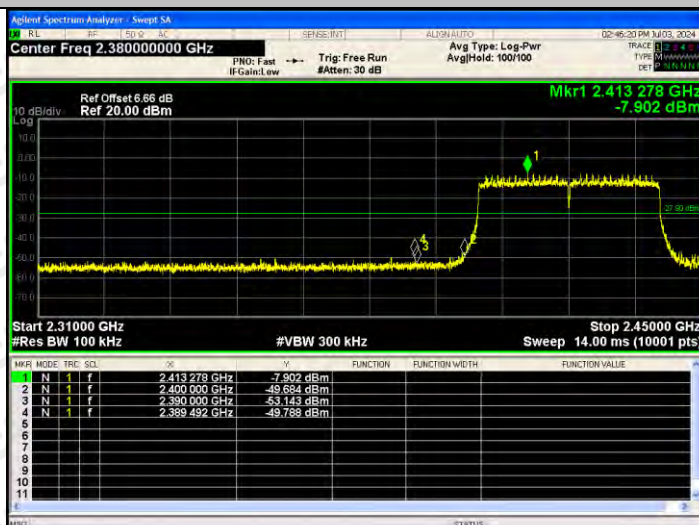


802.11ax(HT40)/
HCH

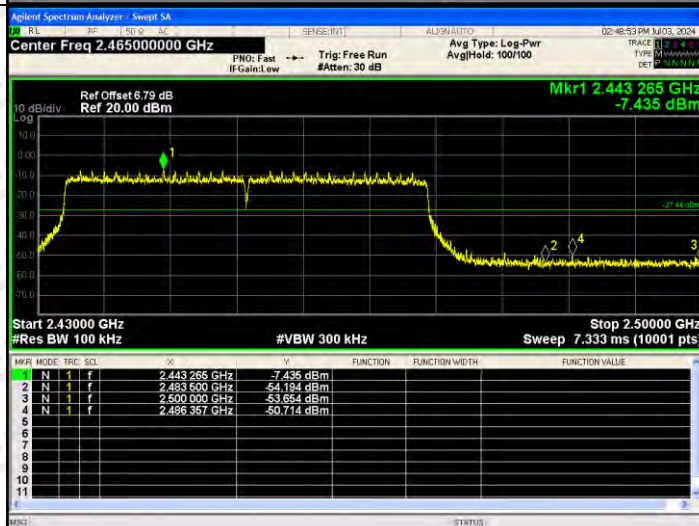


RF Conducted Spurious Emissions Graphs


802.11b/LCH

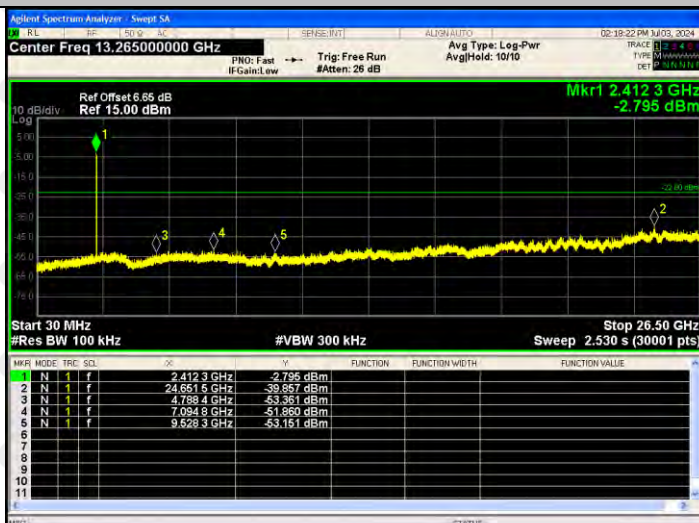

802.11b/MCH

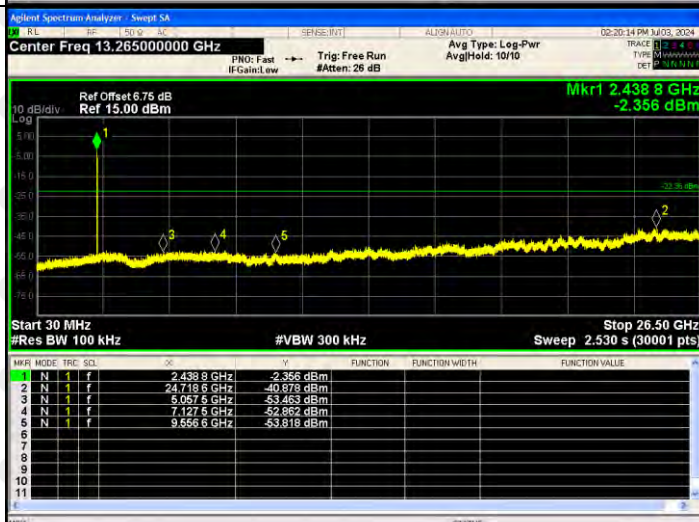


802.11b/HCH

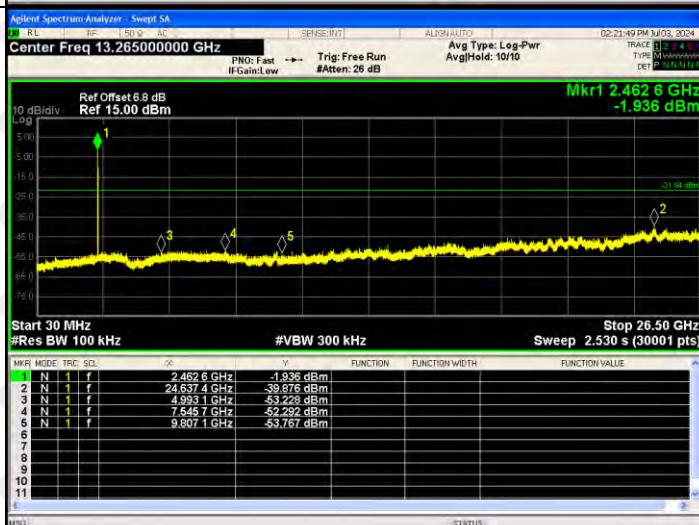


RF Conducted Spurious Emissions Graphs


802.11g/LCH

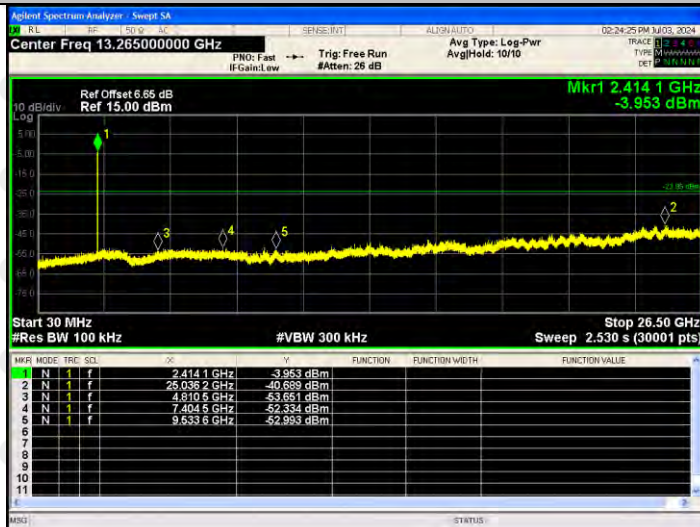




802.11g/MCH



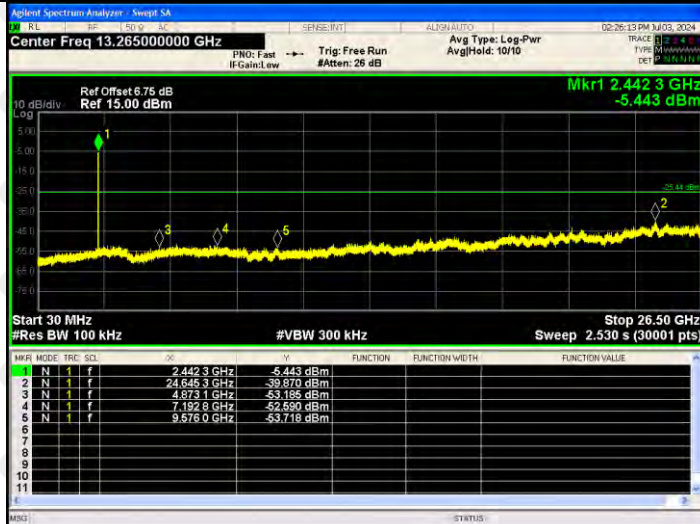


802.11g/HCH

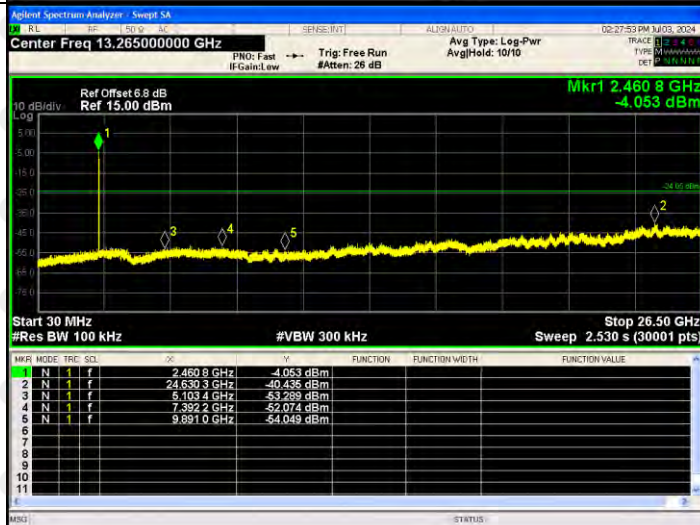


RF Conducted Spurious Emissions Graphs

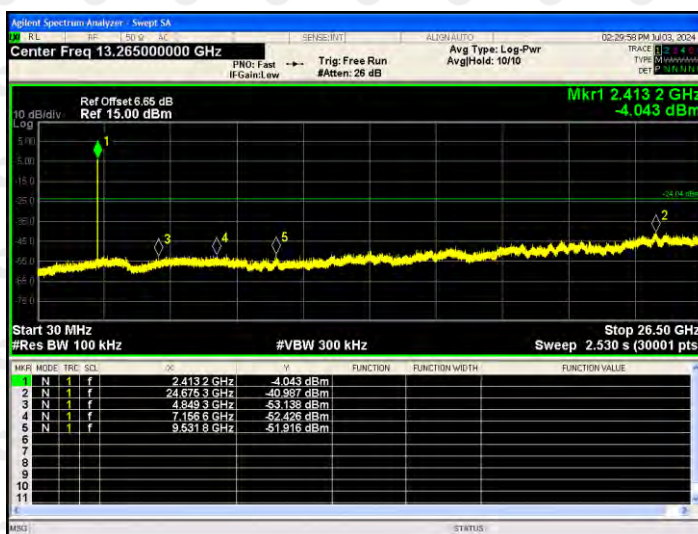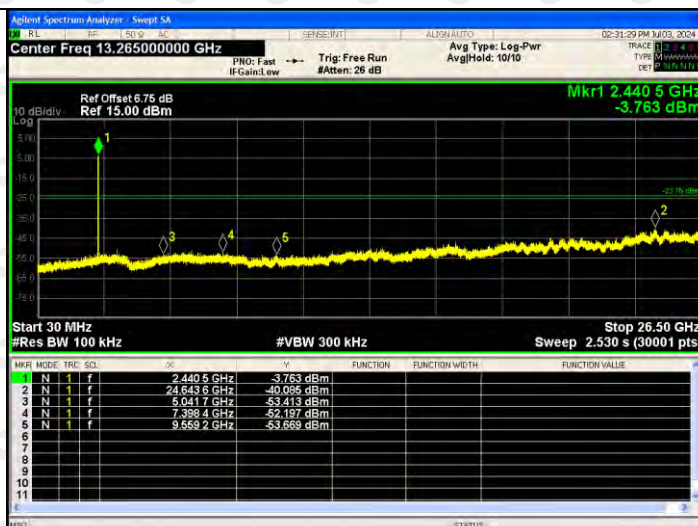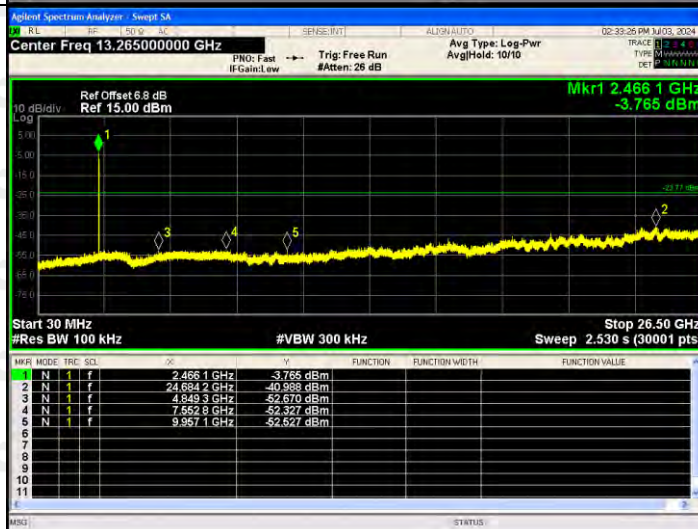802.11n(HT20)/
LCH

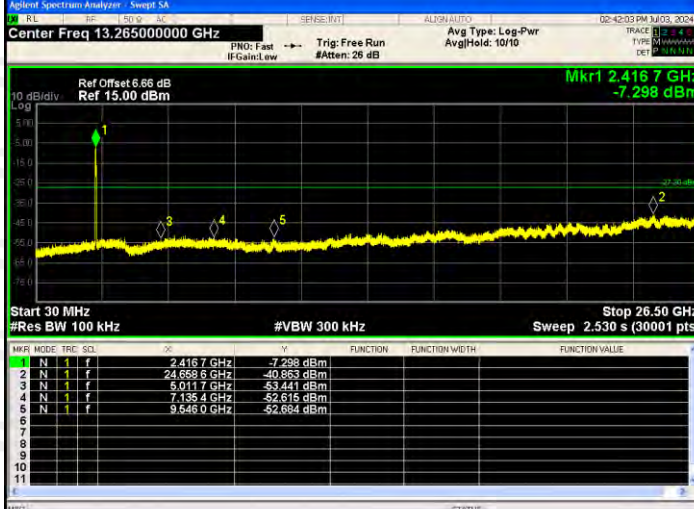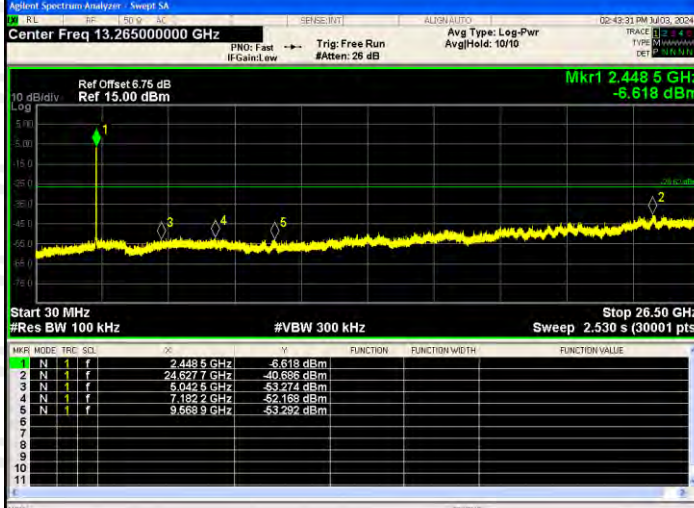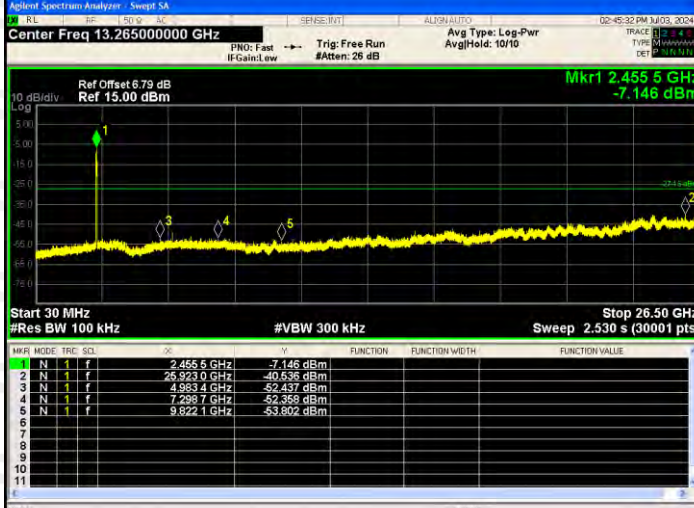802.11
n(HT20)/MCH

802.11
n(HT20)/HCH


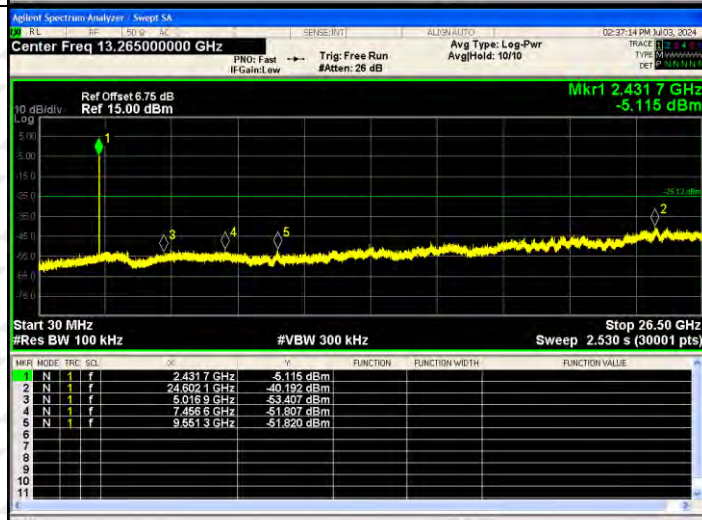
802.11n(HT40)/LCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>OK</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4167 GHz</td><td></td><td>-7.298 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6686 GHz</td><td></td><td>-40.863 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0117 GHz</td><td></td><td>-53.441 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1354 GHz</td><td></td><td>-52.615 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6460 GHz</td><td></td><td>-52.684 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRIG	SOL	F	OK	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4167 GHz		-7.298 dBm				2	N	1	f	24.6686 GHz		-40.863 dBm				3	N	1	f	5.0117 GHz		-53.441 dBm				4	N	1	f	7.1354 GHz		-52.615 dBm				5	N	1	f	9.6460 GHz		-52.684 dBm			
MKR	MODE	TRIG	SOL	F	OK	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f	2.4167 GHz		-7.298 dBm																																																							
2	N	1	f	24.6686 GHz		-40.863 dBm																																																							
3	N	1	f	5.0117 GHz		-53.441 dBm																																																							
4	N	1	f	7.1354 GHz		-52.615 dBm																																																							
5	N	1	f	9.6460 GHz		-52.684 dBm																																																							
802.11n(HT40)/MCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>OK</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4485 GHz</td><td></td><td>-6.618 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6277 GHz</td><td></td><td>-40.686 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0425 GHz</td><td></td><td>-53.274 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1822 GHz</td><td></td><td>-52.165 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6689 GHz</td><td></td><td>-53.292 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRIG	SOL	F	OK	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4485 GHz		-6.618 dBm				2	N	1	f	24.6277 GHz		-40.686 dBm				3	N	1	f	5.0425 GHz		-53.274 dBm				4	N	1	f	7.1822 GHz		-52.165 dBm				5	N	1	f	9.6689 GHz		-53.292 dBm			
MKR	MODE	TRIG	SOL	F	OK	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f	2.4485 GHz		-6.618 dBm																																																							
2	N	1	f	24.6277 GHz		-40.686 dBm																																																							
3	N	1	f	5.0425 GHz		-53.274 dBm																																																							
4	N	1	f	7.1822 GHz		-52.165 dBm																																																							
5	N	1	f	9.6689 GHz		-53.292 dBm																																																							
802.11n(HT40)/HCH	 <table><thead><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>F</th><th>OK</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4555 GHz</td><td></td><td>-7.146 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.9230 GHz</td><td></td><td>-40.636 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9834 GHz</td><td></td><td>-52.437 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2987 GHz</td><td></td><td>-52.356 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.8221 GHz</td><td></td><td>-53.802 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRIG	SOL	F	OK	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4555 GHz		-7.146 dBm				2	N	1	f	25.9230 GHz		-40.636 dBm				3	N	1	f	4.9834 GHz		-52.437 dBm				4	N	1	f	7.2987 GHz		-52.356 dBm				5	N	1	f	9.8221 GHz		-53.802 dBm			
MKR	MODE	TRIG	SOL	F	OK	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f	2.4555 GHz		-7.146 dBm																																																							
2	N	1	f	25.9230 GHz		-40.636 dBm																																																							
3	N	1	f	4.9834 GHz		-52.437 dBm																																																							
4	N	1	f	7.2987 GHz		-52.356 dBm																																																							
5	N	1	f	9.8221 GHz		-53.802 dBm																																																							

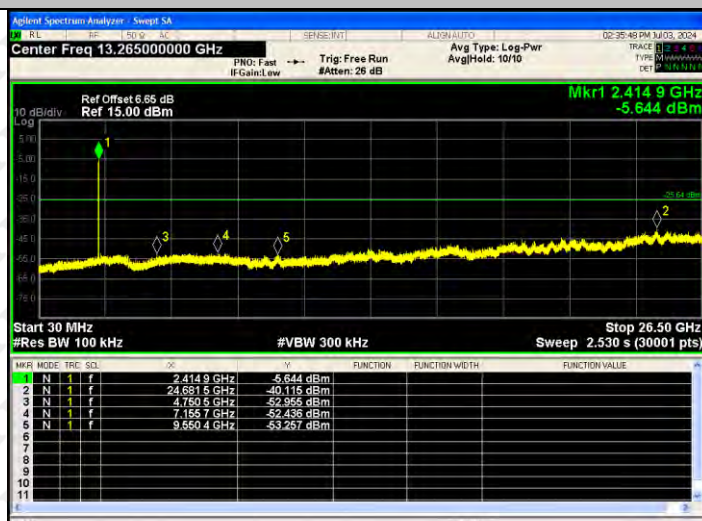RF Conducted Spurious Emissions Graphs


802.11ax(HT20)/LCH



802.11 ax(HT20)/MCH




802.11 ax(HT20)/HCH

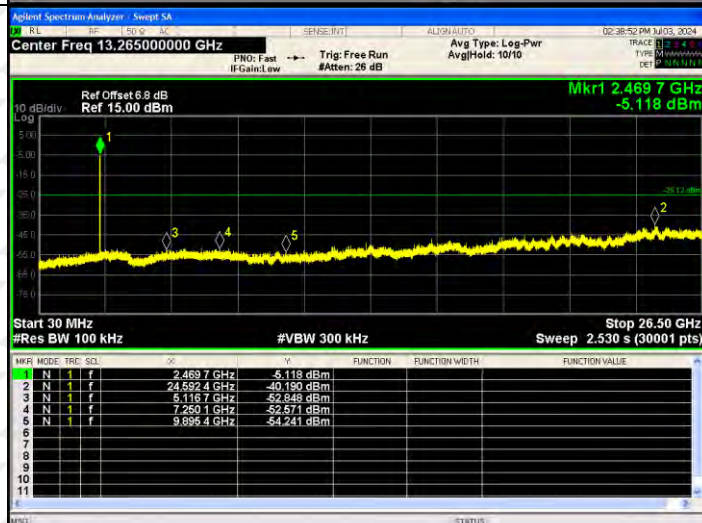


RF Conducted Spurious Emissions Graphs


802.11ax(HT40)/LCH

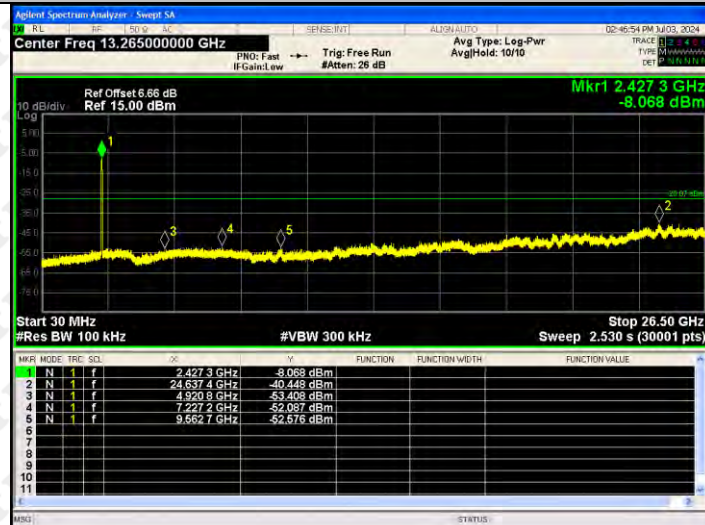

802.11 ax(HT40)/MCH

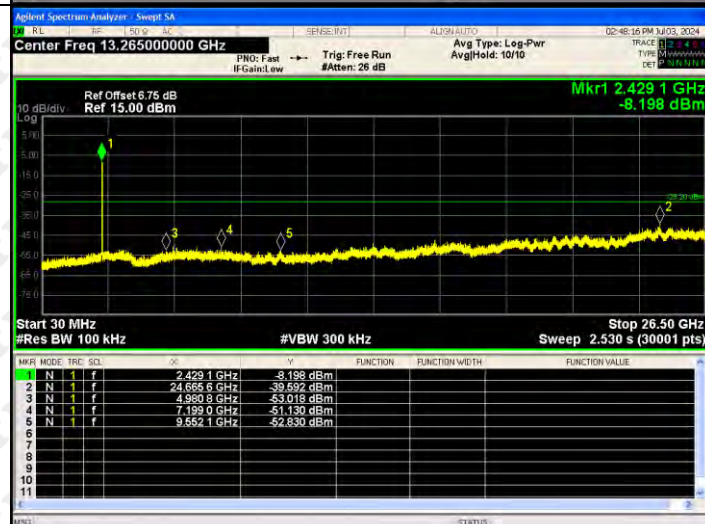


802.11 ax(HT40)/HCH

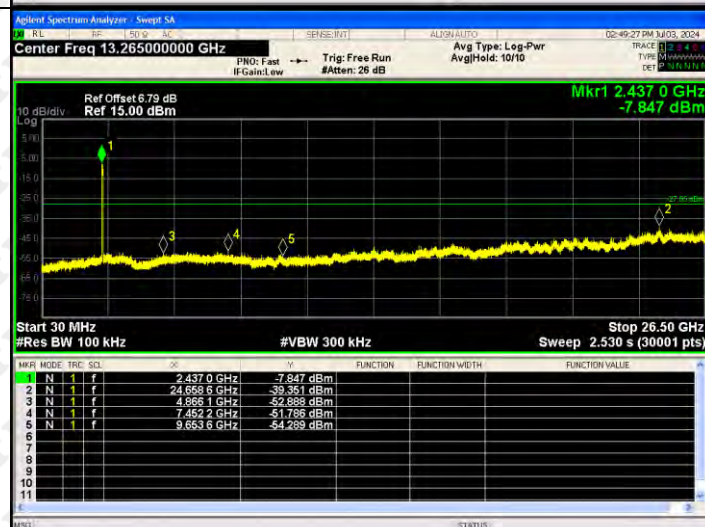

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

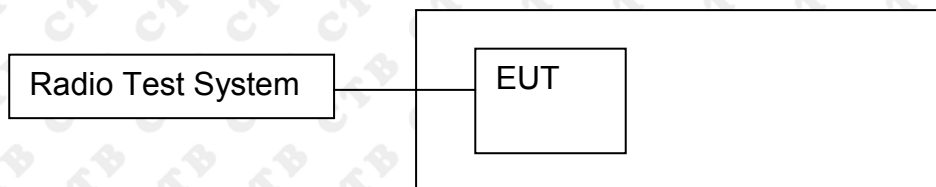

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	14.269	14.007	/	30
	MCH	14.407	14.292	/	30
	HCH	14.401	14.2	/	30
802.11g	LCH	14.298	13.694	/	30
	MCH	14.434	14.177	/	30
	HCH	14.544	14.069	/	30
802.11n(HT20)	LCH	14.18	13.814	17.011	30
	MCH	14.365	14.15	17.269	30
	HCH	14.451	14.096	17.287	30
802.11n(HT40)	LCH	14.29	13.97	17.143	30
	MCH	14.415	14.074	17.258	30
	HCH	14.534	14.182	17.372	30
802.11ax(HT20)	LCH	14.452	14.063	17.272	30
	MCH	14.696	14.438	17.579	30
	HCH	14.707	14.5	17.615	30
802.11ax(HT40)	LCH	14.577	14.283	17.443	30
	MCH	14.742	14.383	17.577	30
	HCH	14.825	14.379	17.618	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

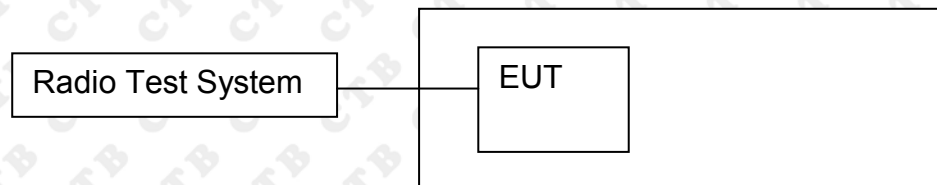

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.217	500	PASS
	MCH	10.488	500	PASS
	HCH	10.271	500	PASS
802.11g	LCH	15.415	500	PASS
	MCH	15.386	500	PASS
	HCH	15.386	500	PASS
802.11n(HT20)	LCH	16.336	500	PASS
	MCH	16.39	500	PASS
	HCH	15.378	500	PASS
802.11n(HT40)	LCH	35.161	500	PASS
	MCH	35.175	500	PASS
	HCH	35.702	500	PASS
802.11ax(HT20)	LCH	18.885	500	PASS
	MCH	19.039	500	PASS
	HCH	18.693	500	PASS
802.11ax(HT40)	LCH	37.834	500	PASS
	MCH	38.004	500	PASS
	HCH	38.021	500	PASS

ANT2:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.319	500	PASS
	MCH	10.098	500	PASS
	HCH	10.173	500	PASS
802.11g	LCH	16.618	500	PASS
	MCH	17.198	500	PASS
	HCH	16.275	500	PASS
802.11n(HT20)	LCH	15.707	500	PASS
	MCH	16.019	500	PASS
	HCH	16.506	500	PASS
802.11n(HT40)	LCH	35.11	500	PASS
	MCH	35.199	500	PASS
	HCH	35.154	500	PASS
802.11ax(HT20)	LCH	19.042	500	PASS
	MCH	19.017	500	PASS
	HCH	18.942	500	PASS
802.11ax(HT40)	LCH	38.048	500	PASS
	MCH	37.941	500	PASS
	HCH	37.913	500	PASS

ANT1:


Test Graph:

Graphs


802.11b /LCH

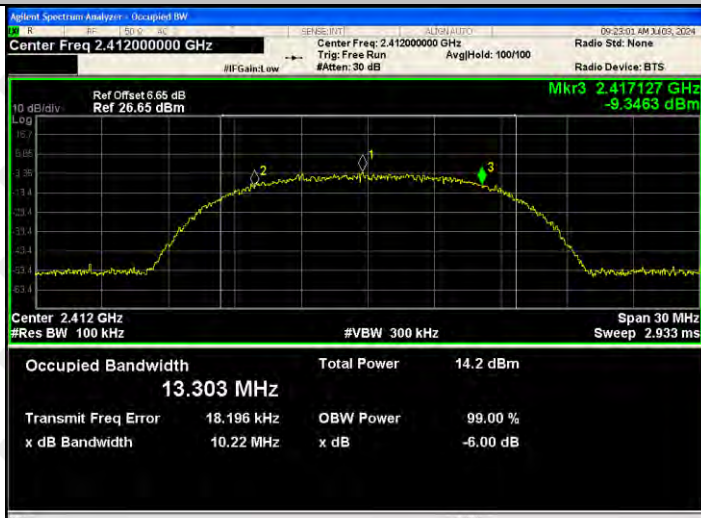


802.11b /MCH

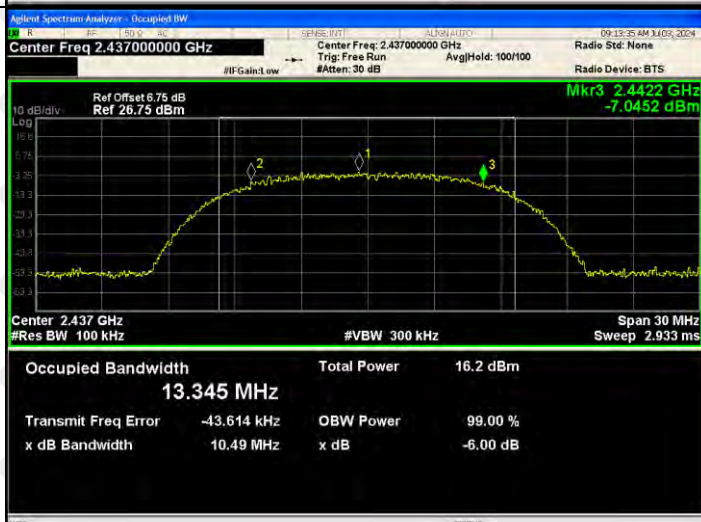


802.11b/HCH

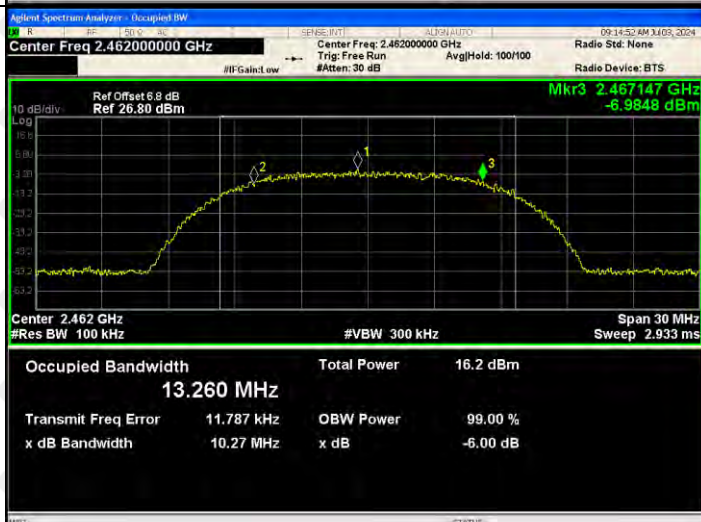


802.11g/LCH



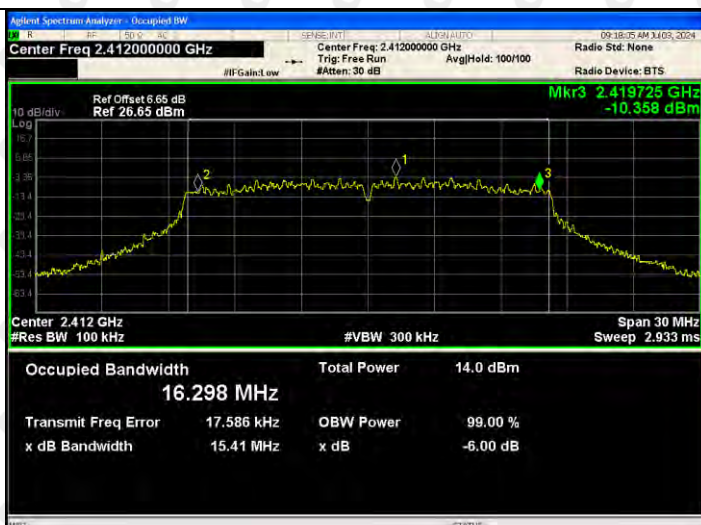




802.11g/MCH



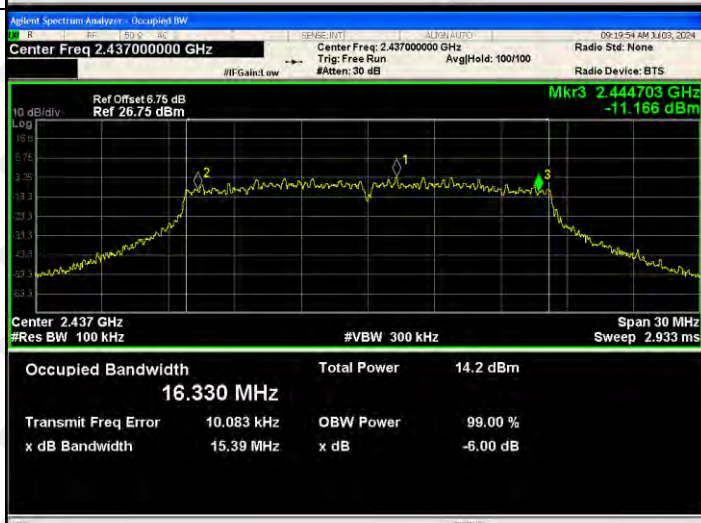





802.11g/HCH

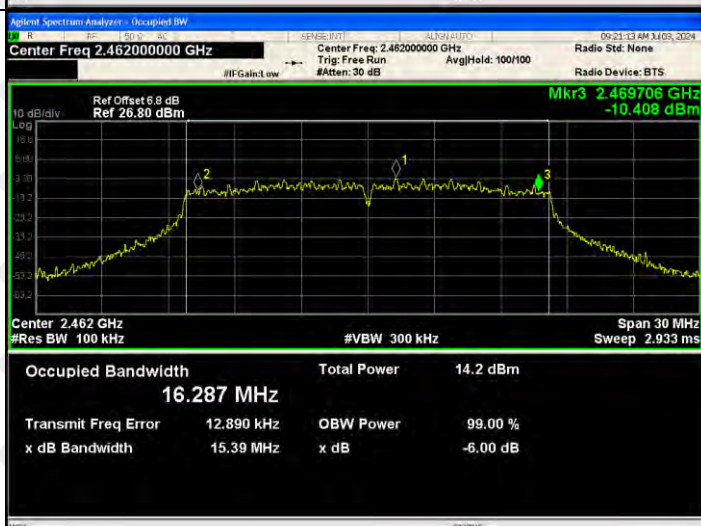

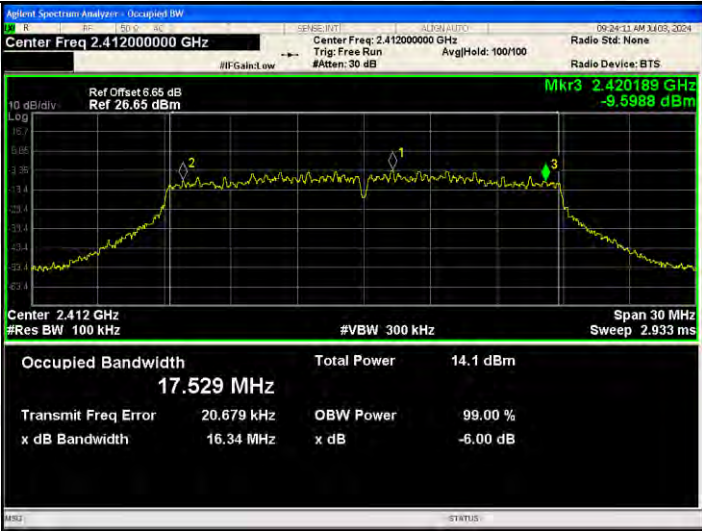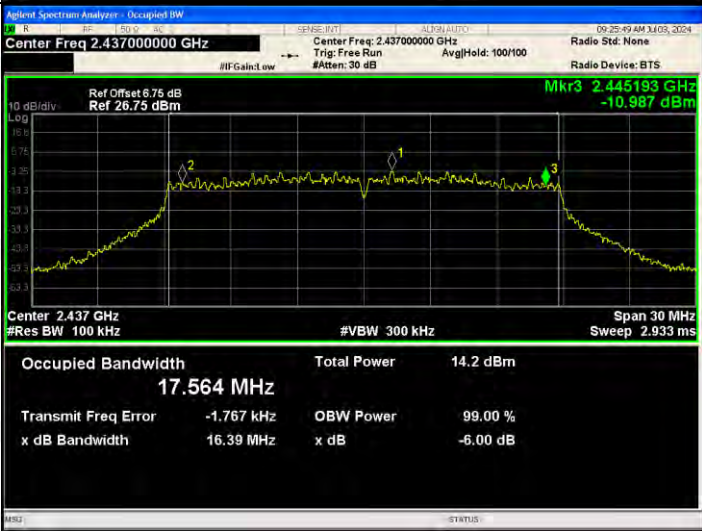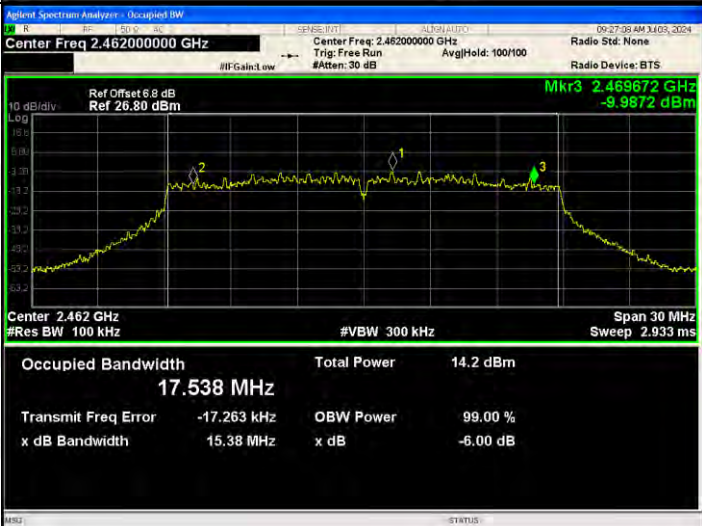802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.65 dB Ref 26.65 dBm Occupied Bandwidth 17.529 MHz Total Power 14.1 dBm Transmit Freq Error 20.679 kHz OBW Power 99.00 % x dB Bandwidth 16.34 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 26.75 dBm Occupied Bandwidth 17.564 MHz Total Power 14.2 dBm Transmit Freq Error -1.767 kHz OBW Power 99.00 % x dB Bandwidth 16.39 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Occupied Bandwidth 17.538 MHz Total Power 14.2 dBm Transmit Freq Error -17.263 kHz OBW Power 99.00 % x dB Bandwidth 15.38 MHz x dB -6.00 dB

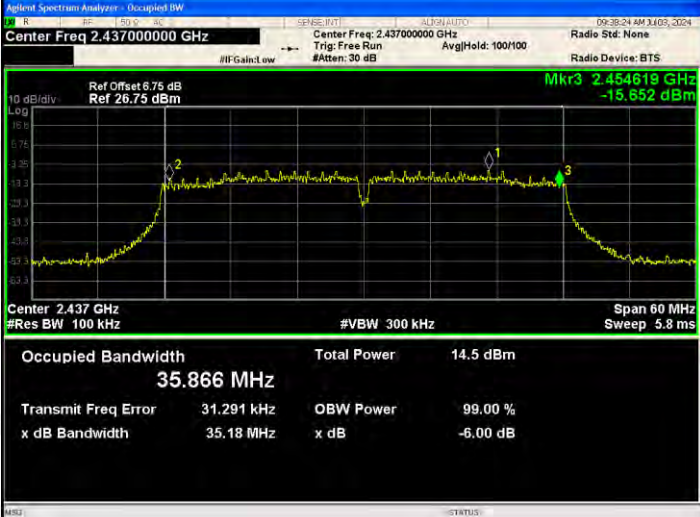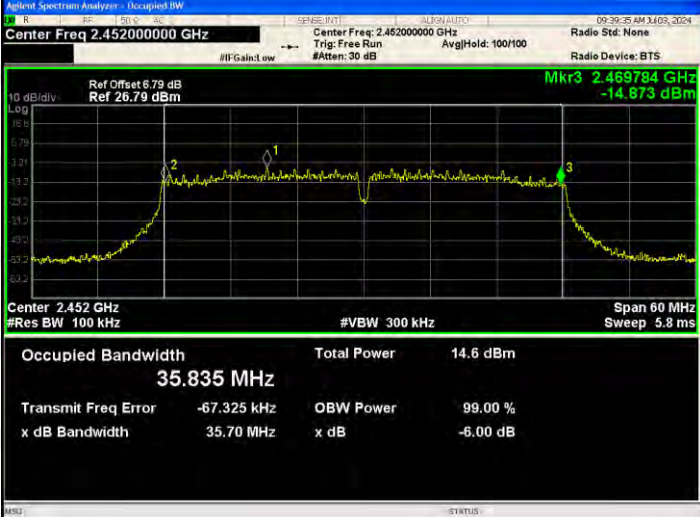802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Occupied Bandwidth: 35.785 MHz Total Power: 14.4 dBm Transmit Freq Error: 43.221 kHz OBW Power: 99.00 % x dB Bandwidth: 35.16 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Occupied Bandwidth: 35.866 MHz Total Power: 14.5 dBm Transmit Freq Error: 31.291 kHz OBW Power: 99.00 % x dB Bandwidth: 35.18 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset: 6.79 dB Ref: 26.79 dBm Occupied Bandwidth: 35.835 MHz Total Power: 14.6 dBm Transmit Freq Error: -67.325 kHz OBW Power: 99.00 % x dB Bandwidth: 35.70 MHz x dB: -6.00 dB

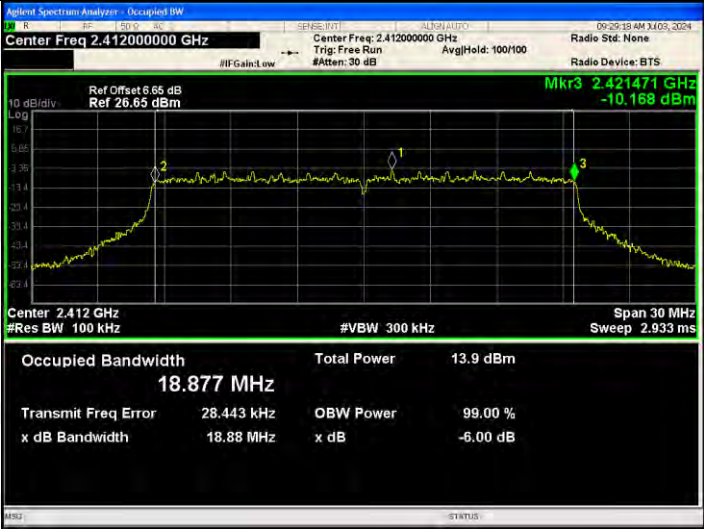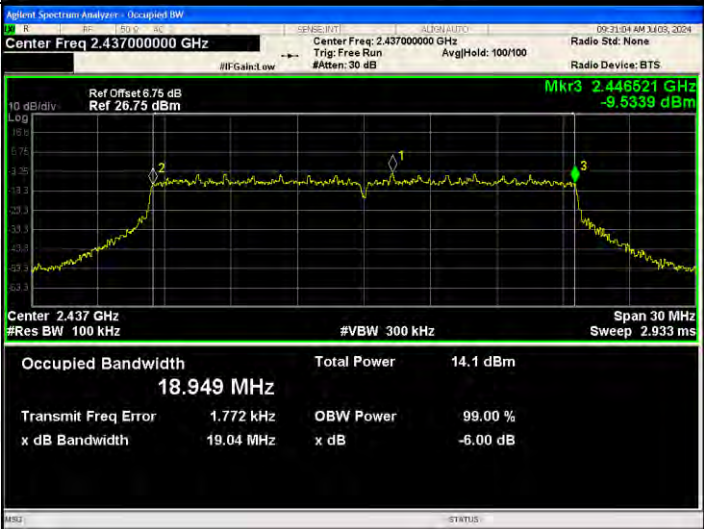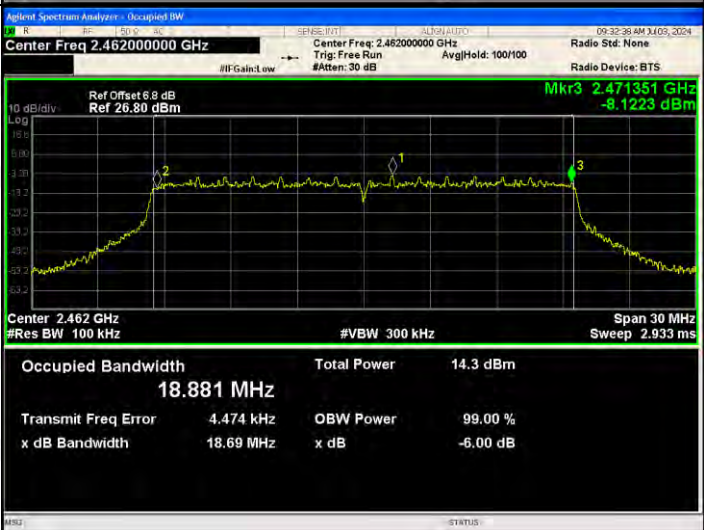802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.55 dB Ref 26.65 dBm Mkr3 2.421471 GHz -10.168 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.877 MHz Total Power 13.9 dBm Transmit Freq Error 28.443 kHz OBW Power 99.00 % x dB Bandwidth 18.88 MHz x dB -6.00 dB
802.11ax(HT20)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.75 dB Ref 26.75 dBm Mkr3 2.446521 GHz -9.5339 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.949 MHz Total Power 14.1 dBm Transmit Freq Error 1.772 kHz OBW Power 99.00 % x dB Bandwidth 19.04 MHz x dB -6.00 dB
802.11ax(HT20)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr3 2.471351 GHz -8.1223 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.881 MHz Total Power 14.3 dBm Transmit Freq Error 4.474 kHz OBW Power 99.00 % x dB Bandwidth 18.69 MHz x dB -6.00 dB

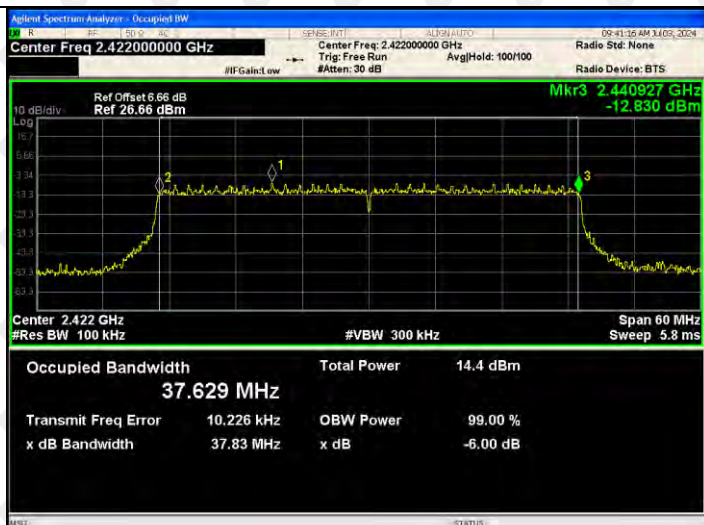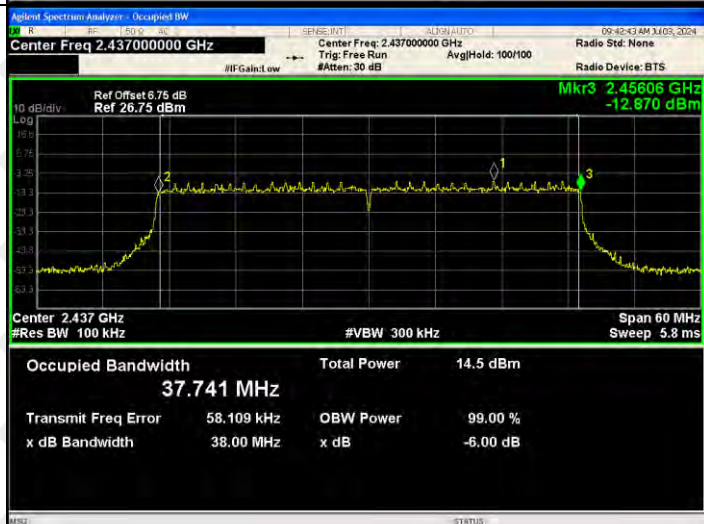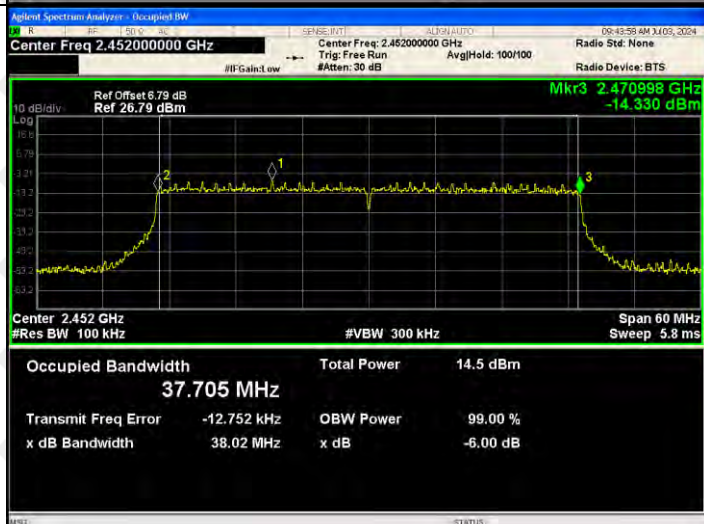
802.11ax(HT40)/LC
H

802.11ax(HT40)/M
CH

802.11ax(HT40)/H
CH


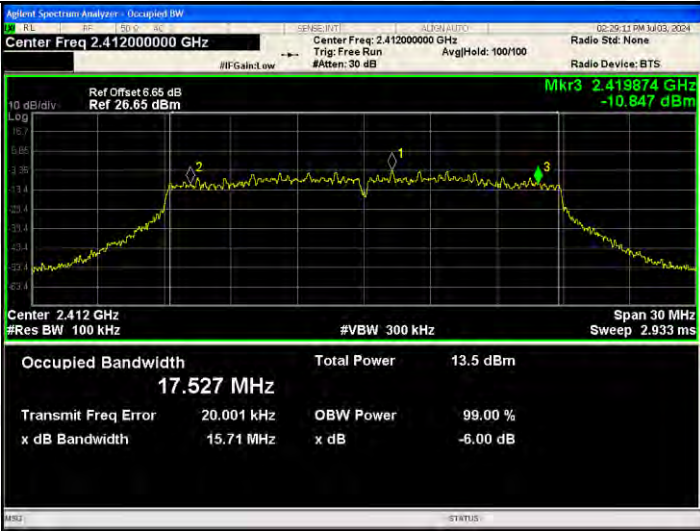
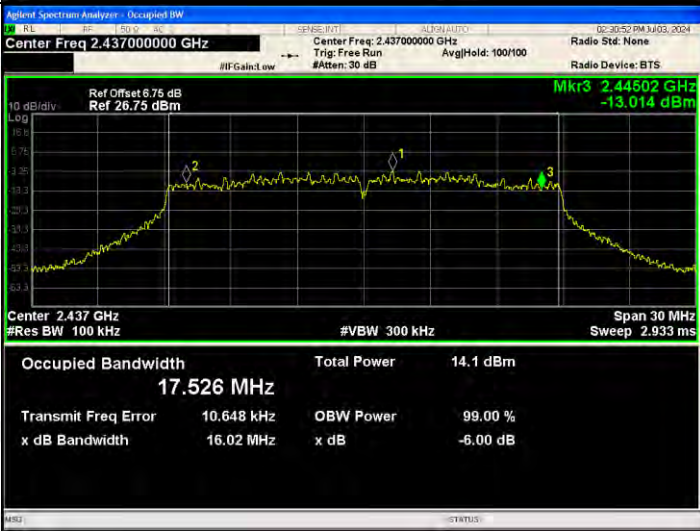
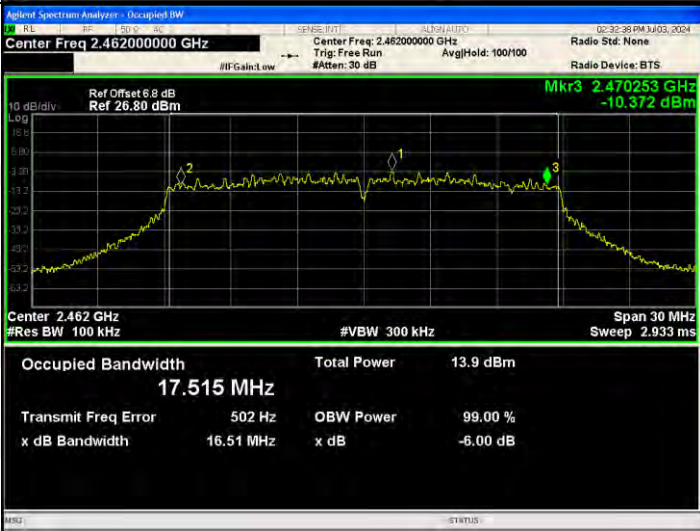
ANT2:




Test Graph:



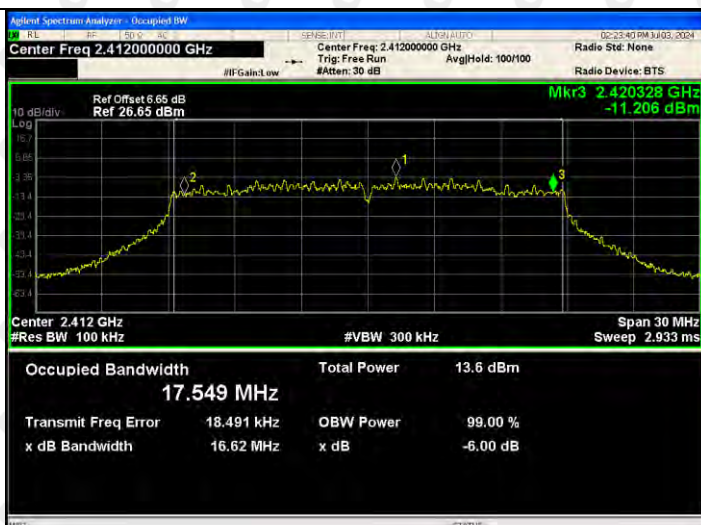





802.11g/LCH



802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 6.65 dB Ref 26.65 dBm Occupied Bandwidth 17.527 MHz Total Power 13.5 dBm Transmit Freq Error 20.001 kHz OBW Power 99.00 % x dB Bandwidth 15.71 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 26.75 dBm Occupied Bandwidth 17.526 MHz Total Power 14.1 dBm Transmit Freq Error 10.648 kHz OBW Power 99.00 % x dB Bandwidth 16.02 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Occupied Bandwidth 17.515 MHz Total Power 13.9 dBm Transmit Freq Error 502 Hz OBW Power 99.00 % x dB Bandwidth 16.51 MHz x dB -6.00 dB

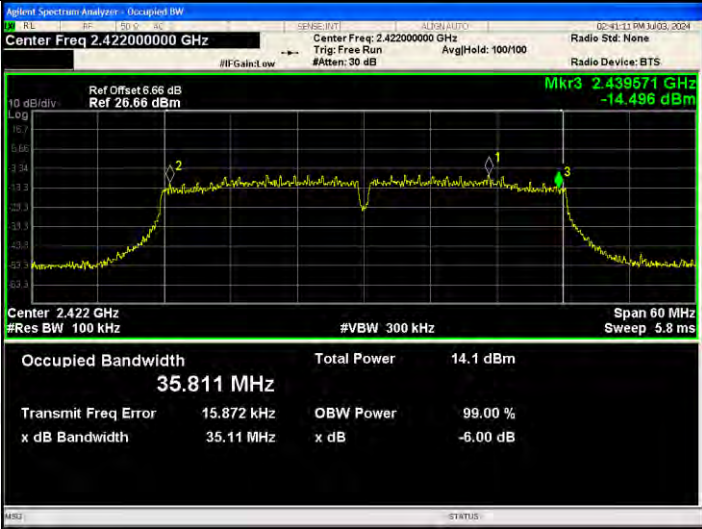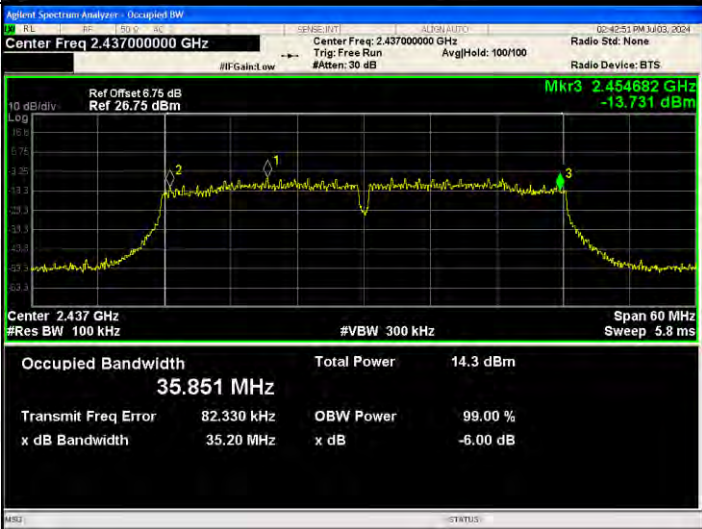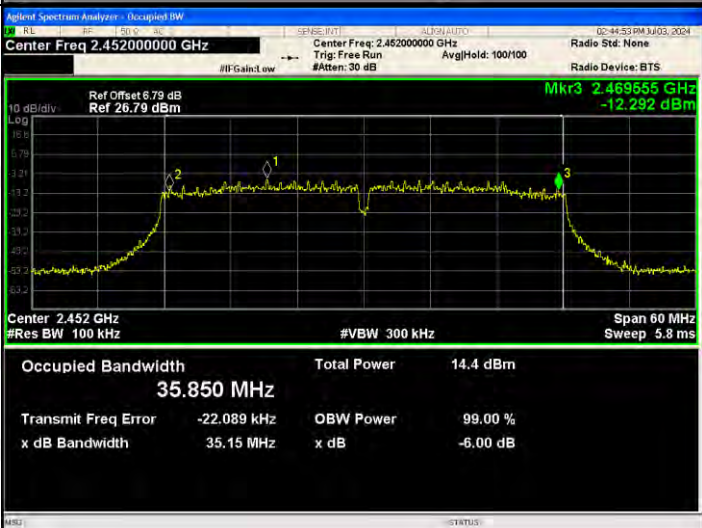
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 26.66 dBm Occupied Bandwidth 35.811 MHz Total Power 14.1 dBm Transmit Freq Error 15.872 kHz OBW Power 99.00 % x dB Bandwidth 35.11 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 26.75 dBm Occupied Bandwidth 35.851 MHz Total Power 14.3 dBm Transmit Freq Error 82.330 kHz OBW Power 99.00 % x dB Bandwidth 35.20 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 6.79 dB Ref 26.79 dBm Occupied Bandwidth 35.850 MHz Total Power 14.4 dBm Transmit Freq Error -22.089 kHz OBW Power 99.00 % x dB Bandwidth 35.15 MHz x dB -6.00 dB

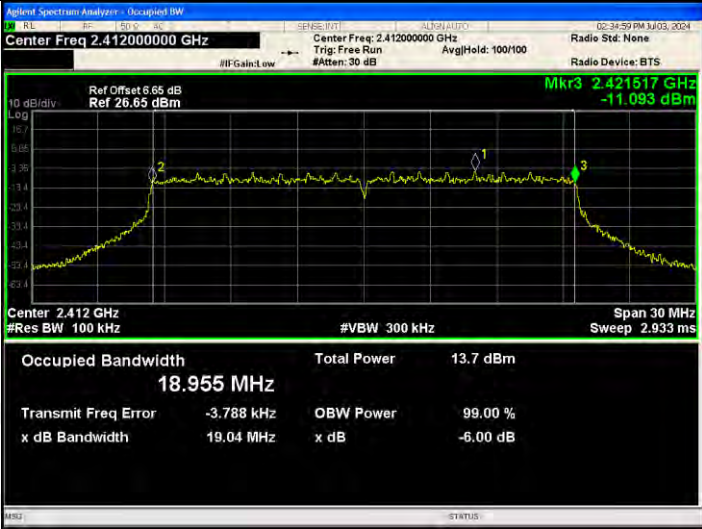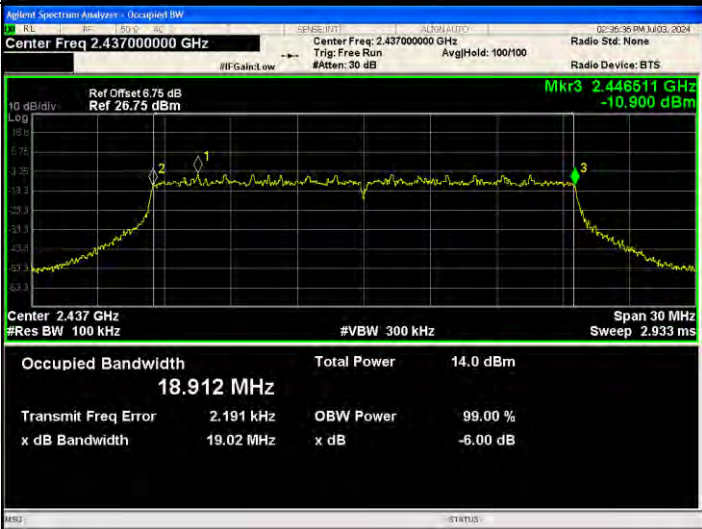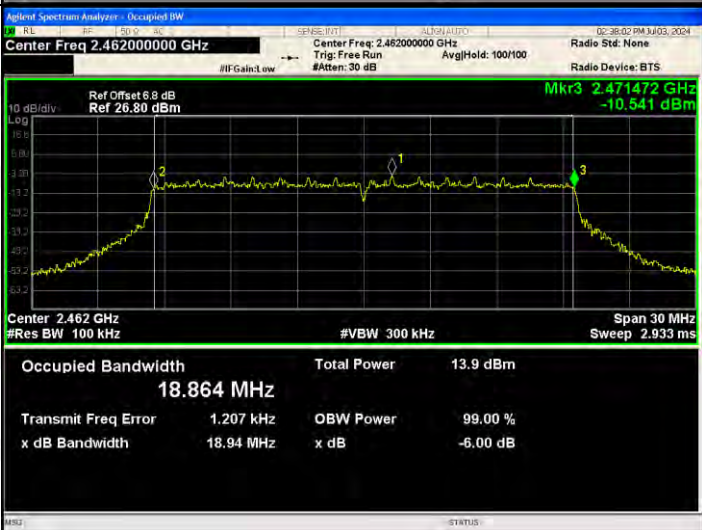802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.65 dB Ref 26.65 dBm Mkr3 2.421617 GHz -11.093 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.955 MHz Total Power 13.7 dBm Transmit Freq Error -3.788 kHz OBW Power 99.00 % x dB Bandwidth 19.04 MHz x dB -6.00 dB
802.11ax(HT20)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.75 dB Ref 26.75 dBm Mkr3 2.446511 GHz -10.900 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.912 MHz Total Power 14.0 dBm Transmit Freq Error 2.191 kHz OBW Power 99.00 % x dB Bandwidth 19.02 MHz x dB -6.00 dB
802.11ax(HT20)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr3 2.471472 GHz -10.541 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.864 MHz Total Power 13.9 dBm Transmit Freq Error 1.207 kHz OBW Power 99.00 % x dB Bandwidth 18.94 MHz x dB -6.00 dB

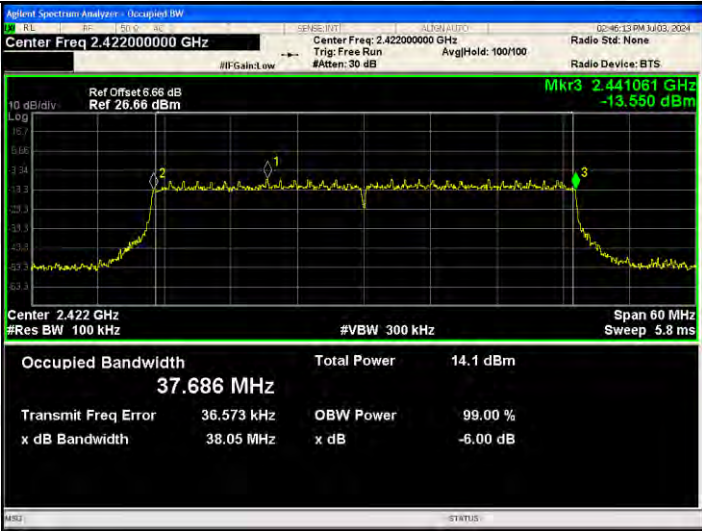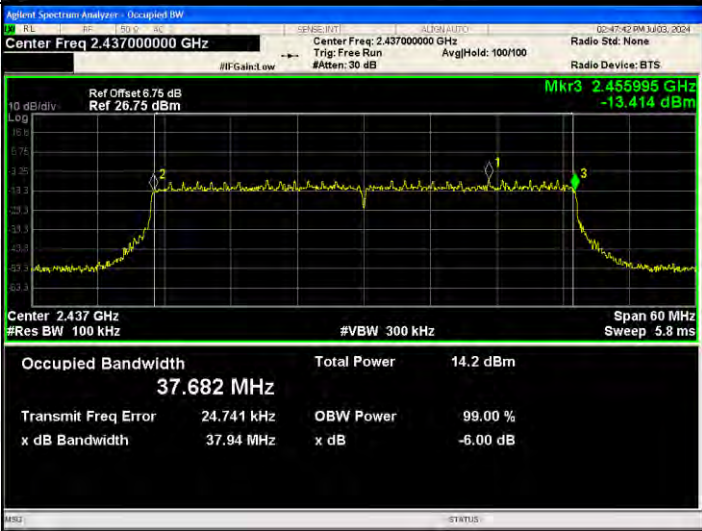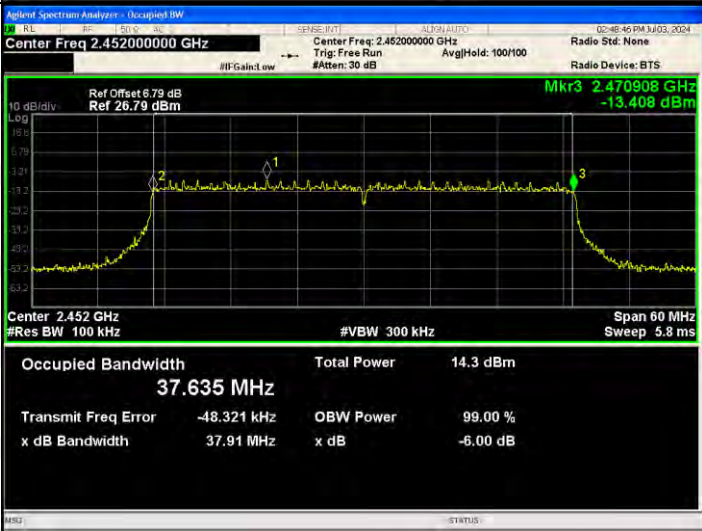802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 26.66 dBm Occupied Bandwidth 37.686 MHz Total Power 14.1 dBm Transmit Freq Error 36.573 kHz OBW Power 99.00 % x dB Bandwidth 38.05 MHz x dB -6.00 dB
802.11ax(HT40)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 26.75 dBm Occupied Bandwidth 37.682 MHz Total Power 14.2 dBm Transmit Freq Error 24.741 kHz OBW Power 99.00 % x dB Bandwidth 37.94 MHz x dB -6.00 dB
802.11ax(HT40)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 6.79 dB Ref 26.79 dBm Occupied Bandwidth 37.635 MHz Total Power 14.3 dBm Transmit Freq Error -48.321 kHz OBW Power 99.00 % x dB Bandwidth 37.91 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

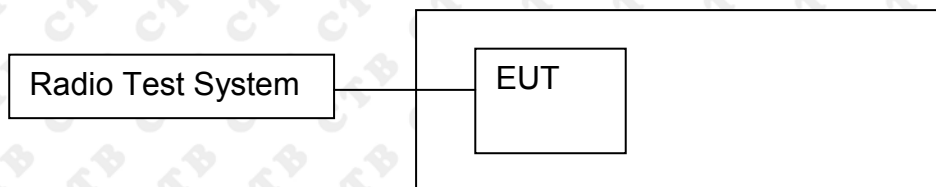

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-16.612	-15.563	/	8
	MCH	-16.693	-15.287	/	8
	HCH	-15.669	-15.079	/	8
802.11g	LCH	-16.297	-18.652	/	8
	MCH	-19.077	-18.404	/	8
	HCH	-18.885	-18.972	/	8
802.11n(H T20)	LCH	-18.768	-19.025	-15.884	8
	MCH	-17.626	-18.63	-15.089	8
	HCH	-18.468	-19.6	-15.987	8
802.11n(H T40)	LCH	-20.766	-22.44	-18.513	8
	MCH	-20.662	-21.778	-18.174	8
	HCH	-20.919	-20.296	-17.586	8
802.11ax(HT20)	LCH	-21.344	-20.797	-18.052	8
	MCH	-20.136	-20.472	-17.290	8
	HCH	-20.202	-20.548	-17.361	8
802.11ax(HT40)	LCH	-23.47	-23.425	-20.437	8
	MCH	-20.724	-23.758	-18.971	8
	HCH	-21.695	-23.215	-19.379	8


ANT1: Test Graph

Graphs


802.11b /LCH

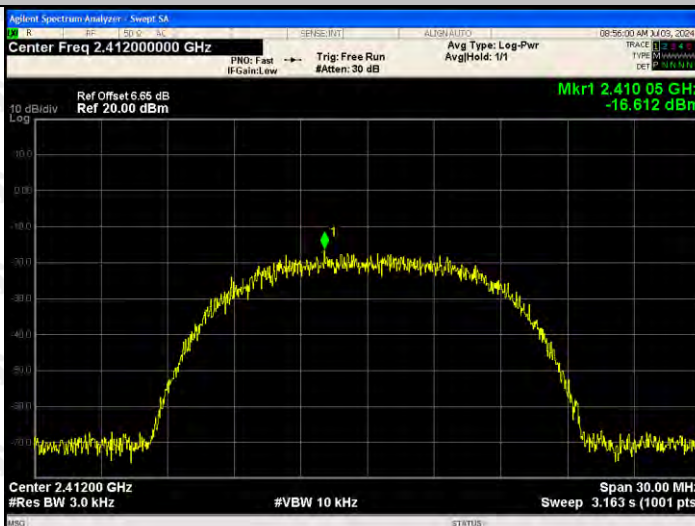


802.11b /MCH

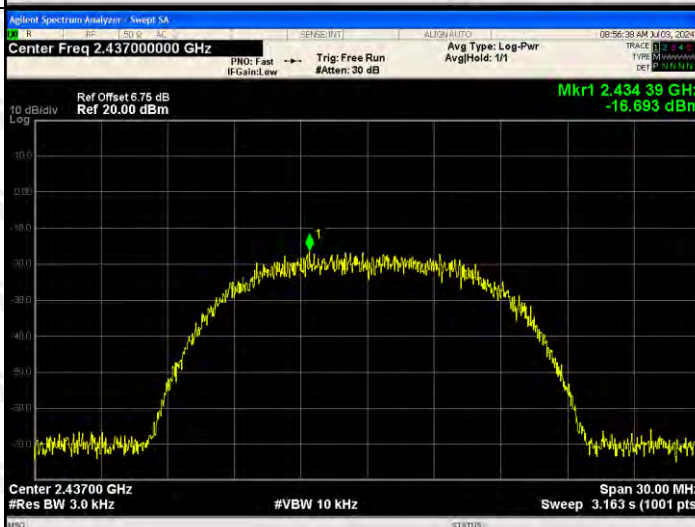


802.11b/HCH

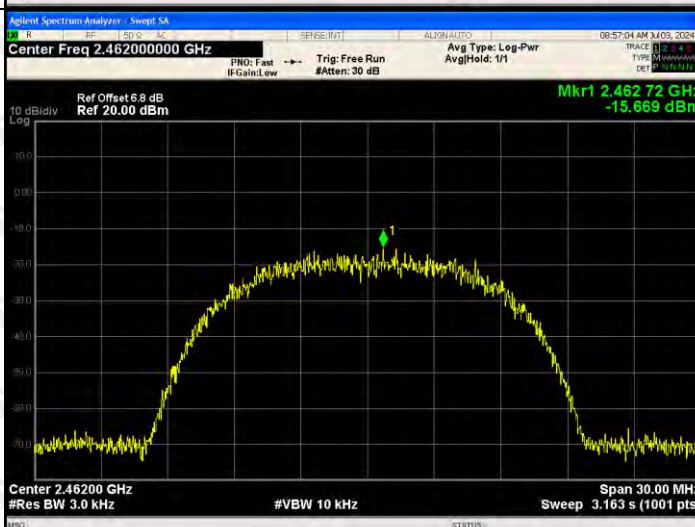


802.11g/LCH



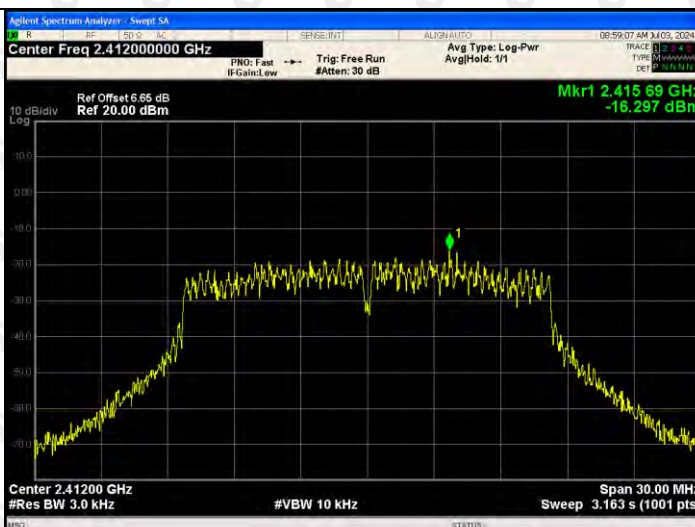




802.11g/MCH


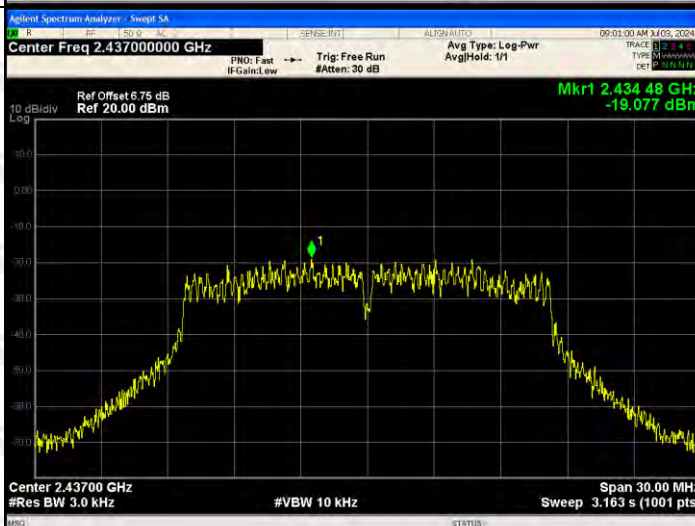




802.11g/HCH

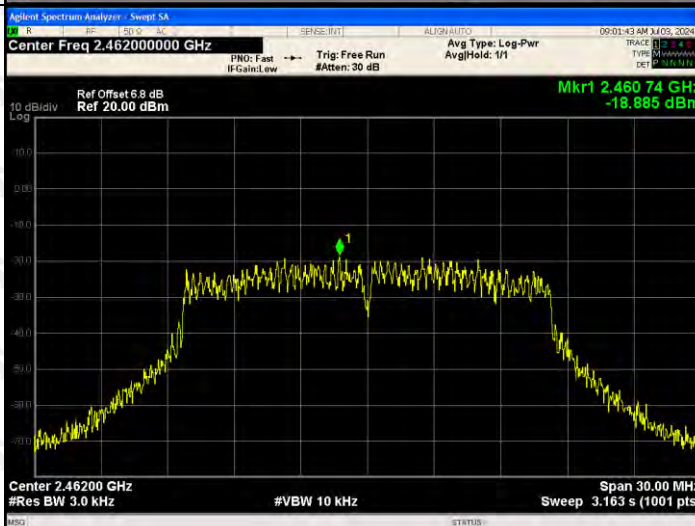

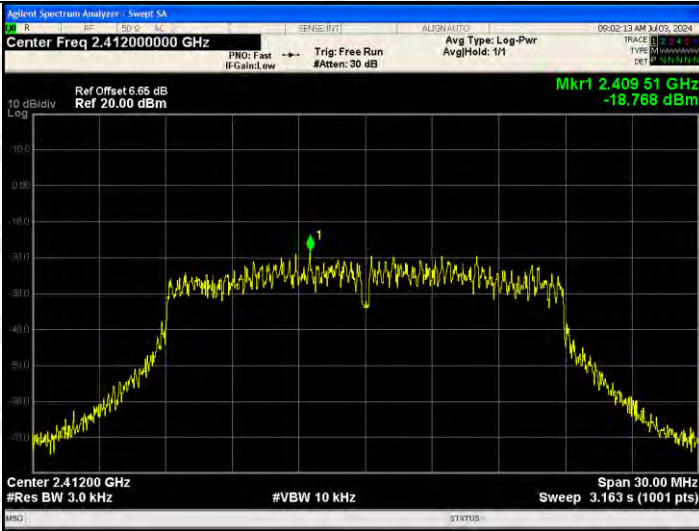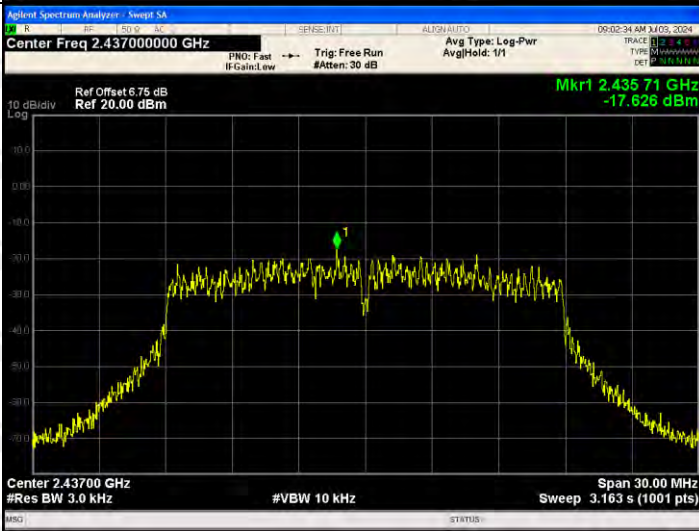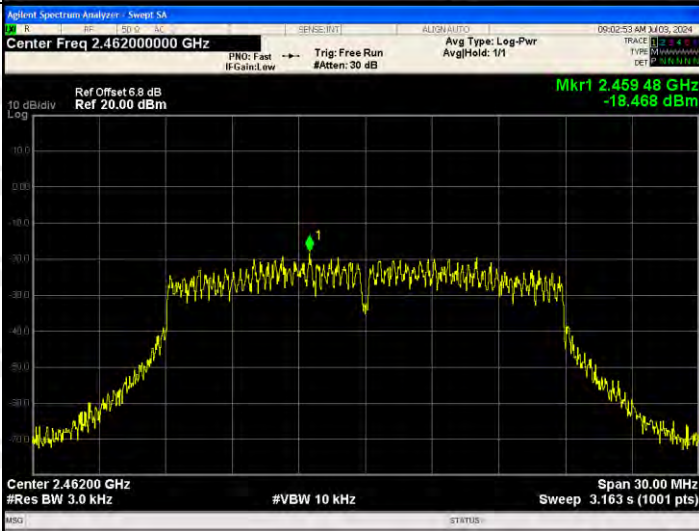802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.409 51 GHz -18.768 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.435 71 GHz -17.626 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.459 48 GHz -18.468 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

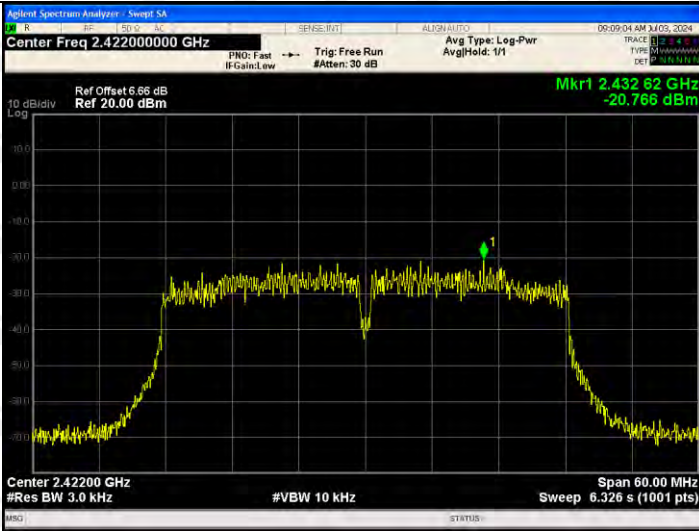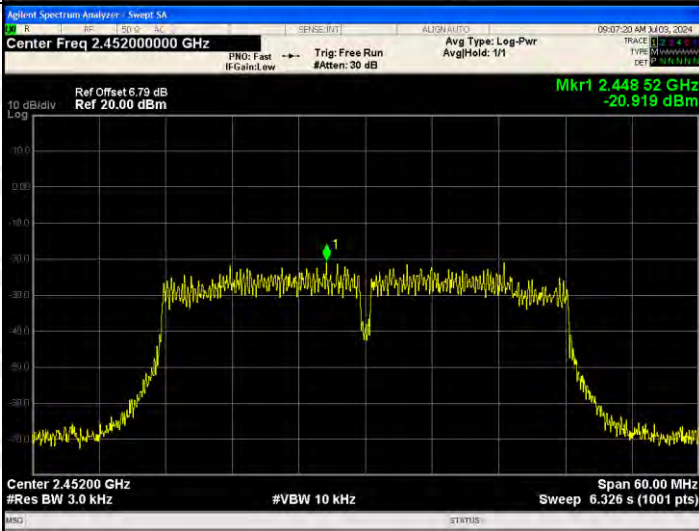802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.432 62 GHz -20.766 dBm Center 2.4220 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.439 46 GHz -20.662 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.78 dB Ref 20.00 dBm Mkr1 2.448 52 GHz -20.919 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

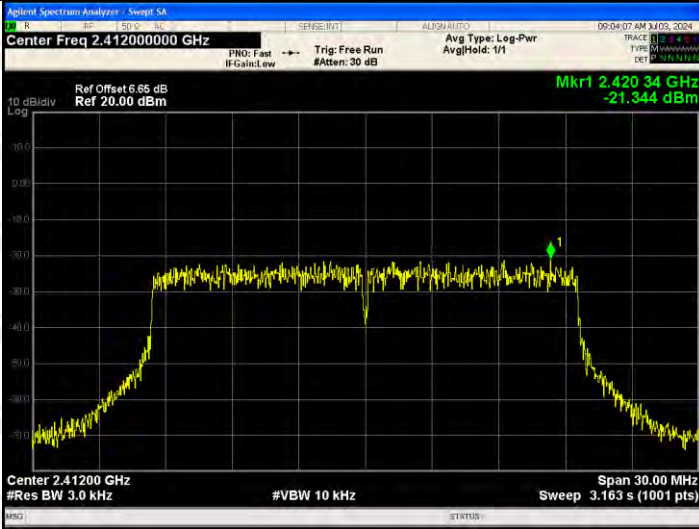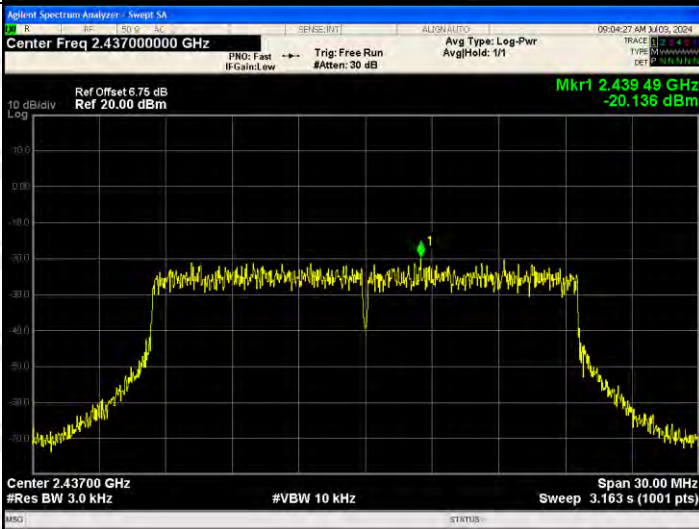
802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.42034 GHz -21.344 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.43949 GHz -20.136 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.46449 GHz -20.202 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

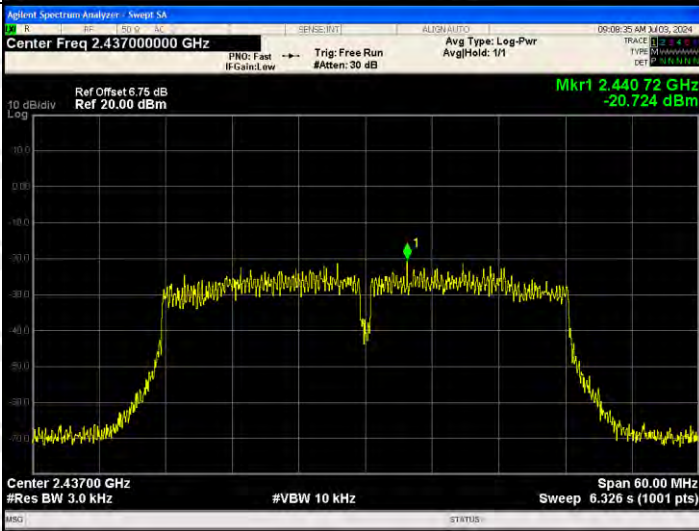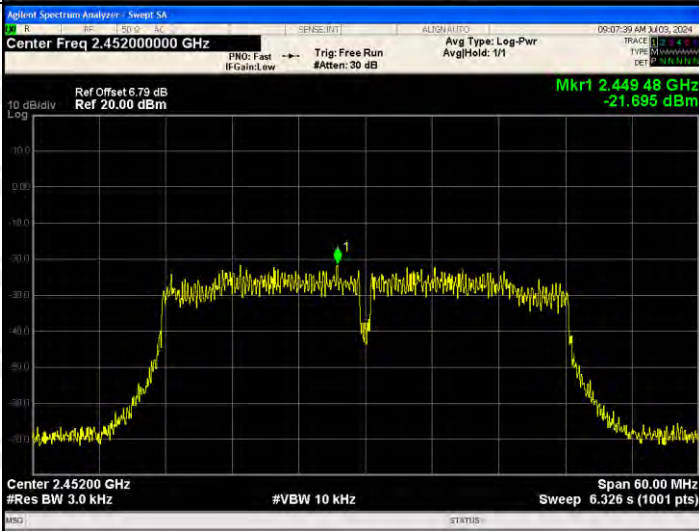802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.437 00 GHz -23.470 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.440 72 GHz -20.724 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.78 dB Ref 20.00 dBm Mkr1 2.449 48 GHz -21.695 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)


ANT 2: Test Graph

Graphs

802.11b /LCH

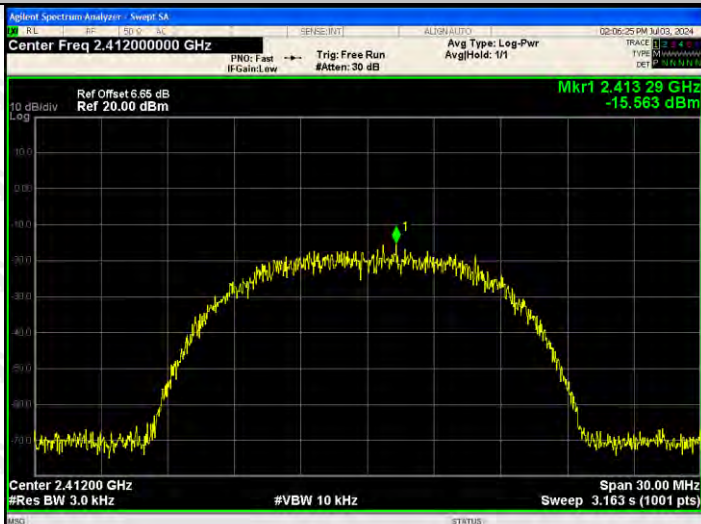

802.11b /MCH

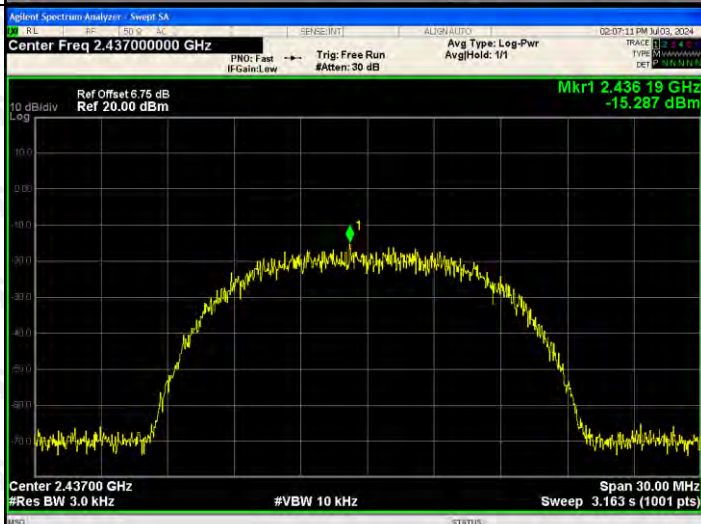

802.11b/HCH



802.11g/LCH






802.11g/MCH







802.11g/HCH

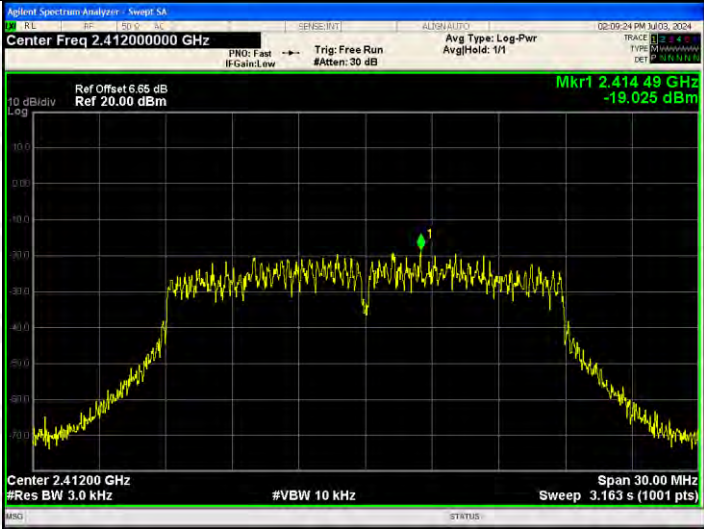

802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.414 49 GHz -19.025 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.438 29 GHz -18.630 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.460 14 GHz -19.600 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

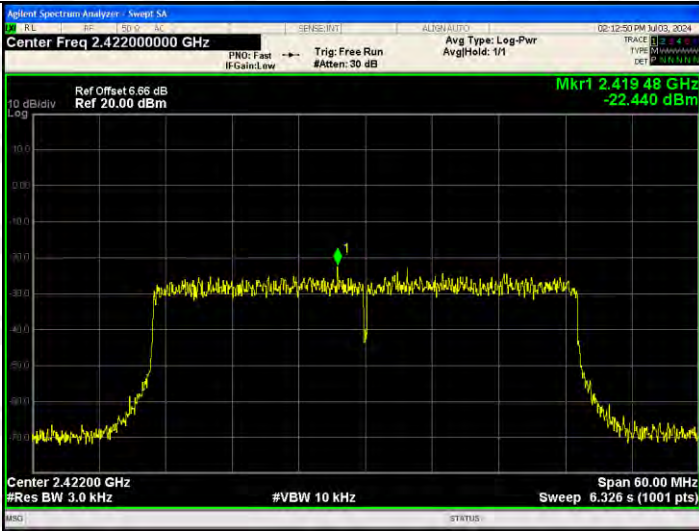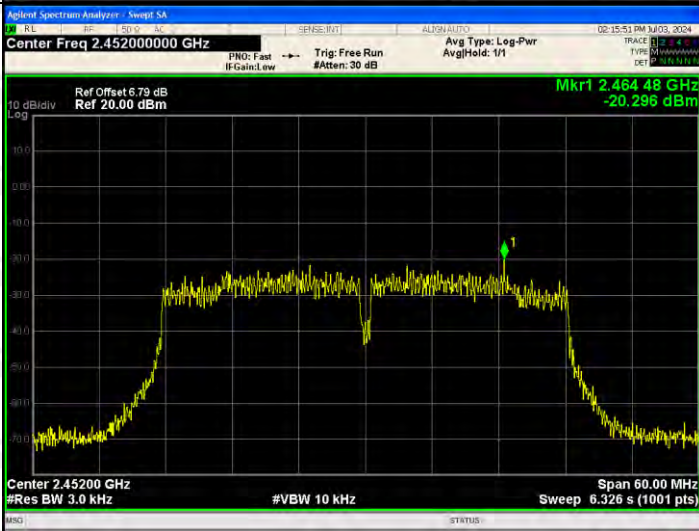802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.419 48 GHz -22.440 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.431 36 GHz -21.778 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.464 48 GHz -20.296 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

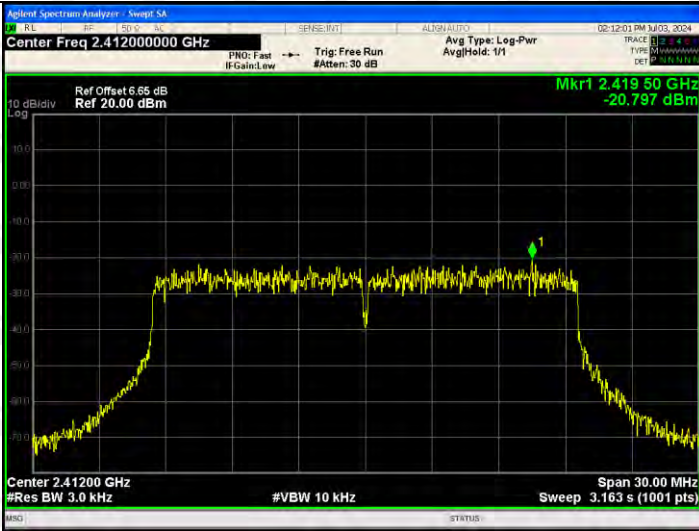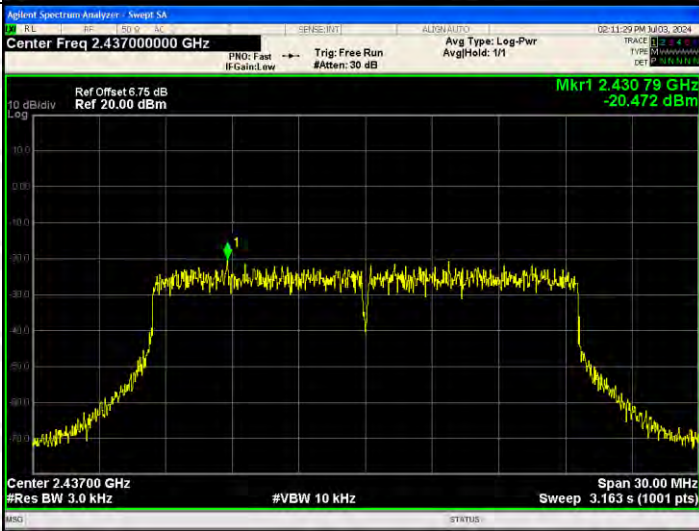802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.41950 GHz -20.797 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.43079 GHz -20.472 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.45798 GHz -20.548 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

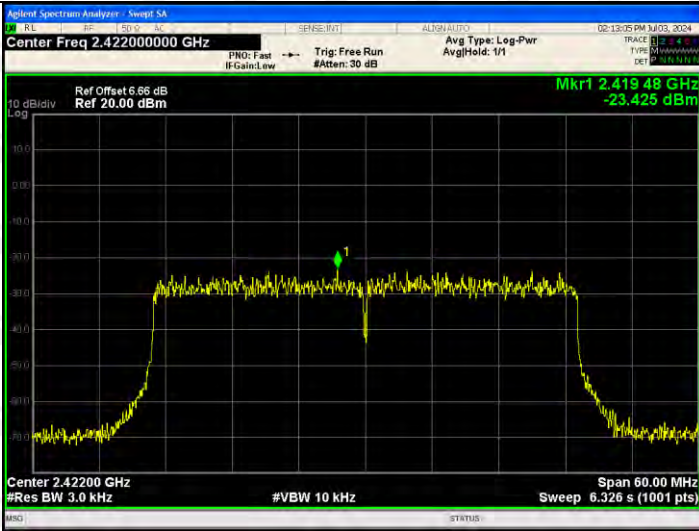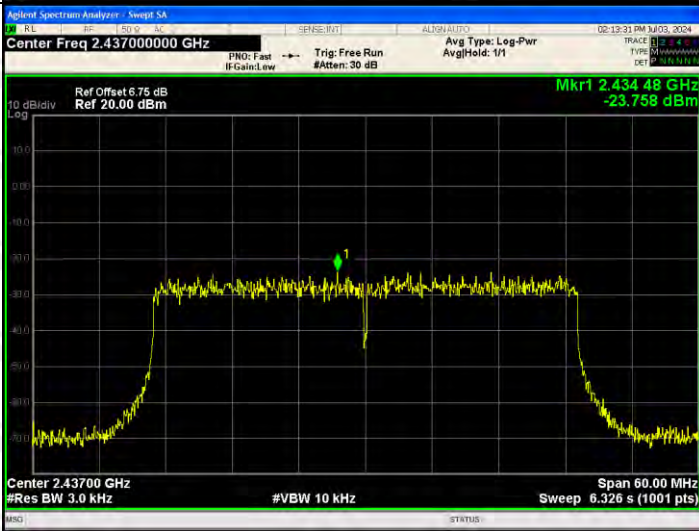802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.419 48 GHz -23.425 dBm Center 2.4220 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.434 48 GHz -23.758 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.438 32 GHz -23.215 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is Ant1: 1.58dBi, Ant2: 1.58dBi

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

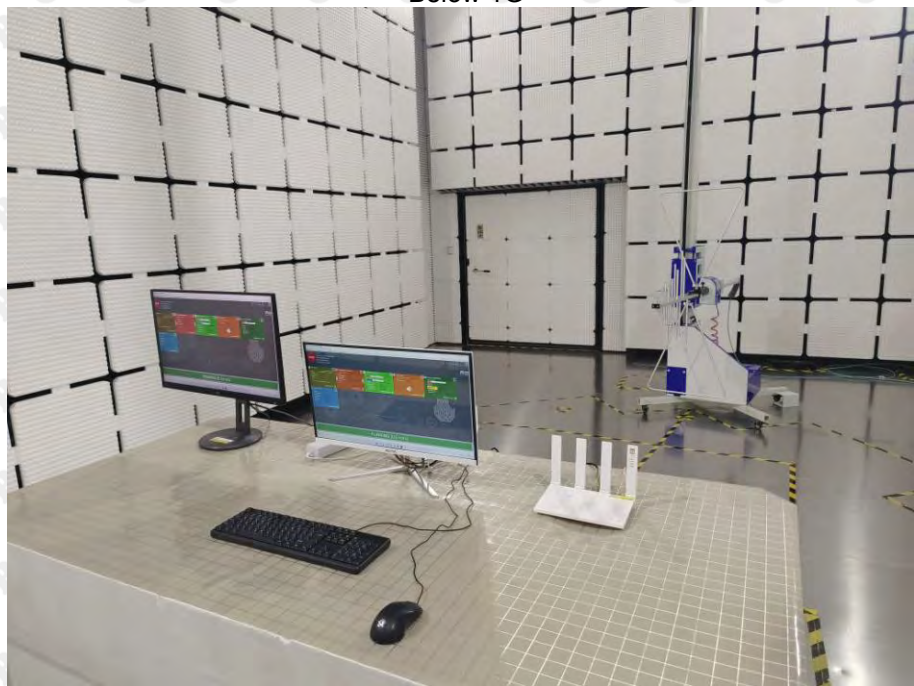

Above 1G



Conducted Emission



***** END OF REPORT *****