



TEST REPORT

Product Name: Desktop Computer
FCC ID: 2BHNU-DFC5D
Trademark: AVITA
Model Number: DFC5D
Prepared For: Digital Instrument Co., Ltd
Address: 45 Soi Ngamwongwan 19, Bangkrasor, MueangNonthaburi, Nonthaburi 11000, Thailand
Manufacturer: Shenzhen Hasee Innovation Co., Ltd
Address: Hasee Building, Xintianxia Industrial Park, Bantian Street, Longgang District, Shenzhen, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jun. 18, 2024
Sample tested Date: Jun. 18, 2024 to Jul. 11, 2024
Issue Date: Jul. 11, 2024
Report No.: CTB240711109RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHZ band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit.....	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit.....	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RFS COUNDUCTED SPURIOUS EMISSIONS.....	50
8.1 Block Diagram Of Test Setup.....	50
8.2 Limit.....	50
8.3 Test procedure	50
9. CODUCTED OUTPUT POWER.....	75
9.1 Block Diagram Of Test Setup.....	75
9.2 Limit.....	75
9.3 Test procedure	75
9.4 Test Result	76
10. 6DB OCCUPIED BANDWIDTH.....	77
10.1 Block Diagram Of Test Setup.....	77
10.2 Limit.....	77
10.3 Test procedure	77
10.4 Test Result	78
11. POWER SPECTRAL DENSITY.....	92
11.1 Block Diagram Of Test Setup.....	92
11.2 Limit.....	92
11.3 Test procedure	92
11.4 Test Result	93
12. ANTENNA REQUIREMENT	106
13. EUT TEST SETUP PHOTOGRAPHS.....	107

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240711109RFX	Jul. 11, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(1GHz-40GHz)	$U=\pm 4.8\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	DFC5D
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n/ax
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n20/ax20: 2412-2462MHz/ 11 channel IEEE 802.11n40/ax40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 17.649dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Glue stick antenna
Antenna Gain:	WiFi (2.4G): Ant1: 3.58dBi Ant2: 3.58dBi
Ratings:	Input: AC 100-240V~50/60Hz Output: DC 3.3-12V

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Keyboard	DELL	KB216t	N/A	N/A
2.	Mouse	DELL	MS116c	N/A	N/A
3.	Monitor	DELL	SE2218HV	N/A	N/A
4.	Router	Huawei	AX2 Pro	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40/ax40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20/ax20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40/ax40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 3.58dbi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=1.79dB,

So the directional gain for PSD is 5.37dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 3.58dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M
802.11/ax20	65M
802.11/ax40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28


Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/11/16
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-N MS-80	/	/	2025/6/28

10	Coaxial cable	ETS	RFC-SN-100-N MS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-S MS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100- NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

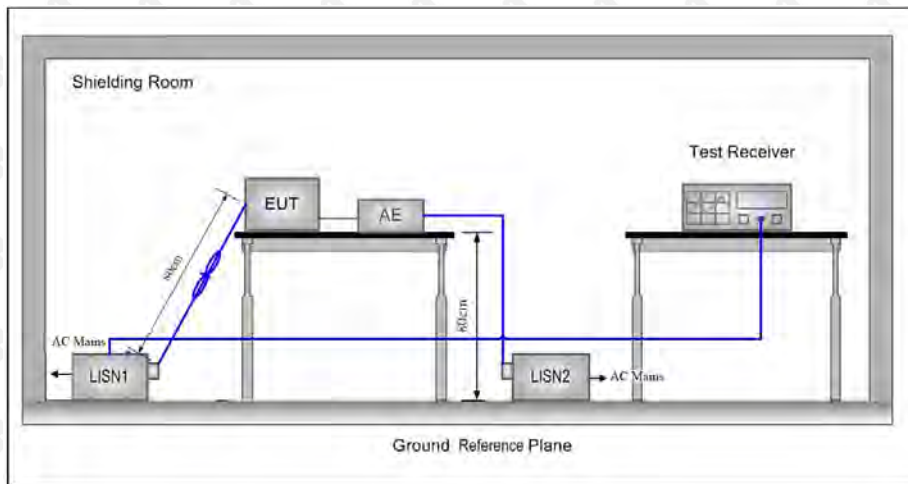

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

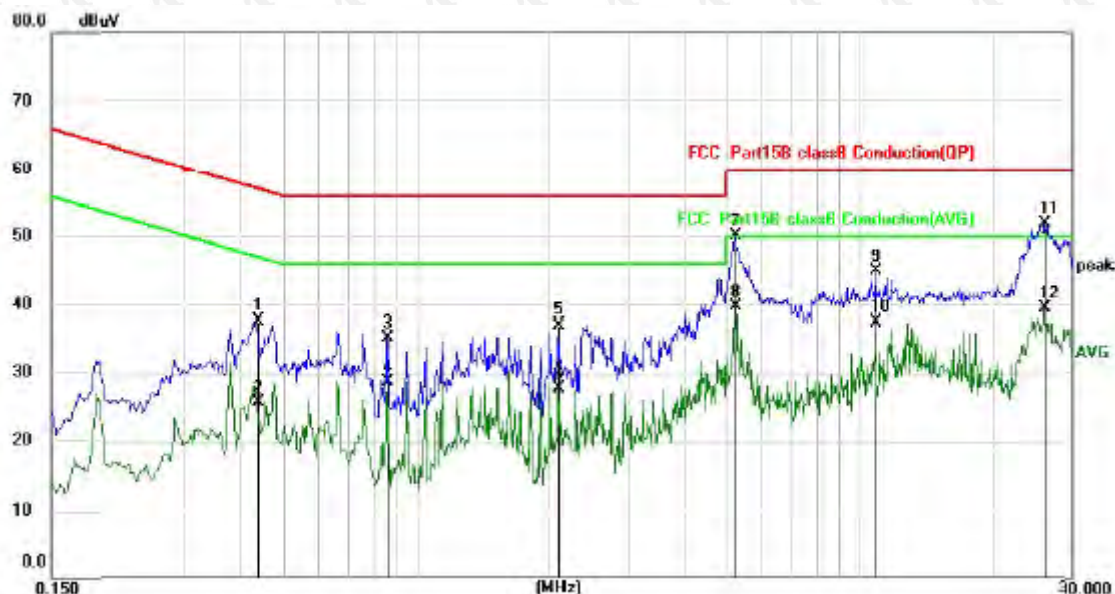

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4380	27.72	9.98	37.70	57.10	-19.40	QP
2		0.4380	15.92	9.98	25.90	47.10	-21.20	AVG
3		0.8578	25.34	10.01	35.35	56.00	-20.65	QP
4		0.8578	18.95	10.01	28.96	46.00	-17.04	AVG
5		2.0979	27.08	10.10	37.18	56.00	-18.82	QP
6		2.0979	17.74	10.10	27.84	46.00	-18.16	AVG
7		5.2378	39.73	10.40	50.13	60.00	-9.87	QP
8		5.2378	29.23	10.40	39.63	50.00	-10.37	AVG
9		10.8579	34.38	10.61	44.99	60.00	-15.01	QP
10		10.8579	26.80	10.61	37.41	50.00	-12.59	AVG
11	*	26.0419	40.75	11.10	51.85	60.00	-8.15	QP
12		26.0419	28.44	11.10	39.54	50.00	-10.46	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

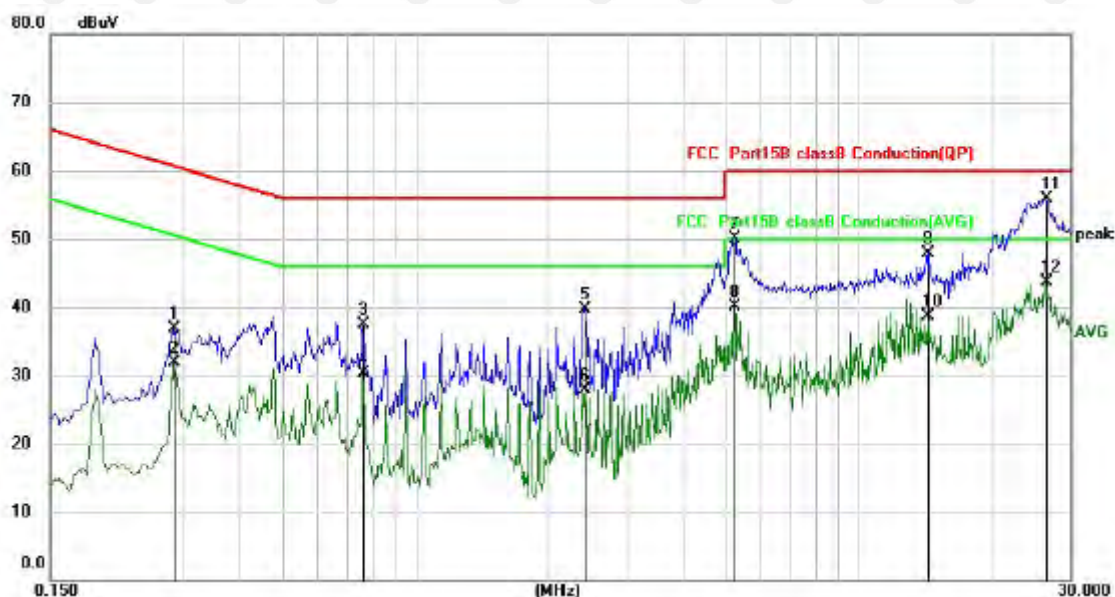

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2858	26.92	9.96	36.88	60.65	-23.77	QP
2		0.2858	21.88	9.96	31.84	50.65	-18.81	AVG
3		0.7620	27.45	10.02	37.47	56.00	-18.53	QP
4		0.7620	20.28	10.02	30.30	46.00	-15.70	AVG
5		2.4020	29.61	10.13	39.74	56.00	-16.26	QP
6		2.4020	17.69	10.13	27.82	46.00	-18.18	AVG
7		5.2378	39.78	10.40	50.18	60.00	-9.82	QP
8		5.2378	29.76	10.40	40.16	50.00	-9.84	AVG
9		14.3018	37.12	10.71	47.83	60.00	-12.17	QP
10		14.3018	27.91	10.71	38.62	50.00	-11.38	AVG
11	*	26.3100	44.80	11.12	55.92	60.00	-4.08	QP
12		26.3100	32.54	11.12	43.66	50.00	-6.34	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

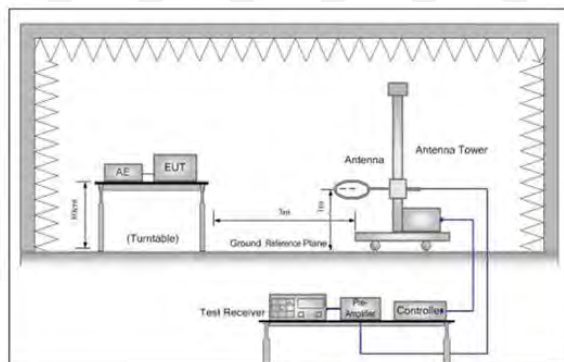


Figure 1. Below 30MHz

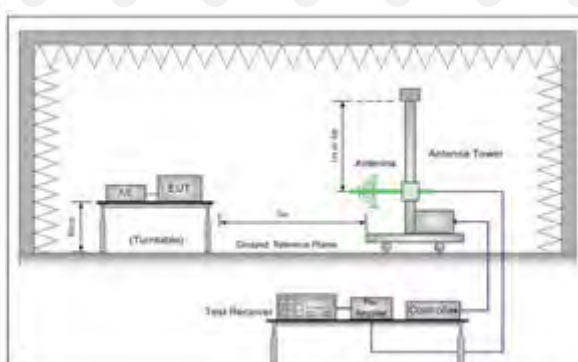


Figure 2. 30MHz to 1GHz

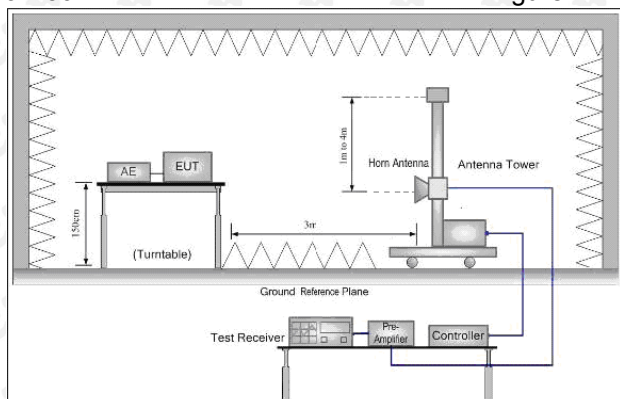


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:


Antenna polarity: H

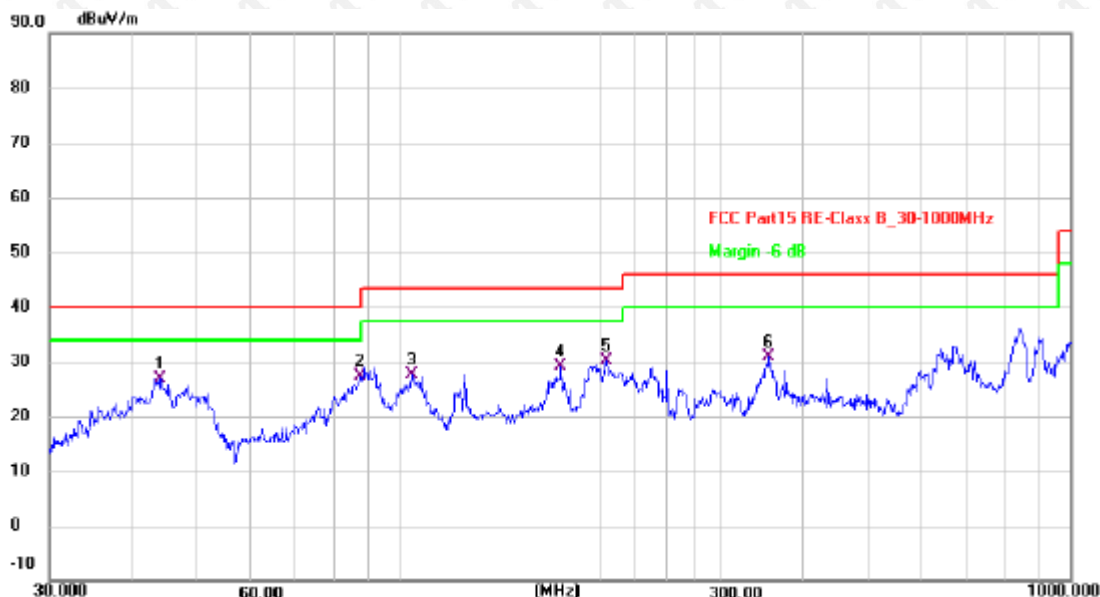

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	44.1200	41.28	-14.30	26.98	40.00	-13.02	QP
2 *	87.4175	45.82	-18.43	27.39	40.00	-12.61	QP
3	104.1701	44.79	-17.12	27.67	43.50	-15.83	QP
4	173.8135	43.52	-14.30	29.22	43.50	-14.28	QP
5	203.5226	46.32	-16.28	30.04	43.50	-13.46	QP
6	355.4272	43.16	-12.18	30.98	46.00	-15.02	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

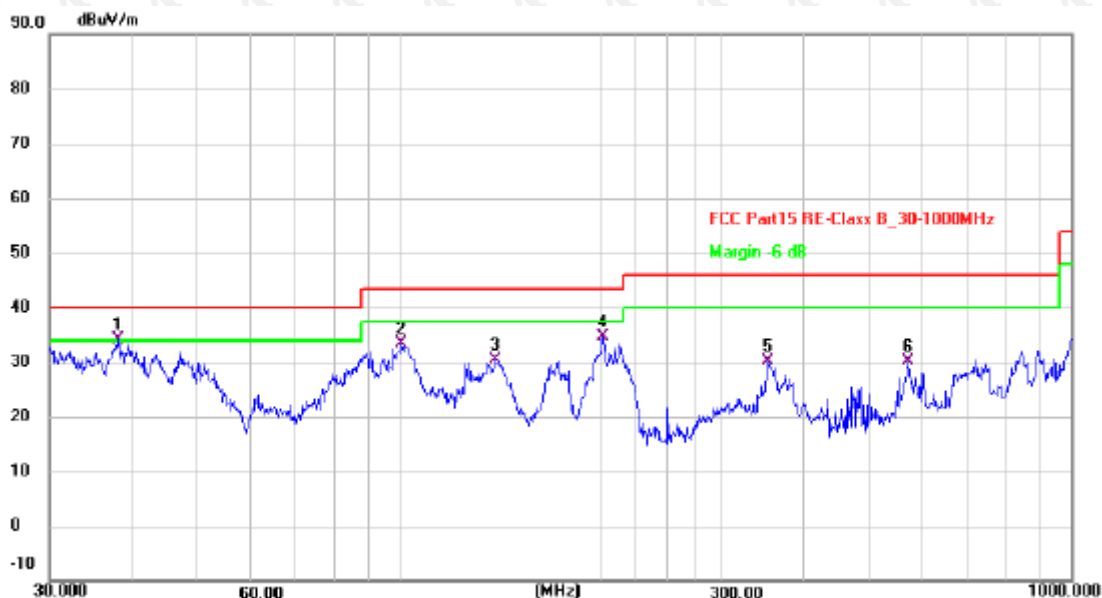

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	37.9450	47.84	-13.83	34.01	40.00	-5.99	QP
2	100.5806	50.91	-17.48	33.43	43.50	-10.07	QP
3	138.3873	44.36	-13.90	30.46	43.50	-13.04	QP
4	200.6880	50.96	-16.32	34.64	43.50	-8.86	QP
5	352.9433	42.37	-12.21	30.16	46.00	-15.84	QP
6	570.6100	36.37	-6.20	30.17	46.00	-15.83	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.85	-3.64	62.21	74	-11.79	peak
4824	50.05	-3.64	46.41	54	-7.59	AVG
7236	59.07	-0.95	58.12	74	-15.88	peak
7236	44.51	-0.95	43.56	54	-10.44	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.56	-3.64	60.92	74	-13.08	peak
4824	48.16	-3.64	44.52	54	-9.48	AVG
7236	59.00	-0.95	58.05	74	-15.95	peak
7236	44.80	-0.95	43.85	54	-10.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.19	-3.51	62.68	74	-11.32	peak
4874	48.76	-3.51	45.25	54	-8.75	AVG
7311	57.65	-0.82	56.83	74	-17.17	peak
7311	45.73	-0.82	44.91	54	-9.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.56	-3.51	62.05	74	-11.95	peak
4874	46.67	-3.51	43.16	54	-10.84	AVG
7311	59.19	-0.82	58.37	74	-15.63	peak
7311	42.92	-0.82	42.10	54	-11.90	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.15	-3.43	60.72	74	-13.28	peak
4924	48.53	-3.43	45.10	54	-8.90	AVG
7386	58.81	-0.75	58.06	74	-15.94	peak
7386	45.13	-0.75	44.38	54	-9.62	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.94	-3.43	60.51	74	-13.49	peak
4924	47.80	-3.43	44.37	54	-9.63	AVG
7386	56.54	-0.75	55.79	74	-18.21	peak
7386	43.00	-0.75	42.25	54	-11.75	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.45	-3.64	60.81	74	-13.19	peak
4824	48.69	-3.64	45.05	54	-8.95	AVG
7236	56.76	-0.95	55.81	74	-18.19	peak
7236	45.89	-0.95	44.94	54	-9.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.91	-3.64	63.27	74	-10.73	peak
4824	49.40	-3.64	45.76	54	-8.24	AVG
7236	56.14	-0.95	55.19	74	-18.81	peak
7236	43.69	-0.95	42.74	54	-11.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.99	-3.51	62.48	74	-11.52	peak
4874	48.56	-3.51	45.05	54	-8.95	AVG
7311	57.99	-0.82	57.17	74	-16.83	peak
7311	44.79	-0.82	43.97	54	-10.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.56	-3.51	61.05	74	-12.95	peak
4874	47.98	-3.51	44.47	54	-9.53	AVG
7311	58.85	-0.82	58.03	74	-15.97	peak
7311	44.05	-0.82	43.23	54	-10.77	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.40	-3.43	58.97	74	-15.03	peak
4924	46.80	-3.43	43.37	54	-10.63	AVG
7386	58.36	-0.75	57.61	74	-16.39	peak
7386	42.58	-0.75	41.83	54	-12.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.15	-3.43	60.72	74	-13.28	peak
4924	47.50	-3.43	44.07	54	-9.93	AVG
7386	56.83	-0.75	56.08	74	-17.92	peak
7386	42.04	-0.75	41.29	54	-12.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.31	-3.64	62.67	74	-11.33	peak
4824	48.90	-3.64	45.26	54	-8.74	AVG
7236	57.52	-0.95	56.57	74	-17.43	peak
7236	45.89	-0.95	44.94	54	-9.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.93	-3.64	61.29	74	-12.71	peak
4824	49.57	-3.64	45.93	54	-8.07	AVG
7236	58.33	-0.95	57.38	74	-16.62	peak
7236	43.04	-0.95	42.09	54	-11.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.26	-3.51	62.75	74	-11.25	peak
4874	48.58	-3.51	45.07	54	-8.93	AVG
7311	58.07	-0.82	57.25	74	-16.75	peak
7311	43.05	-0.82	42.23	54	-11.77	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.17	-3.51	59.66	74	-14.34	peak
4874	48.29	-3.51	44.78	54	-9.22	AVG
7311	58.33	-0.82	57.51	74	-16.49	peak
7311	44.27	-0.82	43.45	54	-10.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.97	-3.43	61.54	74	-12.46	peak
4924	46.83	-3.43	43.40	54	-10.60	AVG
7386	58.99	-0.75	58.24	74	-15.76	peak
7386	43.05	-0.75	42.30	54	-11.70	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.58	-3.43	60.15	74	-13.85	peak
4924	48.47	-3.43	45.04	54	-8.96	AVG
7386	56.69	-0.75	55.94	74	-18.06	peak
7386	41.74	-0.75	40.99	54	-13.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.17	-3.63	59.54	74	-14.46	peak
4844	49.50	-3.63	45.87	54	-8.13	AVG
7266	58.04	-0.94	57.10	74	-16.90	peak
7266	45.34	-0.94	44.40	54	-9.60	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.40	-3.63	61.77	74	-12.23	peak
4844	49.21	-3.63	45.58	54	-8.42	AVG
7266	58.12	-0.94	57.18	74	-16.82	peak
7266	45.62	-0.94	44.68	54	-9.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.13	-3.51	60.62	74	-13.38	peak
4874	49.48	-3.51	45.97	54	-8.03	AVG
7311	59.12	-0.82	58.30	74	-15.70	peak
7311	45.15	-0.82	44.33	54	-9.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.28	-3.51	58.77	74	-15.23	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.29	-0.82	42.47	54	-11.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.56	-3.43	60.13	74	-13.87	peak
4904	49.37	-3.43	45.94	54	-8.06	AVG
7356	58.27	-0.75	57.52	74	-16.48	peak
7356	41.25	-0.75	40.50	54	-13.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	64.27	-3.43	60.84	74	-13.16	peak
4904	45.99	-3.43	42.56	54	-11.44	AVG
7356	57.60	-0.75	56.85	74	-17.15	peak
7356	44.26	-0.75	43.51	54	-10.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH1 (802.11ax/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	63.08	-3.64	59.44	74	-14.56	peak
4824	49.28	-3.64	45.64	54	-8.36	AVG
7236	58.14	-0.95	57.19	74	-16.81	peak
7236	45.40	-0.95	44.45	54	-9.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.27	-3.64	61.63	74	-12.37	peak
4824	48.91	-3.64	45.27	54	-8.73	AVG
7236	60.62	-0.95	59.67	74	-14.33	peak
7236	46.17	-0.95	45.22	54	-8.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11ax/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.82	-3.51	60.31	74.00	-13.69	peak
4874.00	49.32	-3.51	45.81	54.00	-8.19	AVG
7311.00	58.56	-0.82	57.74	74.00	-16.26	peak
7311.00	46.45	-0.82	45.63	54.00	-8.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.34	-3.51	60.83	74.00	-13.17	peak
4874.00	46.74	-3.51	43.23	54.00	-10.77	AVG
7311.00	56.69	-0.82	55.87	74.00	-18.13	peak
7311.00	42.14	-0.82	41.32	54.00	-12.68	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH11 (802.11ax/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.91	-3.43	59.48	74	-14.52	peak
4924	45.59	-3.43	42.16	54	-11.84	AVG
7386	58.62	-0.75	57.87	74	-16.13	peak
7386	43.21	-0.75	42.46	54	-11.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.12	-3.43	59.69	74	-14.31	peak
4924	46.75	-3.43	43.32	54	-10.68	AVG
7386	58.50	-0.75	57.75	74	-16.25	peak
7386	44.02	-0.75	43.27	54	-10.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 LOW CH3 (802.11ax/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	63.09	-3.63	59.46	74	-14.54	peak
4844	47.32	-3.63	43.69	54	-10.31	AVG
7266	59.26	-0.94	58.32	74	-15.68	peak
7266	44.62	-0.94	43.68	54	-10.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.06	-3.63	60.43	74	-13.57	peak
4844	49.18	-3.63	45.55	54	-8.45	AVG
7266	58.45	-0.94	57.51	74	-16.49	peak
7266	45.28	-0.94	44.34	54	-9.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11ax/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.48	-3.51	58.97	74	-15.03	peak
4874	46.98	-3.51	43.47	54	-10.53	AVG
7311	59.43	-0.82	58.61	74	-15.39	peak
7311	43.86	-0.82	43.04	54	-10.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.51	-3.51	43.00	54	-11.00	AVG
7311	56.65	-0.82	55.83	74	-18.17	peak
7311	43.33	-0.82	42.51	54	-11.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11ax/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.34	-3.43	60.91	74	-13.09	peak
4904	49.17	-3.43	45.74	54	-8.26	AVG
7356	57.15	-0.75	56.40	74	-17.60	peak
7356	43.58	-0.75	42.83	54	-11.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.50	-3.43	61.07	74	-12.93	peak
4904	46.29	-3.43	42.86	54	-11.14	AVG
7356	58.20	-0.75	57.45	74	-16.55	peak
7356	43.16	-0.75	42.41	54	-11.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.96	-5.81	52.15	74	-21.85	peak
2390	/	-5.81	/	54	/	AVG
2399	63.33	-5.84	57.49	74	-16.51	peak
2399	48.91	-5.84	43.07	54	-10.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.71	-5.81	50.90	74	-23.10	peak
2390	/	-5.81	/	54	/	AVG
2399	62.29	-5.84	56.45	74	-17.55	peak
2399	47.66	-5.84	41.82	54	-12.18	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.36	-5.65	51.71	74	-22.29	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.90	-5.65	50.25	74	-23.75	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.36	-5.81	53.55	74	-20.45	peak
2390	/	-5.81	/	54	/	AVG
2399	61.96	-5.84	56.12	74	-17.88	peak
2399	46.27	-5.84	40.43	54	-13.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.96	-5.81	50.15	74	-23.85	peak
2390	/	-5.81	/	54	/	AVG
2399	61.81	-5.84	55.97	74	-18.03	peak
2399	47.04	-5.84	41.20	54	-12.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.80	-5.65	51.15	74	-22.85	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.82	-5.65	52.17	74	-21.83	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.38	-5.81	51.57	74	-22.43	peak
2390	/	-5.81	/	54	/	AVG
2399	63.26	-5.84	57.42	74	-16.58	peak
2399	47.73	-5.84	41.89	54	-12.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.83	-5.81	51.02	74	-22.98	peak
2390	/	-5.81	/	54	/	AVG
2399	60.39	-5.84	54.55	74	-19.45	peak
2399	47.81	-5.84	41.97	54	-12.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.97	-5.65	50.32	74	-23.68	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.67	-5.81	52.86	74	-21.14	peak
2390	/	-5.81	/	54	/	AVG
2399	62.37	-5.84	56.53	74	-17.47	peak
2399	47.38	-5.84	41.54	54	-12.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.92	-5.81	53.11	74	-20.89	peak
2390	/	-5.81	/	54	/	AVG
2399	61.77	-5.84	55.93	74	-18.07	peak
2399	46.09	-5.84	40.25	54	-13.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.61	-5.65	51.96	74	-22.04	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.45	-5.65	51.80	74	-22.20	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.77	-5.81	50.96	74	-23.04	peak
2390	/	-5.81	/	54	/	AVG
2399	63.97	-5.84	58.13	74	-15.87	peak
2399	48.00	-5.84	42.16	54	-11.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.38	-5.81	51.57	74	-22.43	peak
2390	/	-5.81	/	54	/	AVG
2399	60.37	-5.84	54.53	74	-19.47	peak
2399	46.75	-5.84	40.91	54	-13.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11ax/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.10	-5.65	51.45	74	-22.55	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.78	-5.65	51.13	74	-22.87	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.08	-5.81	52.27	74	-21.73	peak
2390	/	-5.81	/	54	/	AVG
2399	62.83	-5.84	56.99	74	-17.01	peak
2399	46.00	-5.84	40.16	54	-13.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.04	-5.81	51.23	74	-22.77	peak
2390	/	-5.81	/	54	/	AVG
2399	61.69	-5.84	55.85	74	-18.15	peak
2399	46.48	-5.84	40.64	54	-13.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11ax/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.17	-5.65	51.52	74	-22.48	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.80	-5.65	51.15	74	-22.85	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

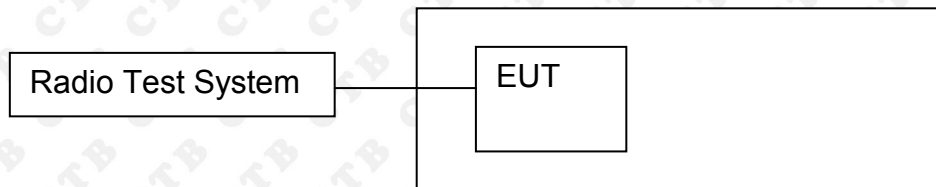

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result

ANT1:

BAND EDGE Graphs

802.11b/LCH

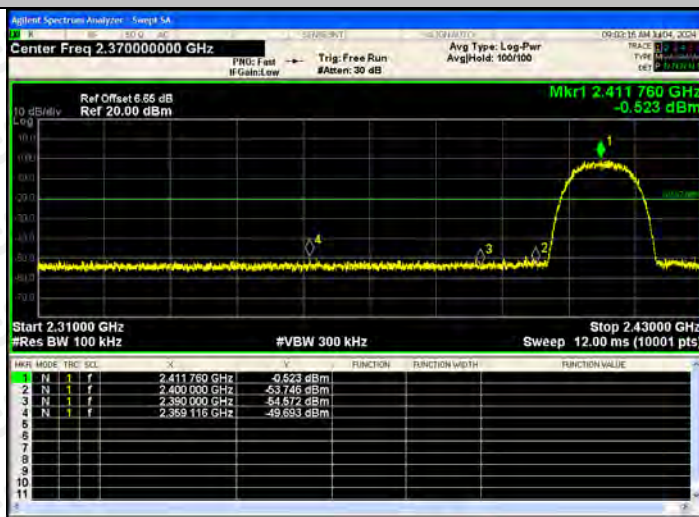

802.11b/HCH



BAND EDGE Graphs

802.11g/LCH




802.11g/HCH




BAND EDGE Graphs

802.11n(HT20)/LCH

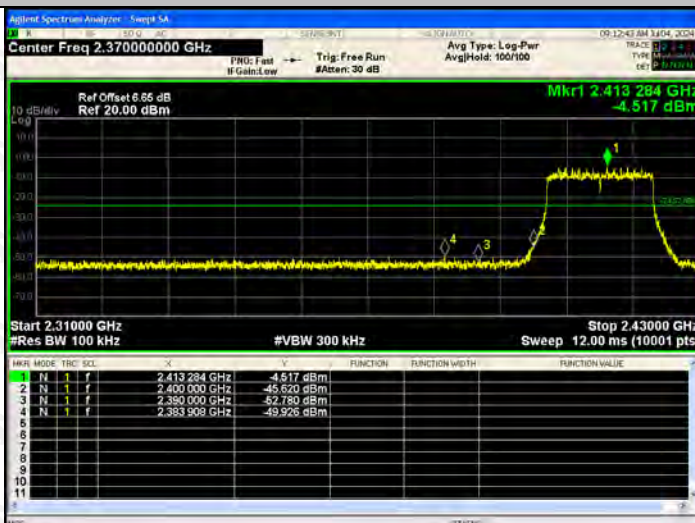


802.11n(HT20)/HCH

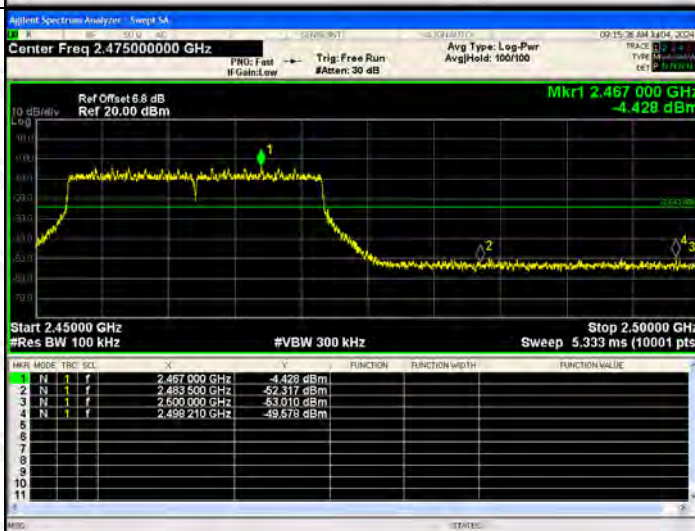

BAND EDGE Graphs

802.11n(HT40)/LCH

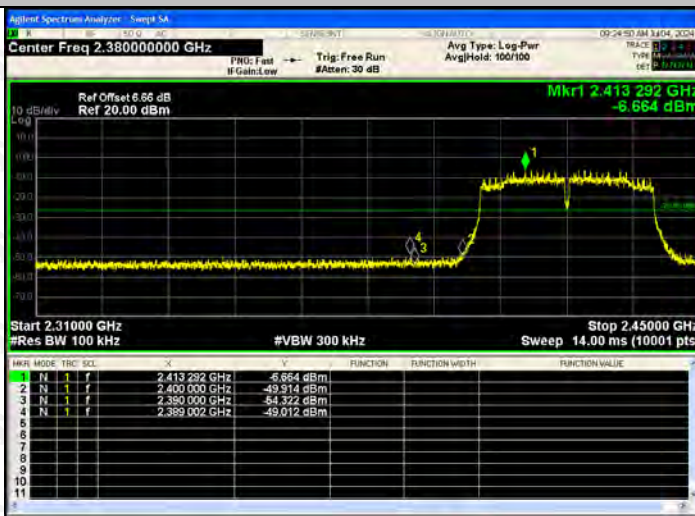

802.11n(HT40)/HCH




BAND EDGE Graphs

802.11ax(HT20)/
LCH




802.11ax(HT20)/
HCH

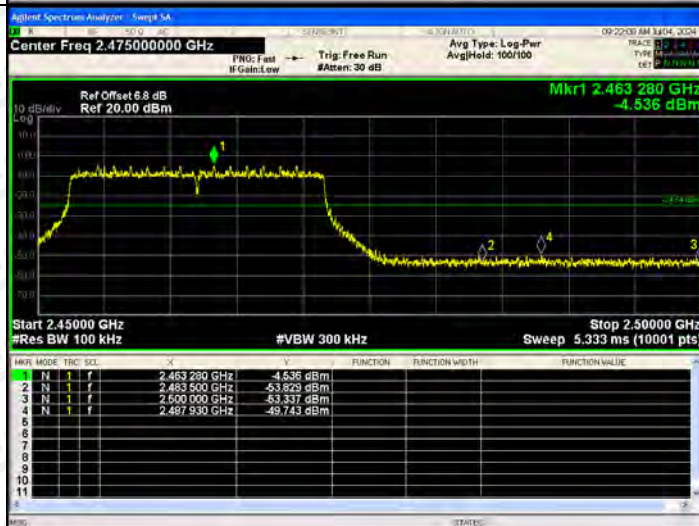


BAND EDGE Graphs

802.11ax(HT40)/
LCH

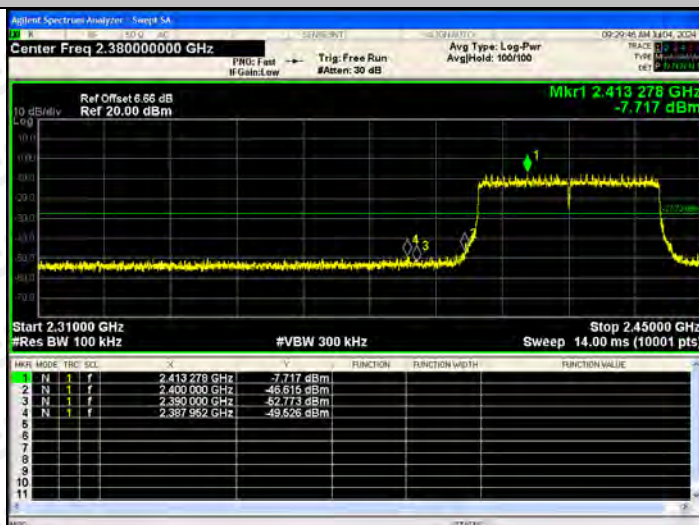


802.11ax(HT40)/
HCH

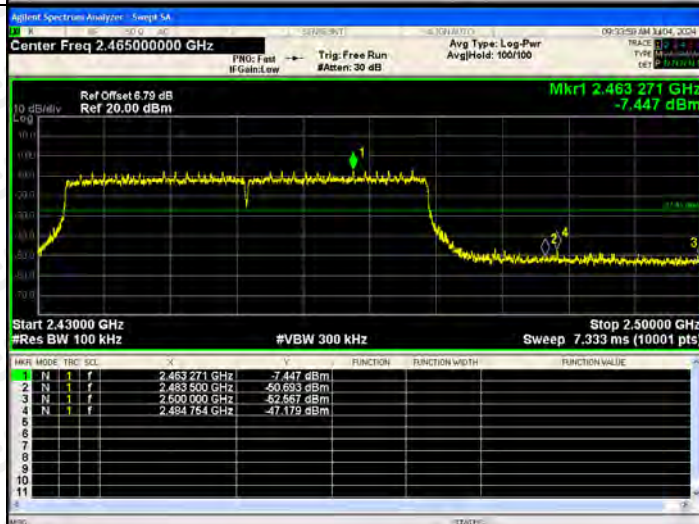


RF Conducted Spurious Emissions Graphs


802.11b/LCH

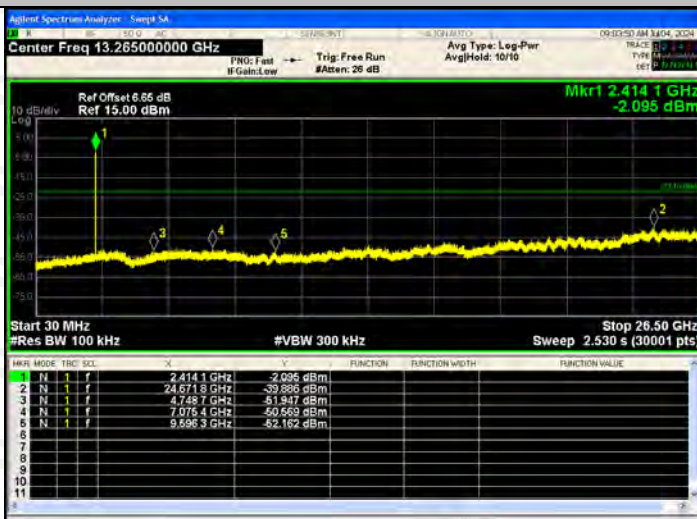

802.11b/MCH

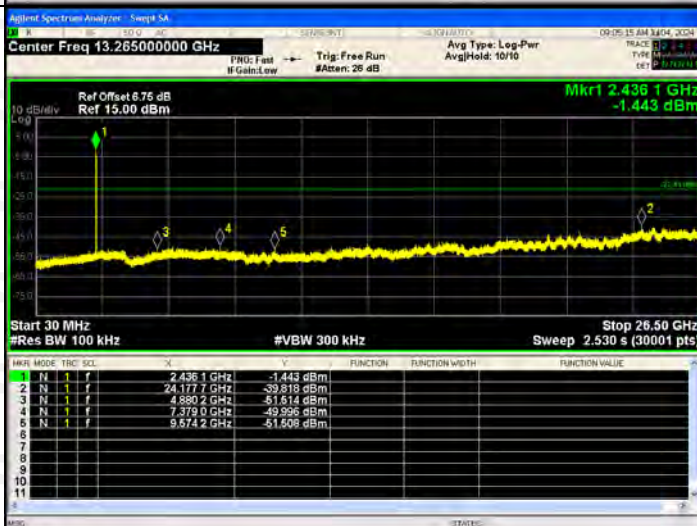


802.11b/HCH

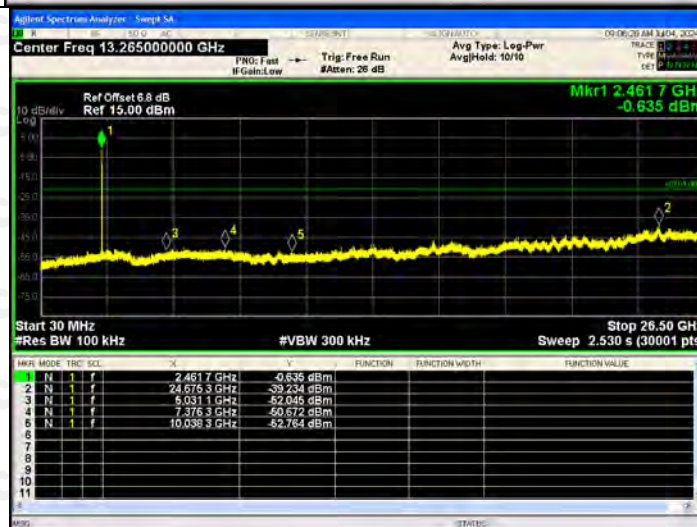


RF Conducted Spurious Emissions Graphs


802.11g/LCH

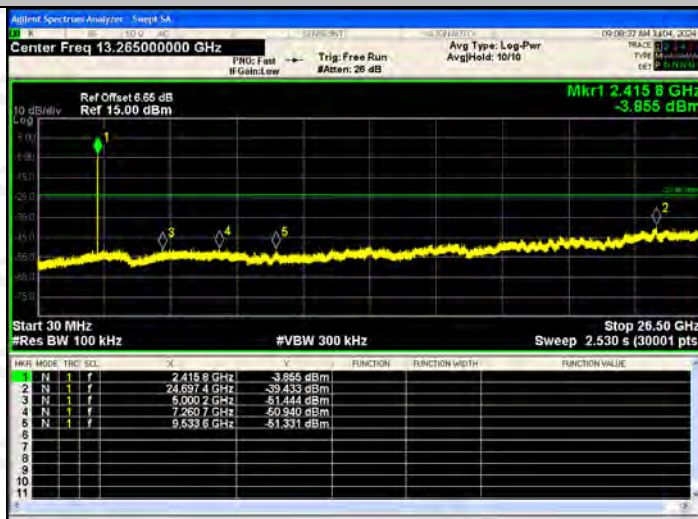




802.11g/MCH



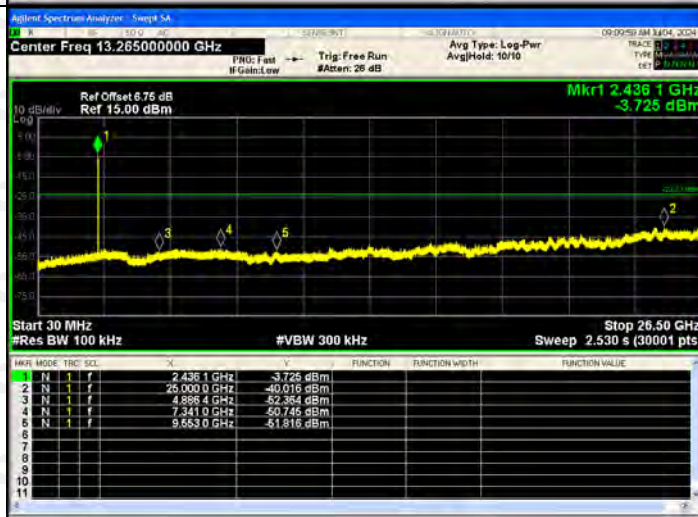


802.11g/HCH

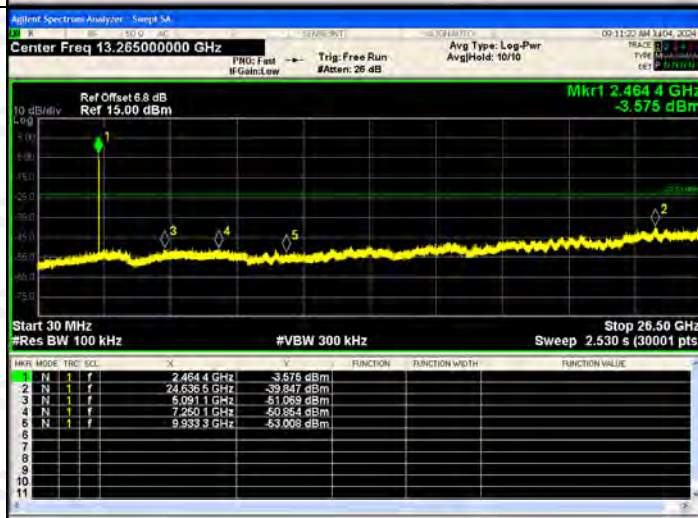


RF Conducted Spurious Emissions Graphs

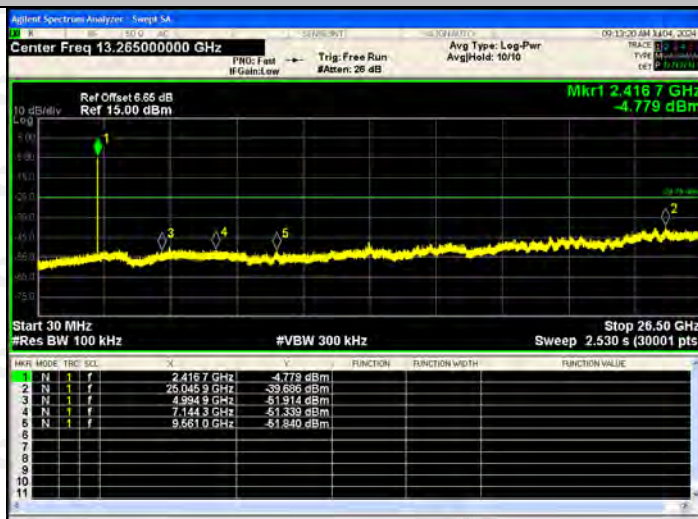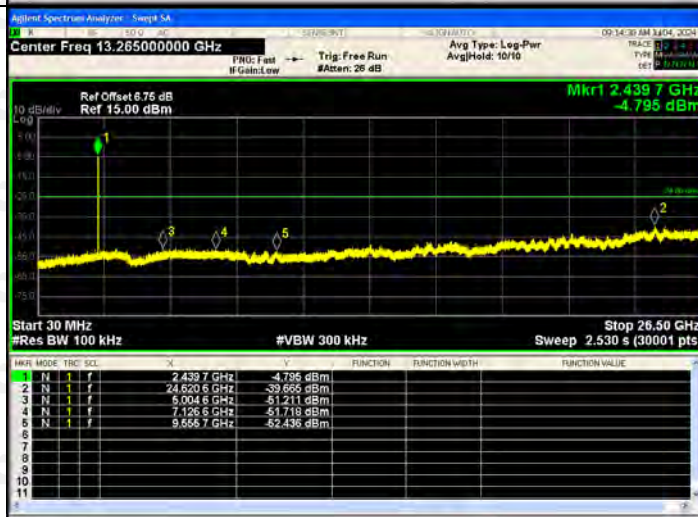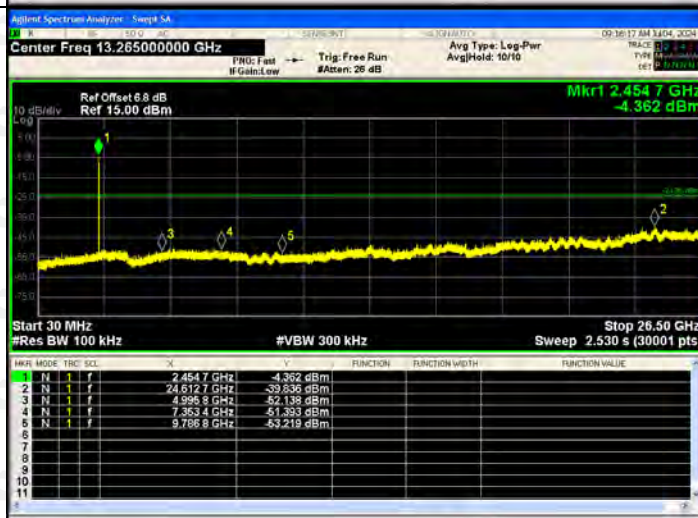802.11n(HT20)/
LCH

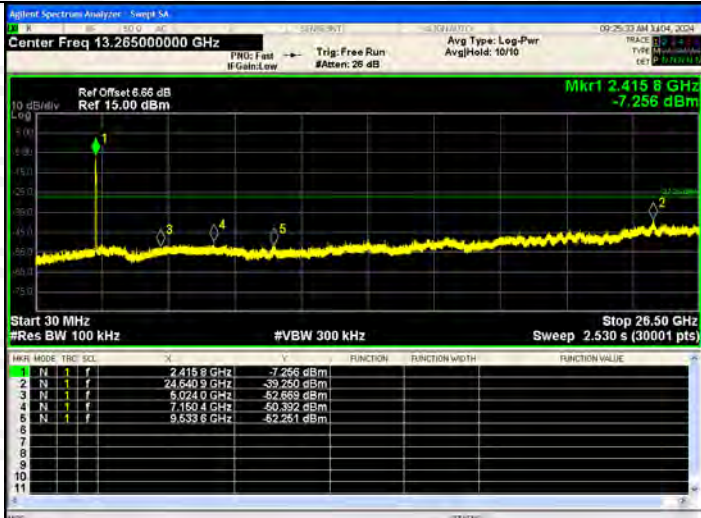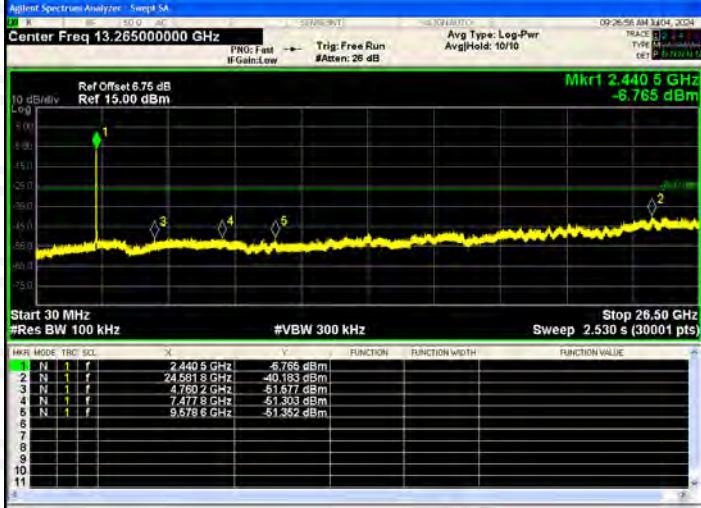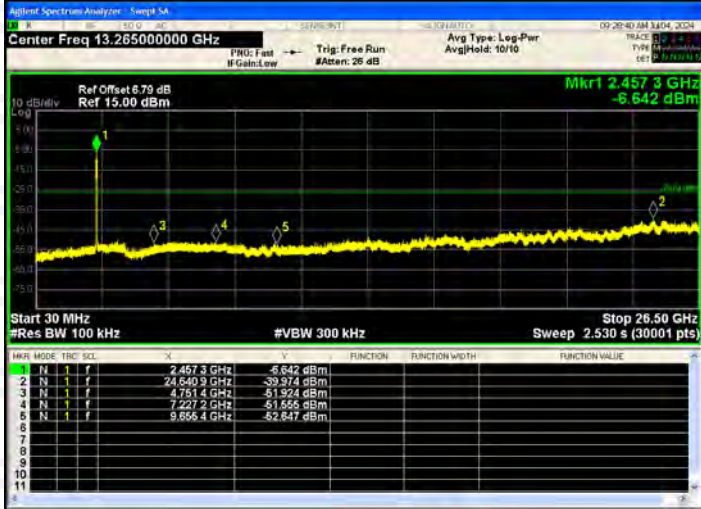802.11
n(HT20)/MCH

802.11
n(HT20)/HCH


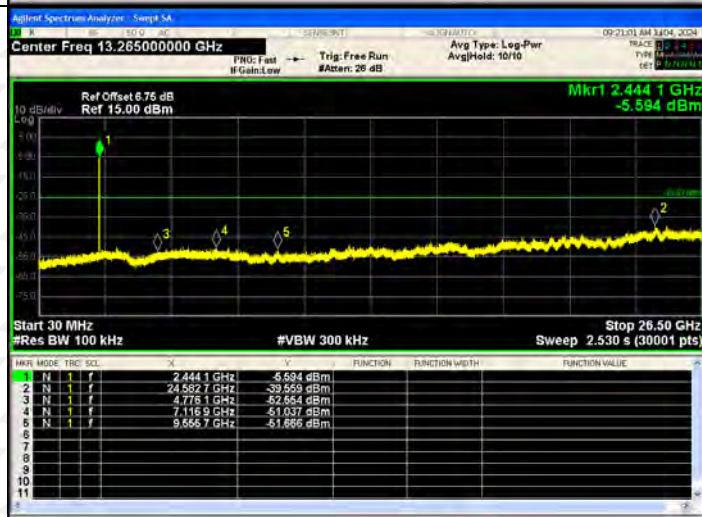
802.11n(HT40)/LCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4158 GHz</td><td>-7.256 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6409 GHz</td><td>-39.250 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0240 GHz</td><td>-52.668 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1504 GHz</td><td>-50.392 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6336 GHz</td><td>-52.251 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4158 GHz	-7.256 dBm				2	N	1	f	24.6409 GHz	-39.250 dBm				3	N	1	f	5.0240 GHz	-52.668 dBm				4	N	1	f	7.1504 GHz	-50.392 dBm				5	N	1	f	9.6336 GHz	-52.251 dBm			
HR	MODE	TRF	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4158 GHz	-7.256 dBm																																																		
2	N	1	f	24.6409 GHz	-39.250 dBm																																																		
3	N	1	f	5.0240 GHz	-52.668 dBm																																																		
4	N	1	f	7.1504 GHz	-50.392 dBm																																																		
5	N	1	f	9.6336 GHz	-52.251 dBm																																																		
802.11n(HT40)/MCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4405 GHz</td><td>-6.765 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.5818 GHz</td><td>-40.183 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7692 GHz</td><td>-51.877 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4778 GHz</td><td>-51.303 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6786 GHz</td><td>-51.352 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-6.765 dBm				2	N	1	f	24.5818 GHz	-40.183 dBm				3	N	1	f	4.7692 GHz	-51.877 dBm				4	N	1	f	7.4778 GHz	-51.303 dBm				5	N	1	f	9.6786 GHz	-51.352 dBm			
HR	MODE	TRF	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4405 GHz	-6.765 dBm																																																		
2	N	1	f	24.5818 GHz	-40.183 dBm																																																		
3	N	1	f	4.7692 GHz	-51.877 dBm																																																		
4	N	1	f	7.4778 GHz	-51.303 dBm																																																		
5	N	1	f	9.6786 GHz	-51.352 dBm																																																		
802.11n(HT40)/HCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4573 GHz</td><td>-6.642 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6409 GHz</td><td>-39.974 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7514 GHz</td><td>-51.924 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2272 GHz</td><td>-51.556 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.8564 GHz</td><td>-52.847 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4573 GHz	-6.642 dBm				2	N	1	f	24.6409 GHz	-39.974 dBm				3	N	1	f	4.7514 GHz	-51.924 dBm				4	N	1	f	7.2272 GHz	-51.556 dBm				5	N	1	f	9.8564 GHz	-52.847 dBm			
HR	MODE	TRF	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4573 GHz	-6.642 dBm																																																		
2	N	1	f	24.6409 GHz	-39.974 dBm																																																		
3	N	1	f	4.7514 GHz	-51.924 dBm																																																		
4	N	1	f	7.2272 GHz	-51.556 dBm																																																		
5	N	1	f	9.8564 GHz	-52.847 dBm																																																		

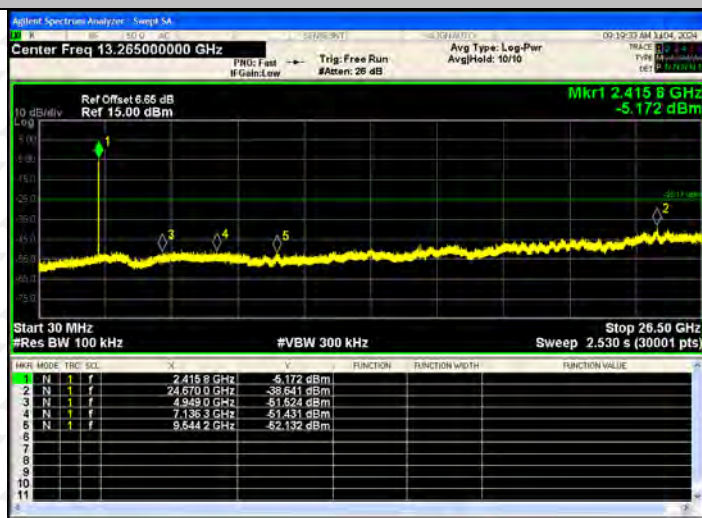RF Conducted Spurious Emissions Graphs


802.11ax(HT20)/LCH



802.11 ax(HT20)/MCH




802.11 ax(HT20)/HCH

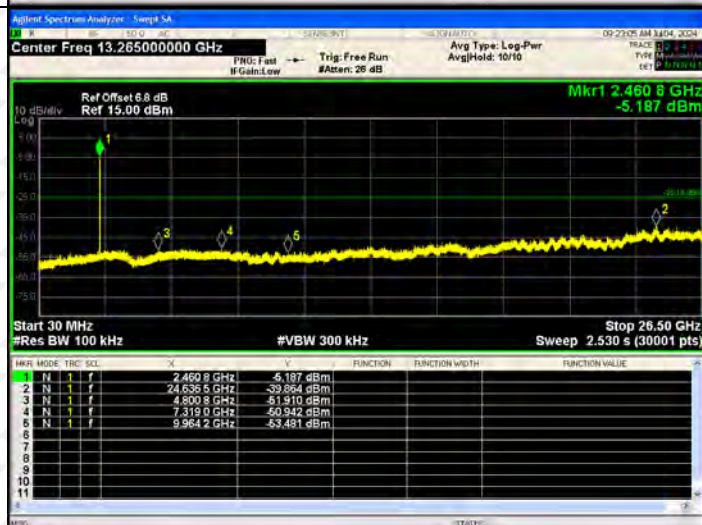


RF Conducted Spurious Emissions Graphs


802.11ax(HT40)/LCH

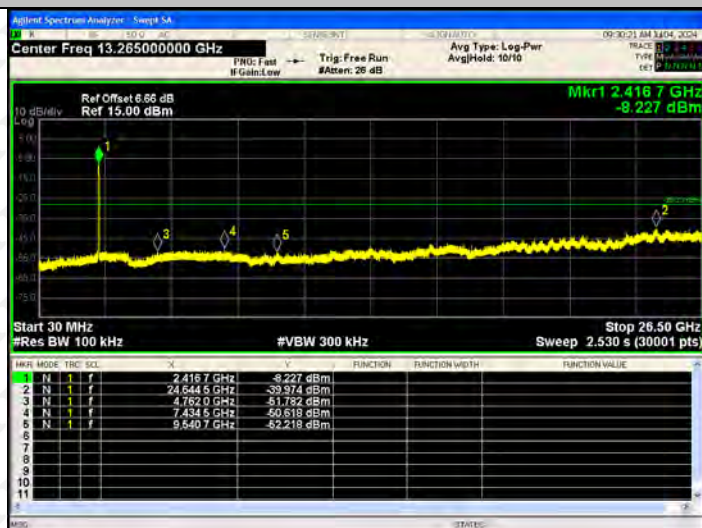

802.11 ax(HT40)/MCH

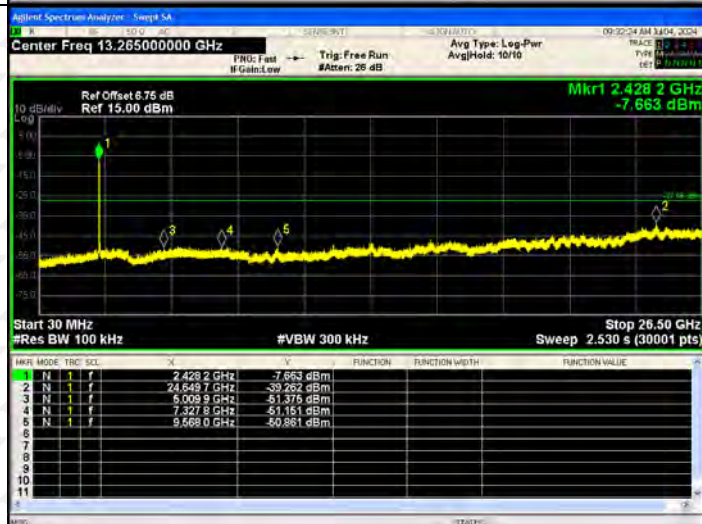


802.11 ax(HT40)/HCH

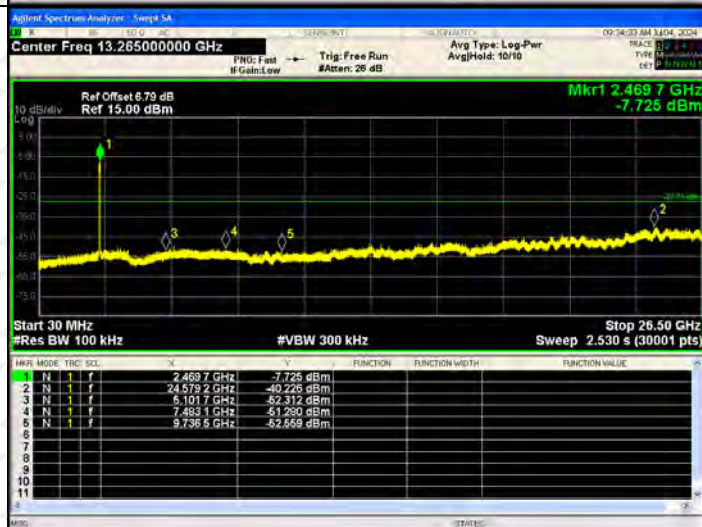


ANT2:

BAND EDGE Graphs

802.11b/LCH

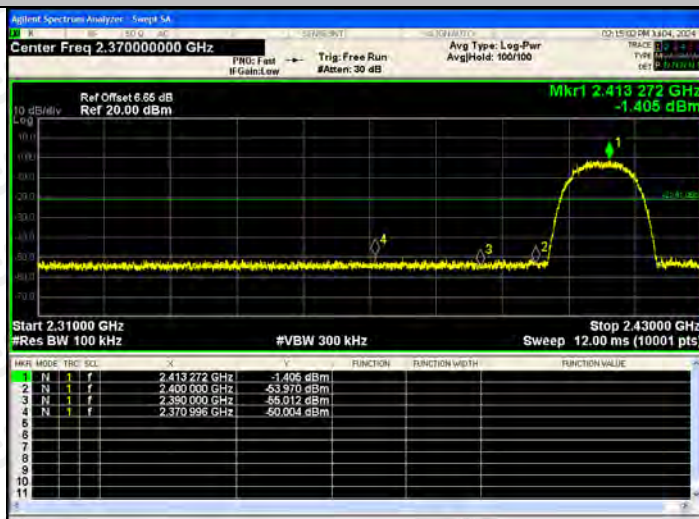


802.11b/HCH

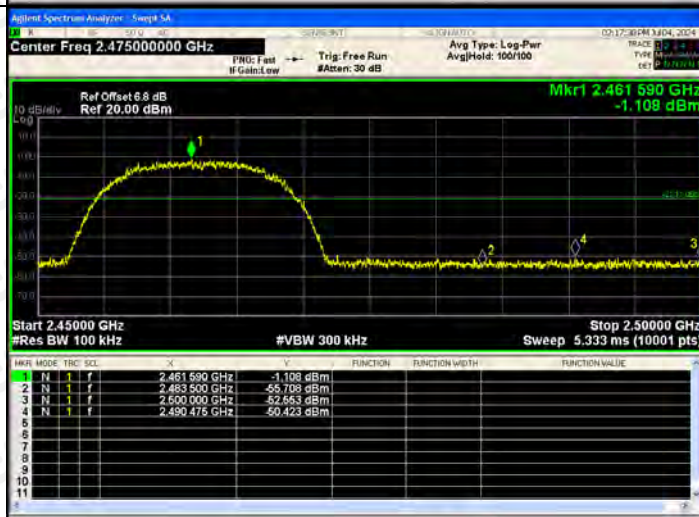


BAND EDGE Graphs

802.11g/LCH

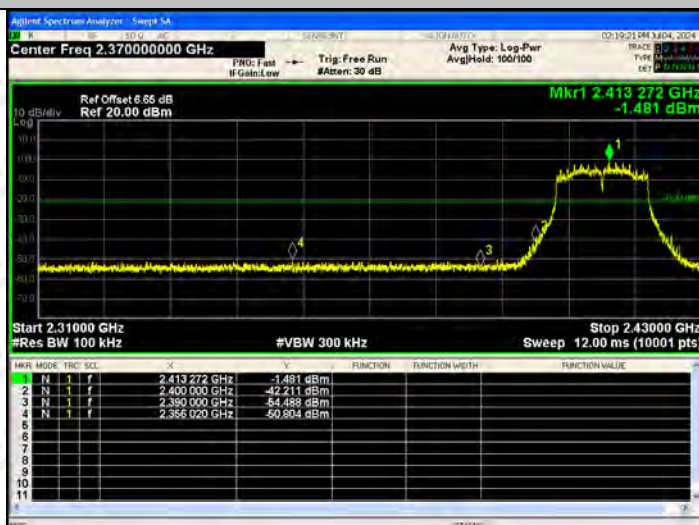


802.11g/HCH

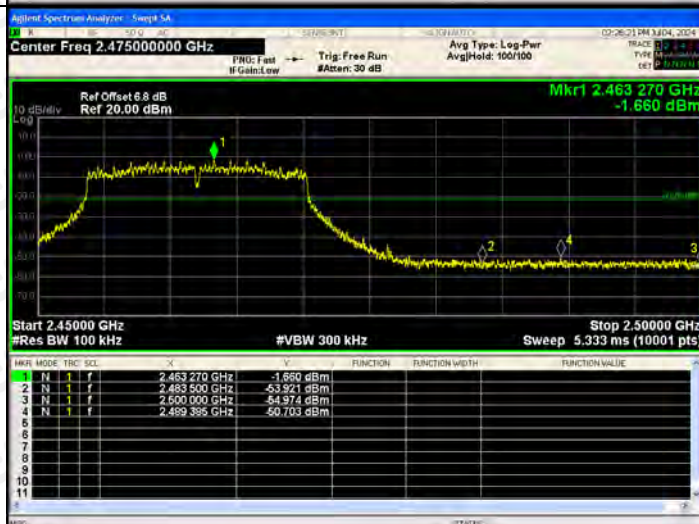


BAND EDGE Graphs

802.11n(HT20)/
LCH

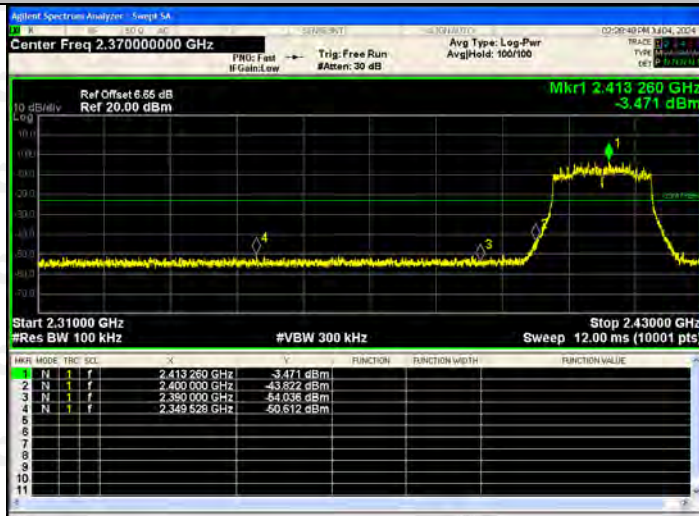


802.11n(HT20)/
HCH

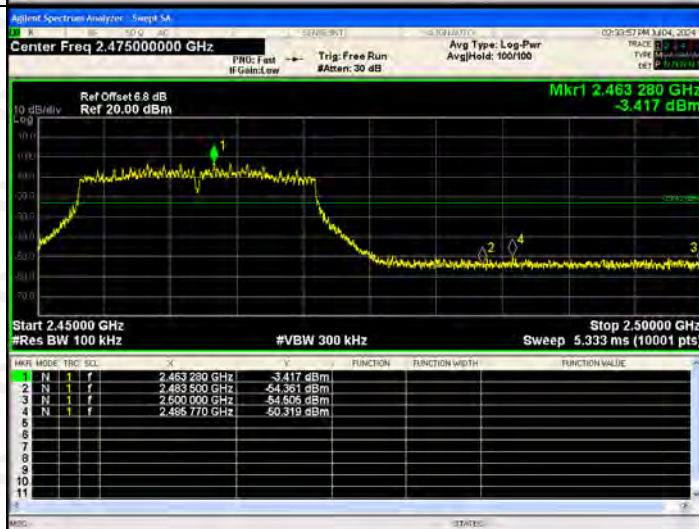

BAND EDGE Graphs

802.11n(HT40)/
LCH

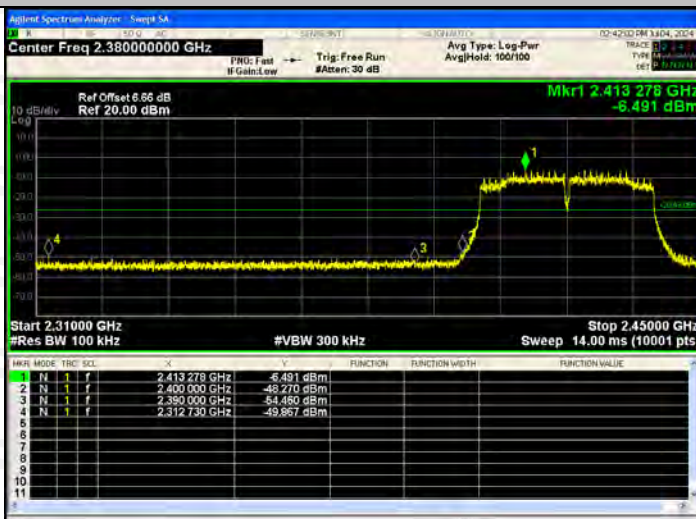


802.11n(HT40)/
HCH




BAND EDGE Graphs

802.11ax(HT20)/
LCH

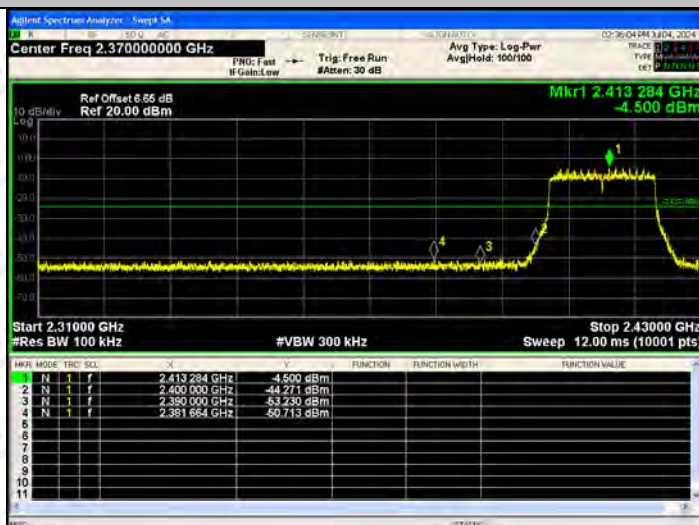


802.11ax(HT20)/
HCH

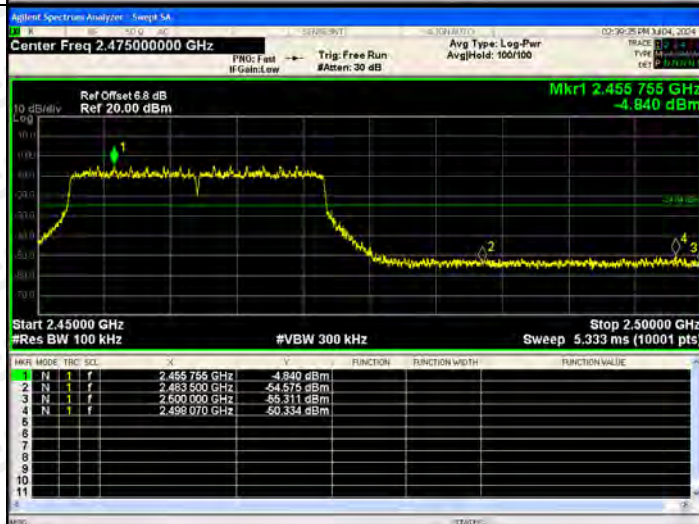

BAND EDGE Graphs

802.11ax(HT40)/
LCH

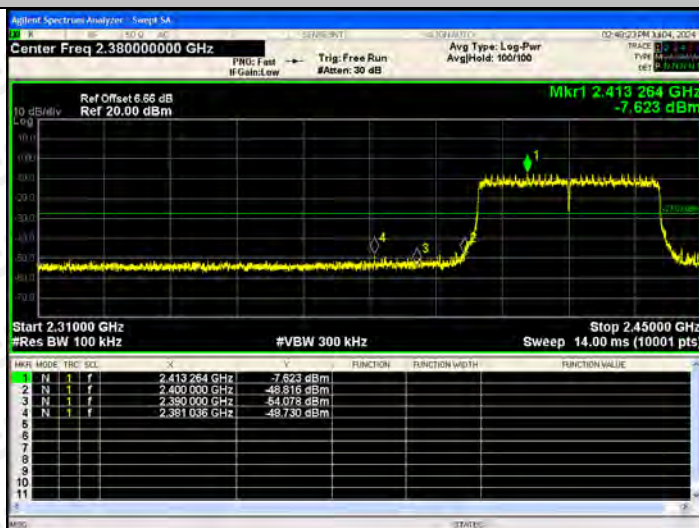


802.11ax(HT40)/
HCH




RF Conducted Spurious Emissions Graphs


802.11b/LCH

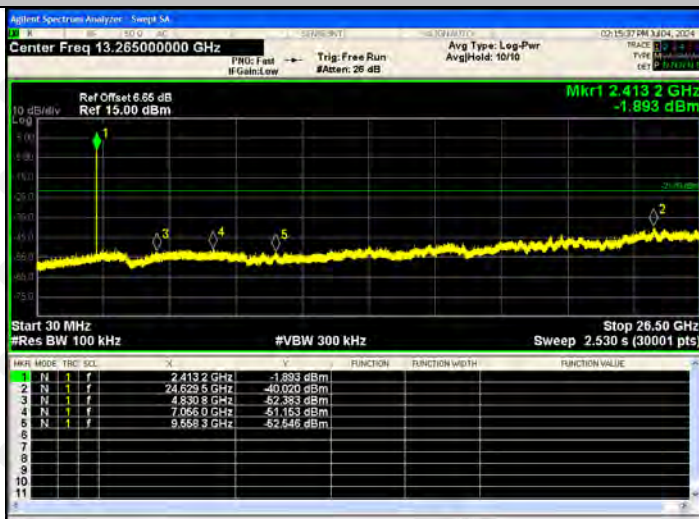

802.11b/MCH

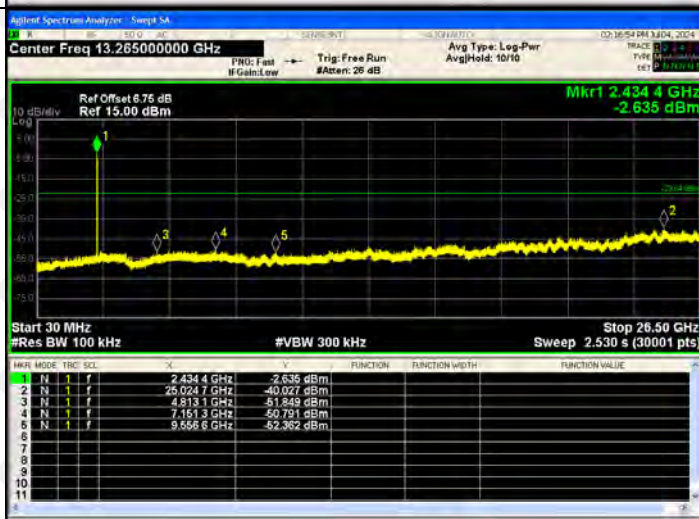


802.11b/HCH

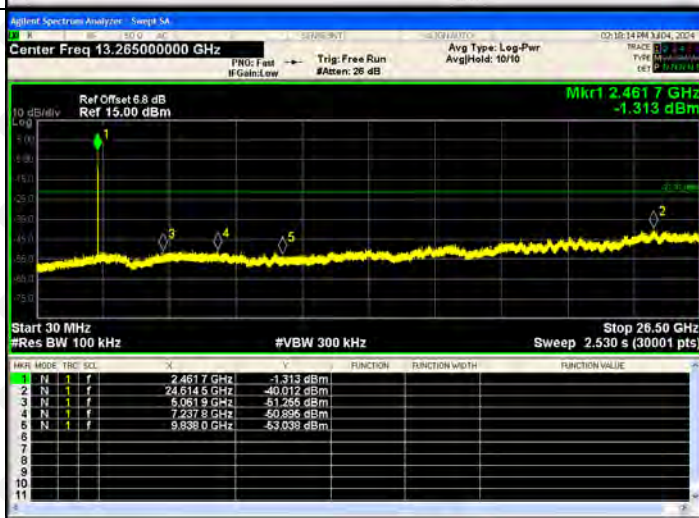


RF Conducted Spurious Emissions Graphs


802.11g/LCH

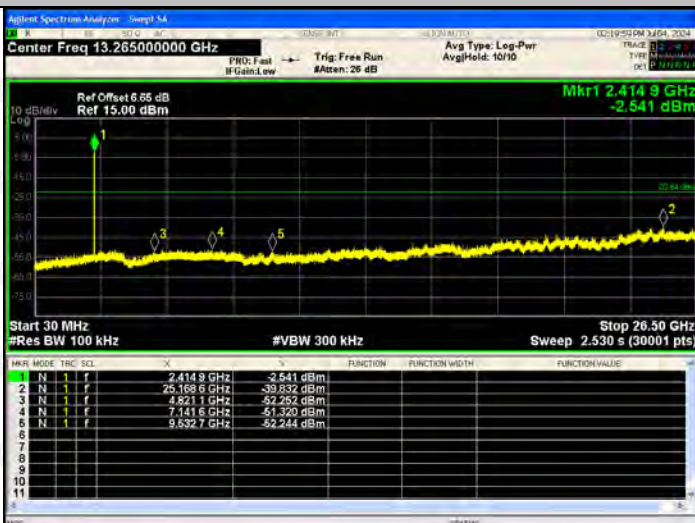




802.11g/MCH



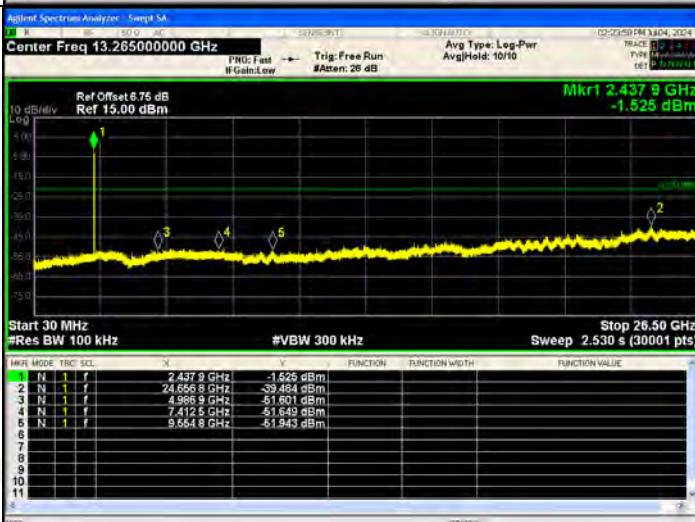


802.11g/HCH

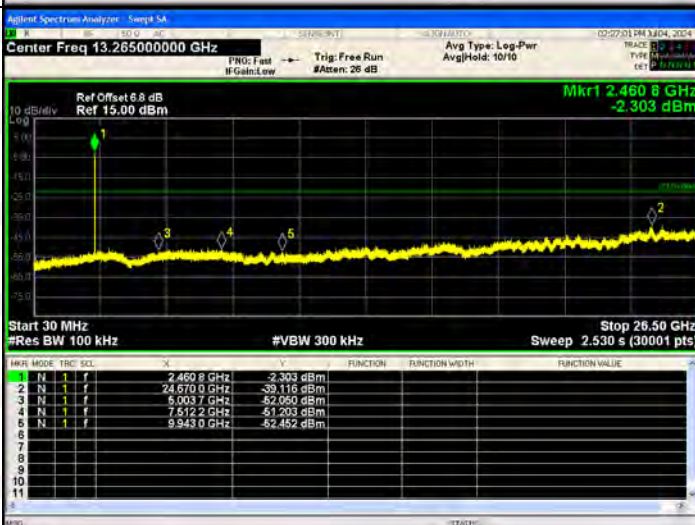


RF Conducted Spurious Emissions Graphs

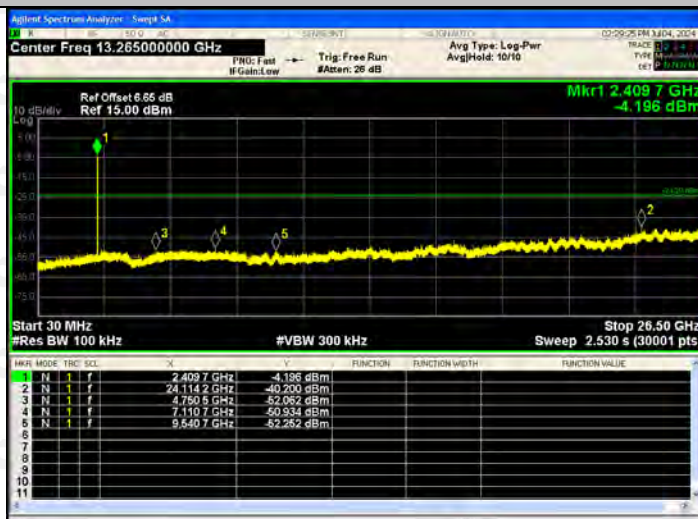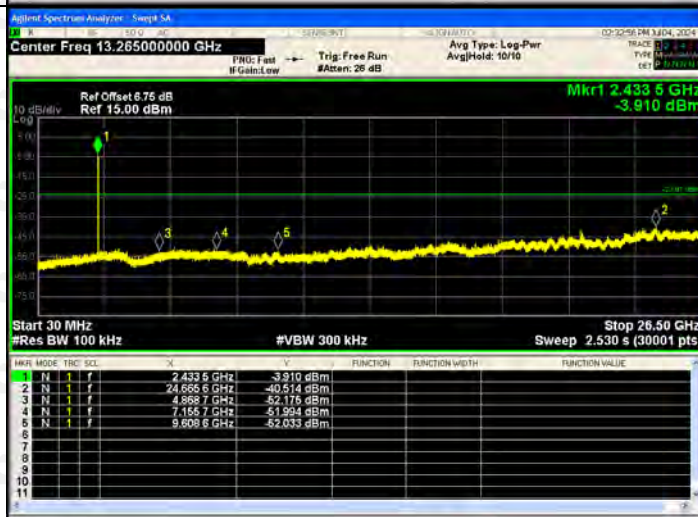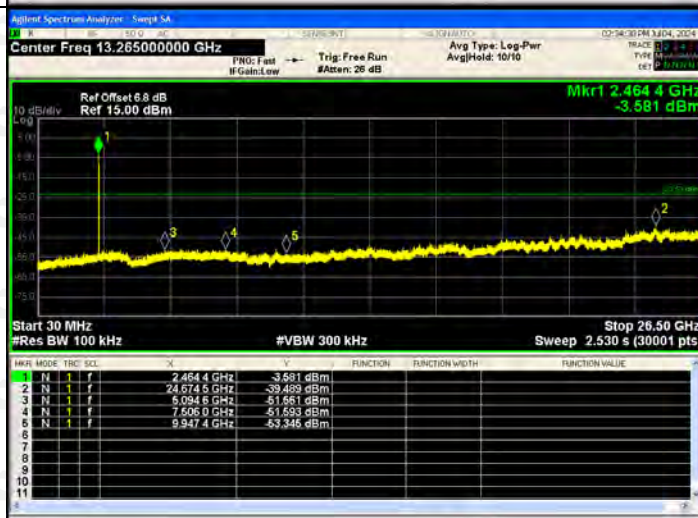802.11n(HT20)/
LCH

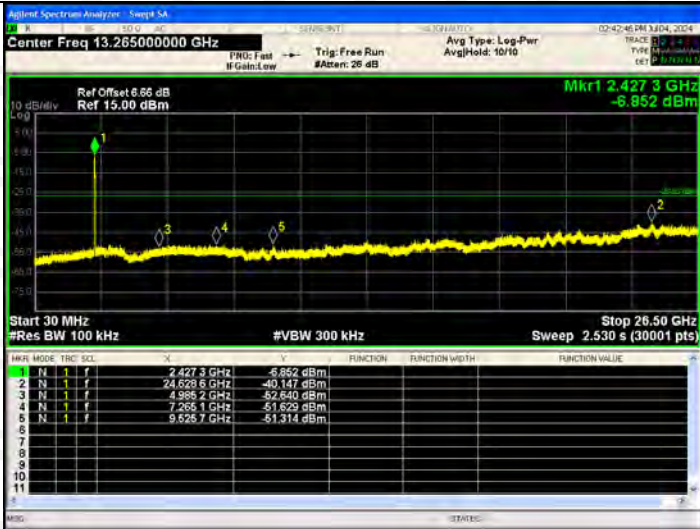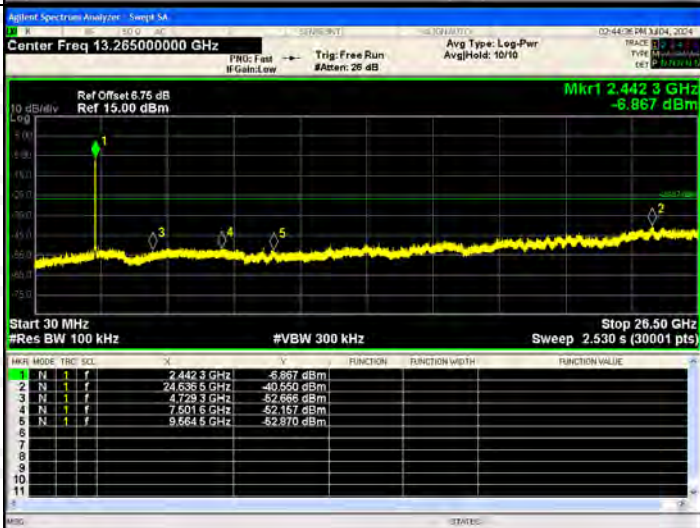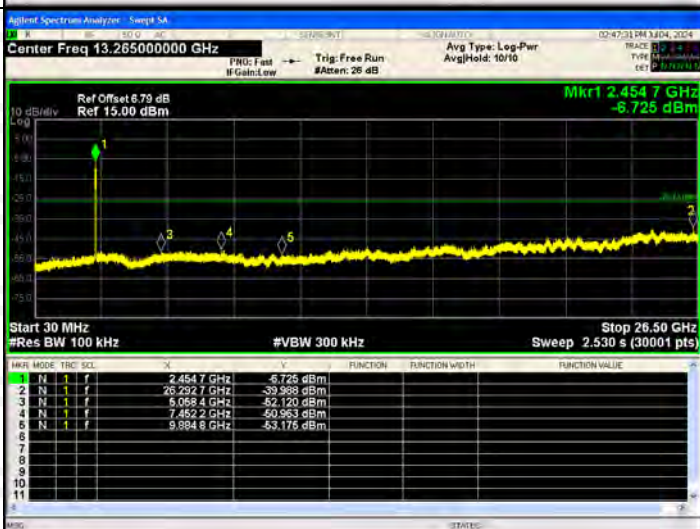802.11
n(HT20)/MCH

802.11
n(HT20)/HCH


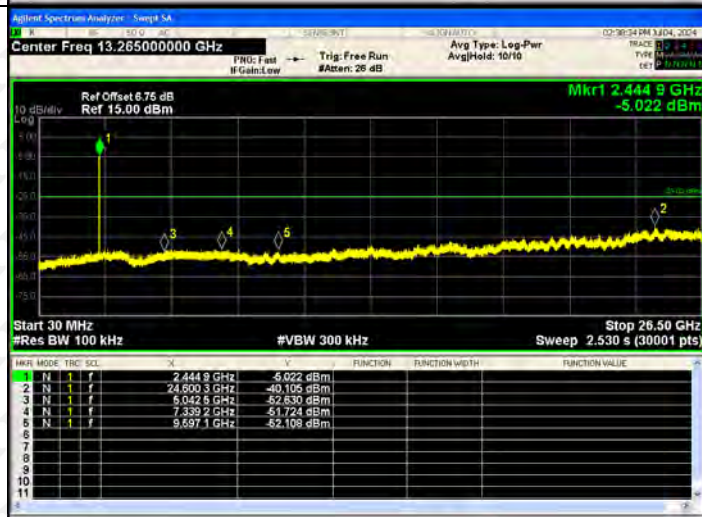
802.11n(HT40)/LCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4273 GHz</td><td>-8.852 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6286 GHz</td><td>-40.147 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9862 GHz</td><td>-52.640 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2651 GHz</td><td>-51.629 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6267 GHz</td><td>-51.314 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4273 GHz	-8.852 dBm				2	N	1	f	24.6286 GHz	-40.147 dBm				3	N	1	f	4.9862 GHz	-52.640 dBm				4	N	1	f	7.2651 GHz	-51.629 dBm				5	N	1	f	9.6267 GHz	-51.314 dBm			
HR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4273 GHz	-8.852 dBm																																																		
2	N	1	f	24.6286 GHz	-40.147 dBm																																																		
3	N	1	f	4.9862 GHz	-52.640 dBm																																																		
4	N	1	f	7.2651 GHz	-51.629 dBm																																																		
5	N	1	f	9.6267 GHz	-51.314 dBm																																																		
802.11n(HT40)/MCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4423 GHz</td><td>-8.867 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6365 GHz</td><td>-40.550 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7293 GHz</td><td>-52.666 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5016 GHz</td><td>-52.151 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6645 GHz</td><td>-52.870 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4423 GHz	-8.867 dBm				2	N	1	f	24.6365 GHz	-40.550 dBm				3	N	1	f	4.7293 GHz	-52.666 dBm				4	N	1	f	7.5016 GHz	-52.151 dBm				5	N	1	f	9.6645 GHz	-52.870 dBm			
HR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4423 GHz	-8.867 dBm																																																		
2	N	1	f	24.6365 GHz	-40.550 dBm																																																		
3	N	1	f	4.7293 GHz	-52.666 dBm																																																		
4	N	1	f	7.5016 GHz	-52.151 dBm																																																		
5	N	1	f	9.6645 GHz	-52.870 dBm																																																		
802.11n(HT40)/HCH	 <table><tr><th>HR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4547 GHz</td><td>-8.725 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.2927 GHz</td><td>-39.988 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0884 GHz</td><td>-52.120 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4522 GHz</td><td>-50.983 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.8848 GHz</td><td>-53.175 dBm</td><td></td><td></td><td></td></tr></table>	HR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4547 GHz	-8.725 dBm				2	N	1	f	26.2927 GHz	-39.988 dBm				3	N	1	f	5.0884 GHz	-52.120 dBm				4	N	1	f	7.4522 GHz	-50.983 dBm				5	N	1	f	9.8848 GHz	-53.175 dBm			
HR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4547 GHz	-8.725 dBm																																																		
2	N	1	f	26.2927 GHz	-39.988 dBm																																																		
3	N	1	f	5.0884 GHz	-52.120 dBm																																																		
4	N	1	f	7.4522 GHz	-50.983 dBm																																																		
5	N	1	f	9.8848 GHz	-53.175 dBm																																																		

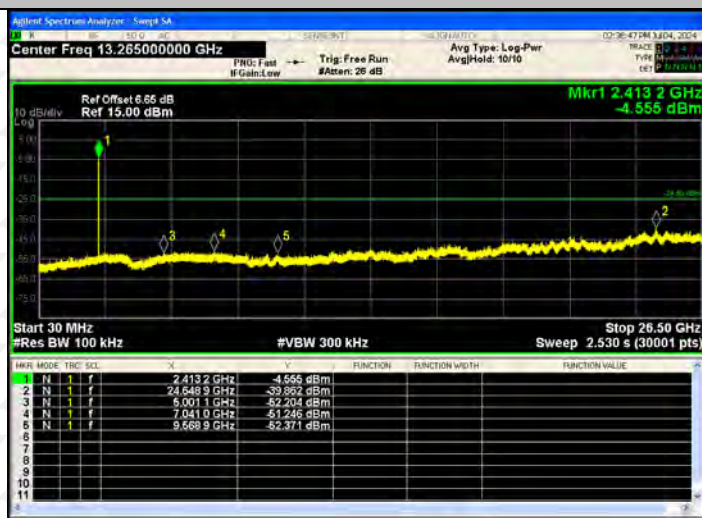RF Conducted Spurious Emissions Graphs


802.11ax(HT20)/LCH



802.11 ax(HT20)/MCH




802.11 ax(HT20)/HCH

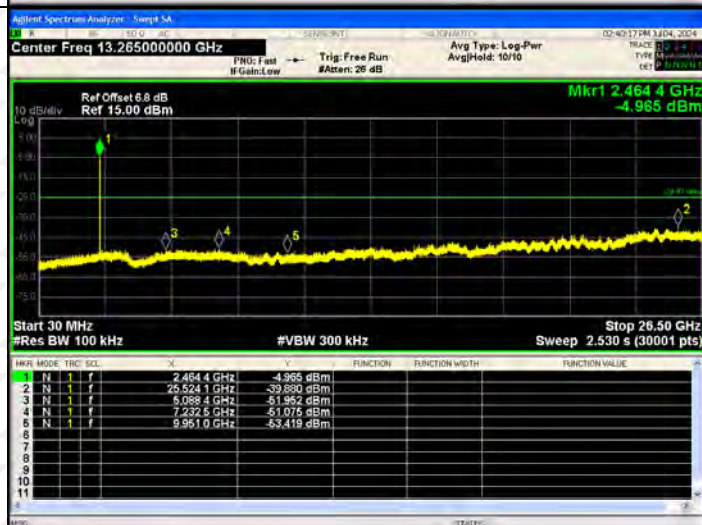


RF Conducted Spurious Emissions Graphs


802.11ax(HT40)/LCH

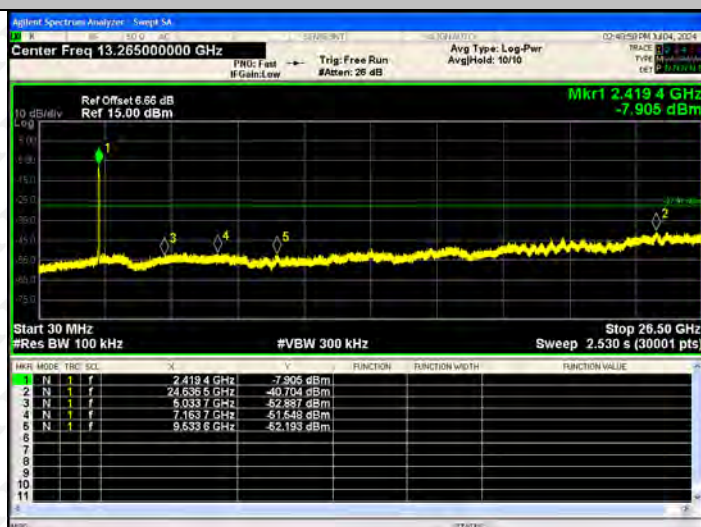

802.11 ax(HT40)/MCH

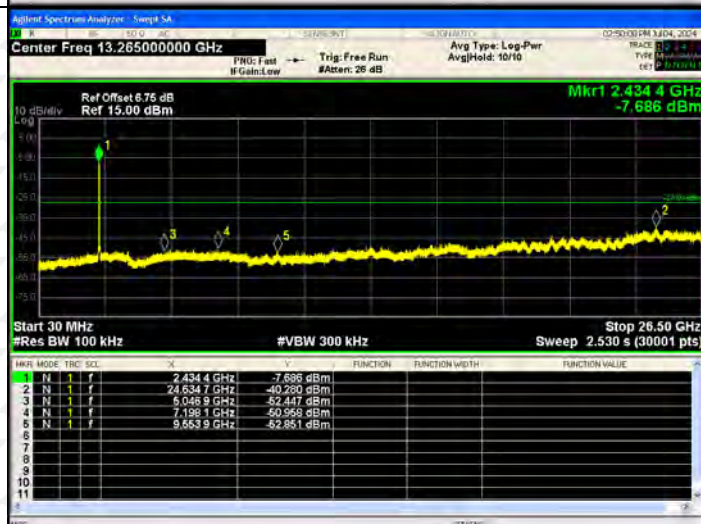


802.11 ax(HT40)/HCH

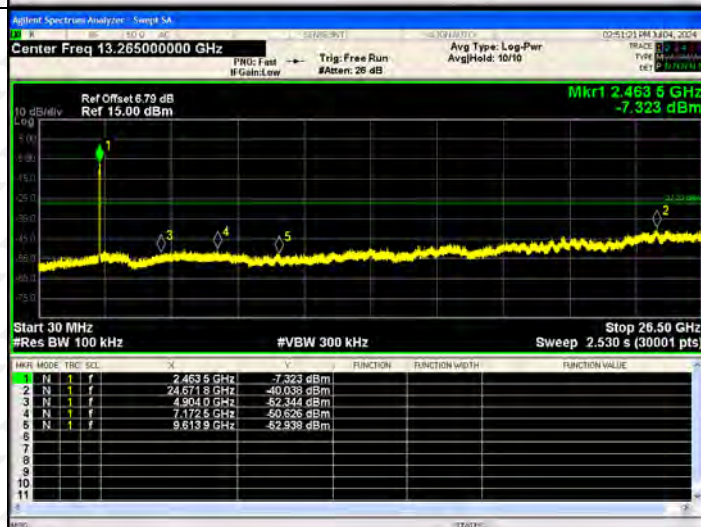

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup

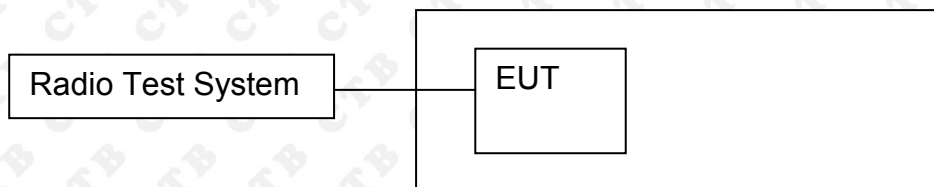

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	14.878	14.382	/	30
	MCH	14.907	14.31	/	30
	HCH	15.223	14.294	/	30
802.11g	LCH	14.218	14.242	/	30
	MCH	14.375	14.269	/	30
	HCH	14.771	14.251	/	30
802.11n(HT20)	LCH	14.533	14.261	17.409	30
	MCH	14.651	14.249	17.465	30
	HCH	15.04	14.178	17.641	30
802.11n(HT40)	LCH	14.11	14.331	17.232	30
	MCH	14.167	14.32	17.254	30
	HCH	14.315	14.322	17.329	30
802.11ax(HT20)	LCH	14.366	14.641	17.516	30
	MCH	14.247	14.505	17.388	30
	HCH	14.675	14.602	17.649	30
802.11ax(HT40)	LCH	14.366	14.549	17.469	30
	MCH	14.443	14.643	17.554	30
	HCH	14.574	14.667	17.631	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

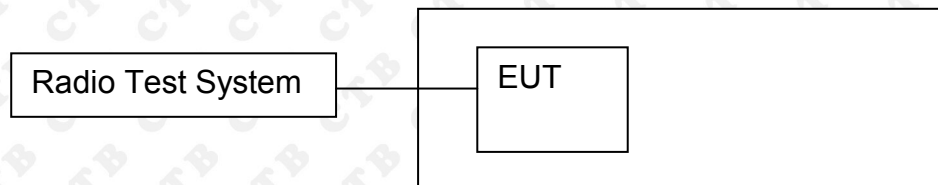

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.471	500	PASS
	MCH	10.134	500	PASS
	HCH	10.307	500	PASS
802.11g	LCH	16.869	500	PASS
	MCH	16.084	500	PASS
	HCH	16.702	500	PASS
802.11n(HT20)	LCH	18.987	500	PASS
	MCH	18.996	500	PASS
	HCH	18.928	500	PASS
802.11n(HT40)	LCH	35.167	500	PASS
	MCH	35.16	500	PASS
	HCH	35.191	500	PASS
802.11ax(HT20)	LCH	18.998	500	PASS
	MCH	19.051	500	PASS
	HCH	19.045	500	PASS
802.11ax(HT40)	LCH	37.967	500	PASS
	MCH	37.858	500	PASS
	HCH	37.946	500	PASS

ANT2:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.426	500	PASS
	MCH	10.356	500	PASS
	HCH	10.203	500	PASS
802.11g	LCH	16.309	500	PASS
	MCH	15.649	500	PASS
	HCH	16.073	500	PASS
802.11n(HT20)	LCH	16.391	500	PASS
	MCH	16.103	500	PASS
	HCH	15.67	500	PASS
802.11n(HT40)	LCH	35.14	500	PASS
	MCH	35.128	500	PASS
	HCH	35.121	500	PASS
802.11ax(HT20)	LCH	19.025	500	PASS
	MCH	18.953	500	PASS
	HCH	18.987	500	PASS
802.11ax(HT40)	LCH	37.908	500	PASS
	MCH	37.89	500	PASS
	HCH	37.972	500	PASS

ANT1:


Test Graph:

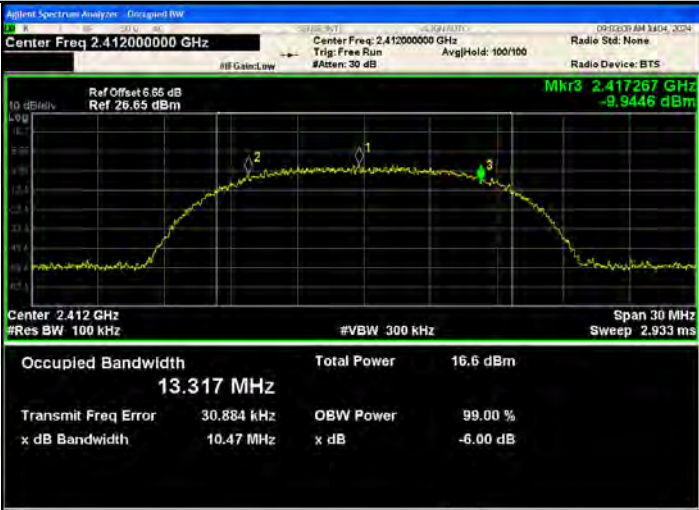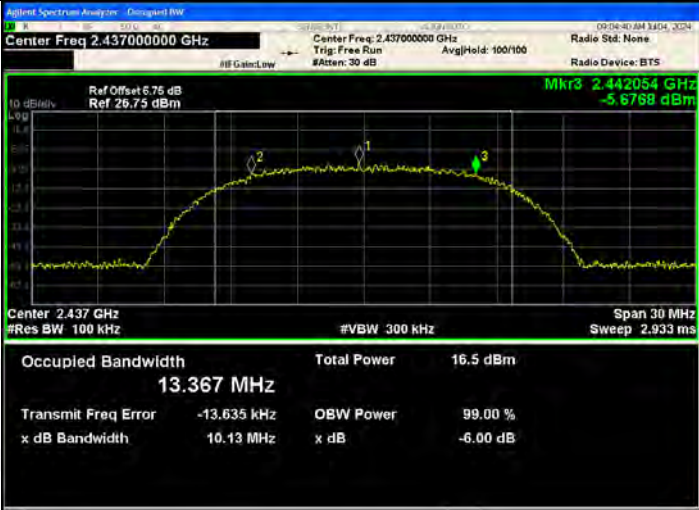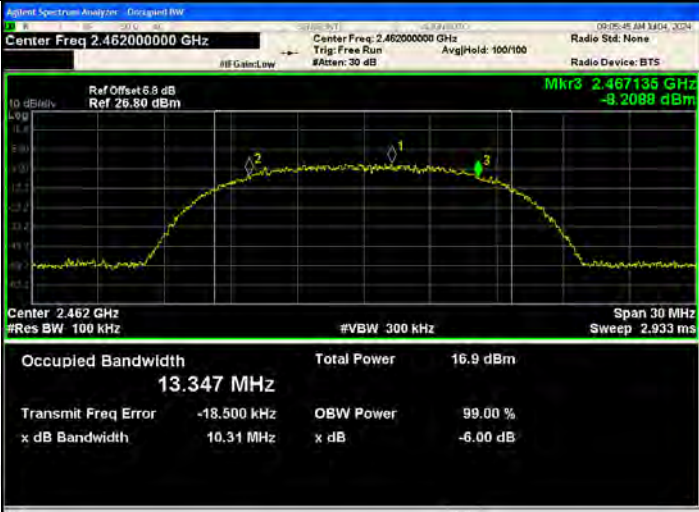Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Crossed BW Center Freq: 2.41200000 GHz Ref Offset: 6.65 dB Ref: 26.65 dBm Mkr3: 2.417267 GHz -9.9446 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.317 MHz Total Power: 16.6 dBm Transmit Freq Error: 30.884 kHz OBW Power: 99.00 % x dB Bandwidth: 10.47 MHz x dB: -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Crossed BW Center Freq: 2.43700000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Mkr3: 2.442054 GHz -5.6798 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.367 MHz Total Power: 16.5 dBm Transmit Freq Error: -13.635 kHz OBW Power: 99.00 % x dB Bandwidth: 10.13 MHz x dB: -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Crossed BW Center Freq: 2.46200000 GHz Ref Offset: 6.8 dB Ref: 26.80 dBm Mkr3: 2.467135 GHz -9.2088 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.347 MHz Total Power: 16.9 dBm Transmit Freq Error: -18.500 kHz OBW Power: 99.00 % x dB Bandwidth: 10.31 MHz x dB: -6.00 dB

802.11g/LCH



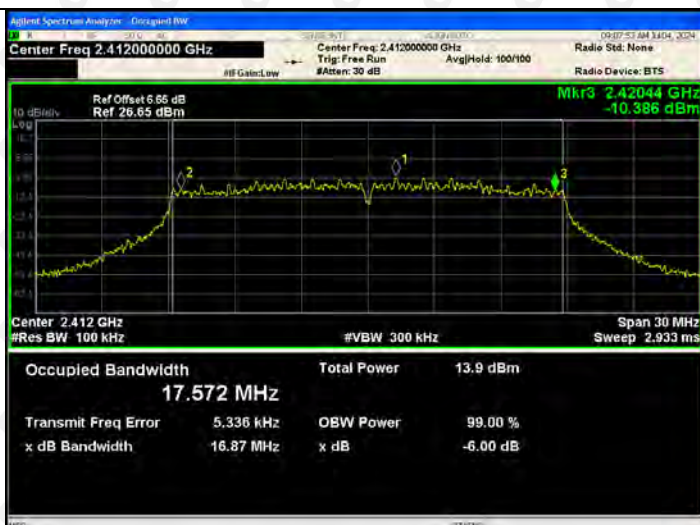




802.11g/MCH


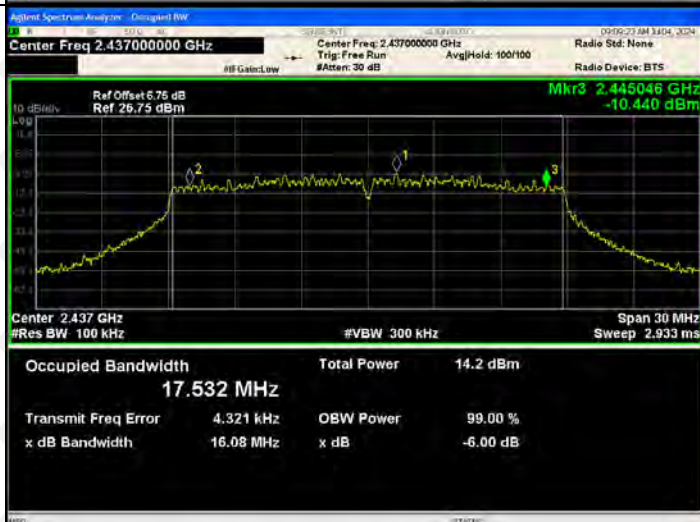





802.11g/HCH

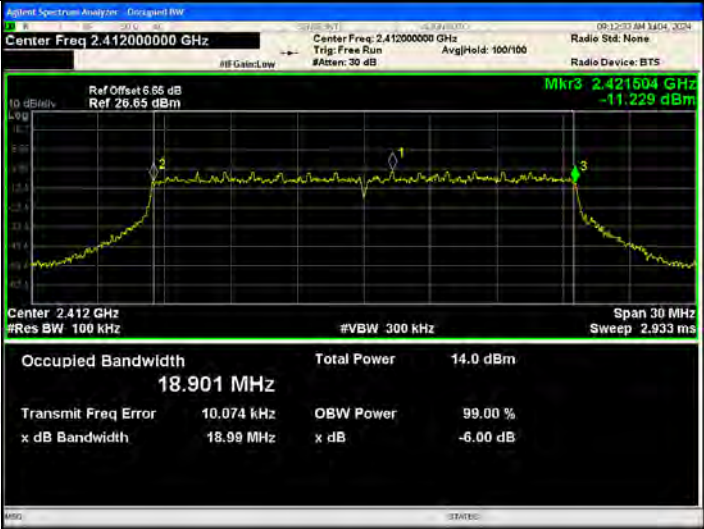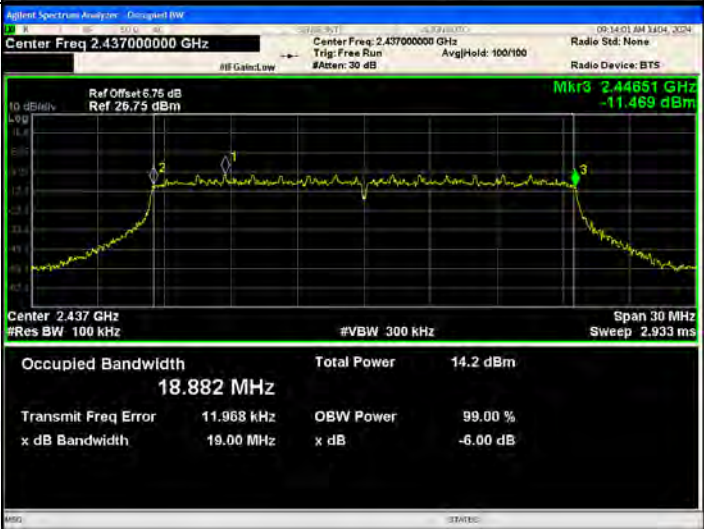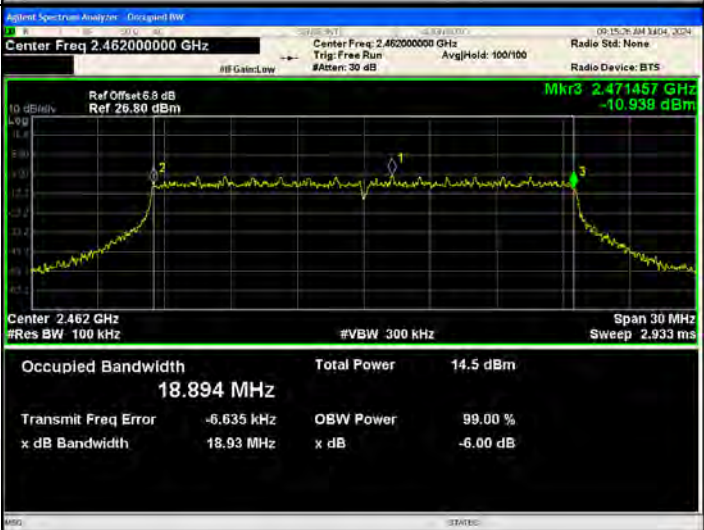

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 6.65 dB Ref 26.65 dBm Mkr3 2.421504 GHz -11.229 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.901 MHz Total Power 14.0 dBm Transmit Freq Error 10.074 kHz OBW Power 99.00 % x dB Bandwidth 18.99 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 6.75 dB Ref 26.75 dBm Mkr3 2.44651 GHz -11.469 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.882 MHz Total Power 14.2 dBm Transmit Freq Error 11.968 kHz OBW Power 99.00 % x dB Bandwidth 19.00 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 6.8 dB Ref 26.80 dBm Mkr3 2.471457 GHz -10.939 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 18.894 MHz Total Power 14.5 dBm Transmit Freq Error -6.635 kHz OBW Power 99.00 % x dB Bandwidth 18.93 MHz x dB -6.00 dB

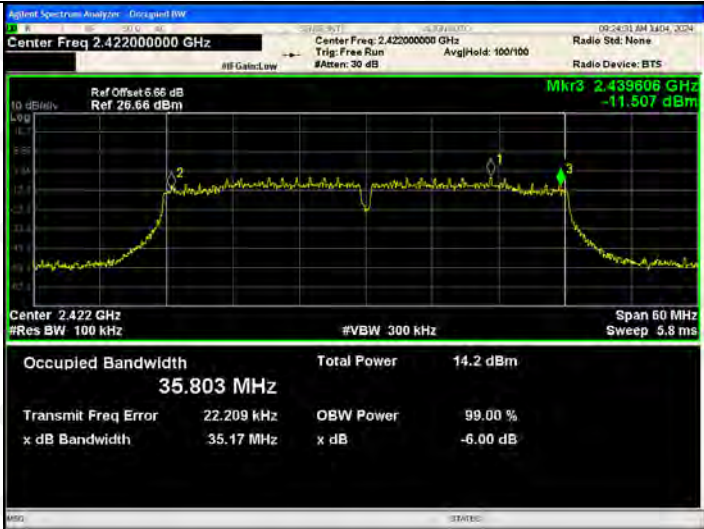
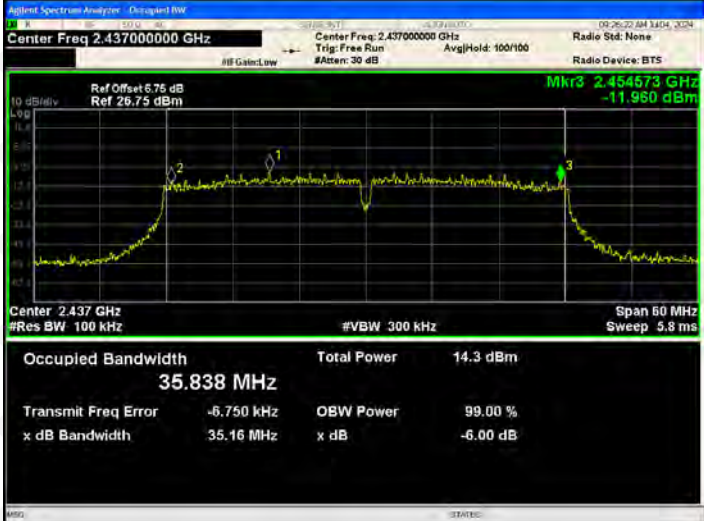
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.422000000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3: 2.439806 GHz -11.507 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>14.2 dBm</td></tr><tr><td>35.803 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>22.209 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>35.17 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	14.2 dBm	35.803 MHz			Transmit Freq Error	OBW Power	99.00 %	22.209 kHz	x dB	-6.00 dB	x dB Bandwidth			35.17 MHz		
Occupied Bandwidth	Total Power	14.2 dBm																	
35.803 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
22.209 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.17 MHz																			
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Mkr3: 2.454573 GHz -11.960 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>14.3 dBm</td></tr><tr><td>35.838 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-6.750 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>35.16 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	14.3 dBm	35.838 MHz			Transmit Freq Error	OBW Power	99.00 %	-6.750 kHz	x dB	-6.00 dB	x dB Bandwidth			35.16 MHz		
Occupied Bandwidth	Total Power	14.3 dBm																	
35.838 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-6.750 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.16 MHz																			
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.452000000 GHz Ref Offset: 6.79 dB Ref: 26.79 dBm Mkr3: 2.469659 GHz -13.208 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>14.4 dBm</td></tr><tr><td>35.868 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>93.763 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>35.19 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	14.4 dBm	35.868 MHz			Transmit Freq Error	OBW Power	99.00 %	93.763 kHz	x dB	-6.00 dB	x dB Bandwidth			35.19 MHz		
Occupied Bandwidth	Total Power	14.4 dBm																	
35.868 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
93.763 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
35.19 MHz																			

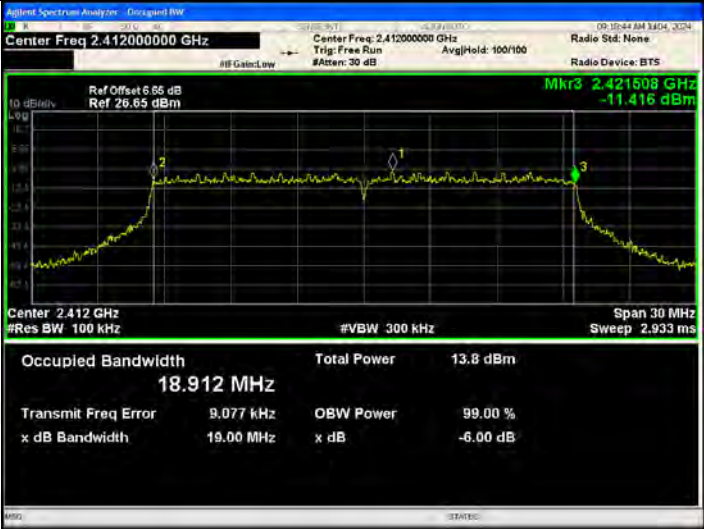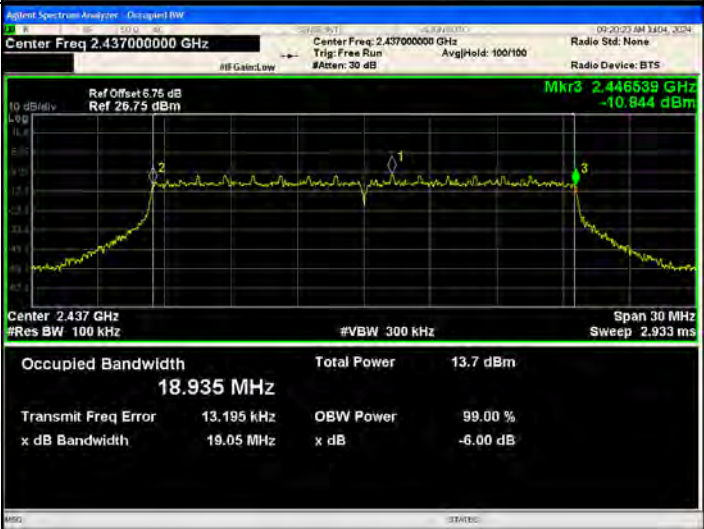802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.55 dB Ref: 26.65 dBm Mkr3: 2.421598 GHz -11.416 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 18.912 MHz Total Power: 13.8 dBm Transmit Freq Error: 9.077 kHz OBW Power: 99.00 % x dB Bandwidth: 19.00 MHz x dB: -6.00 dB
802.11ax(HT20)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Mkr3: 2.446539 GHz -10.844 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 18.935 MHz Total Power: 13.7 dBm Transmit Freq Error: 13.195 kHz OBW Power: 99.00 % x dB Bandwidth: 19.05 MHz x dB: -6.00 dB
802.11ax(HT20)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 6.8 dB Ref: 26.80 dBm Mkr3: 2.471535 GHz -10.584 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 18.935 MHz Total Power: 14.2 dBm Transmit Freq Error: 12.870 kHz OBW Power: 99.00 % x dB Bandwidth: 19.04 MHz x dB: -6.00 dB

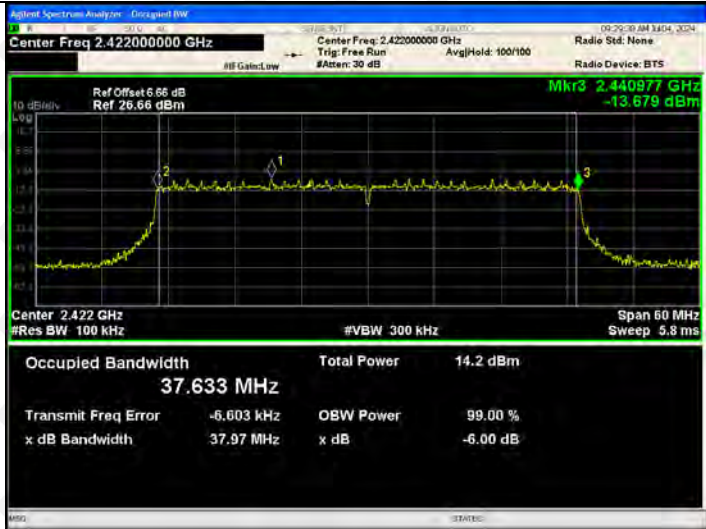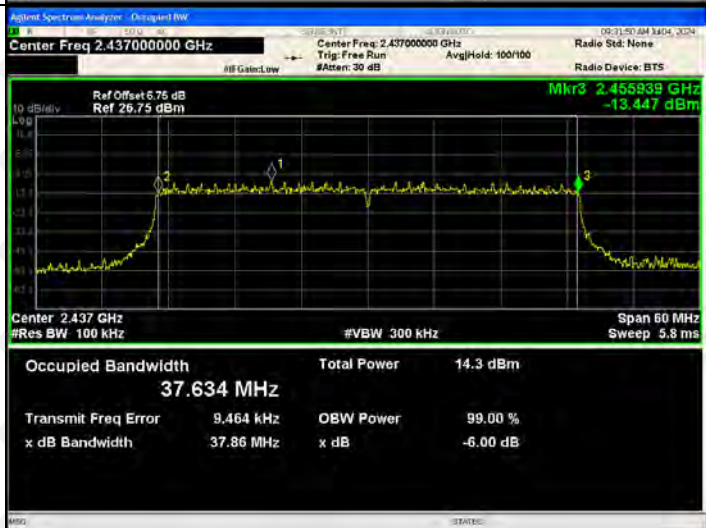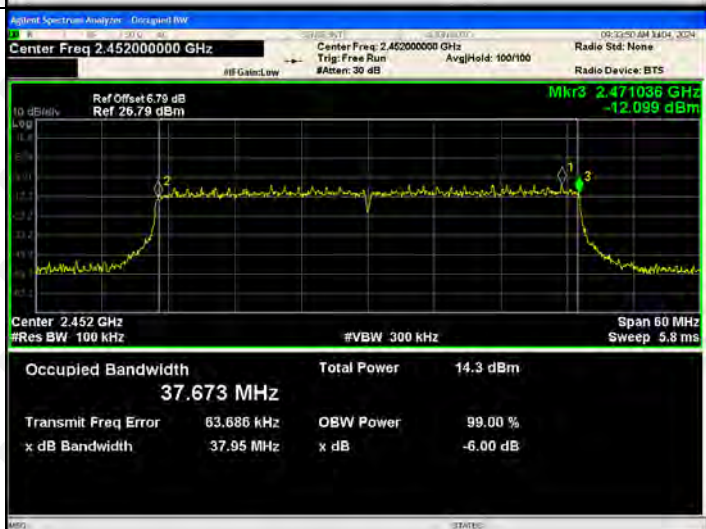802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.422000000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3: 2.440977 GHz -13.679 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>14.2 dBm</td></tr><tr><td>37.633 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>-6.603 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>37.97 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	14.2 dBm	37.633 MHz			Transmit Freq Error	OBW Power	99.00 %	-6.603 kHz	x dB	-6.00 dB	x dB Bandwidth			37.97 MHz		
Occupied Bandwidth	Total Power	14.2 dBm																	
37.633 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-6.603 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
37.97 MHz																			
802.11ax(HT40)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Mkr3: 2.456939 GHz -13.447 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>14.3 dBm</td></tr><tr><td>37.634 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>9.464 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>37.86 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	14.3 dBm	37.634 MHz			Transmit Freq Error	OBW Power	99.00 %	9.464 kHz	x dB	-6.00 dB	x dB Bandwidth			37.86 MHz		
Occupied Bandwidth	Total Power	14.3 dBm																	
37.634 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
9.464 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
37.86 MHz																			
802.11ax(HT40)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.452000000 GHz Ref Offset: 6.79 dB Ref: 26.79 dBm Mkr3: 2.471036 GHz -12.099 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>14.3 dBm</td></tr><tr><td>37.673 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>63.686 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>37.95 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	14.3 dBm	37.673 MHz			Transmit Freq Error	OBW Power	99.00 %	63.686 kHz	x dB	-6.00 dB	x dB Bandwidth			37.95 MHz		
Occupied Bandwidth	Total Power	14.3 dBm																	
37.673 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
63.686 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
37.95 MHz																			

ANT2:


Test Graph:

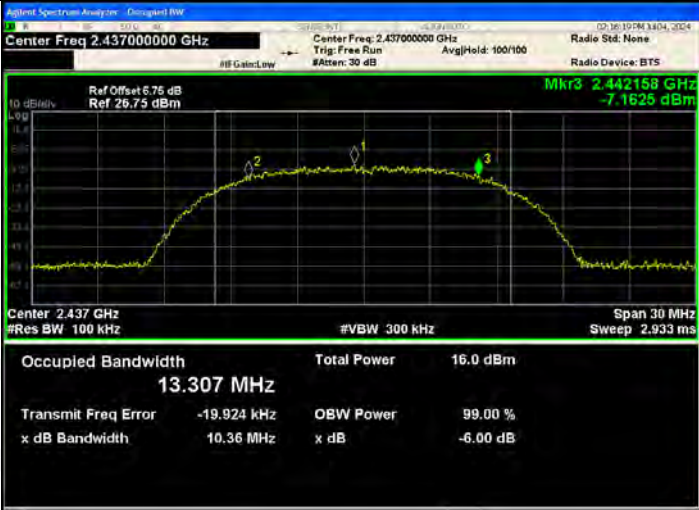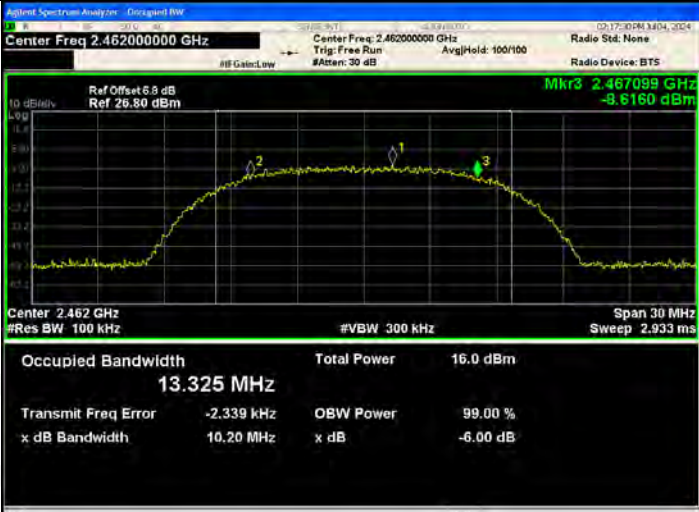Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.65 dB Ref: 26.65 dBm Mkr3: 2.417244 GHz -9.2340 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.288 MHz Total Power: 16.1 dBm Transmit Freq Error: 30.546 kHz OBW Power: 99.00 % x dB Bandwidth: 10.43 MHz x dB: -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Mkr3: 2.442158 GHz -7.1625 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.307 MHz Total Power: 16.0 dBm Transmit Freq Error: -19.924 kHz OBW Power: 99.00 % x dB Bandwidth: 10.36 MHz x dB: -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 6.8 dB Ref: 26.80 dBm Mkr3: 2.467099 GHz -8.6160 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 13.325 MHz Total Power: 16.0 dBm Transmit Freq Error: -2.339 kHz OBW Power: 99.00 % x dB Bandwidth: 10.20 MHz x dB: -6.00 dB


802.11g/LCH








802.11g/MCH



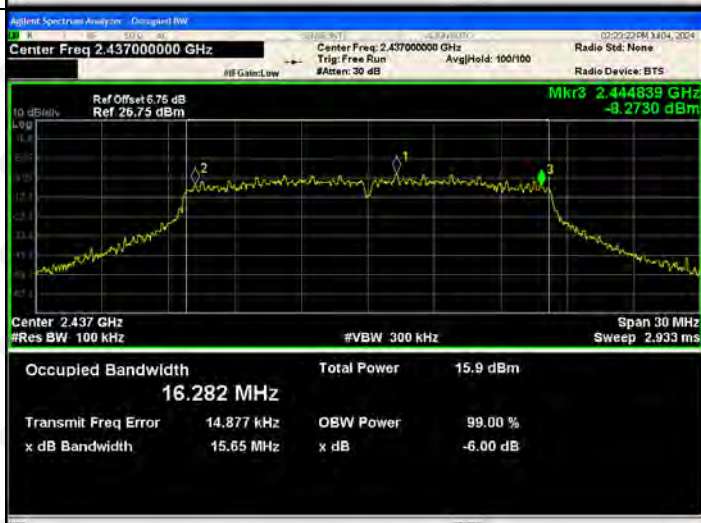





802.11g/HCH

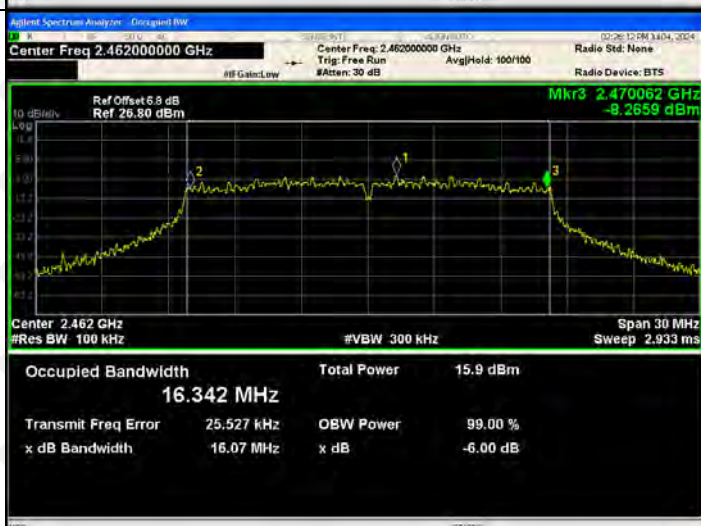

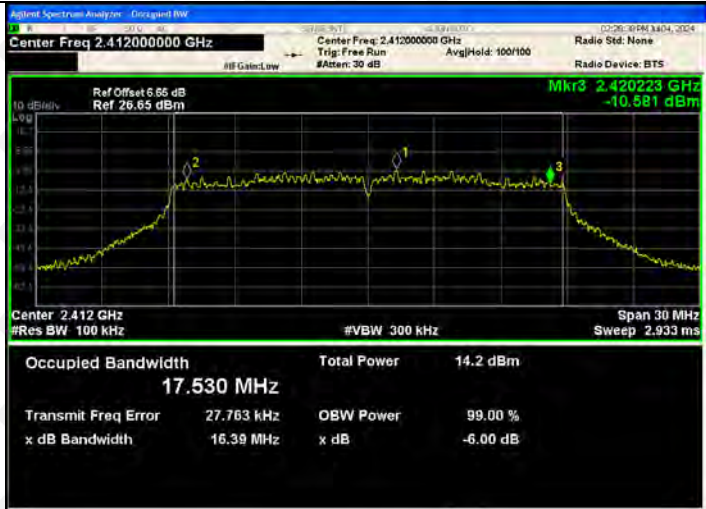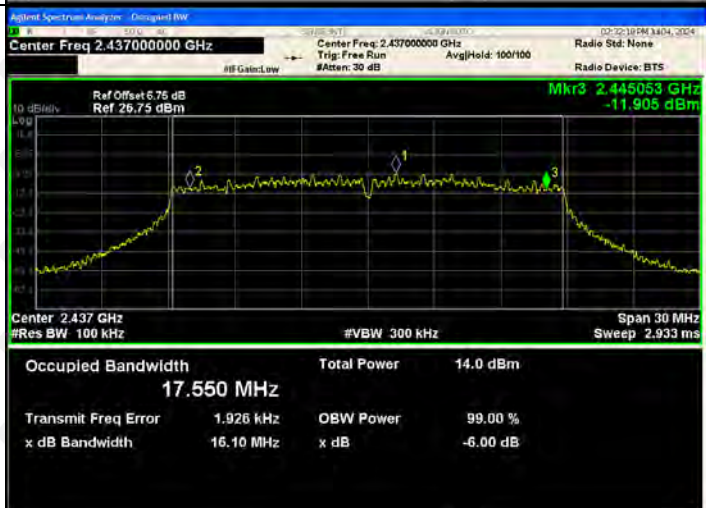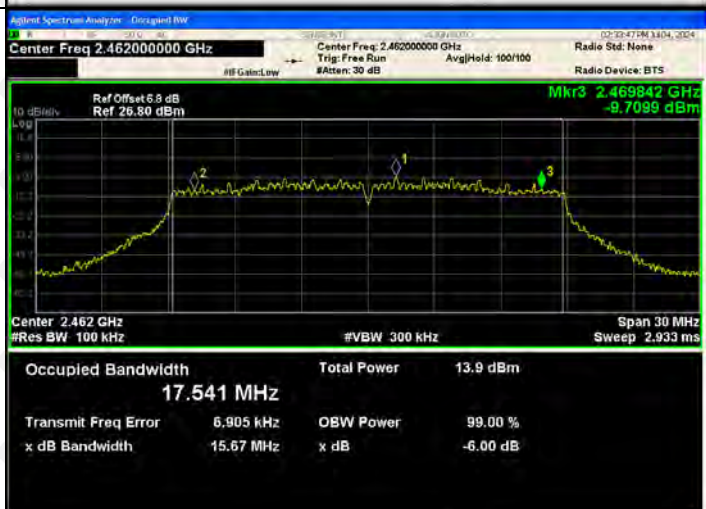802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 6.55 dB Ref: 26.65 dBm Mkr3: 2.420223 GHz -10.581 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>14.2 dBm</td></tr><tr><td>17.530 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>27.763 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>16.39 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	14.2 dBm	17.530 MHz			Transmit Freq Error	OBW Power	99.00 %	27.763 kHz	x dB	-6.00 dB	x dB Bandwidth			16.39 MHz		
Occupied Bandwidth	Total Power	14.2 dBm																	
17.530 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
27.763 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.39 MHz																			
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Mkr3: 2.445053 GHz -11.905 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>14.0 dBm</td></tr><tr><td>17.550 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>1.926 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>16.10 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	14.0 dBm	17.550 MHz			Transmit Freq Error	OBW Power	99.00 %	1.926 kHz	x dB	-6.00 dB	x dB Bandwidth			16.10 MHz		
Occupied Bandwidth	Total Power	14.0 dBm																	
17.550 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
1.926 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.10 MHz																			
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 6.8 dB Ref: 26.80 dBm Mkr3: 2.469842 GHz -9.7099 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td><td>13.9 dBm</td></tr><tr><td>17.541 MHz</td><td></td><td></td></tr><tr><td>Transmit Freq Error</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>6.905 kHz</td><td>x dB</td><td>-6.00 dB</td></tr><tr><td>x dB Bandwidth</td><td></td><td></td></tr><tr><td>15.67 MHz</td><td></td><td></td></tr></table>	Occupied Bandwidth	Total Power	13.9 dBm	17.541 MHz			Transmit Freq Error	OBW Power	99.00 %	6.905 kHz	x dB	-6.00 dB	x dB Bandwidth			15.67 MHz		
Occupied Bandwidth	Total Power	13.9 dBm																	
17.541 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
6.905 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
15.67 MHz																			

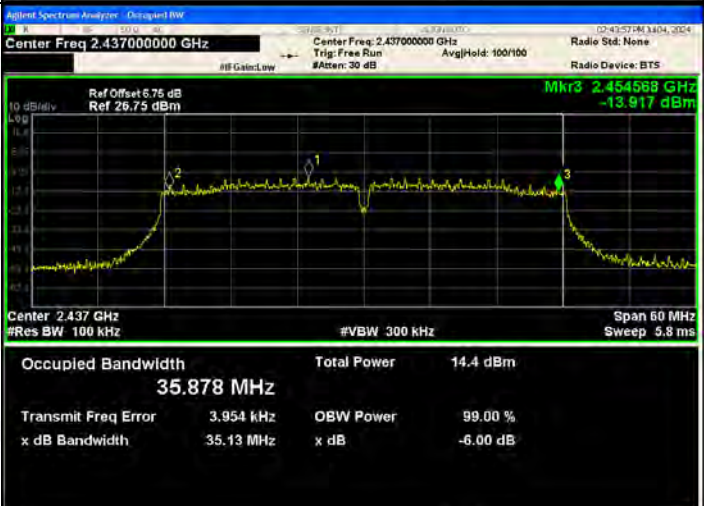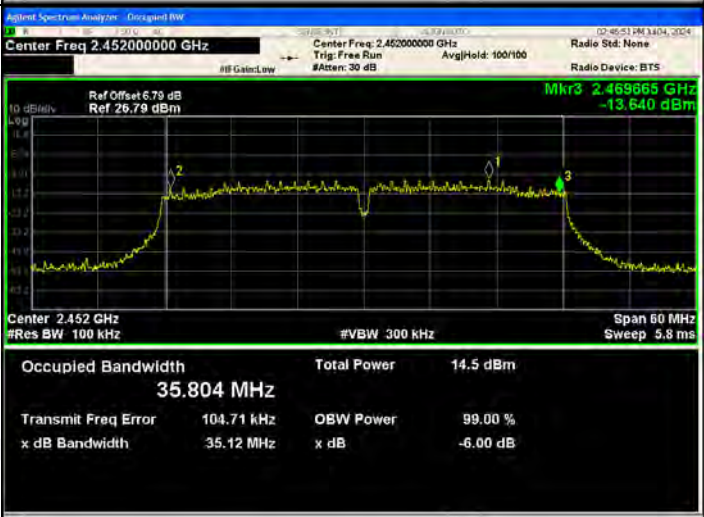
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.42200000 GHz Ref Offset: 6.66 dB Ref: 26.66 dBm Mkr3: 2.439576 GHz -13.258 dBm Center: 2.422 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 35.848 MHz Total Power: 14.5 dBm Transmit Freq Error: 6.189 kHz OBW Power: 99.00 % x dB Bandwidth: 35.14 MHz x dB: -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Mkr3: 2.454568 GHz -13.917 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 35.878 MHz Total Power: 14.4 dBm Transmit Freq Error: 3.954 kHz OBW Power: 99.00 % x dB Bandwidth: 35.13 MHz x dB: -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.45200000 GHz Ref Offset: 6.79 dB Ref: 26.79 dBm Mkr3: 2.469665 GHz -13.640 dBm Center: 2.452 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 5.8 ms Occupied Bandwidth: 35.804 MHz Total Power: 14.5 dBm Transmit Freq Error: 104.71 kHz OBW Power: 99.00 % x dB Bandwidth: 35.12 MHz x dB: -6.00 dB

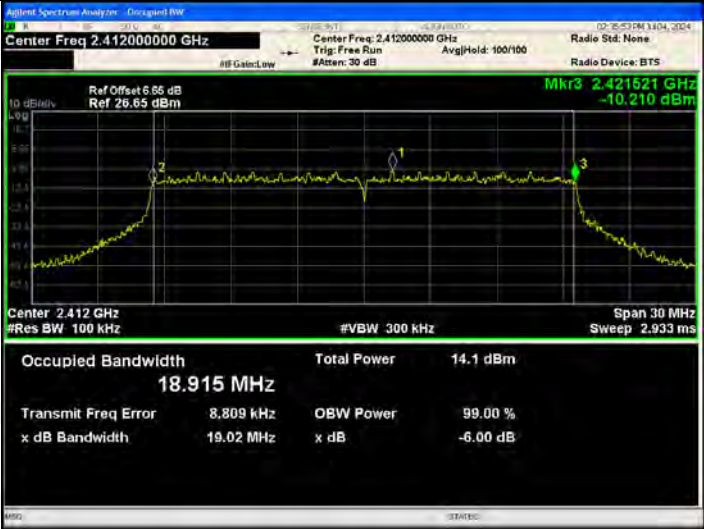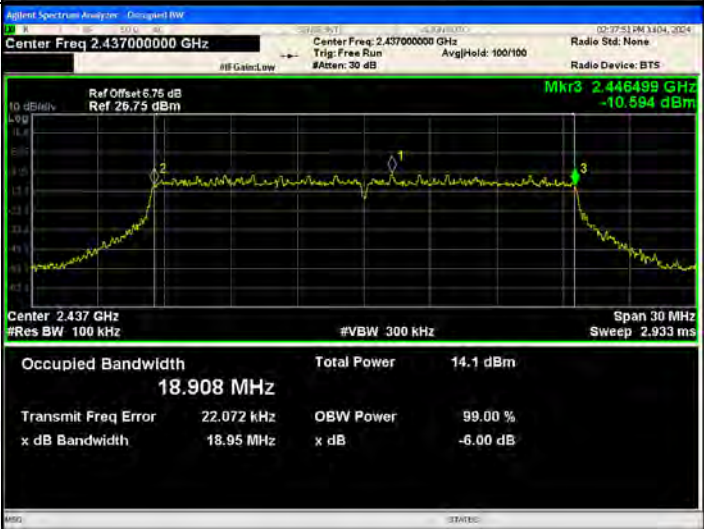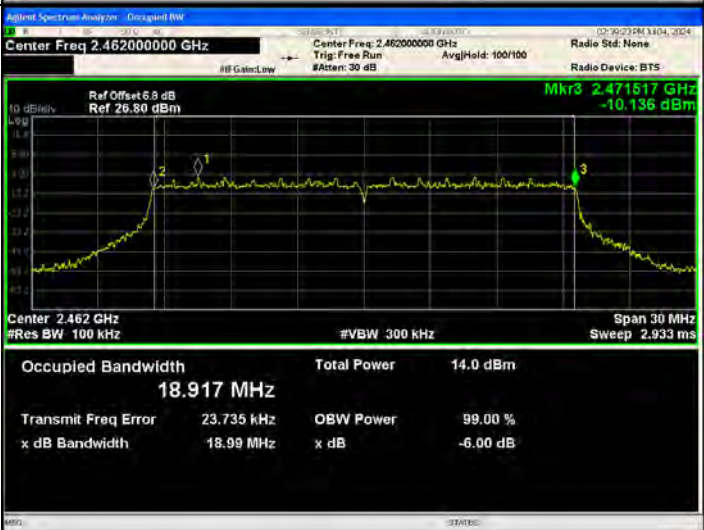802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.41200000 GHz Ref Offset: 6.55 dB Ref: 26.65 dBm Mkr3: 2.421521 GHz -10.210 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 18.915 MHz Total Power: 14.1 dBm Transmit Freq Error: 8.809 kHz OBW Power: 99.00 % x dB Bandwidth: 19.02 MHz x dB: -6.00 dB
802.11ax(HT20)/M CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.43700000 GHz Ref Offset: 6.75 dB Ref: 26.75 dBm Mkr3: 2.446499 GHz -10.594 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 18.908 MHz Total Power: 14.1 dBm Transmit Freq Error: 22.072 kHz OBW Power: 99.00 % x dB Bandwidth: 18.95 MHz x dB: -6.00 dB
802.11ax(HT20)/H CH	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.46200000 GHz Ref Offset: 6.8 dB Ref: 26.80 dBm Mkr3: 2.471517 GHz -10.136 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 18.917 MHz Total Power: 14.0 dBm Transmit Freq Error: 23.735 kHz OBW Power: 99.00 % x dB Bandwidth: 18.99 MHz x dB: -6.00 dB

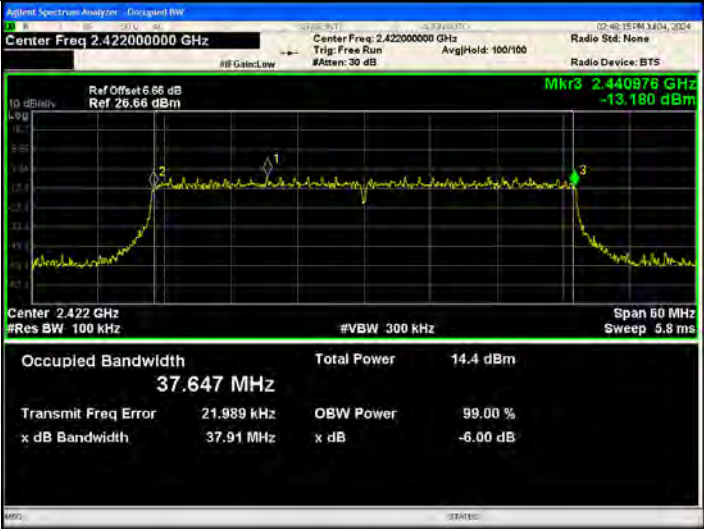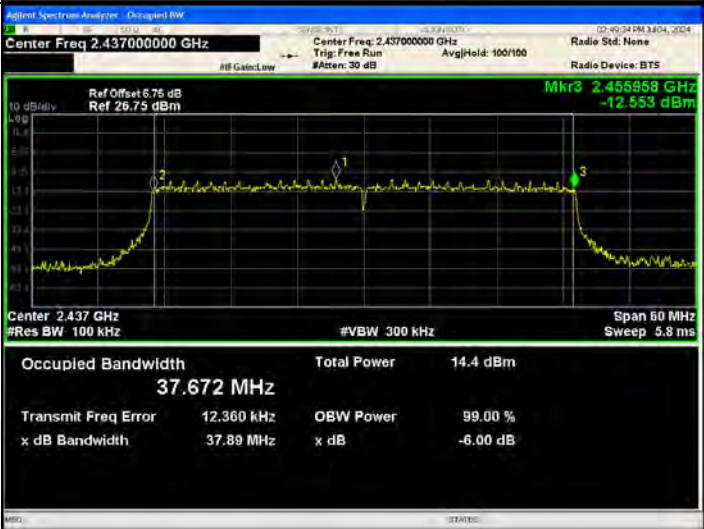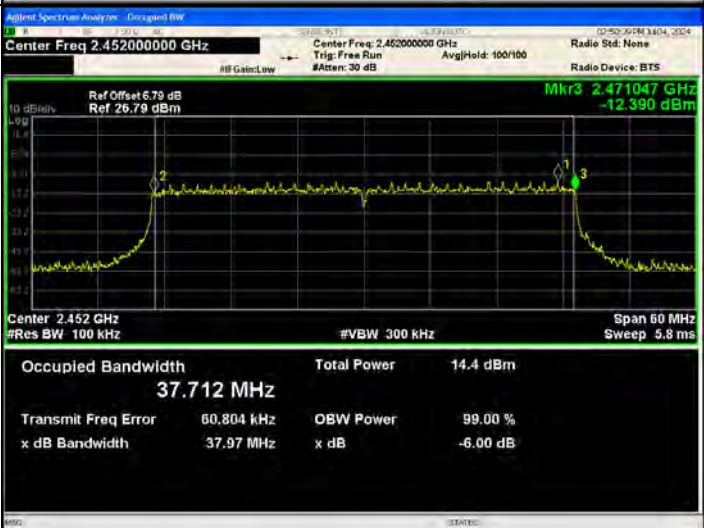802.11ax(HT40)/LC H	
802.11ax(HT40)/M CH	
802.11ax(HT40)/H CH	

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

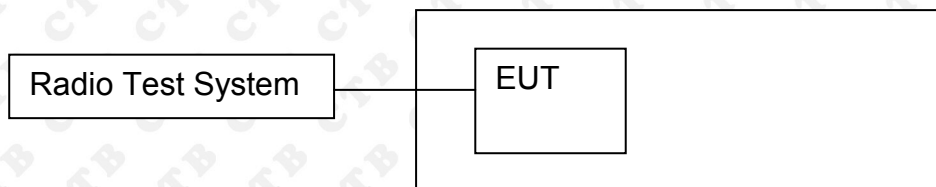

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-15.425	-15.577	/	8
	MCH	-15.621	-15.723	/	8
	HCH	-14.491	-16.325	/	8
802.11g	LCH	-17.454	-16.912	/	8
	MCH	-16.372	-17.488	/	8
	HCH	-16.772	-17.01	/	8
802.11n(H T20)	LCH	-16.941	-17.055	-13.987	8
	MCH	-16.917	-16.788	-13.842	8
	HCH	-16.577	-17.777	-14.125	8
802.11n(H T40)	LCH	-19.366	-20.275	-16.786	8
	MCH	-19.027	-20.309	-16.611	8
	HCH	-21.171	-19.765	-17.401	8
802.11ax(HT20)	LCH	-18.81	-19.502	-16.132	8
	MCH	-17.622	-19.068	-15.275	8
	HCH	-17.858	-18.4	-15.110	8
802.11ax(HT40)	LCH	-21.38	-20.628	-17.977	8
	MCH	-20.613	-18.813	-16.610	8
	HCH	-19.638	-20.777	-17.160	8


ANT1: Test Graph

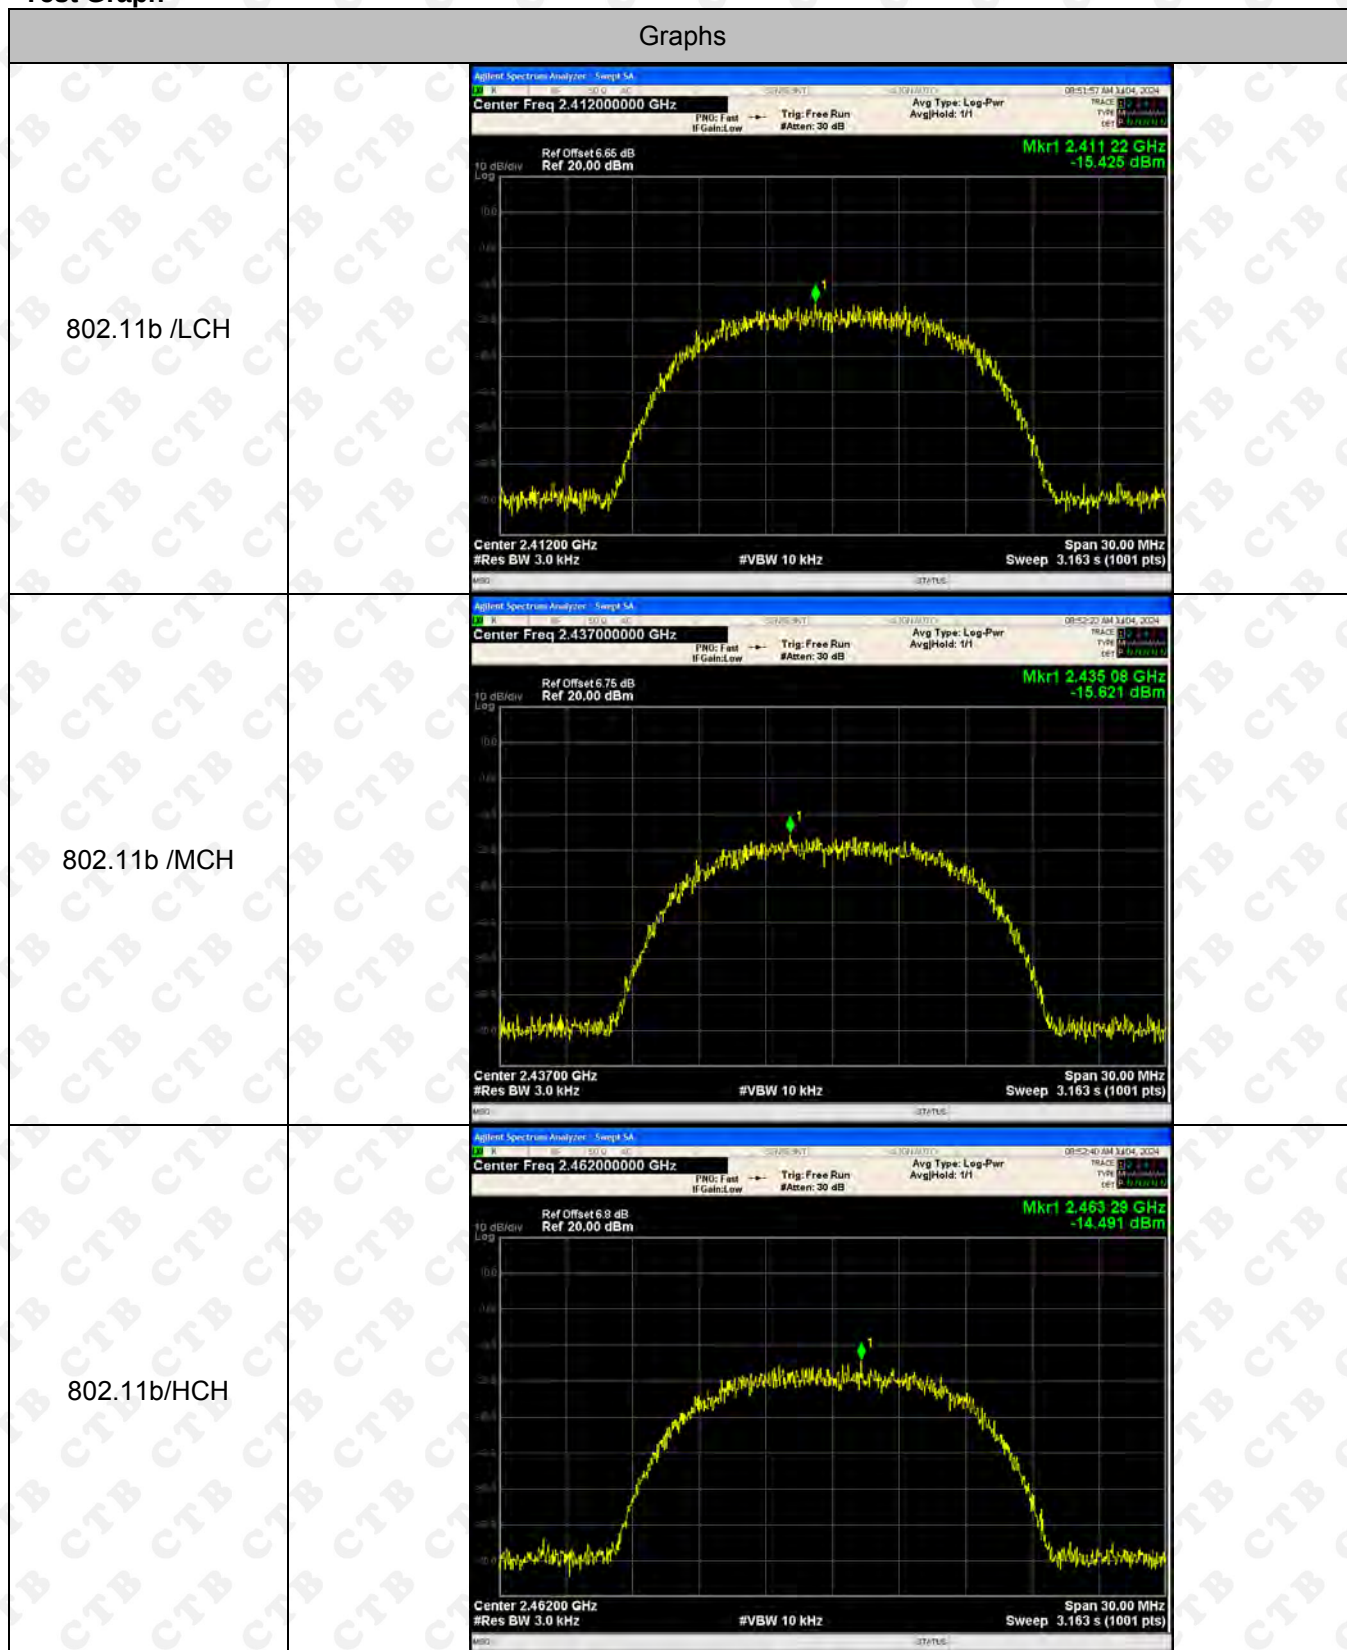


802.11g/LCH


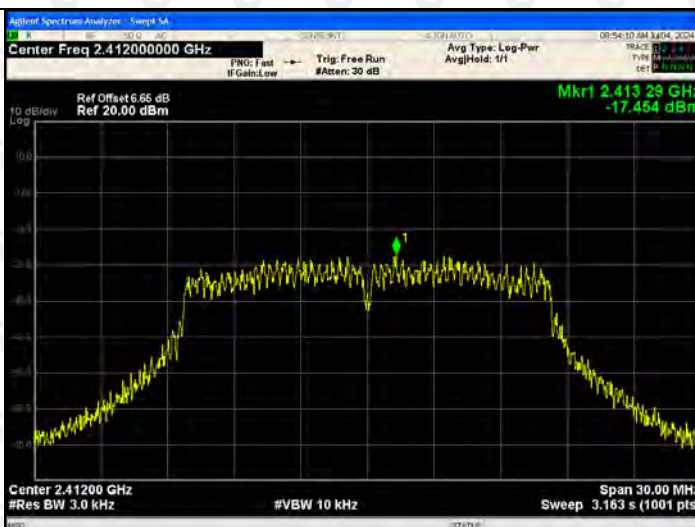





802.11g/MCH



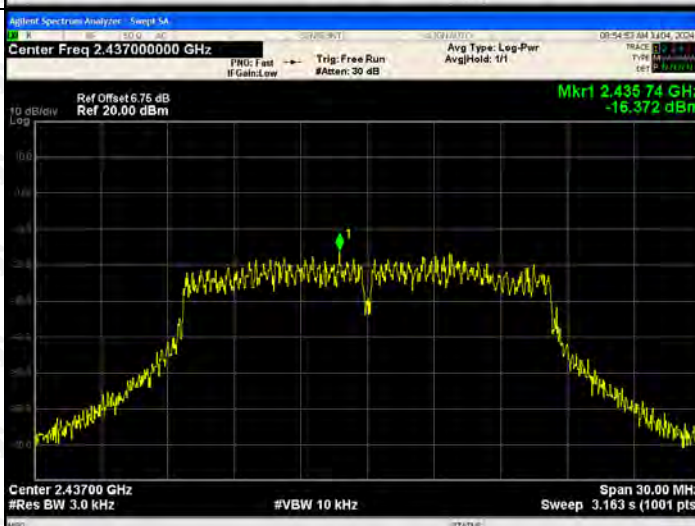





802.11g/HCH

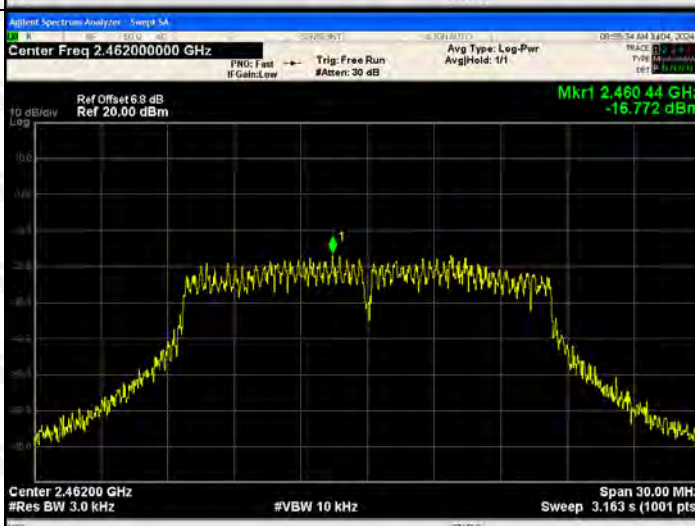

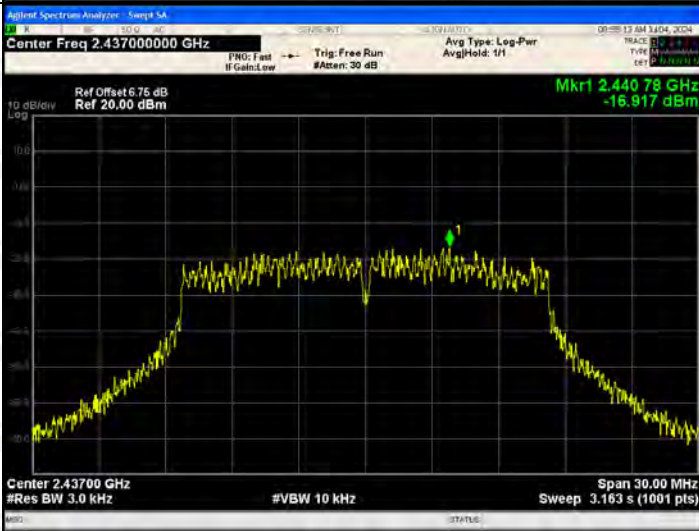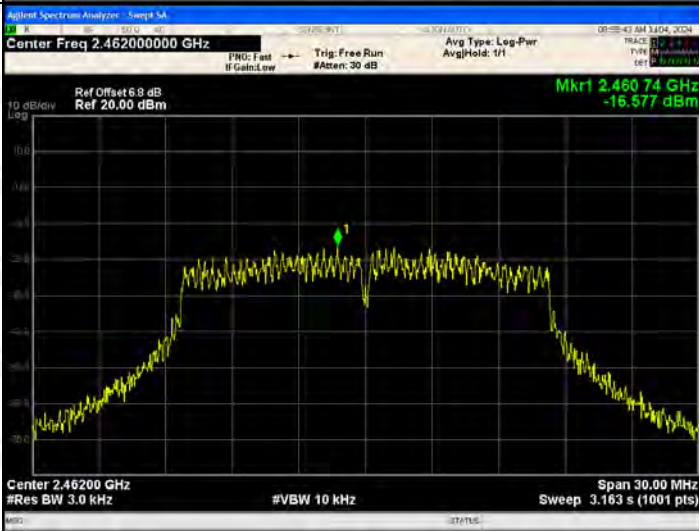802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.41581 GHz -16.941 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.44078 GHz -16.917 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.46074 GHz -16.577 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

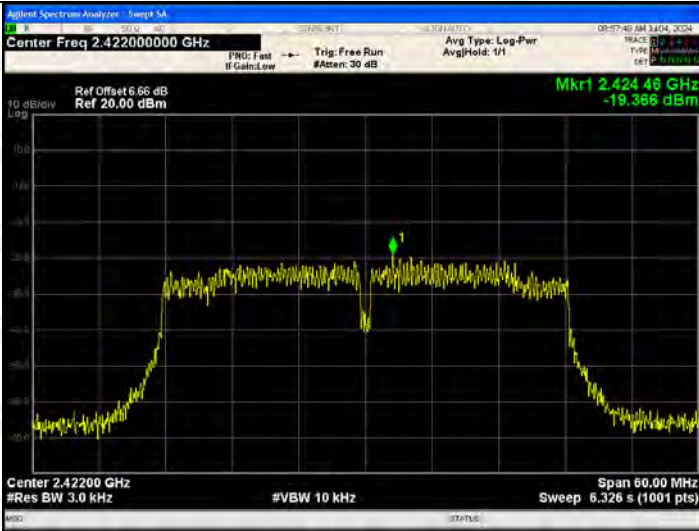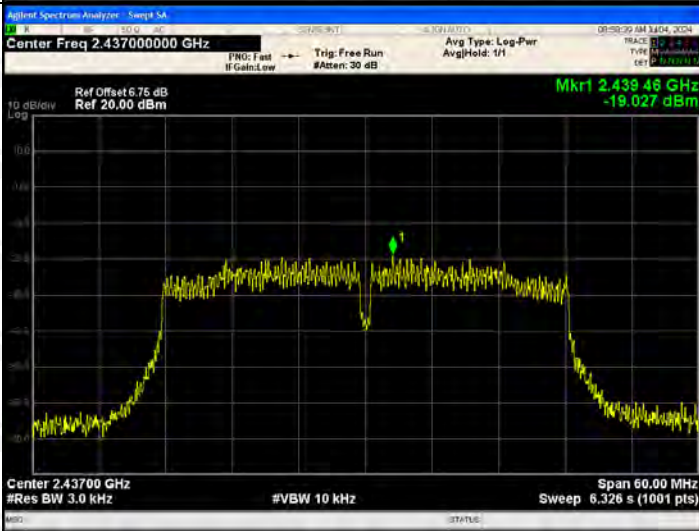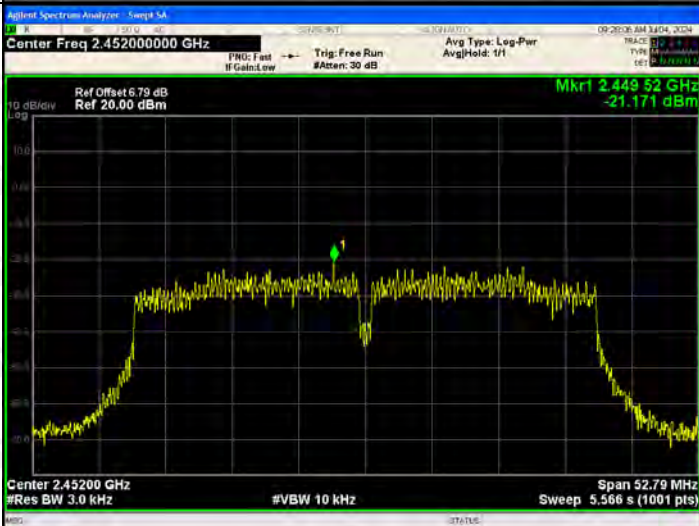802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.42446 GHz -19.386 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.43946 GHz -19.027 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.44952 GHz -21.171 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 52.79 MHz Sweep 5.566 s (1001 pts)

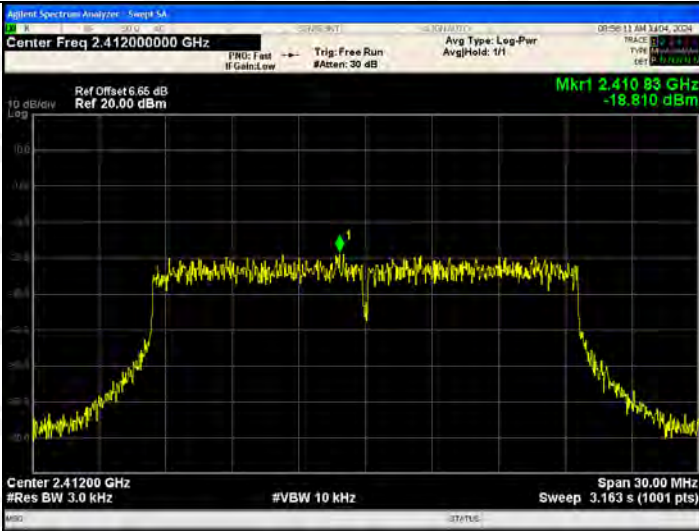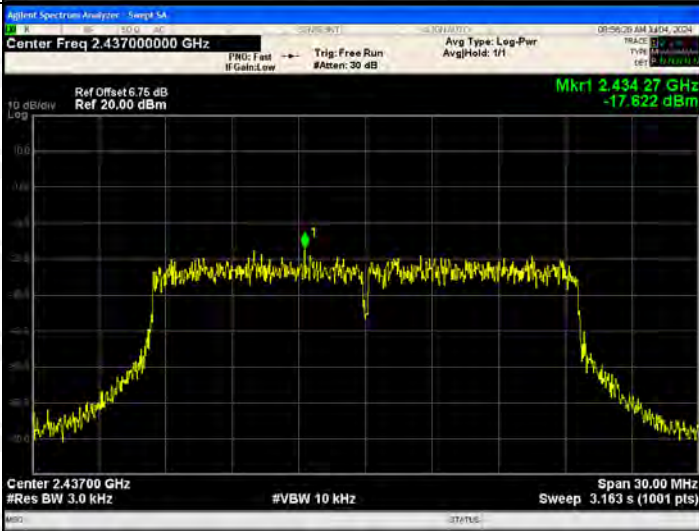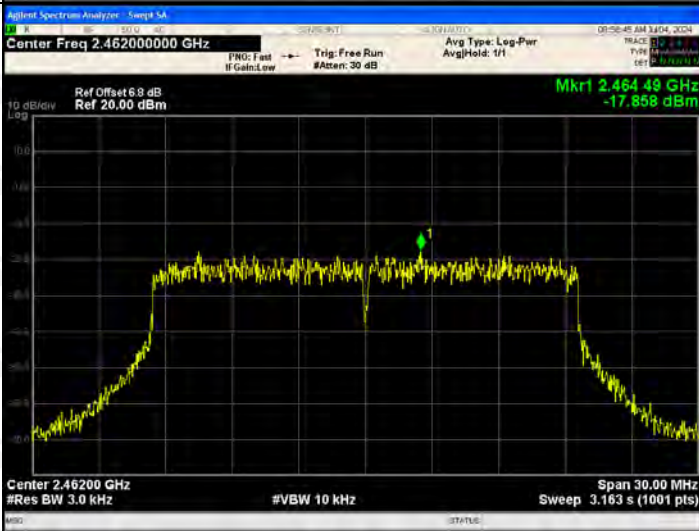
802.11ax(HT20)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.41200000 GHz Ref Offset 6.65 dB Ref 20.00 dBm Mkr1 2.410 83 GHz -18.810 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.434 27 GHz -17.622 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11ax(HT20)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.46200000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.464 49 GHz -17.858 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

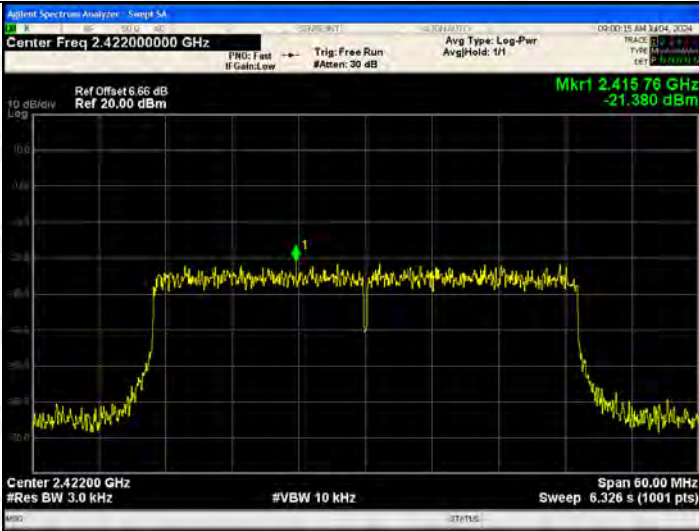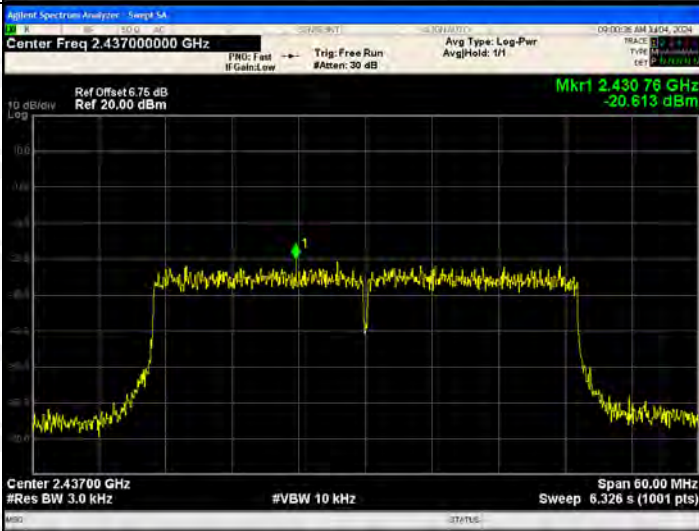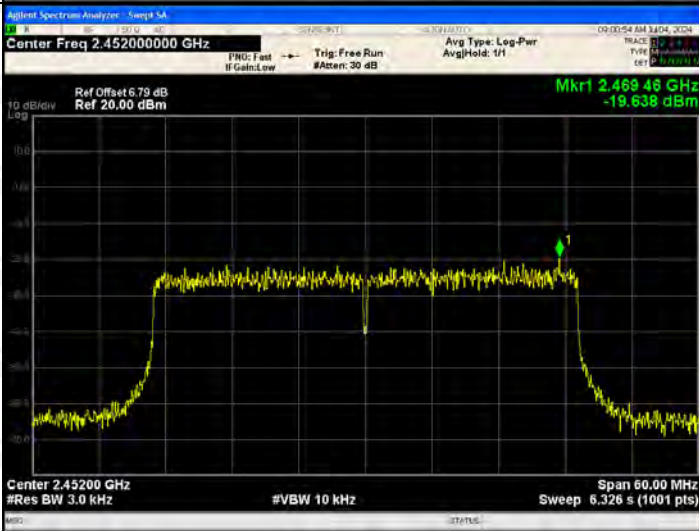802.11ax(HT40)/LC H	
802.11ax(HT40)/MC H	
802.11ax(HT40)/HC H	


ANT 2: Test Graph

Graphs

802.11b /LCH

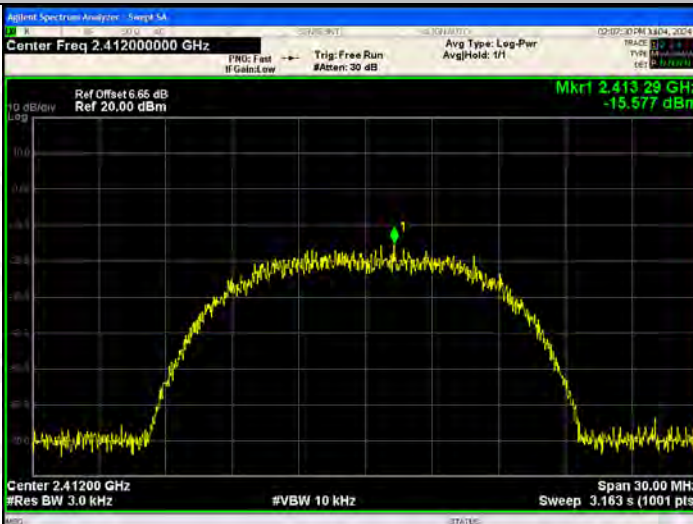


802.11b /MCH

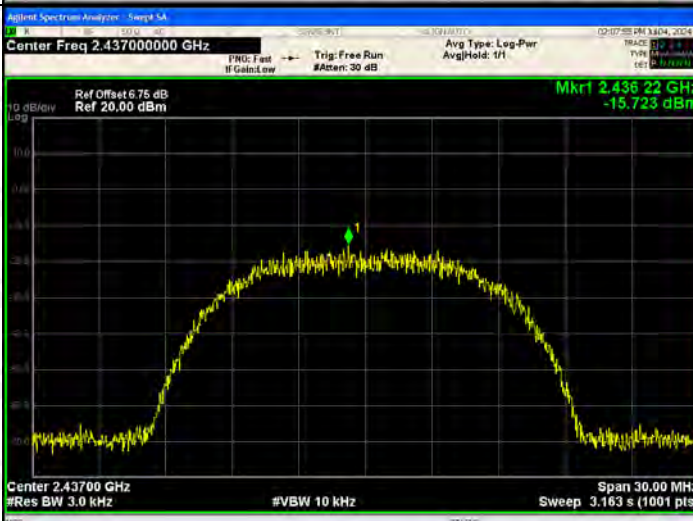

802.11b/HCH



802.11g/LCH


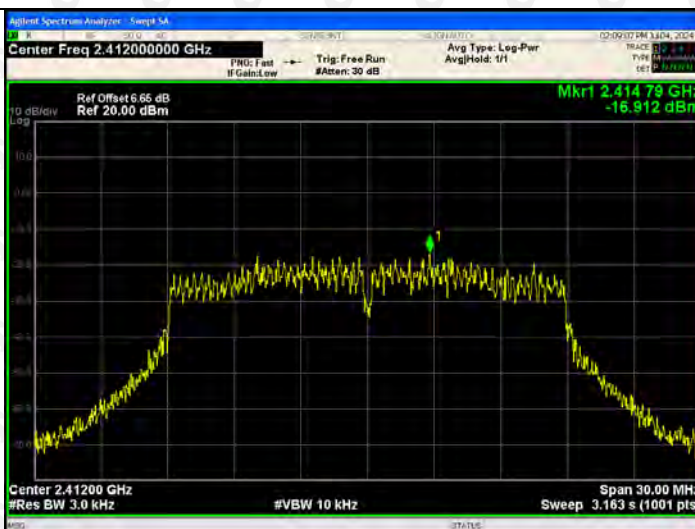



802.11g/MCH





802.11g/HCH

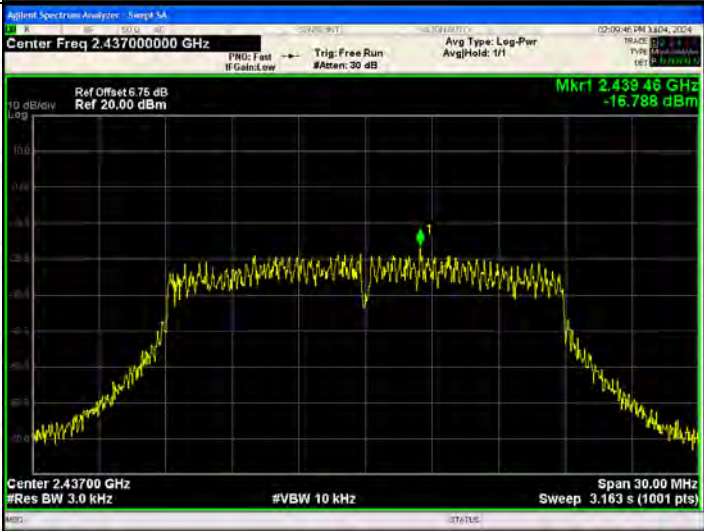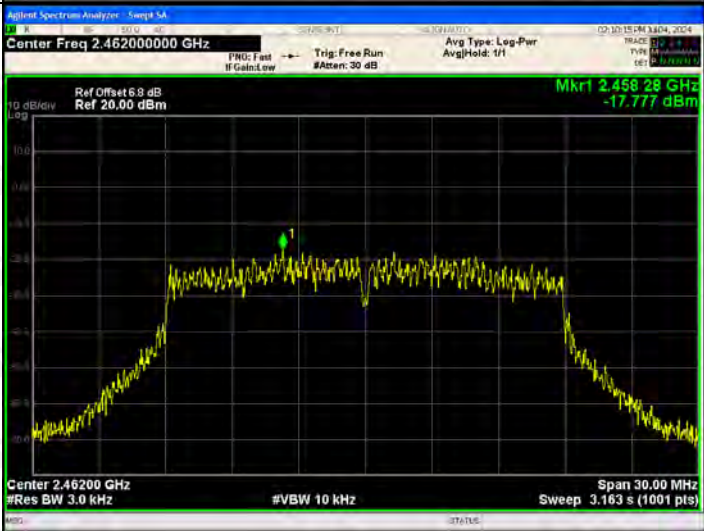

802.11n(HT20)/LCH	
802.11n(HT20)/MCH	
802.11n(HT20)/HCH	

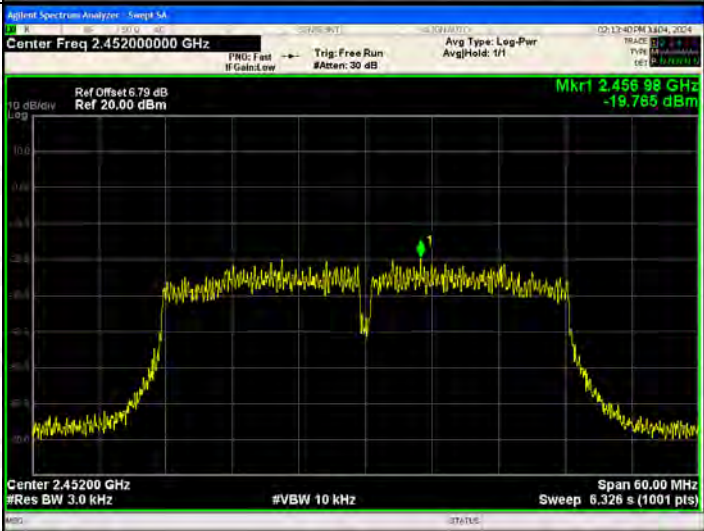802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.428 24 GHz -20.275 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.441 98 GHz -20.309 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.45200000 GHz Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.456 98 GHz -19.765 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

802.11ax(HT20)/LC H	
802.11ax(HT20)/MC H	
802.11ax(HT20)/HC H	

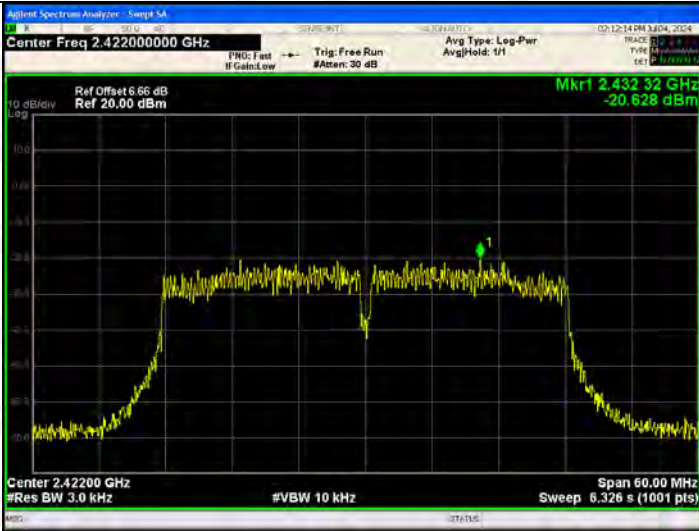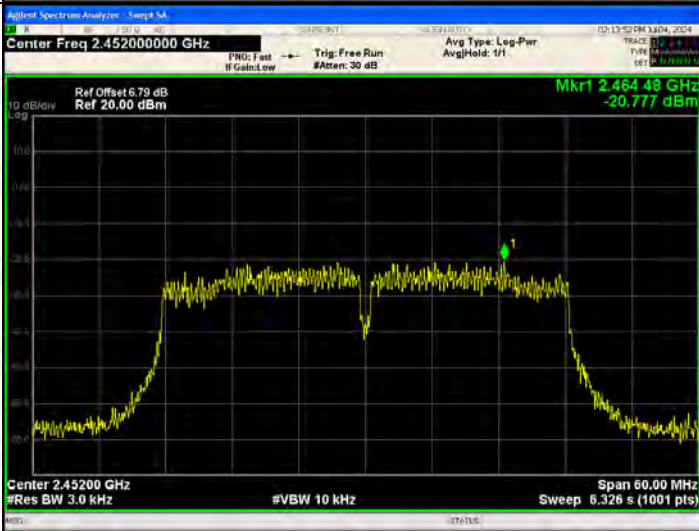802.11ax(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.42200000 GHz Ref Offset 6.66 dB Ref 20.00 dBm Mkr1 2.43232 GHz -20.628 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.43700000 GHz Ref Offset 6.75 dB Ref 20.00 dBm Mkr1 2.42950 GHz -18.813 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11ax(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.45200000 GHz Ref Offset 6.79 dB Ref 20.00 dBm Mkr1 2.46448 GHz -20.777 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:


The antenna is glue stick antenna and no consideration of replacement. The best case gain of the antenna is

Ant1: 3.58dBi, Ant2: 3.58dBi

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

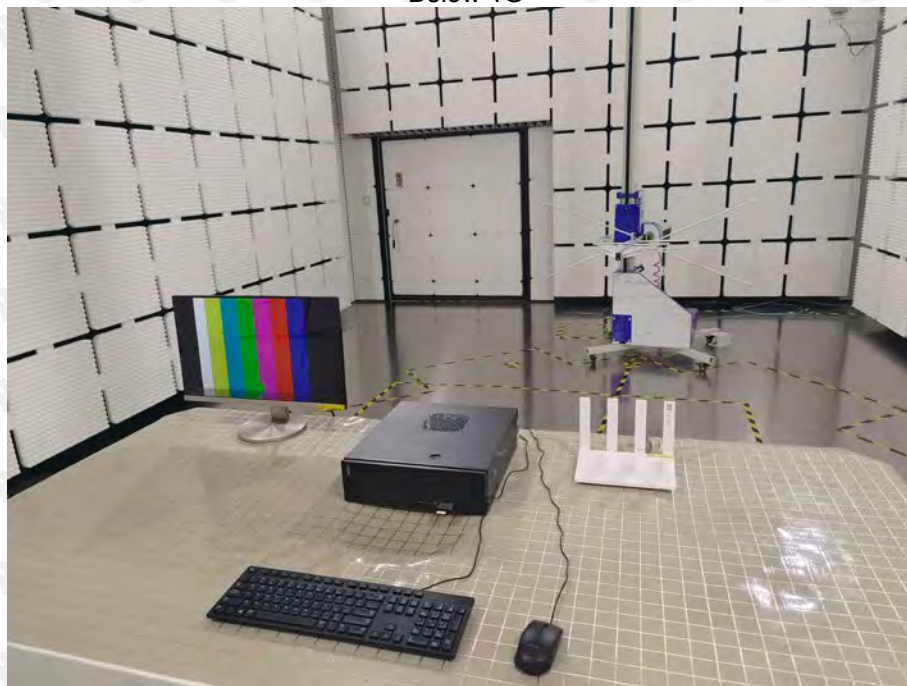

Above 1G



Conducted Emission



***** END OF REPORT *****