


Pepper the Penguin Wireless Speaker PRODUCT MANUAL

Dear User,
Thank you for purchasing Planet Buddies' Pepper the Penguin Wireless speaker. Before using it, please carefully read the information in this product manual and keep it in a safe place for future reference.

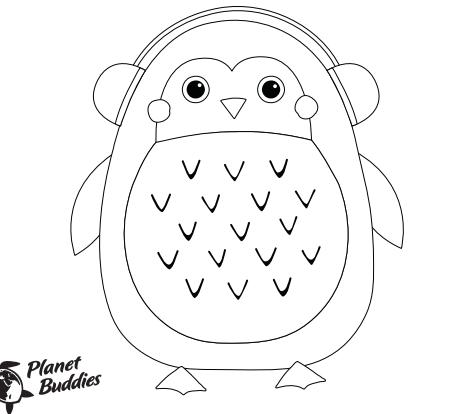

Planet Buddies

Functions & Features

1. Bluetooth 5.0 compatible with iOS and Android
2. Up to 4-hour total playtime (60-day standby time)
3. Full-range sound system with 3w output power
4. Built-in microphone
5. Multispeaker pairing for full surround-sound effect

Technical Specifications

1. Built-in rechargeable 400mAh Li-on battery
2. Output Power: 3W (RMS, THD=10%)
3. Power Input: USB DC 5V
4. Bluetooth Version: 5.0
5. Driver Unit: 40mm 4Ω
6. Frequency Response: 100Hz-20K Hz
7. S/N Ratio: ≥80db
8. Dimensions: L100xW84xH84mm
9. This is a REACH, FCC-ID, CE & RoHS certified product.

User Instructions

Power ON/OFF


To turn ON the wireless speaker, press and hold the power button until the blue LED indicator light flashes.

You will also hear a short sound to indicate the speaker is switched ON.
The speaker is automatically in wireless mode. To turn OFF the wireless speaker, press and hold the power button until the blue LED indicator light is switched off. A short sound will also play to indicate the speaker has been turned OFF. The speaker will automatically turn OFF if it is switched on and not paired to a device for more than five minutes.

Wireless Mode

Press and hold the power button until the blue LED indicator light flashes to turn ON the wireless speaker. The wireless speaker is automatically on Wireless Mode and is discoverable in Bluetooth search lists. Ensure that the wireless speaker is no more than 10 meters away from the device you want to pair. Use the Bluetooth search list on your device to find and select 'PB Penguin Speaker' to pair with the wireless speaker. To confirm you have paired the wireless speaker successfully with your device a short sound will play and the blue LED indicator light will stop flashing and become static. Once the wireless speaker has paired with your device, you can select audio files on your device to play directly

via the wireless speaker. Press the power button to PLAY or PAUSE the audio from the wireless speaker. If the pairing is disconnected, the blue LED indicator light will flash and a short sound will play to indicate the speaker has now been disconnected from the paired device and is discoverable in Bluetooth search lists again.

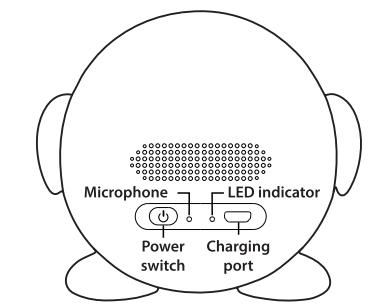

Charging

When the battery is running low, the wireless speaker will give a warning via a short sound and automatically go into Low Battery Mode. The wireless speaker will issue a total of three warnings to indicate the power is

running low. After the third low battery warning, the wireless speaker will automatically turn OFF until charged. To recharge the wireless speaker, insert the charger into the 5V port at the back of the wireless speaker and connect with a power source compatible with the USB charging cable (laptop, computer, or via mains plug adapter). To indicate that the wireless speaker is charging, the LED indicator light will show static red. The LED indicator light will switch off to indicate the wireless speaker is fully charged.

Multispeaker Pairing

If you have two Planet Buddies wireless speakers, you can use the multispeaker pairing function. Turn ON two wireless speakers and ensure they are not connected to any other Bluetooth devices; the blue LED indicator light will flash on both wireless speakers. Double press the power button on one of the speakers and wait for a few seconds. A short sound will play to indicate the two speakers have paired successfully, while one wireless speaker shows the blue LED indicator light static, the other wireless speaker shows the blue LED indicator light flashing.

Use the Bluetooth search list on your device to search for and select 'PB Penguin Speaker'. A short sound will play to indicate you have successfully paired your device with the wireless speakers. Once your device is connected, you can play audio via both wireless speakers for a full stereo effect. Ensure the two paired wireless speakers and your connected device are separated by no more than 10 meters at all times in order to maintain the Bluetooth connection. Double press the power button on one of the wireless speakers to turn OFF the multi-pairing function.

Hands-free Calls

Connect your wireless speaker with your mobile phone. When a call is incoming, press the power button on the wireless speaker to ANSWER the call. You will hear the caller through the wireless speaker and be able to respond using the wireless speaker's built-in microphone. Press the power button once more to END the call.

www.planetbuddies.com

Warranty

This product is covered under a 12 month limited warranty for product defects. This warranty does not cover products which have been:

- damaged by consumer;
- opened and/or altered in any way;
- subject to normal wear and tear.


If you are experiencing any issues with your product that you can not resolve using this user manual, please contact us at info@planetbuddies.co.uk, attaching proof of purchase, along with a photo of the defect.

Please read and keep all safety and use instructions.

Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

ATTENTION: THIS PRODUCT IS NOT A TOY. NOT SUITABLE FOR USE BY PERSONS UNDER 3 YEARS.



The crossed-out wheelie bin symbol means that the product must be disposed of separately in the European Union. These products must not be disposed of with unsorted household waste.



FCC ID: 2BK9A-PBWSSP

Regulatory Information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

IC Caution IC ID: 33083-PBWSSP



CAN ICES(B)/NMB(B)
HVIN: PBPGSP , PBOWSP

ISED Statement
English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:
(1) This device may not cause interference.
(2) This device must accept any interference, including interference that may cause undesired operation of the device.
The digital apparatus complies with Canadian CAN ICES-3(B)/NMB-3(B).
French: Cet appareil contient des émetteurs/récepteurs exemptes de licence qui sont conformes aux RSS exemptés d'Innovation, Sciences et Développement économique Canada.
L'exploitation est soumise aux deux conditions suivantes :
(1) Cet appareil ne doit pas provoquer d'interférences.
(2) Cet appareil doit accepter toutes interférences, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.
L'appareil n'est pas du tout conforme au standard canadien pour - 3 (b) / nmb - 3 (b).
This device meets the exemption from the routine evaluation limits in section 6.3 of RSS 102 and compliance with RSS 102 RF exposure, users can obtain Canadian information on RF exposure and compliance.
Cet appareil est conforme à l'exception des limites d'évaluation courante dans la section 6.3 du crr - 102 et conforme à avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs et la conformité.
This equipment complies with Canadian radiation exposure limits set forth for an uncontrolled environment.
Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.
The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with minimum distance 0mm between the radiator & your body.
L'appareil a été évalué pour répondre aux exigences générales d'exposition aux rf.
Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre corps.

This radio transmitter has been approved by Industry Canada to operate with the antenna types listed with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.
Le pr é sent é metteur radio a t é approuv é par Industrie Canada pour fonctionner avec les types d'antenne é num é r e s ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est sup é rieur au gain maximal indiqu é , sont strictement interdits pour l'exploitation de l' é metteur.

