




## -6dB Bandwidth NVNT ax40 5755MHz Ant3

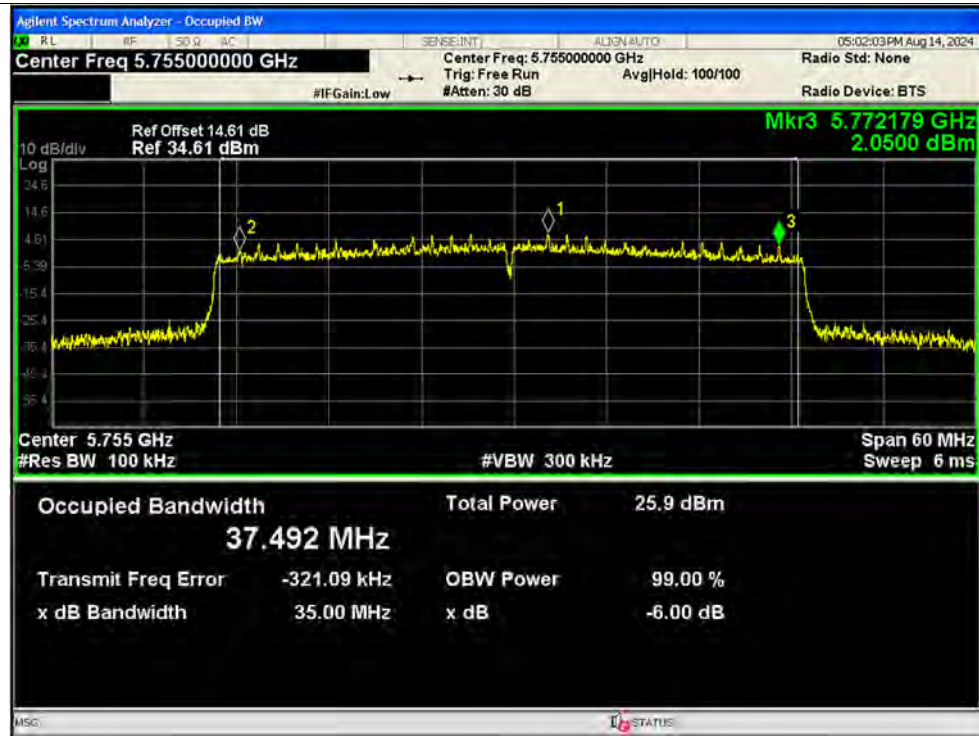


## -6dB Bandwidth NVNT ax40 5795MHz Ant3

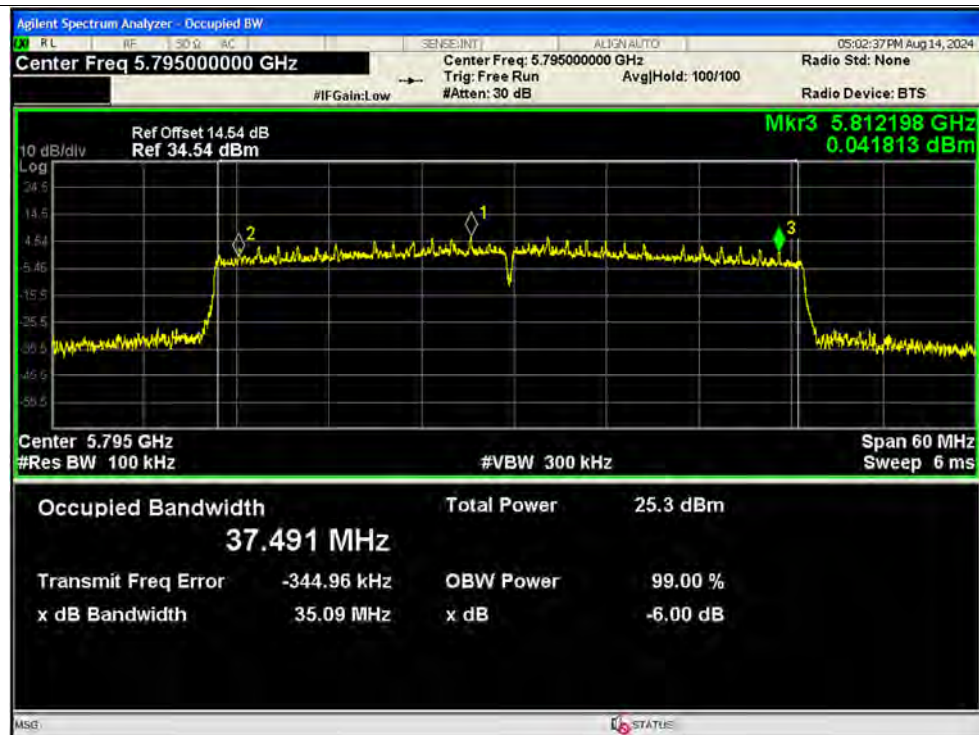

## -6dB Bandwidth NVNT ax40 5755MHz Ant4

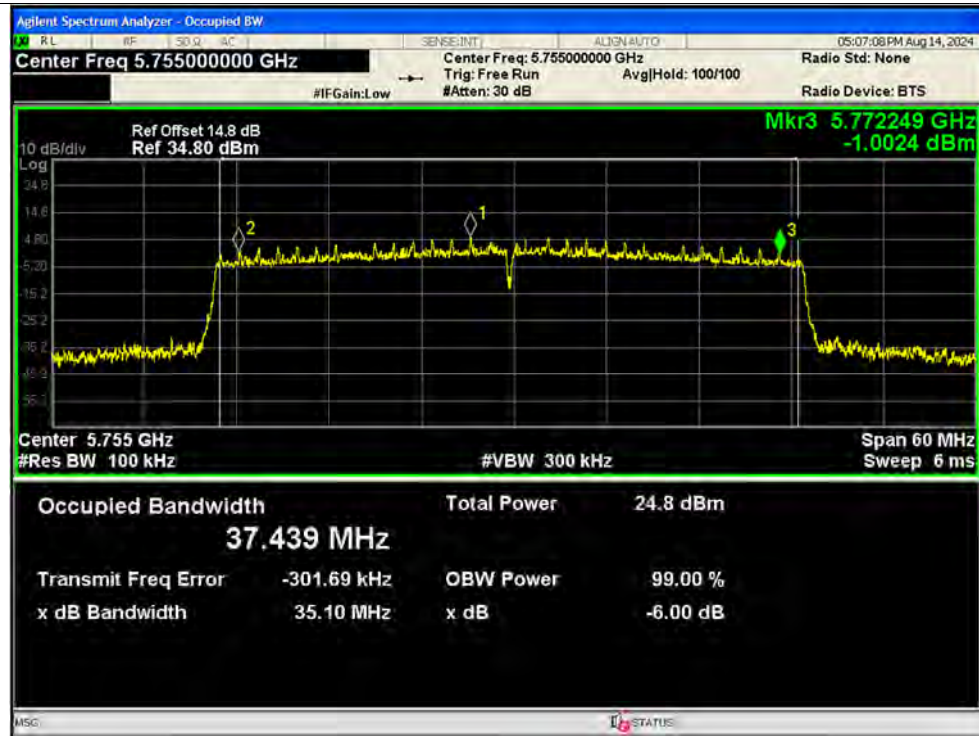


## -6dB Bandwidth NVNT ax40 5795MHz Ant4

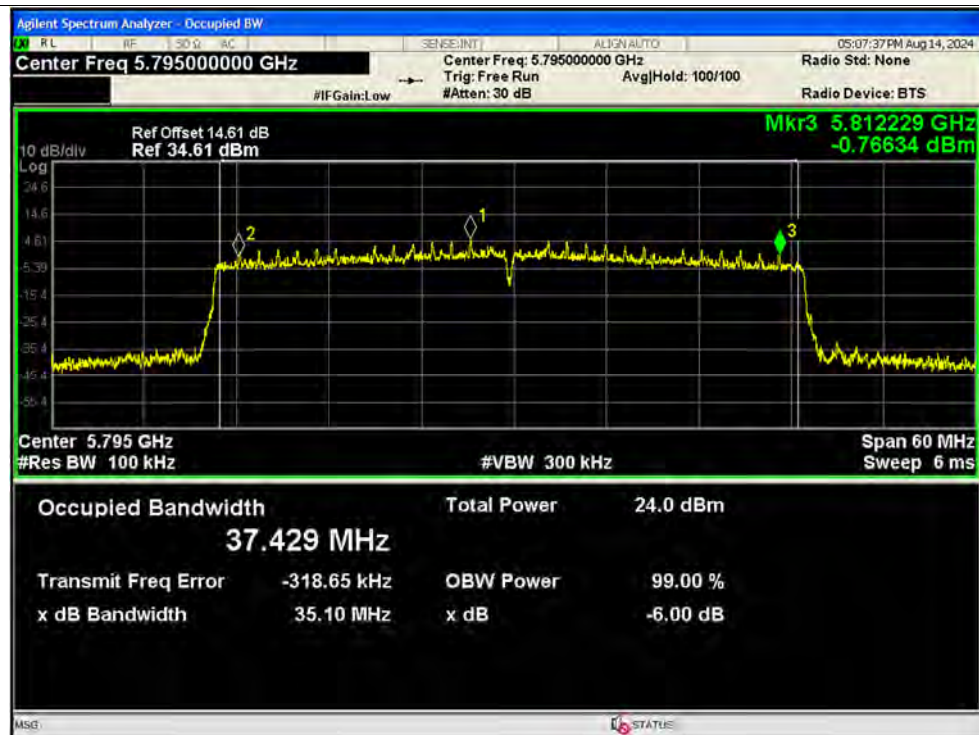

## -6dB Bandwidth NVNT ax80 5775MHz Ant1




## -6dB Bandwidth NVNT ax80 5775MHz Ant2

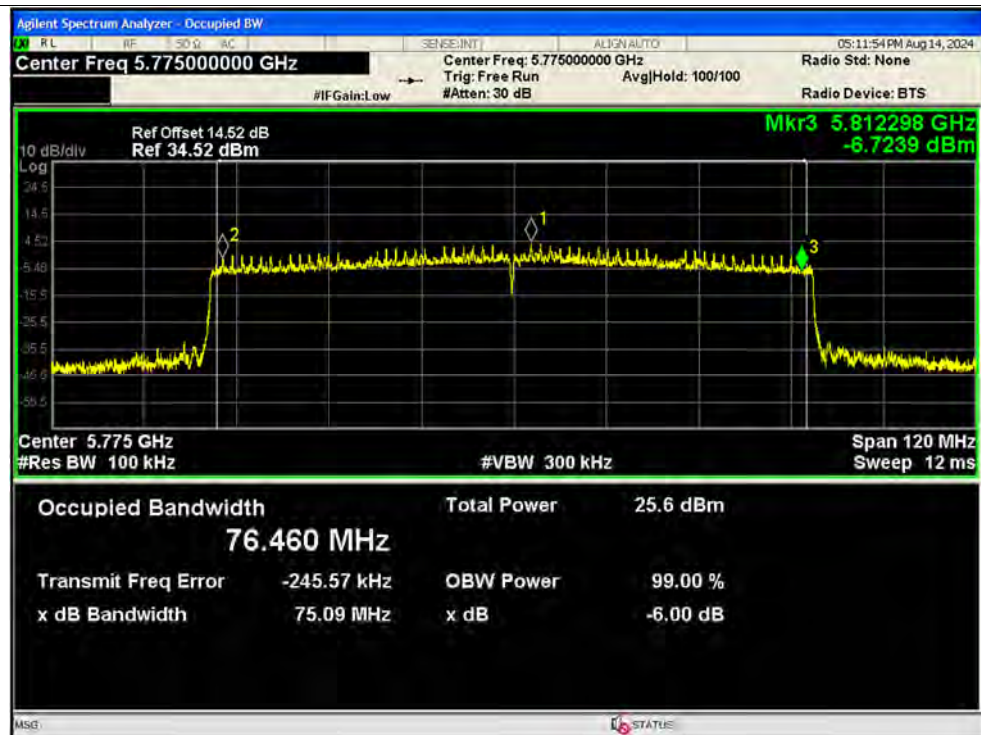




## -6dB Bandwidth NVNT ax80 5775MHz Ant3

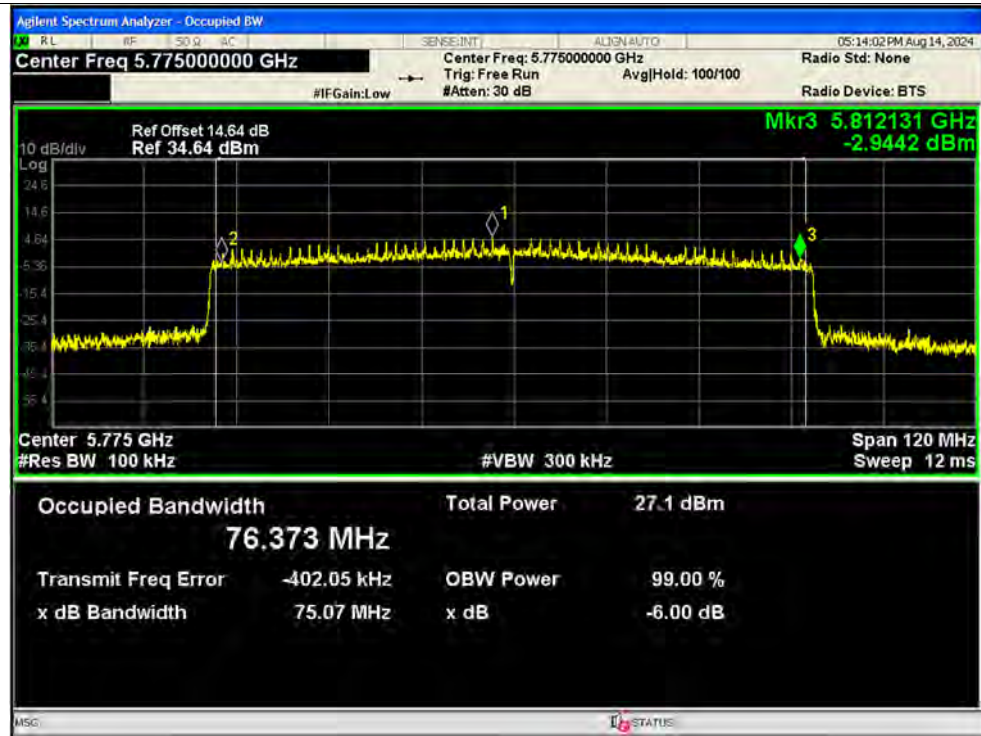

## -6dB Bandwidth NVNT ax80 5775MHz Ant4

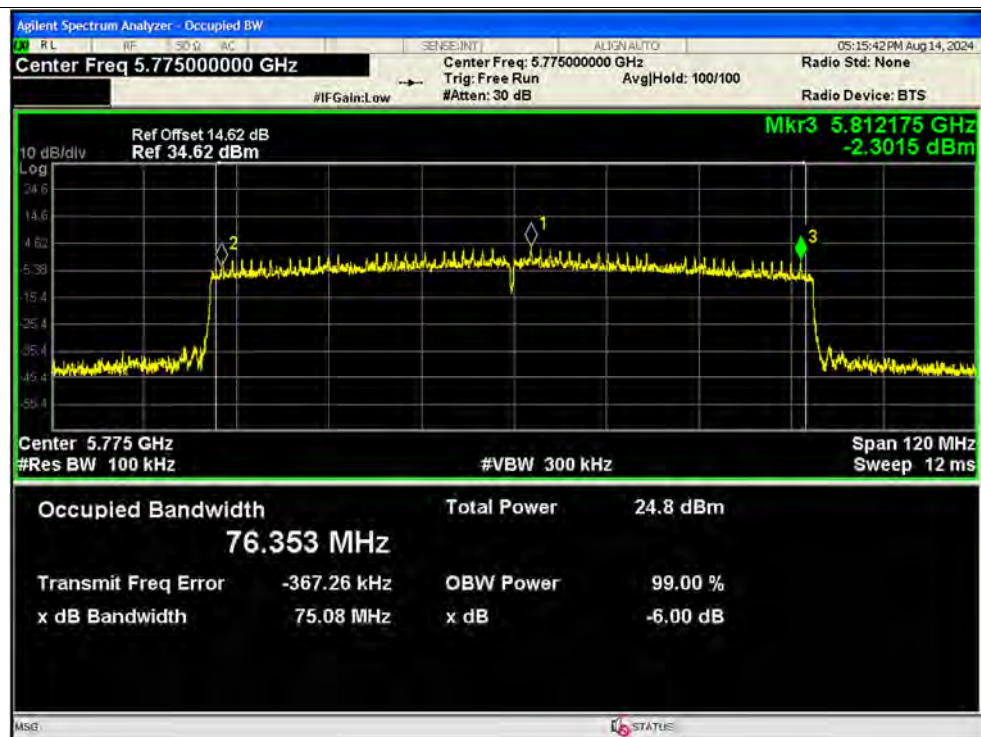

**A.4. Peak Power Spectral Density**

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/MHz) (dBm/500kHz @U-NII-3) | Duty Factor (dB) | Total Conducted PSD (dBm/MHz) (dBm/500kHz @ U-NII-3) | Limit (dBm/MHz) (dBm/500kHz @ U-NII-3) | Verdict |
|-----------|------|-----------------|---------|-----------------------------------------------|------------------|------------------------------------------------------|----------------------------------------|---------|
| NVNT      | a    | 5180            | Ant1    | 10.33                                         | 0.61             | 10.94                                                | 17                                     | Pass    |
| NVNT      | a    | 5220            | Ant1    | 10.58                                         | 0.18             | 10.76                                                | 17                                     | Pass    |
| NVNT      | a    | 5240            | Ant1    | 9.71                                          | 0.18             | 9.89                                                 | 17                                     | Pass    |
| NVNT      | a    | 5180            | Ant2    | 12.93                                         | 0.15             | 13.08                                                | 17                                     | Pass    |
| NVNT      | a    | 5220            | Ant2    | 12.04                                         | 0.18             | 12.22                                                | 17                                     | Pass    |
| NVNT      | a    | 5240            | Ant2    | 11.37                                         | 0.18             | 11.55                                                | 17                                     | Pass    |
| NVNT      | a    | 5180            | Ant3    | 11.15                                         | 0.15             | 11.3                                                 | 17                                     | Pass    |
| NVNT      | a    | 5220            | Ant3    | 10                                            | 0.18             | 10.18                                                | 17                                     | Pass    |
| NVNT      | a    | 5240            | Ant3    | 9.29                                          | 0.18             | 9.47                                                 | 17                                     | Pass    |
| NVNT      | a    | 5180            | Ant4    | 12.36                                         | 0.18             | 12.54                                                | 17                                     | Pass    |
| NVNT      | a    | 5220            | Ant4    | 11.54                                         | 0.15             | 11.69                                                | 17                                     | Pass    |
| NVNT      | a    | 5240            | Ant4    | 10.93                                         | 0.18             | 11.11                                                | 17                                     | Pass    |
| NVNT      | a    | 5745            | Ant1    | 11.76                                         | 0.18             | 11.94                                                | 30                                     | Pass    |
| NVNT      | a    | 5785            | Ant1    | 10.49                                         | 0.15             | 10.64                                                | 30                                     | Pass    |
| NVNT      | a    | 5825            | Ant1    | 10.12                                         | 0.18             | 10.3                                                 | 30                                     | Pass    |
| NVNT      | a    | 5745            | Ant2    | 10.48                                         | 0.18             | 10.66                                                | 30                                     | Pass    |
| NVNT      | a    | 5785            | Ant2    | 10.53                                         | 0.15             | 10.68                                                | 30                                     | Pass    |
| NVNT      | a    | 5825            | Ant2    | 10.86                                         | 0.18             | 11.04                                                | 30                                     | Pass    |
| NVNT      | a    | 5745            | Ant3    | 11.13                                         | 0.18             | 11.31                                                | 30                                     | Pass    |
| NVNT      | a    | 5785            | Ant3    | 11.58                                         | 0.15             | 11.73                                                | 30                                     | Pass    |
| NVNT      | a    | 5825            | Ant3    | 11.87                                         | 0.15             | 12.02                                                | 30                                     | Pass    |
| NVNT      | a    | 5745            | Ant4    | 10.66                                         | 0.18             | 10.84                                                | 30                                     | Pass    |
| NVNT      | a    | 5785            | Ant4    | 11.32                                         | 0.18             | 11.5                                                 | 30                                     | Pass    |
| NVNT      | a    | 5825            | Ant4    | 11.36                                         | 0.18             | 11.54                                                | 30                                     | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 11.02                                         | 0.16             | 11.18                                                | 17                                     | Pass    |
| NVNT      | n20  | 5220            | Ant1    | 10.1                                          | 0.2              | 10.3                                                 | 17                                     | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 9.16                                          | 0.16             | 9.32                                                 | 17                                     | Pass    |
| NVNT      | n20  | 5180            | Ant2    | 12.25                                         | 0.19             | 12.44                                                | 17                                     | Pass    |
| NVNT      | n20  | 5220            | Ant2    | 11.32                                         | 0.19             | 11.51                                                | 17                                     | Pass    |
| NVNT      | n20  | 5240            | Ant2    | 10.74                                         | 0.16             | 10.9                                                 | 17                                     | Pass    |
| NVNT      | n20  | 5180            | Ant3    | 10.6                                          | 0.19             | 10.79                                                | 17                                     | Pass    |



|      |     |      |      |       |      |       |       |      |
|------|-----|------|------|-------|------|-------|-------|------|
| NVNT | n20 | 5220 | Ant3 | 9.34  | 0.19 | 9.53  | 17    | Pass |
| NVNT | n20 | 5240 | Ant3 | 8.64  | 0.19 | 8.83  | 17    | Pass |
| NVNT | n20 | 5180 | Ant4 | 11.13 | 0.19 | 11.32 | 17    | Pass |
| NVNT | n20 | 5220 | Ant4 | 10.51 | 0.2  | 10.71 | 17    | Pass |
| NVNT | n20 | 5240 | Ant4 | 10.17 | 0.19 | 10.36 | 17    | Pass |
| NVNT | n20 | 5180 | Ant1 | 2.73  | 0.16 | 2.89  | 17    | Pass |
| NVNT | n20 | 5180 | Ant2 | 3.62  | 0.16 | 3.78  | 17    | Pass |
| NVNT | n20 | 5180 | Ant3 | 2.98  | 0.16 | 3.14  | 17    | Pass |
| NVNT | n20 | 5180 | Ant4 | 3.59  | 0.16 | 3.75  | 17    | Pass |
| NVNT | n20 | 5180 | Sum  | NaN   | NaN  | 9.43  | 14.51 | Pass |
| NVNT | n20 | 5220 | Ant1 | 1.78  | 0.2  | 1.98  | 17    | Pass |
| NVNT | n20 | 5220 | Ant2 | 2.61  | 0.2  | 2.81  | 17    | Pass |
| NVNT | n20 | 5220 | Ant3 | 2.04  | 0.2  | 2.24  | 17    | Pass |
| NVNT | n20 | 5220 | Ant4 | 3.18  | 0.2  | 3.38  | 17    | Pass |
| NVNT | n20 | 5220 | Sum  | NaN   | NaN  | 8.66  | 14.51 | Pass |
| NVNT | n20 | 5240 | Ant1 | 0.63  | 0.2  | 0.83  | 17    | Pass |
| NVNT | n20 | 5240 | Ant2 | 1.72  | 0.2  | 1.92  | 17    | Pass |
| NVNT | n20 | 5240 | Ant3 | 0.87  | 0.2  | 1.07  | 17    | Pass |
| NVNT | n20 | 5240 | Ant4 | 2.45  | 0.2  | 2.65  | 17    | Pass |
| NVNT | n20 | 5240 | Sum  | NaN   | NaN  | 7.69  | 14.51 | Pass |
| NVNT | n20 | 5745 | Ant1 | 7.89  | 0.19 | 8.08  | 30    | Pass |
| NVNT | n20 | 5785 | Ant1 | 7     | 0.19 | 7.19  | 30    | Pass |
| NVNT | n20 | 5825 | Ant1 | 6.78  | 0.19 | 6.97  | 30    | Pass |
| NVNT | n20 | 5745 | Ant2 | 7.51  | 0.2  | 7.71  | 30    | Pass |
| NVNT | n20 | 5785 | Ant2 | 7.57  | 0.2  | 7.77  | 30    | Pass |
| NVNT | n20 | 5825 | Ant2 | 8.13  | 0.19 | 8.32  | 30    | Pass |
| NVNT | n20 | 5745 | Ant3 | 7.37  | 0.19 | 7.56  | 30    | Pass |
| NVNT | n20 | 5785 | Ant3 | 7.59  | 0.2  | 7.79  | 30    | Pass |
| NVNT | n20 | 5825 | Ant3 | 8.1   | 0.2  | 8.3   | 30    | Pass |
| NVNT | n20 | 5745 | Ant4 | 7.34  | 0.2  | 7.54  | 30    | Pass |
| NVNT | n20 | 5785 | Ant4 | 7.38  | 0.16 | 7.54  | 30    | Pass |
| NVNT | n20 | 5825 | Ant4 | 7.37  | 0.19 | 7.56  | 30    | Pass |
| NVNT | n20 | 5745 | Ant1 | 2.65  | 0.19 | 2.84  | 30    | Pass |
| NVNT | n20 | 5745 | Ant2 | 1.23  | 0.19 | 1.42  | 30    | Pass |
| NVNT | n20 | 5745 | Ant3 | 0.88  | 0.19 | 1.07  | 30    | Pass |
| NVNT | n20 | 5745 | Ant4 | 2.3   | 0.19 | 2.49  | 30    | Pass |
| NVNT | n20 | 5745 | Sum  | NaN   | NaN  | 8.03  | 28.92 | Pass |
| NVNT | n20 | 5785 | Ant1 | 1.26  | 0.16 | 1.42  | 30    | Pass |



|      |     |      |      |       |      |       |       |      |
|------|-----|------|------|-------|------|-------|-------|------|
| NVNT | n20 | 5785 | Ant2 | 0.94  | 0.16 | 1.1   | 30    | Pass |
| NVNT | n20 | 5785 | Ant3 | 0.44  | 0.16 | 0.6   | 30    | Pass |
| NVNT | n20 | 5785 | Ant4 | 2.58  | 0.16 | 2.74  | 30    | Pass |
| NVNT | n20 | 5785 | Sum  | NaN   | NaN  | 7.56  | 28.92 | Pass |
| NVNT | n20 | 5825 | Ant1 | 1.35  | 0.2  | 1.55  | 30    | Pass |
| NVNT | n20 | 5825 | Ant2 | 1.5   | 0.2  | 1.7   | 30    | Pass |
| NVNT | n20 | 5825 | Ant3 | 1.42  | 0.2  | 1.62  | 30    | Pass |
| NVNT | n20 | 5825 | Ant4 | 2.89  | 0.2  | 3.09  | 30    | Pass |
| NVNT | n20 | 5825 | Sum  | NaN   | NaN  | 8.06  | 28.92 | Pass |
| NVNT | n40 | 5190 | Ant1 | 6.69  | 0.38 | 7.07  | 17    | Pass |
| NVNT | n40 | 5230 | Ant1 | 5.79  | 0.38 | 6.17  | 17    | Pass |
| NVNT | n40 | 5190 | Ant2 | 5.86  | 0.2  | 6.06  | 17    | Pass |
| NVNT | n40 | 5230 | Ant2 | 5.16  | 0.2  | 5.36  | 17    | Pass |
| NVNT | n40 | 5190 | Ant3 | 6.76  | 0.2  | 6.96  | 17    | Pass |
| NVNT | n40 | 5230 | Ant3 | 6     | 0.32 | 6.32  | 17    | Pass |
| NVNT | n40 | 5190 | Ant4 | 6.42  | 0.16 | 6.58  | 17    | Pass |
| NVNT | n40 | 5230 | Ant4 | 6.08  | 0.18 | 6.26  | 17    | Pass |
| NVNT | n40 | 5190 | Ant1 | 0.77  | 0.32 | 1.09  | 17    | Pass |
| NVNT | n40 | 5190 | Ant2 | 1.98  | 0.32 | 2.3   | 17    | Pass |
| NVNT | n40 | 5190 | Ant3 | 1.12  | 0.32 | 1.44  | 17    | Pass |
| NVNT | n40 | 5190 | Ant4 | 2.17  | 0.32 | 2.49  | 17    | Pass |
| NVNT | n40 | 5190 | Sum  | NaN   | NaN  | 7.89  | 14.51 | Pass |
| NVNT | n40 | 5230 | Ant1 | 0.09  | 0.38 | 0.47  | 17    | Pass |
| NVNT | n40 | 5230 | Ant2 | 1.04  | 0.38 | 1.42  | 17    | Pass |
| NVNT | n40 | 5230 | Ant3 | -0.23 | 0.38 | 0.15  | 17    | Pass |
| NVNT | n40 | 5230 | Ant4 | 1.8   | 0.38 | 2.18  | 17    | Pass |
| NVNT | n40 | 5230 | Sum  | NaN   | NaN  | 7.15  | 14.51 | Pass |
| NVNT | n40 | 5755 | Ant1 | 4.6   | 0.39 | 4.99  | 30    | Pass |
| NVNT | n40 | 5795 | Ant1 | 3.76  | 0.39 | 4.15  | 30    | Pass |
| NVNT | n40 | 5755 | Ant2 | 4.02  | 0.39 | 4.41  | 30    | Pass |
| NVNT | n40 | 5795 | Ant2 | 4.31  | 0.38 | 4.68  | 30    | Pass |
| NVNT | n40 | 5755 | Ant3 | 5.09  | 0.38 | 5.47  | 30    | Pass |
| NVNT | n40 | 5795 | Ant3 | 4.88  | 0.38 | 5.26  | 30    | Pass |
| NVNT | n40 | 5755 | Ant4 | 4.43  | 0.38 | 4.81  | 30    | Pass |
| NVNT | n40 | 5795 | Ant4 | 4.37  | 0.38 | 4.75  | 30    | Pass |
| NVNT | n40 | 5755 | Ant1 | -0.92 | 0.39 | -0.53 | 30    | Pass |
| NVNT | n40 | 5755 | Ant2 | -2.33 | 0.39 | -1.94 | 30    | Pass |
| NVNT | n40 | 5755 | Ant3 | -1.91 | 0.39 | -1.52 | 30    | Pass |



|      |      |      |      |       |      |       |       |      |
|------|------|------|------|-------|------|-------|-------|------|
| NVNT | n40  | 5755 | Ant4 | -0.05 | 0.39 | 0.34  | 30    | Pass |
| NVNT | n40  | 5755 | Sum  | NaN   | NaN  | 5.2   | 28.92 | Pass |
| NVNT | n40  | 5795 | Ant1 | -1.35 | 0.32 | -1.03 | 30    | Pass |
| NVNT | n40  | 5795 | Ant2 | -1.8  | 0.32 | -1.48 | 30    | Pass |
| NVNT | n40  | 5795 | Ant3 | -2    | 0.32 | -1.68 | 30    | Pass |
| NVNT | n40  | 5795 | Ant4 | -0.5  | 0.32 | -0.18 | 30    | Pass |
| NVNT | n40  | 5795 | Sum  | NaN   | NaN  | 4.97  | 28.92 | Pass |
| NVNT | ac20 | 5180 | Ant1 | 11.08 | 0.65 | 11.73 | 17    | Pass |
| NVNT | ac20 | 5220 | Ant1 | 10.11 | 0.65 | 10.76 | 17    | Pass |
| NVNT | ac20 | 5240 | Ant1 | 9.32  | 0.65 | 9.97  | 17    | Pass |
| NVNT | ac20 | 5180 | Ant2 | 11.66 | 0.65 | 12.31 | 17    | Pass |
| NVNT | ac20 | 5220 | Ant2 | 10.7  | 0.55 | 11.25 | 17    | Pass |
| NVNT | ac20 | 5240 | Ant2 | 9.91  | 0.65 | 10.56 | 17    | Pass |
| NVNT | ac20 | 5180 | Ant3 | 10.11 | 0.54 | 10.65 | 17    | Pass |
| NVNT | ac20 | 5220 | Ant3 | 8.59  | 0.65 | 9.24  | 17    | Pass |
| NVNT | ac20 | 5240 | Ant3 | 7.94  | 0.54 | 8.48  | 17    | Pass |
| NVNT | ac20 | 5180 | Ant4 | 9.69  | 0.65 | 10.34 | 17    | Pass |
| NVNT | ac20 | 5220 | Ant4 | 8.29  | 0.65 | 8.94  | 17    | Pass |
| NVNT | ac20 | 5240 | Ant4 | 7.91  | 0.54 | 8.45  | 17    | Pass |
| NVNT | ac20 | 5180 | Ant1 | 3.1   | 0.65 | 3.75  | 17    | Pass |
| NVNT | ac20 | 5180 | Ant2 | 3.94  | 0.65 | 4.59  | 17    | Pass |
| NVNT | ac20 | 5180 | Ant3 | 3.31  | 0.65 | 3.96  | 17    | Pass |
| NVNT | ac20 | 5180 | Ant4 | 4.44  | 0.65 | 5.09  | 17    | Pass |
| NVNT | ac20 | 5180 | Sum  | NaN   | NaN  | 10.4  | 14.51 | Pass |
| NVNT | ac20 | 5220 | Ant1 | 2.17  | 0.65 | 2.83  | 17    | Pass |
| NVNT | ac20 | 5220 | Ant2 | 3.27  | 0.65 | 3.92  | 17    | Pass |
| NVNT | ac20 | 5220 | Ant3 | 2.25  | 0.65 | 2.9   | 17    | Pass |
| NVNT | ac20 | 5220 | Ant4 | 3.96  | 0.65 | 4.61  | 17    | Pass |
| NVNT | ac20 | 5220 | Sum  | NaN   | NaN  | 9.65  | 14.51 | Pass |
| NVNT | ac20 | 5240 | Ant1 | 1.35  | 0.54 | 1.89  | 17    | Pass |
| NVNT | ac20 | 5240 | Ant2 | 2.3   | 0.54 | 2.84  | 17    | Pass |
| NVNT | ac20 | 5240 | Ant3 | 1.07  | 0.54 | 1.61  | 17    | Pass |
| NVNT | ac20 | 5240 | Ant4 | 3.21  | 0.54 | 3.75  | 17    | Pass |
| NVNT | ac20 | 5240 | Sum  | NaN   | NaN  | 8.63  | 14.51 | Pass |
| NVNT | ac20 | 5745 | Ant1 | 7.81  | 0.65 | 8.46  | 30    | Pass |
| NVNT | ac20 | 5785 | Ant1 | 7.02  | 0.65 | 7.67  | 30    | Pass |
| NVNT | ac20 | 5825 | Ant1 | 6.73  | 0.54 | 7.27  | 30    | Pass |
| NVNT | ac20 | 5745 | Ant2 | 6.66  | 0.54 | 7.2   | 30    | Pass |



|      |      |      |      |       |      |      |       |      |
|------|------|------|------|-------|------|------|-------|------|
| NVNT | ac20 | 5785 | Ant2 | 6.73  | 0.65 | 7.38 | 30    | Pass |
| NVNT | ac20 | 5825 | Ant2 | 7.09  | 0.65 | 7.74 | 30    | Pass |
| NVNT | ac20 | 5745 | Ant3 | 7.12  | 0.54 | 7.66 | 30    | Pass |
| NVNT | ac20 | 5785 | Ant3 | 6.82  | 0.65 | 7.47 | 30    | Pass |
| NVNT | ac20 | 5825 | Ant3 | 7.04  | 0.54 | 7.58 | 30    | Pass |
| NVNT | ac20 | 5745 | Ant4 | 5.48  | 0.65 | 6.13 | 30    | Pass |
| NVNT | ac20 | 5785 | Ant4 | 5.2   | 0.65 | 5.85 | 30    | Pass |
| NVNT | ac20 | 5825 | Ant4 | 5.27  | 0.64 | 5.91 | 30    | Pass |
| NVNT | ac20 | 5745 | Ant1 | 1.37  | 0.65 | 2.02 | 30    | Pass |
| NVNT | ac20 | 5745 | Ant2 | -0.24 | 0.65 | 0.41 | 30    | Pass |
| NVNT | ac20 | 5745 | Ant3 | -0.09 | 0.65 | 0.56 | 30    | Pass |
| NVNT | ac20 | 5745 | Ant4 | 1.71  | 0.65 | 2.36 | 30    | Pass |
| NVNT | ac20 | 5745 | Sum  | NaN   | NaN  | 7.44 | 28.92 | Pass |
| NVNT | ac20 | 5785 | Ant1 | 0.55  | 0.65 | 1.2  | 30    | Pass |
| NVNT | ac20 | 5785 | Ant2 | -0.13 | 0.65 | 0.53 | 30    | Pass |
| NVNT | ac20 | 5785 | Ant3 | -0.26 | 0.65 | 0.39 | 30    | Pass |
| NVNT | ac20 | 5785 | Ant4 | 1.75  | 0.65 | 2.4  | 30    | Pass |
| NVNT | ac20 | 5785 | Sum  | NaN   | NaN  | 7.23 | 28.92 | Pass |
| NVNT | ac20 | 5825 | Ant1 | 0.4   | 0.65 | 1.05 | 30    | Pass |
| NVNT | ac20 | 5825 | Ant2 | 0.53  | 0.65 | 1.18 | 30    | Pass |
| NVNT | ac20 | 5825 | Ant3 | 0.56  | 0.65 | 1.21 | 30    | Pass |
| NVNT | ac20 | 5825 | Ant4 | 2.11  | 0.65 | 2.76 | 30    | Pass |
| NVNT | ac20 | 5825 | Sum  | NaN   | NaN  | 7.63 | 28.92 | Pass |
| NVNT | ac40 | 5190 | Ant1 | 6.74  | 0.93 | 7.67 | 17    | Pass |
| NVNT | ac40 | 5230 | Ant1 | 5.73  | 1.14 | 6.87 | 17    | Pass |
| NVNT | ac40 | 5190 | Ant2 | 6     | 1.09 | 7.09 | 17    | Pass |
| NVNT | ac40 | 5230 | Ant2 | 4.81  | 0.93 | 5.74 | 17    | Pass |
| NVNT | ac40 | 5190 | Ant3 | 6.58  | 0.56 | 7.14 | 17    | Pass |
| NVNT | ac40 | 5230 | Ant3 | 5.37  | 0.67 | 6.04 | 17    | Pass |
| NVNT | ac40 | 5190 | Ant4 | 6.53  | 1.09 | 7.62 | 17    | Pass |
| NVNT | ac40 | 5230 | Ant4 | 5.85  | 1.09 | 6.94 | 17    | Pass |
| NVNT | ac40 | 5190 | Ant1 | -0.15 | 1.09 | 0.94 | 17    | Pass |
| NVNT | ac40 | 5190 | Ant2 | 0.98  | 1.09 | 2.07 | 17    | Pass |
| NVNT | ac40 | 5190 | Ant3 | 0.54  | 1.09 | 1.63 | 17    | Pass |
| NVNT | ac40 | 5190 | Ant4 | 1.41  | 1.09 | 2.5  | 17    | Pass |
| NVNT | ac40 | 5190 | Sum  | NaN   | NaN  | 7.85 | 14.51 | Pass |
| NVNT | ac40 | 5230 | Ant1 | -0.93 | 1.09 | 0.16 | 17    | Pass |
| NVNT | ac40 | 5230 | Ant2 | 0.41  | 1.09 | 1.5  | 17    | Pass |



|      |      |      |      |       |      |       |       |      |
|------|------|------|------|-------|------|-------|-------|------|
| NVNT | ac40 | 5230 | Ant3 | -0.89 | 1.09 | 0.2   | 17    | Pass |
| NVNT | ac40 | 5230 | Ant4 | 1.22  | 1.09 | 2.31  | 17    | Pass |
| NVNT | ac40 | 5230 | Sum  | NaN   | NaN  | 7.16  | 14.51 | Pass |
| NVNT | ac40 | 5755 | Ant1 | 3.42  | 1.09 | 4.51  | 30    | Pass |
| NVNT | ac40 | 5795 | Ant1 | 2.88  | 1.14 | 4.02  | 30    | Pass |
| NVNT | ac40 | 5755 | Ant2 | 3.59  | 1.09 | 4.68  | 30    | Pass |
| NVNT | ac40 | 5795 | Ant2 | 4.06  | 1.14 | 5.2   | 30    | Pass |
| NVNT | ac40 | 5755 | Ant3 | 4.67  | 1.14 | 5.81  | 30    | Pass |
| NVNT | ac40 | 5795 | Ant3 | 3.75  | 0.93 | 4.68  | 30    | Pass |
| NVNT | ac40 | 5755 | Ant4 | 2.44  | 0.93 | 3.37  | 30    | Pass |
| NVNT | ac40 | 5795 | Ant4 | 2.01  | 1.14 | 3.15  | 30    | Pass |
| NVNT | ac40 | 5755 | Ant1 | -0.98 | 1.14 | 0.16  | 30    | Pass |
| NVNT | ac40 | 5755 | Ant2 | -2.31 | 1.14 | -1.17 | 30    | Pass |
| NVNT | ac40 | 5755 | Ant3 | -1.76 | 1.14 | -0.62 | 30    | Pass |
| NVNT | ac40 | 5755 | Ant4 | 0.33  | 1.14 | 1.47  | 30    | Pass |
| NVNT | ac40 | 5755 | Sum  | NaN   | NaN  | 6.1   | 28.92 | Pass |
| NVNT | ac40 | 5795 | Ant1 | -1.57 | 1.14 | -0.43 | 30    | Pass |
| NVNT | ac40 | 5795 | Ant2 | -1.82 | 1.14 | -0.68 | 30    | Pass |
| NVNT | ac40 | 5795 | Ant3 | -2.12 | 1.14 | -0.98 | 30    | Pass |
| NVNT | ac40 | 5795 | Ant4 | -0.06 | 1.14 | 1.08  | 30    | Pass |
| NVNT | ac40 | 5795 | Sum  | NaN   | NaN  | 5.84  | 28.92 | Pass |
| NVNT | ac80 | 5210 | Ant1 | 1.46  | 1.41 | 2.87  | 17    | Pass |
| NVNT | ac80 | 5210 | Ant2 | 3.41  | 1.76 | 5.17  | 17    | Pass |
| NVNT | ac80 | 5210 | Ant3 | 3.56  | 1.76 | 5.32  | 17    | Pass |
| NVNT | ac80 | 5210 | Ant4 | 4.05  | 1.76 | 5.81  | 17    | Pass |
| NVNT | ac80 | 5210 | Ant1 | -3.35 | 1.76 | -1.59 | 17    | Pass |
| NVNT | ac80 | 5210 | Ant2 | -2.17 | 1.76 | -0.41 | 17    | Pass |
| NVNT | ac80 | 5210 | Ant3 | -2.86 | 1.76 | -1.1  | 17    | Pass |
| NVNT | ac80 | 5210 | Ant4 | -1.35 | 1.76 | 0.41  | 17    | Pass |
| NVNT | ac80 | 5210 | Sum  | NaN   | NaN  | 5.42  | 14.51 | Pass |
| NVNT | ac80 | 5775 | Ant1 | 0.49  | 1.41 | 1.9   | 30    | Pass |
| NVNT | ac80 | 5775 | Ant2 | 1.94  | 1.76 | 3.7   | 30    | Pass |
| NVNT | ac80 | 5775 | Ant3 | 2.71  | 1.76 | 4.47  | 30    | Pass |
| NVNT | ac80 | 5775 | Ant4 | 0.86  | 1.76 | 2.62  | 30    | Pass |
| NVNT | ac80 | 5775 | Ant1 | -5.75 | 1.65 | -4.1  | 30    | Pass |
| NVNT | ac80 | 5775 | Ant2 | -5.73 | 1.65 | -4.08 | 30    | Pass |
| NVNT | ac80 | 5775 | Ant3 | -6.26 | 1.65 | -4.61 | 30    | Pass |
| NVNT | ac80 | 5775 | Ant4 | -4.04 | 1.65 | -2.39 | 30    | Pass |



## REPORT No.: SZ24070014W03

|      |      |      |      |       |      |       |       |      |
|------|------|------|------|-------|------|-------|-------|------|
| NVNT | ac80 | 5775 | Sum  | NaN   | NaN  | 2.3   | 28.92 | Pass |
| NVNT | ax20 | 5180 | Ant1 | 10.05 | 0.71 | 10.76 | 17    | Pass |
| NVNT | ax20 | 5220 | Ant1 | 9.05  | 0.69 | 9.74  | 17    | Pass |
| NVNT | ax20 | 5240 | Ant1 | 8.52  | 0.71 | 9.23  | 17    | Pass |
| NVNT | ax20 | 5180 | Ant2 | 9.43  | 0.71 | 10.14 | 17    | Pass |
| NVNT | ax20 | 5220 | Ant2 | 8.39  | 0.58 | 8.97  | 17    | Pass |
| NVNT | ax20 | 5240 | Ant2 | 7.56  | 0.58 | 8.14  | 17    | Pass |
| NVNT | ax20 | 5180 | Ant3 | 8.89  | 0.58 | 9.47  | 17    | Pass |
| NVNT | ax20 | 5220 | Ant3 | 7.65  | 0.69 | 8.34  | 17    | Pass |
| NVNT | ax20 | 5240 | Ant3 | 6.78  | 0.71 | 7.49  | 17    | Pass |
| NVNT | ax20 | 5180 | Ant4 | 7.91  | 0.69 | 8.6   | 17    | Pass |
| NVNT | ax20 | 5220 | Ant4 | 7.07  | 0.69 | 7.76  | 17    | Pass |
| NVNT | ax20 | 5240 | Ant4 | 6.35  | 0.58 | 6.93  | 17    | Pass |
| NVNT | ax20 | 5180 | Ant1 | 1.59  | 0.69 | 2.28  | 17    | Pass |
| NVNT | ax20 | 5180 | Ant2 | 2.6   | 0.69 | 3.29  | 17    | Pass |
| NVNT | ax20 | 5180 | Ant3 | 1.91  | 0.69 | 2.6   | 17    | Pass |
| NVNT | ax20 | 5180 | Ant4 | 2.58  | 0.69 | 3.27  | 17    | Pass |
| NVNT | ax20 | 5180 | Sum  | NaN   | NaN  | 8.9   | 14.51 | Pass |
| NVNT | ax20 | 5220 | Ant1 | 0.76  | 0.58 | 1.34  | 17    | Pass |
| NVNT | ax20 | 5220 | Ant2 | 1.9   | 0.58 | 2.48  | 17    | Pass |
| NVNT | ax20 | 5220 | Ant3 | 0.82  | 0.58 | 1.4   | 17    | Pass |
| NVNT | ax20 | 5220 | Ant4 | 2.38  | 0.58 | 2.96  | 17    | Pass |
| NVNT | ax20 | 5220 | Sum  | NaN   | NaN  | 8.12  | 14.51 | Pass |
| NVNT | ax20 | 5240 | Ant1 | 0.13  | 0.69 | 0.82  | 17    | Pass |
| NVNT | ax20 | 5240 | Ant2 | 1.02  | 0.69 | 1.71  | 17    | Pass |
| NVNT | ax20 | 5240 | Ant3 | 0.06  | 0.69 | 0.75  | 17    | Pass |
| NVNT | ax20 | 5240 | Ant4 | 1.85  | 0.69 | 2.54  | 17    | Pass |
| NVNT | ax20 | 5240 | Sum  | NaN   | NaN  | 7.54  | 14.51 | Pass |
| NVNT | ax20 | 5745 | Ant1 | 5.51  | 0.73 | 6.24  | 30    | Pass |
| NVNT | ax20 | 5785 | Ant1 | 4.68  | 0.6  | 5.28  | 30    | Pass |
| NVNT | ax20 | 5825 | Ant1 | 4.54  | 0.73 | 5.27  | 30    | Pass |
| NVNT | ax20 | 5745 | Ant2 | 5.35  | 0.65 | 6     | 30    | Pass |
| NVNT | ax20 | 5785 | Ant2 | 5.51  | 0.73 | 6.24  | 30    | Pass |
| NVNT | ax20 | 5825 | Ant2 | 6.05  | 0.6  | 6.65  | 30    | Pass |
| NVNT | ax20 | 5745 | Ant3 | 5.24  | 0.73 | 5.97  | 30    | Pass |
| NVNT | ax20 | 5785 | Ant3 | 5.06  | 0.71 | 5.77  | 30    | Pass |
| NVNT | ax20 | 5825 | Ant3 | 5.4   | 0.71 | 6.11  | 30    | Pass |
| NVNT | ax20 | 5745 | Ant4 | 4.52  | 0.73 | 5.25  | 30    | Pass |



|      |      |      |      |       |      |       |       |      |
|------|------|------|------|-------|------|-------|-------|------|
| NVNT | ax20 | 5785 | Ant4 | 4.29  | 0.71 | 5     | 30    | Pass |
| NVNT | ax20 | 5825 | Ant4 | 4.25  | 0.73 | 4.98  | 30    | Pass |
| NVNT | ax20 | 5745 | Ant1 | -0.07 | 0.71 | 0.64  | 30    | Pass |
| NVNT | ax20 | 5745 | Ant2 | -0.99 | 0.71 | -0.28 | 30    | Pass |
| NVNT | ax20 | 5745 | Ant3 | -2.15 | 0.71 | -1.44 | 30    | Pass |
| NVNT | ax20 | 5745 | Ant4 | 0.66  | 0.71 | 1.37  | 30    | Pass |
| NVNT | ax20 | 5745 | Sum  | NaN   | NaN  | 6.21  | 28.92 | Pass |
| NVNT | ax20 | 5785 | Ant1 | -0.69 | 0.6  | -0.09 | 30    | Pass |
| NVNT | ax20 | 5785 | Ant2 | -1.05 | 0.6  | -0.45 | 30    | Pass |
| NVNT | ax20 | 5785 | Ant3 | -1.71 | 0.6  | -1.11 | 30    | Pass |
| NVNT | ax20 | 5785 | Ant4 | 0.79  | 0.6  | 1.39  | 30    | Pass |
| NVNT | ax20 | 5785 | Sum  | NaN   | NaN  | 6.05  | 28.92 | Pass |
| NVNT | ax20 | 5825 | Ant1 | -0.13 | 0.71 | 0.58  | 30    | Pass |
| NVNT | ax20 | 5825 | Ant2 | -0.42 | 0.71 | 0.29  | 30    | Pass |
| NVNT | ax20 | 5825 | Ant3 | -1.1  | 0.71 | -0.39 | 30    | Pass |
| NVNT | ax20 | 5825 | Ant4 | 1.05  | 0.71 | 1.76  | 30    | Pass |
| NVNT | ax20 | 5825 | Sum  | NaN   | NaN  | 6.66  | 28.92 | Pass |
| NVNT | ax40 | 5190 | Ant1 | 5.19  | 0.71 | 5.9   | 17    | Pass |
| NVNT | ax40 | 5230 | Ant1 | 4.85  | 0.58 | 5.43  | 17    | Pass |
| NVNT | ax40 | 5190 | Ant2 | 4.99  | 0.69 | 5.68  | 17    | Pass |
| NVNT | ax40 | 5230 | Ant2 | 4.13  | 0.58 | 4.71  | 17    | Pass |
| NVNT | ax40 | 5190 | Ant3 | 5.87  | 0.58 | 6.45  | 17    | Pass |
| NVNT | ax40 | 5230 | Ant3 | 4.55  | 0.58 | 5.13  | 17    | Pass |
| NVNT | ax40 | 5190 | Ant4 | 5.91  | 1.01 | 6.92  | 17    | Pass |
| NVNT | ax40 | 5230 | Ant4 | 5.62  | 1.05 | 6.67  | 17    | Pass |
| NVNT | ax40 | 5190 | Ant1 | -0.74 | 0.58 | -0.16 | 17    | Pass |
| NVNT | ax40 | 5190 | Ant2 | 0.17  | 0.58 | 0.75  | 17    | Pass |
| NVNT | ax40 | 5190 | Ant3 | -0.62 | 0.58 | -0.04 | 17    | Pass |
| NVNT | ax40 | 5190 | Ant4 | 0.31  | 0.58 | 0.89  | 17    | Pass |
| NVNT | ax40 | 5190 | Sum  | NaN   | NaN  | 6.4   | 14.51 | Pass |
| NVNT | ax40 | 5230 | Ant1 | -1.85 | 0.71 | -1.14 | 17    | Pass |
| NVNT | ax40 | 5230 | Ant2 | -0.4  | 0.71 | 0.31  | 17    | Pass |
| NVNT | ax40 | 5230 | Ant3 | -1.59 | 0.71 | -0.88 | 17    | Pass |
| NVNT | ax40 | 5230 | Ant4 | -0.04 | 0.71 | 0.67  | 17    | Pass |
| NVNT | ax40 | 5230 | Sum  | NaN   | NaN  | 5.83  | 14.51 | Pass |
| NVNT | ax40 | 5755 | Ant1 | 3.23  | 1.09 | 4.32  | 30    | Pass |
| NVNT | ax40 | 5795 | Ant1 | 1.88  | 1.09 | 2.97  | 30    | Pass |
| NVNT | ax40 | 5755 | Ant2 | 2.73  | 1.09 | 3.82  | 30    | Pass |



|      |      |      |      |       |      |       |       |      |
|------|------|------|------|-------|------|-------|-------|------|
| NVNT | ax40 | 5795 | Ant2 | 3.08  | 1.09 | 4.17  | 30    | Pass |
| NVNT | ax40 | 5755 | Ant3 | 2.93  | 1.09 | 4.02  | 30    | Pass |
| NVNT | ax40 | 5795 | Ant3 | 2.59  | 1.09 | 3.68  | 30    | Pass |
| NVNT | ax40 | 5755 | Ant4 | 1.8   | 0.89 | 2.69  | 30    | Pass |
| NVNT | ax40 | 5795 | Ant4 | 1.14  | 0.89 | 2.03  | 30    | Pass |
| NVNT | ax40 | 5755 | Ant1 | -2.95 | 1.09 | -1.86 | 30    | Pass |
| NVNT | ax40 | 5755 | Ant2 | -3.38 | 1.09 | -2.29 | 30    | Pass |
| NVNT | ax40 | 5755 | Ant3 | -4.05 | 1.09 | -2.96 | 30    | Pass |
| NVNT | ax40 | 5755 | Ant4 | -1.74 | 1.09 | -0.65 | 30    | Pass |
| NVNT | ax40 | 5755 | Sum  | NaN   | NaN  | 4.17  | 28.92 | Pass |
| NVNT | ax40 | 5795 | Ant1 | -3.56 | 1.09 | -2.47 | 30    | Pass |
| NVNT | ax40 | 5795 | Ant2 | -3.1  | 1.09 | -2.01 | 30    | Pass |
| NVNT | ax40 | 5795 | Ant3 | -4.68 | 1.09 | -3.59 | 30    | Pass |
| NVNT | ax40 | 5795 | Ant4 | -2.03 | 1.09 | -0.94 | 30    | Pass |
| NVNT | ax40 | 5795 | Sum  | NaN   | NaN  | 3.87  | 28.92 | Pass |
| NVNT | ax80 | 5210 | Ant1 | 3.53  | 0.71 | 4.24  | 17    | Pass |
| NVNT | ax80 | 5210 | Ant2 | 3.5   | 0.6  | 4.1   | 17    | Pass |
| NVNT | ax80 | 5210 | Ant3 | 3.73  | 0.6  | 4.33  | 17    | Pass |
| NVNT | ax80 | 5210 | Ant4 | 2.41  | 0.73 | 3.14  | 17    | Pass |
| NVNT | ax80 | 5210 | Ant1 | -3.97 | 0.71 | -3.26 | 17    | Pass |
| NVNT | ax80 | 5210 | Ant2 | -2.56 | 0.71 | -1.85 | 17    | Pass |
| NVNT | ax80 | 5210 | Ant3 | -3.88 | 0.71 | -3.17 | 17    | Pass |
| NVNT | ax80 | 5210 | Ant4 | -2.45 | 0.71 | -1.74 | 17    | Pass |
| NVNT | ax80 | 5210 | Sum  | NaN   | NaN  | 3.58  | 14.51 | Pass |
| NVNT | ax80 | 5775 | Ant1 | -0.2  | 1.38 | 1.18  | 30    | Pass |
| NVNT | ax80 | 5775 | Ant2 | 0.29  | 1.38 | 1.67  | 30    | Pass |
| NVNT | ax80 | 5775 | Ant3 | 1.08  | 1.41 | 2.49  | 30    | Pass |
| NVNT | ax80 | 5775 | Ant4 | -1    | 1.38 | 0.38  | 30    | Pass |
| NVNT | ax80 | 5775 | Ant1 | -5.61 | 1.38 | -4.23 | 30    | Pass |
| NVNT | ax80 | 5775 | Ant2 | -5.97 | 1.38 | -4.59 | 30    | Pass |
| NVNT | ax80 | 5775 | Ant3 | -6.25 | 1.38 | -4.87 | 30    | Pass |
| NVNT | ax80 | 5775 | Ant4 | -4.26 | 1.38 | -2.88 | 30    | Pass |
| NVNT | ax80 | 5775 | Sum  | NaN   | NaN  | 1.96  | 28.92 | Pass |

**Note 1:** Directional gain =  $10\log[(10^{G0/20} + 10^{G1/20})^2/2] = 8.50\text{dBi} > 6\text{dBi}$ , so the power spectral density limit shall be reduced to  $17 - (8.50 - 6) = 14.5\text{dBm}$  for 5.18-5.24GHz band.

**Note 2:** Directional gain =  $10\log[(10^{G0/20} + 10^{G1/20})^2/2] = 8.50\text{dBi} > 6\text{dBi}$ , so the power spectral density limit shall be reduced to  $30 - (7.08 - 6) = 28.92\text{dBm}$  for 5.745-5.825GHz band.

## Test Graphs

## PSD NVNT a 5180MHz Ant1




## PSD NVNT a 5220MHz Ant1



## PSD NVNT a 5240MHz Ant1



## PSD NVNT a 5180MHz Ant2

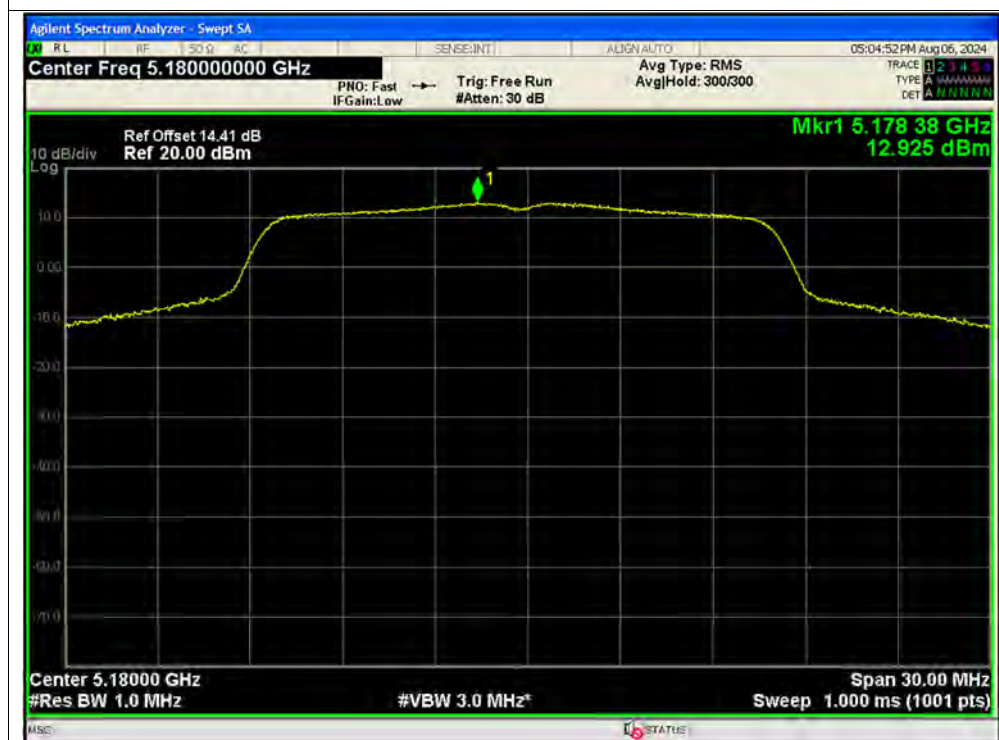



PSD NVNT a 5220MHz Ant2



PSD NVNT a 5240MHz Ant2



PSD NVNT a 5180MHz Ant3



PSD NVNT a 5220MHz Ant3



## PSD NVNT a 5240MHz Ant3



## PSD NVNT a 5180MHz Ant4



PSD NVNT a 5220MHz Ant4



PSD NVNT a 5240MHz Ant4



## PSD NVNT a 5745MHz Ant1



## PSD NVNT a 5785MHz Ant1






## PSD NVNT a 5825MHz Ant1



## PSD NVNT a 5745MHz Ant2

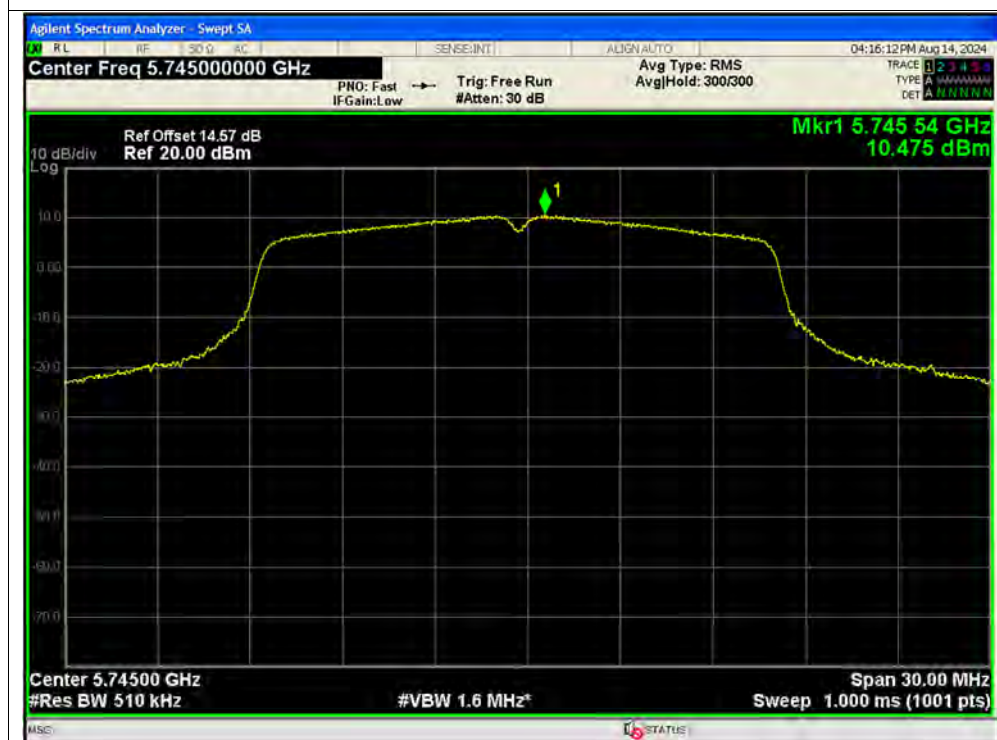




## PSD NVNT a 5785MHz Ant2



## PSD NVNT a 5825MHz Ant2

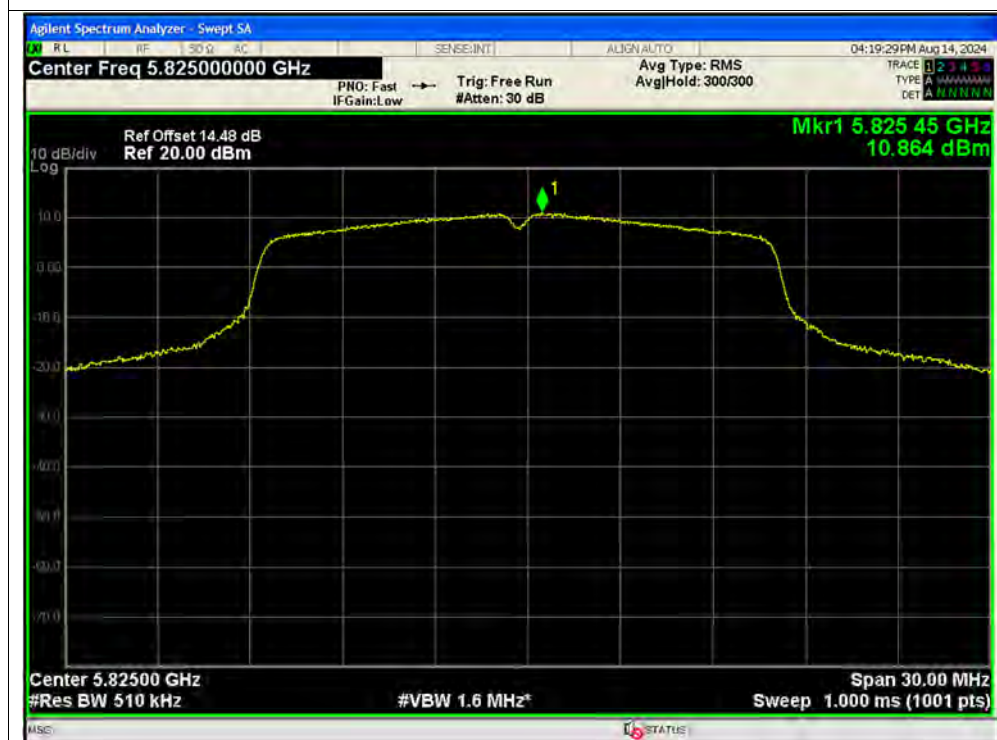




## PSD NVNT a 5745MHz Ant3



## PSD NVNT a 5785MHz Ant3

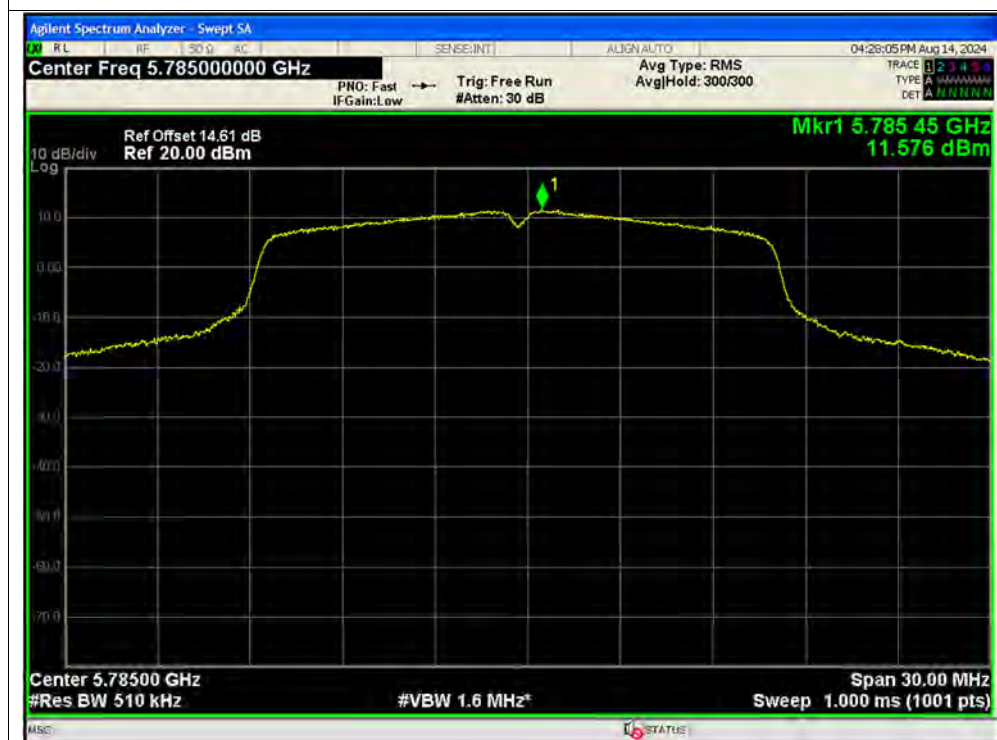




## PSD NVNT a 5825MHz Ant3




## PSD NVNT a 5745MHz Ant4

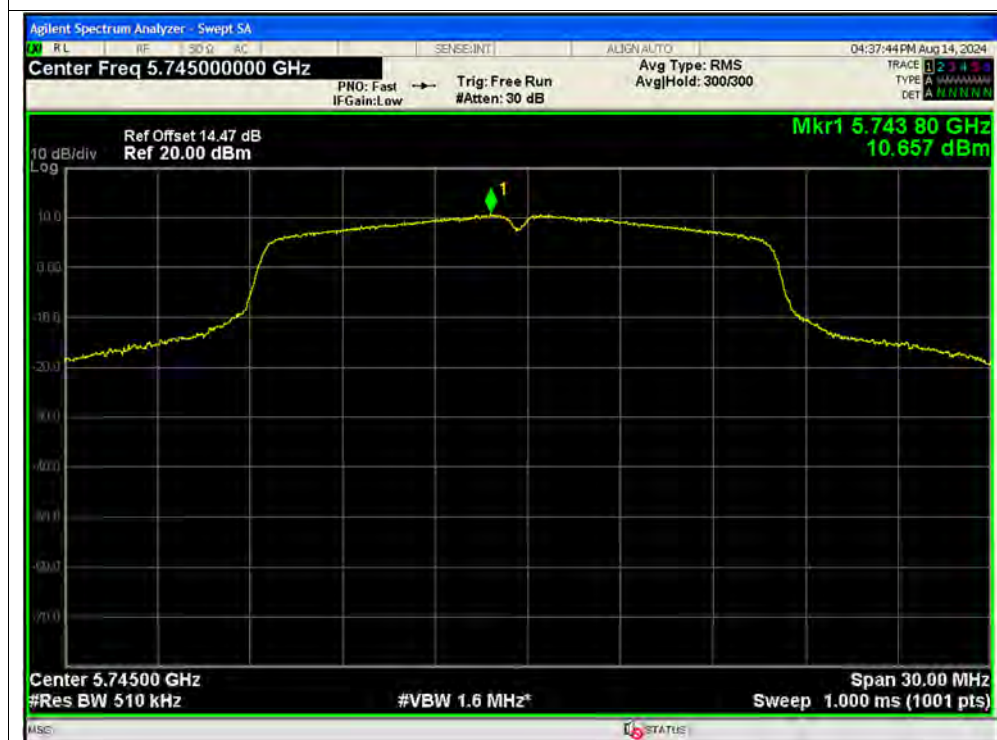




## PSD NVNT a 5785MHz Ant4

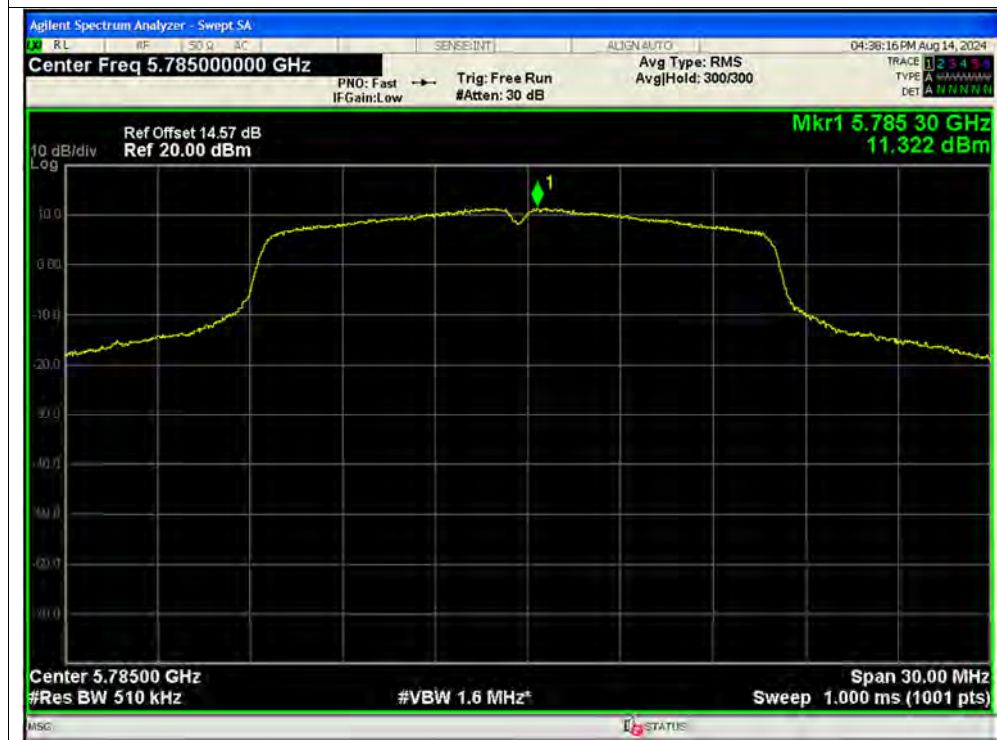

## PSD NVNT a 5825MHz Ant4

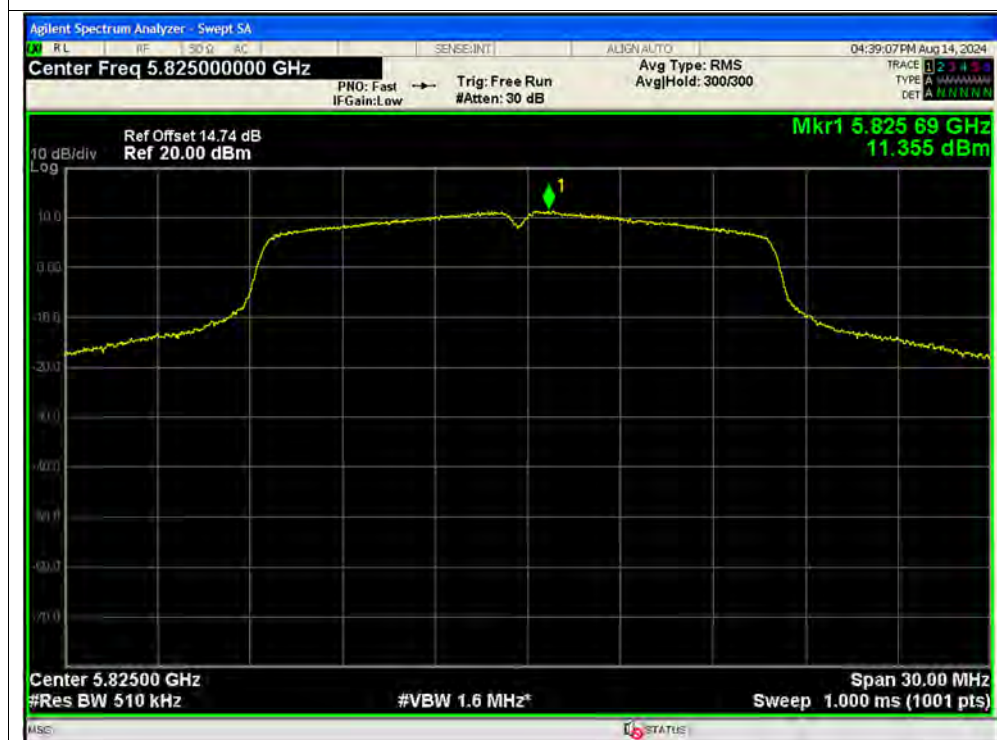

PSD NVNT n20 5180MHz Ant1




PSD NVNT n20 5220MHz Ant1





PSD NVNT n20 5240MHz Ant1

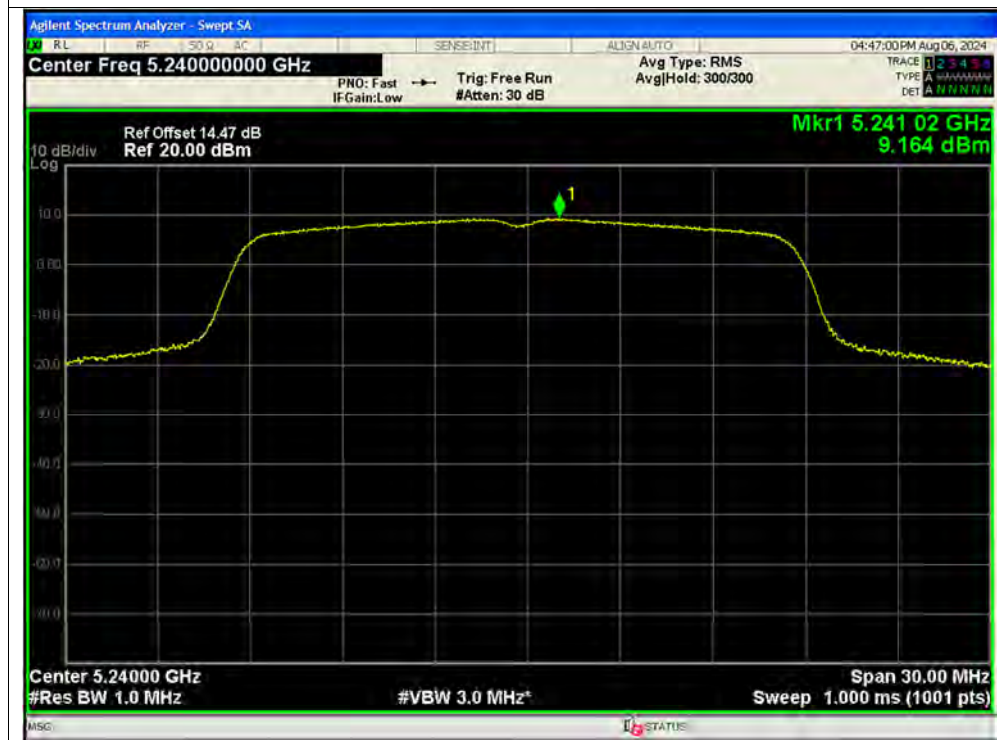

PSD NVNT n20 5180MHz Ant2






PSD NVNT n20 5220MHz Ant2



PSD NVNT n20 5240MHz Ant2

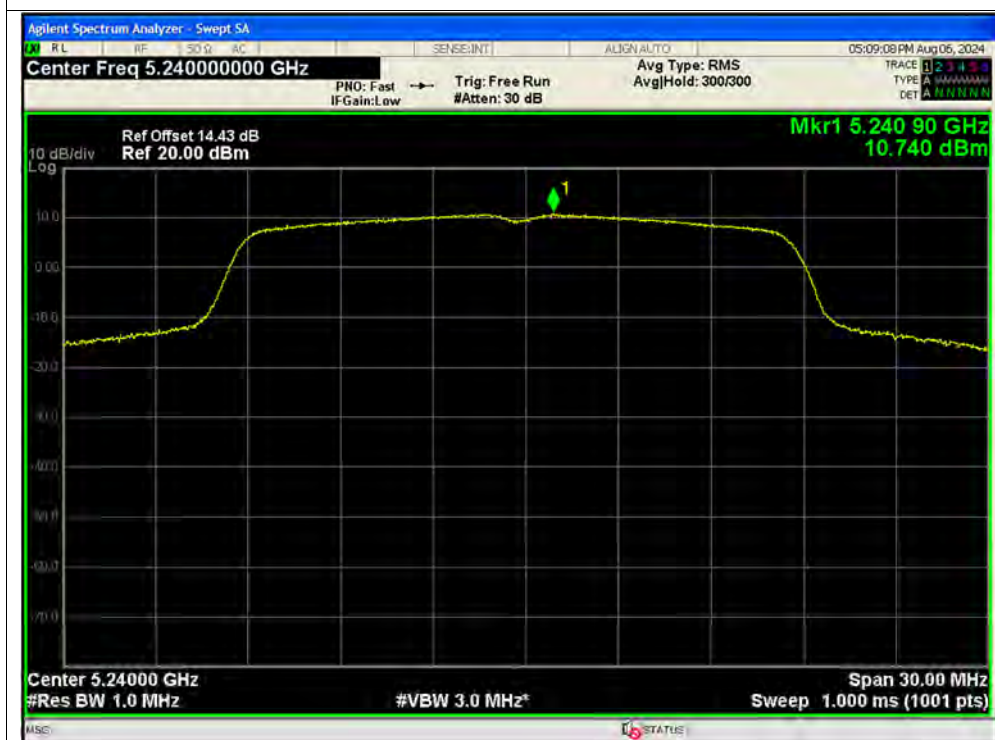




PSD NVNT n20 5180MHz Ant3



PSD NVNT n20 5220MHz Ant3

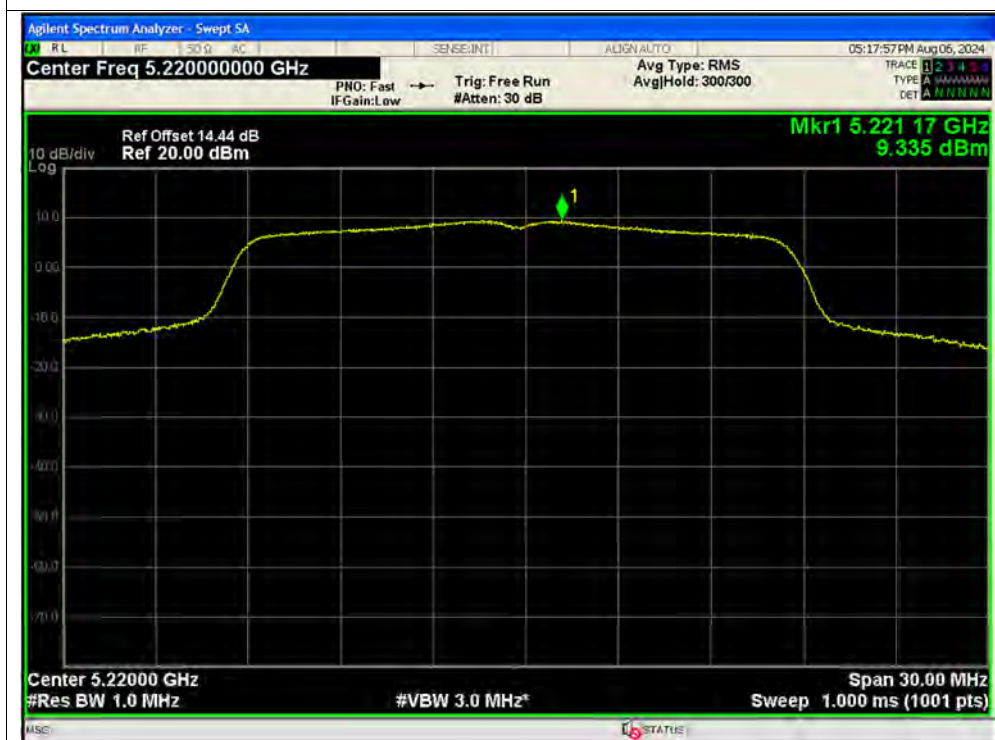

PSD NVNT n20 5240MHz Ant3



PSD NVNT n20 5180MHz Ant4






PSD NVNT n20 5220MHz Ant4




PSD NVNT n20 5240MHz Ant4

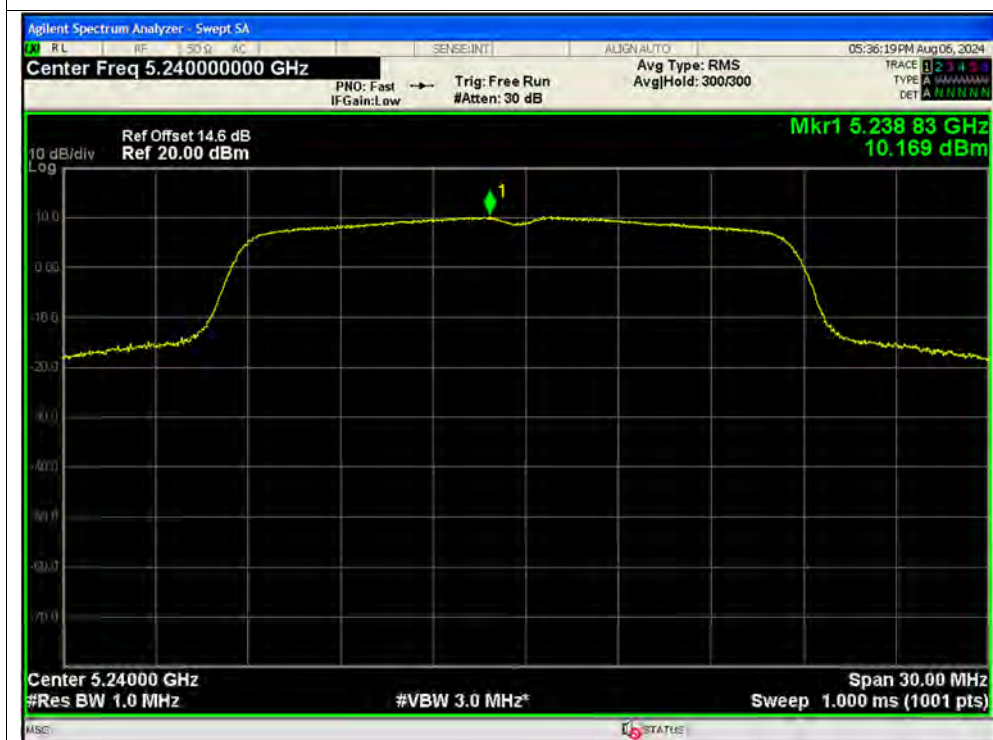

PSD NVNT n20 5180MHz Ant1




PSD NVNT n20 5180MHz Ant2

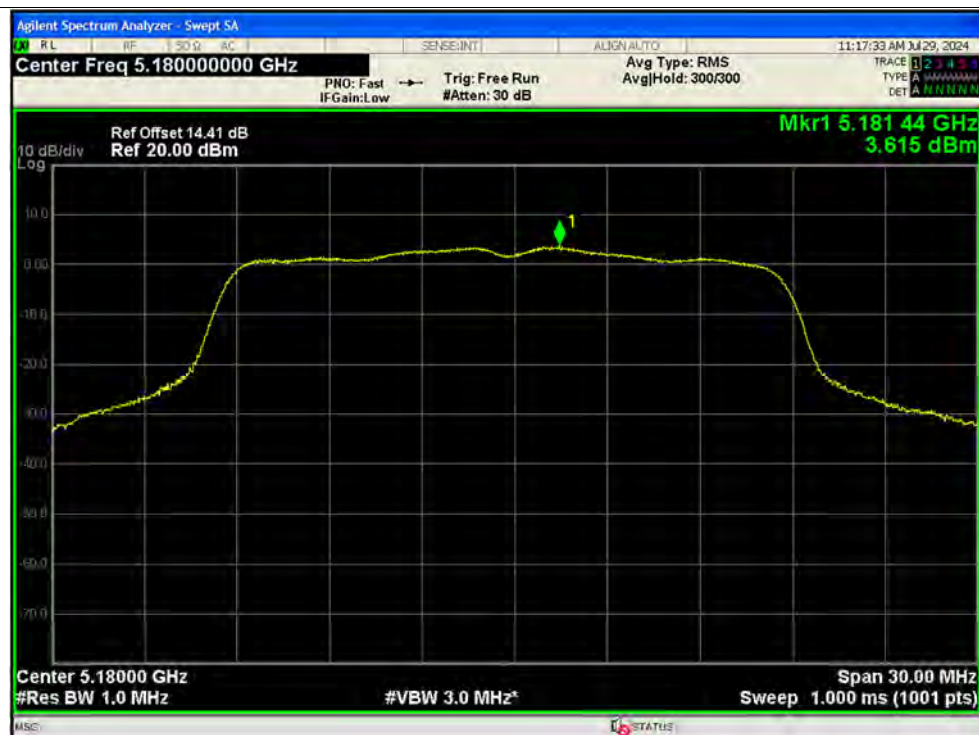



PSD NVNT n20 5180MHz Ant3

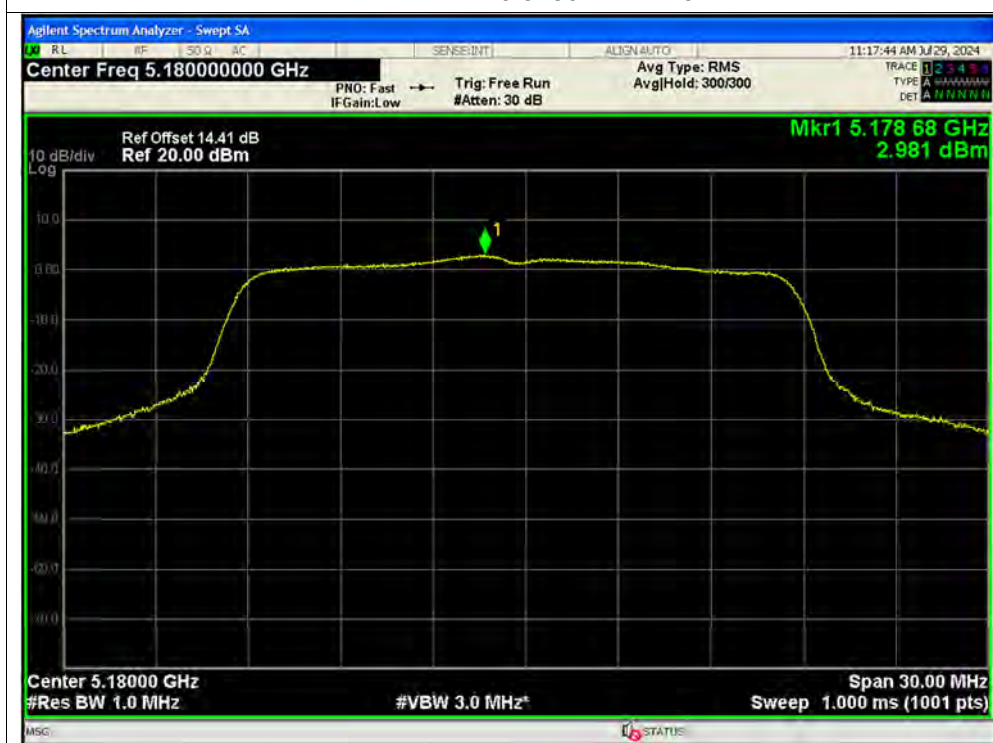

PSD NVNT n20 5180MHz Ant4



PSD NVNT n20 5220MHz Ant1



PSD NVNT n20 5220MHz Ant2





PSD NVNT n20 5220MHz Ant3



PSD NVNT n20 5220MHz Ant4





PSD NVNT n20 5240MHz Ant1



PSD NVNT n20 5240MHz Ant2



PSD NVNT n20 5240MHz Ant3



PSD NVNT n20 5240MHz Ant4



PSD NVNT n20 5745MHz Ant1



PSD NVNT n20 5785MHz Ant1



PSD NVNT n20 5825MHz Ant1



PSD NVNT n20 5745MHz Ant2






## PSD NVNT n20 5785MHz Ant2




## PSD NVNT n20 5825MHz Ant2

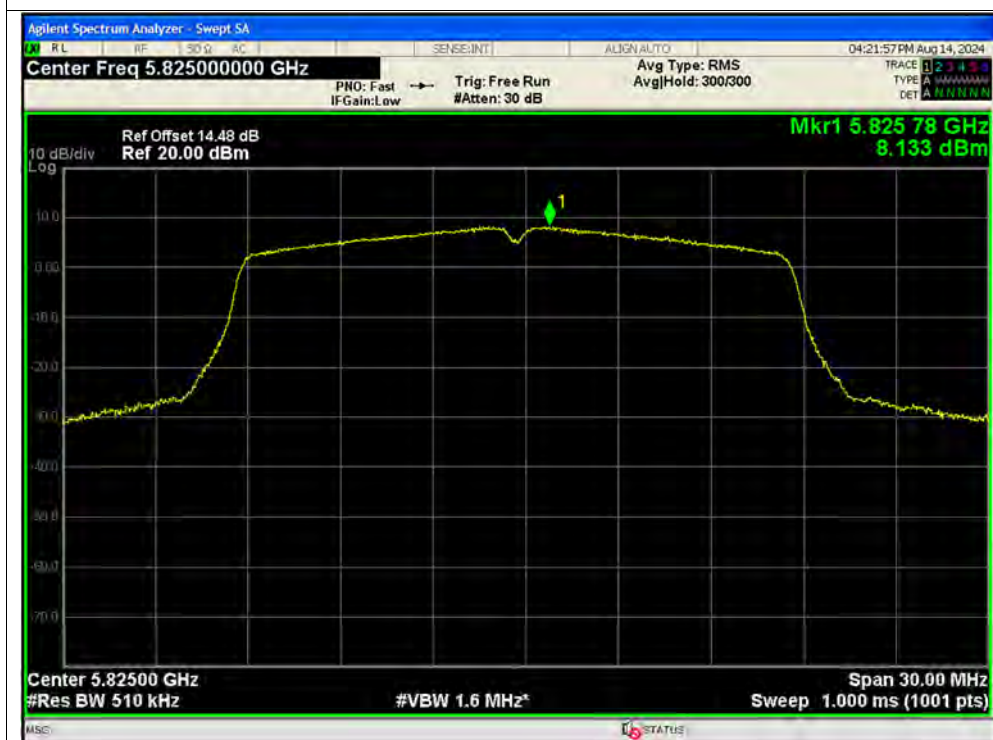



PSD NVNT n20 5745MHz Ant3

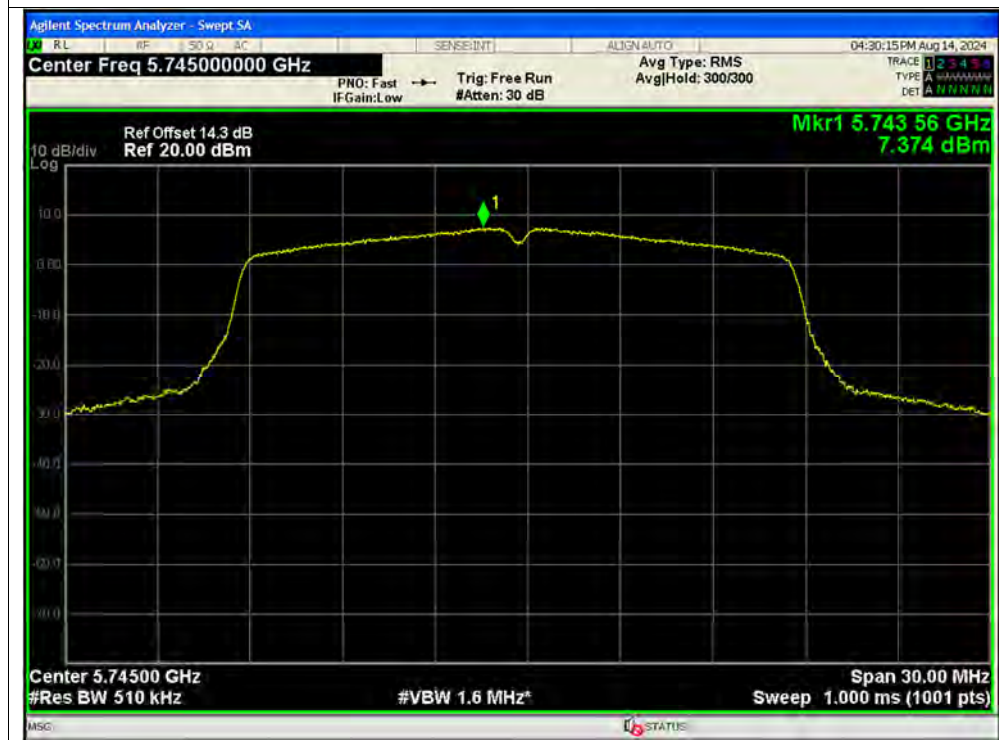


PSD NVNT n20 5785MHz Ant3



PSD NVNT n20 5825MHz Ant3



PSD NVNT n20 5745MHz Ant4

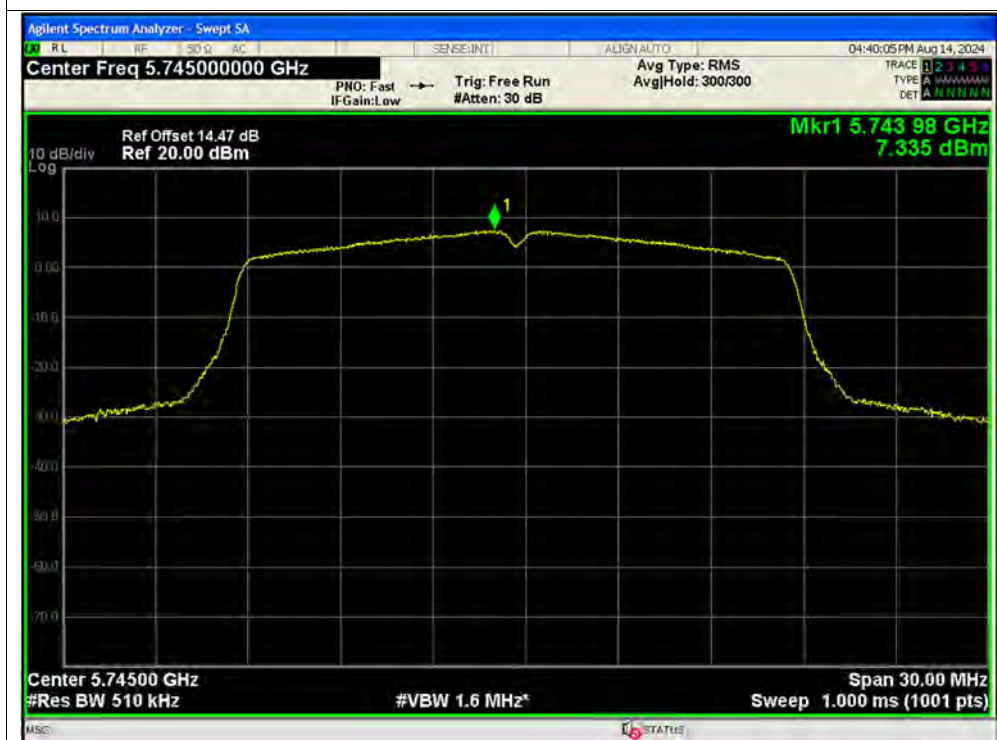

PSD NVNT n20 5785MHz Ant4



PSD NVNT n20 5825MHz Ant4



PSD NVNT n20 5745MHz Ant1



PSD NVNT n20 5745MHz Ant2






PSD NVNT n20 5745MHz Ant3



PSD NVNT n20 5745MHz Ant4

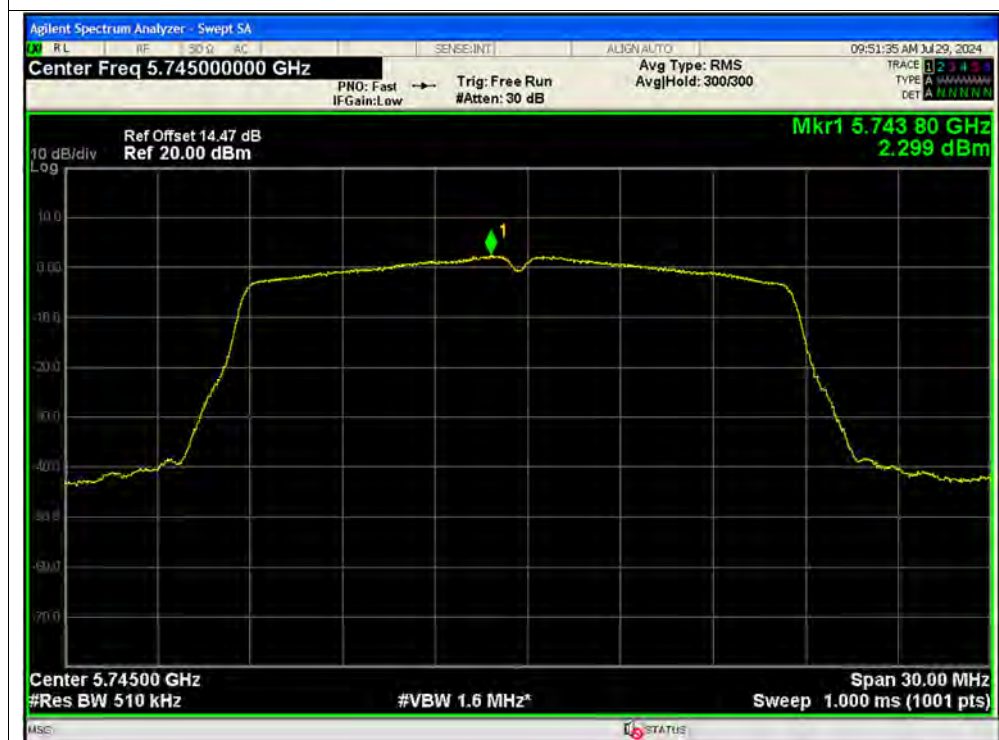

PSD NVNT n20 5785MHz Ant1



PSD NVNT n20 5785MHz Ant2



PSD NVNT n20 5785MHz Ant3



PSD NVNT n20 5785MHz Ant4



PSD NVNT n20 5825MHz Ant1




PSD NVNT n20 5825MHz Ant2



PSD NVNT n20 5825MHz Ant3



PSD NVNT n20 5825MHz Ant4

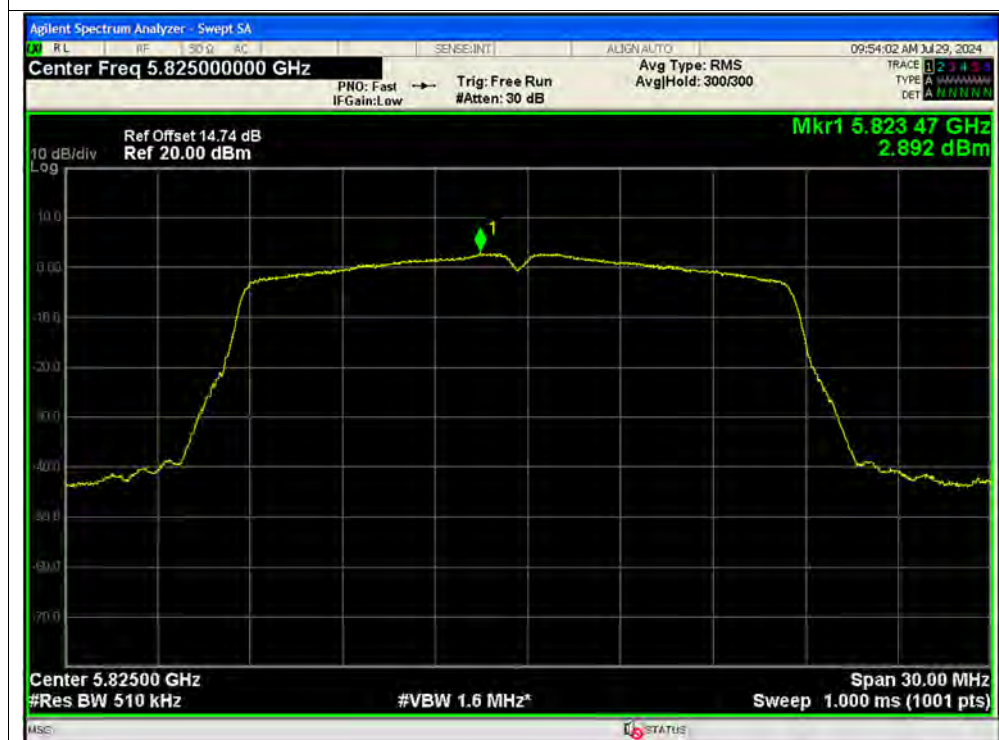



PSD NVNT n40 5190MHz Ant1



PSD NVNT n40 5230MHz Ant1






PSD NVNT n40 5190MHz Ant2



PSD NVNT n40 5230MHz Ant2

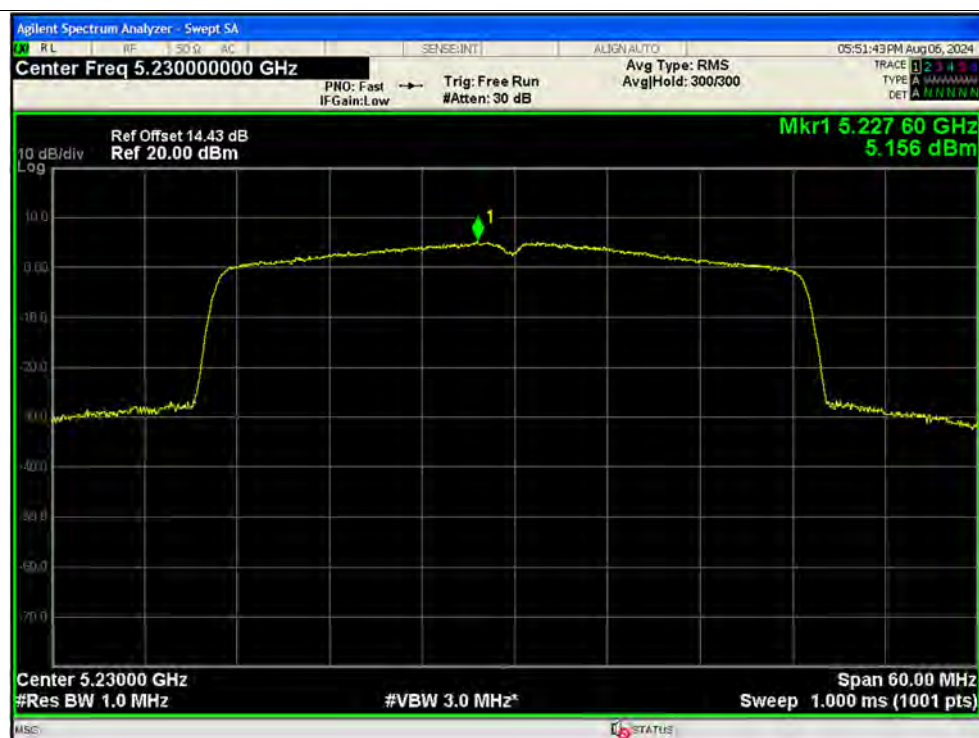




PSD NVNT n40 5190MHz Ant3




PSD NVNT n40 5230MHz Ant3

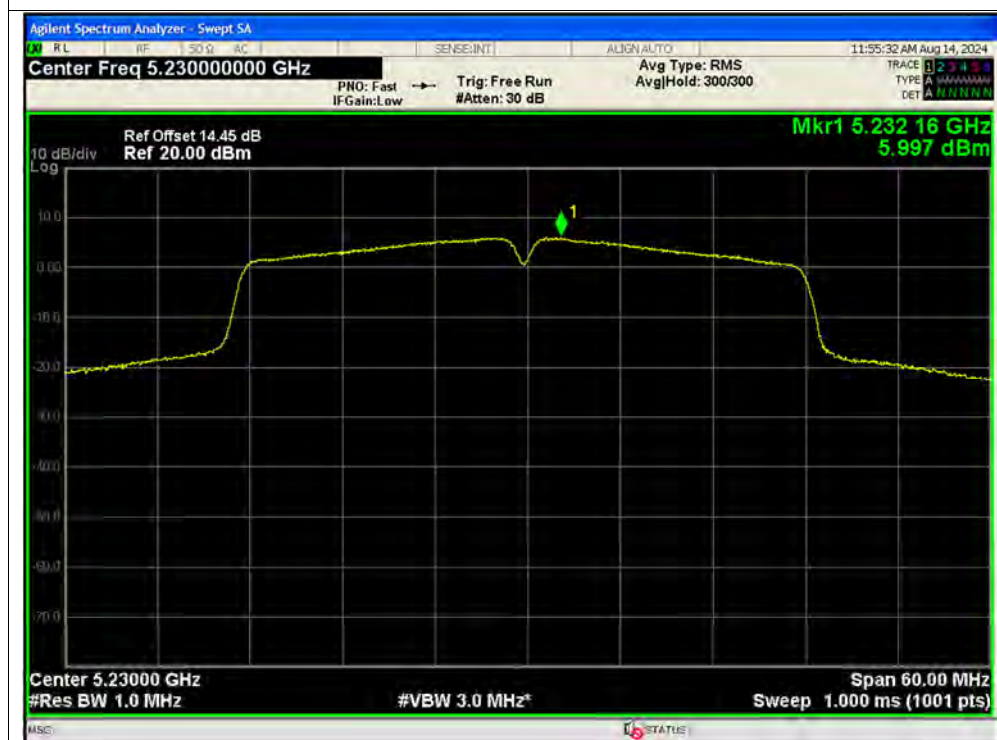

PSD NVNT n40 5190MHz Ant4



PSD NVNT n40 5230MHz Ant4

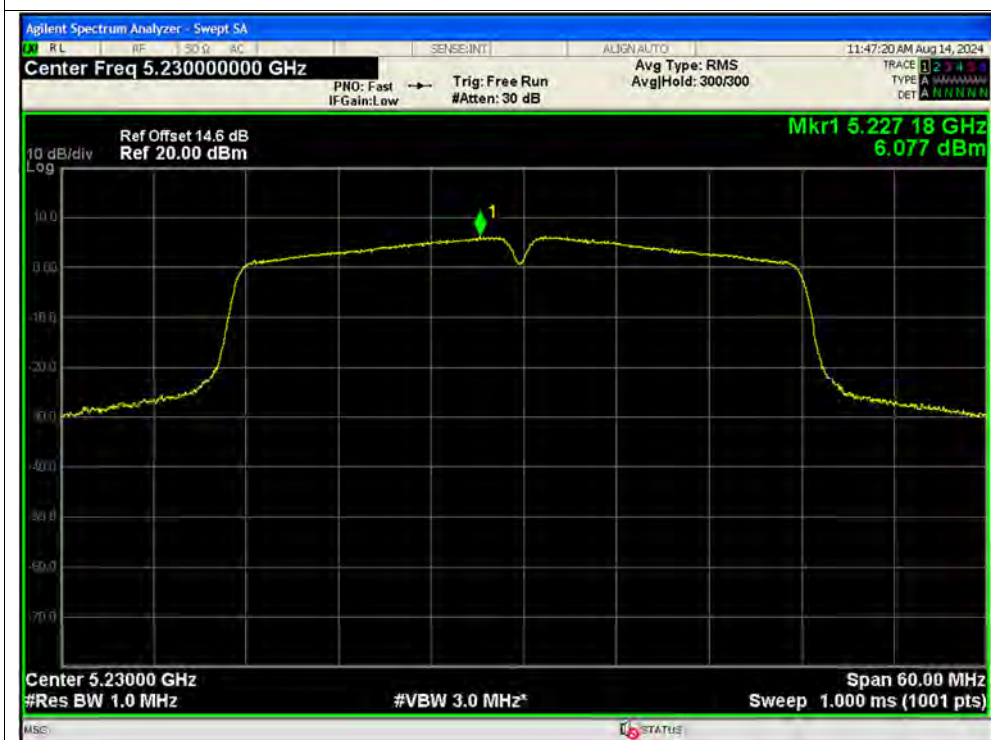

PSD NVNT n40 5190MHz Ant1



PSD NVNT n40 5190MHz Ant2





PSD NVNT n40 5190MHz Ant3




PSD NVNT n40 5190MHz Ant4



PSD NVNT n40 5230MHz Ant1



PSD NVNT n40 5230MHz Ant2

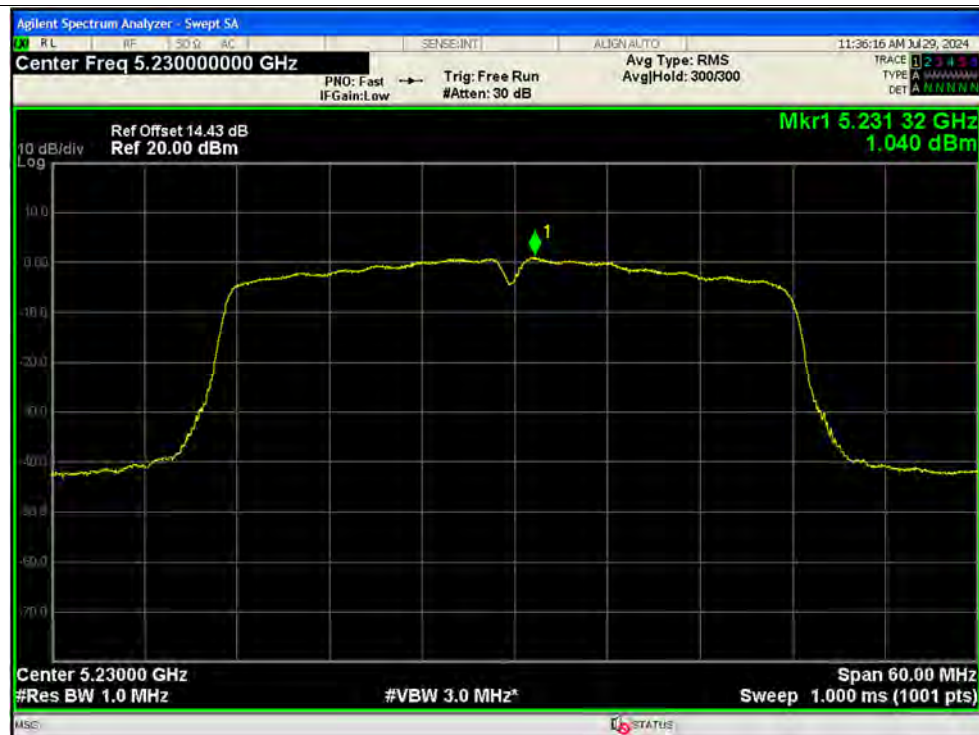



PSD NVNT n40 5230MHz Ant3




PSD NVNT n40 5230MHz Ant4



PSD NVNT n40 5755MHz Ant1




PSD NVNT n40 5795MHz Ant1

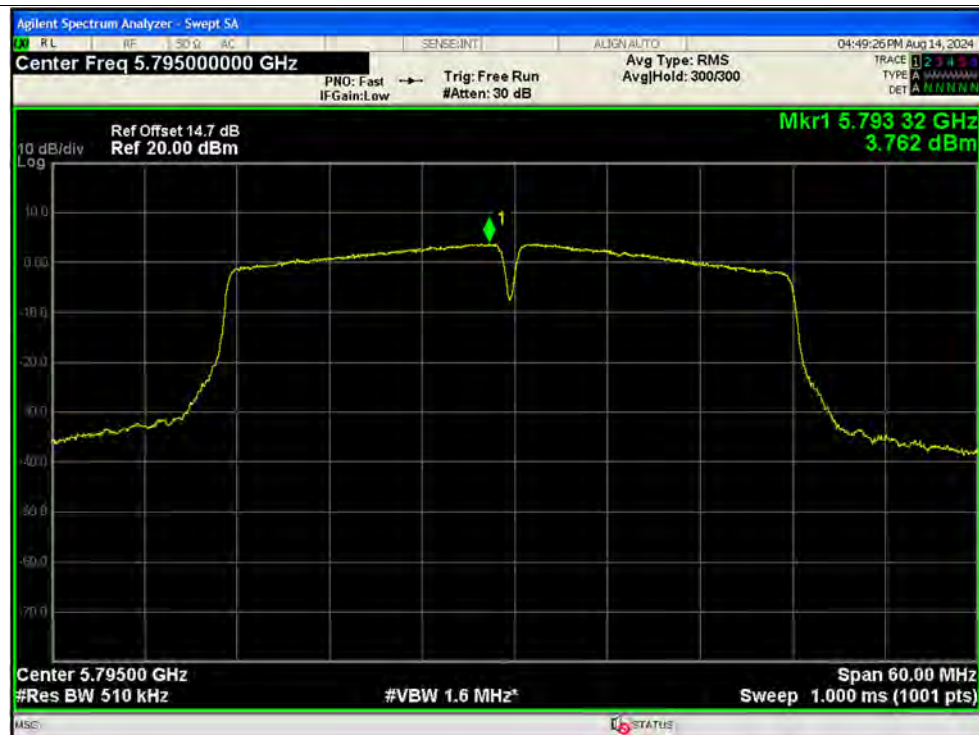

PSD NVNT n40 5755MHz Ant2




PSD NVNT n40 5795MHz Ant2

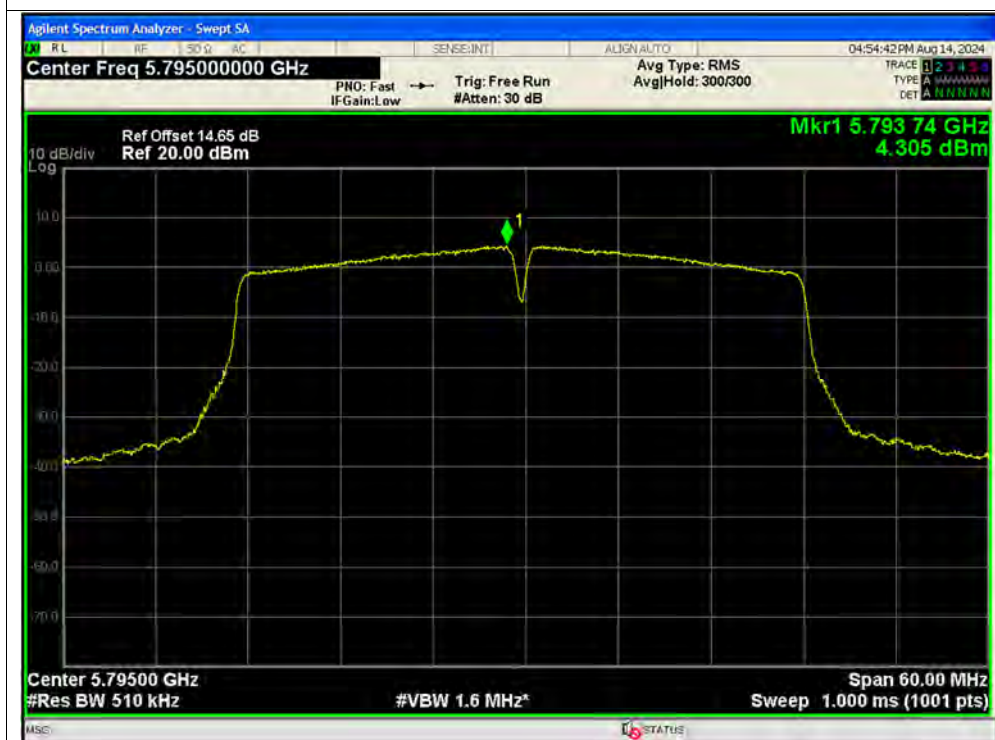

PSD NVNT n40 5755MHz Ant3




PSD NVNT n40 5795MHz Ant3

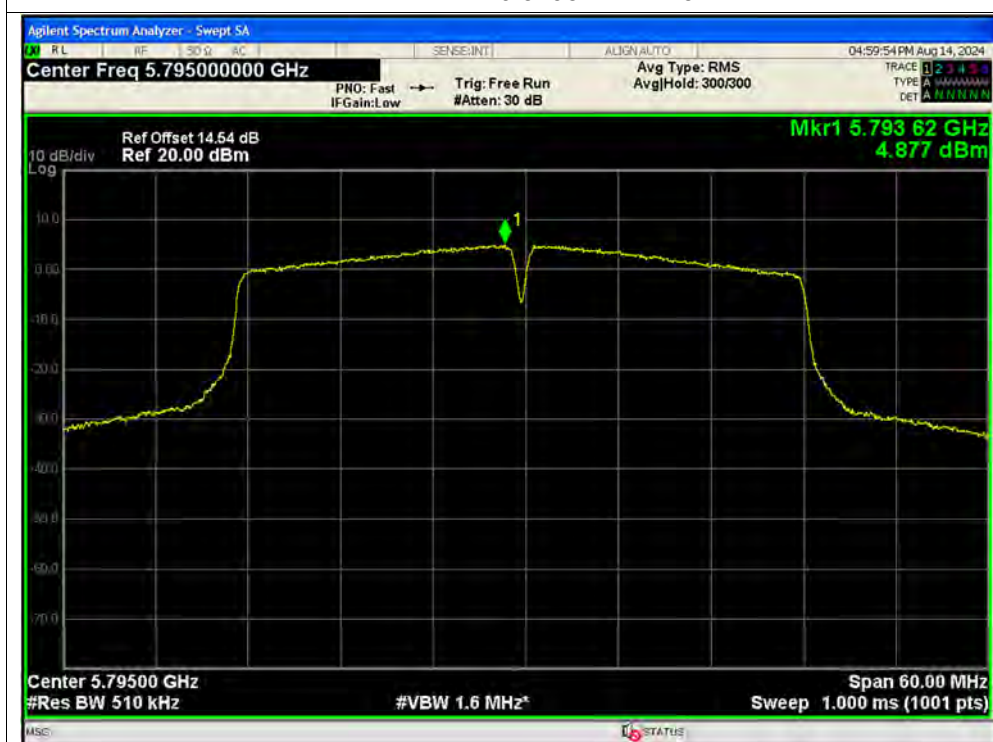

PSD NVNT n40 5755MHz Ant4



PSD NVNT n40 5795MHz Ant4

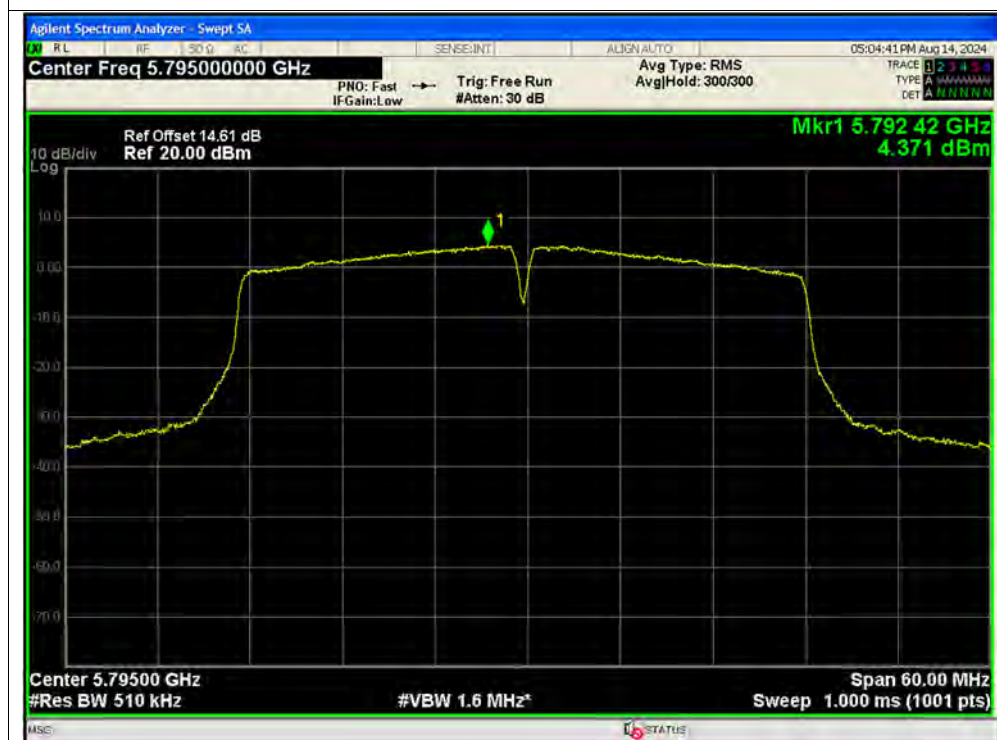

PSD NVNT n40 5755MHz Ant1



PSD NVNT n40 5755MHz Ant2



PSD NVNT n40 5755MHz Ant3



PSD NVNT n40 5755MHz Ant4



PSD NVNT n40 5795MHz Ant1



PSD NVNT n40 5795MHz Ant2



PSD NVNT n40 5795MHz Ant3



PSD NVNT n40 5795MHz Ant4



PSD NVNT ac20 5180MHz Ant1




PSD NVNT ac20 5220MHz Ant1



PSD NVNT ac20 5240MHz Ant1



PSD NVNT ac20 5180MHz Ant2

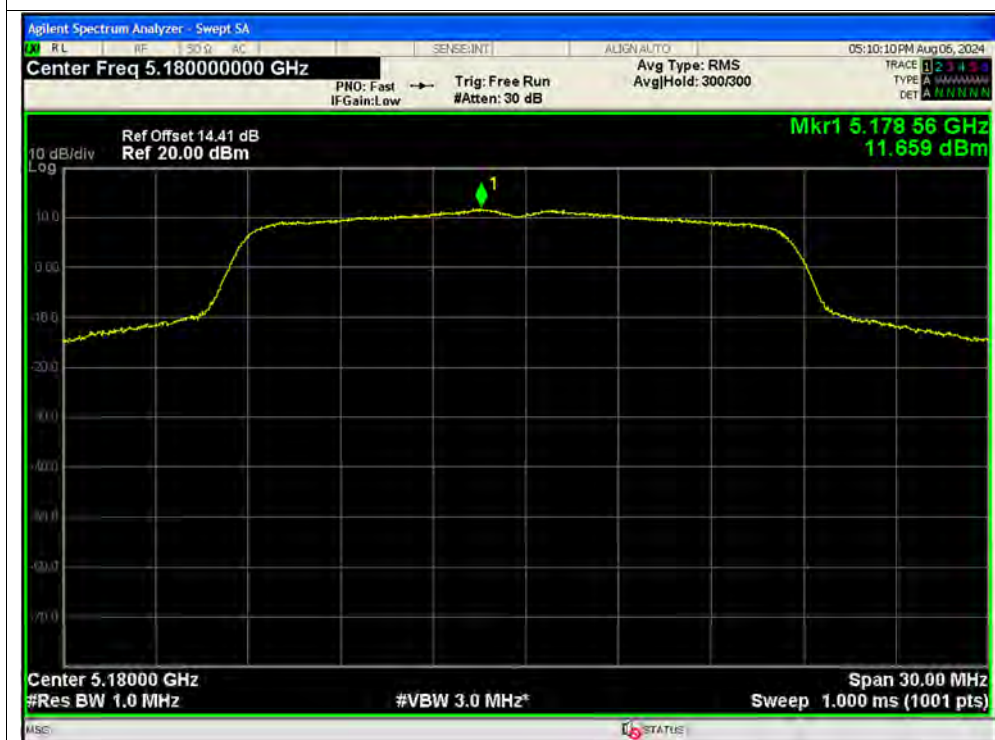

PSD NVNT ac20 5220MHz Ant2



PSD NVNT ac20 5240MHz Ant2



PSD NVNT ac20 5180MHz Ant3



PSD NVNT ac20 5220MHz Ant3



PSD NVNT ac20 5240MHz Ant3



PSD NVNT ac20 5180MHz Ant4



PSD NVNT ac20 5220MHz Ant4




PSD NVNT ac20 5240MHz Ant4






PSD NVNT ac20 5180MHz Ant1

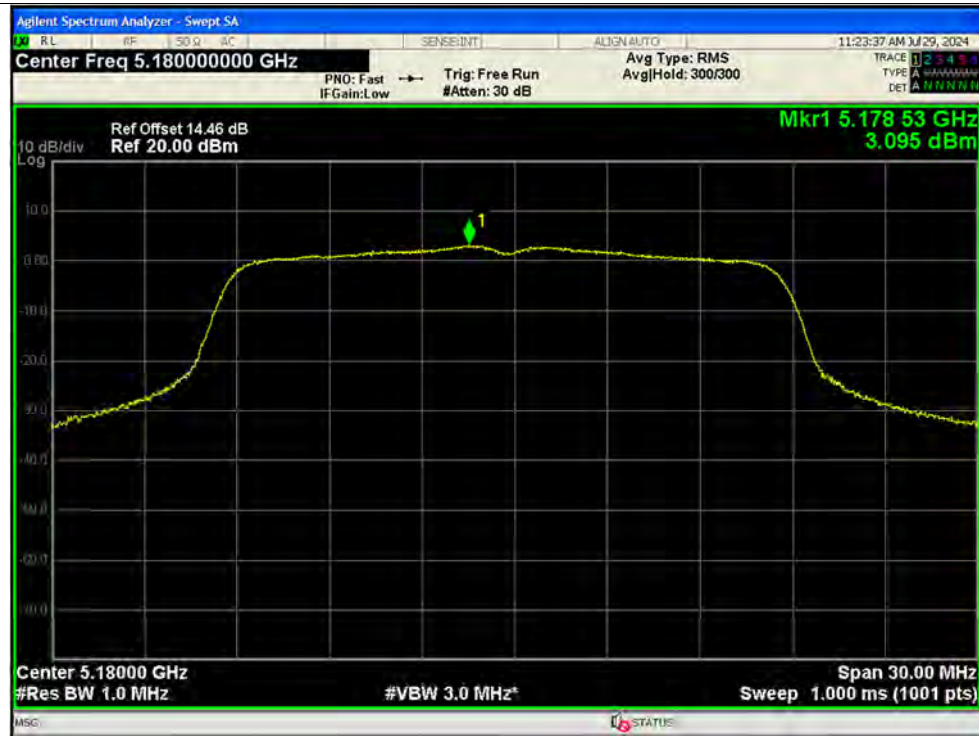

PSD NVNT ac20 5180MHz Ant2



PSD NVNT ac20 5180MHz Ant3

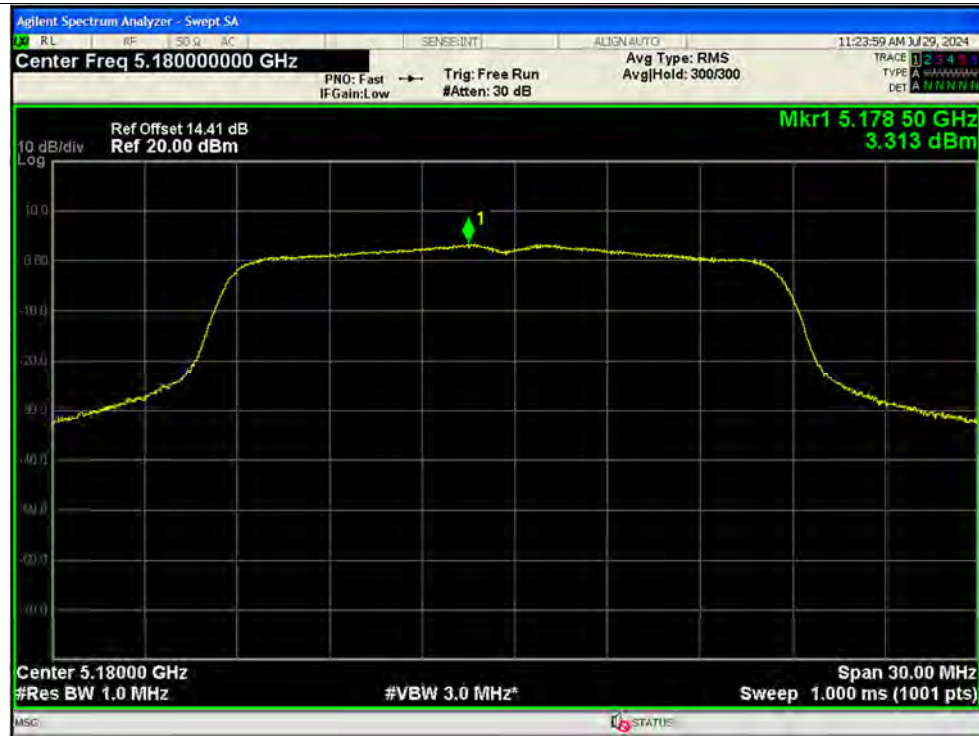


PSD NVNT ac20 5180MHz Ant4






PSD NVNT ac20 5220MHz Ant1

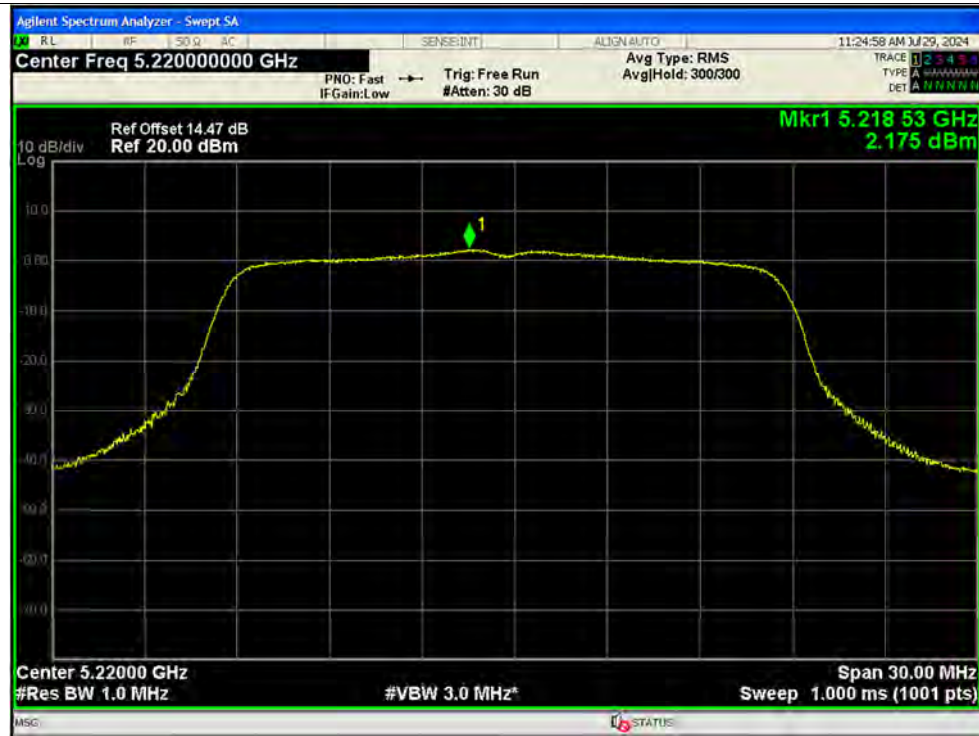


PSD NVNT ac20 5220MHz Ant2



PSD NVNT ac20 5220MHz Ant3

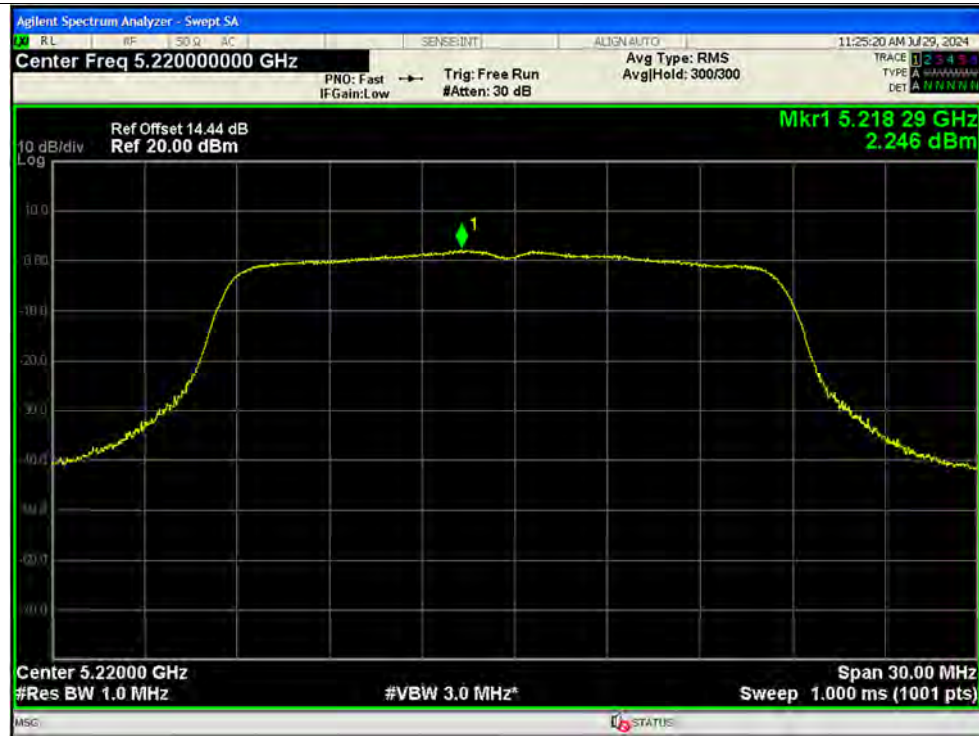

PSD NVNT ac20 5220MHz Ant4

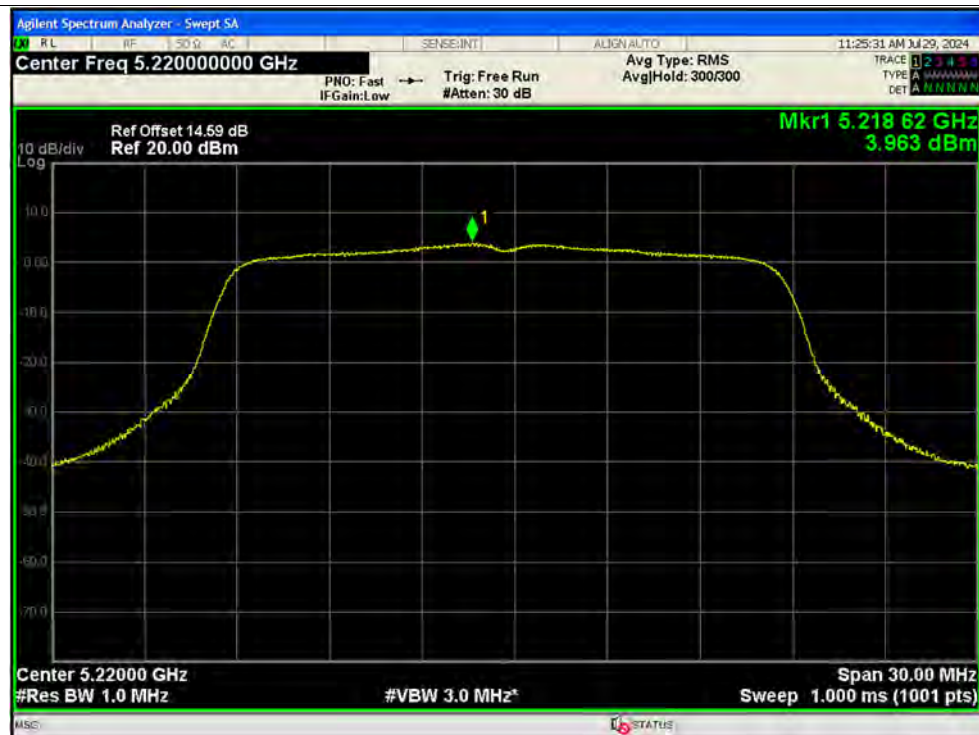


PSD NVNT ac20 5240MHz Ant1




PSD NVNT ac20 5240MHz Ant2



PSD NVNT ac20 5240MHz Ant3

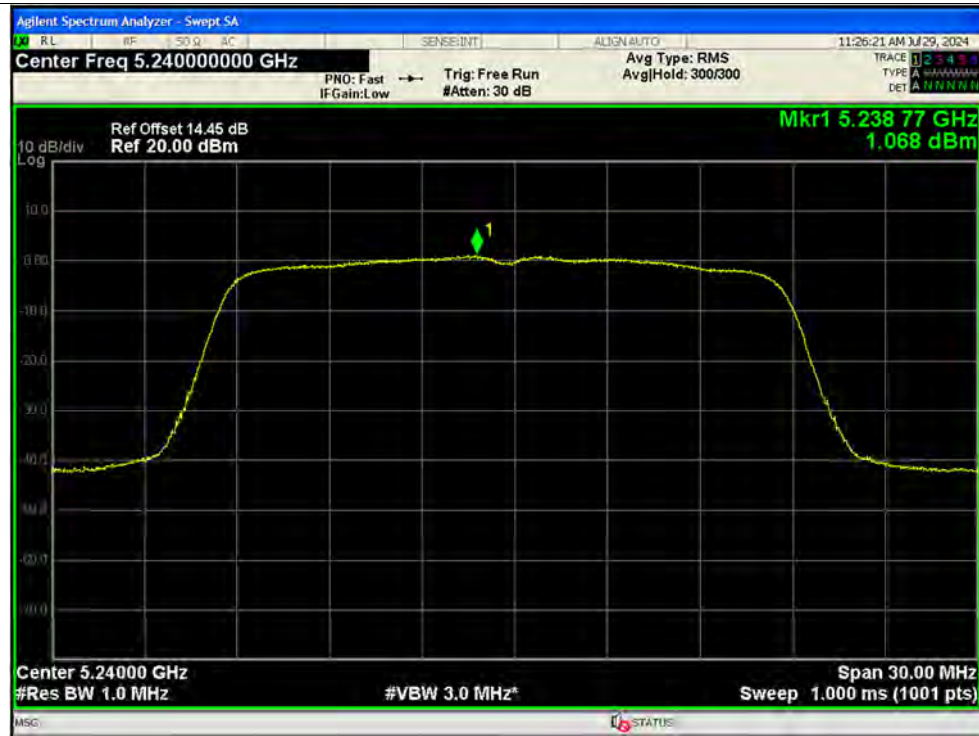

PSD NVNT ac20 5240MHz Ant4

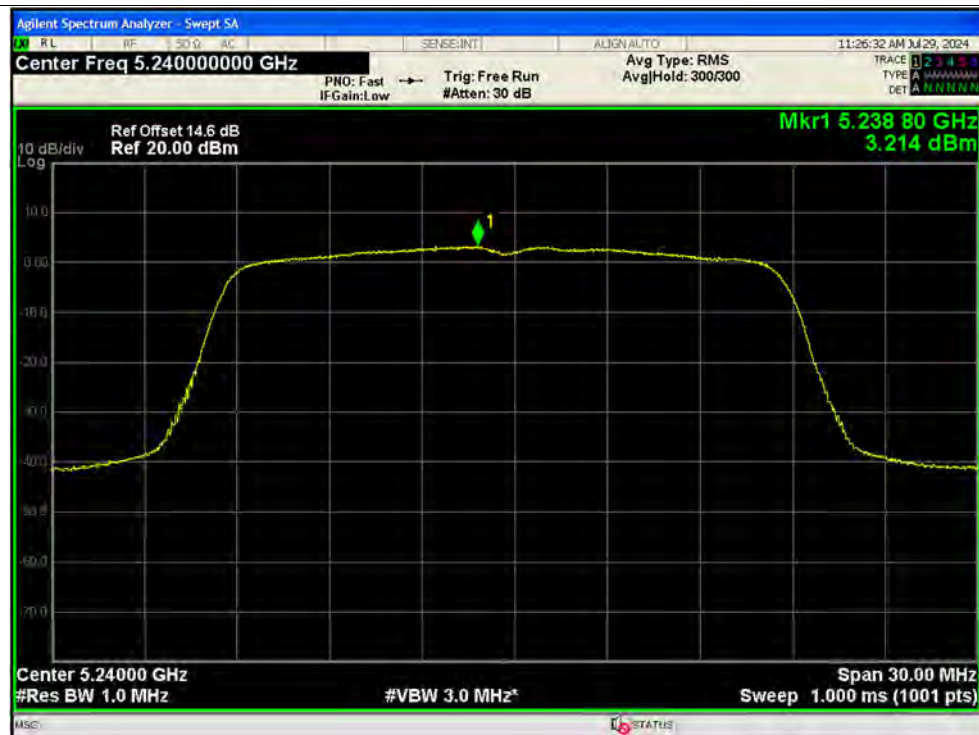



PSD NVNT ac20 5745MHz Ant1



PSD NVNT ac20 5785MHz Ant1





PSD NVNT ac20 5825MHz Ant1



PSD NVNT ac20 5745MHz Ant2



PSD NVNT ac20 5785MHz Ant2



PSD NVNT ac20 5825MHz Ant2





PSD NVNT ac20 5745MHz Ant3



PSD NVNT ac20 5785MHz Ant3





PSD NVNT ac20 5825MHz Ant3



PSD NVNT ac20 5745MHz Ant4



PSD NVNT ac20 5785MHz Ant4




PSD NVNT ac20 5825MHz Ant4



PSD NVNT ac20 5745MHz Ant1




PSD NVNT ac20 5745MHz Ant2

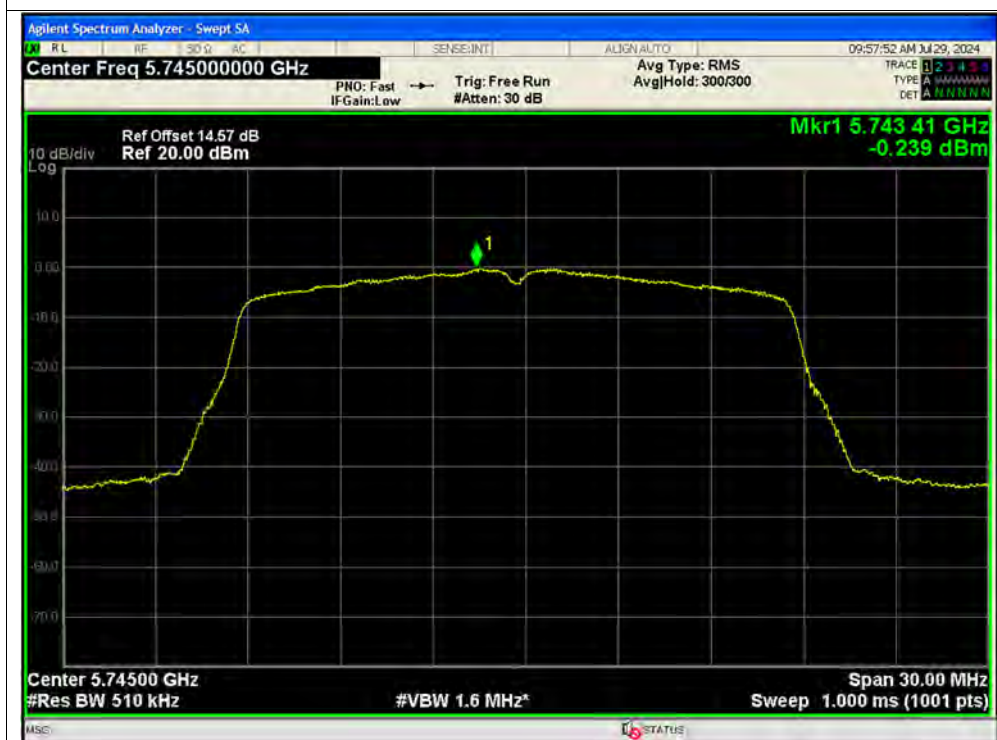

PSD NVNT ac20 5745MHz Ant3



PSD NVNT ac20 5745MHz Ant4

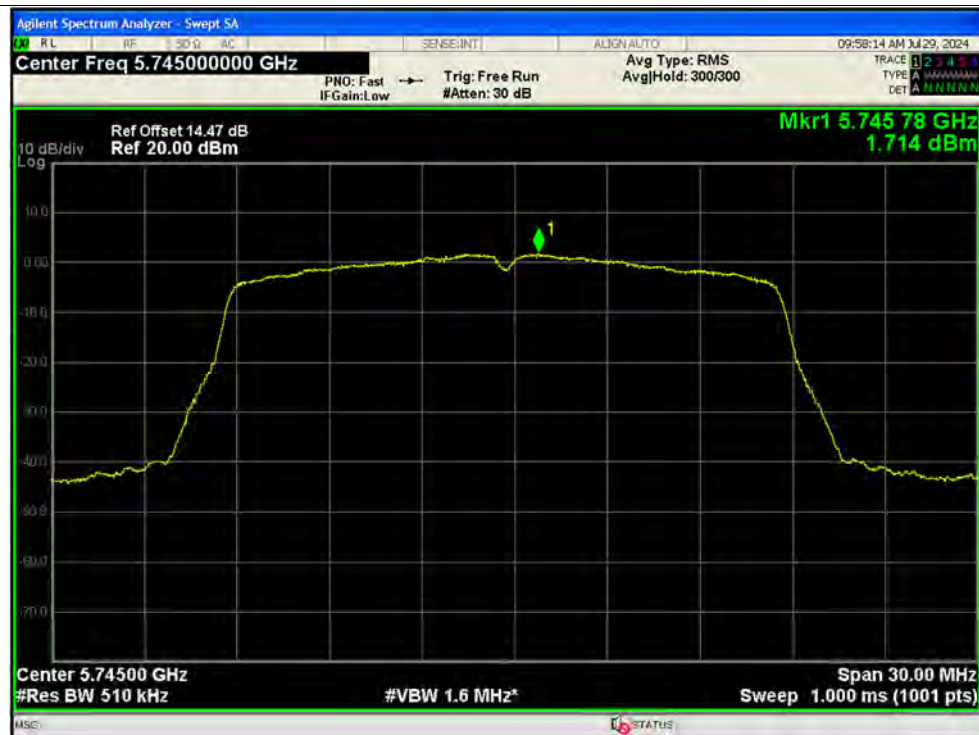

PSD NVNT ac20 5785MHz Ant1



PSD NVNT ac20 5785MHz Ant2





PSD NVNT ac20 5785MHz Ant3



PSD NVNT ac20 5785MHz Ant4



PSD NVNT ac20 5825MHz Ant1



PSD NVNT ac20 5825MHz Ant2



PSD NVNT ac20 5825MHz Ant3




PSD NVNT ac20 5825MHz Ant4



PSD NVNT ac40 5190MHz Ant1




PSD NVNT ac40 5230MHz Ant1

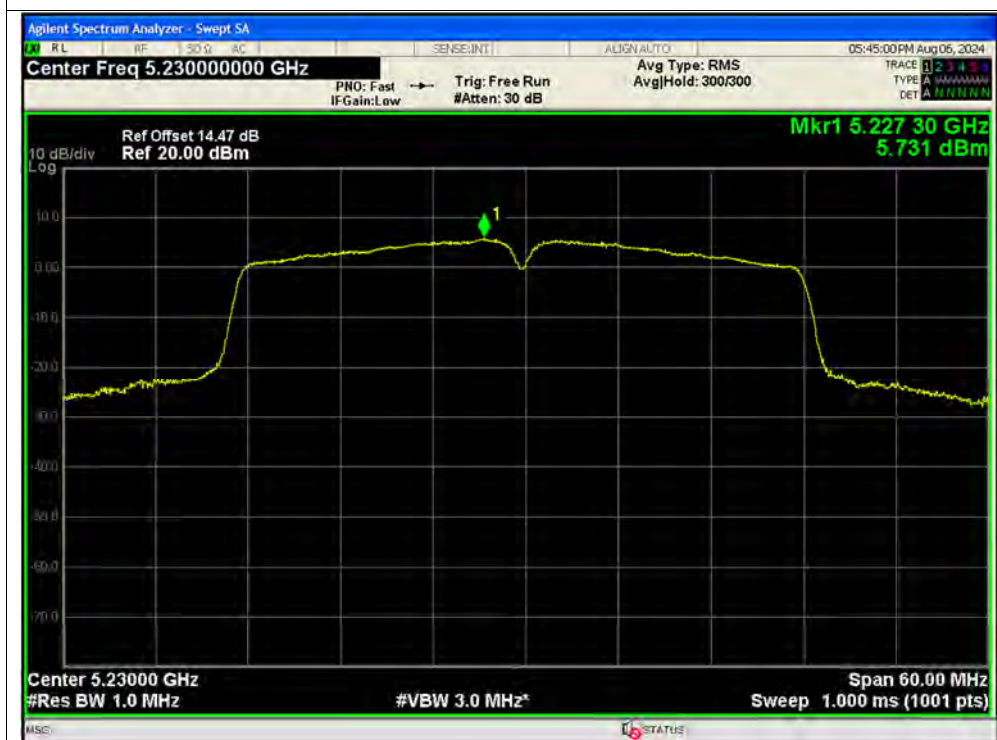

PSD NVNT ac40 5190MHz Ant2




PSD NVNT ac40 5230MHz Ant2

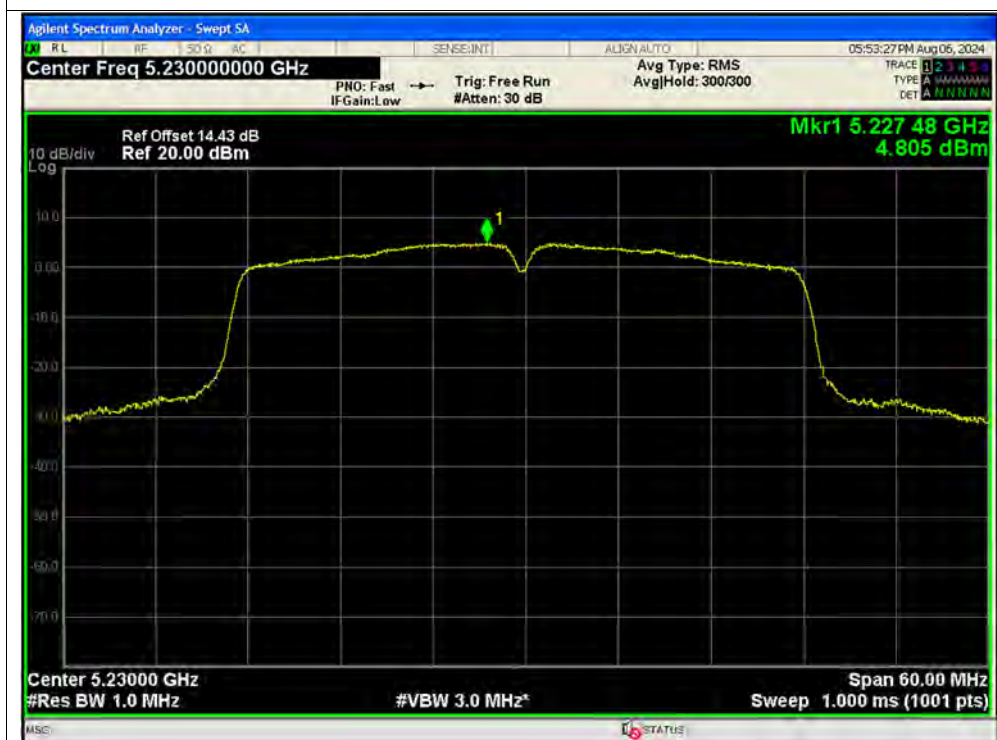

PSD NVNT ac40 5190MHz Ant3




PSD NVNT ac40 5230MHz Ant3

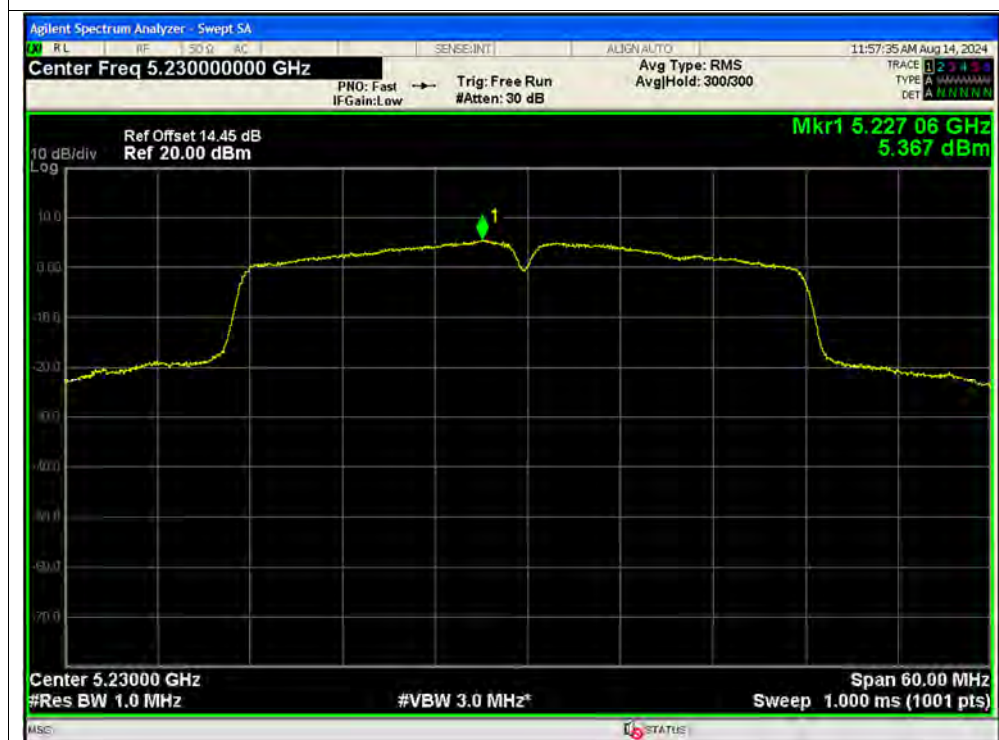

PSD NVNT ac40 5190MHz Ant4




PSD NVNT ac40 5230MHz Ant4

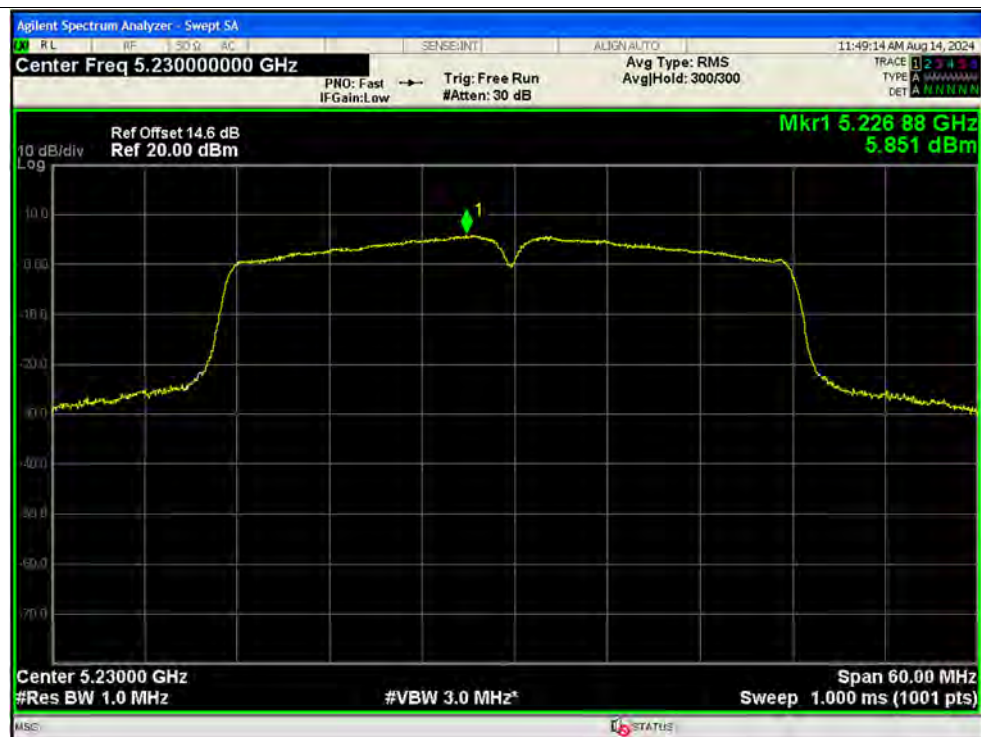

PSD NVNT ac40 5190MHz Ant1




PSD NVNT ac40 5190MHz Ant2

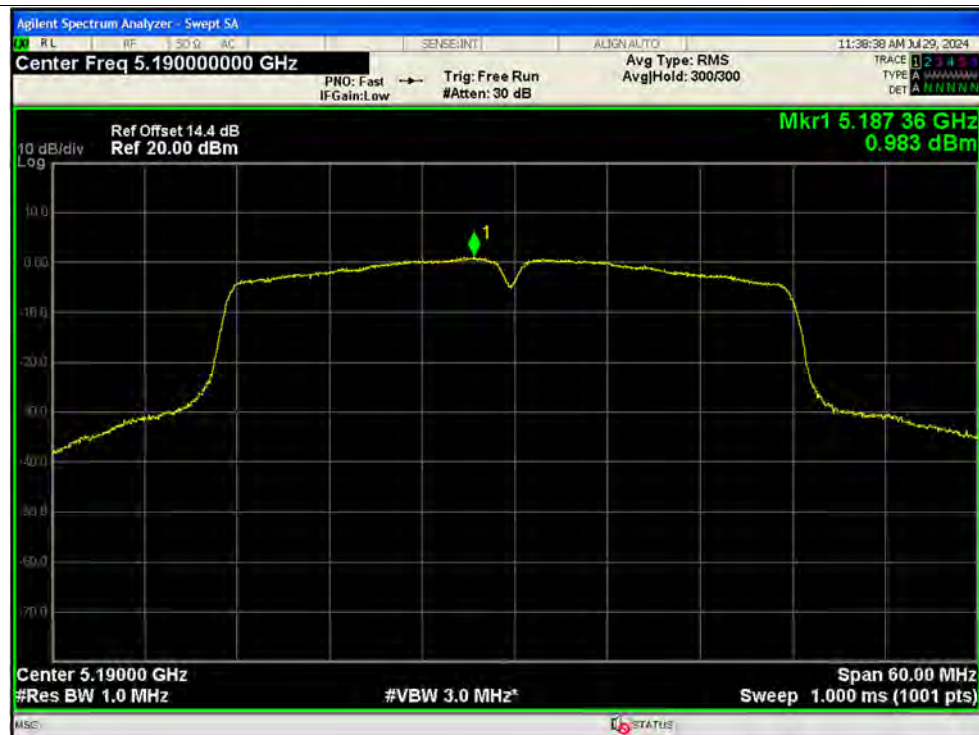

PSD NVNT ac40 5190MHz Ant3



PSD NVNT ac40 5190MHz Ant4

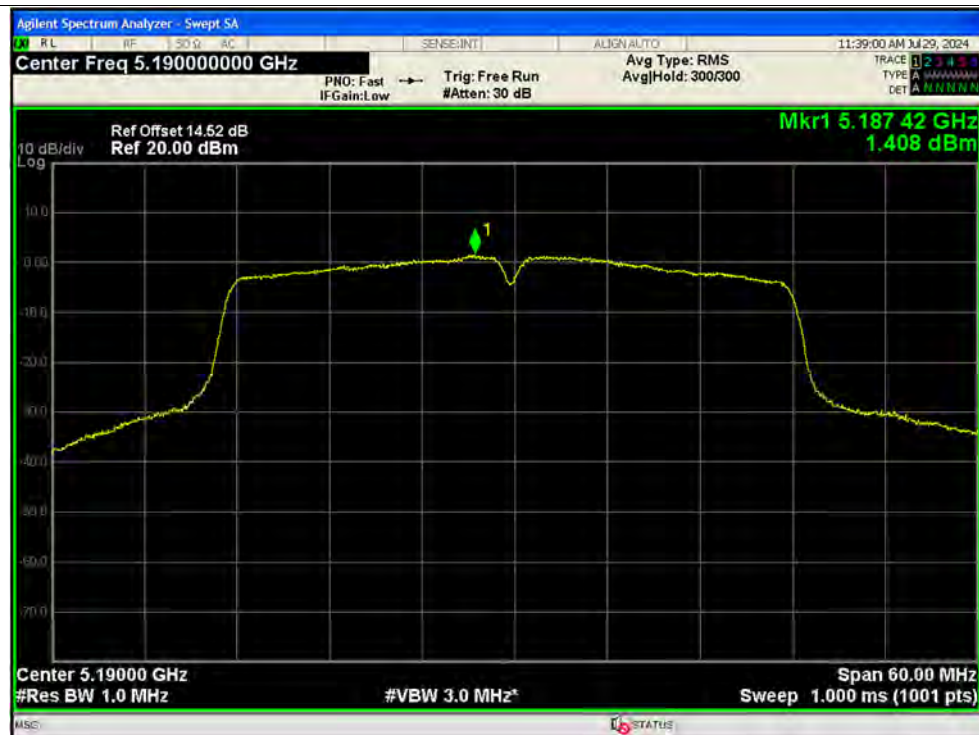

PSD NVNT ac40 5230MHz Ant1




PSD NVNT ac40 5230MHz Ant2



PSD NVNT ac40 5230MHz Ant3




PSD NVNT ac40 5230MHz Ant4

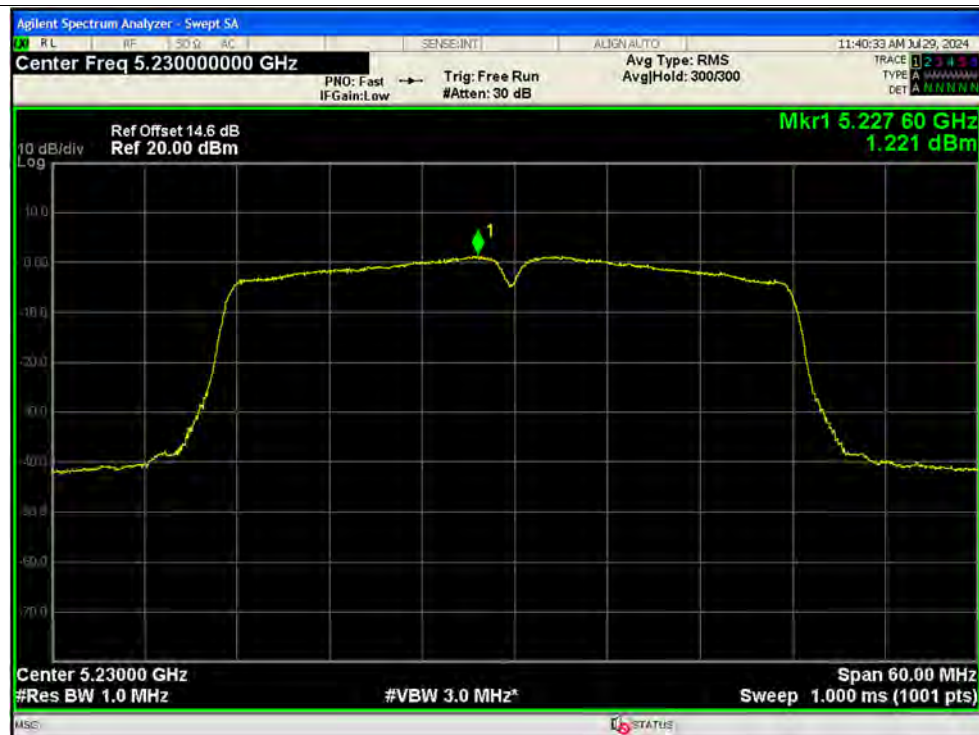

PSD NVNT ac40 5755MHz Ant1



PSD NVNT ac40 5795MHz Ant1

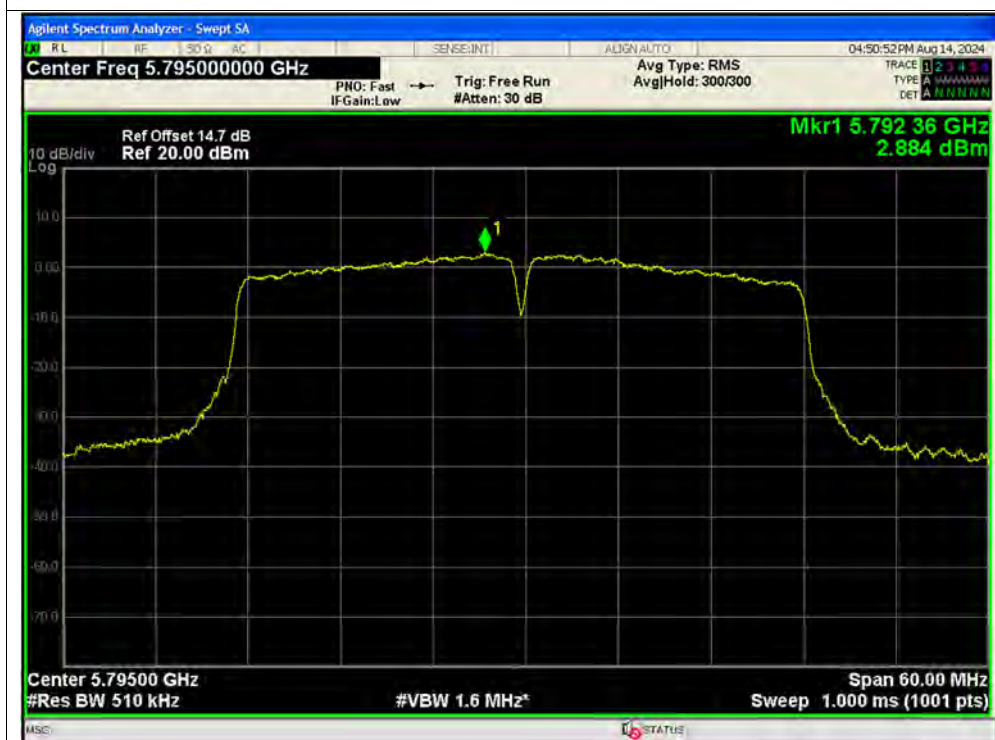



PSD NVNT ac40 5755MHz Ant2



PSD NVNT ac40 5795MHz Ant2



PSD NVNT ac40 5755MHz Ant3



PSD NVNT ac40 5795MHz Ant3



PSD NVNT ac40 5755MHz Ant4



PSD NVNT ac40 5795MHz Ant4



PSD NVNT ac40 5755MHz Ant1



PSD NVNT ac40 5755MHz Ant2



PSD NVNT ac40 5755MHz Ant3



PSD NVNT ac40 5755MHz Ant4



PSD NVNT ac40 5795MHz Ant1



PSD NVNT ac40 5795MHz Ant2



PSD NVNT ac40 5795MHz Ant3



PSD NVNT ac40 5795MHz Ant4



PSD NVNT ac80 5210MHz Ant1




PSD NVNT ac80 5210MHz Ant2



PSD NVNT ac80 5210MHz Ant3



PSD NVNT ac80 5210MHz Ant4

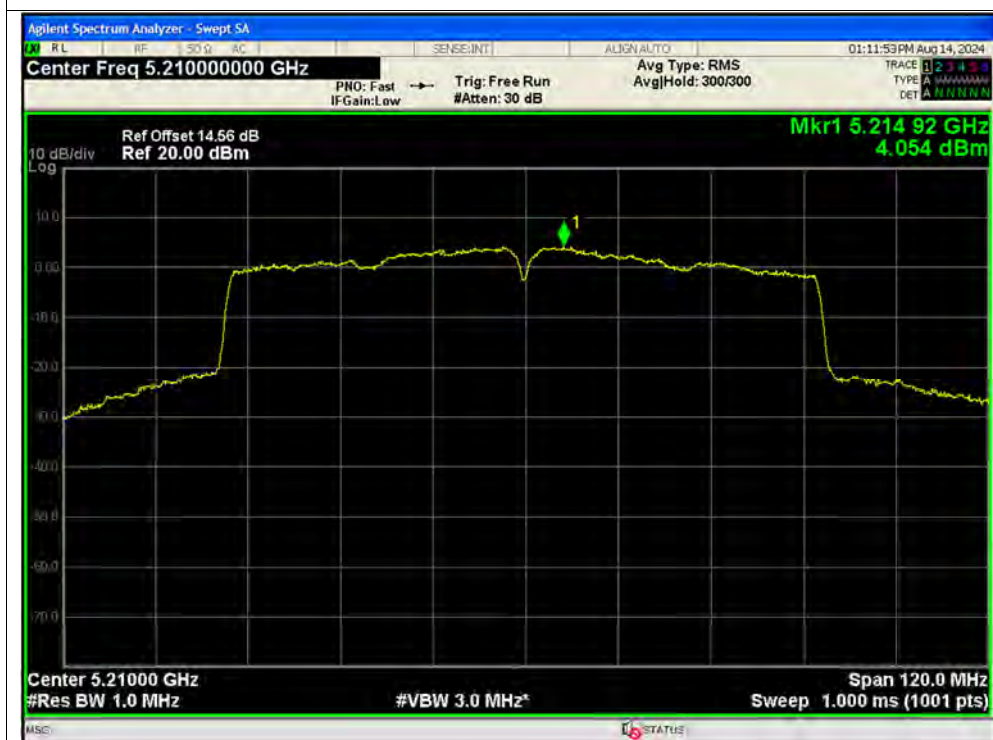

PSD NVNT ac80 5210MHz Ant1



PSD NVNT ac80 5210MHz Ant2



PSD NVNT ac80 5210MHz Ant3



PSD NVNT ac80 5210MHz Ant4



PSD NVNT ac80 5775MHz Ant1



PSD NVNT ac80 5775MHz Ant2



PSD NVNT ac80 5775MHz Ant3



PSD NVNT ac80 5775MHz Ant4



PSD NVNT ac80 5775MHz Ant1



PSD NVNT ac80 5775MHz Ant2



PSD NVNT ac80 5775MHz Ant3



PSD NVNT ac80 5775MHz Ant4

