

Installation instructions

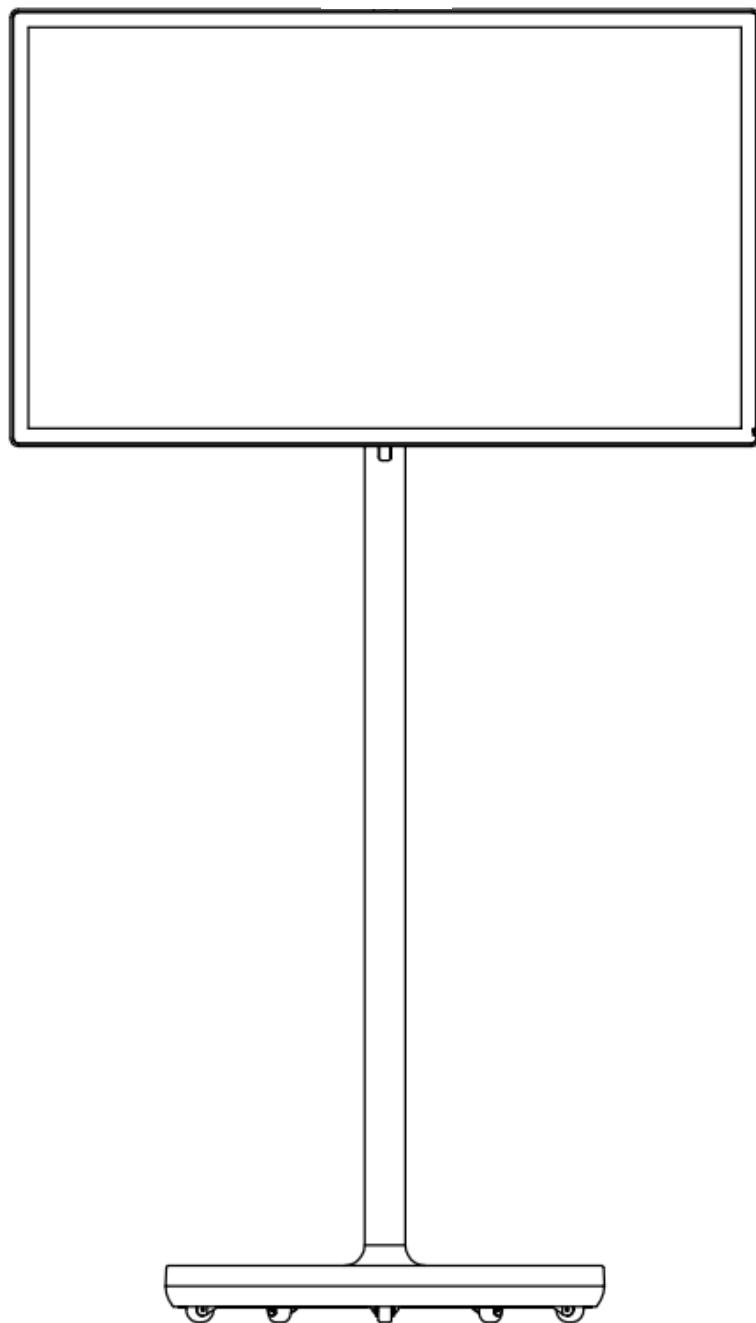


Item List

Please check if the following attachments are randomly shipped. If they are lost or missing, please contact the dealer .


Serial Number	Name	Number
1	Display screen	1
2	Base	1
3	Pillar	1
4	Adapter	1
5	Remote	1
6	Screw pack	1
7	AAA battery	2
8	Instructions	1
9	Certificate of conformity	1

Installation instructions


Installation instructions for base and rod body

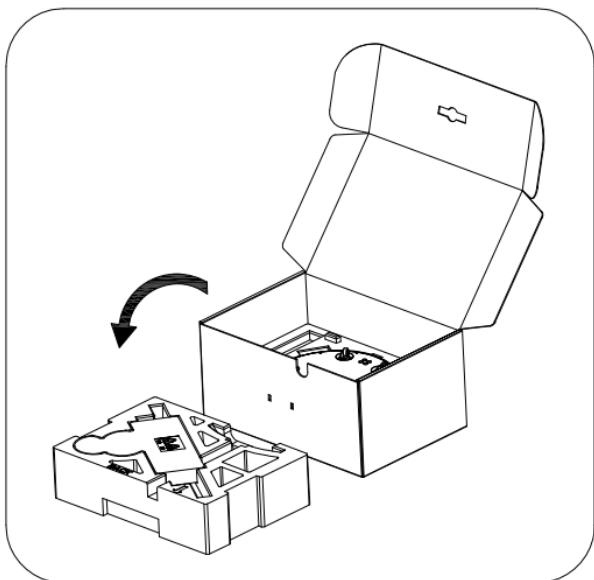


1. Remove the first layer after opening the package

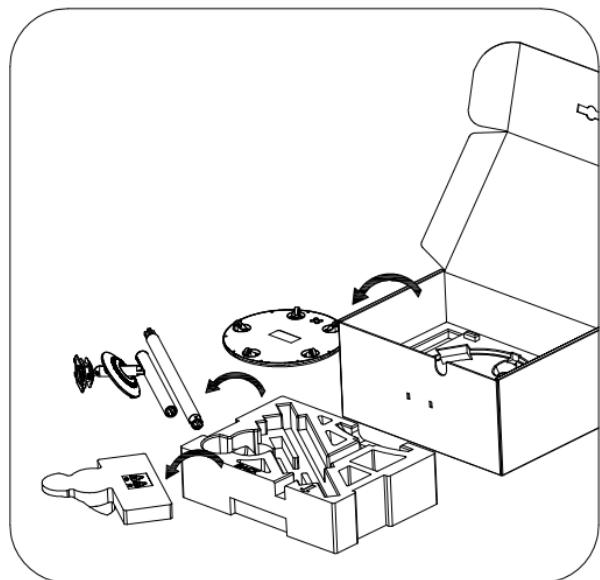

2. Remove the base and rod body

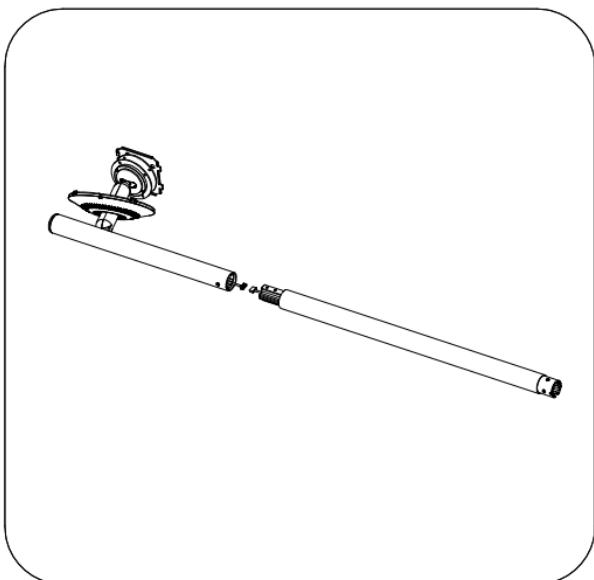


3. Connect the power wiring inside the rod

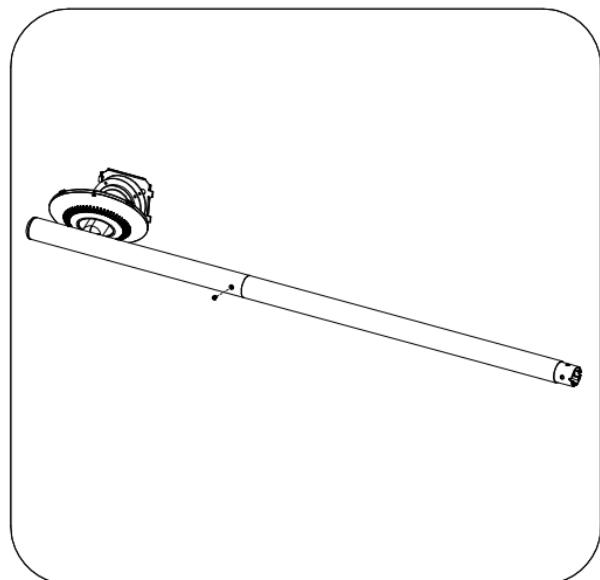


4. Align the two parts of the rod body with the slot and lock the screws


Installation instructions

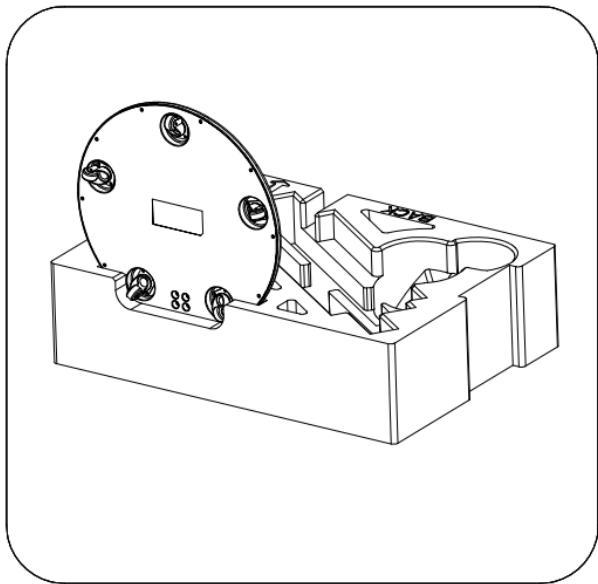

5. Place the base in the foam slot

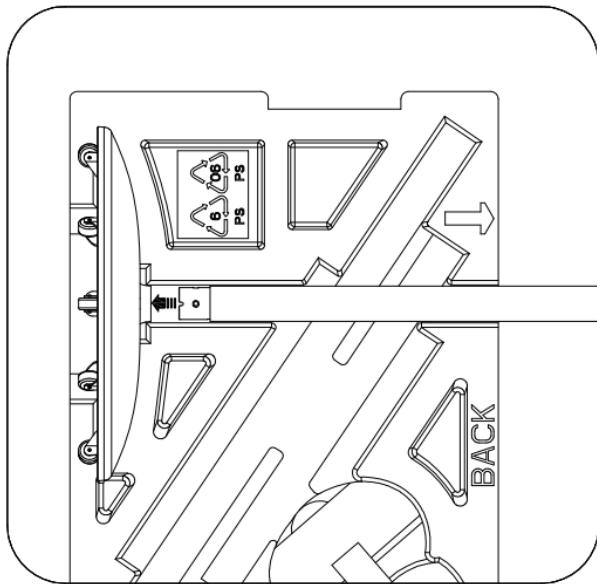


6. Align the rod body with the slot position on the base

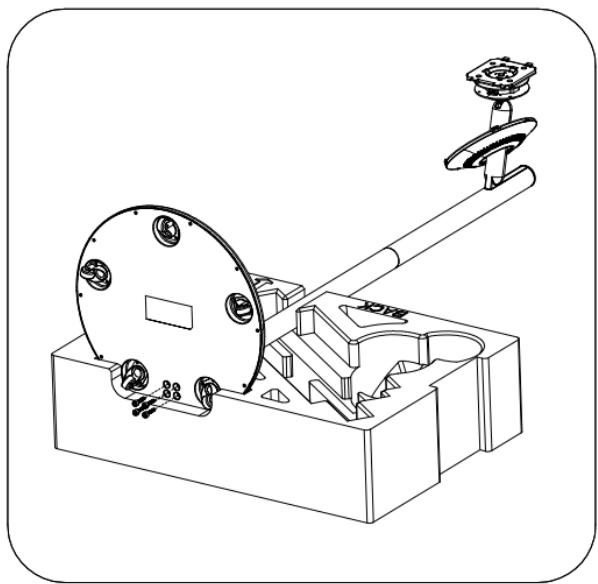


7. Align the screw holes and lock the screws

Installation instructions


Display installation instructions

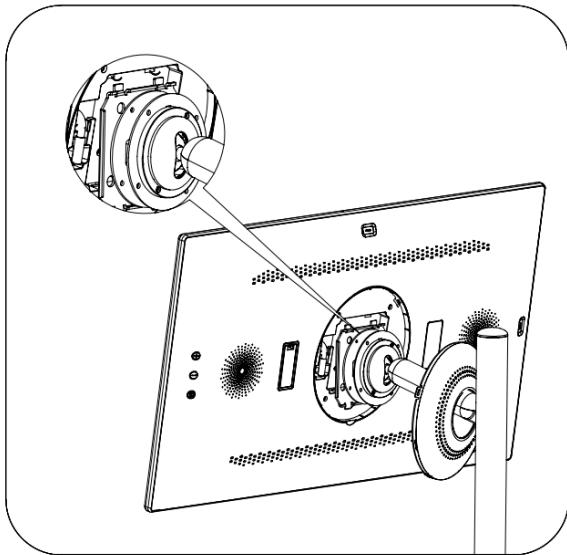


8. Tilt the display up and align it with the clamp position of the support rod

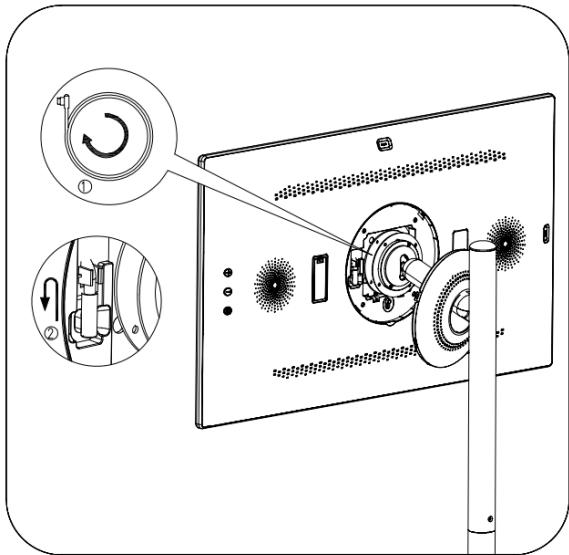

9. Wrap the power cable clockwise and plug it in. Then arrange the power cable and insert the fixing slot

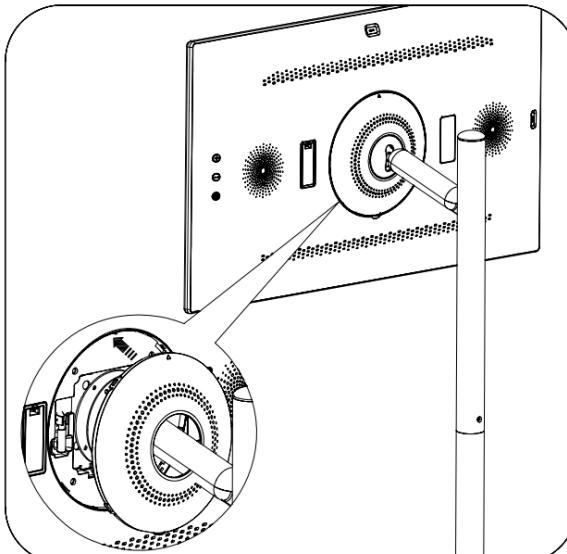

10. Align the positioning hole of the ring trim with the positioning column of the rear shell and press it


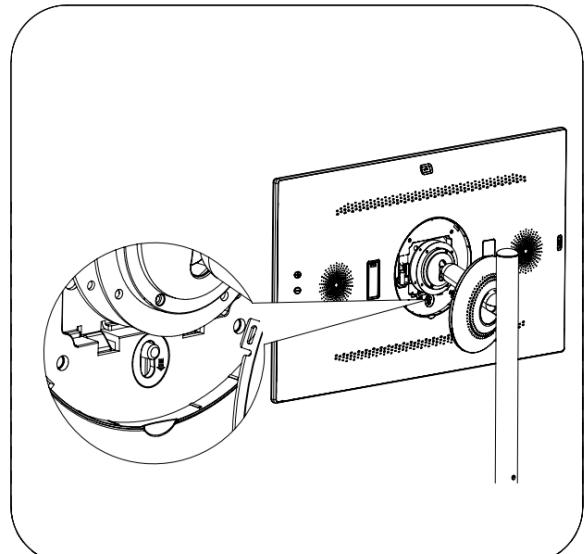


Note: During disassembly, when removing the display from the rod, you need to press the quick disassembly button


Angle adjustment

The Angle of this product can be adjusted for a comfortable viewing experience.

Note: Some applications do not support vertical display.

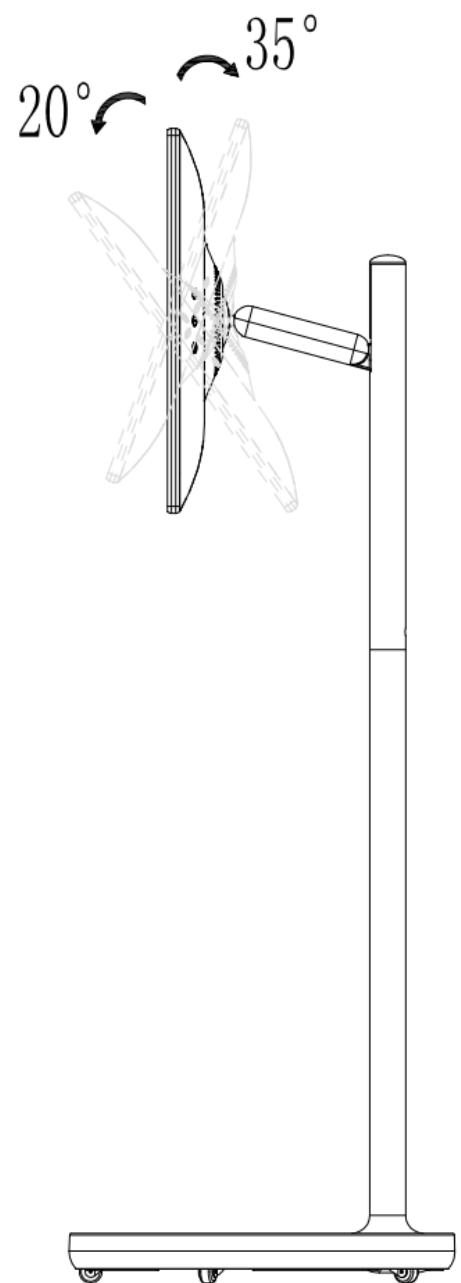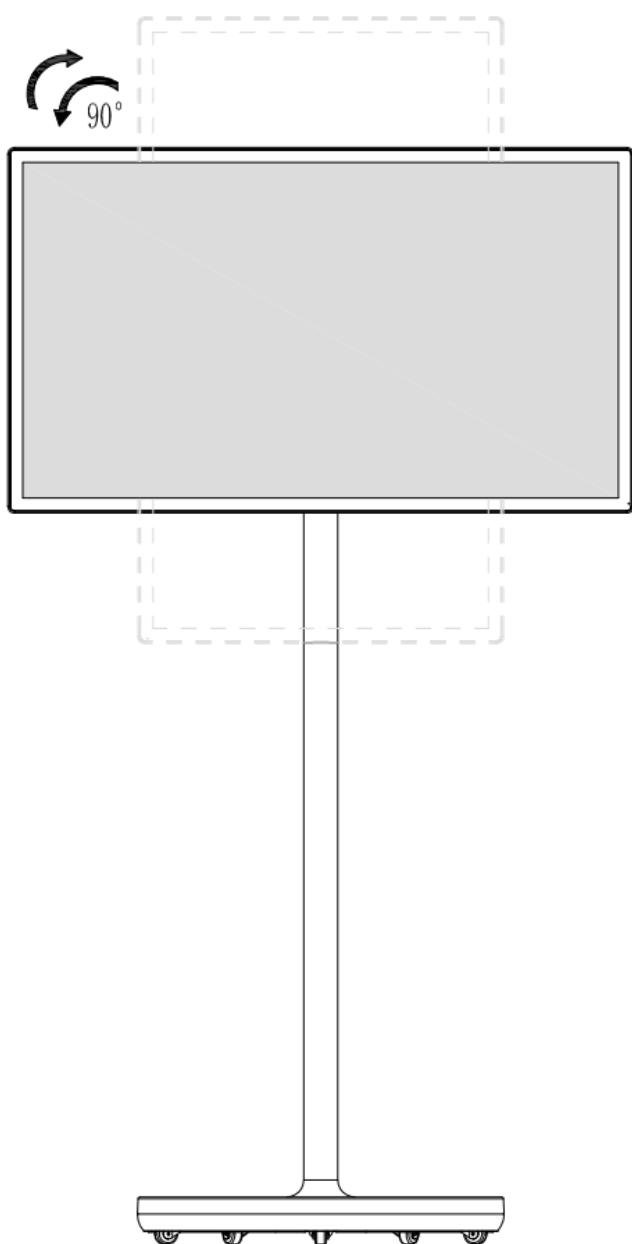

The connection of external devices

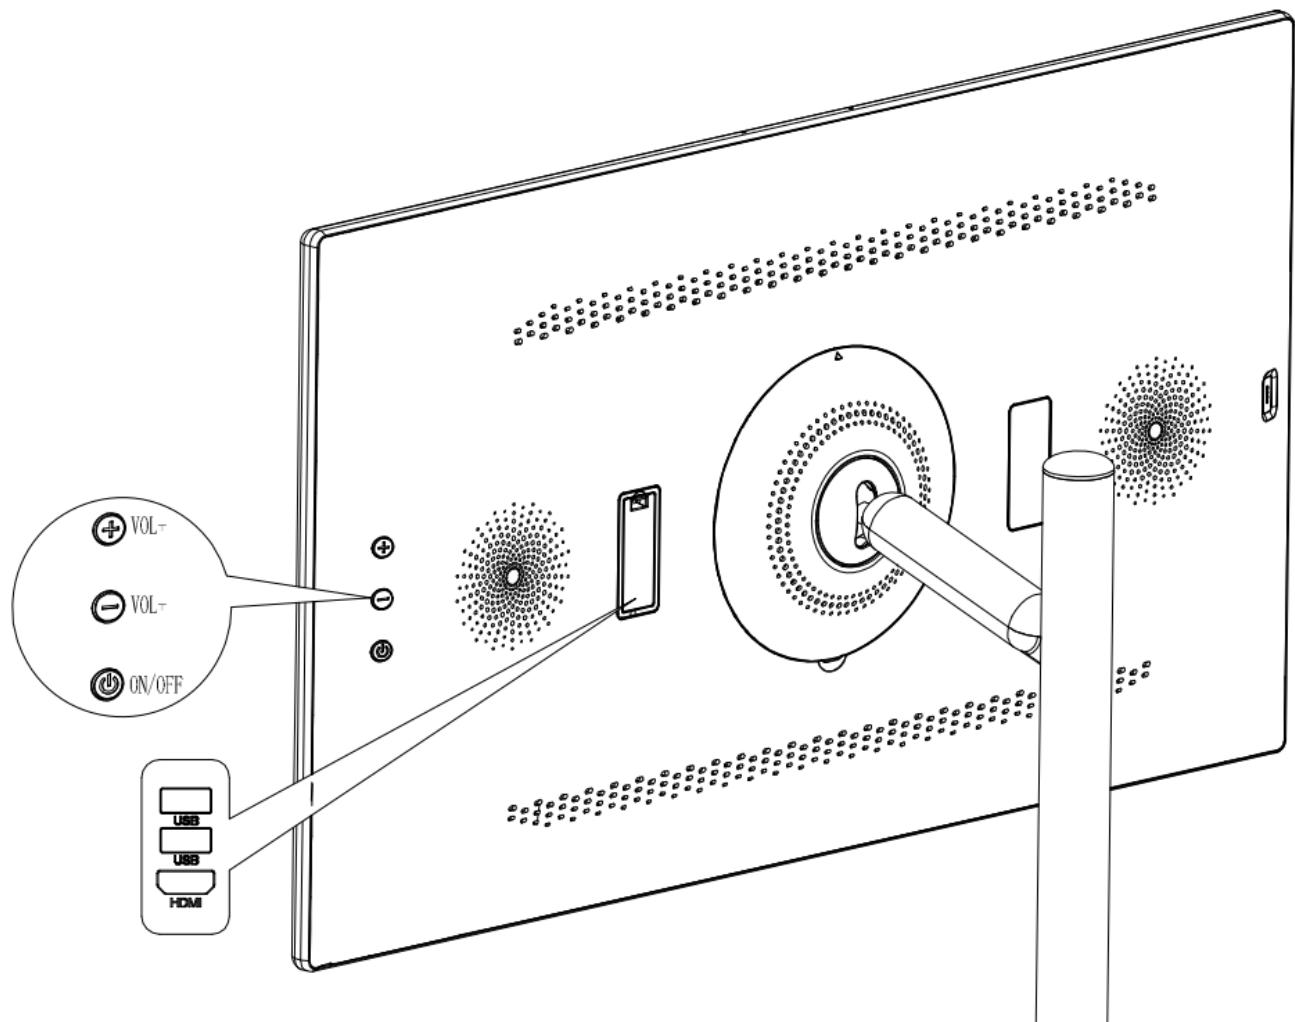


ON/OFF : Turn the machine on or off

HDMI: Hd signal input interface, support 1920*1080.


USB: Can use USB storage device, or for mouse and keyboard receiver.

TYPE C: For firmware upgrade

DC-IN: Connect the power adapter.

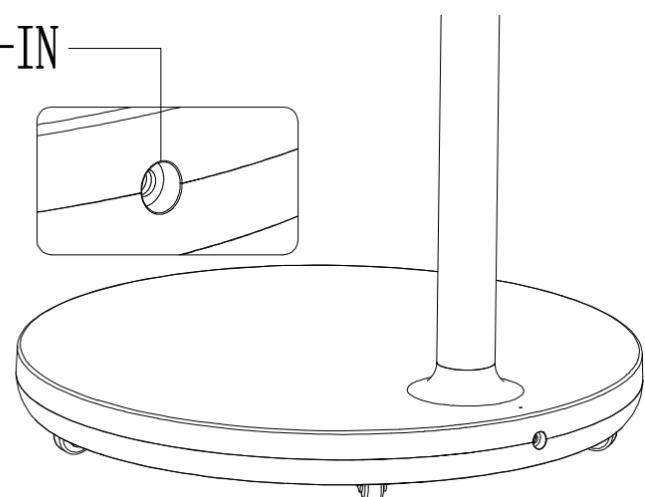


Use built-in battery

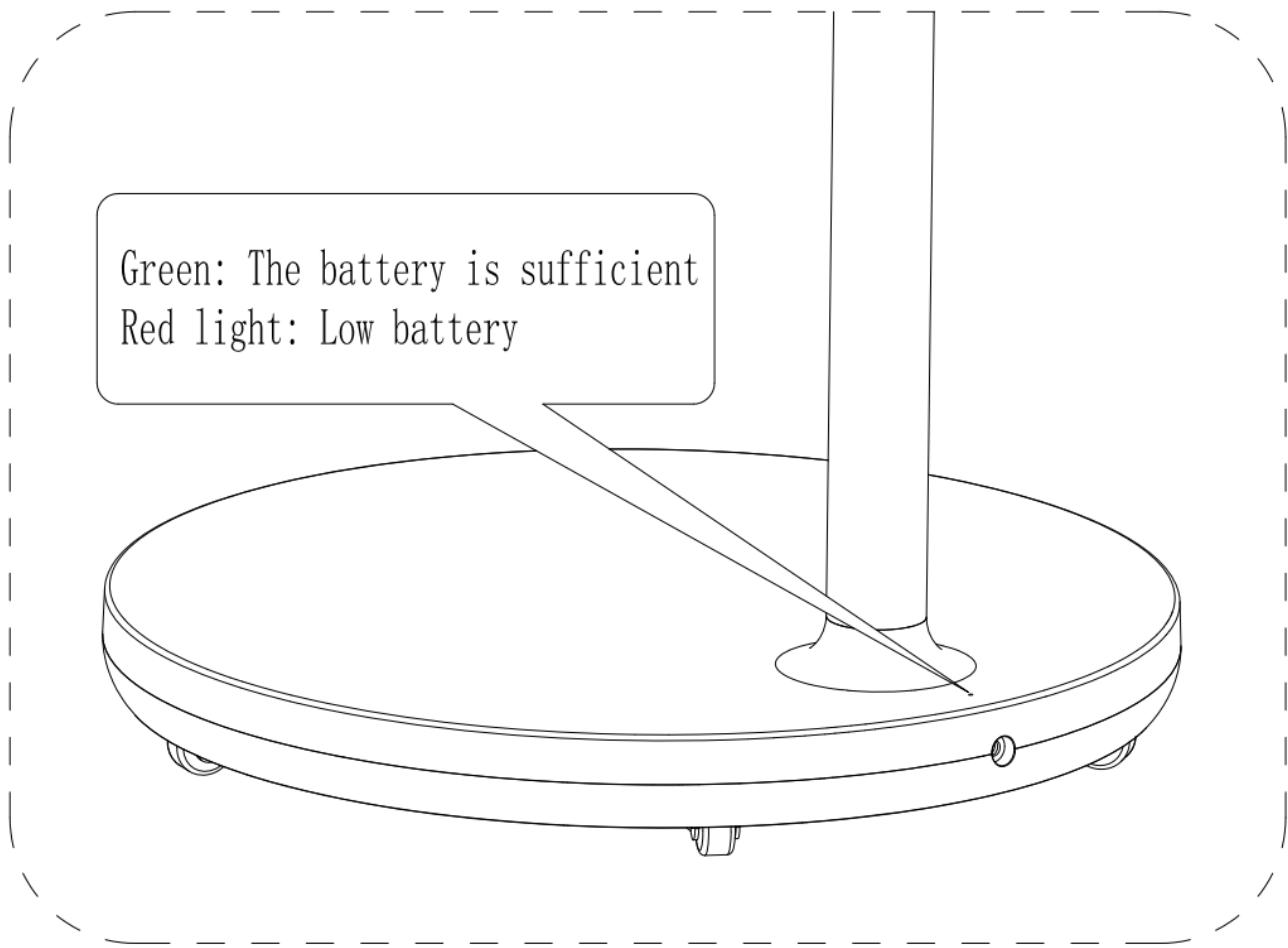

⚠ Look out:

- It takes about 4 hours to charge while using, and only 2 hours to charge fast while shutting down.
- The battery life and use time after charging will decrease proportionally with the product's use.
- The battery cannot be charged under extreme conditions.
- In the standby state, the remaining battery power will naturally decrease.
- To extend battery life, it is recommended to charge the battery after a period of use, rather than keep the battery fully charged.
- Keeping your battery at 50% will help extend battery life.
- The maximum usage time after charging is 3 hours.
- Battery life may vary depending on various factors such as connected device, operating temperature, use time and user Settings, so actual battery life may vary depending on usage.

Flying mouse remote control instructions

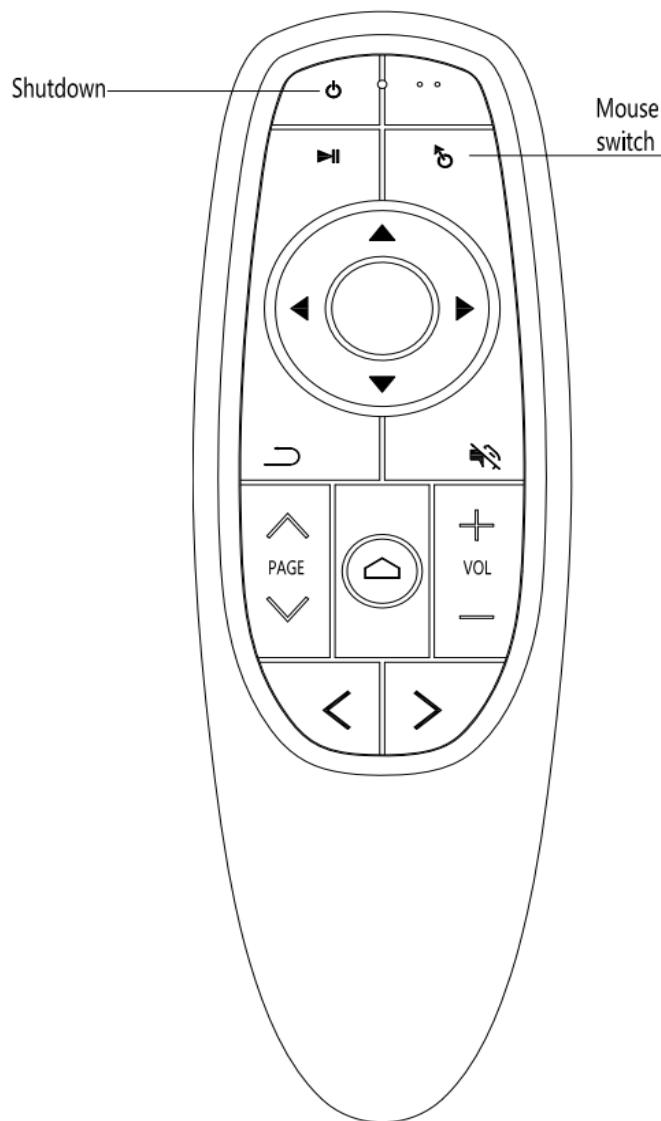

Remote control battery installation method

Remove the battery case cover and install two AAA (No. 7/1.5V) batteries, ensuring that the polarity of the batteries is consistent with the polarity marks "+", "-" in the remote control battery case.

Pairing instructions for the Bluetooth remote control:

Long press the "OK + Back" button until the indicator light flashes continuously, then in the "Settings - Bluetooth" menu on the screen, click to pair with a new device, search for the Bluetooth device named "BLE_G10", select the device and click to pair, and the remote control pairing is completed.

Bluetooth Settings

Click "Settings > Bluetooth", turn on Bluetooth, and the system will start searching and displaying a list of nearby available Bluetooth devices. Click on the name of the device you want to connect to, and follow the system's instructions. Once the pairing is successful, you can view the corresponding device name in the "Paired Devices" section.

Wireless Network Connection

Click on "Settings > WLAN" and turn on WLAN. The system will start searching for and listing available wireless network signals. Click on the network you want to connect to. Networks  with a  icon indicate that they are encrypted and require the correct password to connect to the network.

Note: You can perform more system Settings in Settings as required.

FCC warning statements:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The device has been evaluated to meet general RF exposure requirement. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.