
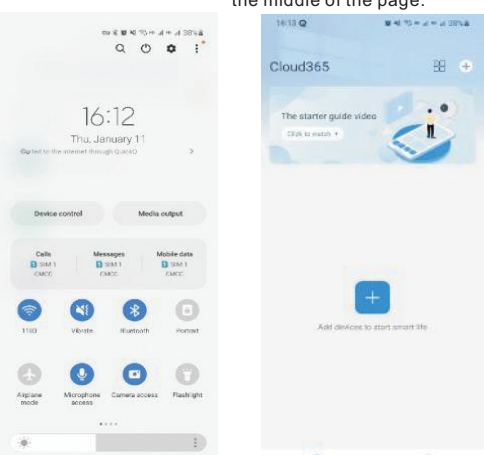
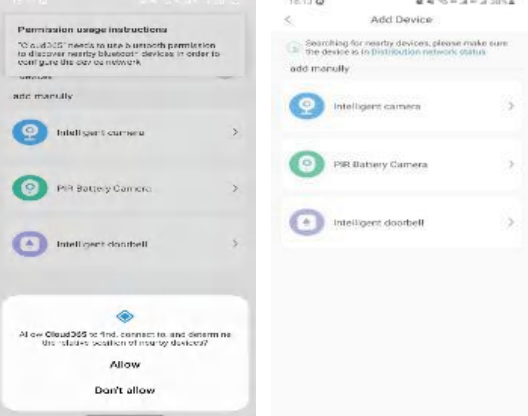
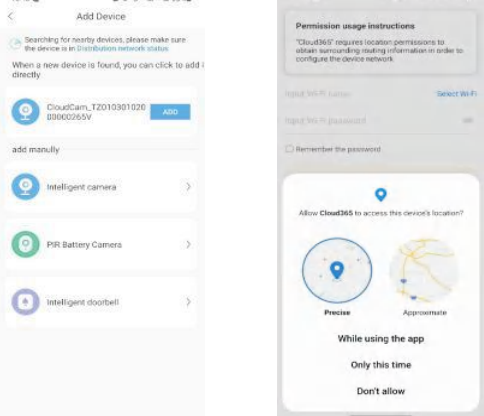
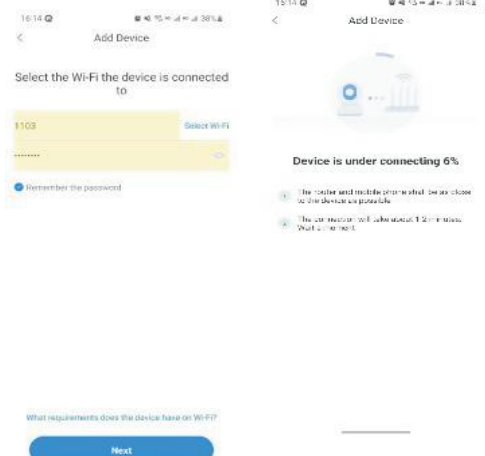
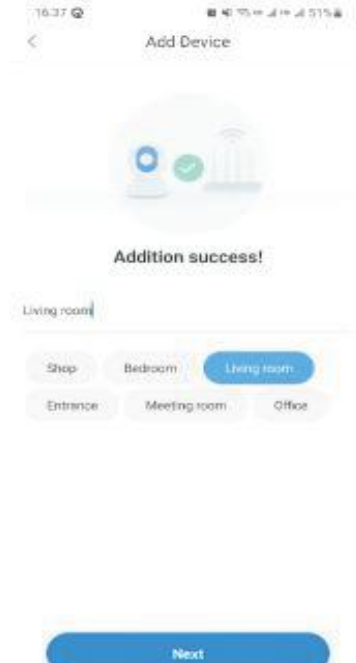
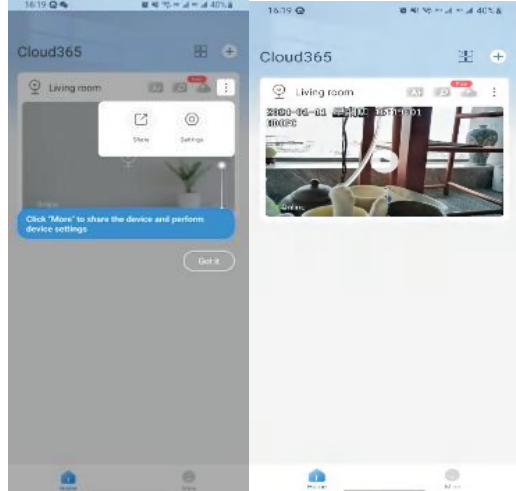
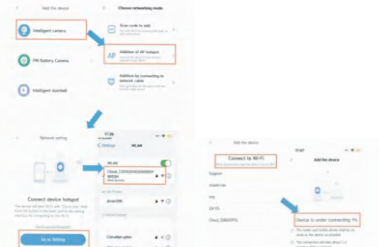

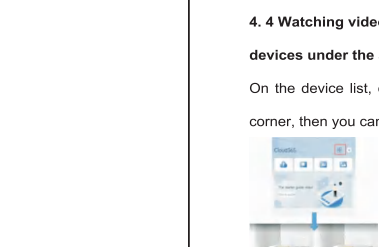
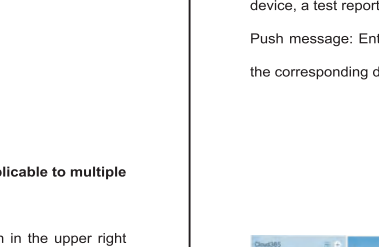
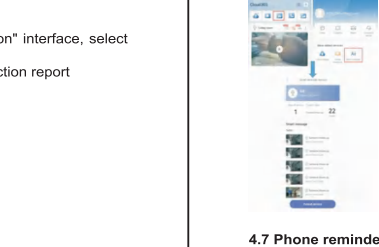
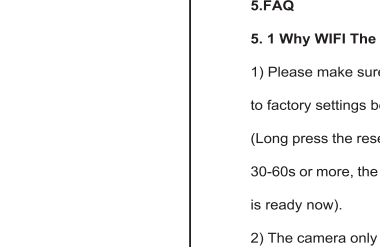
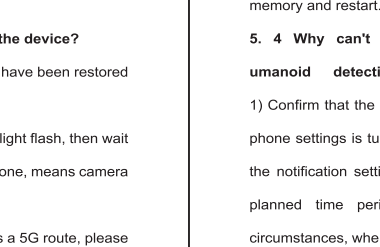
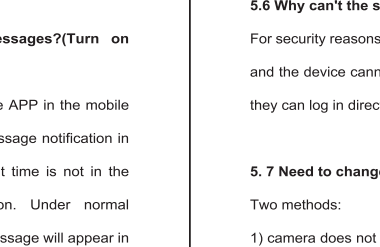
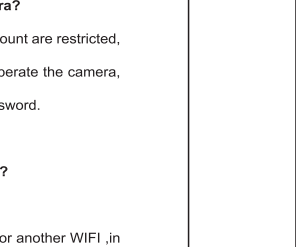


Camera wireless charger  Wireless charging, Hidden Camera, one device fulfilling your diverse demands!	CONTENT Important Note:.....1 1.Mobile APP download.....2 2. How to add a camera.....2 3. Add smart camera.....5 3.1 Connect via Bluetooth(Recommend This Method).....5 3.2 Addition of AP Hotspot added.....9 4.Features.....9 4.1 Live preview interface.....9 4.2 Rotating Lens (PTZ).....10 4.3 Video playback.....10 4.5 Screen inspection.....11 4.6 Smart reminder.....12 4.7 Phone reminder.....13 5.FAQ.....14 5.1 Why WiFi The connection method cannot add the device?.....14 5.2 Why is the recording intermittent?.....14 5.3 Choose to record continuously or intermittently after inserting the TF card?.....14 5.4 Why can't my phone receive alarm messages?(Turn on umonoid detection?and olice? feature).....15 5.5 What should I do if the camera is disconnected?.....15 5.6 Why can't the shared account operate the camera?.....16 5.7 Need to change WIFI How to connect a camera ?.....16	 The device itself does not come with any numerical identification. The illustrations below are provided for ease of use and understanding, highlighting five buttons from left to right, referred to as Button 1, Button 2, Button 3, Button 4, and Button 5. This will help you operate and comprehend the device's functions more effectively.	Please read the following instructions regarding the power before using: 1. To ensure proper device functioning, please do not remove the lithium battery and connect the device directly to the power source. 2. Upon initial device connection, please remove the plastic separator from the lithium battery compartment, ensure that the power switch is in the "ON" position, and press and hold the reset button for 5 seconds. Then, wait for 1-2 minutes as the device's camera automatically detects and resets. Proceed to connect to WiFi following the regular process. 3. In case of a complete power outage, whether due to plugging in or installing the battery, kindly wait patiently for 1-2 minutes. The device will automatically reconnect its camera functionality without any manual operation required. 4. For reliable, long-term security monitoring of the device, it is advisable to use the power cord for connection to avoid any monitoring vulnerabilities caused by insufficient battery power	Important Note Regarding Wireless Charging Function: To effectively conserve energy, the wireless charging function of this device can only be used when the device is connected to a power source. This device supports wireless charging for phones that have Wireless charging capabilities and are compatible with Android, and other systems. The device is equipped with a built-in 3.7V, 2600mAh Li-ion battery. When connected to a power source, the wireless charging power can reach up to 15W. Before using the wireless charging function, please ensure that the Wireless charging module of your phone is approximately aligned with the installation position and place it on the device accordingly. This will prevent charging issues caused by significant misalignment. Please pay attention to the above important notices before using the wireless charging function.	Important Notice: Clock Function for the Device 1. The clock function of this device cannot automatically synchronize with the internet for accurate time. After starting the device for the first time, please press and hold Button 5 to manually adjust the time. 2. For specific clock setting instructions, please refer to the following detailed adjustment guide. 3. Once the time is successfully set, when button 5 is held down, the clock screen will turn off, but it will continue to keep accurate time. When button 5 is pressed again, the time will be displayed normally. 4. Please note that the normal display of the clock requires continuous power supply to the device, such as ensuring that the internal battery is not depleted or directly connecting to a power source. If there is a power interruption, reopening the clock may result in an inaccurate time display, requiring the time to be adjusted again. Please take note of the above important instructions to ensure the proper functioning of the clock function on the device.	Steps to Set Up Clock Function: 1. Press and hold the number 5 key for 2 seconds to automatically power on the device. 2. Use the number 4 key to control the adjustment of the clock function for hours, minutes, and seconds, alternating between them. 3. Single-click the number 4 key to make the hour digits of the clock flash. 4. Use the number 3 key to adjust the hour digits. 5. Single-click the number 4 key again to make the minute digits flash. 6. Use the number 2 key to adjust the minute digits. 7. Single-click the number 4 key once more to make the second digits flash. 8. Use the number 1 key to adjust the second digits.	Important Note: 1) Please read the manual before set up the camera, it will help you a lot and saving your times 2) Please fully charge and reset the camera before first time use 3) The camera can only be set up with 2.4g Wi-Fi network. (But you can use access live stream with 4G/5G network once you set it up with 2.4g first) 4) Please format the Micro SD to FAT32 and install that when powered off 5) Ensure the phone, router and camera is close enough when you're ready to pair them. (the Wi-Fi signal should be strong enough) 6)Reset can solve most of the problems well. (Press and hold the reset for about 10 seconds, and see the lights through the hole flashing to indicate that the reset is successful, then give it about a minute or 2 wait for the device to reboot)	1.Mobile APP download To download our mobile app, simply search for "Cloud365" in your app store.  Scan the QR code below to download the APP 2. How to add a camera When using the app for the first time, you will need to register by providing your email or mobile phone number. Click the "Register" button to complete the user registration and you can log in for start using the app. 	Then, ensure the camera has power. After the WiFi is powered on (there is a button near the battery), the WiFi indicator will light on (Near the Bluetooth power button), wait 30-60seconds, you can hear the device's motor sound, the camera lens is rotating, which means camera is reboot, when it's done, that camera is ready now. (If the camera does not work properly, please long press the Reset button to restore the factory settings). 3. Add smart camera 3.1 Connect via Bluetooth Step 1. Turn on your cell phone's Bluetooth Step 2. Open Cloud 365 software, click the "+" button in the middle of the page. 	Step 3. Open Cloud 365 software permissions, allow Cloud 365 to search and connect to your phone's Bluetooth. Step 4. In Add Device page, Cloud 365 will automatically search for the camera. 	Step 5. After searching the device "CloudCam_T20 XXXXXXXXXXXXXXXX XX", click the "ADD" button next to the device name. Step 6. Jump to the WIFI connection page and set the corresponding permissions. 
---	---	--	--	--	---	---	---	---	--	---	--

Step 7. Fill in the WIFI name and password, click "NEXT". Step 8. Wait for the automatic connection, the process will take about 1 to 2 minutes. 	Step 9. After successful connection, "Addition success" will appear, you can set the name tag for this camera. 	Step 10. Jump to the use page, you can start using the camera normally. 	3. Addition to AP Hotspot (Recommend This Method) To add a camera using this method, follow these steps: • Open the app and go to the homepage • Click the "+" button, select "Intelligent Camera," and then choose "Addition of AP Hotspot" • Follow the wizard to connect to the WiFi with the "Cloud XXXX" field, then enter app, and click "Next" after a successful connection • Select the WiFi network (router) that you want to connect to, enter the password, and click "Confirm" Wait for the app to display "Addition success" to confirm that the network configuration is complete.	4.Features 4.1 Live preview interface  By clicking the Operation button, you can enter the operability interface, in which the night vision mode simply switches the display to black and white. It is not a night vision effect (the device does not have night vision lights) despite being described as such. In reality, it does not provide true	night vision functionality. 4.2 Rotating Lens (PTZ) By clicking the PTZ button, you can enter the camera control interface. You can rotate the lens by clicking the dial on the screen. 	4.3 Video playback Reminder: Cloud video playback needs to be purchased and paid before it can be used. A: Select "Playback" at the bottom right corner of the live interface to view the playback video of the camera. B: Switch playback path; you can choose to watch cloud playback/memory card playback. 	4.4 Watching videos on multiple screens (only applicable to multiple devices under the same account) On the device list, click the "Multi-split screen" button in the upper right corner, then you can watch videos on multiple screens 	4.5 Smart reminder In the device list, click the "Smart Alert" button, or in the "My" interface, click the "Smart Alert" button. If there is currently a device that supports the purchase of value-added services, click "Buy Now", select the device, and make payment. When someone appears, use cloud AI analysis to filter invalid alarms for you, reduce corresponding false alarms, and provide you with effective and accurate alarms Enter the "Smart Reminder" interface, select the corresponding device, and you can view the test report 	4.6 Phone reminder To enable phone reminder, click the "Phone Reminder" button on the device list or on the "My" page. If there is a device that supports purchasing value-added services, click "Buy Now", select the device, and make the payment. Once the phone reminder service is activated, the platform will immediately call the set phone number to notify you when suspicious activity is detected by the device's alarm through intelligent analysis. 	5.FAQ 5.1 Why WiFi The connection method cannot add the device? 1) Please make sure that the device has power and has been restored to factory settings before adding the device (Long press the reset button waiting the WiFi indicator light flash, then wait 30-60s or more, the camera lens will rotating, when it done, means camera is ready now) 2) The camera only supports 2.4GHz WiFi signal, if it is a 5G route, please turn on the dual-band mode of the router and select the 2.4G signal. 3) Make sure that the distance between the router and the camera is within a reasonable range. 5.2 Why is the recording intermittent? The cloud service trial package, the alarm recording package and the TF card event recording mode will only record when the camera detects that the camera has moved, so the recording may not be continuous. 5.3 Choose to record continuously or intermittently after inserting the TF card? Make sure that the video viewing camera is selected as SD card, and format the SD card first. If it is still intermittent, it may be that the SD card has a bad pixel. If it is lost once or twice a day, about 2 minutes at a time, it is the camera to release the 	memory and restart. It is normal imagination. 5.4 Why can't my phone receive alarm messages?(Turn on umonoid detection?and olice? feature) 1) Confirm that the notification push permission of the APP in the mobile phone settings is turned on, and then turn on the message notification in the notification settings of the APP, and the current time is not in the planned time period for stopping the notification. Under normal circumstances, when an abnormality is detected, a message will appear in the notification bar of the mobile phone. Whether there is a sound or vibration depends on the settings of the mobile phone. 2) When viewing the real-time screen in the APP, you will not receive an alarm from the camera you are watching, because the default user is focusing on the monitoring screen at that time, and there is no need for an alarm. Using advanced intelligent alarm push algorithm, alarm messages will not be pushed frequently, but the camera will record and record all alarm messages. 5.5 What should I do if the camera is disconnected? First confirm whether the power supply and network are normal, and then power off and restart the camera if there is no problem. If it is still disconnected after restarting, please remove the camera in the APP and add it again. 	5.6 Why can't the shared account operate the camera? For security reasons, the permissions of the shared account are restricted, and the device cannot be operated. If others want to operate the camera, they can log in directly with the bound account and password. 5.7 Need to change WIFI How to connect a camera ? Two methods: 1) camera does not change the place and can search for another WIFI (in the parameter setting menu -> change the WIFI connected to the device -> change the corresponding WIFI) 2) The camera has changed places and cannot find another WIFI, so reconfigure the camera 
--	--	---	---	---	---	---	--	--	--	---	--	--

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.