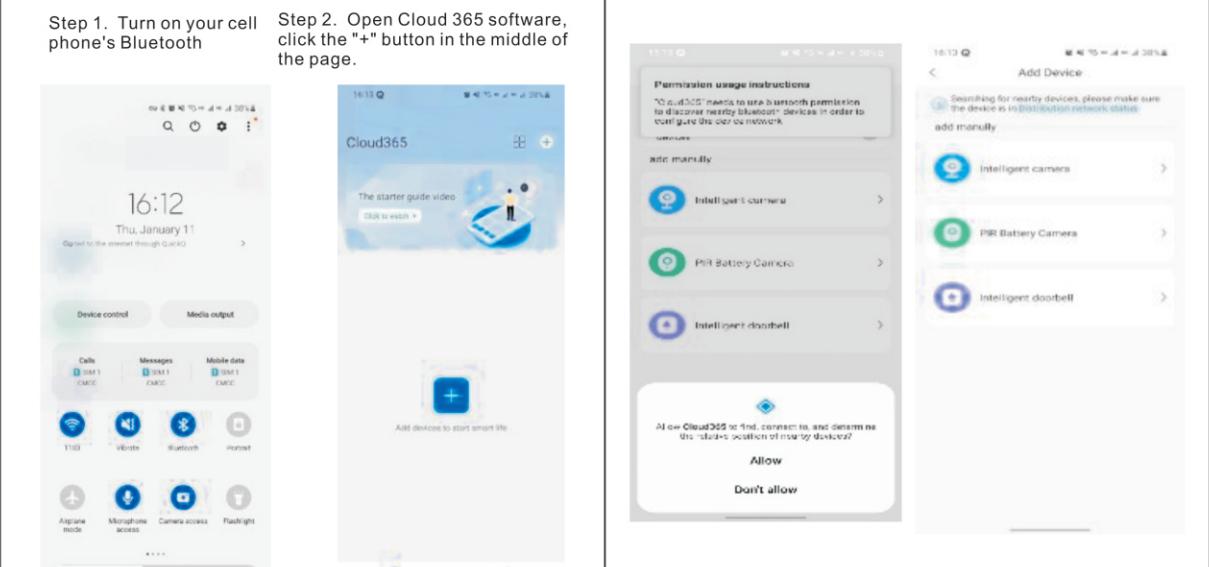
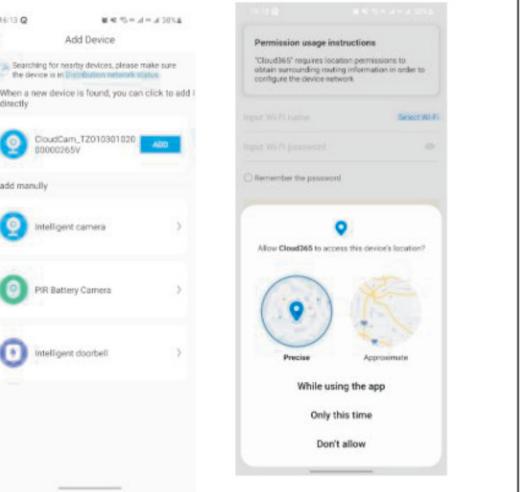
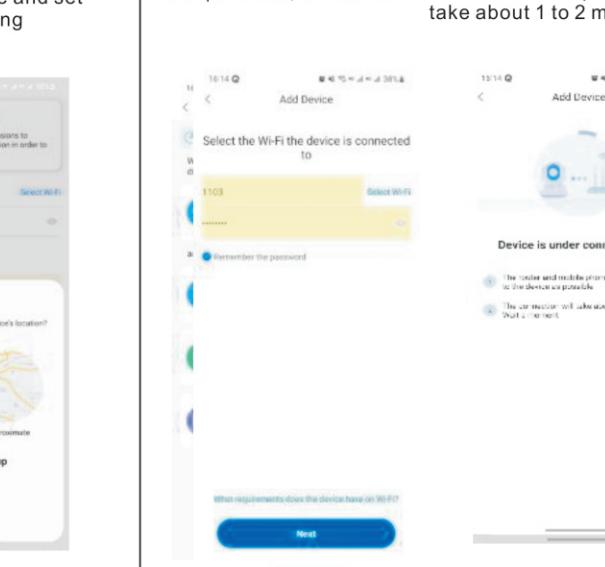
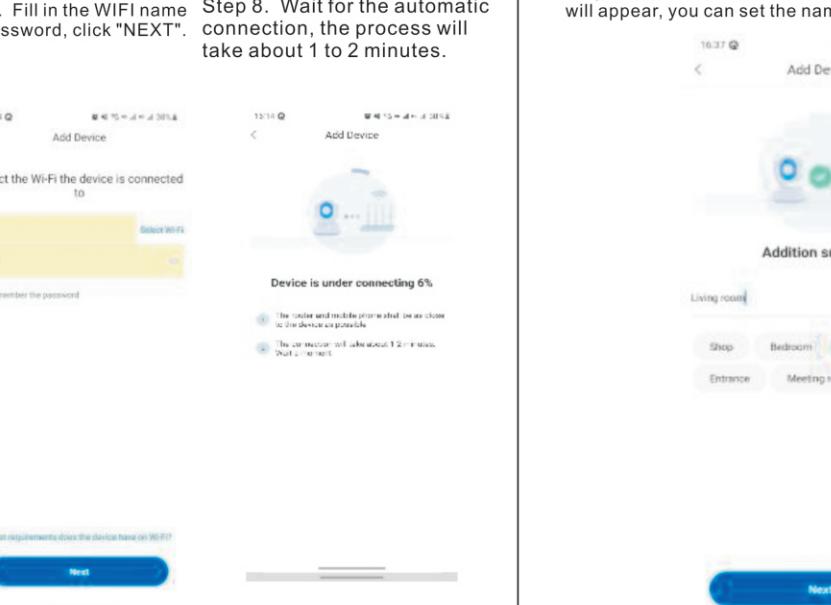
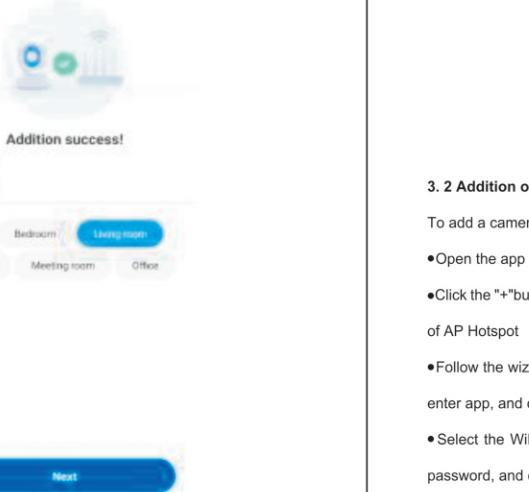
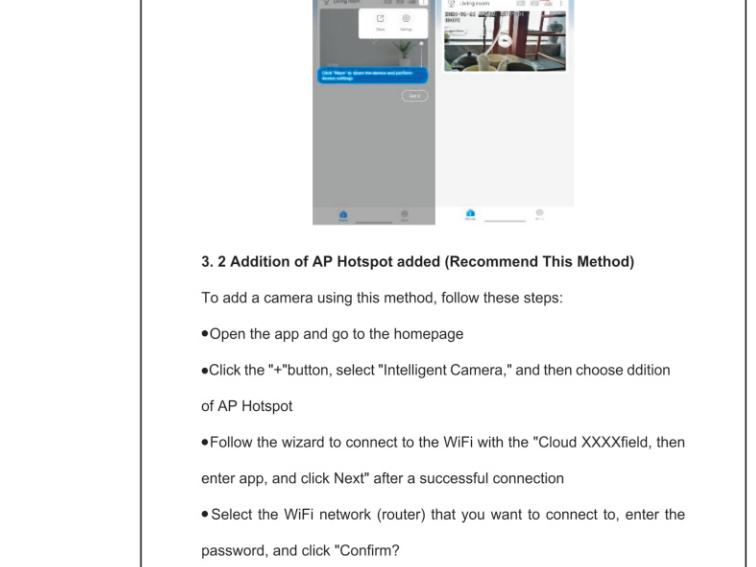


<p><b>camera bluetooth speaker</b></p>  <p>Experience the enchantment of music, delight in the mesmerizing lights, and enjoy all-around protection with discreet surveillance for you and your family!</p>	<p><b>CONTENT</b></p> <p>Important Note: 1 1. Mobile APP download: 2 2. How to add a camera: 2 3. Add smart camera: 3 3.1 Connect via Bluetooth (Recommend This Method): 3 3.2 Addition of AP Hotspot added: 9 4. Features: 9 4.1 Live preview Interface: 9 4.2 Rotating Lens (PTZ): 10 4.3 Video playback: 10 4.5 Screen inspection: 11 4.6 Smart reminder: 12 4.7 Phone reminder: 13 5. FAQ: 14 5.1 Why WiFi The connection method cannot add the device?: 14 5.2 Why is the recording intermittent?: 14 5.3 Choose to record continuously or intermittently after inserting the TF card?: 14 5.4 Why can't my phone receive alarm messages? (Turn on unmanaged detection/Hand once/ feature): 15 5.5 What should I do if the camera is disconnected?: 15 5.6 Why can't the shared account operate the camera?: 16 5.7 Need to change WiFi How to connect a camera?: 16</p>	<p><b>Please read the important reminders below regarding device power before using:</b></p> <p>1. To ensure the normal operation of the device, please do not remove the lithium battery and use the power cord directly.</p> <p>2. When connecting the device for the first time, please remove the plastic spacer in the Li-ion battery compartment and make sure the power switch in the battery compartment is in the ON position. Wait for 1-2 minutes, the camera will be automatically detected and activated. Next, you can follow the normal process to connect the device via Bluetooth.</p> <p>3. When the device is completely powered off, whether through plugging in or reinstalling the battery, you need to wait for 1-2 minutes for the device to automatically reconnec the monitoring function without manual operation. Please be patient.</p> <p>4. If you want the device to perform remote security monitoring for an extended period, please connect the device with the power cord to avoid monitoring vulnerabilities caused by low battery power.</p> <p>Please pay attention to the above important reminders about the device power and read them carefully before use to ensure the proper functioning of the device.</p>	<p><b>Instructions for use of the night light</b></p> <p>This night light has 5 light adjustment commands that can be operated through voice control:</p> <ol style="list-style-type: none"> <li>1) Turn on light.</li> <li>(2) Change color.</li> <li>(3) Turn off light.</li> <li>(4) Dim light.</li> <li>(5) Brighten light.</li> </ol> <p><b>Please take note of the following important reminders:</b></p> <ol style="list-style-type: none"> <li>1. The night light function can only be used when the device is connected to a power source, to ensure battery safety and energy efficiency.</li> <li>2. Once the device is connected to a power source, the night light will automatically turn on by default.</li> <li>3. The night light function is operated through voice control.</li> <li>4. The night light offers three selectable colors: soft yellow, light white, and bright white.</li> <li>5. The effective range for voice control should not exceed 3 meters. It is recommended to maintain a closer distance for better control and clarity. Additionally, the ambient noise in the surroundings directly affects the effectiveness and sensitivity of voice control. It is advised to use the night light in a quiet environment for optimal voice control performance.</li> </ol>	 <p>Please note that the device itself does not come with any numerical markings. The following illustrations are provided for convenience and understanding. We have specifically labeled the five buttons from left to right as Button 1, Button 2, Button 3, Button 4, and Button 5.</p>	<p><b>Important reminders regarding the clock and Bluetooth speaker functions:</b></p> <p><b>Clock adjustment:</b></p> <ol style="list-style-type: none"> <li>1. Long press Button 5, and the device will automatically start after 2 seconds.</li> <li>2. Use Button 4 to control the adjustment of the hours, minutes, and seconds of the clock. Alternate use is required.</li> <li>3. Single-click Button 4, and the hours part of the clock will start flashing.</li> <li>4. Use Button 3 to adjust the hours part.</li> <li>5. Single-click Button 4 again, and the minutes part will start flashing.</li> <li>6. Use Button 2 to adjust the minutes part.</li> <li>7. Single-click Button 4 again, and the seconds part will start flashing.</li> <li>8. Use Button 1 to adjust the seconds part.</li> </ol> <p><b>Bluetooth Connection:</b></p> <ol style="list-style-type: none"> <li>1. Press and hold the 5th button for 2 seconds to automatically power on the device.</li> <li>2. When you hear the "Power on" prompt, it means the Bluetooth speaker has been successfully turned on.</li> <li>3. When you hear the "Bluetooth mode" prompt, it means the Bluetooth mode is ready for connection.</li> <li>4. Please format the Micro SD to FAT32 and install that when powered off.</li> <li>5. Ensure the phone, router and camera is close enough when you ready to pair them. (The WiFi signal should be strong enough)</li> <li>6. Reset can solve most of the problems well. (Press and hold the reset for about 10 seconds, and see the lights through the hole flashing to indicate that the reset is successful, then give it about a minute or 2 wait for the device to reboot.)</li> </ol> <p><b>Bluetooth Speaker User Instructions:</b></p> <ol style="list-style-type: none"> <li>1. You can directly adjust the volume of the Bluetooth Speaker on your phone.</li> <li>2. After Bluetooth connection, while in the playback mode, the camera's video recording function will work normally, but the audio recording function will not be able to record at the same time.</li> <li>3. If the Bluetooth speaker prompt "Power low", please charge it in a timely manner.</li> </ol>	<p><b>Important Note:</b></p> <ol style="list-style-type: none"> <li>1) Please read the manual before set up the camera, it will help you a lot and saving your times</li> <li>2) Please fully charge and reset the camera before first time use</li> <li>3) The camera can only be set up with 2.4g WiFi network. (But you can use access live stream with 4G/5G network once you set it up with 2.4g first)</li> <li>4) Please format the Micro SD to FAT32 and install that when powered off</li> <li>5) Ensure the phone, router and camera is close enough when you ready to pair them. (The WiFi signal should be strong enough)</li> <li>6) Reset can solve most of the problems well. (Press and hold the reset for about 10 seconds, and see the lights through the hole flashing to indicate that the reset is successful, then give it about a minute or 2 wait for the device to reboot.)</li> </ol>	<p><b>1. Mobile APP download</b></p> <p>To download our mobile app, simply search for "Cloud365" in your app store.</p>  <p><b>2. How to add a camera</b></p> <p>When using the app for the first time, you will need to register by providing your email or mobile phone number. Click the "Register" button to complete the user registration and you can log in for start using the app ..</p> <p><b>3. Add smart camera</b></p> <p><b>3.1 Connect via Bluetooth</b></p> <p>Step 1. Turn on your cell phone's Bluetooth</p> <p>Step 2. Open Cloud 365 software, allow Cloud 365 to search and connect to your phone's Bluetooth</p> <p><b>Step 3. Open Cloud 365 software permissions, allow Cloud 365 to search and connect to your phone's Bluetooth</b></p> <p><b>Step 4. In Add Device page, search for the camera.</b></p> 
---	---	---	---	--	---	--	---

<p><b>Step 5.</b> After searching the device "CloudCam_T20 XXXXXXXXX", the "Add Device" button next to the device name.</p> 	<p><b>Step 6.</b> Jump to the WiFi connection page and set the corresponding permissions.</p> 	<p><b>Step 7.</b> Fill in the WiFi name and password, click "NEXT".</p> <p><b>Step 8.</b> Wait for the automatic connection, the process will take about 1 to 2 minutes.</p> 	<p><b>Step 9.</b> After successful connection, "Addition success" will appear, you can set the name tag for this camera.</p> 	<p><b>Step 10..</b> Jump to the use page, you can start using the camera normally.</p> 	<p><b>3.2 Addition of AP Hotspot added (Recommend This Method)</b></p> <p>To add a camera using this method, follow these steps:</p> <ul style="list-style-type: none"> <li>Open the app and go to the homepage</li> <li>Click the "+" button, select "Intelligent Camera," and then choose edition of AP Hotspot</li> <li>Follow the wizard to connect to the WiFi with the "Cloud XXXXfield", then enter app, and click "Next" after a successful connection</li> <li>Select the WiFi network (router) that you want to connect to, enter the password, and click "Confirm?"</li> </ul> <p>Wait for the app to display "Addition success" to confirm that the network configuration is complete.</p>	<p><b>right vision functionality.</b></p> <p><b>4.2 Rotating Lens (PTZ)</b></p> <p>By clicking the PTZ button, you can enter the camera control interface. You can rotate the lens by clicking the dial on the screen.</p>	<p><b>4. Features</b></p> <p><b>4.1 Live preview interface</b></p> <p>By clicking the Operation button, you can enter the operability interface, in which the night vision mode simply switches the display to black and white. It is not a night vision effect (the device does not have night vision lights) despite being described as such. In reality, it does not provide true</p>	<p><b>4.2 Rotating Lens (PTZ)</b></p> <p>By clicking the PTZ button, you can enter the camera control interface. You can rotate the lens by clicking the dial on the screen.</p> <p><b>4.3 Video playback</b></p> <p>Reminder: Cloud video playback needs to be purchased and paid before it can be used.</p> <p>A: Select Playback at the bottom right corner of the live interface to view the playback video of the camera.</p> <p>B: Switch playback path, you can choose to watch cloud playback/memory card playback.</p> <p>When it is detected that there are "abnormal brightness abnormal color cast", "video loss", "blurred video" "traces", and "snowflakes" on the screen of the device, and make payment.</p> <p>Enter the "Smart Reminder" interface, select the corresponding device, and you can view the test report</p>	<p><b>device, a test report will be generated.</b></p> <p><b>Push message:</b> Enter the "Screen Abnormal Inspection" interface, select the corresponding device, and you can view the inspection report</p> <p><b>4.4 Watching video on multiple screens (only applicable to multiple devices under the same account)</b></p> <p>On the device list, click the "Multi-split screen" button in the upper right corner, then you can watching videos on multiple screens</p> <p><b>4.5 Screen inspection</b></p> <p>In the device list, click the "Screen Inspection" button, or in the "line" interface, click the "Screen Inspection" button if you currently have a device that supports the purchase of value-added services, click "Buy now", select the device, and make payment.</p> <p>When someone appears, use cloud AI analysis to filter invalid alarms for you, reduce corresponding false alarms, and provide you with effective and accurate alarms</p>	<p><b>device, a test report will be generated.</b></p> <p><b>Push message:</b> Enter the "Screen Abnormal Inspection" interface, select the corresponding device, and you can view the inspection report</p> <p><b>4.7 Phone reminder</b></p> <p>To enable phone reminder, click the "Phone Reminder" button on the device list or on the "Mine" page.</p> <p>If there is a device that supports purchasing value-added services, click "Buy Now", select the device, and make payment.</p> <p><b>5. FAQ</b></p> <p><b>5.1 Why WiFi The connection method cannot add the device?</b></p> <p>1) Please make sure that the device has powered and have been restored to factory settings before adding the device</p> <p>2) Confirm that the notification push permission of the APP in the mobile phone settings is turned on, and then turn on the message notification in the notification settings of the APP, and the current time is not in the planned time period for stopping the notification. Under normal circumstances, when an alarm is detected, a message will appear in the notification bar of the mobile phone. Whether there is a sound or vibration depends on the settings of the mobile phone.</p> <p>3) Make sure that the distance between the router and the camera is within 30-60 m, or the camera lens will rotate, when it done, means camera is ready now.</p> <p>2) The camera only supports 2.4GHz WiFi signal, if it is a 5G route, please turn on the dual-band mode of the router and select the 2.4G signal.</p> <p>3) Make sure that the distance between the router and the camera is within a reasonable range.</p> <p><b>5.2 Why is the recording intermittent?</b></p> <p>The cloud service trial package, the alarm recording package and the TF card event recording mode will only record when the camera detects that the camera has moved, so the recording may not be continuous.</p> <p><b>5.3 Choose to record continuously or intermittently after inserting the TF card?</b></p> <p>Make sure that the video viewing channel is selected as SD card, and format the SD card first. If it is still intermittent, it may be that the SD card has a bad pixel. If it is lost once or twice a day, about 2 minutes at a time, it is the camera to release the</p>	<p><b>memory and restart. It is normal imagination.</b></p> <p><b>5.4 Why can't my phone receive alarm messages? (Turn on unmanaged detection/Hand once/ feature)</b></p> <p>For security reasons, the permissions of the shared account are restricted, and the device cannot be operated. If others want to operate the camera, they can log in directly with the account and password.</p> <p><b>5.5 What should I do if the camera is disconnected?</b></p> <p>First confirm whether the power supply and network are normal, and then power off and restart the camera if there is no problem. If it is still disconnected after restarting, please remove the camera in the APP and add it again.</p>	<p><b>5.6 Why can't the shared account operate the camera?</b></p> <p>Two methods:</p> <ol style="list-style-type: none"> <li>1) camera does not change the place and can search for another WiFi in the parameter setting menu &gt;&gt; change the WiFi connected to the device &gt;&gt; change the corresponding WiFi</li> <li>2) The camera has changed places and cannot find another WiFi, so reconfigure the camera</li> </ol> <p><b>5.7 Need to change WiFi How to connect a camera ?</b></p> <p>Two methods:</p> <ol style="list-style-type: none"> <li>1) camera does not change the place and can search for another WiFi in the parameter setting menu &gt;&gt; change the WiFi connected to the device &gt;&gt; change the corresponding WiFi</li> <li>2) The camera has changed places and cannot find another WiFi, so reconfigure the camera</li> </ol>
---	--	---	--	--	--	--	--	---	---	---	---	--

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

#### Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.