



SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm)

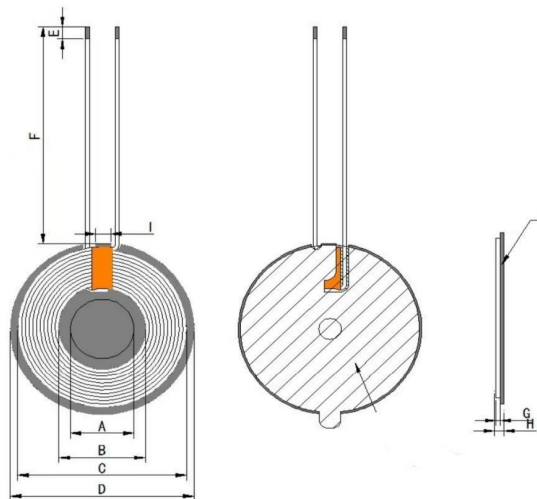

2. SCHEMATICS:



A	B	C	D2	E	H	F	G		
15±0.05	20.5±0.5	39.2±0.5	43.5±0.5	3±2	2.2MAX	10±3	0.8±0.5		

3.WINDING:

STEP	START-FINISH	WIRE TYPE	TURNS	TAPE	REMARK
N1	S-F	Hotair line Ø 0.08*80 2UEW	11TS (Ref)		

4. ELECTRICAL SPECIFICATION:

ITEM	L	DCR		working temp.	HI-POT
TEST	Coil with plate	S-F		Room temp.	
COND	100KHz, 0.25V	AT 25℃			
SPEC	7.9uH±10%	66mΩ Max		0-80℃	

5.BILF OF MATERIAL:

NO.	ITEM	MATERIAL SPECIFICATION	MANUFACTURER	SGS NO.
1	Hotair line 0.08*80	Hotair line 0.08*80	NANJINGJINNINGCO,LT	
2	Solder Bar	Solder Bar	QIAODO	
3	Magnetic plate	Ø 43.5*0.8	TAIYI CO.,LTD	
4	Glue	Yellow glue 9999	LIANCHENG CO.,LTD	
5	High temp.adhesivetape	4mm	CUDAK CO.,LTD	
6				
7				

HRSW ELECTRONICS CO.,LTD		PART NO	
		TITLE	G43.5磁吸 Q12.0线圈 +10MM磁片 7.9UH
DRAWN BY	CHECKED BY		APPROVED BY