
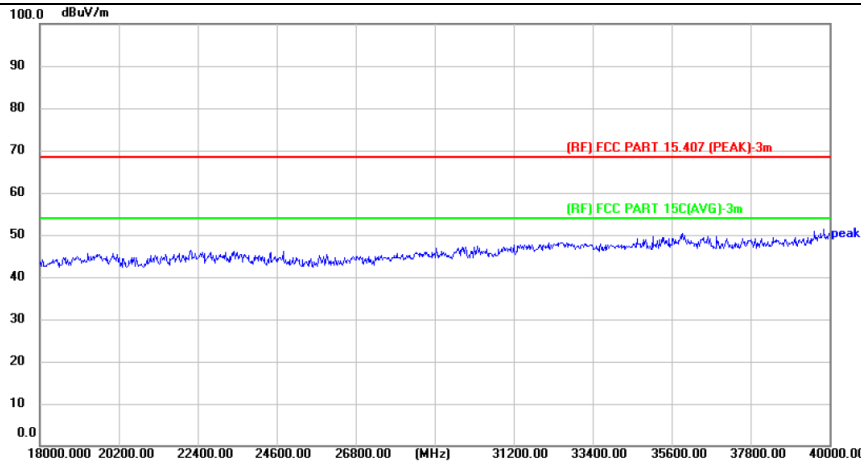


Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac20 Mode 5745MHz-MIMO-ANT.1+2

Horizontal

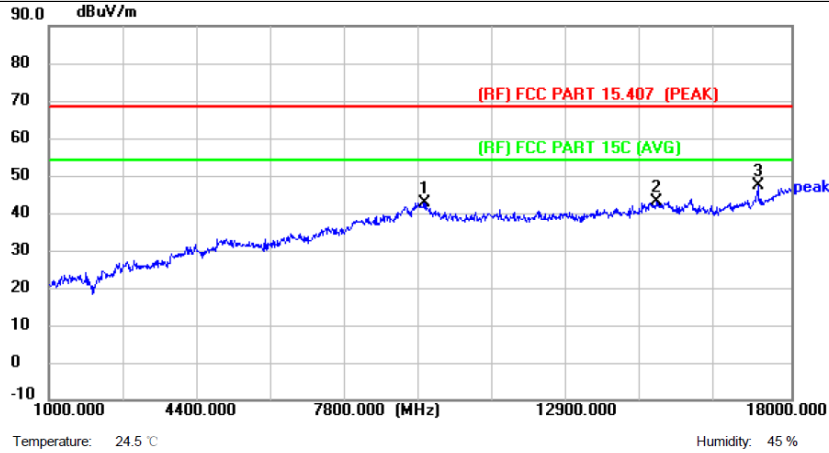

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9602.000	42.56	0.26	42.82	68.30	-25.48	peak	P
2	14923.000	39.00	4.02	43.02	68.30	-25.28	peak	P
3 *	17235.000	40.86	6.33	47.19	68.30	-21.11	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac20 Mode 5745MHz-MIMO-ANT.1+2

Vertical

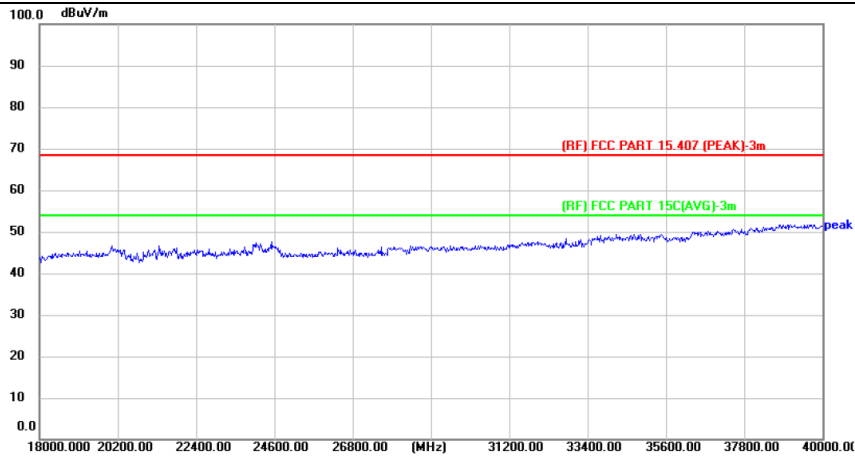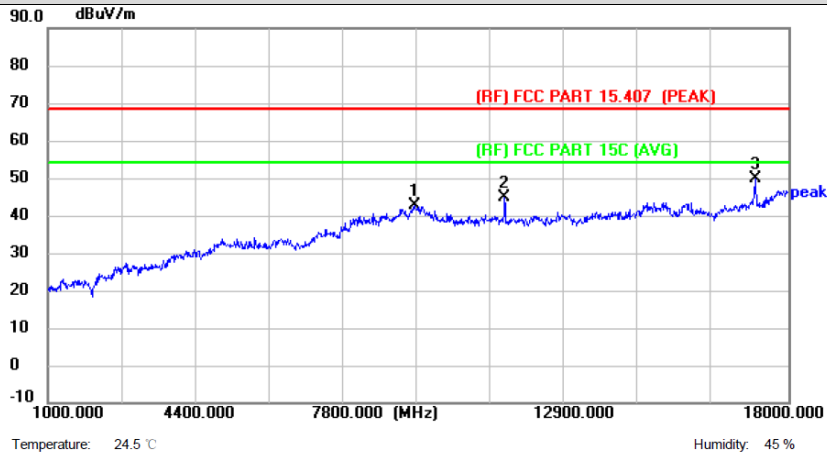

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9415.000	42.80	-0.24	42.56	68.30	-25.74	peak	P
2	11489.000	45.16	-0.24	44.92	68.30	-23.38	peak	P
3 *	17235.000	43.38	6.33	49.71	68.30	-18.59	peak	P


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.




Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac20 Mode 5785MHz-MIMO-ANT.1+2

Horizontal

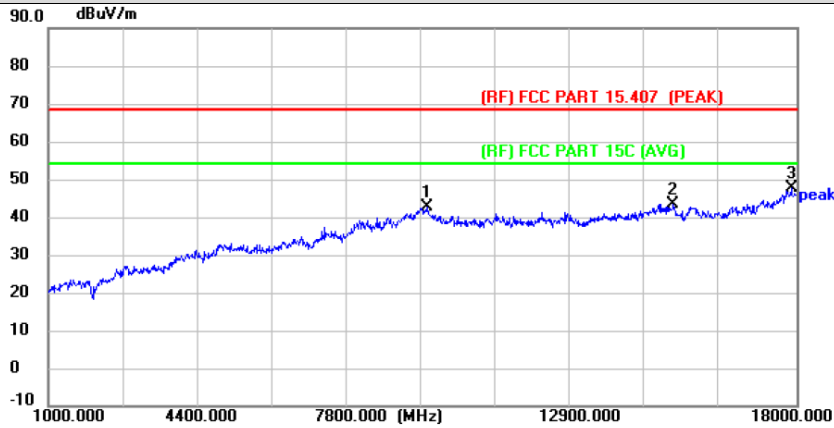

Temperature: 24.5 °C

Humidity: 45 %

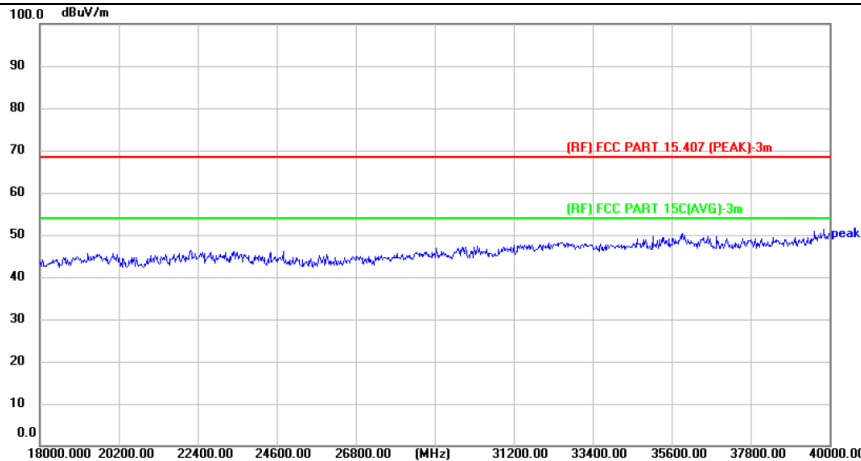

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9619.000	42.72	-0.15	42.57	68.30	-25.73	peak	P
2	15195.000	39.40	4.00	43.40	68.30	-24.90	peak	P
3 *	17881.000	39.04	8.48	47.52	68.30	-20.78	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac20 Mode 5785MHz-MIMO-ANT.1+2

Vertical

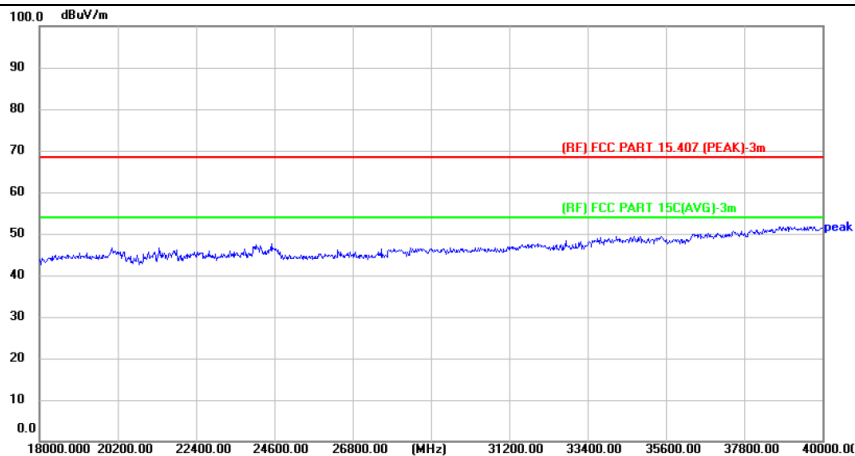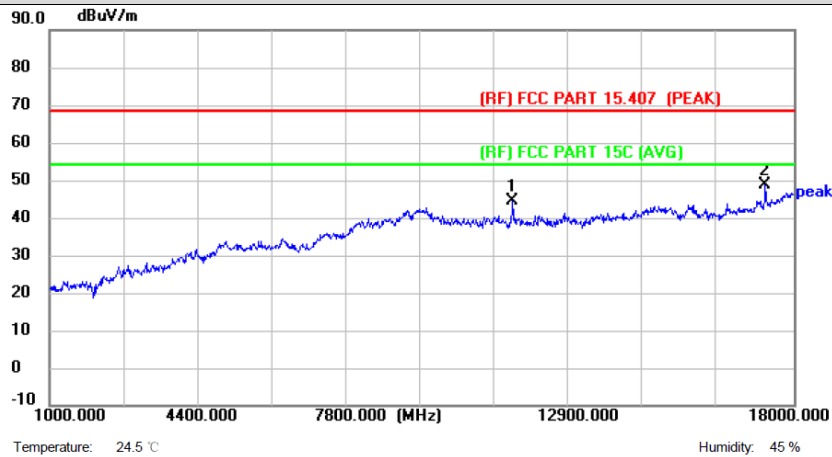


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11574.000	44.94	-0.39	44.55	68.30	-23.75	peak	P
2 *	17354.000	42.57	6.16	48.73	68.30	-19.57	peak	P

Remark:



1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.



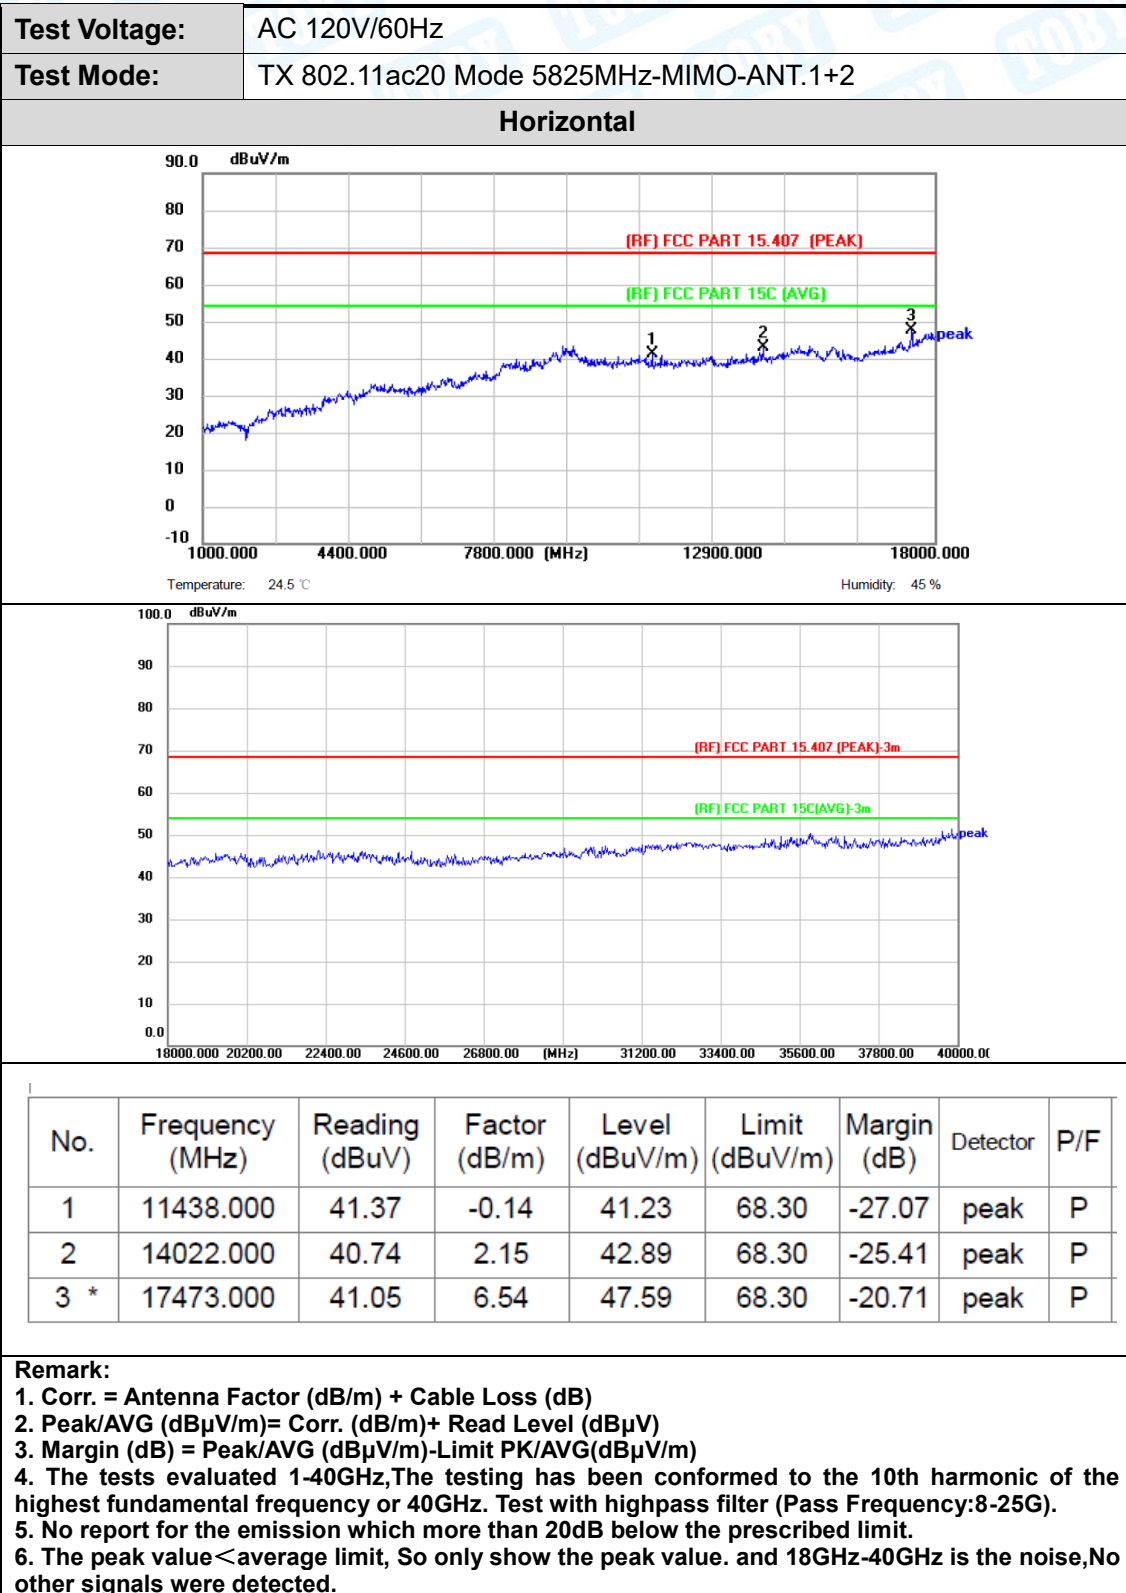

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac20 Mode 5825MHz-MIMO-ANT.1+2

Vertical

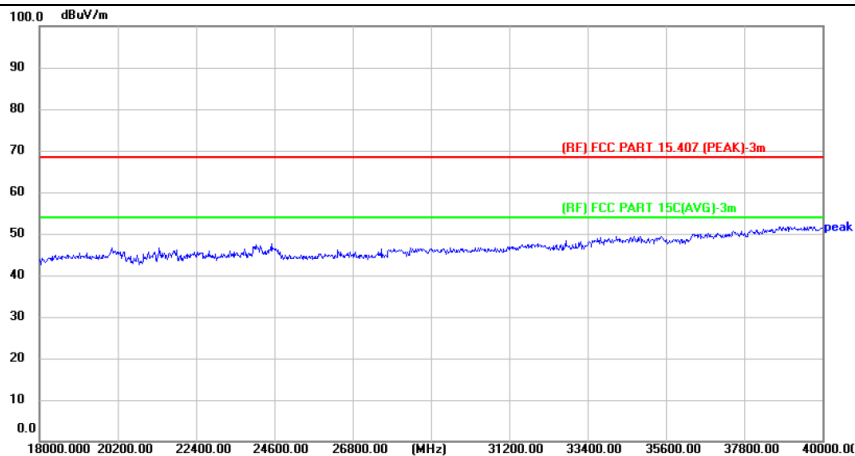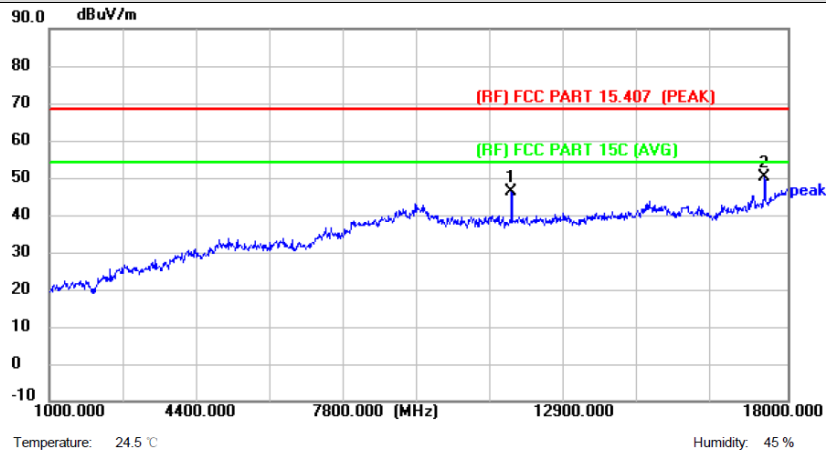

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11642.000	46.66	-0.37	46.29	68.30	-22.01	peak	P
2 *	17473.000	43.58	6.54	50.12	68.30	-18.18	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5755MHz-MIMO-ANT.1+2

Horizontal

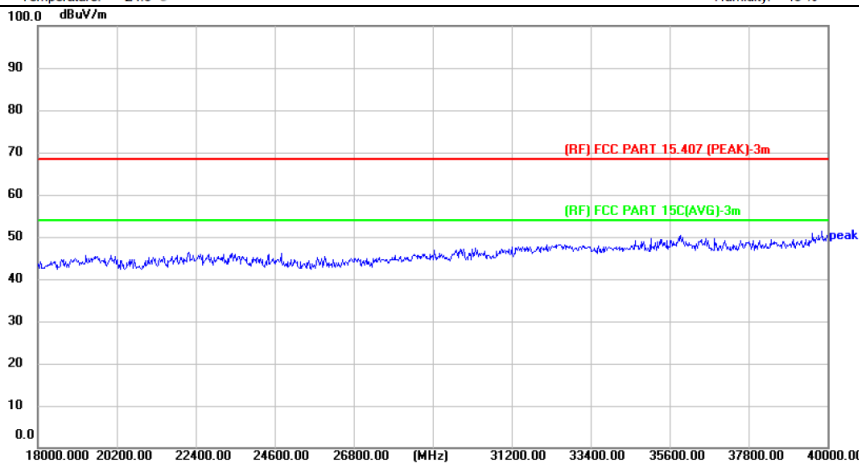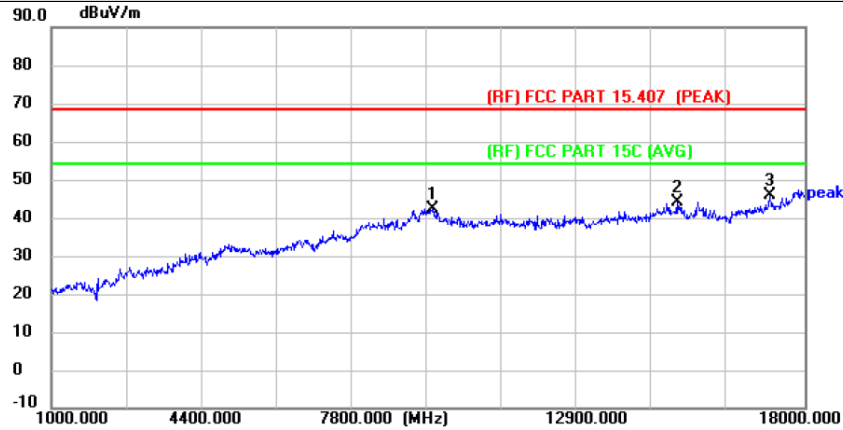

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9602.000	41.94	0.26	42.20	68.30	-26.10	peak	P
2	15144.000	40.08	3.86	43.94	68.30	-24.36	peak	P
3 *	17218.000	39.65	6.38	46.03	68.30	-22.27	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5755MHz-MIMO-ANT.1+2

Vertical

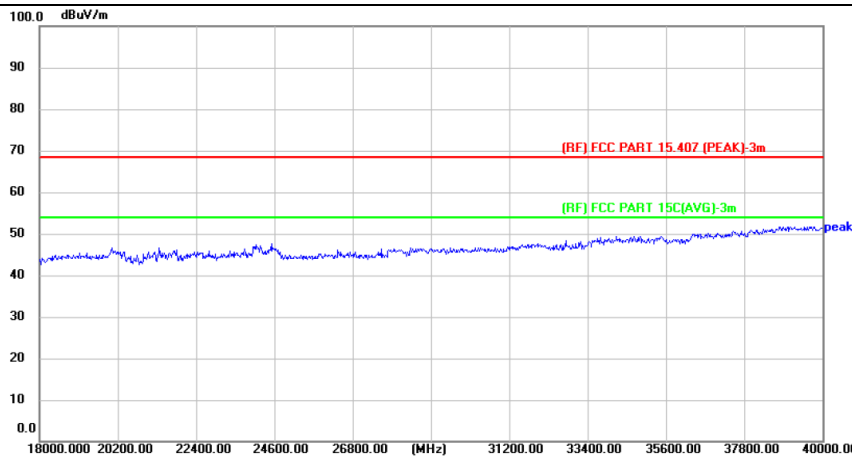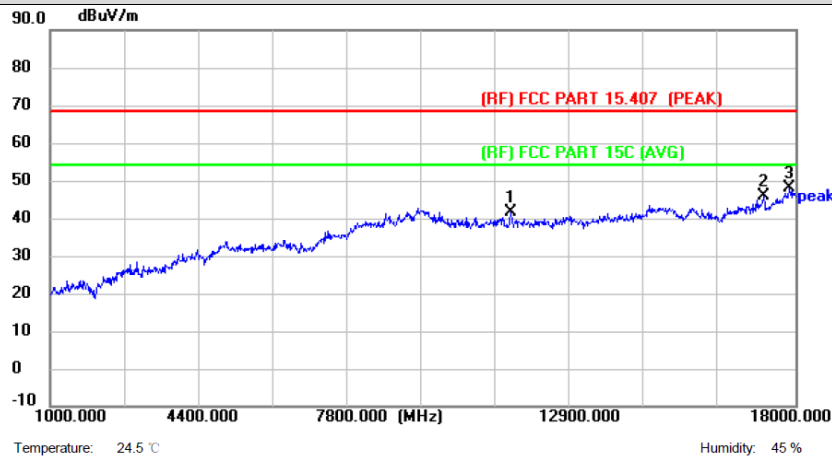


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11523.000	41.85	-0.30	41.55	68.30	-26.75	peak	P
2	17286.000	39.71	6.19	45.90	68.30	-22.40	peak	P
3 *	17847.000	39.45	8.54	47.99	68.30	-20.31	peak	P

Remark:



1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



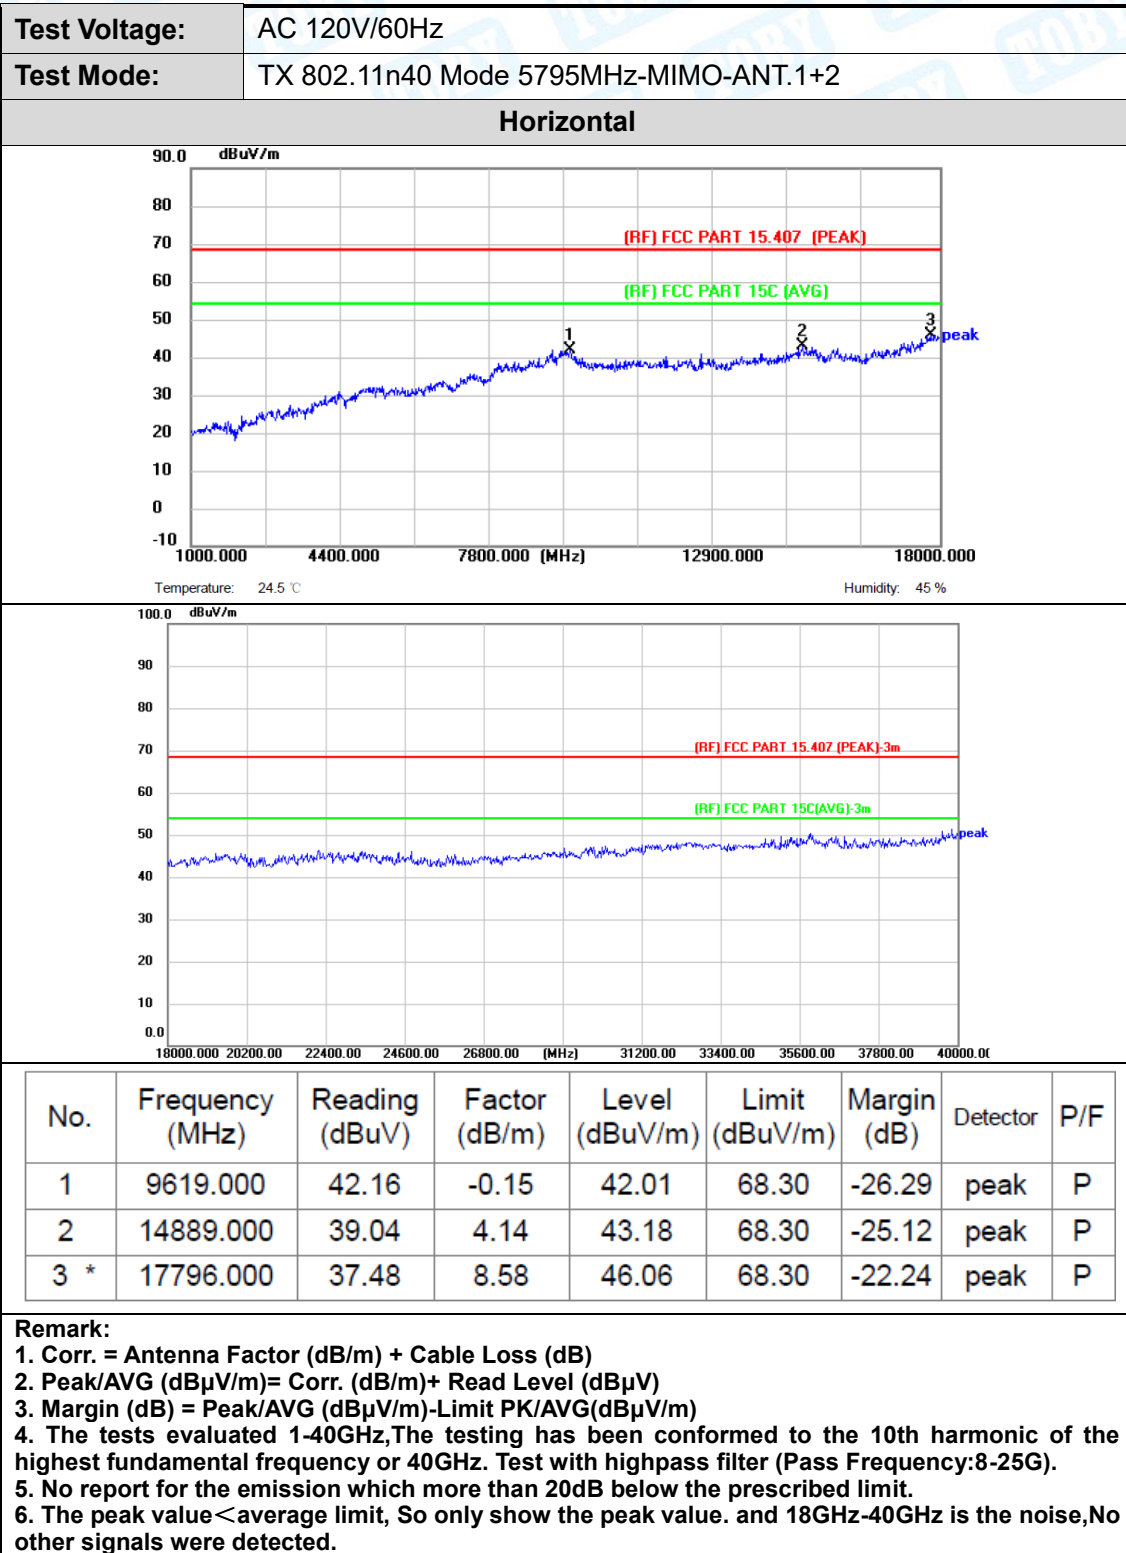

Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11n40 Mode 5795MHz-MIMO-ANT.1+2

Vertical

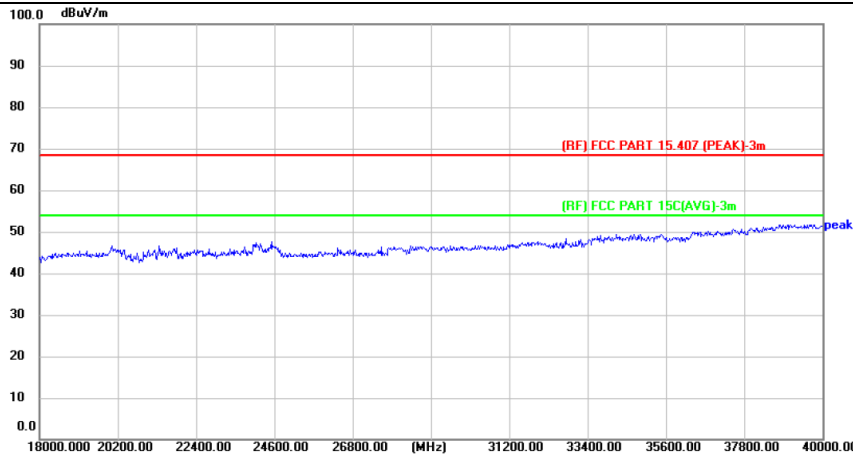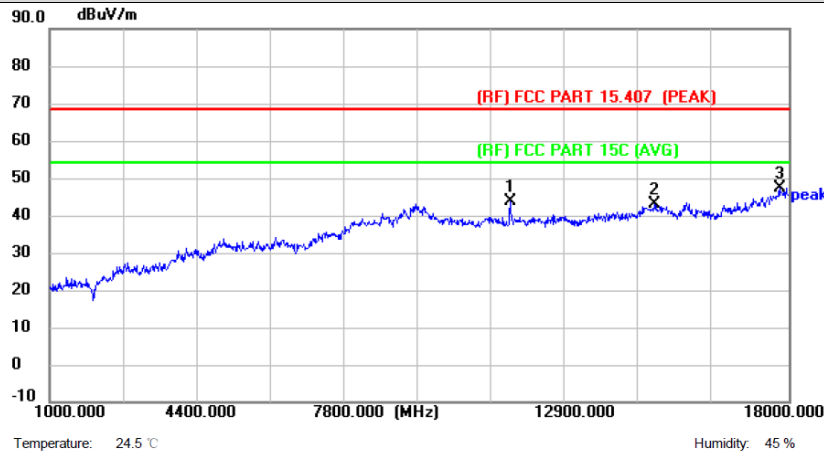

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11591.000	44.27	-0.42	43.85	68.30	-24.45	peak	P
2	14923.000	38.88	4.02	42.90	68.30	-25.40	peak	P
3 *	17796.000	38.57	8.58	47.15	68.30	-21.15	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac40 Mode 5755MHz-MIMO-ANT.1+2

Horizontal

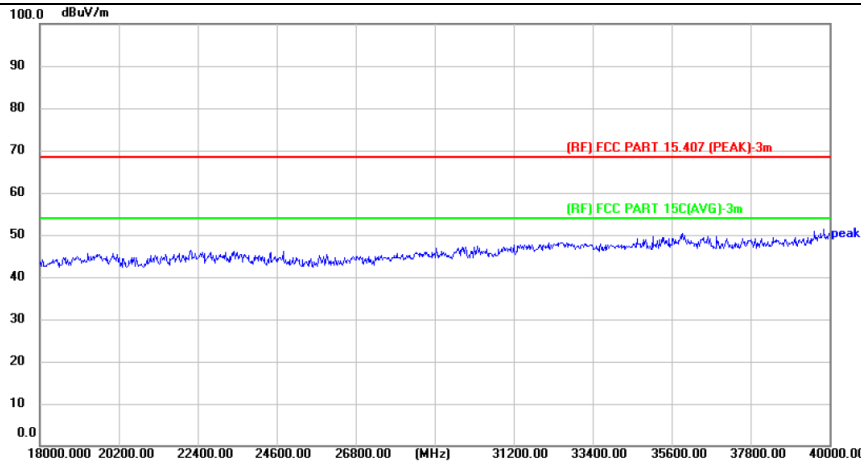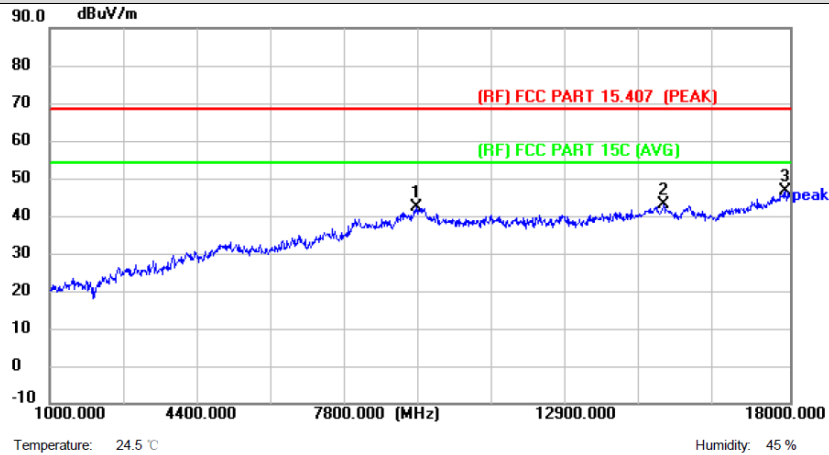

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9415.000	42.40	-0.24	42.16	68.30	-26.14	peak	P
2	15110.000	39.16	3.76	42.92	68.30	-25.38	peak	P
3 *	17881.000	38.16	8.48	46.64	68.30	-21.66	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac40 Mode 5755MHz-MIMO-ANT.1+2

Vertical

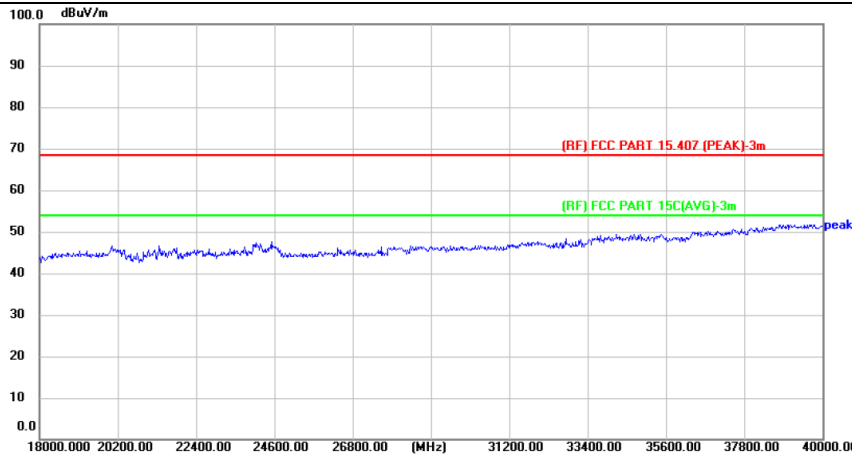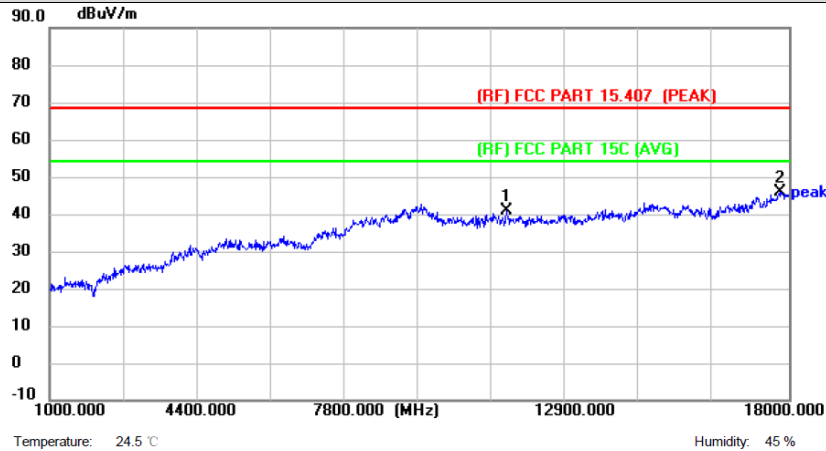

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11506.000	41.11	-0.27	40.84	68.30	-27.46	peak	P
2 *	17796.000	37.39	8.58	45.97	68.30	-22.33	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise,No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac40 Mode 5795MHz-MIMO-ANT.1+2

Horizontal

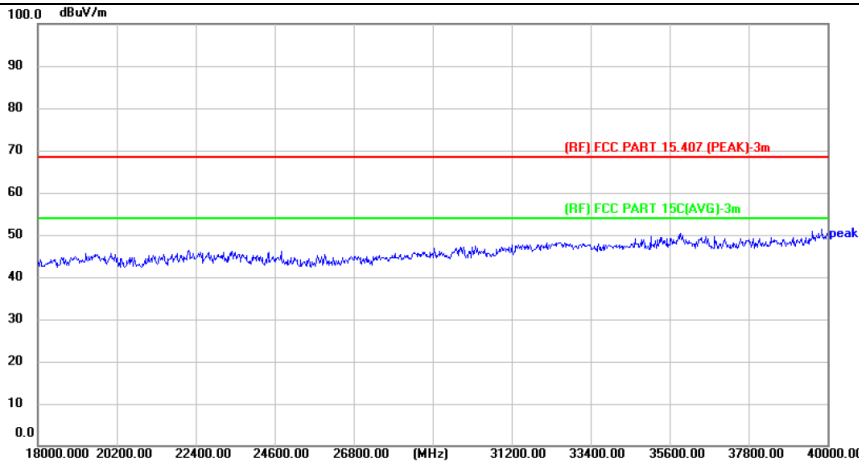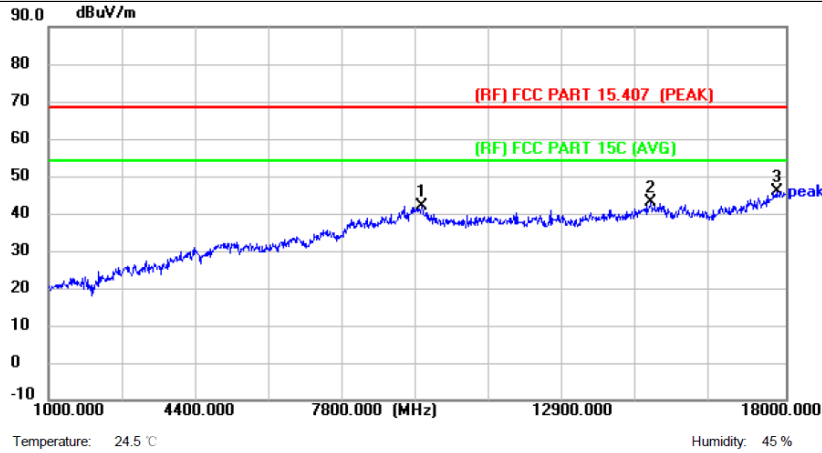

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9619.000	42.16	-0.15	42.01	68.30	-26.29	peak	P
2	14889.000	39.04	4.14	43.18	68.30	-25.12	peak	P
3 *	17796.000	37.48	8.58	46.06	68.30	-22.24	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac40 Mode 5795MHz-MIMO-ANT.1+2

Vertical

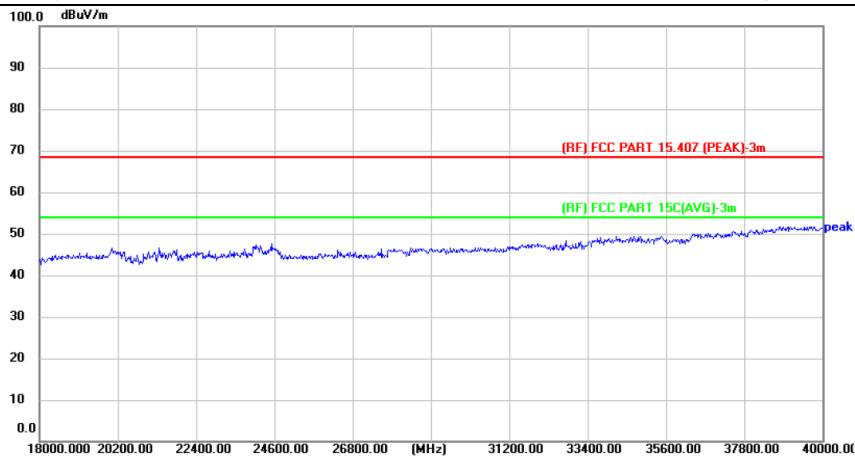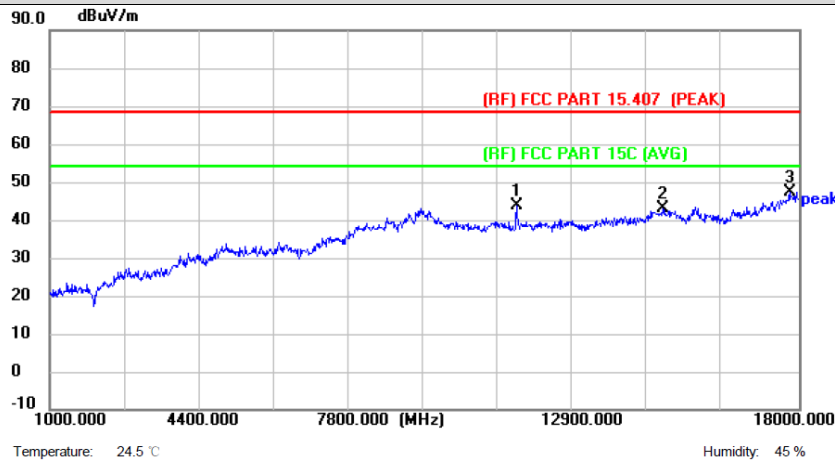

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	11591.000	44.27	-0.42	43.85	68.30	-24.45	peak	P
2	14923.000	38.88	4.02	42.90	68.30	-25.40	peak	P
3 *	17796.000	38.57	8.58	47.15	68.30	-21.15	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5775MHz-MIMO-ANT.1+2

Horizontal

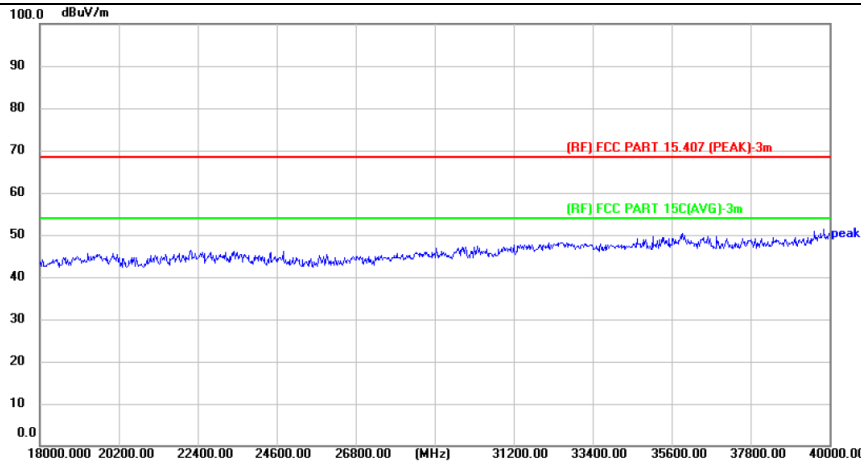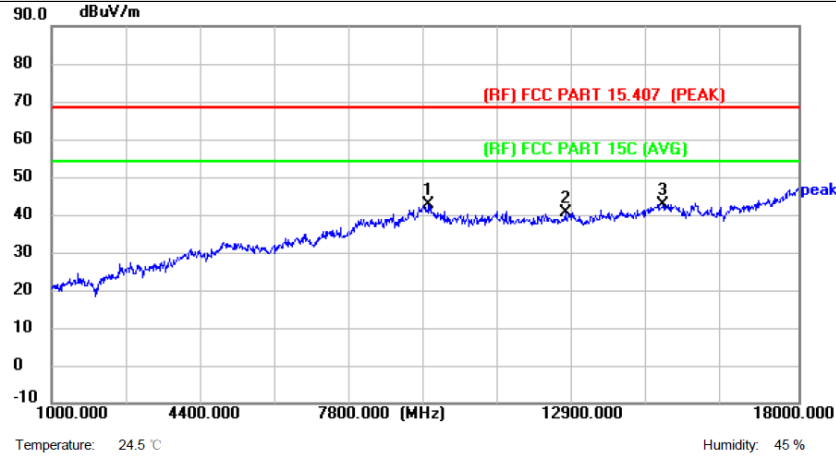

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9585.000	42.37	0.26	42.63	68.30	-25.67	peak	P
2	12696.000	39.61	0.83	40.44	68.30	-27.86	peak	P
3 *	14923.000	38.65	4.02	42.67	68.30	-25.63	peak	P



Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)
4. The tests evaluated 1-40GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency:8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value<average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Test Voltage:	AC 120V/60Hz
Test Mode:	TX 802.11ac80 Mode 5775MHz-MIMO-ANT.1+2

Vertical

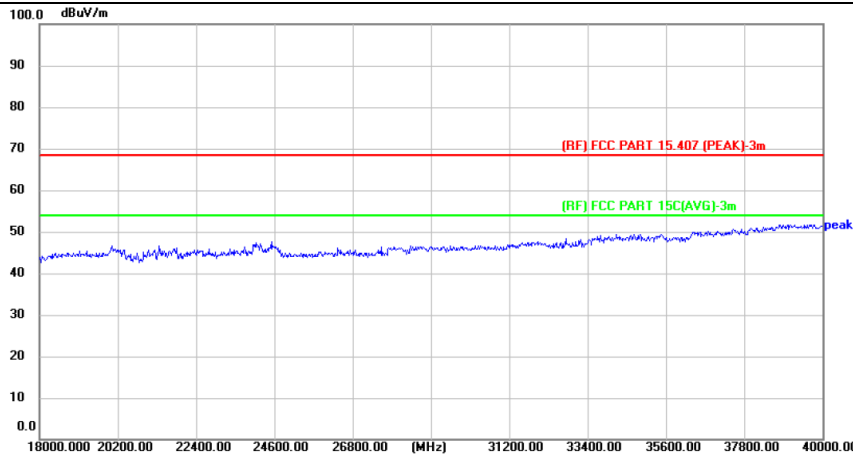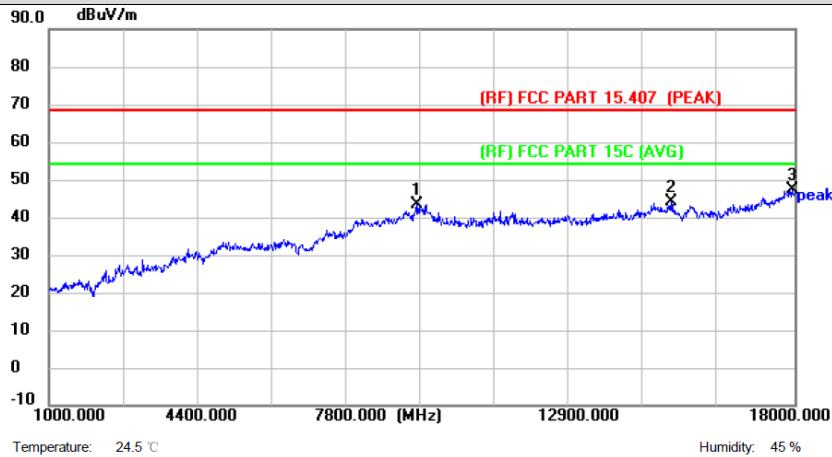

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	9381.000	43.97	-0.54	43.43	68.30	-24.87	peak	P
2	15178.000	40.01	3.94	43.95	68.30	-24.35	peak	P
3 *	17949.000	38.50	8.65	47.15	68.30	-21.15	peak	P

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-40GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency or 40GHz. Test with highpass filter (Pass Frequency: 8-25G).
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value. and 18GHz-40GHz is the noise, No other signals were detected.



Attachment C-- Restricted Bands Requirement Test Data

---Radiation Test

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1)-SISO-ANT.1
Remark:	

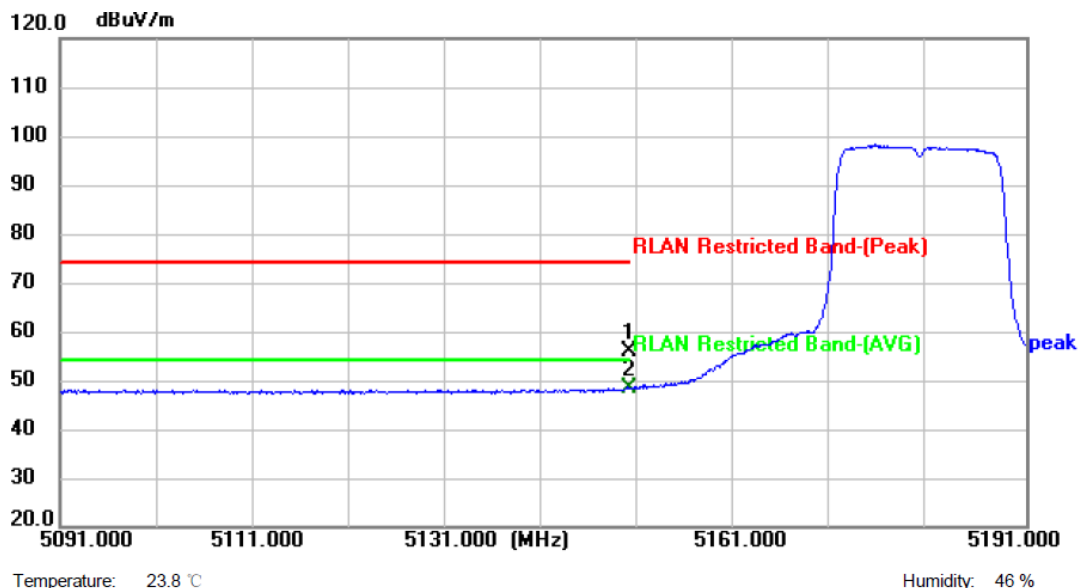


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.21	11.66	55.87	74.00	-18.13	peak	P
2 *	5150.000	36.73	11.66	48.39	54.00	-5.61	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180 MHz (U-NII-1) -SISO-ANT.1
Remark:	

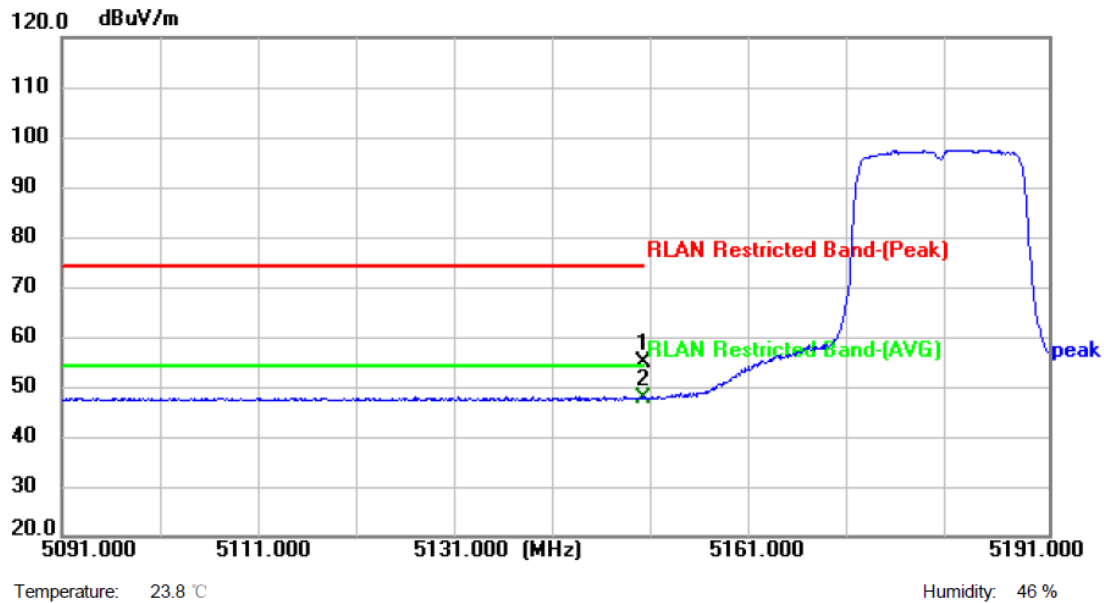


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	42.99	11.66	54.65	74.00	-19.35	peak	P
2 *	5150.000	35.97	11.66	47.63	54.00	-6.37	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)
Remark:	

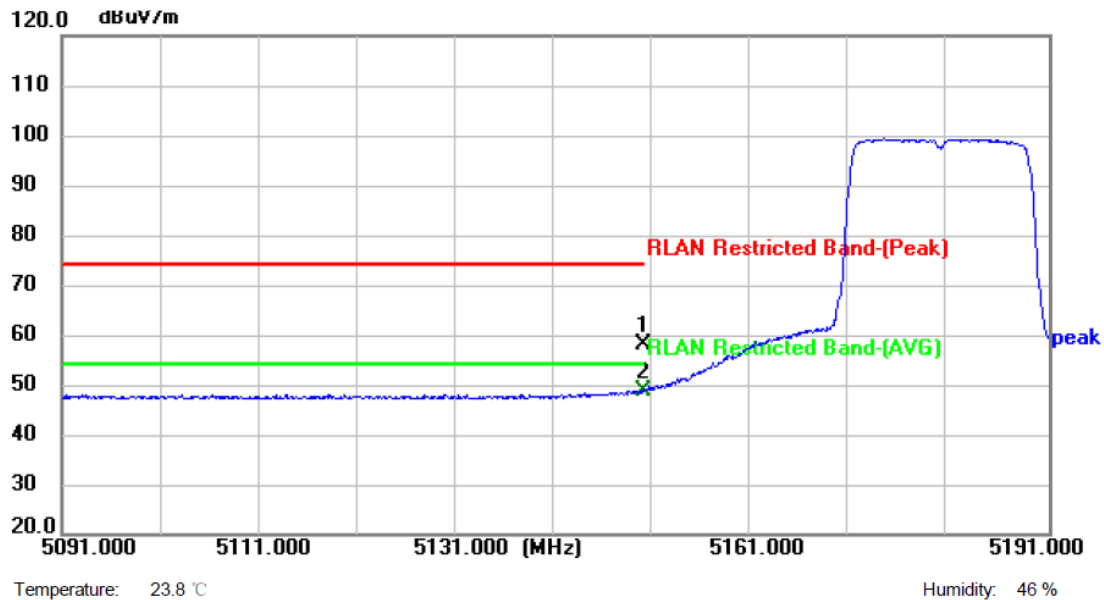


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	46.21	11.66	57.87	74.00	-16.13	peak	P
2 *	5150.000	37.16	11.66	48.82	54.00	-5.18	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5180 MHz (U-NII-1)
Remark:	

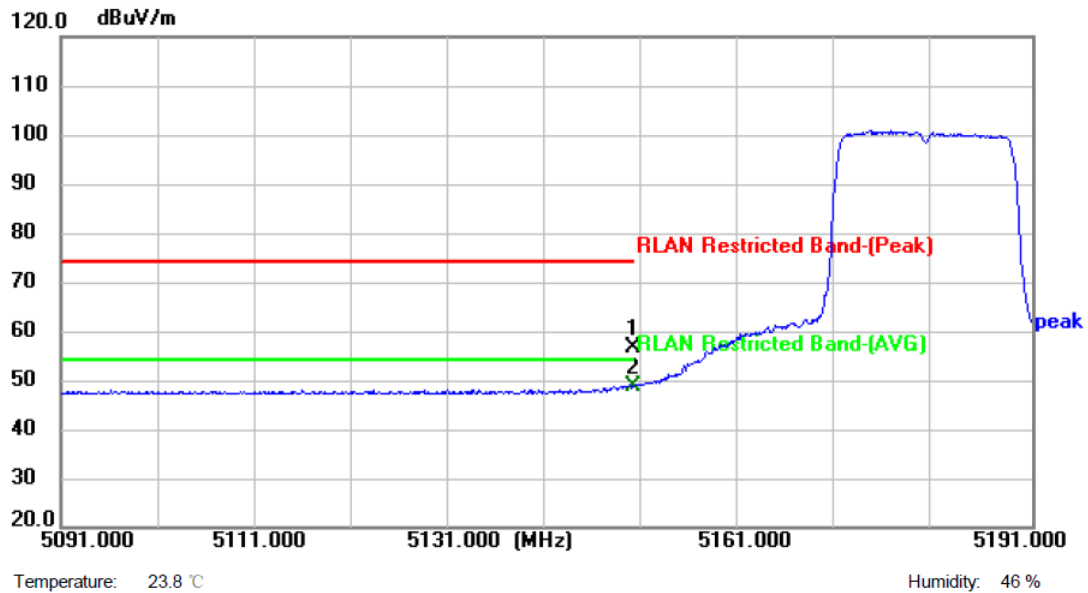


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	45.11	11.66	56.77	74.00	-17.23	peak	P
2 *	5150.000	37.25	11.66	48.91	54.00	-5.09	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5180 MHz (U-NII-1)
Remark:	

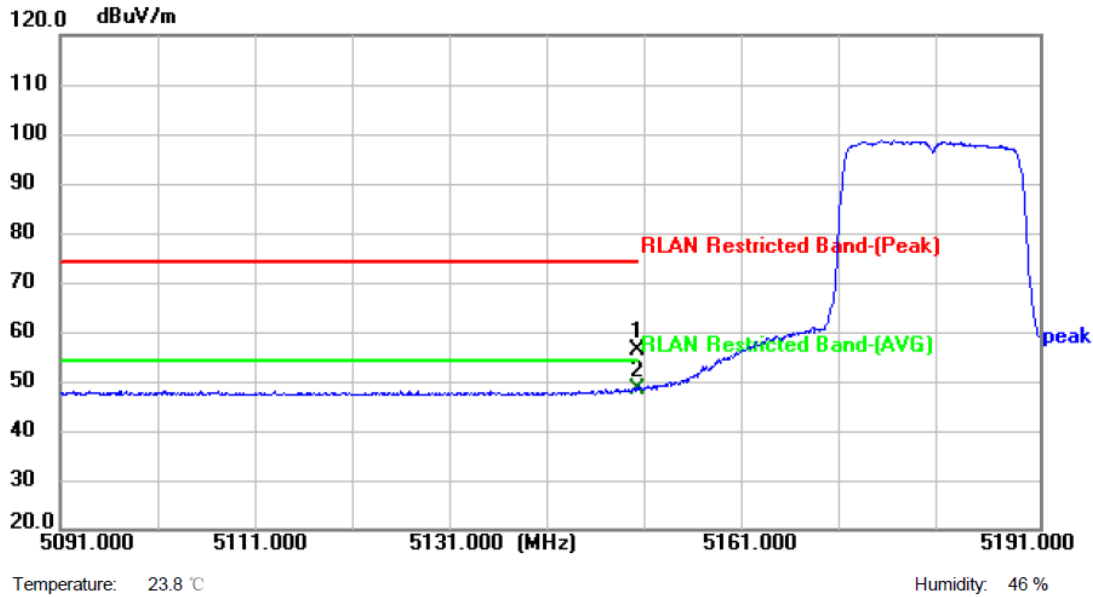

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	44.71	11.66	56.37	74.00	-17.63	peak	P
2 *	5150.000	36.88	11.66	48.54	54.00	-5.46	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)




Remark:

1. **Corr. = Antenna Factor (dB/m) + Cable Loss (dB)**
2. **Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)**
3. **Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)**



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)
Remark:	

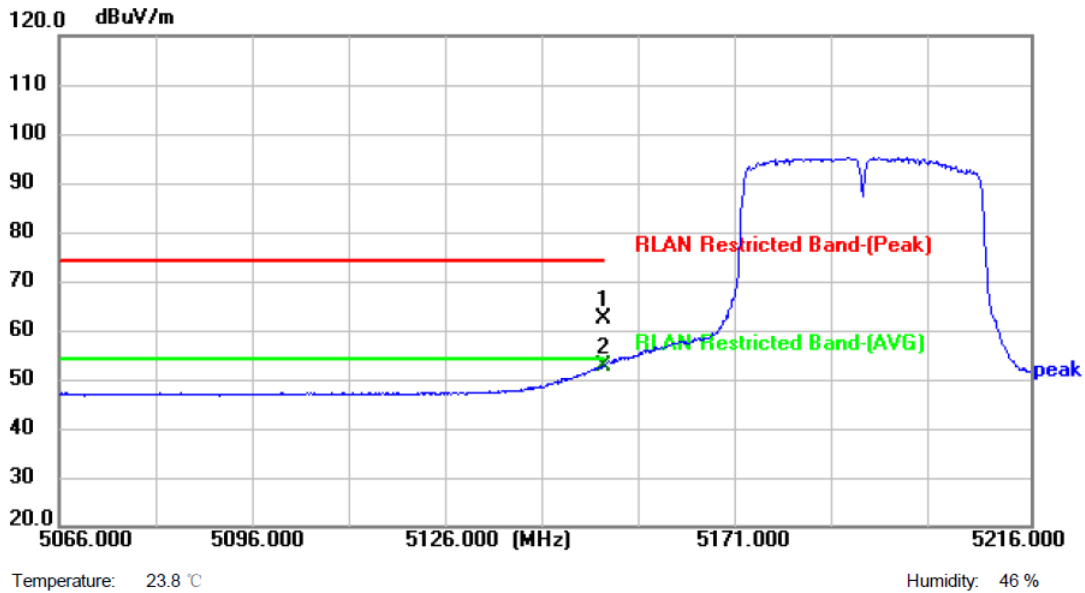


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	50.81	11.66	62.47	74.00	-11.53	peak	P
2 *	5150.000	40.89	11.66	52.55	54.00	-1.45	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5190 MHz (U-NII-1)
Remark:	

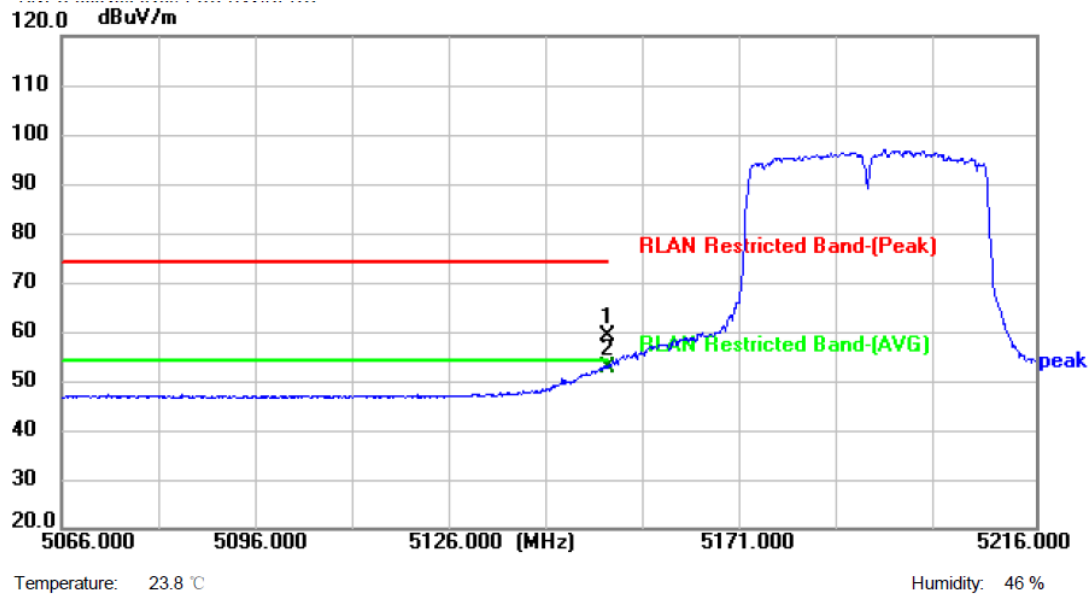


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	47.53	11.66	59.19	74.00	-14.81	peak	P
2 *	5150.000	41.03	11.66	52.69	54.00	-1.31	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)
Remark:	

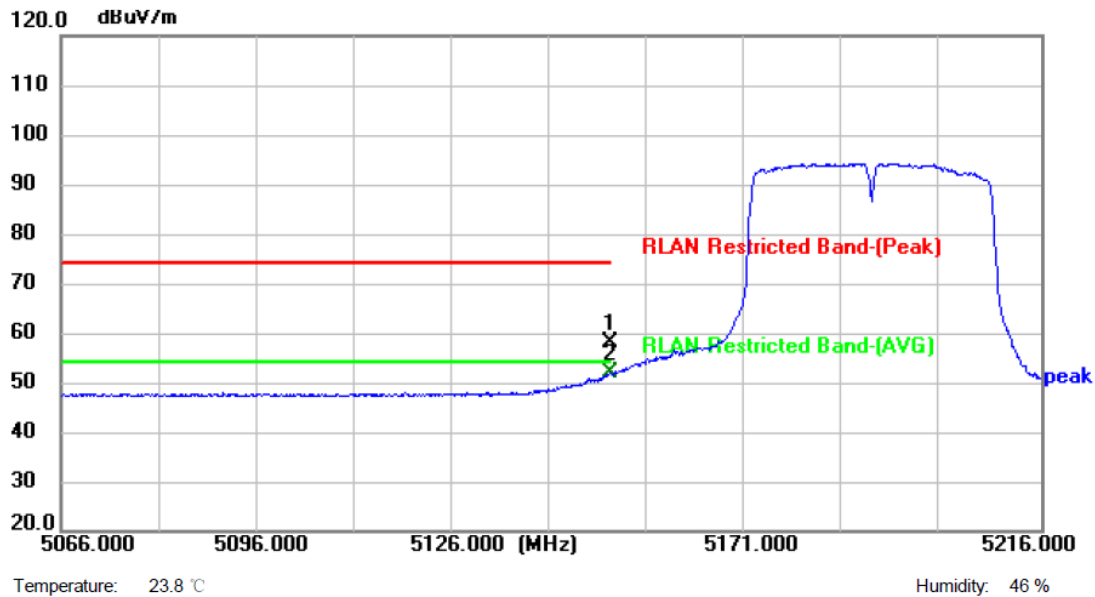


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	46.25	11.66	57.91	74.00	-16.09	peak	P
2 *	5150.000	40.13	11.66	51.79	54.00	-2.21	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1)
Remark:	

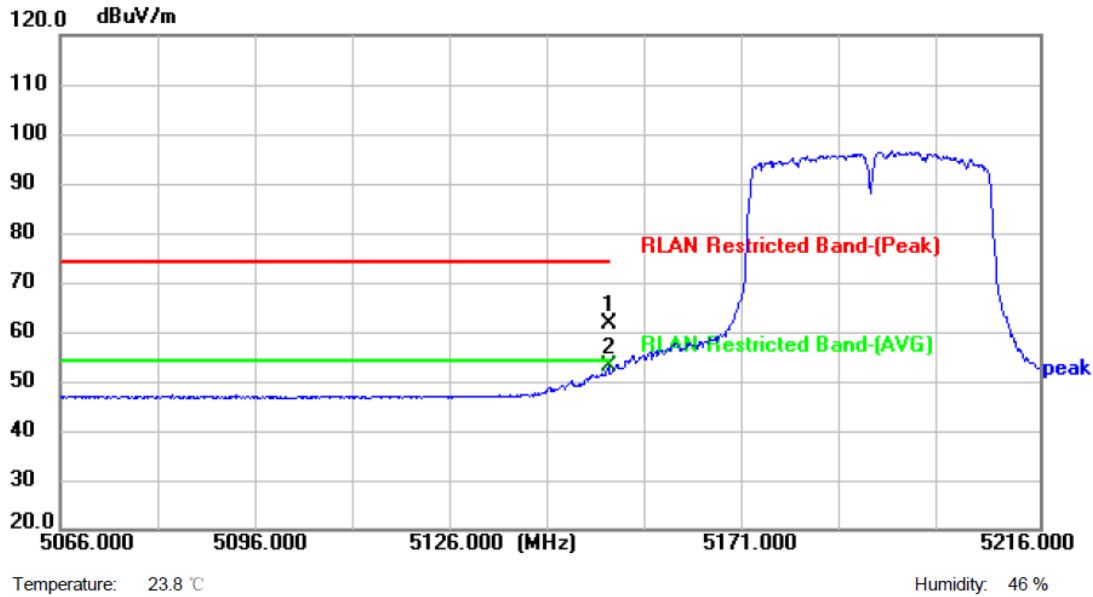


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	49.91	11.66	61.57	74.00	-12.43	peak	P
2 *	5150.000	41.22	11.66	52.88	54.00	-1.12	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)
Remark:	

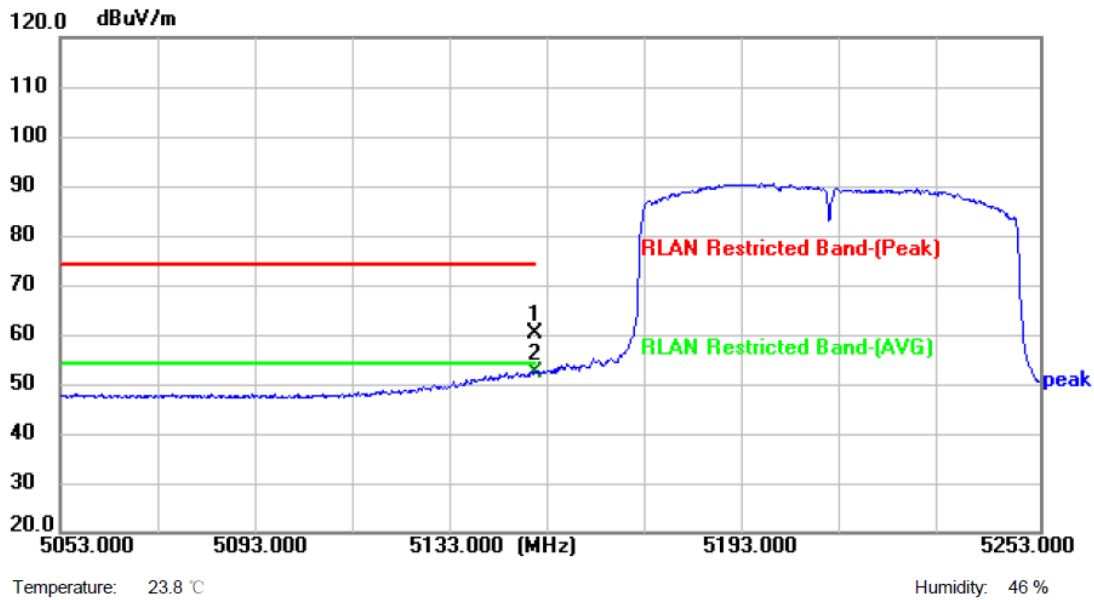


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	48.60	11.66	60.26	74.00	-13.74	peak	P
2 *	5150.000	40.57	11.66	52.23	54.00	-1.77	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5210 MHz (U-NII-1)
Remark:	

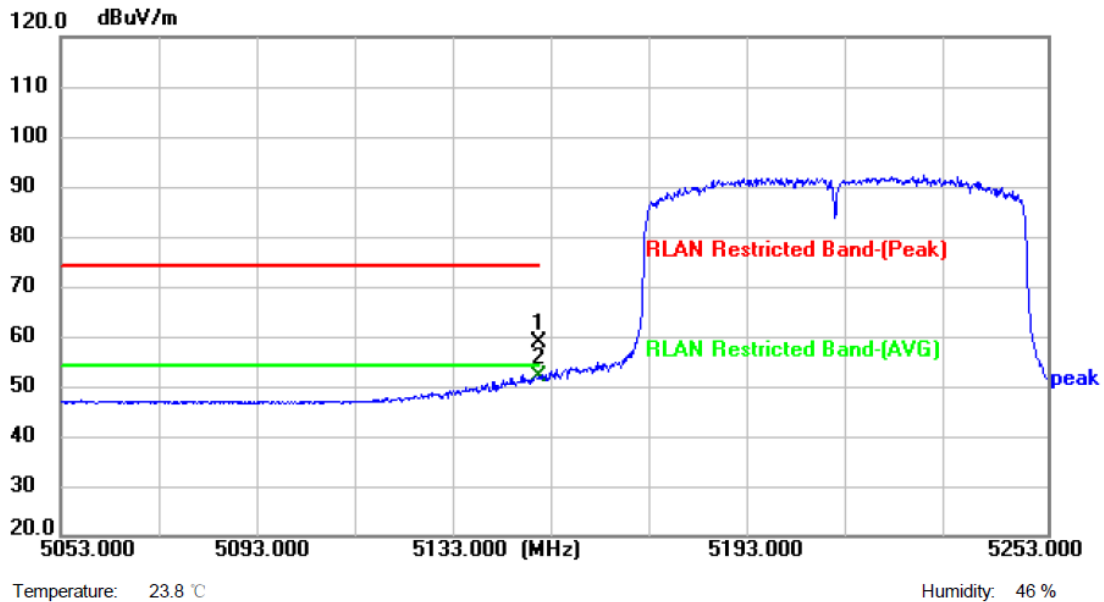


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.000	46.92	11.66	58.58	74.00	-15.42	peak	P
2 *	5150.000	40.36	11.66	52.02	54.00	-1.98	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A)-SISO-ANT.1
Remark:	

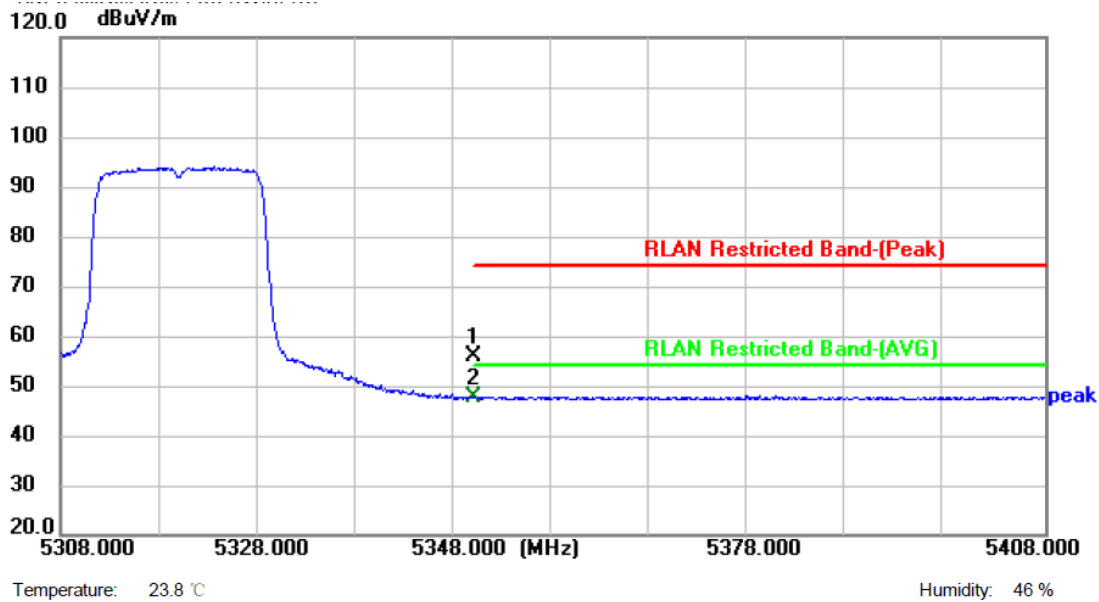


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.90	12.07	55.97	74.00	-18.03	peak	P
2 *	5350.000	35.59	12.07	47.66	54.00	-6.34	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5320 MHz (U-NII-2A) -SISO-ANT.1
Remark:	

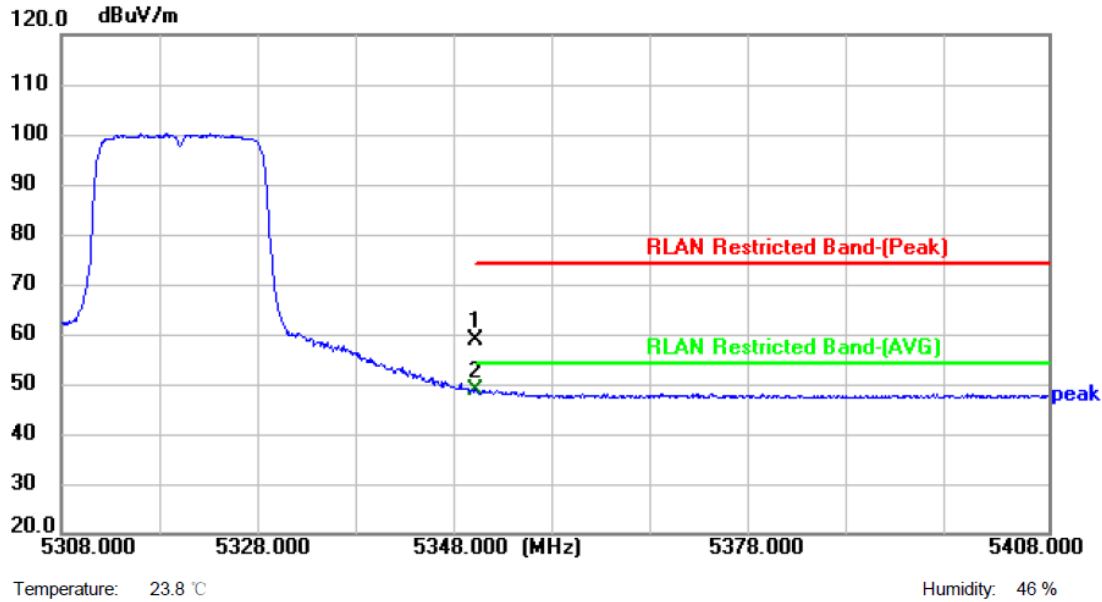


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	46.65	12.07	58.72	74.00	-15.28	peak	P
2 *	5350.000	36.68	12.07	48.75	54.00	-5.25	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5320 MHz (U-NII-2A)
Remark:	

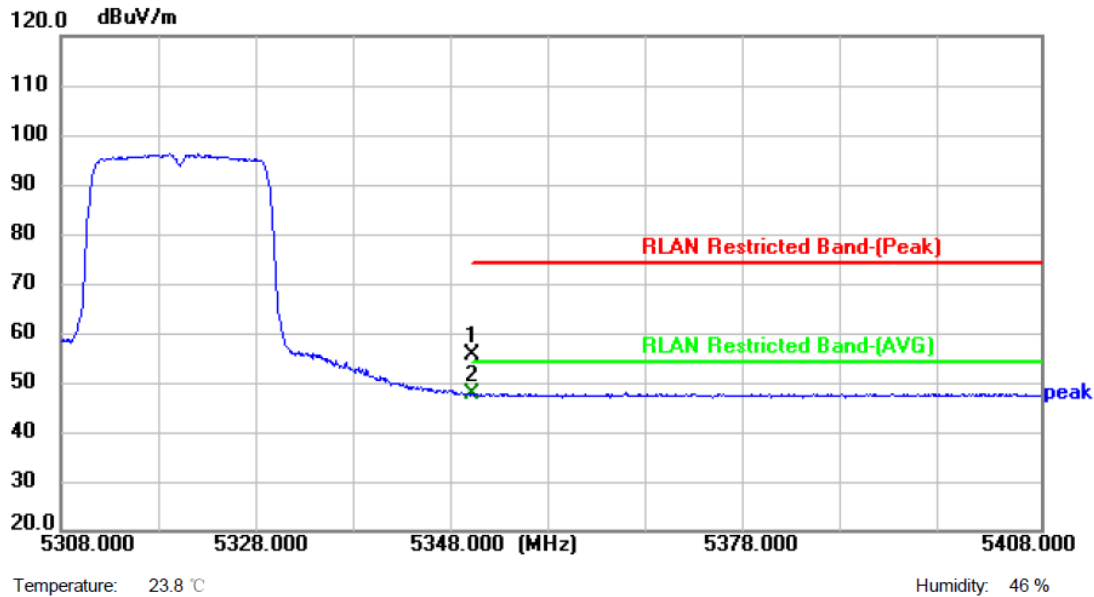

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	43.58	12.07	55.65	74.00	-18.35	peak	P
2 *	5350.000	35.62	12.07	47.69	54.00	-6.31	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)




Temperature: 23.8 °C Humidity: 46 %

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)
Remark:	

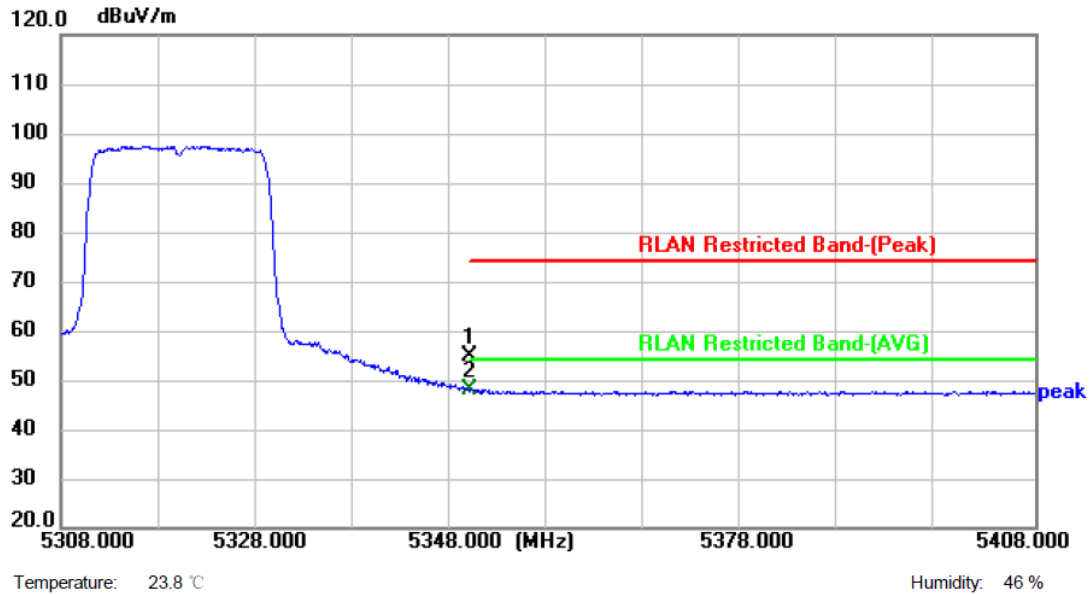


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	42.62	12.07	54.69	74.00	-19.31	peak	P
2 *	5350.000	35.95	12.07	48.02	54.00	-5.98	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5320 MHz (U-NII-2A)
Remark:	

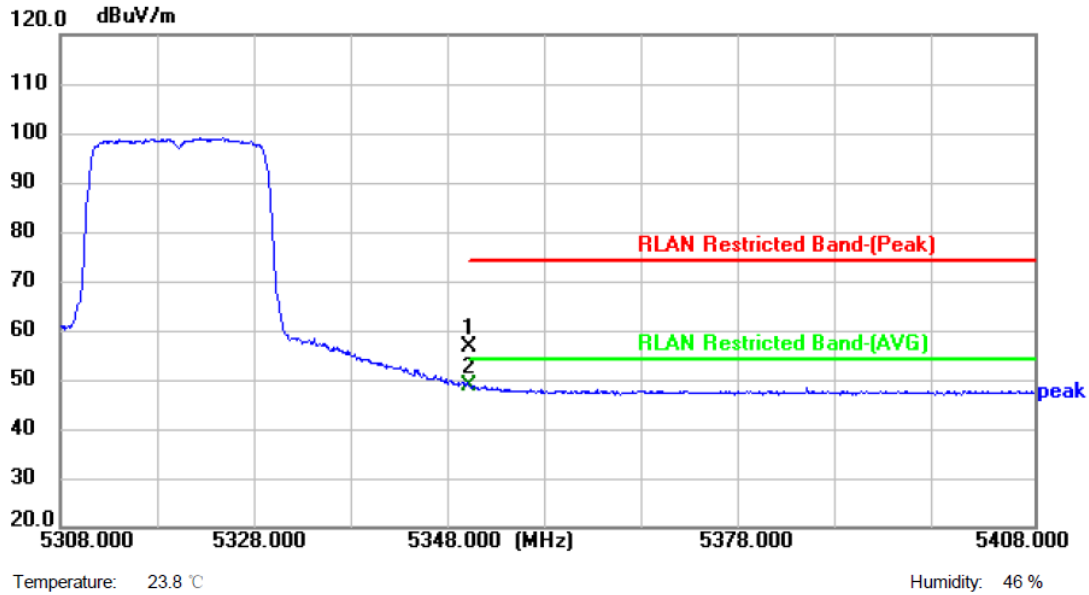


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.52	12.07	56.59	74.00	-17.41	peak	P
2 *	5350.000	36.71	12.07	48.78	54.00	-5.22	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)
Remark:	

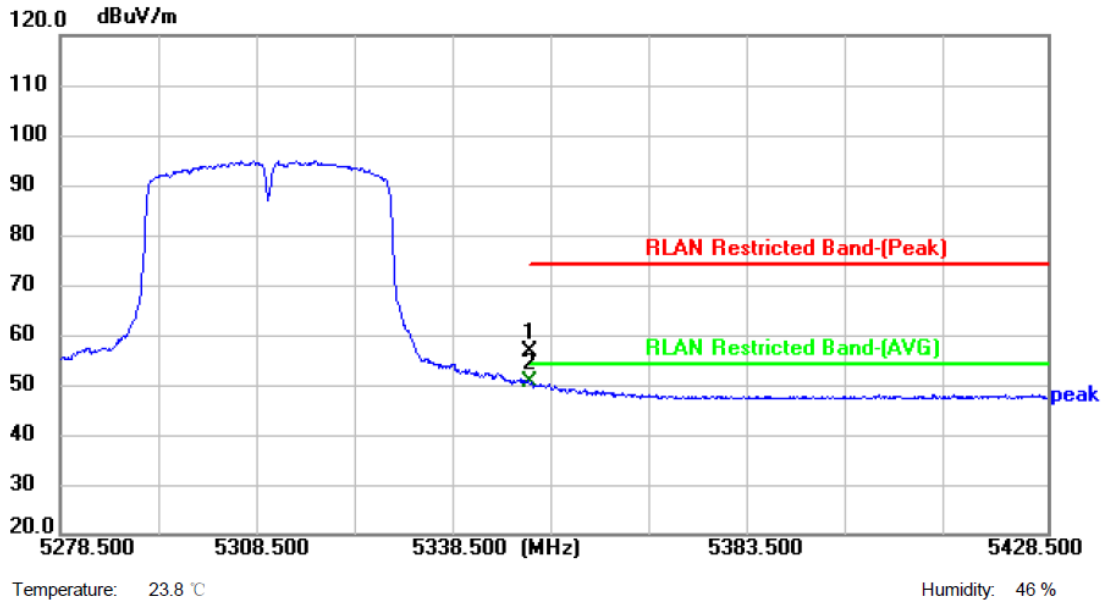


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.47	12.07	56.54	74.00	-17.46	peak	P
2 *	5350.000	38.55	12.07	50.62	54.00	-3.38	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A)
Remark:	

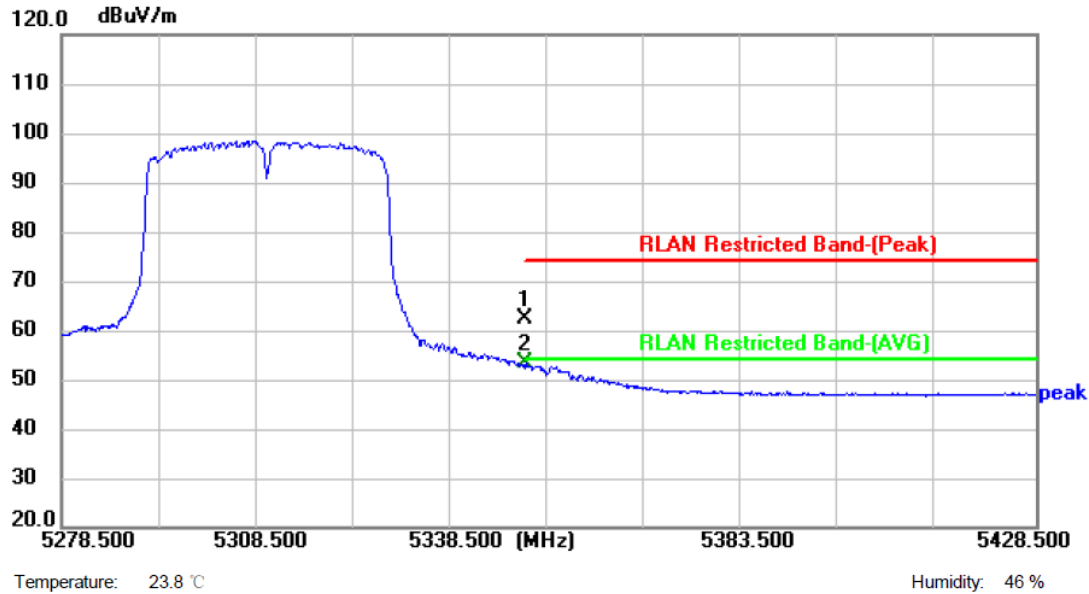


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	50.28	12.07	62.35	74.00	-11.65	peak	P
2 *	5350.000	41.15	12.07	53.22	54.00	-0.78	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)
Remark:	

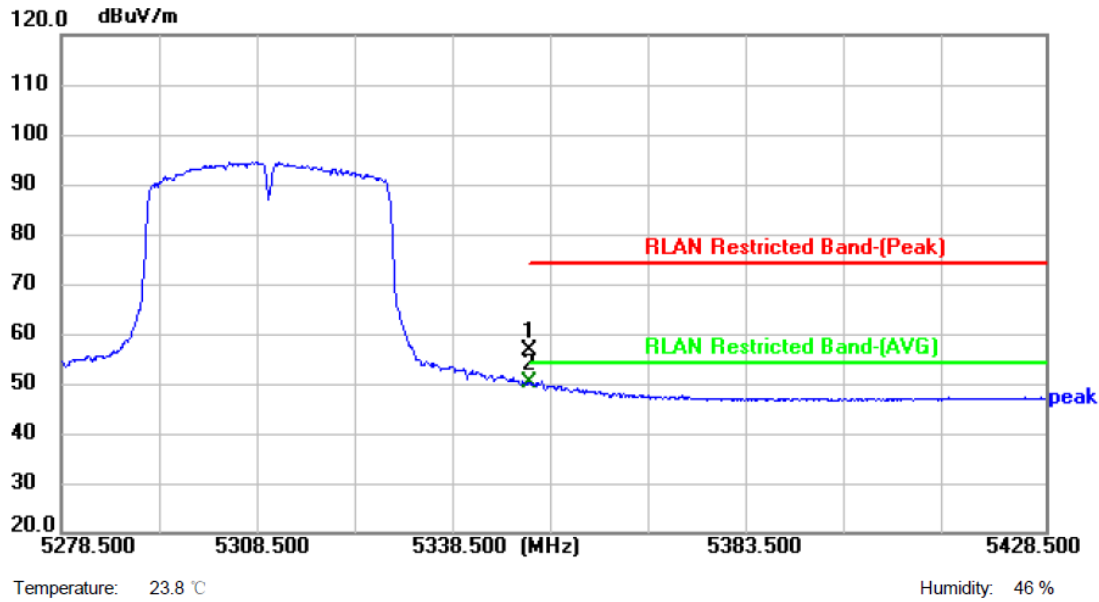


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	44.49	12.07	56.56	74.00	-17.44	peak	P
2 *	5350.000	37.99	12.07	50.06	54.00	-3.94	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A)
Remark:	

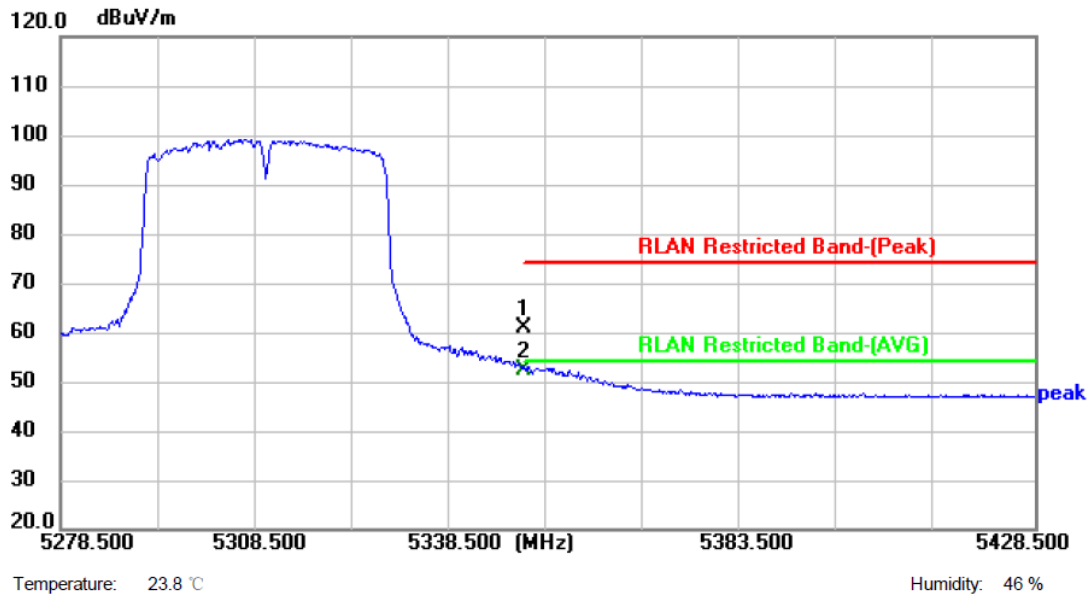


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	48.80	12.07	60.87	74.00	-13.13	peak	P
2 *	5350.000	40.18	12.07	52.25	54.00	-1.75	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)
Remark:	

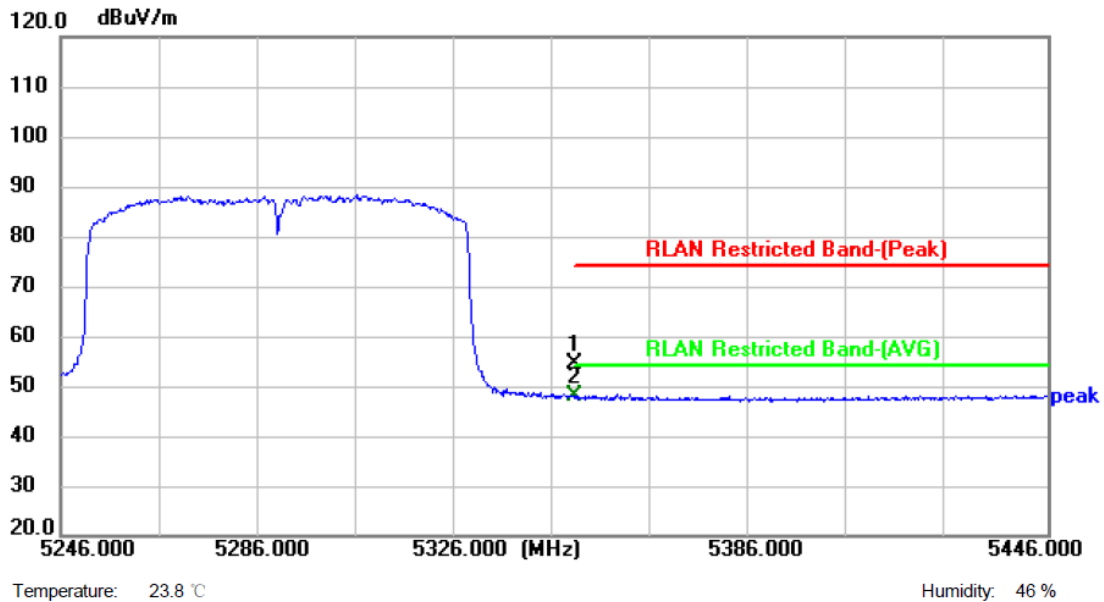


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	42.41	12.07	54.48	74.00	-19.52	peak	P
2 *	5350.000	35.97	12.07	48.04	54.00	-5.96	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5290 MHz (U-NII-2A)
Remark:	

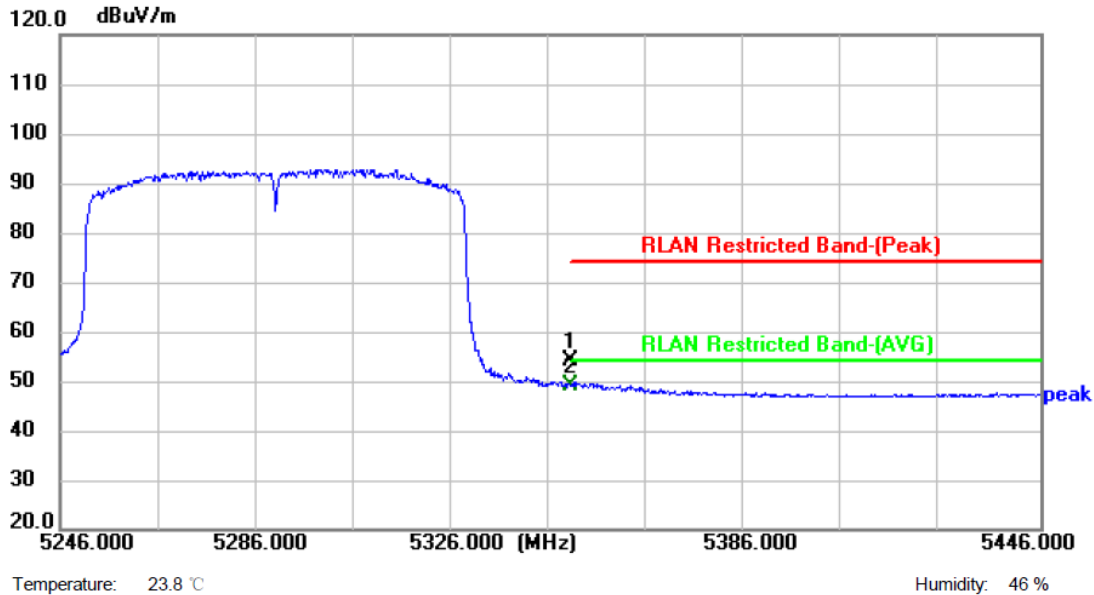


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5350.000	41.92	12.07	53.99	74.00	-20.01	peak	P
2 *	5350.000	37.10	12.07	49.17	54.00	-4.83	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)
Remark:	

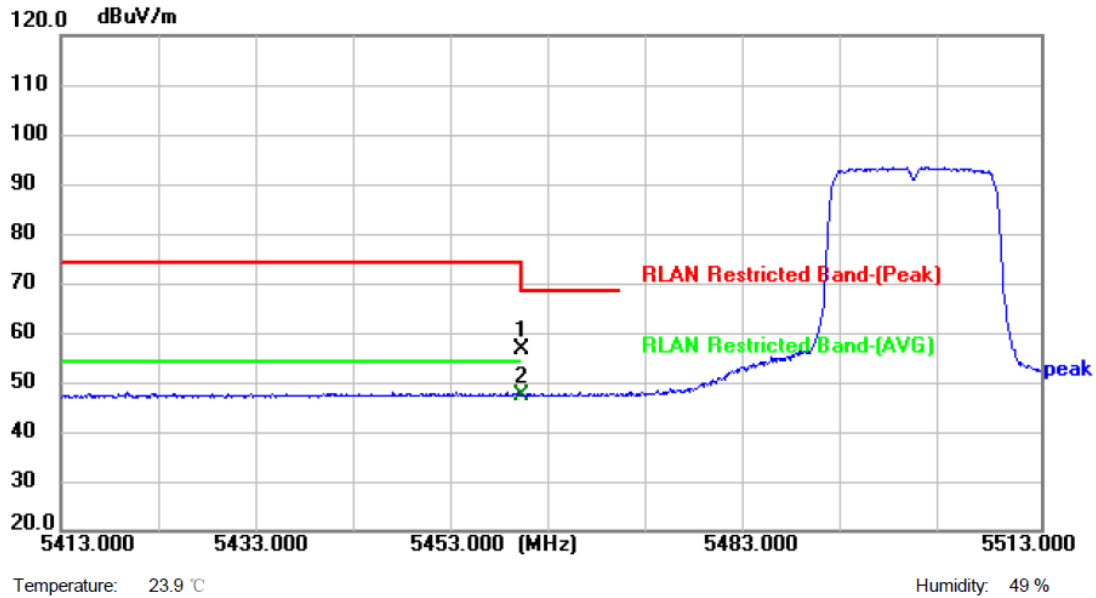


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.34	12.12	56.46	68.30	-11.84	peak	P
2 *	5460.000	35.17	12.12	47.29	54.00	-6.71	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5500 MHz (U-NII-2C)
Remark:	

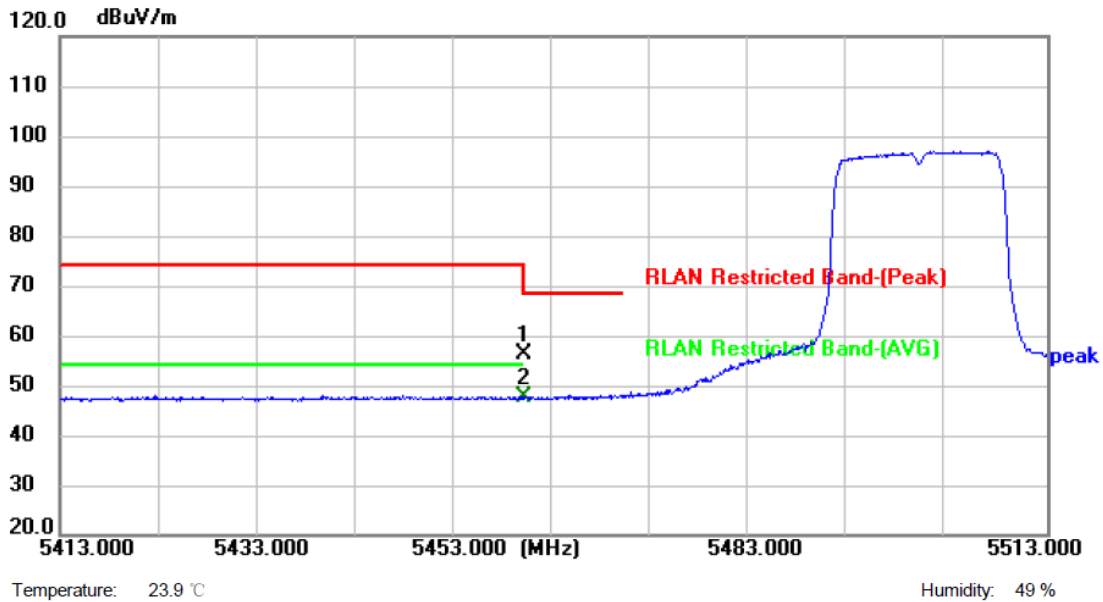


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.06	12.12	56.18	68.30	-12.12	peak	P
2 *	5460.000	35.73	12.12	47.85	54.00	-6.15	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)
Remark:	

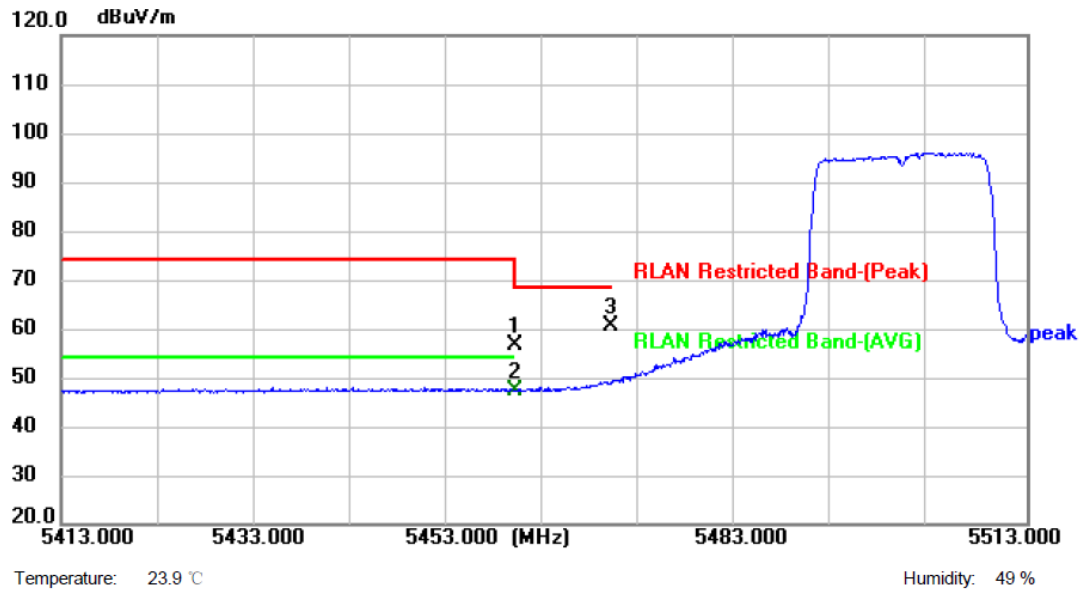


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.39	12.12	56.51	68.30	-11.79	peak	P
2 *	5460.000	35.29	12.12	47.41	54.00	-6.59	AVG	P
3	5470.000	48.55	12.07	60.62	68.30	-7.68	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C)
Remark:	

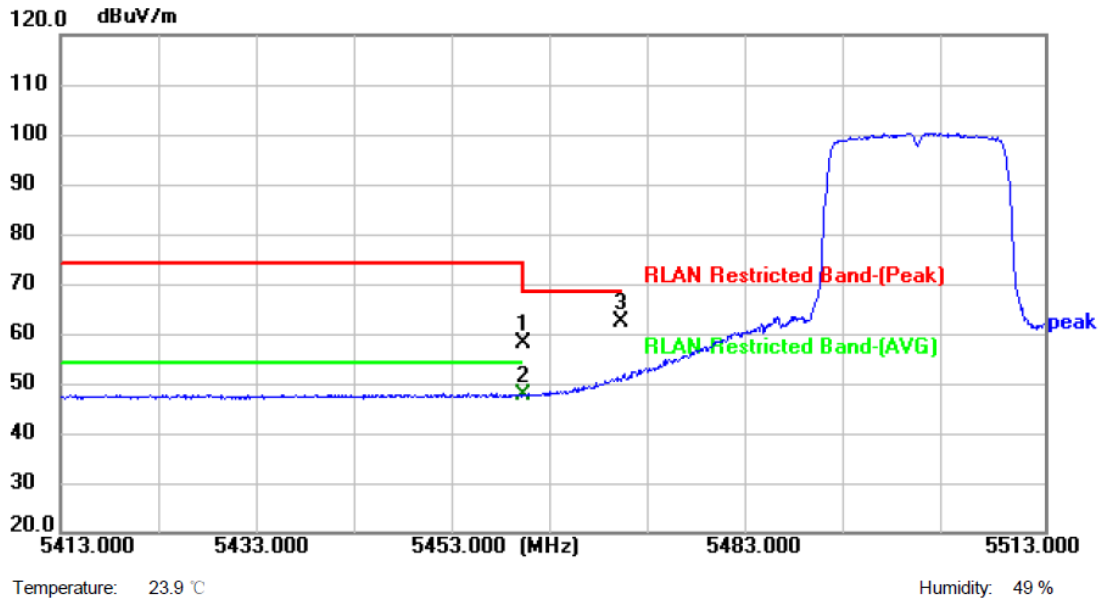


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	45.88	12.12	58.00	68.30	-10.30	peak	P
2	5460.000	35.68	12.12	47.80	54.00	-6.20	AVG	P
3 *	5470.000	50.32	12.07	62.39	68.30	-5.91	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C)
Remark:	

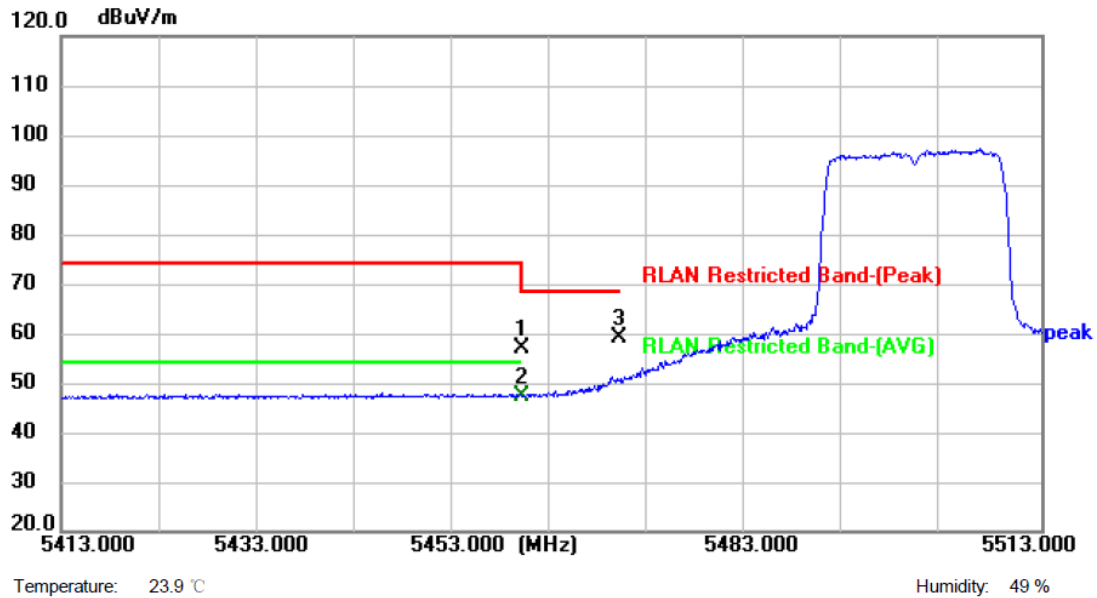

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.87	12.12	56.99	68.30	-11.31	peak	P
2 *	5460.000	35.25	12.12	47.37	54.00	-6.63	AVG	P
3	5470.000	47.17	12.07	59.24	68.30	-9.06	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)




Remark:

- 1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)**
- 2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)**
- 3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)**



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)
Remark:	

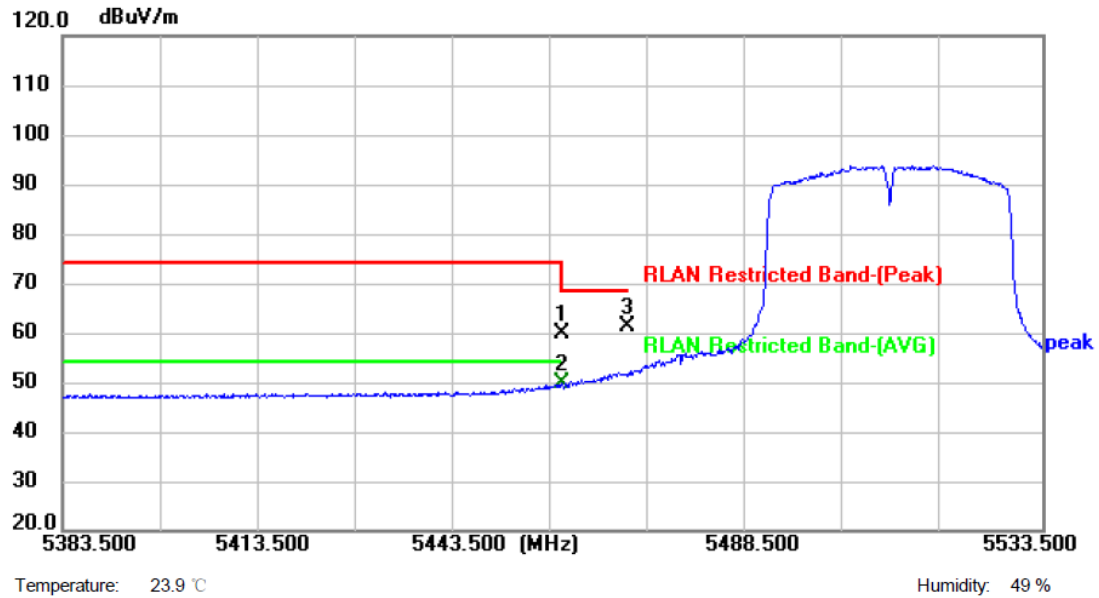


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	47.53	12.12	59.65	68.30	-8.65	peak	P
2 *	5460.000	37.82	12.12	49.94	54.00	-4.06	AVG	P
3	5470.000	49.27	12.07	61.34	68.30	-6.96	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C)
Remark:	

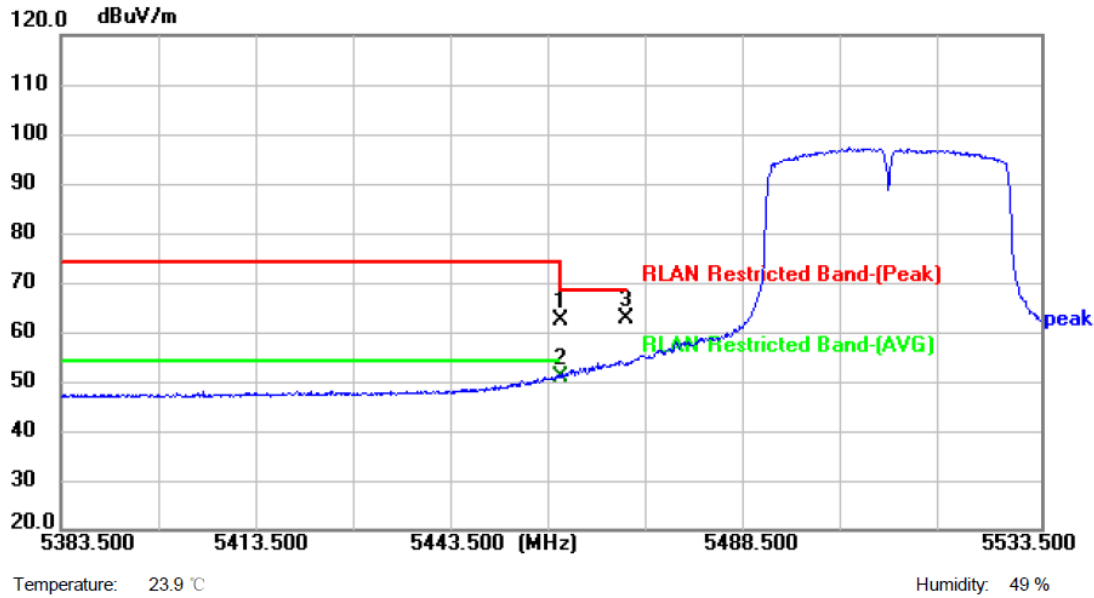


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	50.12	12.12	62.24	68.30	-6.06	peak	P
2 *	5460.000	38.89	12.12	51.01	54.00	-2.99	AVG	P
3	5470.000	50.74	12.07	62.81	68.30	-5.49	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)
Remark:	

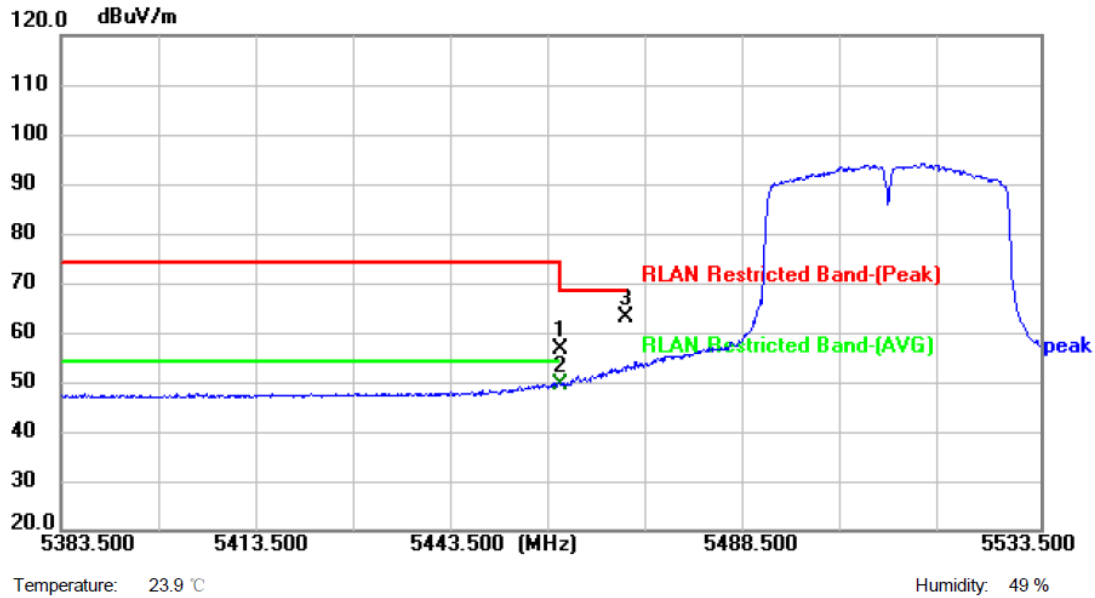


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.37	12.12	56.49	68.30	-11.81	peak	P
2 *	5460.000	37.44	12.12	49.56	54.00	-4.44	AVG	P
3	5470.000	50.82	12.07	62.89	68.30	-5.41	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C)
Remark:	

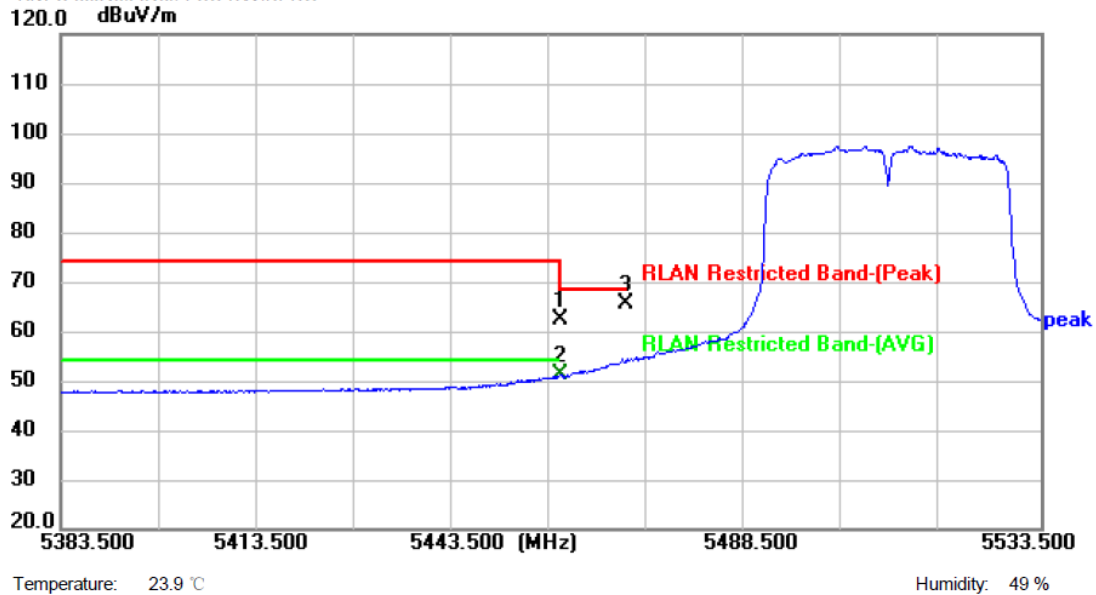


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	50.10	12.12	62.22	68.30	-6.08	peak	P
2	5460.000	39.01	12.12	51.13	54.00	-2.87	AVG	P
3 *	5470.000	53.49	12.07	65.56	68.30	-2.74	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)
Remark:	

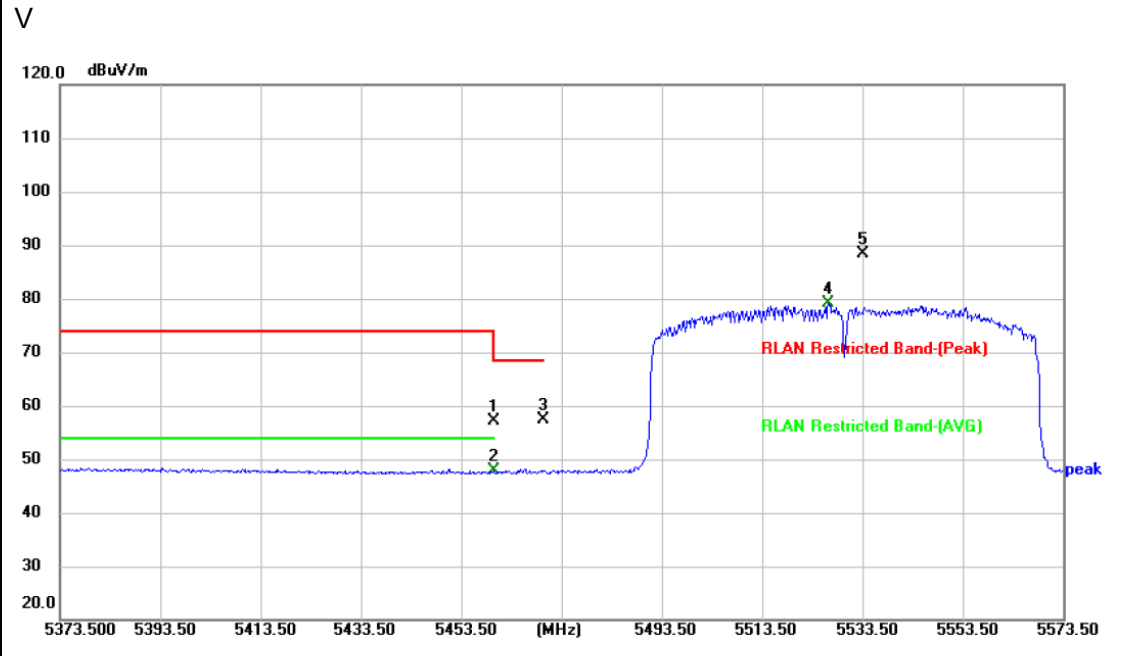


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	44.13	12.12	56.25	68.30	-12.05	peak	P
2 *	5460.000	36.14	12.12	48.26	54.00	-5.74	AVG	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5530 MHz (U-NII-2C)
Remark:	

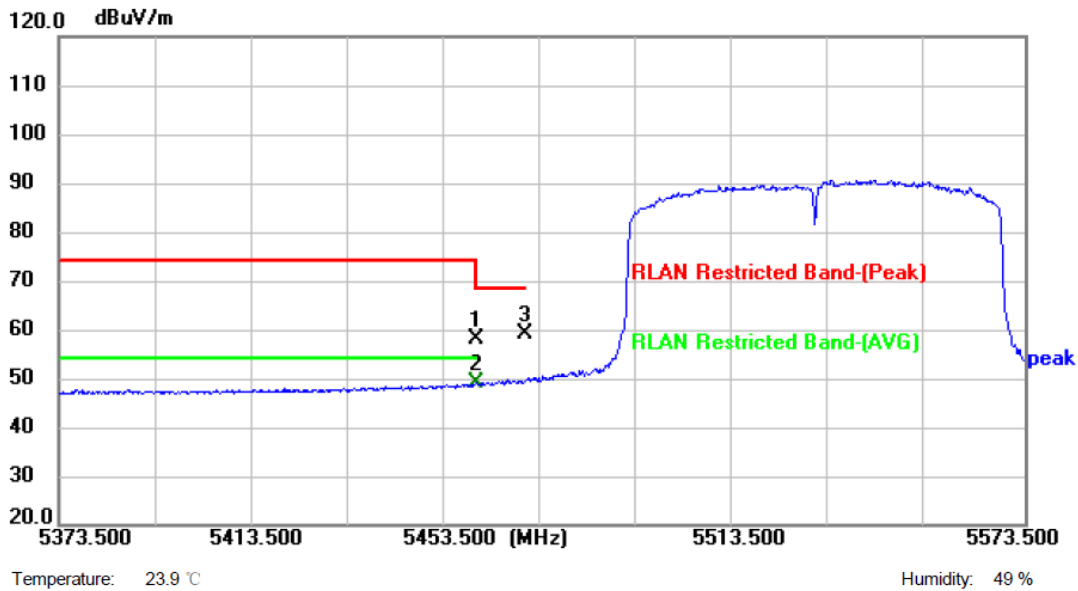


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5460.000	45.95	12.12	58.07	68.30	-10.23	peak	P
2 *	5460.000	36.93	12.12	49.05	54.00	-4.95	AVG	P
3	5470.000	46.99	12.07	59.06	68.30	-9.24	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)
Remark:	

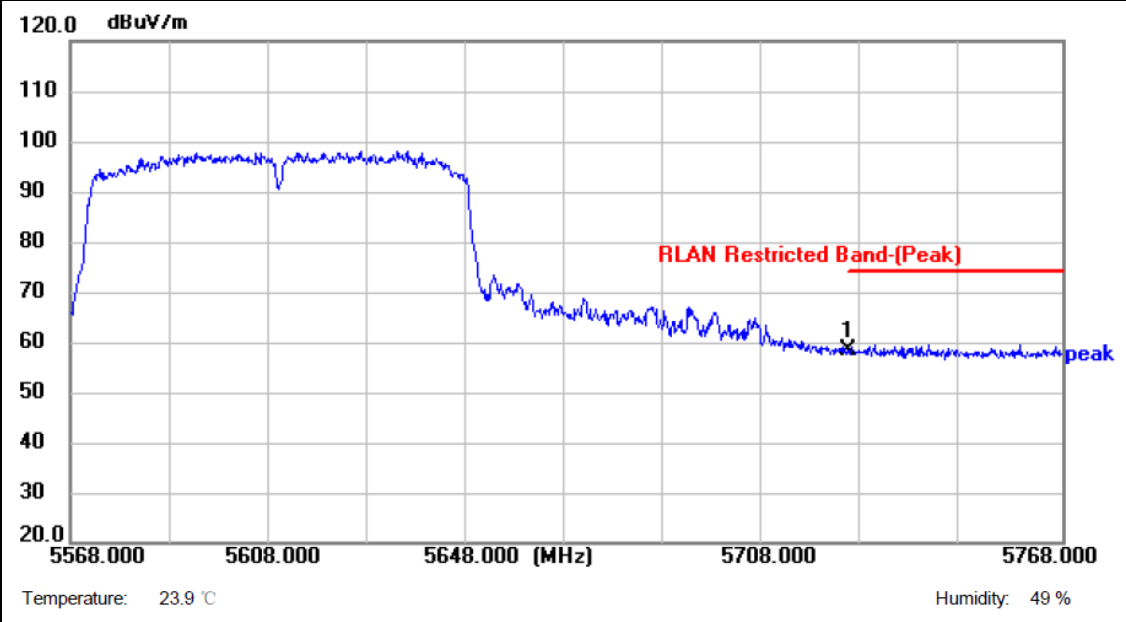


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	44.79	13.59	58.38	74.00	-15.62	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5610 MHz (U-NII-2C)
Remark:	

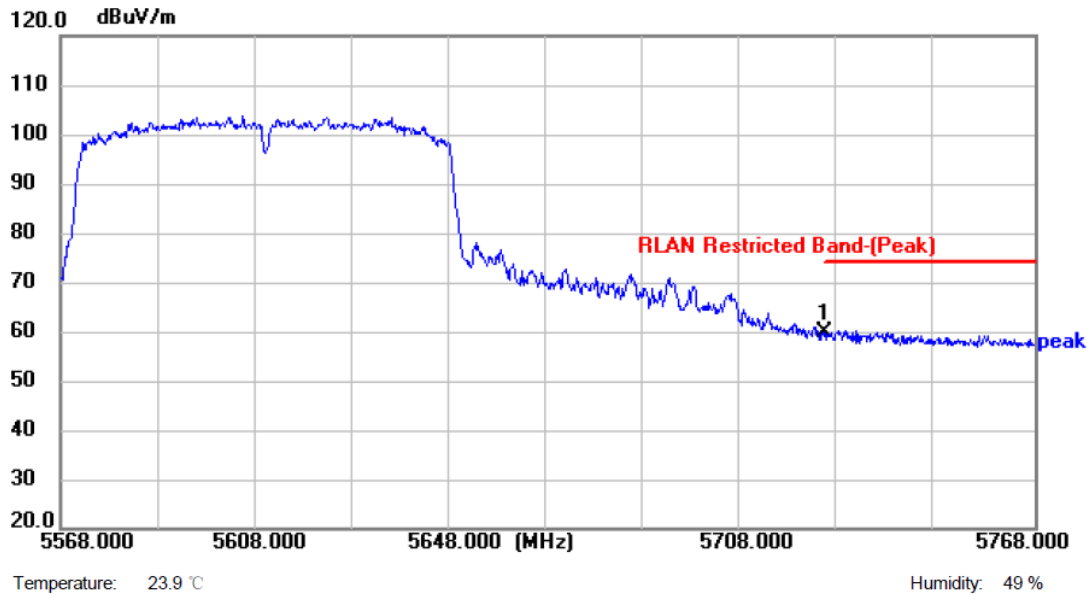


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	46.22	13.59	59.81	74.00	-14.19	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3)-SISO ANT.1
Remark:	

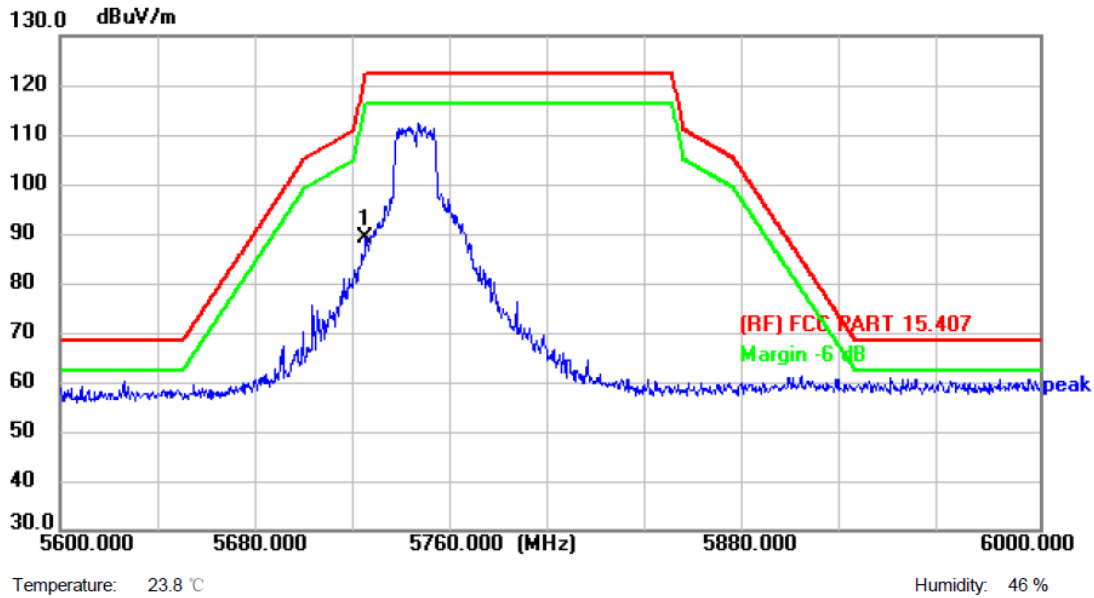


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	75.42	13.59	89.01	122.30	-33.29	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5745 MHz (U-NII-3) -SISO ANT.1
Remark:	

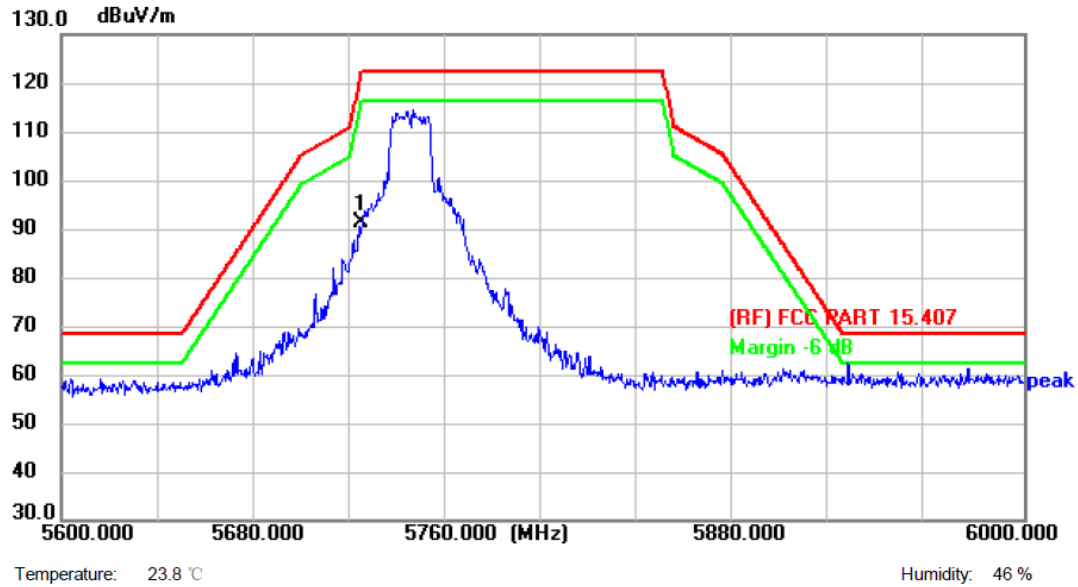


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	77.51	13.59	91.10	122.30	-31.20	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5825 MHz (U-NII-3) -SISO ANT.1
Remark:	

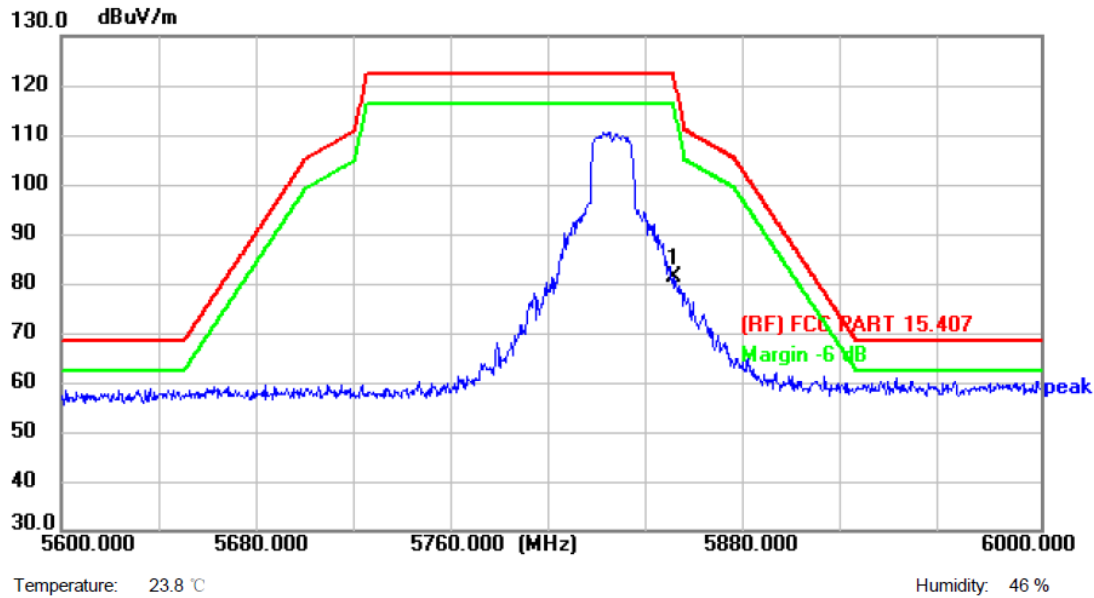

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	67.23	13.90	81.13	122.30	-41.17	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)




Temperature: 23.8 °C Humidity: 46 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	69.10	13.90	83.00	122.30	-39.30	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5745 MHz (U-NII-3)
Remark:	

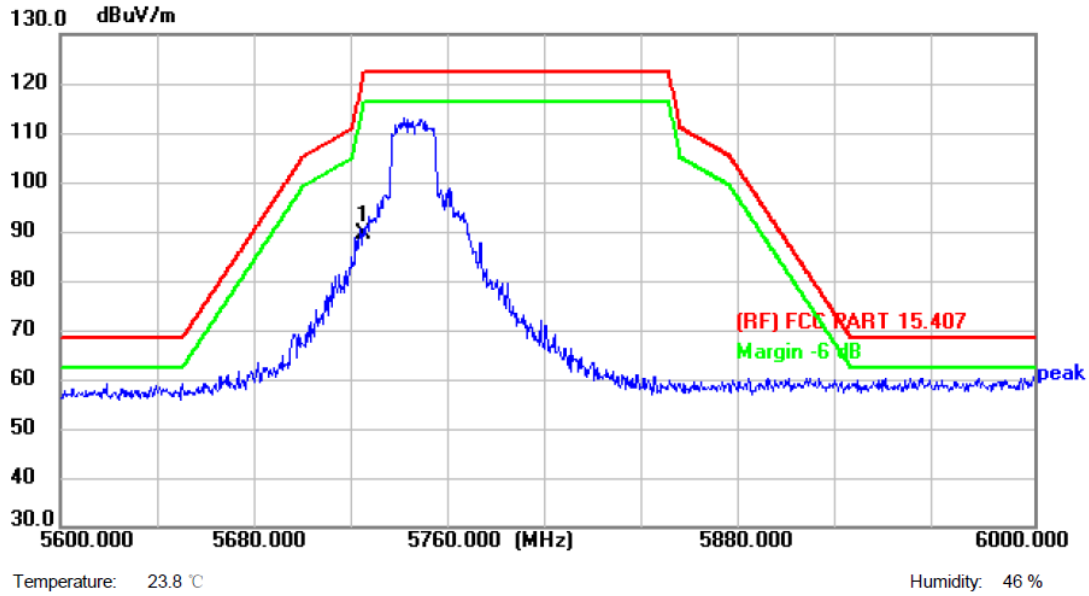


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	75.99	13.59	89.58	122.30	-32.72	peak	P


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



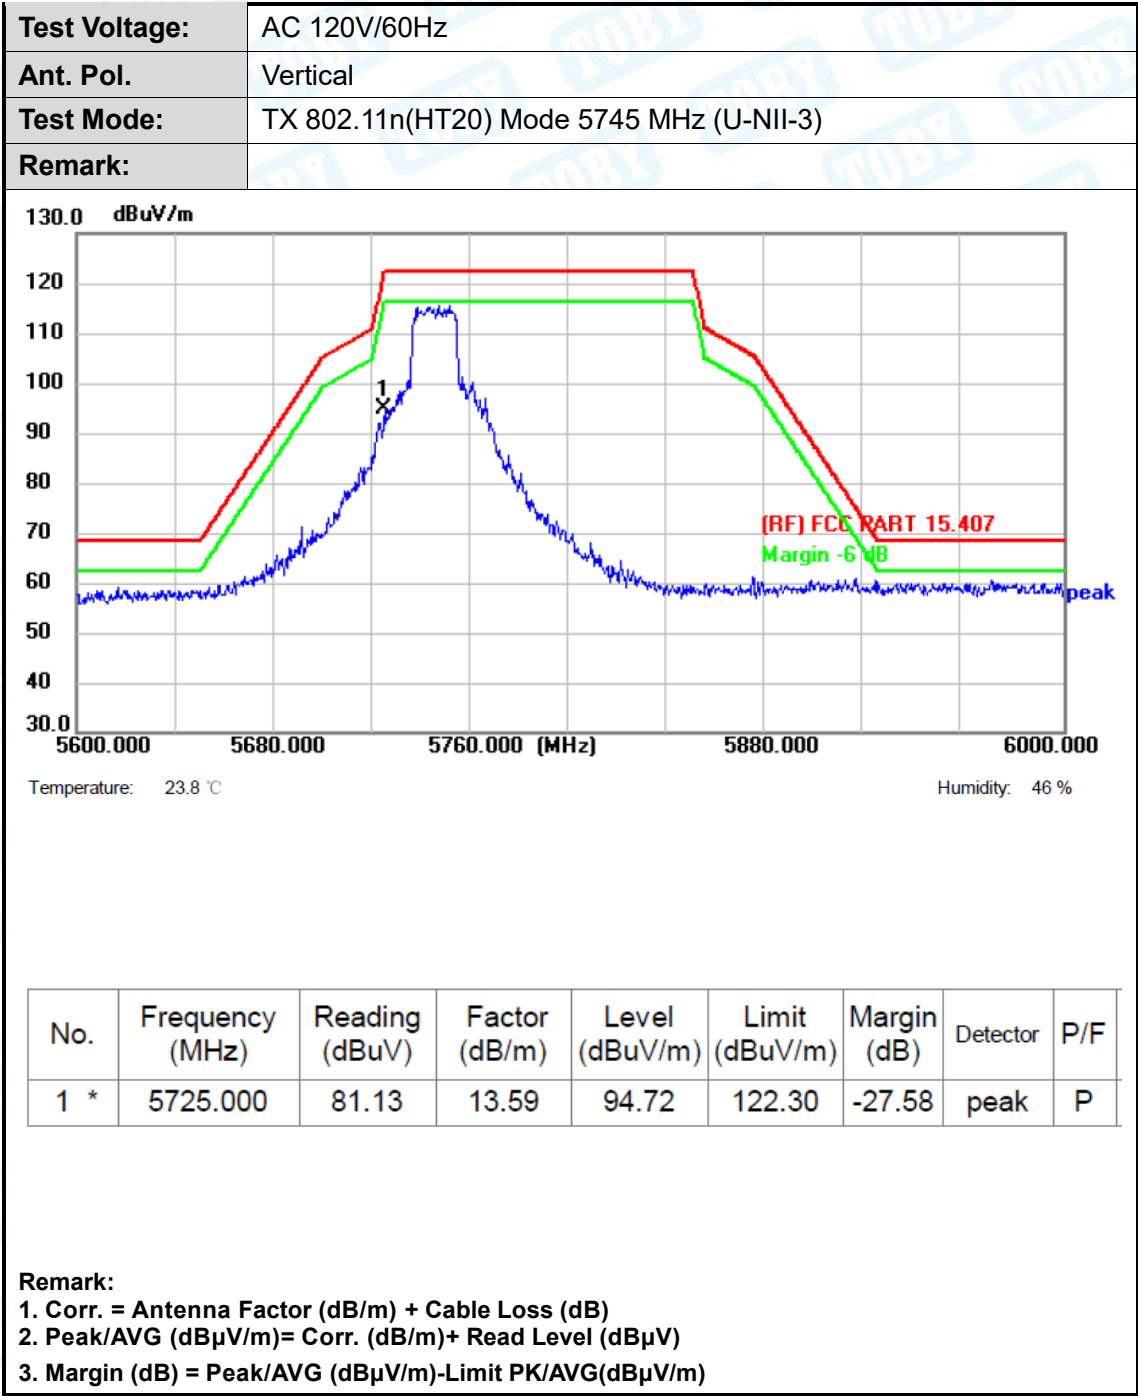

Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)
Remark:	

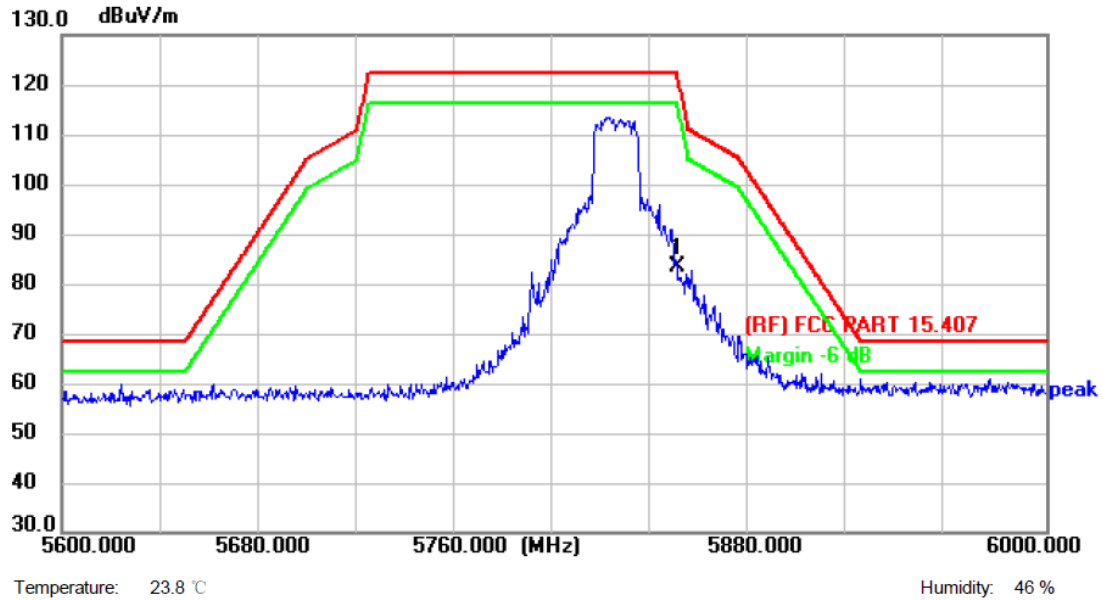


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	69.50	13.90	83.40	122.30	-38.90	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5825 MHz (U-NII-3)
Remark:	

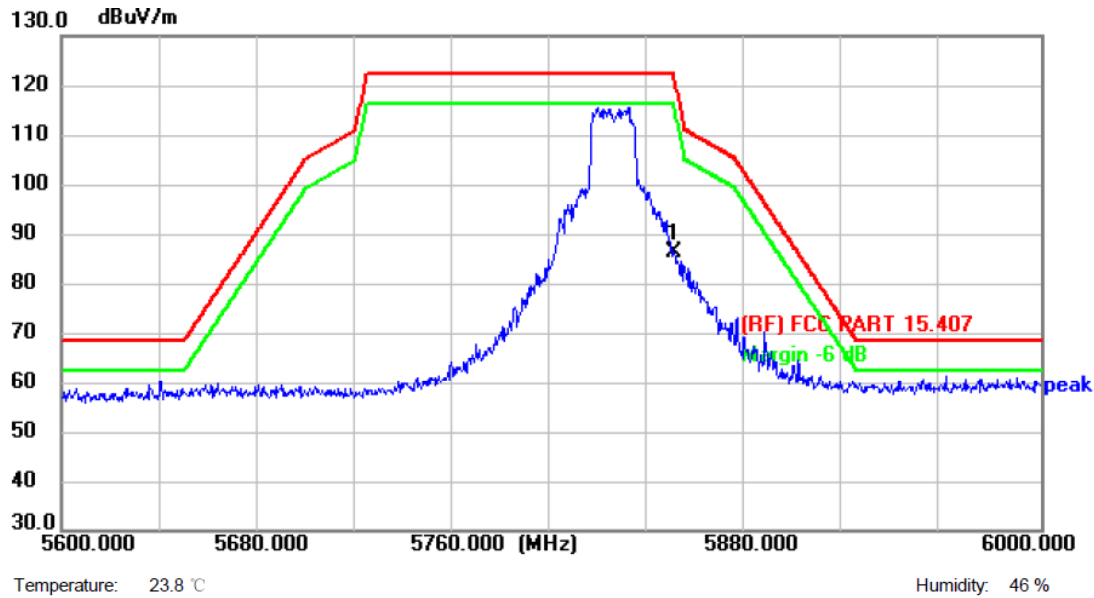


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	72.37	13.90	86.27	122.30	-36.03	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)
Remark:	

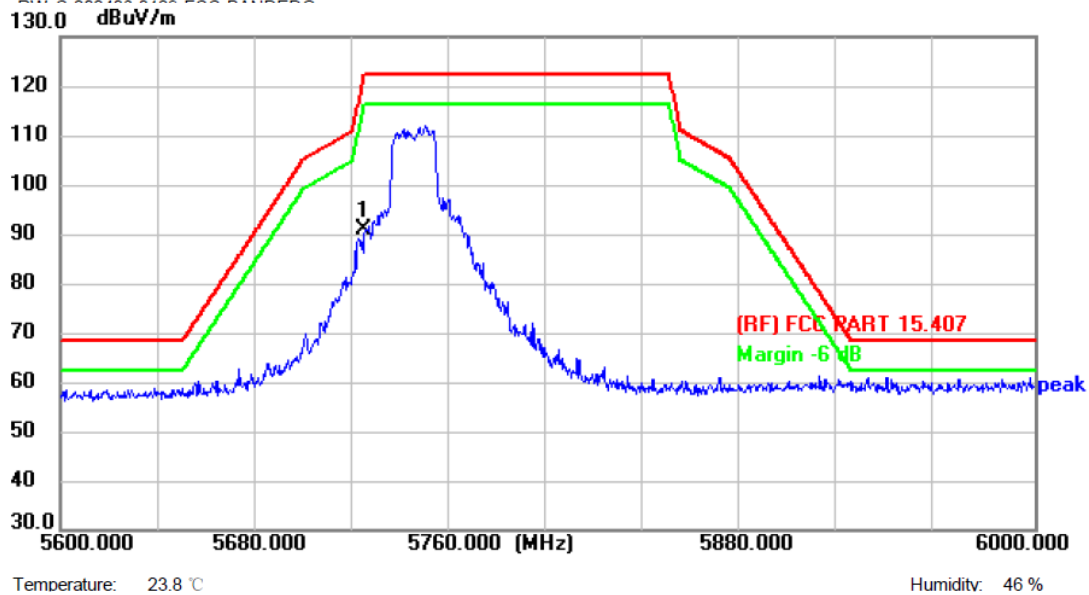


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	77.26	13.59	90.85	122.30	-31.45	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3)
Remark:	

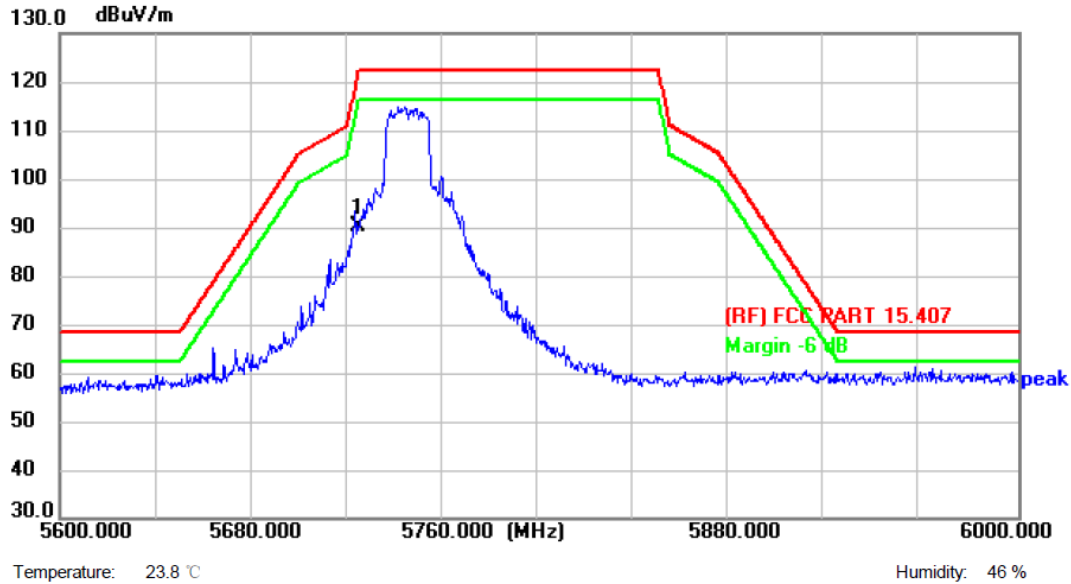


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	76.55	13.59	90.14	122.30	-32.16	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)
Remark:	

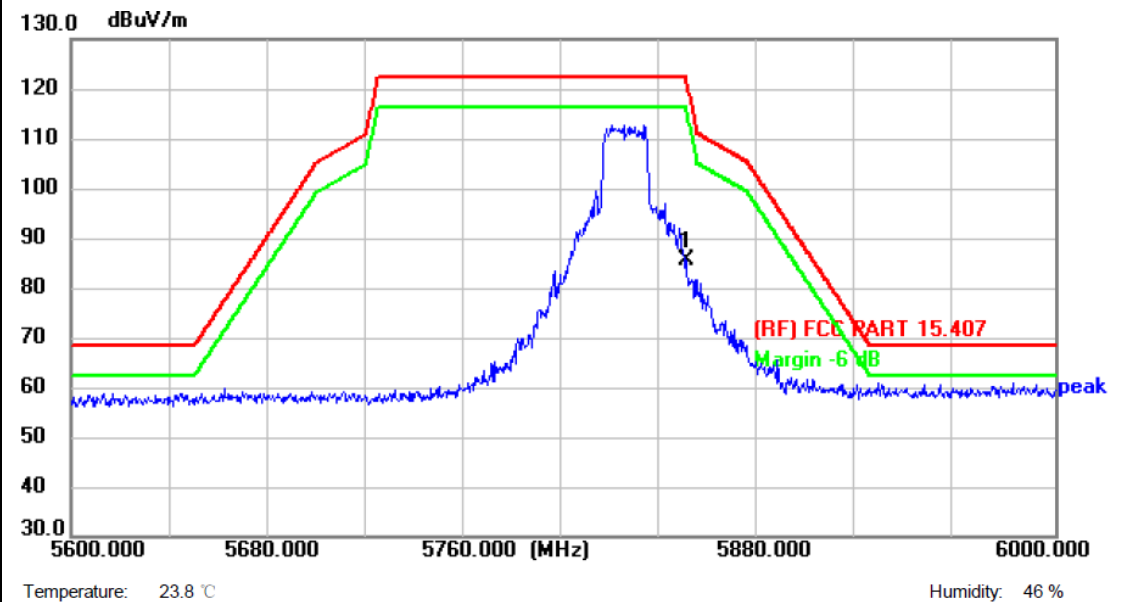


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	71.51	13.90	85.41	122.30	-36.89	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3)
Remark:	

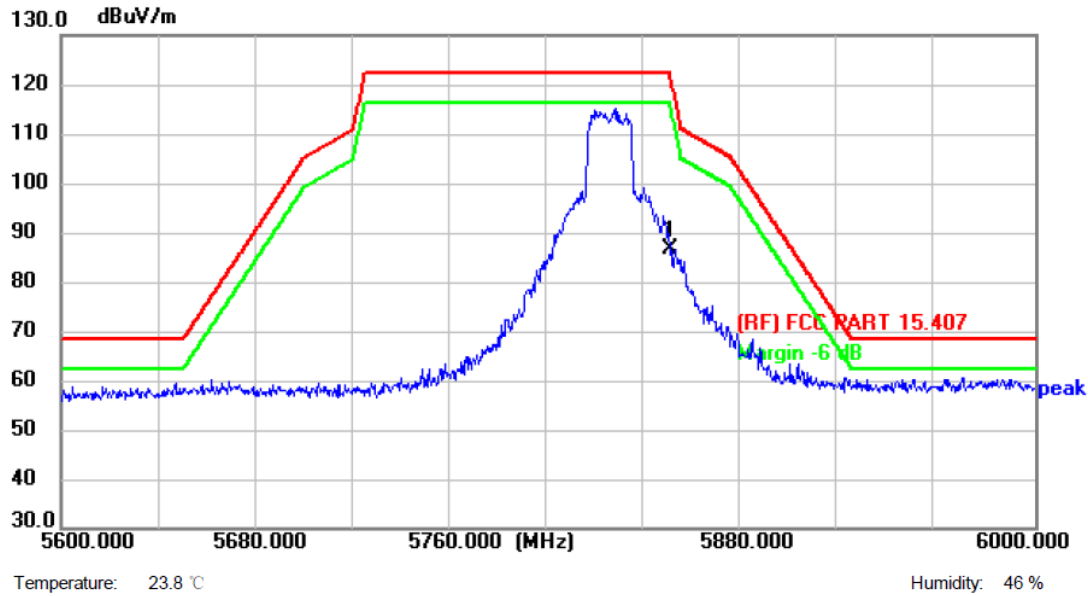


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	72.82	13.90	86.72	122.30	-35.58	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)
Remark:	

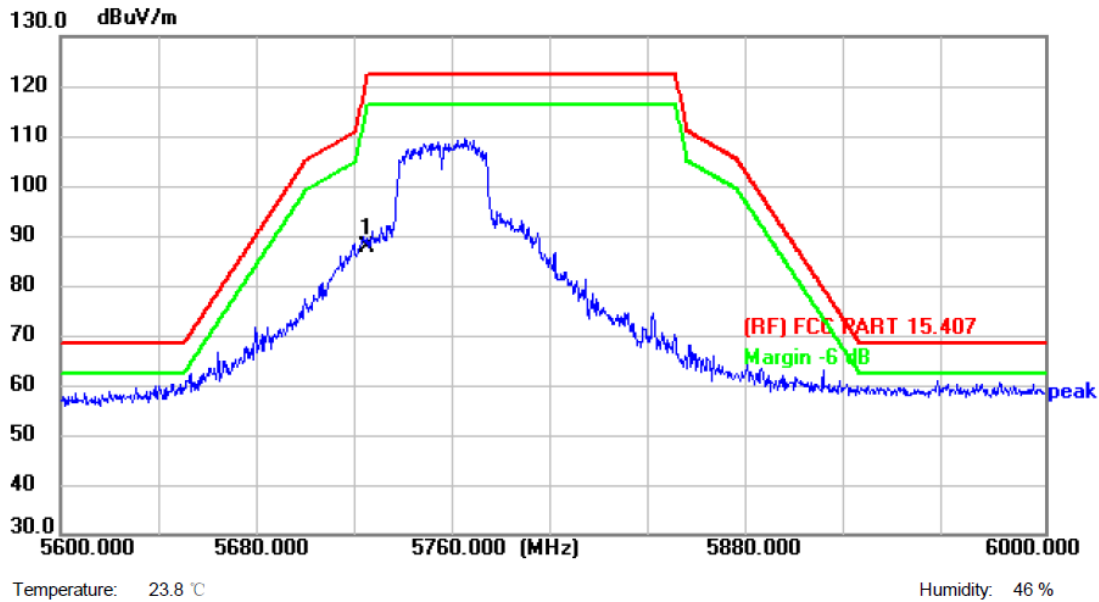


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	73.94	13.59	87.53	122.30	-34.77	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)
Remark:	

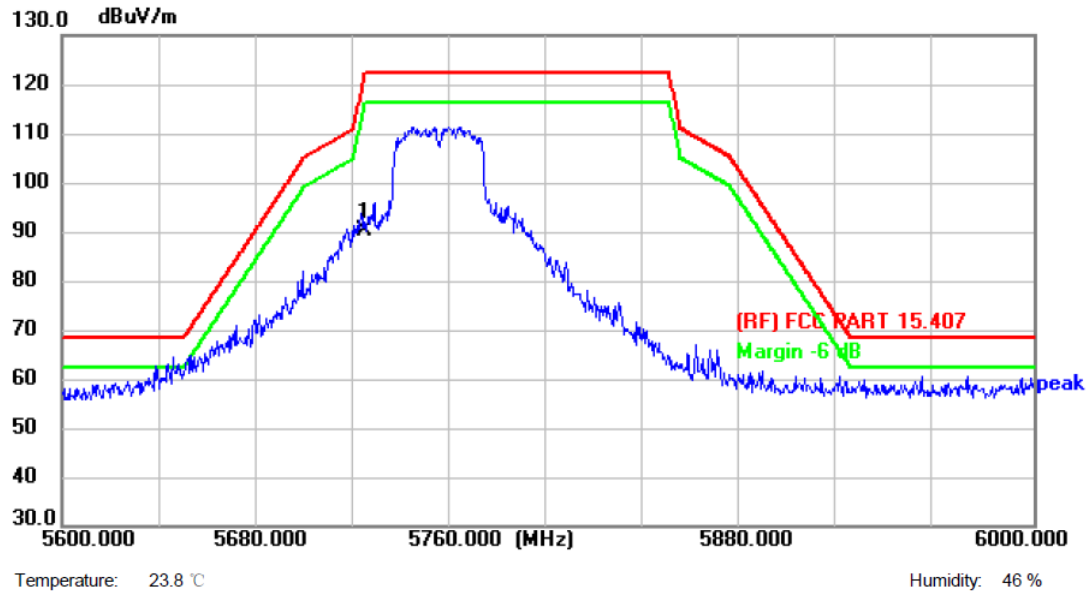


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	76.59	13.59	90.18	122.30	-32.12	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)
Remark:	

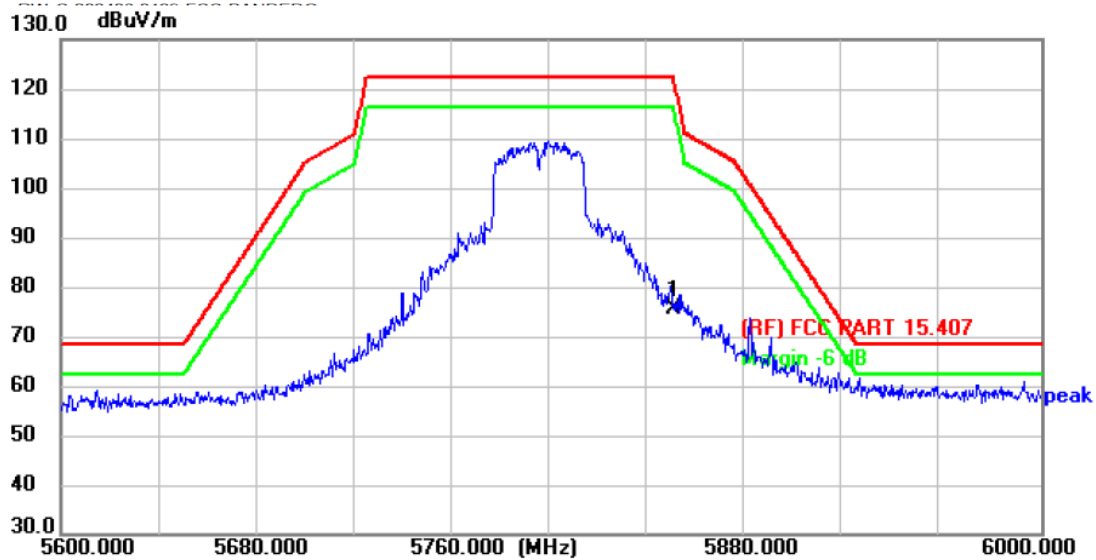


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	61.54	13.90	75.44	122.30	-46.86	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)
Remark:	

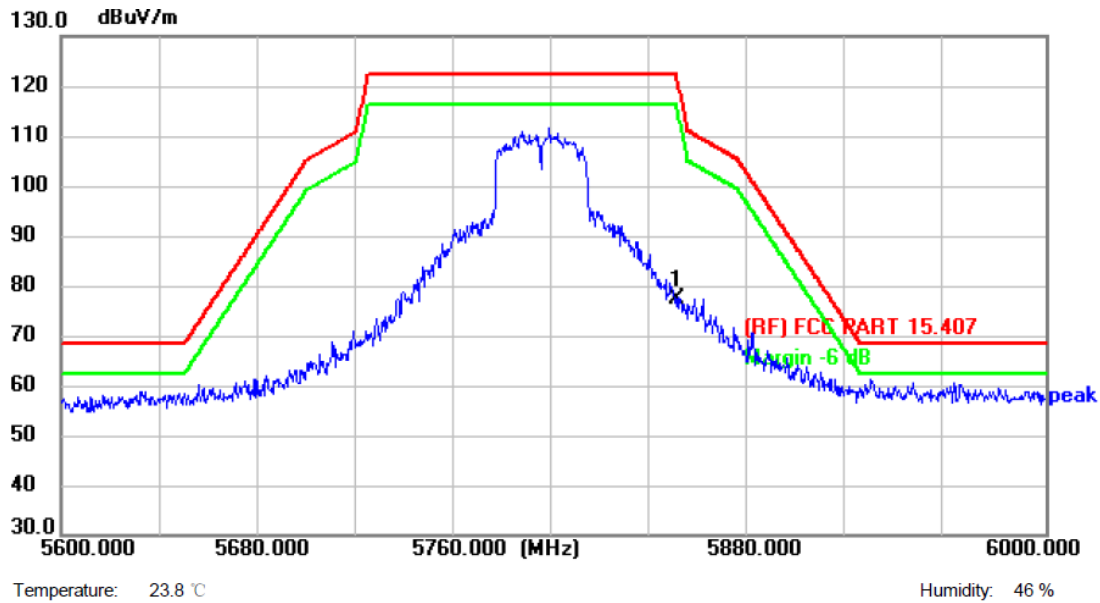


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	63.29	13.90	77.19	122.30	-45.11	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)
Remark:	

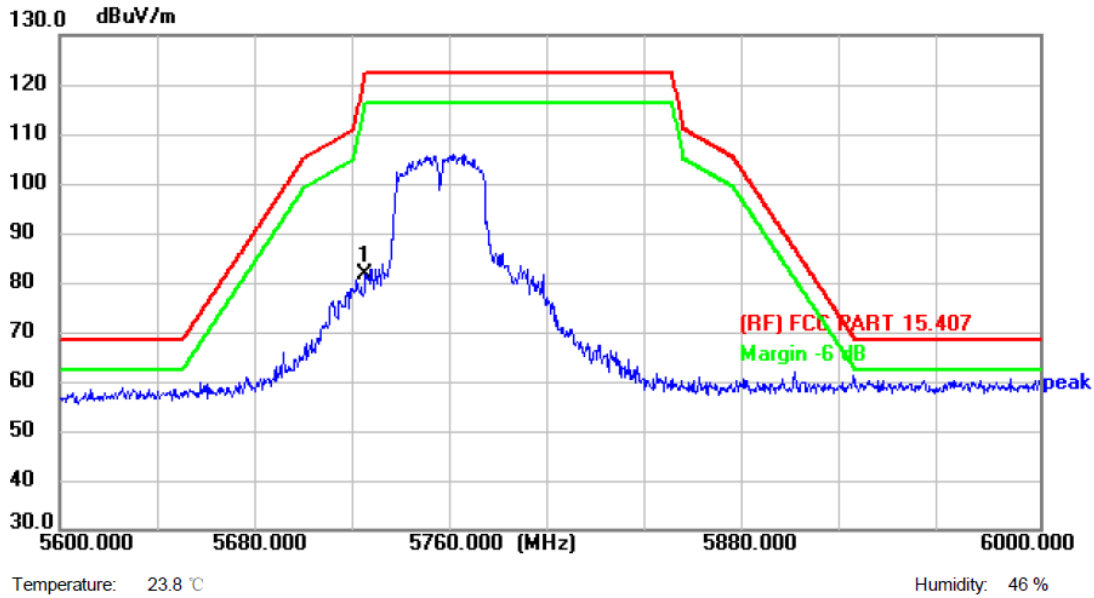


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	67.97	13.59	81.56	122.30	-40.74	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3)
Remark:	

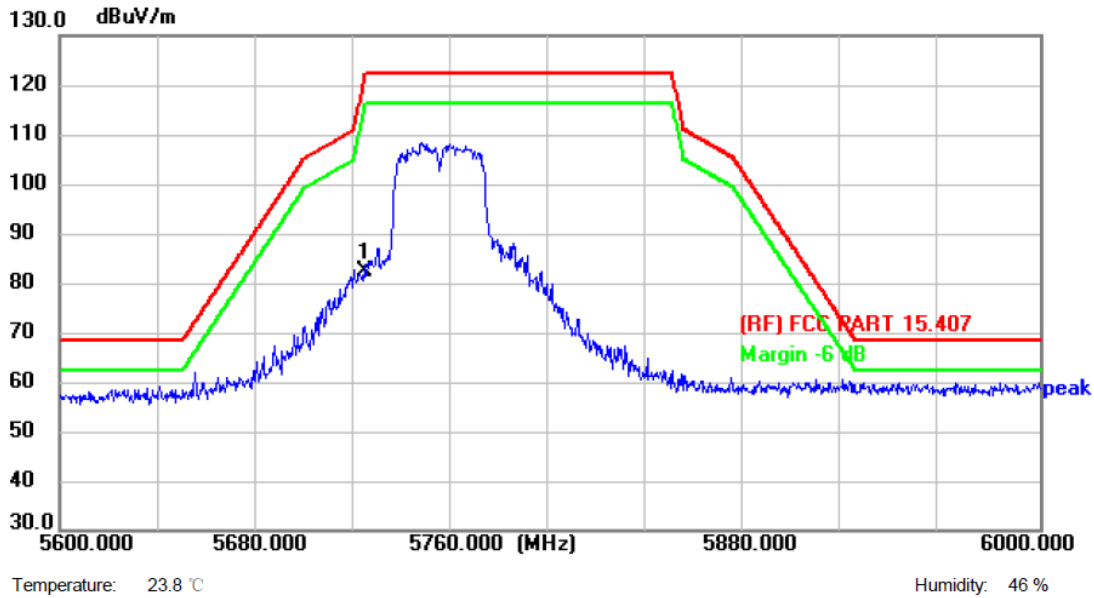


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	68.62	13.59	82.21	122.30	-40.09	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)
Remark:	

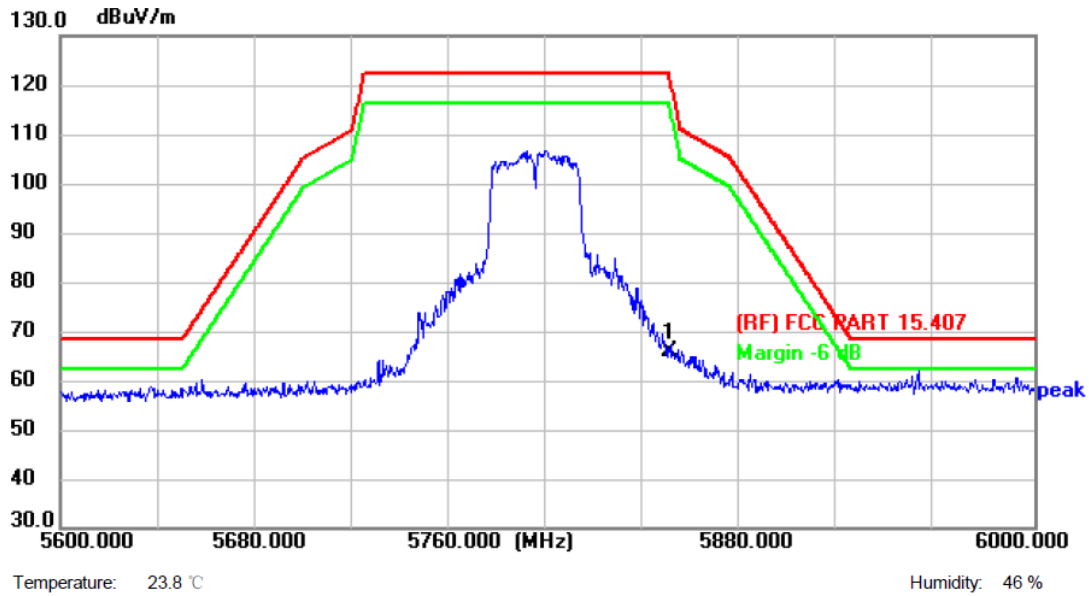


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	52.09	13.90	65.99	122.30	-56.31	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3)
Remark:	

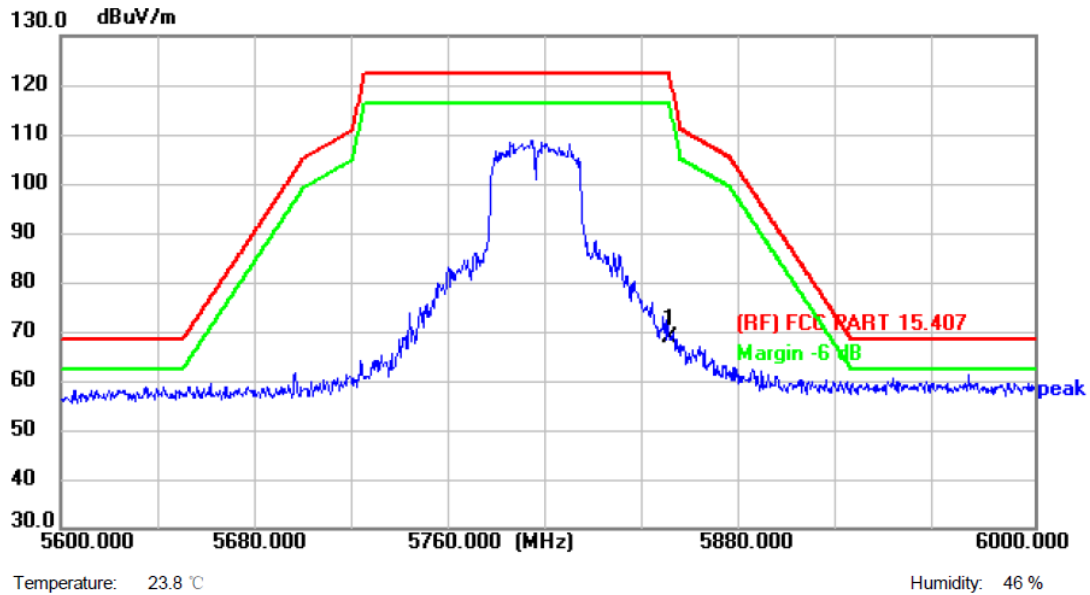


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5850.000	54.68	13.90	68.58	122.30	-53.72	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)
Remark:	

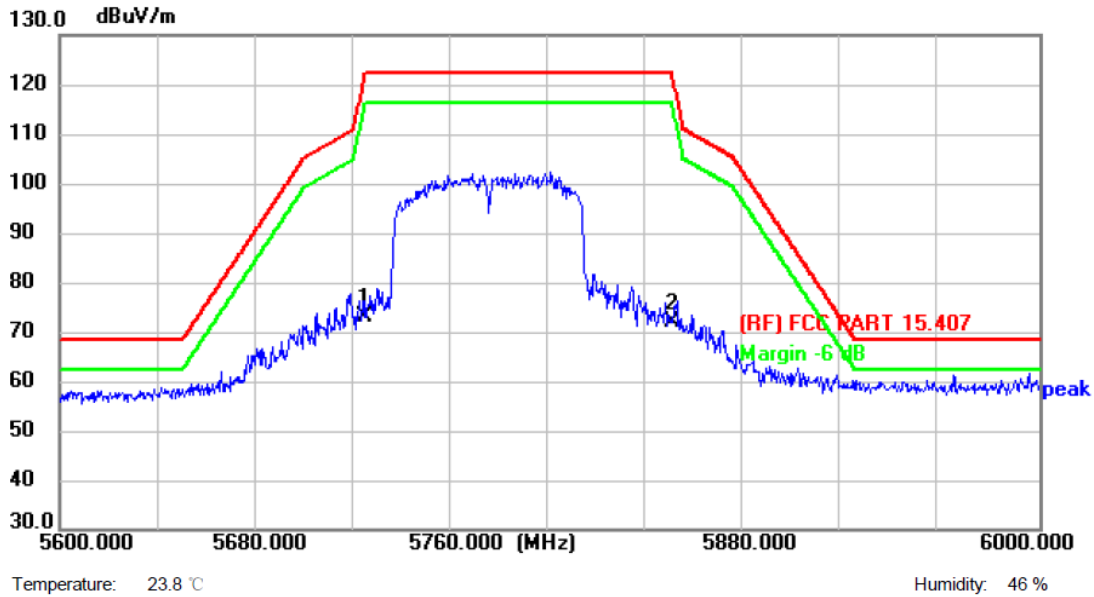


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	59.47	13.59	73.06	122.30	-49.24	peak	P
2	5850.000	58.09	13.90	71.99	122.30	-50.31	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5775 MHz (U-NII-3)
Remark:	

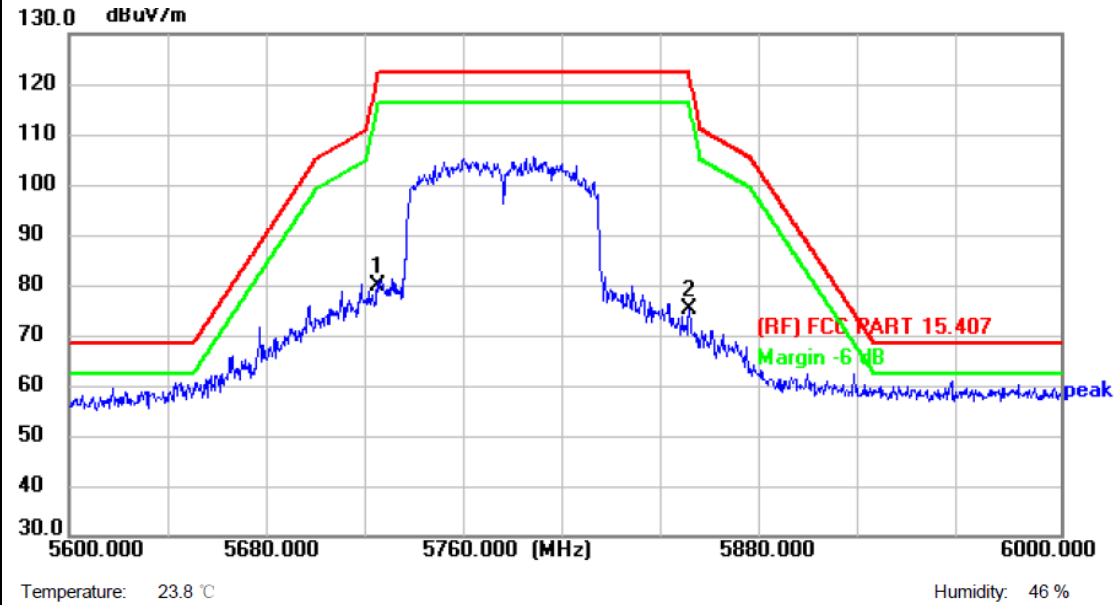

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 *	5725.000	66.14	13.59	79.73	122.30	-42.57	peak	P
2	5850.000	61.28	13.90	75.18	122.30	-47.12	peak	P

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

-----END OF THE REPORT-----

