

## Test Report

**Report No. :** CQASZ20220200210E-01  
**Applicant:** Shenzhen Chuangkeyou Technology Co., Ltd.  
**Address of Applicant:** Room 408, Block A, Zhantao Commercial Plaza, Tenglong Road, Dalang Street, Longhua District, Shenzhen, Guangdong  
**Equipment Under Test (EUT):**  
**Product:** All in one PC  
**Model No.:** NX3, NX3T, NX1, NX1PRO, NX5, NX5PRO, NX7, NX7PRO, NX9, NX9PRO, Z1, Z2, Z3, Z5, Z6, Z7, Z8, Z9  
**Test Model No.:** NX3  
**Brand Name:** N/A  
**FCC ID:** 2A4MD-NX3  
**Standards:** 47 CFR Part 15, Subpart C  
558074 D01 15.247 Meas Guidance v05r02  
**Date of Receipt:** 2022-2-18  
**Date of Test:** 2022-2-18 to 2022-2-24  
**Date of Issue:** 2022-3-1  
**Test Result :** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above.

**Tested By:** Lewis Zhou

( Lewis Zhou )

**Reviewed By:** Rock Huang

( Rock Huang )

**Approved By:** Jack Ai

( Jack Ai )



## 1 Version

### Revision History Of Report

| Report No.           | Version | Description    | Issue Date |
|----------------------|---------|----------------|------------|
| CQASZ20220200210E-01 | Rev.01  | Initial report | 2022-3-1   |

## 2 Test Summary

| Test Item                                                         | Test Requirement                                                                | Test method        | Result |
|-------------------------------------------------------------------|---------------------------------------------------------------------------------|--------------------|--------|
| Antenna Requirement                                               | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c)                             | ANSI C63.10 (2013) | PASS   |
| AC Power Line Conducted Emission                                  | 47 CFR Part 15, Subpart C Section 15.207                                        | ANSI C63.10 (2013) | PASS   |
| Conducted Peak Output Power                                       | 47 CFR Part 15, Subpart C Section 15.247 (b)(1)                                 | ANSI C63.10 (2013) | PASS   |
| 20dB Occupied Bandwidth                                           | 47 CFR Part 15, Subpart C Section 15.247 (a)(1)                                 | ANSI C63.10 (2013) | PASS   |
| Carrier Frequencies Separation                                    | 47 CFR Part 15, Subpart C Section 15.247 (a)(1)                                 | ANSI C63.10 (2013) | PASS   |
| Hopping Channel Number                                            | 47 CFR Part 15, Subpart C Section 15.247 (a)(1)                                 | ANSI C63.10 (2013) | PASS   |
| Dwell Time                                                        | 47 CFR Part 15, Subpart C Section 15.247 (a)(1)                                 | ANSI C63.10 (2013) | PASS   |
| Pseudorandom Frequency Hopping Sequence                           | 47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002) | ANSI C63.10 (2013) | PASS   |
| Band-edge for RF Conducted Emissions                              | 47 CFR Part 15, Subpart C Section 15.247(d)                                     | ANSI C63.10 (2013) | PASS   |
| RF Conducted Spurious Emissions                                   | 47 CFR Part 15, Subpart C Section 15.247(d)                                     | ANSI C63.10 (2013) | PASS   |
| Radiated Spurious emissions                                       | 47 CFR Part 15, Subpart C Section 15.205/15.209                                 | ANSI C63.10 (2013) | PASS   |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209                                 | ANSI C63.10 (2013) | PASS   |

### 3 Contents

|                                                                       | Page      |
|-----------------------------------------------------------------------|-----------|
| <b>1 VERSION.....</b>                                                 | <b>2</b>  |
| <b>2 TEST SUMMARY.....</b>                                            | <b>3</b>  |
| <b>3 CONTENTS.....</b>                                                | <b>4</b>  |
| <b>4 GENERAL INFORMATION.....</b>                                     | <b>5</b>  |
| 4.1 CLIENT INFORMATION.....                                           | 5         |
| 4.2 GENERAL DESCRIPTION OF EUT.....                                   | 5         |
| 4.3 ADDITIONAL INSTRUCTIONS.....                                      | 7         |
| 4.4 TEST ENVIRONMENT.....                                             | 8         |
| 4.5 DESCRIPTION OF SUPPORT UNITS.....                                 | 8         |
| 4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....                     | 9         |
| 4.7 TEST LOCATION.....                                                | 10        |
| 4.8 TEST FACILITY.....                                                | 10        |
| 4.9 ABNORMALITIES FROM STANDARD CONDITIONS.....                       | 10        |
| 4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....                 | 10        |
| 4.11 EQUIPMENT LIST.....                                              | 11        |
| <b>5 TEST RESULTS AND MEASUREMENT DATA.....</b>                       | <b>12</b> |
| 5.1 ANTENNA REQUIREMENT.....                                          | 12        |
| 5.2 CONDUCTED EMISSIONS.....                                          | 13        |
| 5.3 CONDUCTED PEAK OUTPUT POWER.....                                  | 17        |
| <i>Test Result.....</i>                                               | <i>18</i> |
| <i>Test Graphs.....</i>                                               | <i>19</i> |
| 5.4 20dB OCCUPY BANDWIDTH.....                                        | 24        |
| <i>Test Result.....</i>                                               | <i>24</i> |
| <i>Test Graphs.....</i>                                               | <i>25</i> |
| 5.5 CARRIER FREQUENCIES SEPARATION.....                               | 30        |
| <i>Test Result.....</i>                                               | <i>31</i> |
| <i>Test Graphs.....</i>                                               | <i>32</i> |
| 5.6 HOPPING CHANNEL NUMBER.....                                       | 34        |
| <i>Test Result.....</i>                                               | <i>34</i> |
| <i>Test Graphs.....</i>                                               | <i>35</i> |
| 5.7 DWELL TIME.....                                                   | 37        |
| 5.7.1 <i>Test Graphs.....</i>                                         | <i>38</i> |
| 5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS.....                         | 47        |
| <i>Test Result.....</i>                                               | <i>48</i> |
| <i>Test Graphs.....</i>                                               | <i>49</i> |
| 5.9 SPURIOUS RF CONDUCTED EMISSIONS.....                              | 55        |
| <i>Test Result.....</i>                                               | <i>56</i> |
| <i>Test Graphs.....</i>                                               | <i>57</i> |
| 5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM..... | 71        |
| 5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....               | 73        |
| 5.11.1 <i>Radiated Emission below 1GHz.....</i>                       | <i>76</i> |
| 5.11.2 <i>Transmitter Emission above 1GHz.....</i>                    | <i>78</i> |
| <b>6 PHOTOGRAPHS - EUT TEST SETUP.....</b>                            | <b>81</b> |
| 6.1 RADIATED EMISSION.....                                            | 81        |
| 6.2 CONDUCTED EMISSION.....                                           | 82        |
| <b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....</b>                | <b>83</b> |

## 4 General Information

### 4.1 Client Information

|                          |                                                                                                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------|
| Applicant:               | Shenzhen Chuangkeyou Technology Co., Ltd.                                                                        |
| Address of Applicant:    | Room 408, Block A, Zhantao Commercial Plaza, Tenglong Road, Dalang Street, Longhua District, Shenzhen, Guangdong |
| Manufacturer:            | Shenzhen Chuangkeyou Technology Co., Ltd.                                                                        |
| Address of Manufacturer: | Room 408, Block A, Zhantao Commercial Plaza, Tenglong Road, Dalang Street, Longhua District, Shenzhen, Guangdong |
| Factory:                 | Shenzhen CYX Technology Co.,Ltd                                                                                  |
| Address of Factory:      | 5/F, One buildings, Xiazao Industrial Zone, Zaohe Road, Longhua District, Shenzhen, Guangdong, China             |

### 4.2 General Description of EUT

|                       |                                                                                                                    |
|-----------------------|--------------------------------------------------------------------------------------------------------------------|
| Product Name:         | All in one PC                                                                                                      |
| Model No.:            | NX3, NX3T, NX1, NX1PRO, NX5, NX5PRO, NX7, NX7PRO, NX9, NX9PRO, Z1, Z2, Z3, Z5, Z6, Z7, Z8, Z9                      |
| Test Model No.:       | NX3                                                                                                                |
| Trade Mark:           | N/A                                                                                                                |
| Software Version:     | WINDOWS 11                                                                                                         |
| Hardware Version:     | PA_HM87_V1.1                                                                                                       |
| Operation Frequency:  | 2402MHz~2480MHz                                                                                                    |
| Bluetooth Version:    | V4.0                                                                                                               |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS)                                                                            |
| Modulation Type:      | GFSK, $\pi/4$ DQPSK, 8DPSK                                                                                         |
| Transfer Rate:        | 1Mbps/2Mbps/3Mbps                                                                                                  |
| Number of Channel:    | 79                                                                                                                 |
| Hopping Channel Type: | Adaptive Frequency Hopping systems                                                                                 |
| Product Type:         | <input type="checkbox"/> Mobile <input type="checkbox"/> Portable <input checked="" type="checkbox"/> Fix Location |
| Test Software of EUT: | Bluetooth MP Tool                                                                                                  |
| Antenna Type:         | FPC Antenna                                                                                                        |
| Antenna Gain:         | -1.5dBi                                                                                                            |
| Power Supply:         | MODEL:ZF120A-1206500<br>INPUT:100-240V~ 50/60Hz 2.5A<br>OUTPUT:12V= 6.5A                                           |

Model No.: NX3, NX3T, NX1, NX1PRO, NX5, NX5PRO, NX7, NX7PRO, NX9, NX9PRO, Z1, Z2, Z3, Z5, Z6, Z7, Z8, Z9

Only the model NX3 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance and model name.

The product has BT, 2.4G and 5G WiFi functions. Among them, BT and 2.4G WiFi share one antenna, so only BT and 5G WiFi can transmit at the same time, and 2.4G WiFi and 5G WiFi can transmit at the same time.

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 0                                   | 2402MHz   | 20      | 2422MHz   | 40      | 2442MHz   | 60      | 2462MHz   |
| 1                                   | 2403MHz   | 21      | 2423MHz   | 41      | 2443MHz   | 61      | 2463MHz   |
| 2                                   | 2404MHz   | 22      | 2424MHz   | 42      | 2444MHz   | 62      | 2464MHz   |
| 3                                   | 2405MHz   | 23      | 2425MHz   | 43      | 2445MHz   | 63      | 2465MHz   |
| 4                                   | 2406MHz   | 24      | 2426MHz   | 44      | 2446MHz   | 64      | 2466MHz   |
| 5                                   | 2407MHz   | 25      | 2427MHz   | 45      | 2447MHz   | 65      | 2467MHz   |
| 6                                   | 2408MHz   | 26      | 2428MHz   | 46      | 2448MHz   | 66      | 2468MHz   |
| 7                                   | 2409MHz   | 27      | 2429MHz   | 47      | 2449MHz   | 67      | 2469MHz   |
| 8                                   | 2410MHz   | 28      | 2430MHz   | 48      | 2450MHz   | 68      | 2470MHz   |
| 9                                   | 2411MHz   | 29      | 2431MHz   | 49      | 2451MHz   | 69      | 2471MHz   |
| 10                                  | 2412MHz   | 30      | 2432MHz   | 50      | 2452MHz   | 70      | 2472MHz   |
| 11                                  | 2413MHz   | 31      | 2433MHz   | 51      | 2453MHz   | 71      | 2473MHz   |
| 12                                  | 2414MHz   | 32      | 2434MHz   | 52      | 2454MHz   | 72      | 2474MHz   |
| 13                                  | 2415MHz   | 33      | 2435MHz   | 53      | 2455MHz   | 73      | 2475MHz   |
| 14                                  | 2416MHz   | 34      | 2436MHz   | 54      | 2456MHz   | 74      | 2476MHz   |
| 15                                  | 2417MHz   | 35      | 2437MHz   | 55      | 2457MHz   | 75      | 2477MHz   |
| 16                                  | 2418MHz   | 36      | 2438MHz   | 56      | 2458MHz   | 76      | 2478MHz   |
| 17                                  | 2419MHz   | 37      | 2439MHz   | 57      | 2459MHz   | 77      | 2479MHz   |
| 18                                  | 2420MHz   | 38      | 2440MHz   | 58      | 2460MHz   | 78      | 2480MHz   |
| 19                                  | 2421MHz   | 39      | 2441MHz   | 59      | 2461MHz   |         |           |

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2402MHz   |
| The Middle channel  | 2441MHz   |
| The Highest channel | 2480MHz   |

### 4.3 Additional Instructions

| EUT Test Software Settings:                                                                                                 |                                                                                                                                                                                        |                |
|-----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Mode:                                                                                                                       | <input checked="" type="checkbox"/> Special software is used.<br><input type="checkbox"/> Through engineering command into the engineering mode.<br>engineering command: *##3646633##* |                |
| EUT Power level:                                                                                                            | Class2 (Power level is built-in set parameters and cannot be changed and selected)                                                                                                     |                |
| Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. |                                                                                                                                                                                        |                |
| Mode                                                                                                                        | Channel                                                                                                                                                                                | Frequency(MHz) |
| DH1/DH3/DH5                                                                                                                 | CH0                                                                                                                                                                                    | 2402           |
|                                                                                                                             | CH39                                                                                                                                                                                   | 2441           |
|                                                                                                                             | CH78                                                                                                                                                                                   | 2480           |
| 2DH1/2DH3/2DH5                                                                                                              | CH0                                                                                                                                                                                    | 2402           |
|                                                                                                                             | CH39                                                                                                                                                                                   | 2441           |
|                                                                                                                             | CH78                                                                                                                                                                                   | 2480           |
| 3DH1/3DH3/3DH5                                                                                                              | CH0                                                                                                                                                                                    | 2402           |
|                                                                                                                             | CH39                                                                                                                                                                                   | 2441           |
|                                                                                                                             | CH78                                                                                                                                                                                   | 2480           |

#### Run Software:

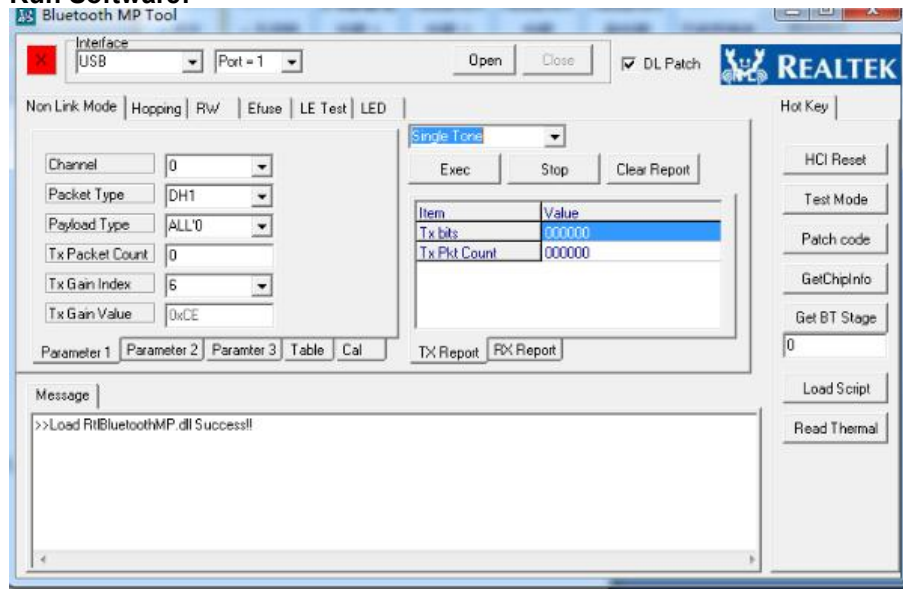

#### 4.4 Test Environment

| Operating Environment: |                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Temperature:           | 25 °C                                                                                                                       |
| Humidity:              | 54% RH                                                                                                                      |
| Atmospheric Pressure:  | 1009mbar                                                                                                                    |
| Test Mode:             | Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. |

#### 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer | Model No. | Remark | FCC certification |
|-------------|--------------|-----------|--------|-------------------|
| /           | /            | /         | /      | /                 |



#### 4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

| No. | Item                               | Uncertainty        |
|-----|------------------------------------|--------------------|
| 1   | Radiated Emission (Below 1GHz)     | 5.12dB             |
| 2   | Radiated Emission (Above 1GHz)     | 4.60dB             |
| 3   | Conducted Disturbance (0.15~30MHz) | 3.34dB             |
| 4   | Radio Frequency                    | $3 \times 10^{-8}$ |
| 5   | Duty cycle                         | 0.6 %              |
| 6   | Occupied Bandwidth                 | 1.1%               |
| 7   | RF conducted power                 | 0.86dB             |
| 8   | RF power density                   | 0.74               |
| 9   | Conducted Spurious emissions       | 0.86dB             |
| 10  | Temperature test                   | 0.8°C              |
| 11  | Humidity test                      | 2.0%               |
| 12  | Supply voltages                    | 0.5 %              |
| 13  | Frequency Error                    | 5.5 Hz             |

#### 4.7 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

#### 4.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**IC Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

#### 4.9 Abnormalities from Standard Conditions

None.

#### 4.10 Other Information Requested by the Customer

None.

#### 4.11 Equipment List


| Test Equipment             | Manufacturer | Model No.              | Instrument No. | Calibration Date | Calibration Due Date |
|----------------------------|--------------|------------------------|----------------|------------------|----------------------|
| EMI Test Receiver          | R&S          | ESR7                   | CQA-005        | 2021/9/10        | 2022/9/9             |
| Spectrum analyzer          | R&S          | FSU26                  | CQA-038        | 2021/9/10        | 2022/9/9             |
| Preamplifier               | MITEQ        | AFS4-00010300-18-10P-4 | CQA-035        | 2021/9/10        | 2022/9/9             |
| Preamplifier               | MITEQ        | AMF-6D-02001800-29-20P | CQA-036        | 2021/9/10        | 2022/9/9             |
| Loop antenna               | Schwarzbeck  | FMZB1516               | CQA-087        | 2021/9/16        | 2024/9/15            |
| Bilog Antenna              | R&S          | HL562                  | CQA-011        | 2021/9/16        | 2024/9/15            |
| Horn Antenna               | R&S          | HF906                  | CQA-012        | 2021/9/16        | 2024/9/15            |
| Horn Antenna               | Schwarzbeck  | BBHA 9170              | CQA-088        | 2021/9/16        | 2024/9/15            |
| Coaxial Cable (Above 1GHz) | CQA          | N/A                    | C019           | 2021/9/10        | 2022/9/9             |
| Coaxial Cable (Below 1GHz) | CQA          | N/A                    | C020           | 2021/9/10        | 2022/9/9             |
| Antenna Connector          | CQA          | RFC-01                 | CQA-080        | 2021/9/10        | 2022/9/9             |
| RF cable(9KHz~40GHz)       | CQA          | RF-01                  | CQA-079        | 2021/9/10        | 2022/9/9             |
| Power divider              | MIDWEST      | PWD-2533-02-SMA-79     | CQA-067        | 2021/9/10        | 2022/9/9             |
| EMI Test Receiver          | R&S          | ESPI3                  | CQA-013        | 2021/9/10        | 2022/9/9             |
| LISN                       | R&S          | ENV216                 | CQA-003        | 2021/9/10        | 2022/9/9             |
| Coaxial cable              | CQA          | N/A                    | CQA-C009       | 2021/9/10        | 2022/9/9             |

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement

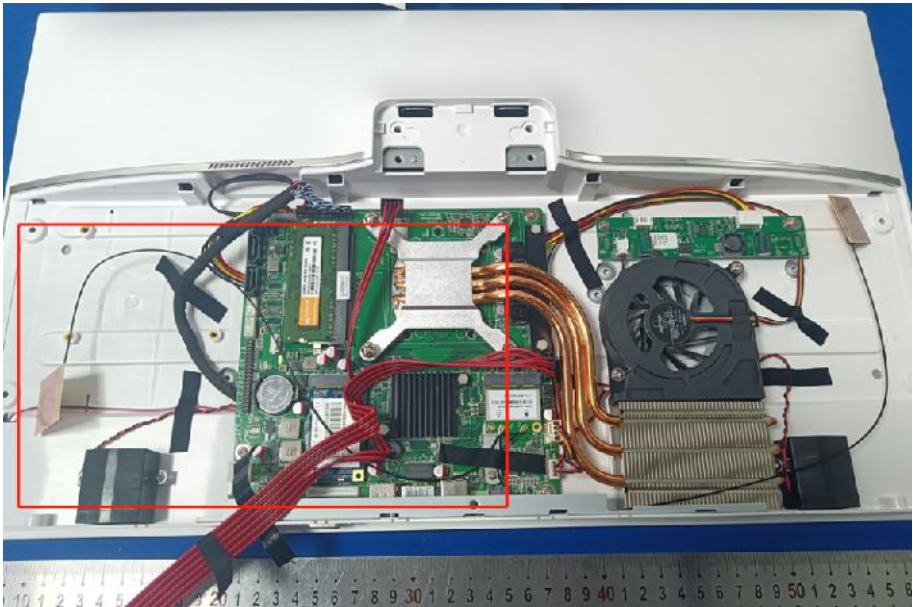
|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Standard requirement:</b> | 47 CFR Part 15C Section 15.203 /247(c)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                              | <p>15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:<br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |
| <b>EUT Antenna:</b>          |  <p>The image shows the internal components of a device, including a green printed circuit board (PCB) with various electronic components, a black fan, and a red antenna. A red rectangular box highlights the antenna area. A ruler is visible at the bottom of the image for scale.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                              | <p>The antenna is FPC antenna. The best case gain of the antenna is -1.5 dBi.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |



|                        |                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.                                   |
| Final Test Mode:       | Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case.<br>Only the worst case is recorded in the report. |
| Test Voltage:          | AC 120V/60Hz                                                                                                                                               |
| Test Results:          | Pass                                                                                                                                                       |

## Measurement Data

Live line:

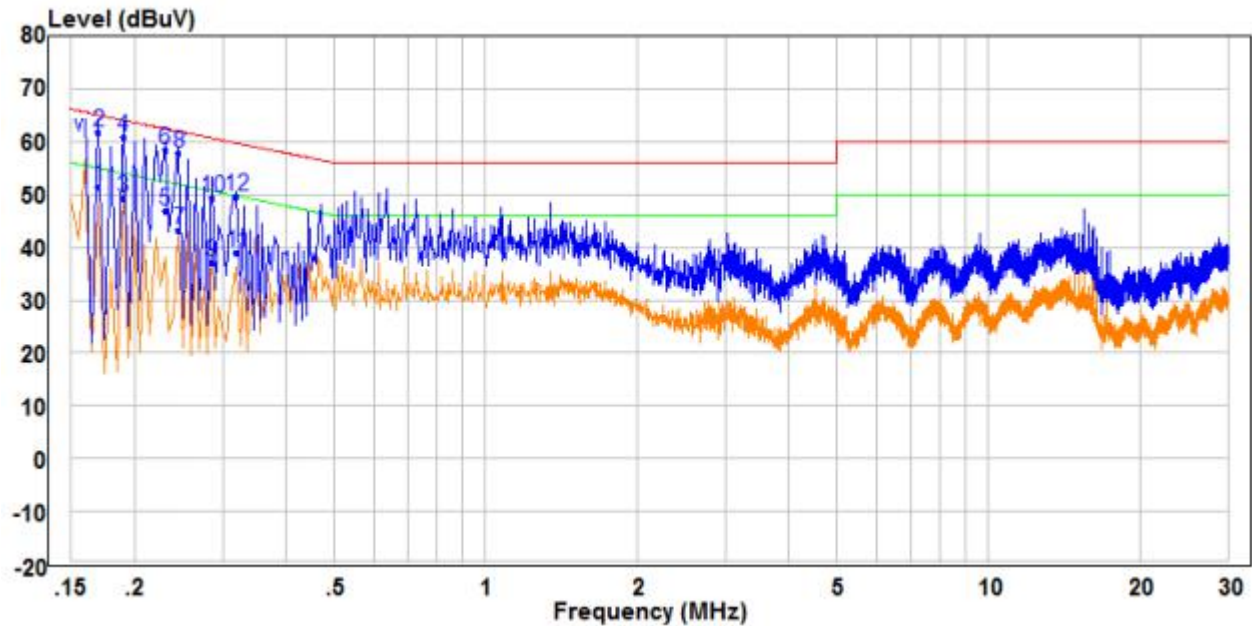


|    |    | Freq  | Read<br>Level | Factor | Level | Limit<br>Line | Over<br>Limit | Remark  | Pol/Phase |
|----|----|-------|---------------|--------|-------|---------------|---------------|---------|-----------|
|    |    | MHz   | dBuV          | dB     | dBuV  | dBuV          | dB            |         |           |
| 1  | AV | 0.170 | 41.92         | 9.49   | 51.41 | 54.96         | -3.55         | Average | Line      |
| 2  |    | 0.170 | 52.23         | 9.49   | 61.72 | 64.96         | -3.24         | QP      | Line      |
| 3  |    | 0.190 | 39.82         | 9.49   | 49.31 | 54.04         | -4.73         | Average | Line      |
| 4  | PP | 0.190 | 51.39         | 9.49   | 60.88 | 64.04         | -3.16         | QP      | Line      |
| 5  |    | 0.230 | 37.38         | 9.49   | 46.87 | 52.45         | -5.58         | Average | Line      |
| 6  |    | 0.230 | 49.06         | 9.49   | 58.55 | 62.45         | -3.90         | QP      | Line      |
| 7  |    | 0.245 | 33.83         | 9.49   | 43.32 | 51.92         | -8.60         | Average | Line      |
| 8  |    | 0.245 | 48.47         | 9.49   | 57.96 | 61.92         | -3.96         | QP      | Line      |
| 9  |    | 0.285 | 27.60         | 9.49   | 37.09 | 50.67         | -13.58        | Average | Line      |
| 10 |    | 0.285 | 39.97         | 9.49   | 49.46 | 60.67         | -11.21        | QP      | Line      |
| 11 |    | 0.320 | 29.53         | 9.49   | 39.02 | 49.71         | -10.69        | Average | Line      |
| 12 |    | 0.320 | 40.05         | 9.49   | 49.54 | 59.71         | -10.17        | QP      | Line      |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.



Neutral line:

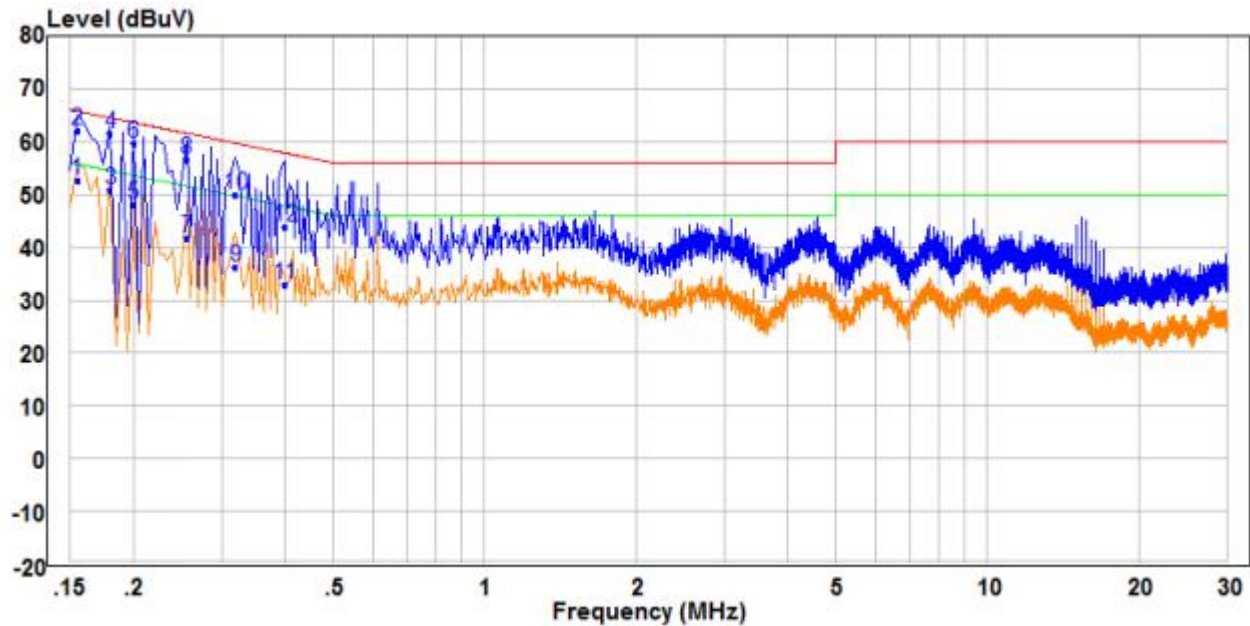


|    |      | Read  |        | Limit | Over  |       |                |
|----|------|-------|--------|-------|-------|-------|----------------|
|    | Freq | Level | Factor | Level | Line  | Limit | Remark         |
|    | MHz  | dBuV  | dB     | dBuV  | dBuV  | dB    | Pol/Phase      |
| 1  | PP   | 0.155 | 43.02  | 9.69  | 52.71 | 55.73 | -3.02 Average  |
| 2  |      | 0.155 | 52.36  | 9.69  | 62.05 | 65.73 | -3.68 QP       |
| 3  |      | 0.180 | 41.08  | 9.64  | 50.72 | 54.49 | -3.77 Average  |
| 4  | QP   | 0.180 | 51.71  | 9.64  | 61.35 | 64.49 | -3.14 QP       |
| 5  |      | 0.200 | 38.60  | 9.61  | 48.21 | 53.61 | -5.40 Average  |
| 6  |      | 0.200 | 50.02  | 9.61  | 59.63 | 63.61 | -3.98 QP       |
| 7  |      | 0.255 | 32.08  | 9.53  | 41.61 | 51.59 | -9.98 Average  |
| 8  |      | 0.255 | 46.96  | 9.53  | 56.49 | 61.59 | -5.10 QP       |
| 9  |      | 0.320 | 26.68  | 9.51  | 36.19 | 49.71 | -13.52 Average |
| 10 |      | 0.320 | 40.32  | 9.51  | 49.83 | 59.71 | -9.88 QP       |
| 11 |      | 0.400 | 23.23  | 9.60  | 32.83 | 47.85 | -15.02 Average |
| 12 |      | 0.400 | 34.34  | 9.60  | 43.94 | 57.85 | -13.91 QP      |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.




### 5.3 Conducted Peak Output Power
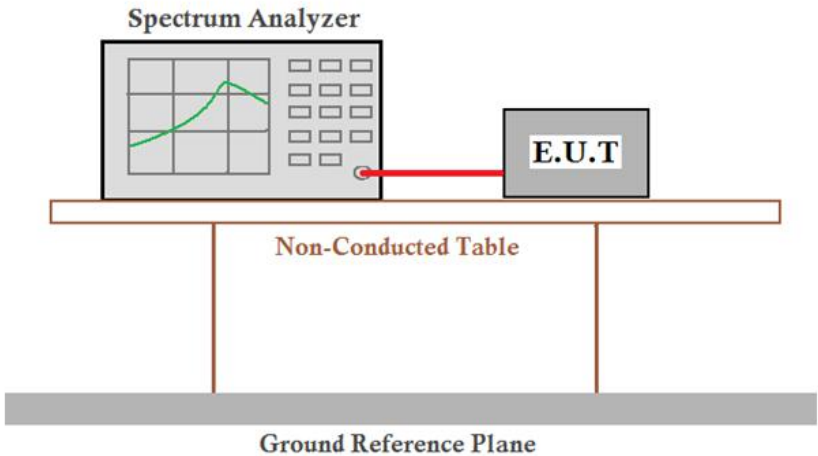
|                        |                                                                                                                                                                                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (b)(1)                                                                                                                                                                                                                                          |
| Test Method:           | ANSI C63.10:2013                                                                                                                                                                                                                                                               |
| Test Setup:            |  <p>Remark: Offset=Cable loss+ attenuation factor.</p>                                                                                                                                       |
| Limit:                 | 21dBm                                                                                                                                                                                                                                                                          |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type                                                                                                                                                                                                 |
| Final Test Mode:       | Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.<br>Only the worst case is recorded in the report. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                           |


**Test Result**

| TestMode | Antenna | Channel | Result[dBm] | Limit[dBm]   | Verdict |
|----------|---------|---------|-------------|--------------|---------|
| DH5      | Ant1    | 2402    | -3.86       | $\leq 20.97$ | PASS    |
|          |         | 2441    | -2.13       | $\leq 20.97$ | PASS    |
|          |         | 2480    | -0.75       | $\leq 20.97$ | PASS    |
| 2DH5     | Ant1    | 2402    | -3.98       | $\leq 20.97$ | PASS    |
|          |         | 2441    | -2.3        | $\leq 20.97$ | PASS    |
|          |         | 2480    | -0.96       | $\leq 20.97$ | PASS    |
| 3DH5     | Ant1    | 2402    | -3.96       | $\leq 20.97$ | PASS    |
|          |         | 2441    | -2.41       | $\leq 20.97$ | PASS    |
|          |         | 2480    | -1.01       | $\leq 20.97$ | PASS    |

## Test Graphs

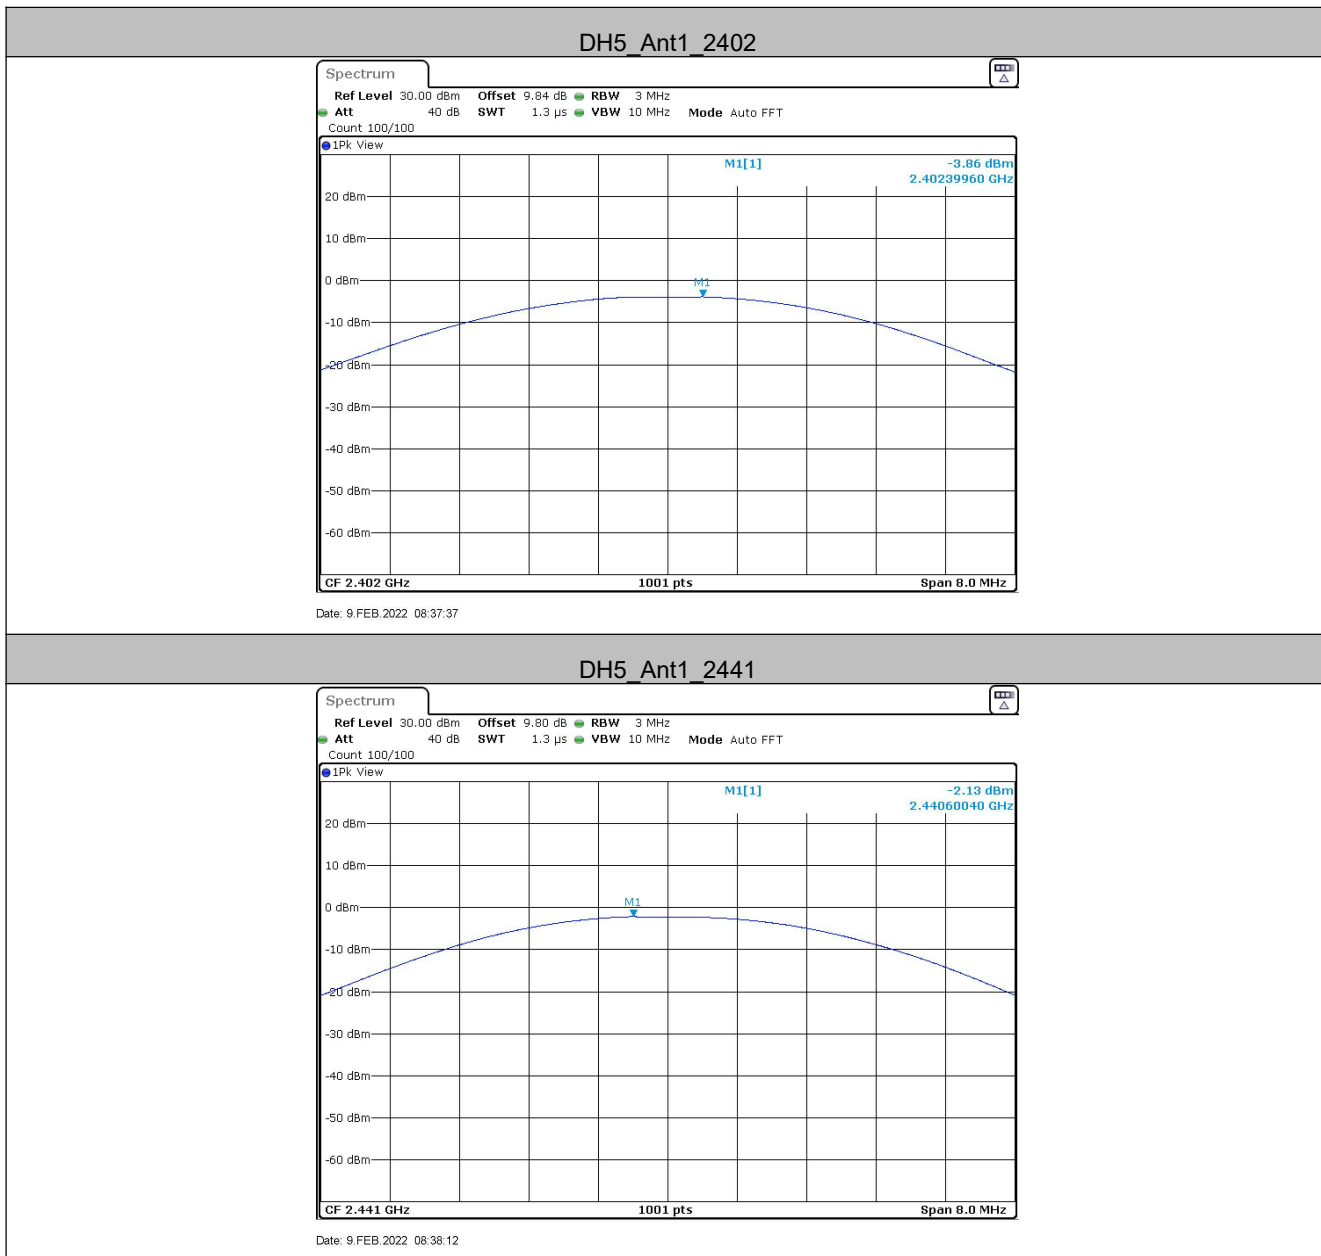


DH5\_Ant1\_2480

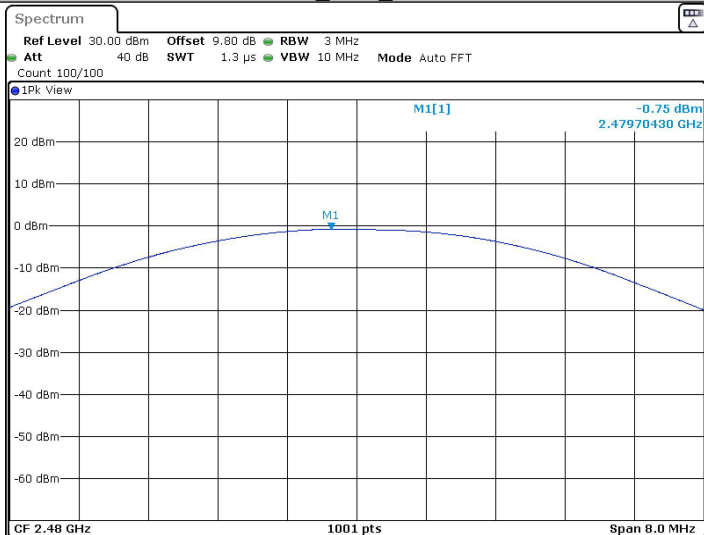


Date: 9 FEB. 2022 08:39:08

2DH5\_Ant1\_2402

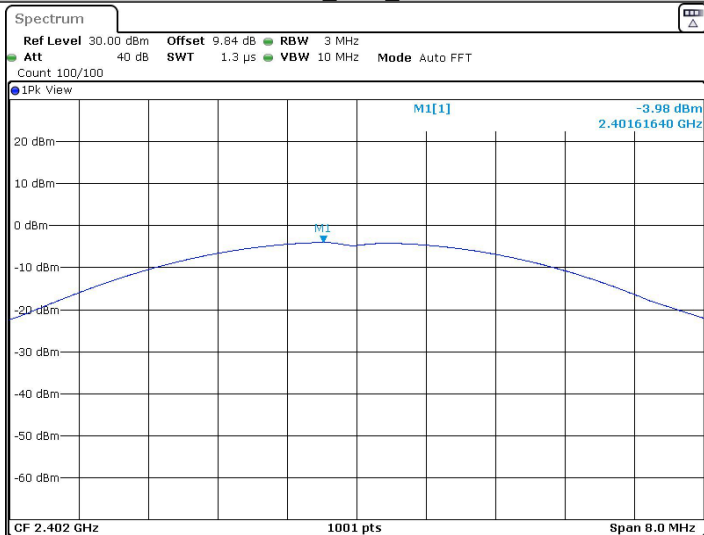


Date: 9 FEB. 2022 08:40:21

2DH5\_Ant1\_2441

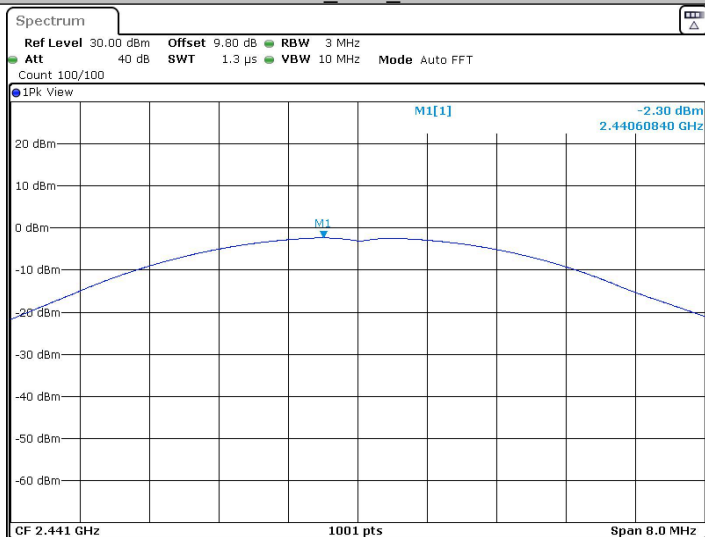


Date: 9 FEB. 2022 08:41:00

2DH5\_Ant1\_2480

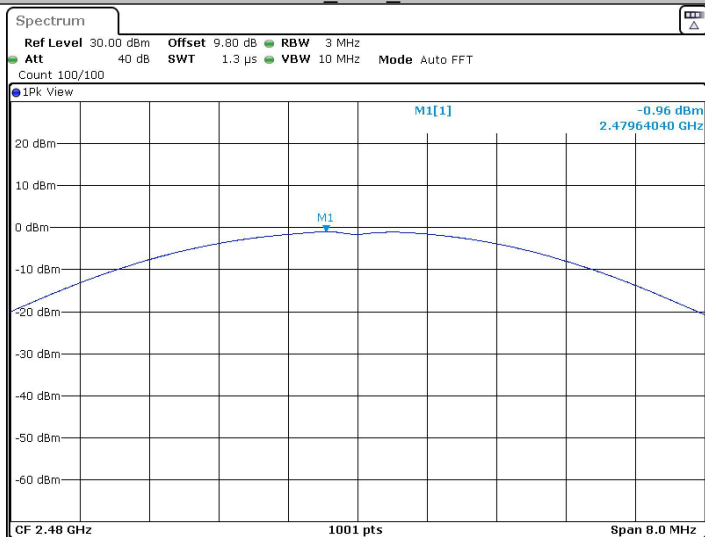


Date: 9 FEB. 2022 08:41:22

3DH5\_Ant1\_2402

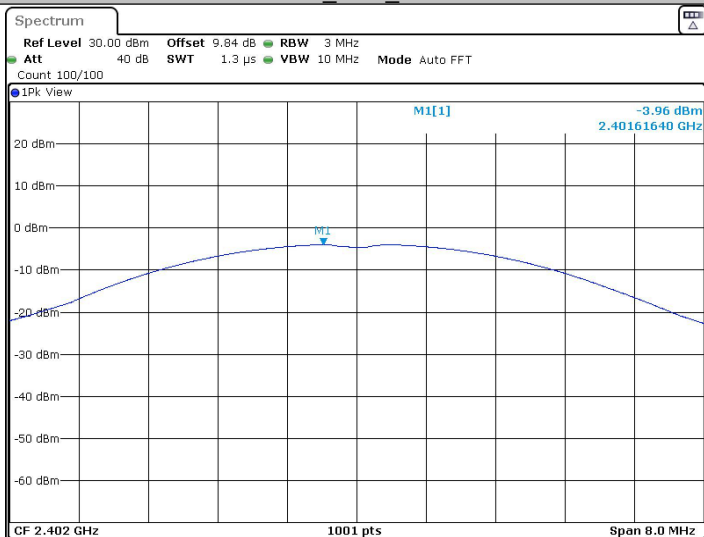


Date: 9.FEB.2022 08:41:59

3DH5\_Ant1\_2441

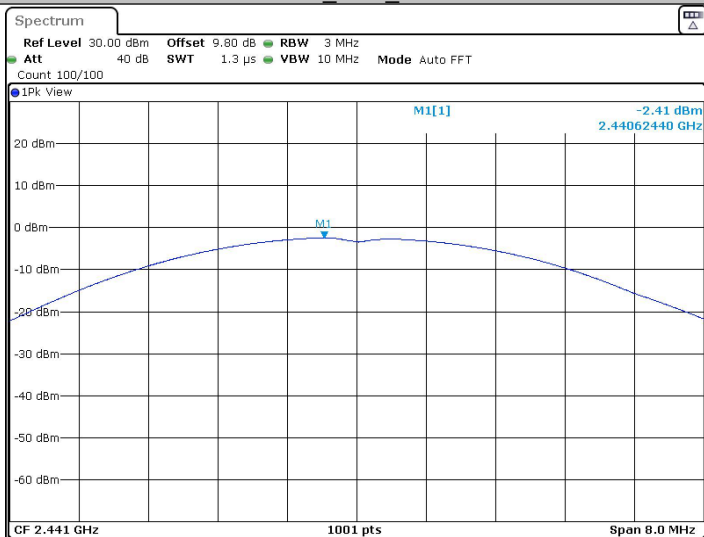


Date: 9.FEB.2022 08:42:20

3DH5\_Ant1\_2480

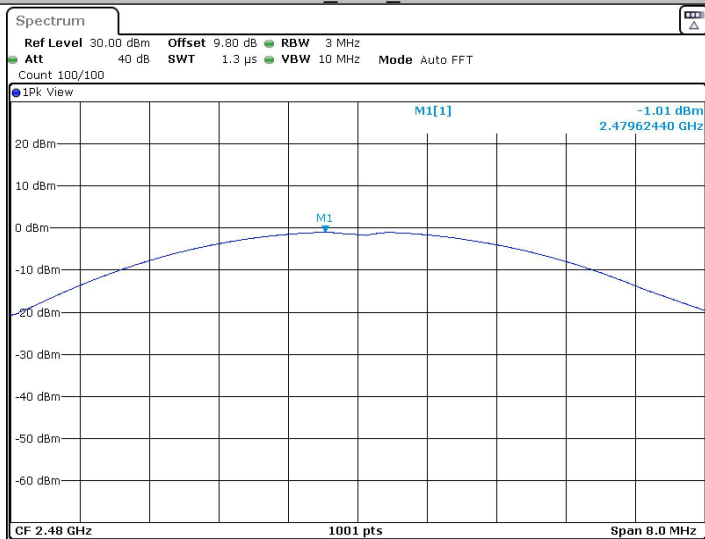

Date: 9 FEB. 2022 08:42:39

## 5.4 20dB Occupy Bandwidth

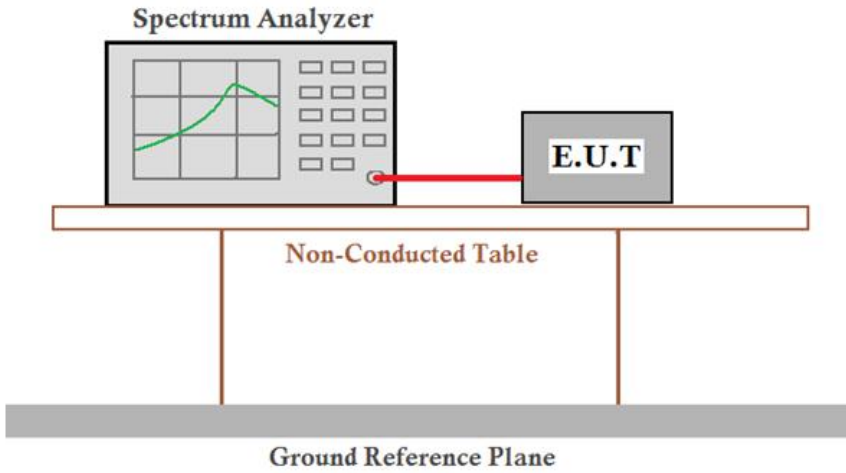
|                        |                                                                                                                                                                                                                                                                                |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (a)(1)                                                                                                                                                                                                                                          |
| Test Method:           | ANSI C63.10:2013                                                                                                                                                                                                                                                               |
| Test Setup:            |  <p>Remark: Offset=Cable loss+ attenuation factor.</p>                                                                                                                                       |
| Limit:                 | NA                                                                                                                                                                                                                                                                             |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type                                                                                                                                                                                                 |
| Final Test Mode:       | Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type, 2-DH5 of data type is the worst case of $\pi/4$ DQPSK modulation type, 3-DH5 of data type is the worst case of 8DPSK modulation type.<br>Only the worst case is recorded in the report. |
| Test Results:          | Pass                                                                                                                                                                                                                                                                           |

## Test Result


| TestMode | Antenna | Channel | 20db EBW[MHz] | FL[MHz]  | FH[MHz]  | Verdict |
|----------|---------|---------|---------------|----------|----------|---------|
| DH5      | Ant1    | 2402    | 0.957         | 2401.526 | 2402.483 | PASS    |
|          |         | 2441    | 0.969         | 2440.520 | 2441.489 | PASS    |
|          |         | 2480    | 0.954         | 2479.523 | 2480.477 | PASS    |
| 2DH5     | Ant1    | 2402    | 1.254         | 2401.367 | 2402.621 | PASS    |
|          |         | 2441    | 1.272         | 2440.355 | 2441.627 | PASS    |
|          |         | 2480    | 1.278         | 2479.352 | 2480.630 | PASS    |
| 3DH5     | Ant1    | 2402    | 1.269         | 2401.358 | 2402.627 | PASS    |
|          |         | 2441    | 1.272         | 2440.352 | 2441.624 | PASS    |
|          |         | 2480    | 1.272         | 2479.352 | 2480.624 | PASS    |



## Test Graphs

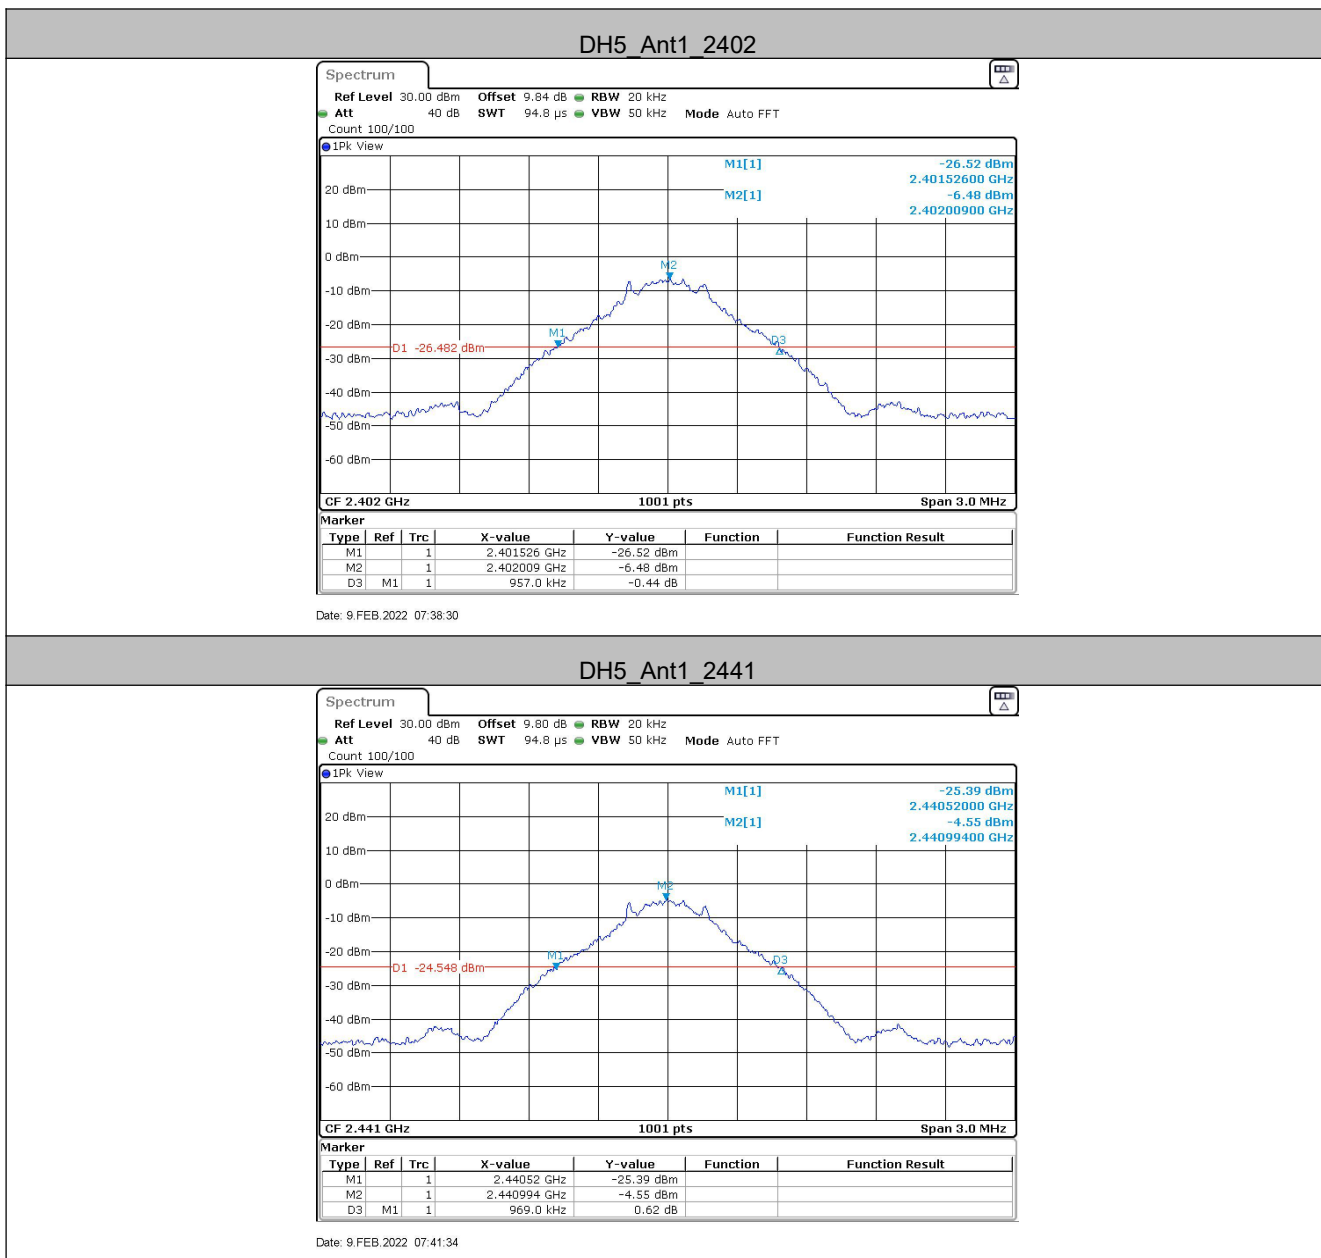


DH5\_Ant1\_2480

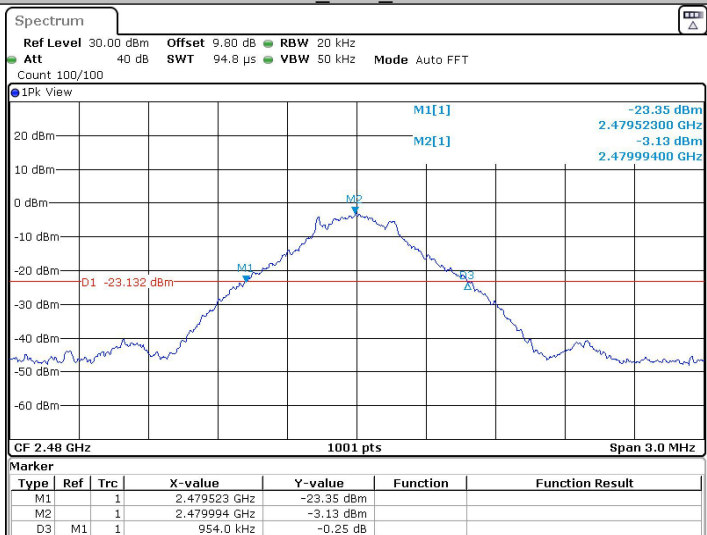


Date: 9 FEB. 2022 07:44:17

2DH5\_Ant1\_2402

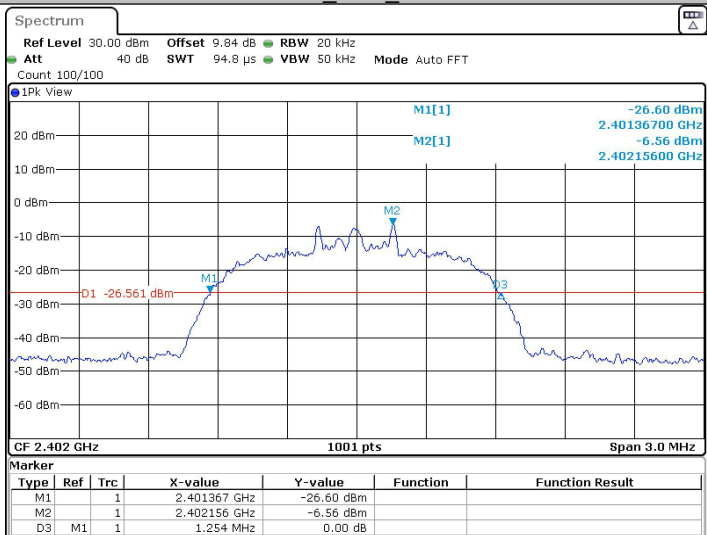


Date: 9 FEB. 2022 07:47:30

2DH5\_Ant1\_2441

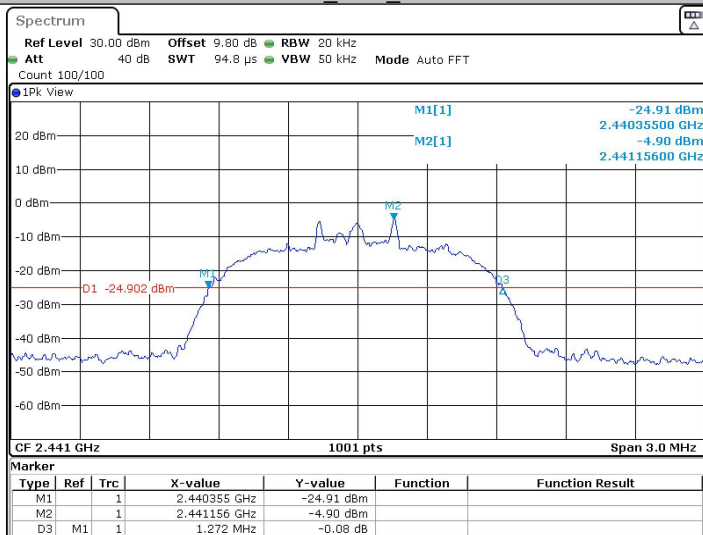

Date: 9 FEB. 2022 07:50:12

2DH5\_Ant1\_2480

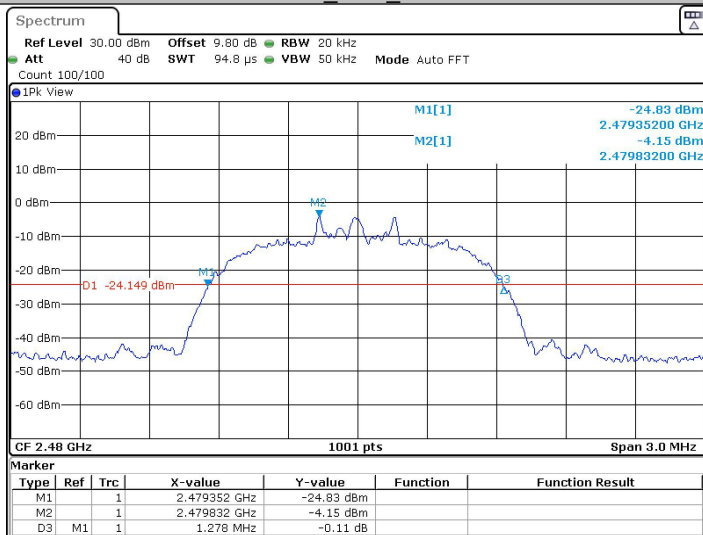

Date: 9 FEB. 2022 07:51:47