



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: Power Amplifier

Test Model: ELURA AMP50/3-ARC

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jerry Chu
Supervised by:	Nick Peng





A.1 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	1.012	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.941	N/A	Pass
NVNT	1-DH5	2480	Ant1	1.003	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.284	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.281	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.283	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.3	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.294	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.282	N/A	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

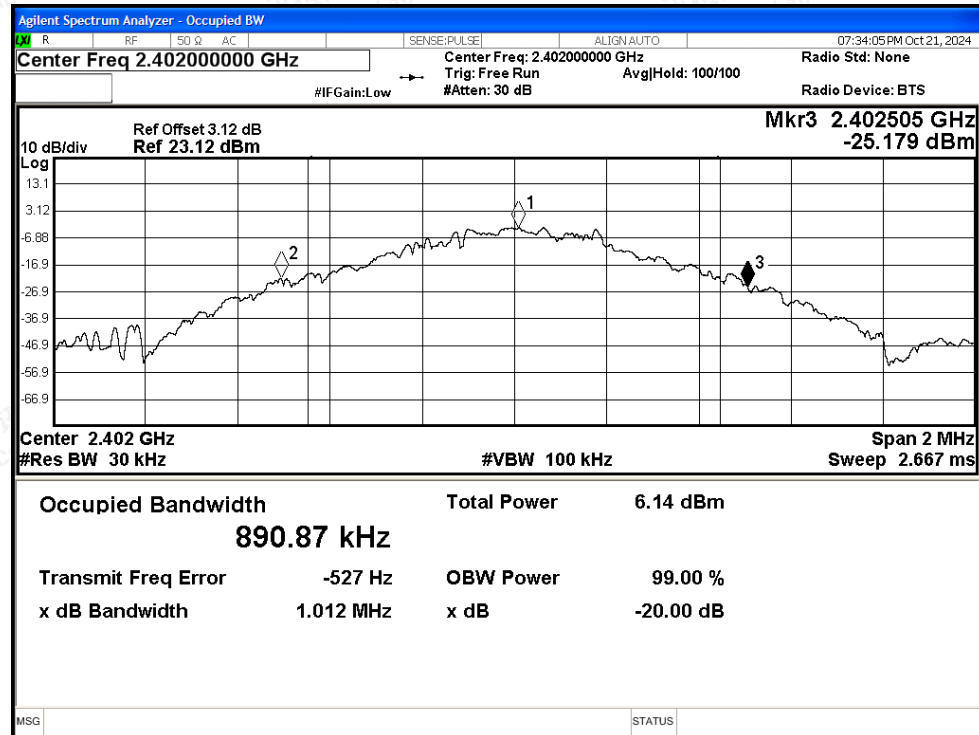


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

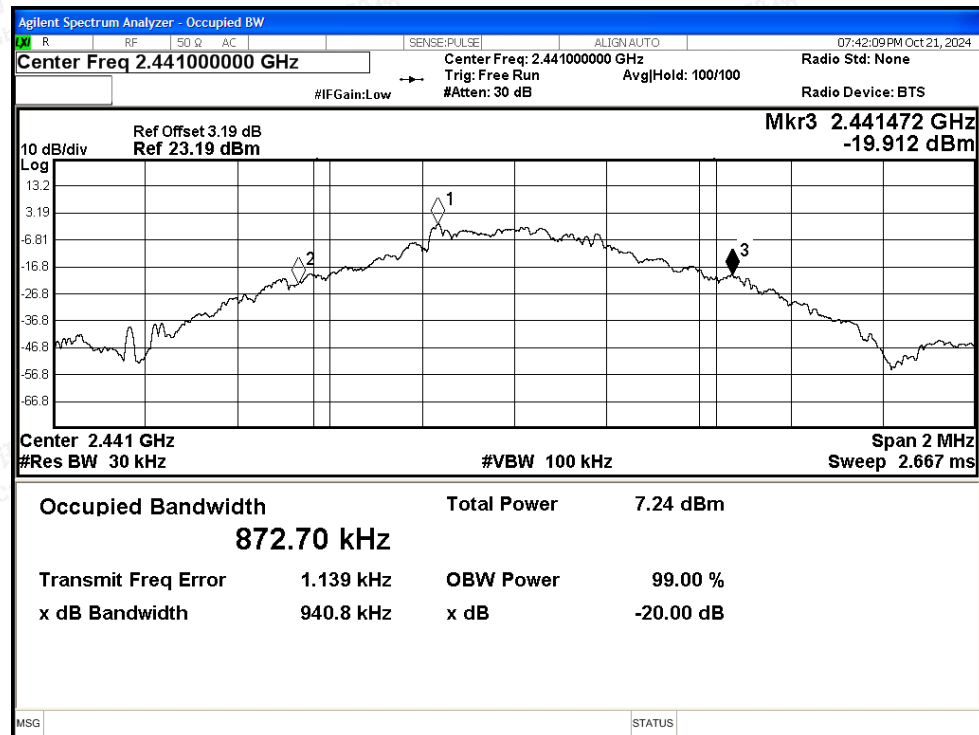




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

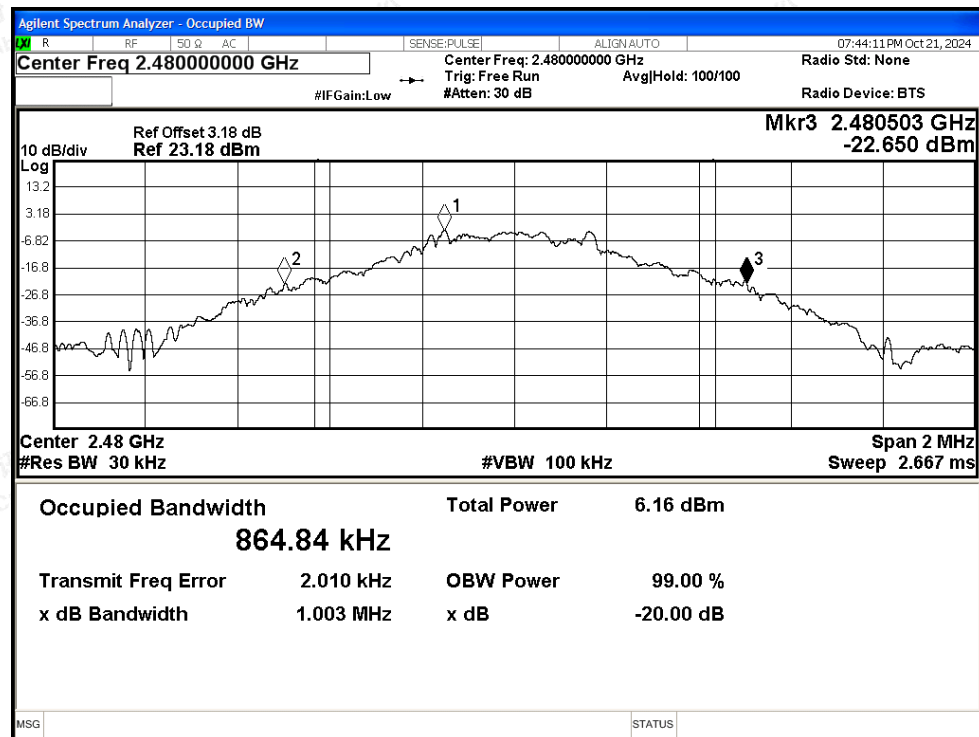


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

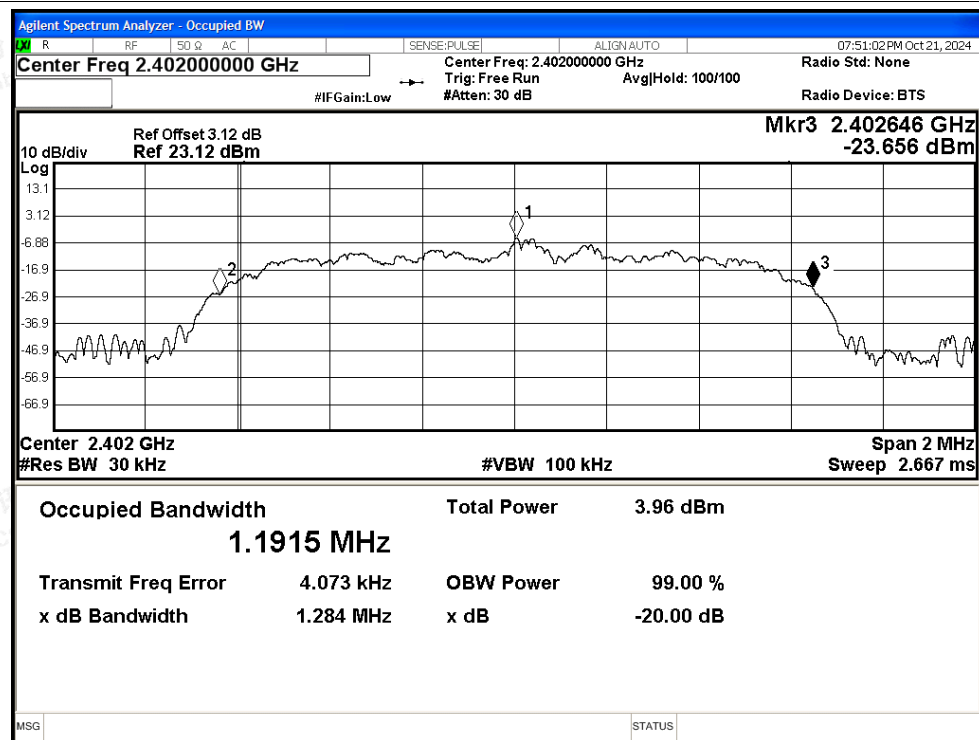




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

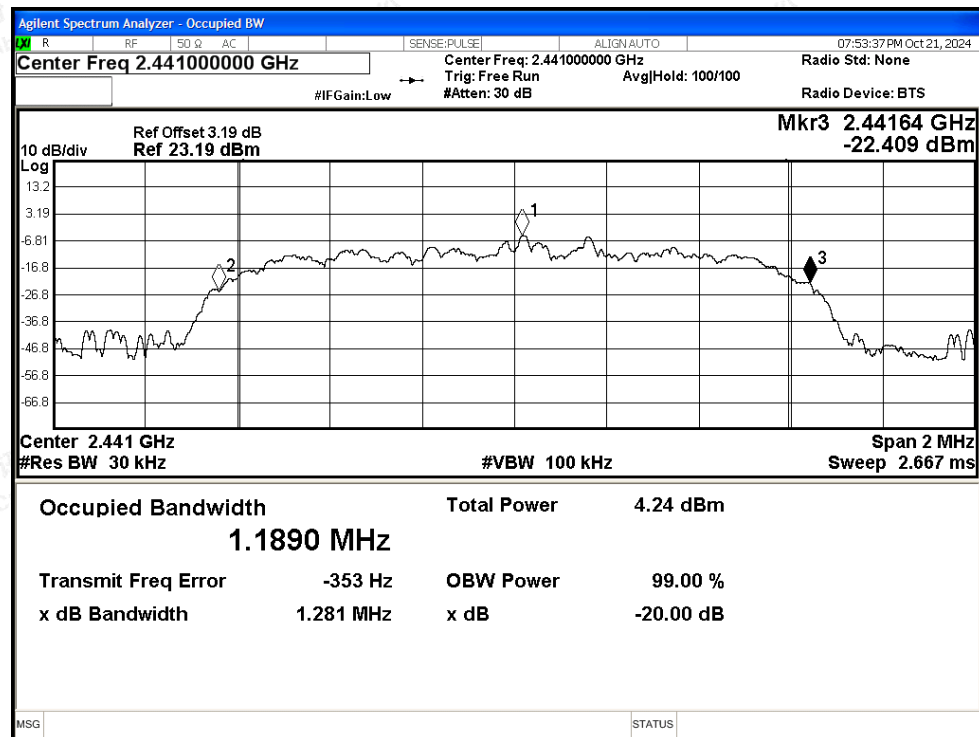

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

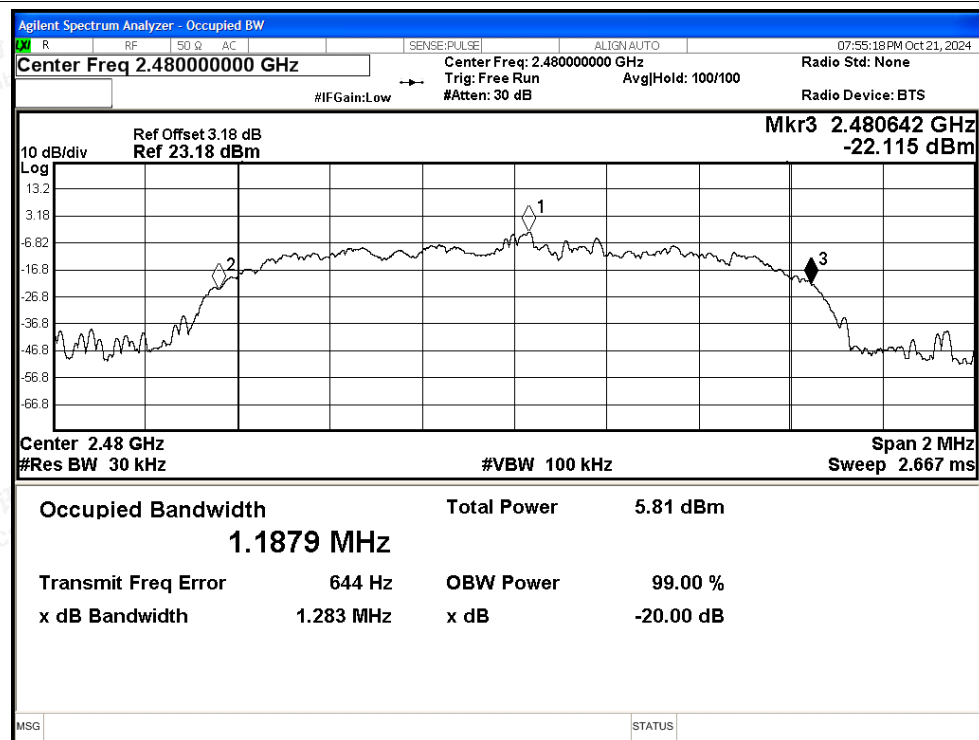

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

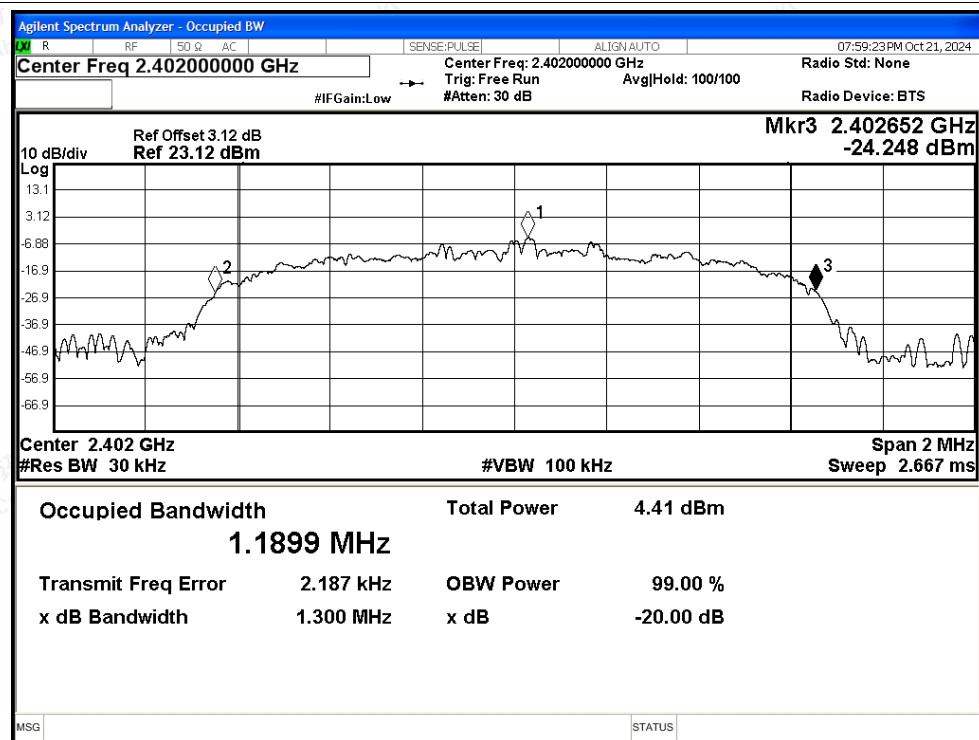

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

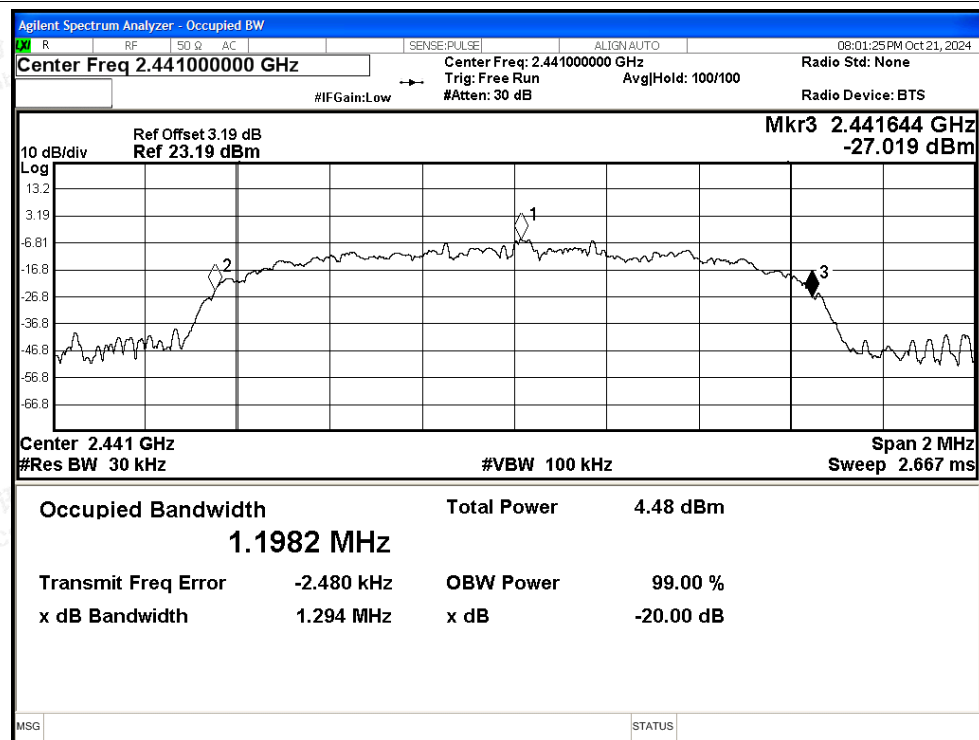

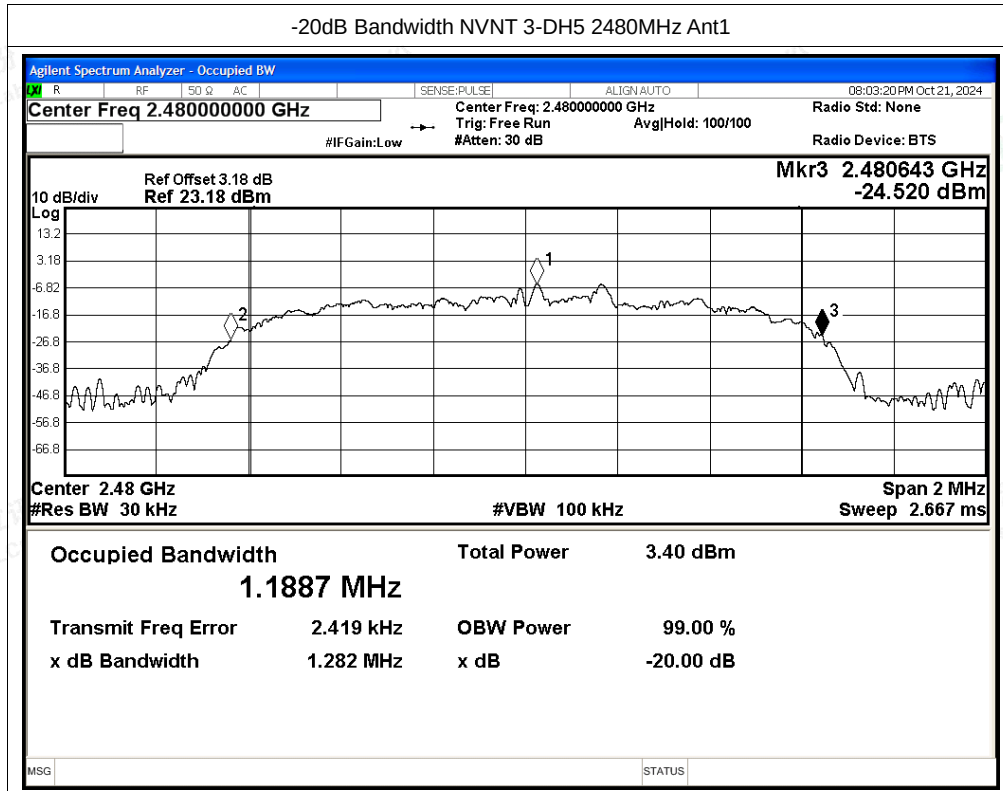



A.2 Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	0.07	21	Pass
NVNT	1-DH5	2441	Ant1	0.68	21	Pass
NVNT	1-DH5	2480	Ant1	-0.47	21	Pass
NVNT	2-DH5	2402	Ant1	-0.46	21	Pass
NVNT	2-DH5	2441	Ant1	0.02	21	Pass
NVNT	2-DH5	2480	Ant1	1.34	21	Pass
NVNT	3-DH5	2402	Ant1	0.05	21	Pass
NVNT	3-DH5	2441	Ant1	0.5	21	Pass
NVNT	3-DH5	2480	Ant1	-0.66	21	Pass






Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

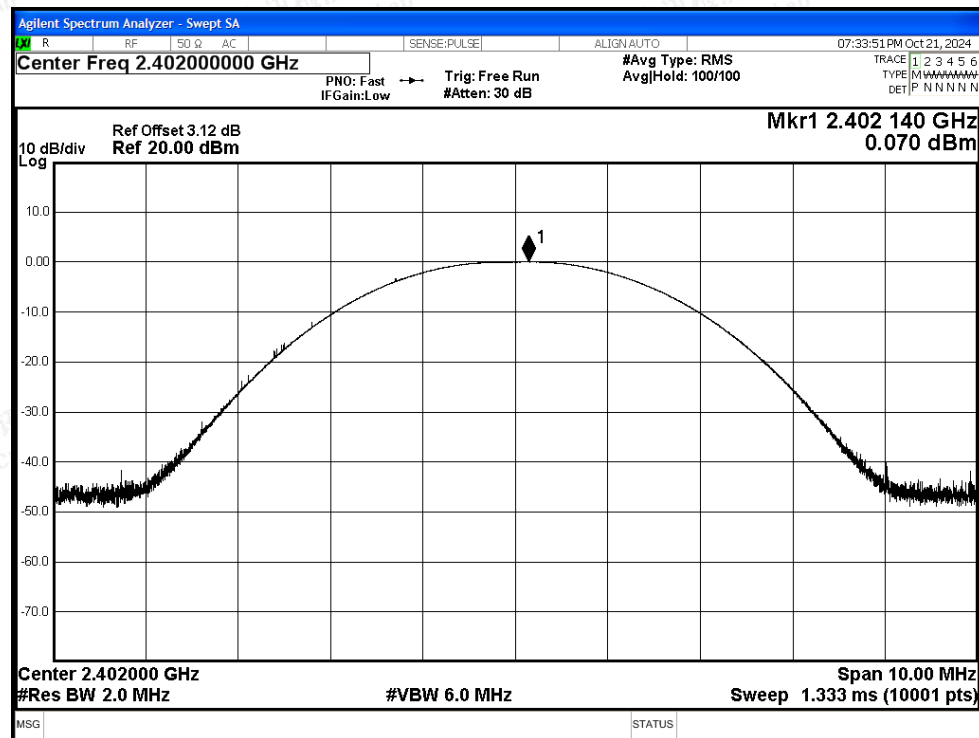


Power NVNT 1-DH5 2441MHz Ant1

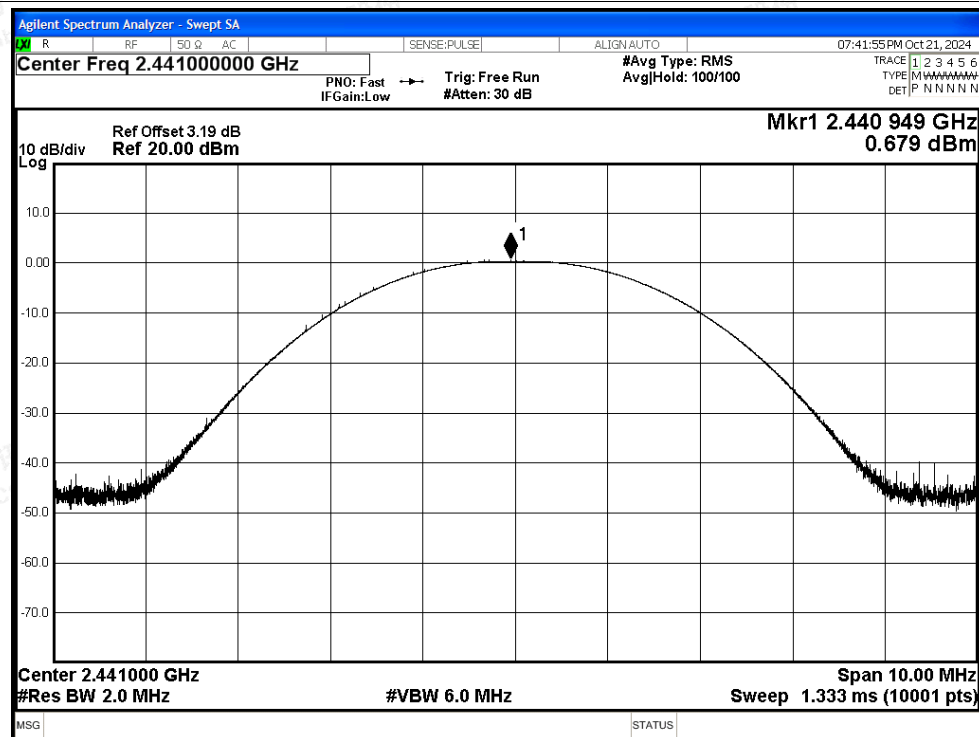




Power NVNT 1-DH5 2480MHz Ant1

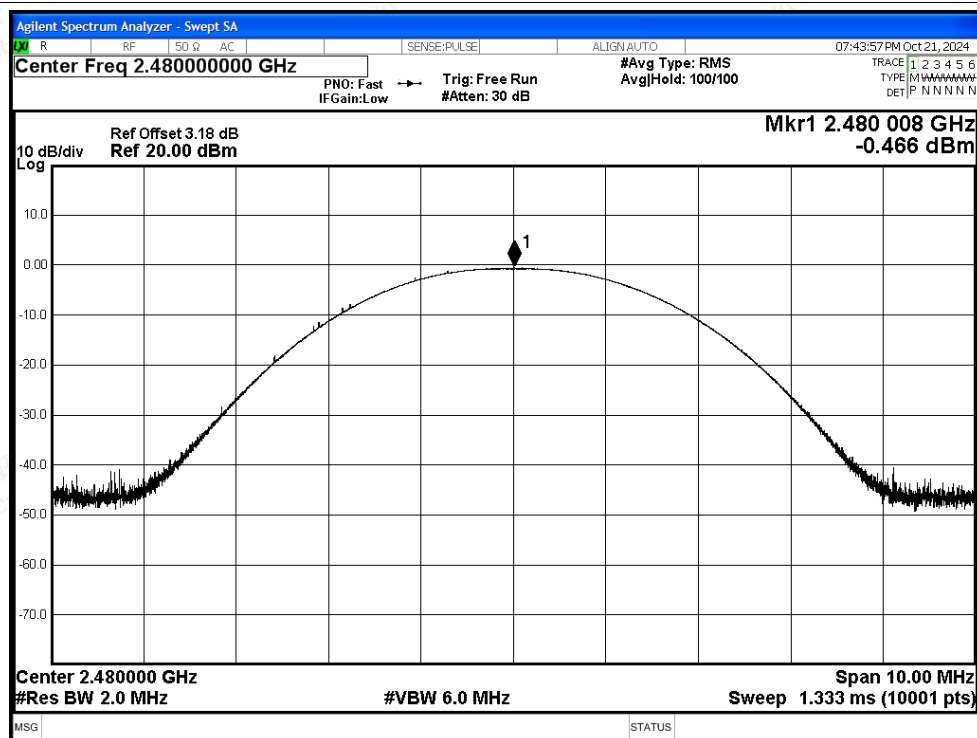


Power NVNT 2-DH5 2402MHz Ant1

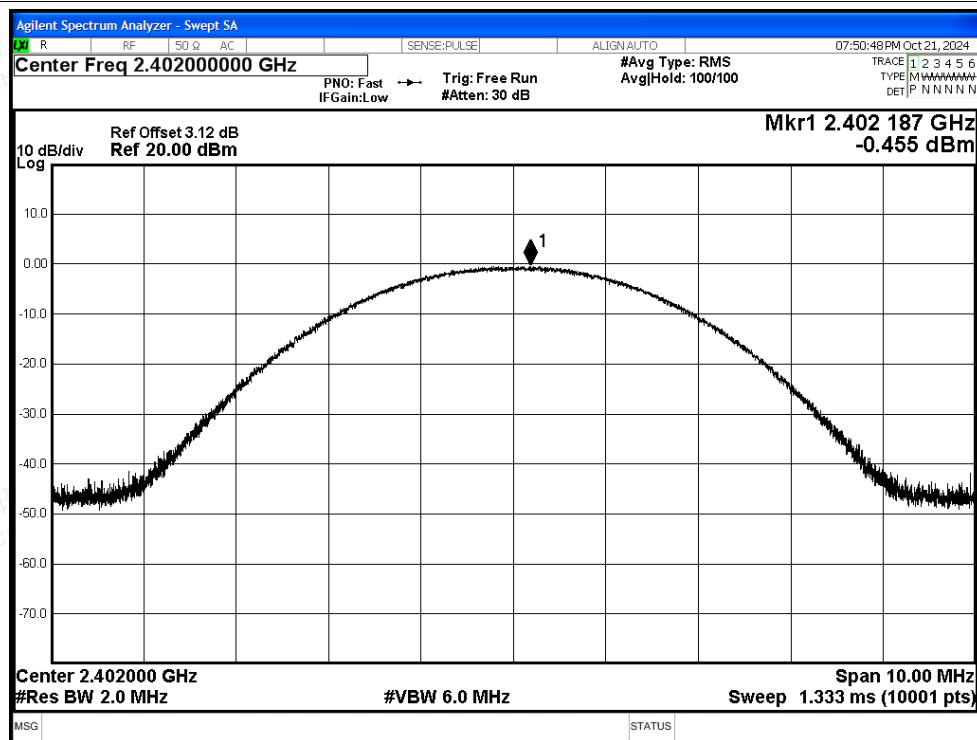




Power NVNT 2-DH5 2441MHz Ant1

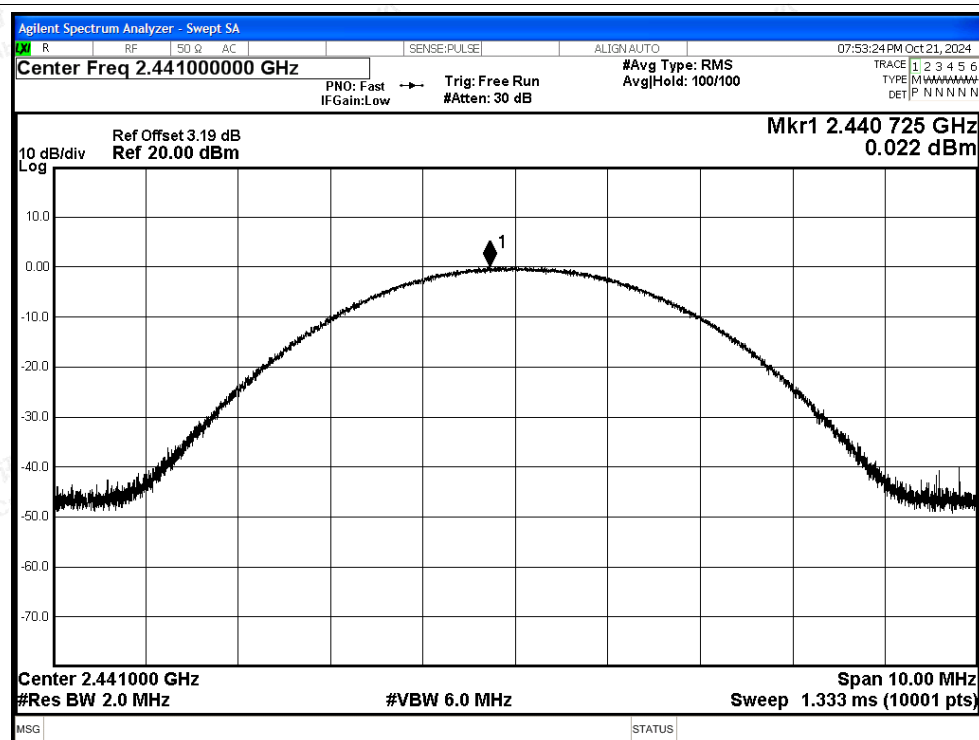


Power NVNT 2-DH5 2480MHz Ant1

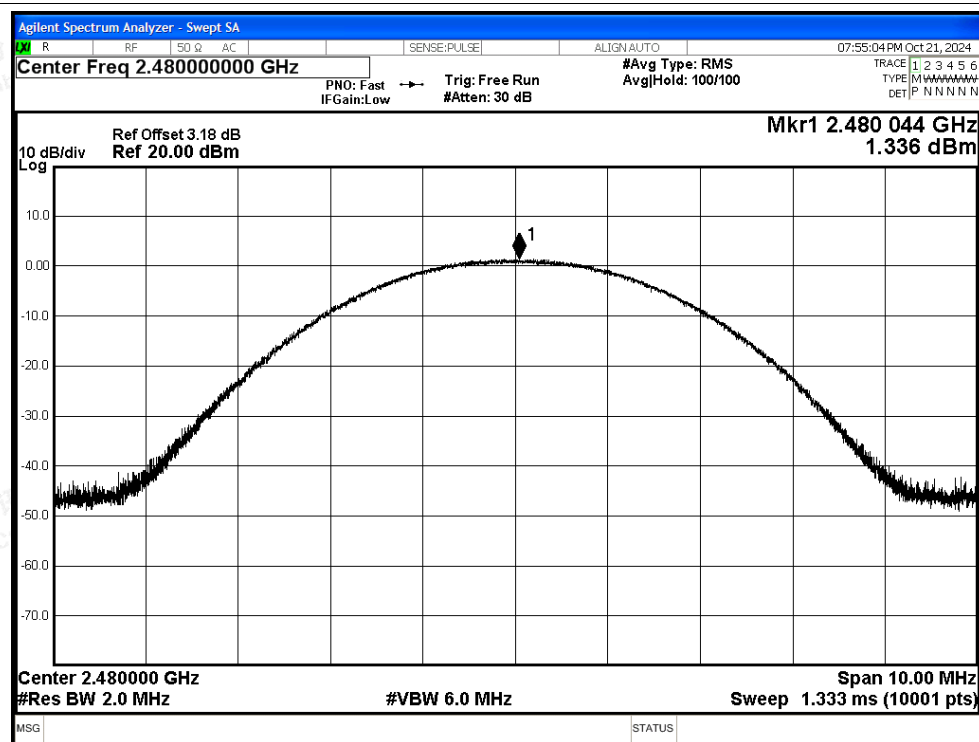





Power NVNT 3-DH5 2402MHz Ant1

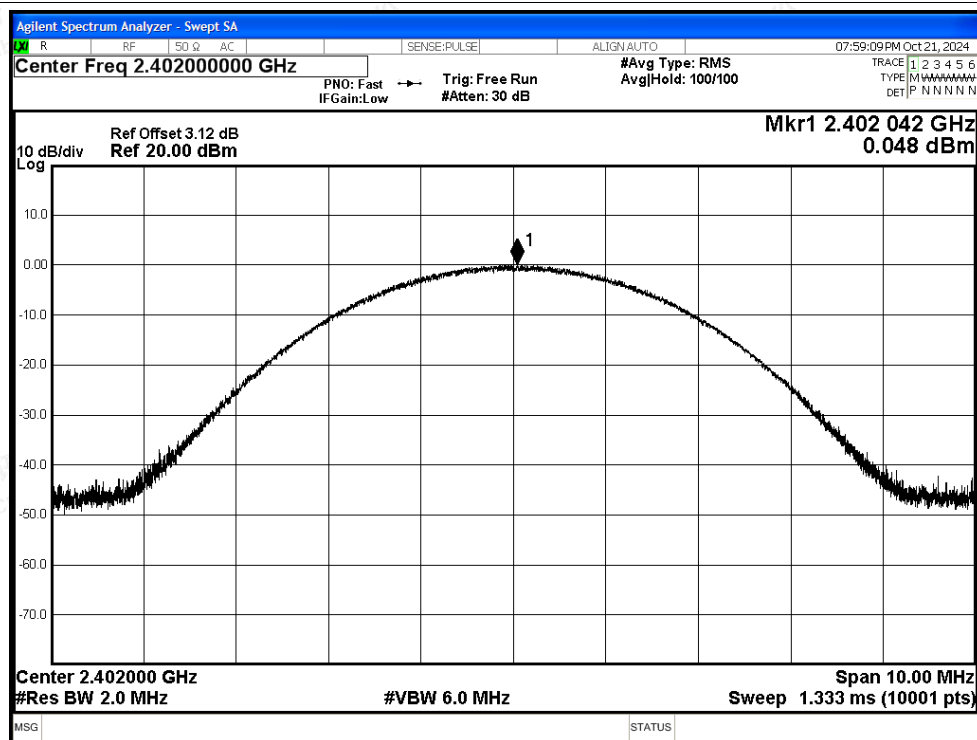

Power NVNT 3-DH5 2441MHz Ant1

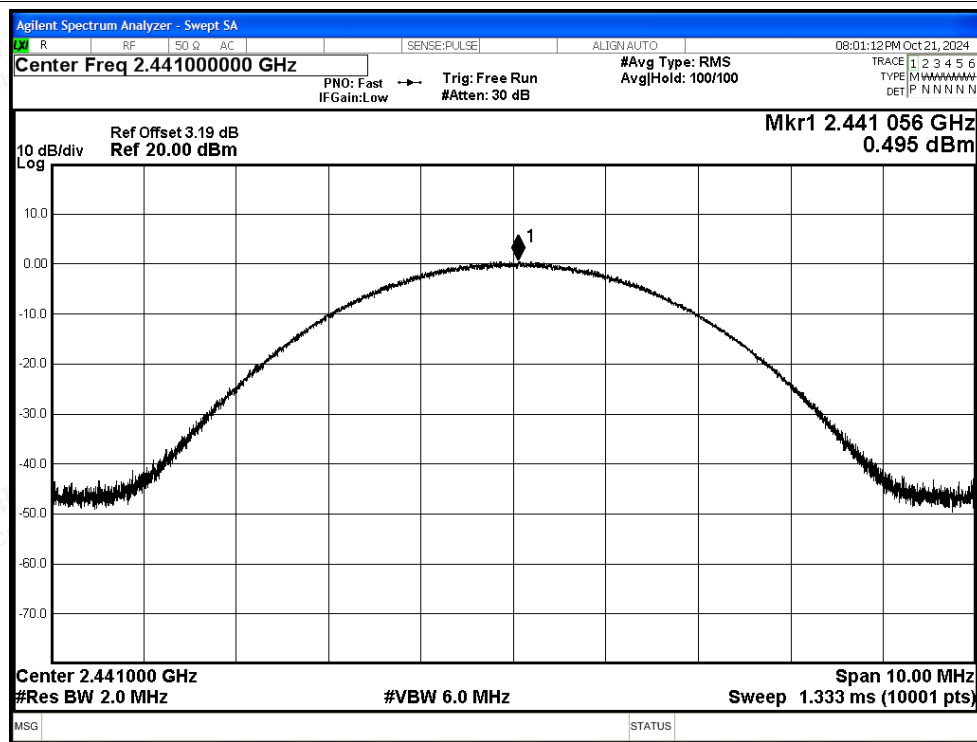

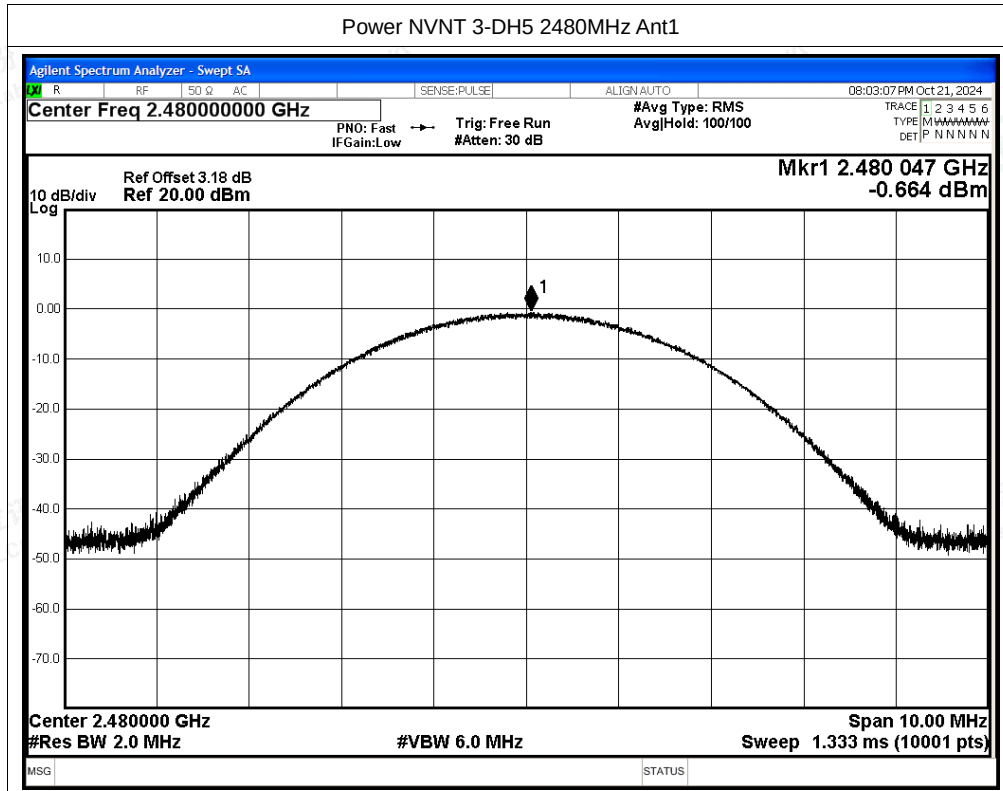



A.3 Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.024	2403.01	0.986	0.675	Pass
NVNT	2-DH5	Ant1	2402.024	2403.032	1.008	0.856	Pass
NVNT	3-DH5	Ant1	2402.028	2403.026	0.998	0.867	Pass







Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

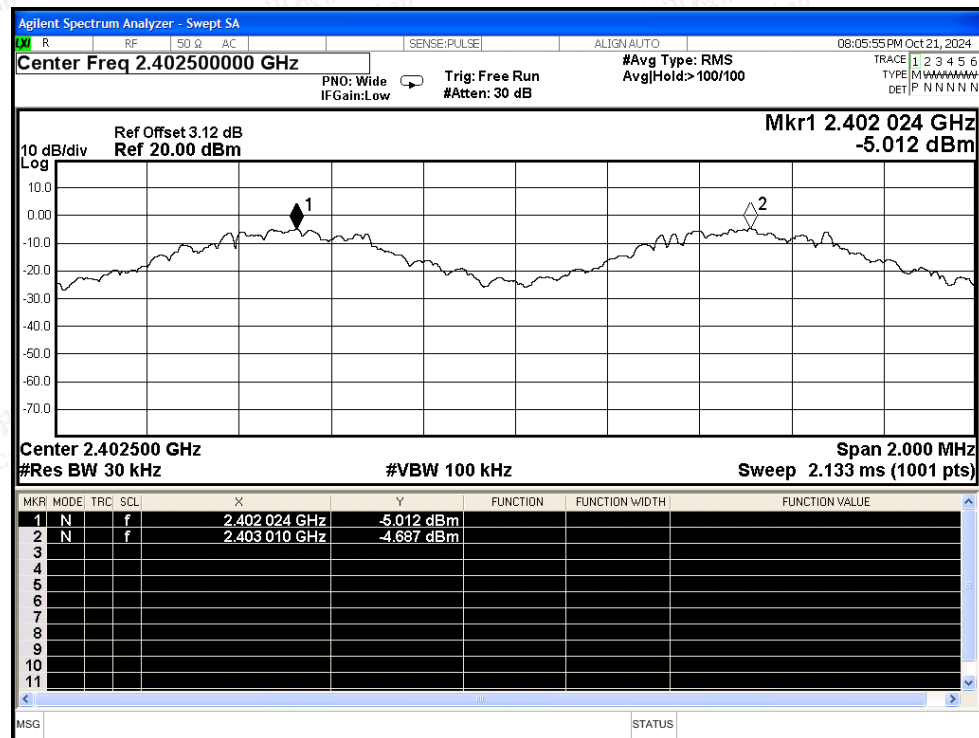

CFS NVNT 2-DH5 2402MHz Ant1

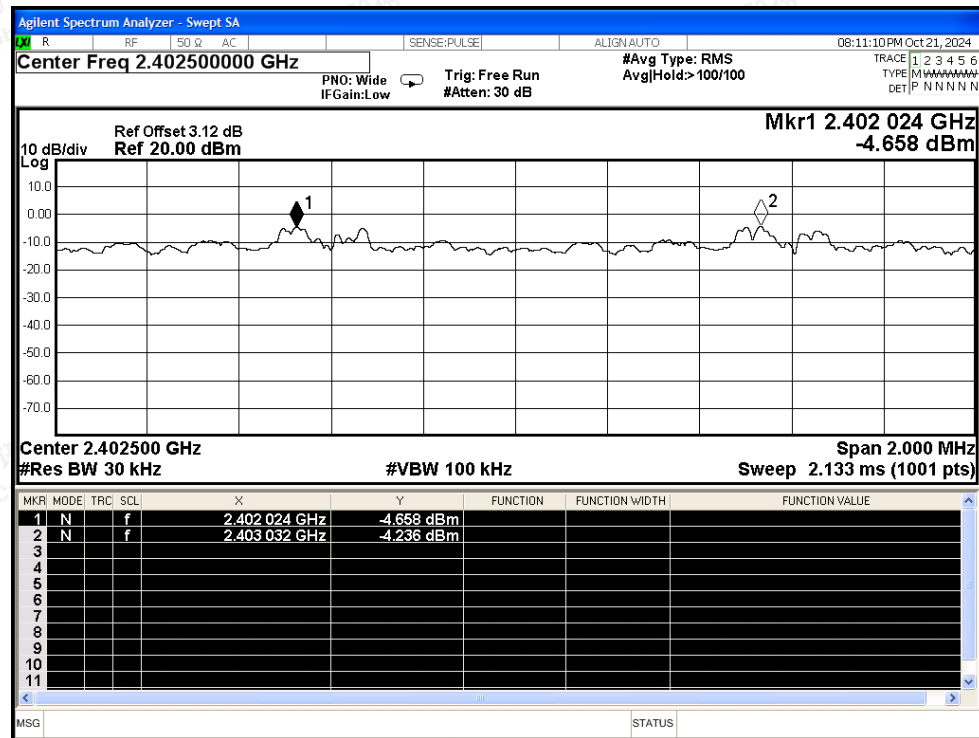

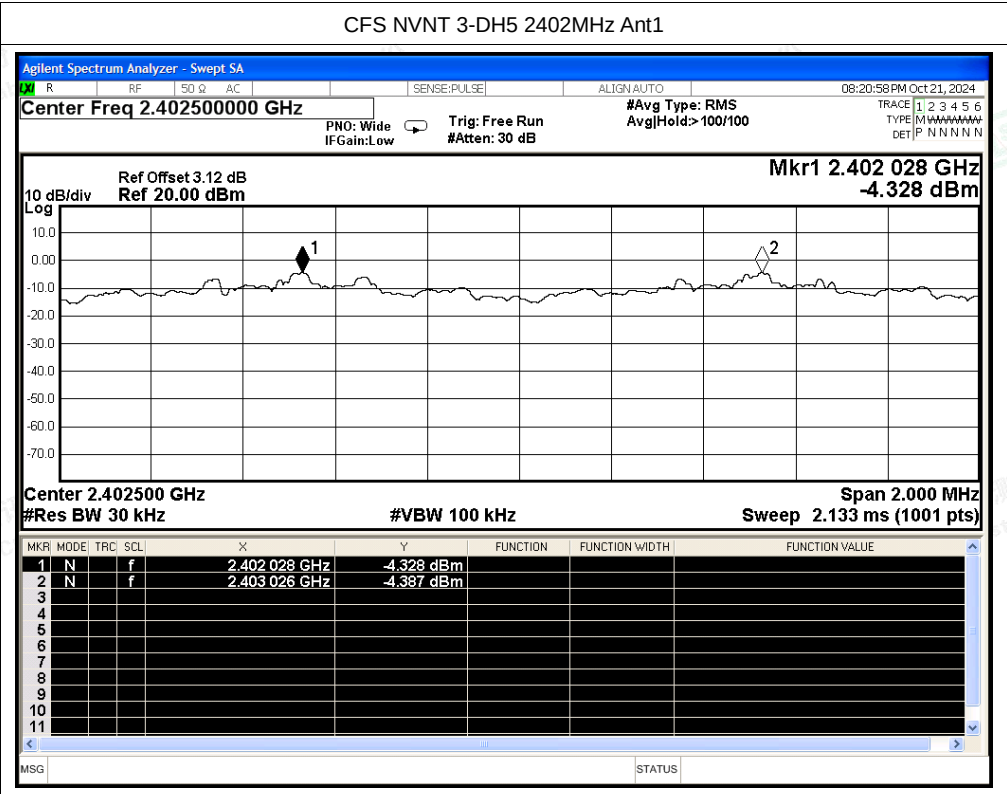



A.4 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.91	291	100	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.898	336.168	116	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.898	353.556	122	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

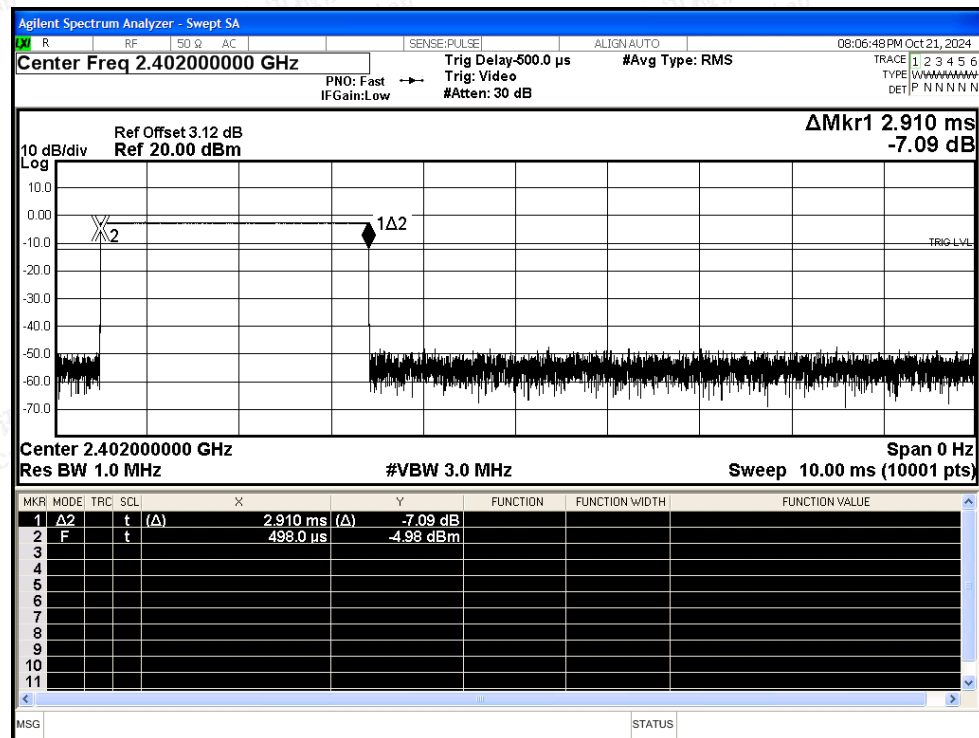


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

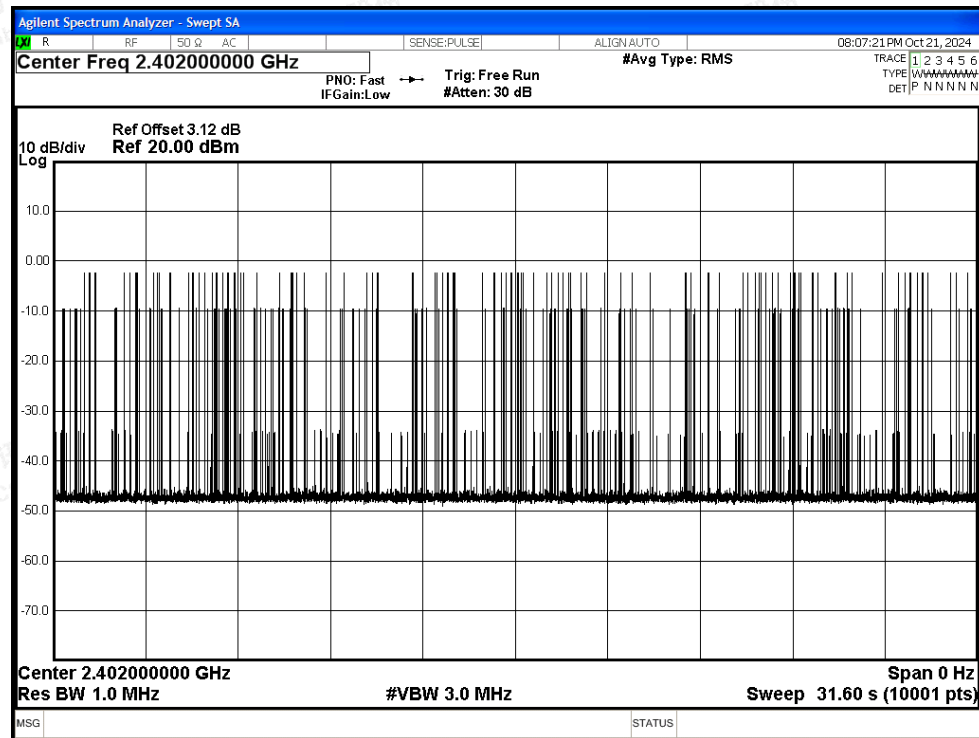




Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

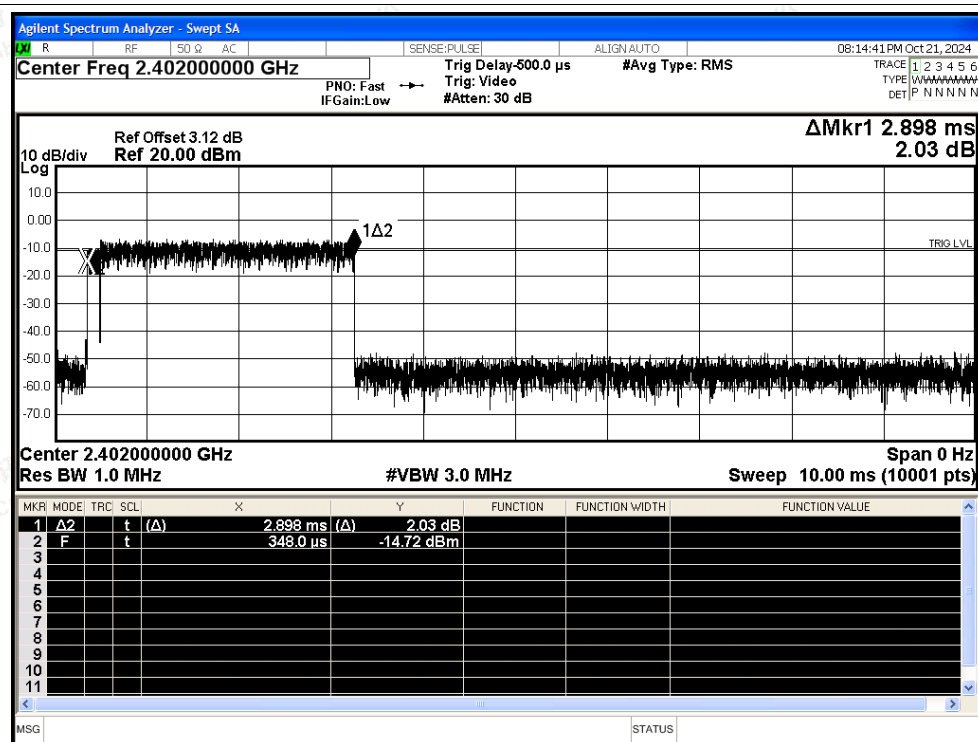


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

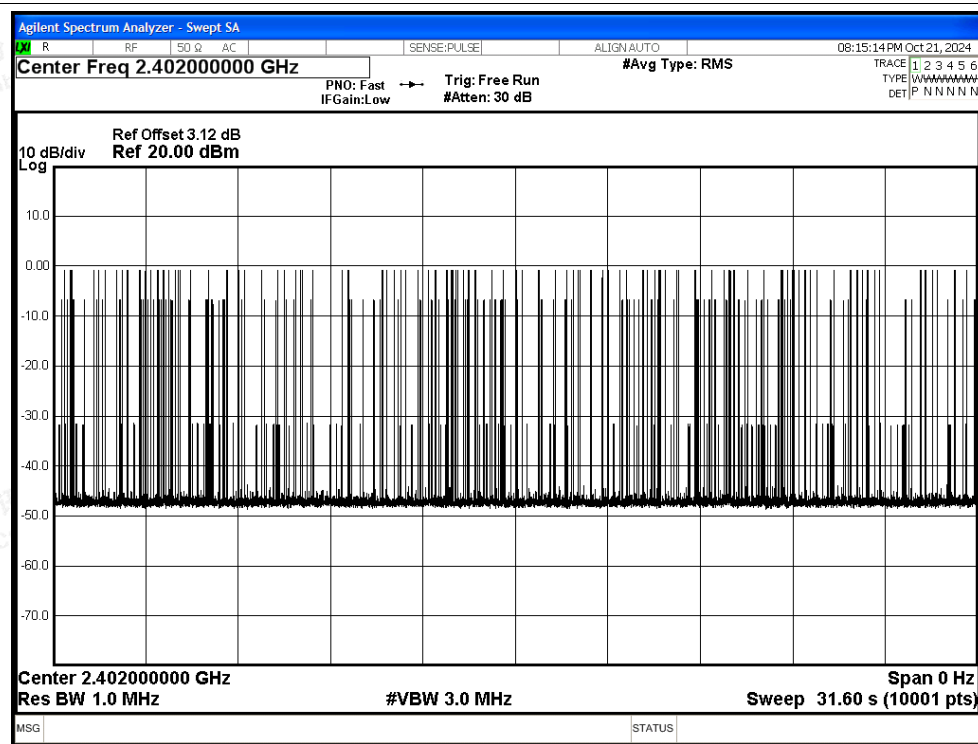




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

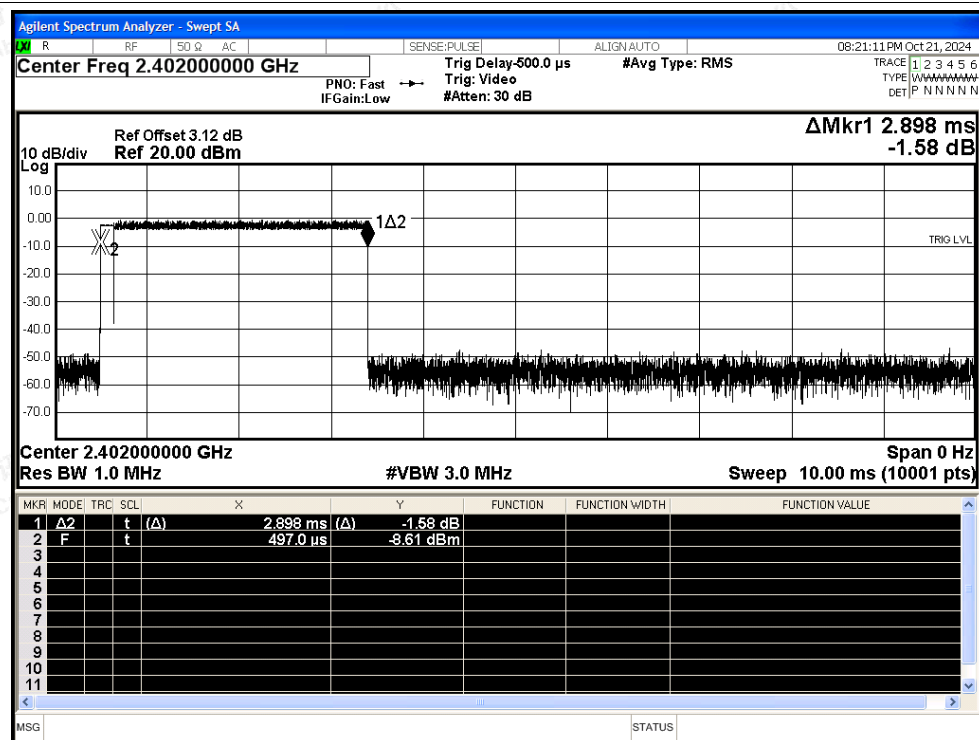

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

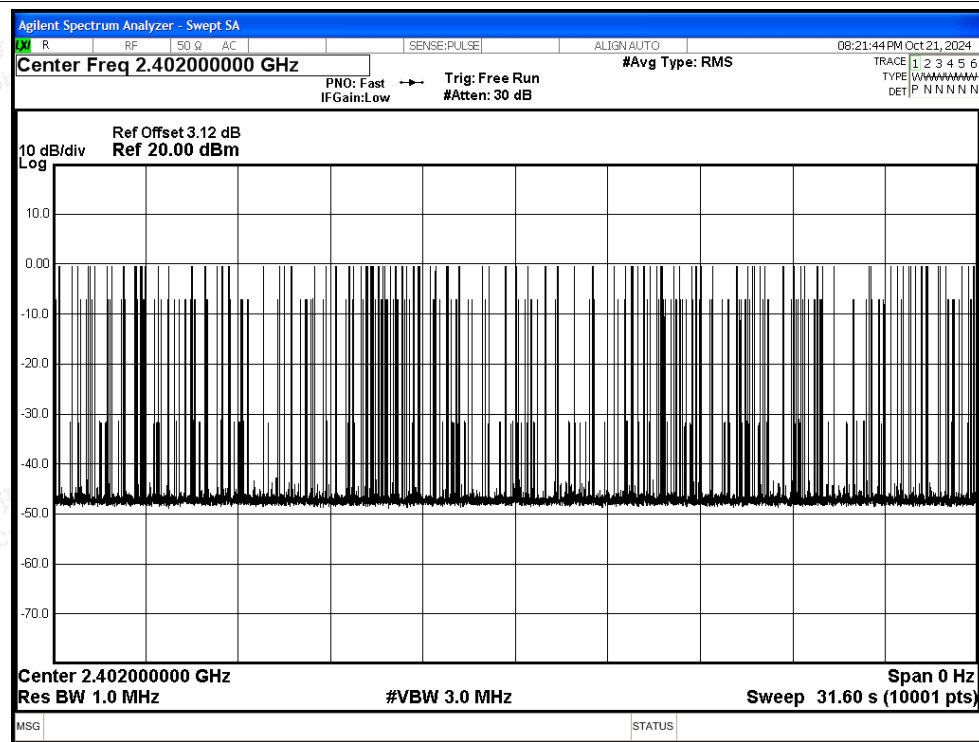



A.5 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass







Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

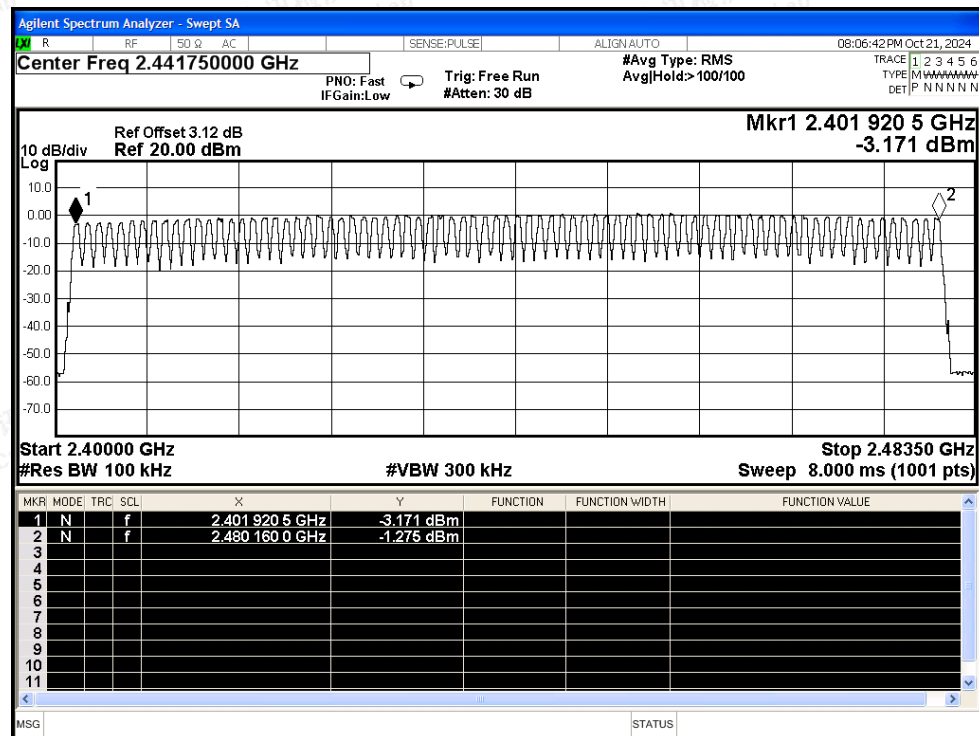

Hopping No. NVNT 2-DH5 2402MHz Ant1

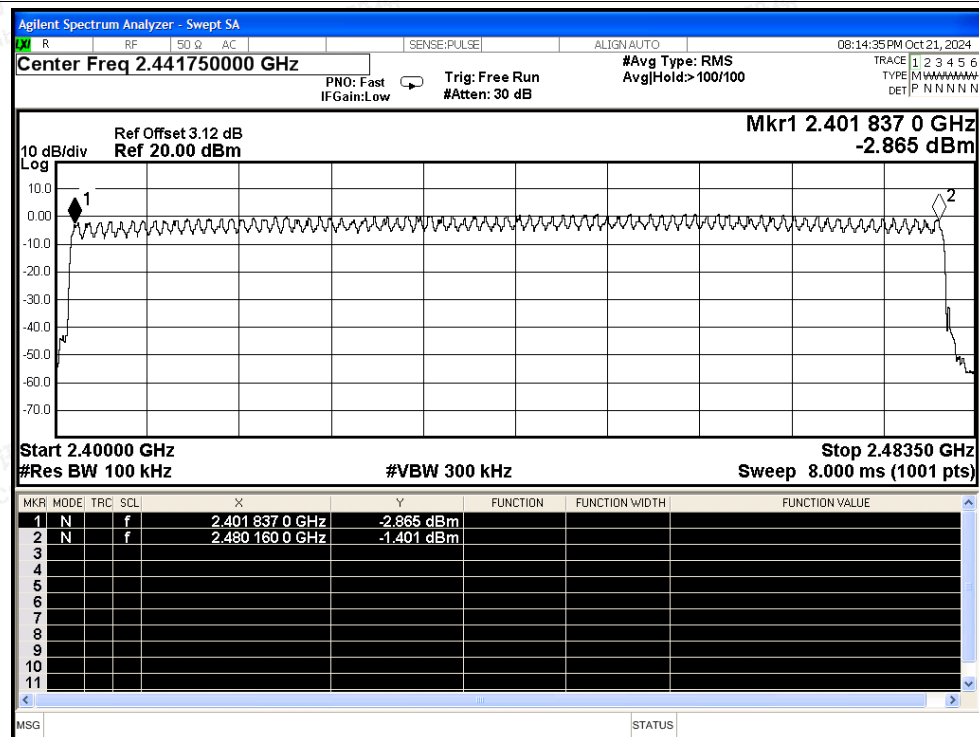

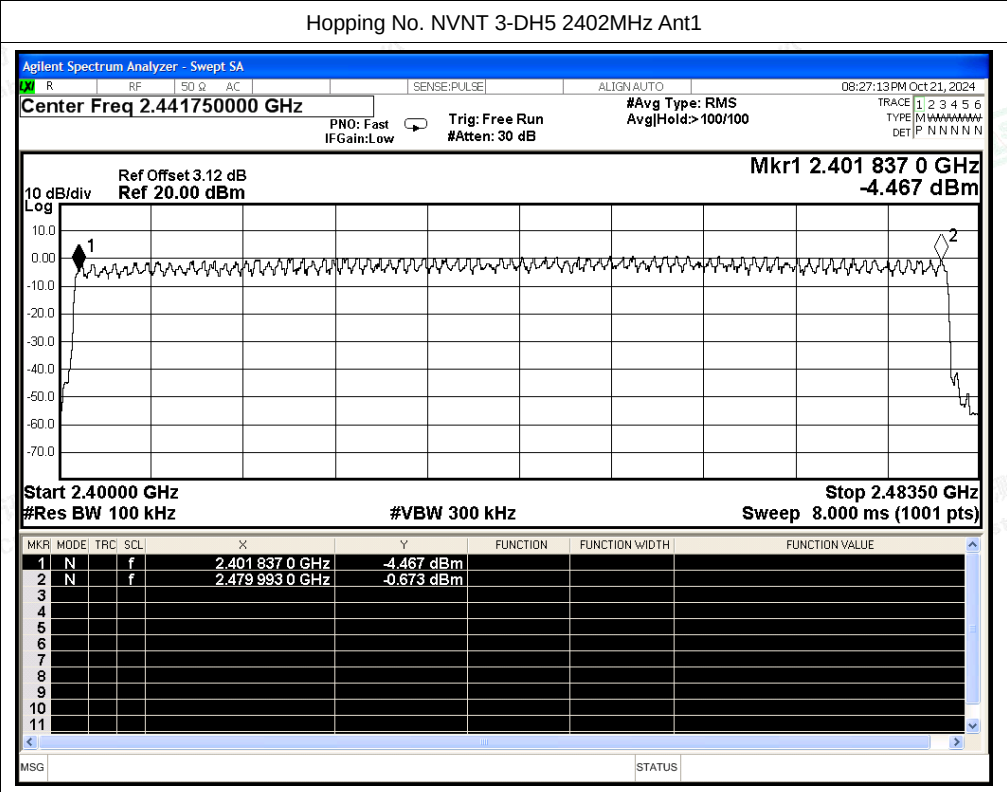



A.6 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-55.81	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-54.22	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-51.88	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-55.86	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-50.12	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-51.26	-20	Pass






Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

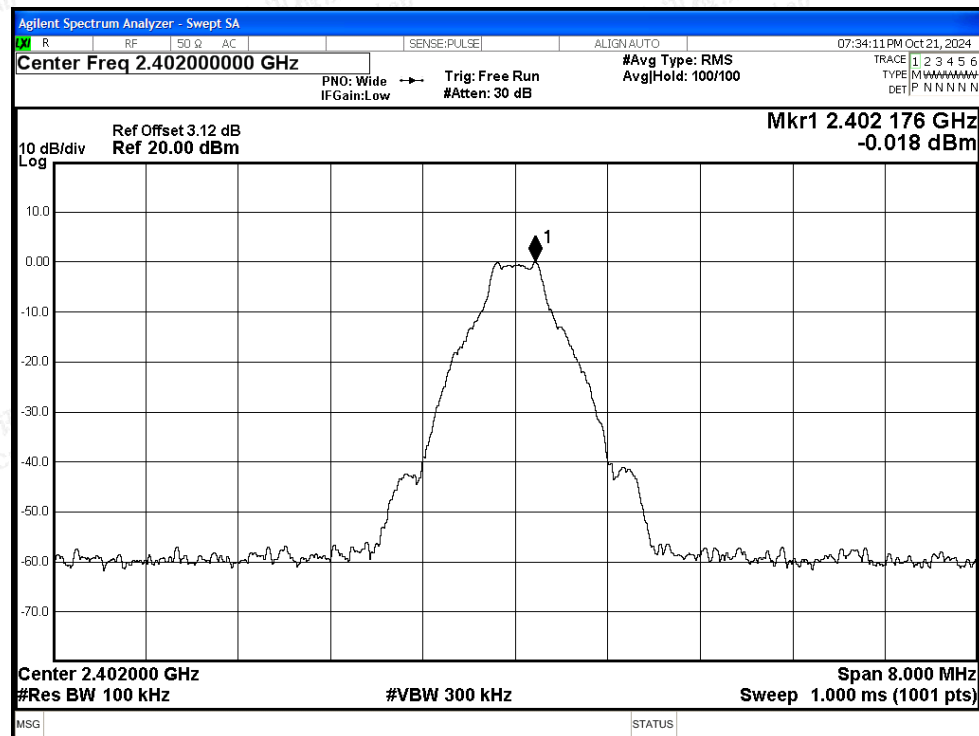


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

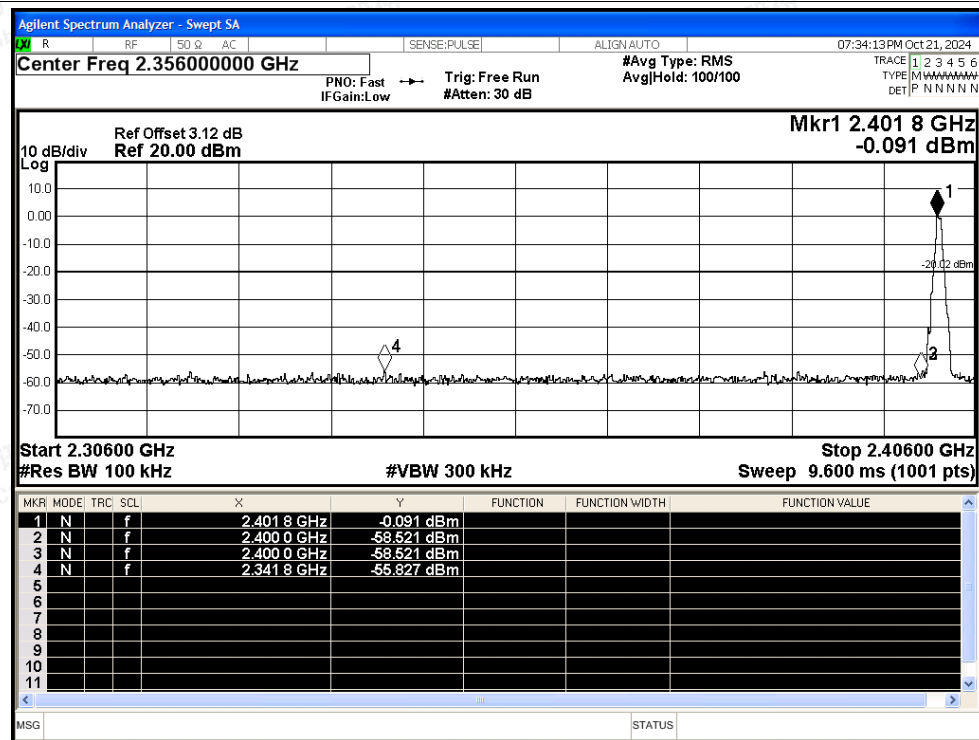




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

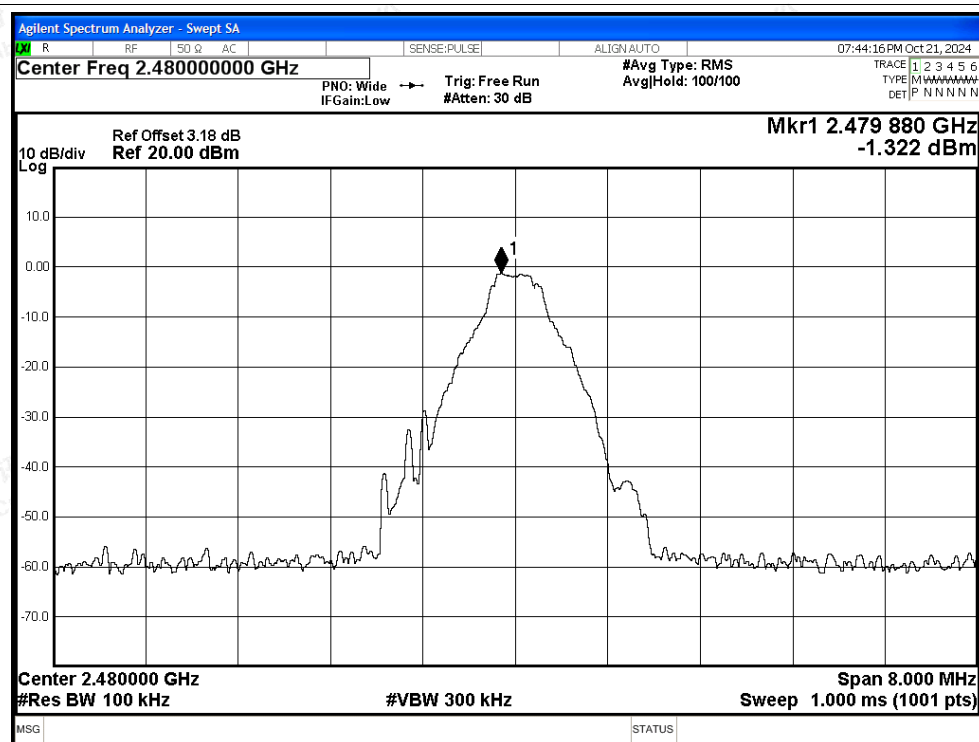


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

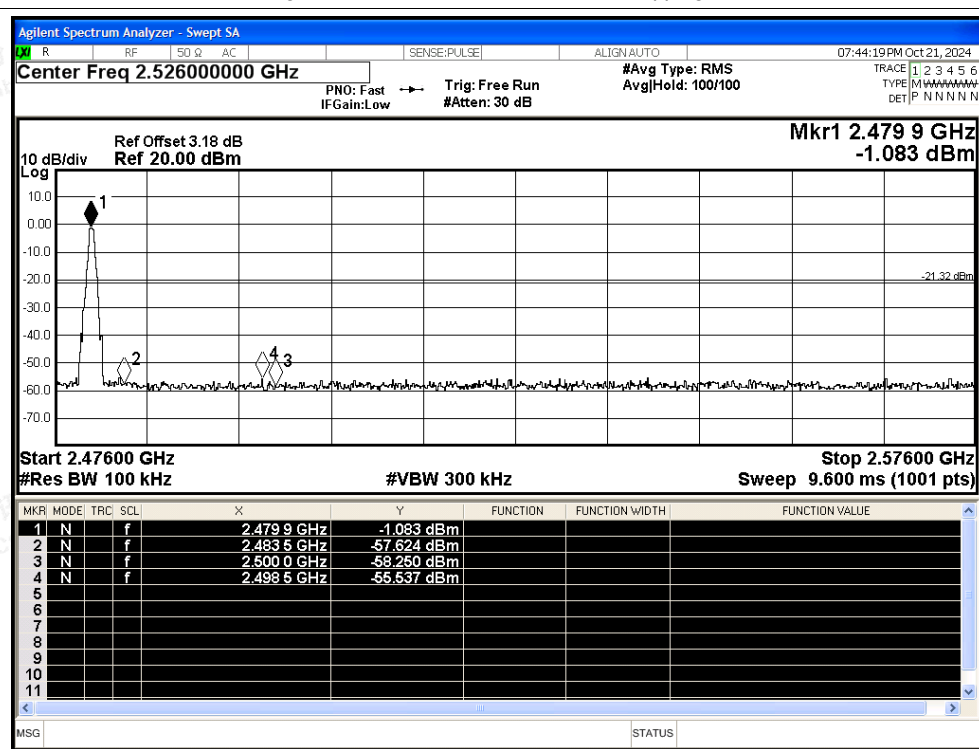




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

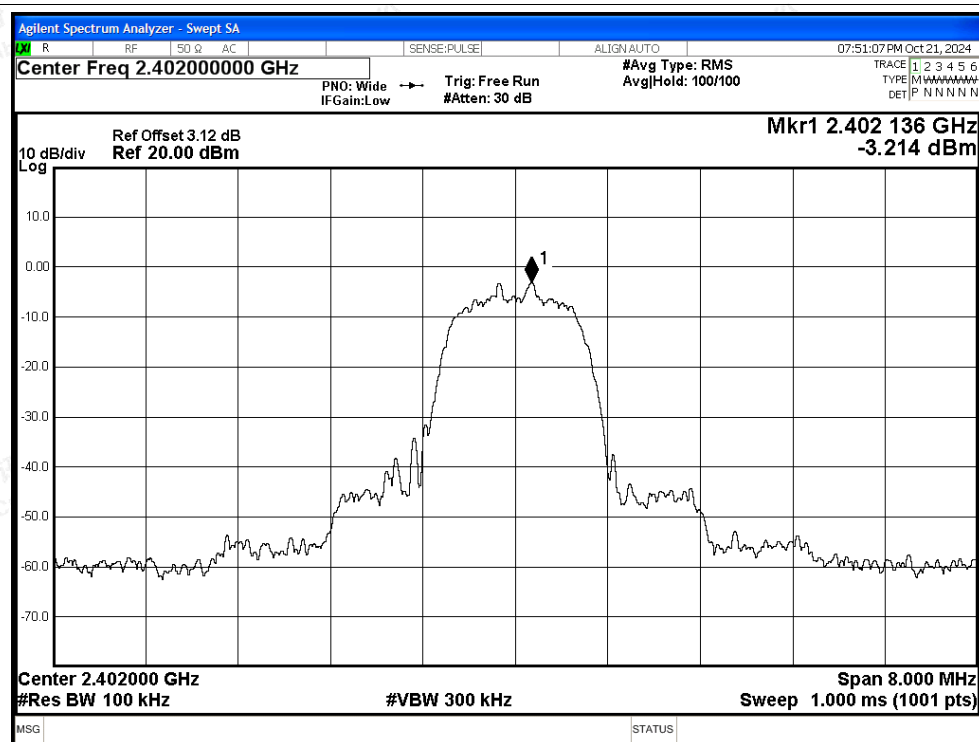


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

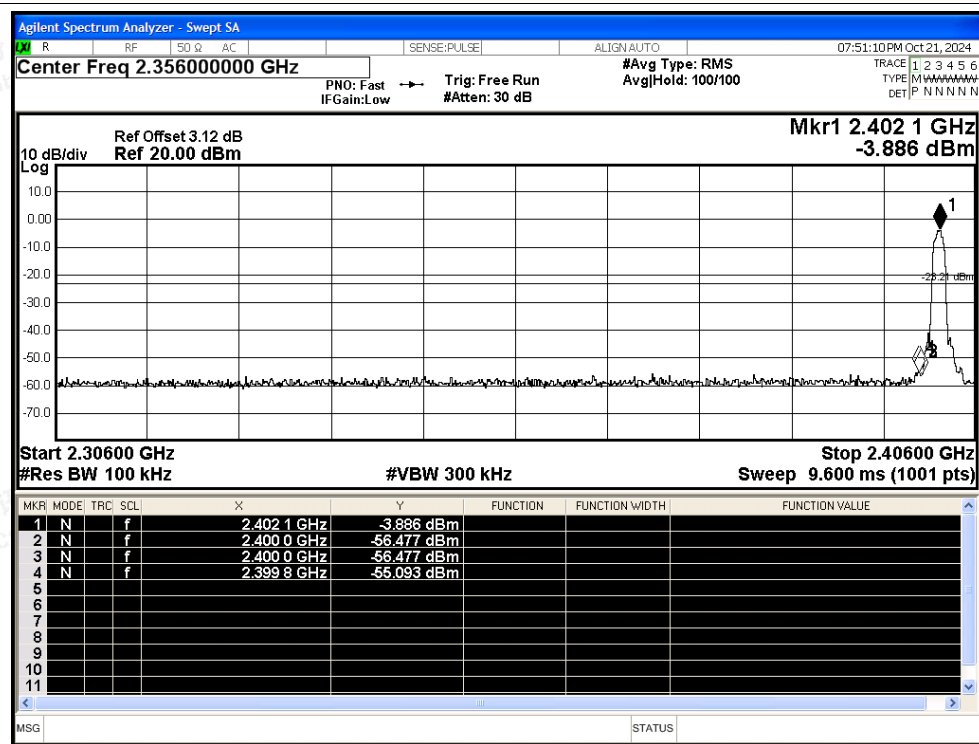




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

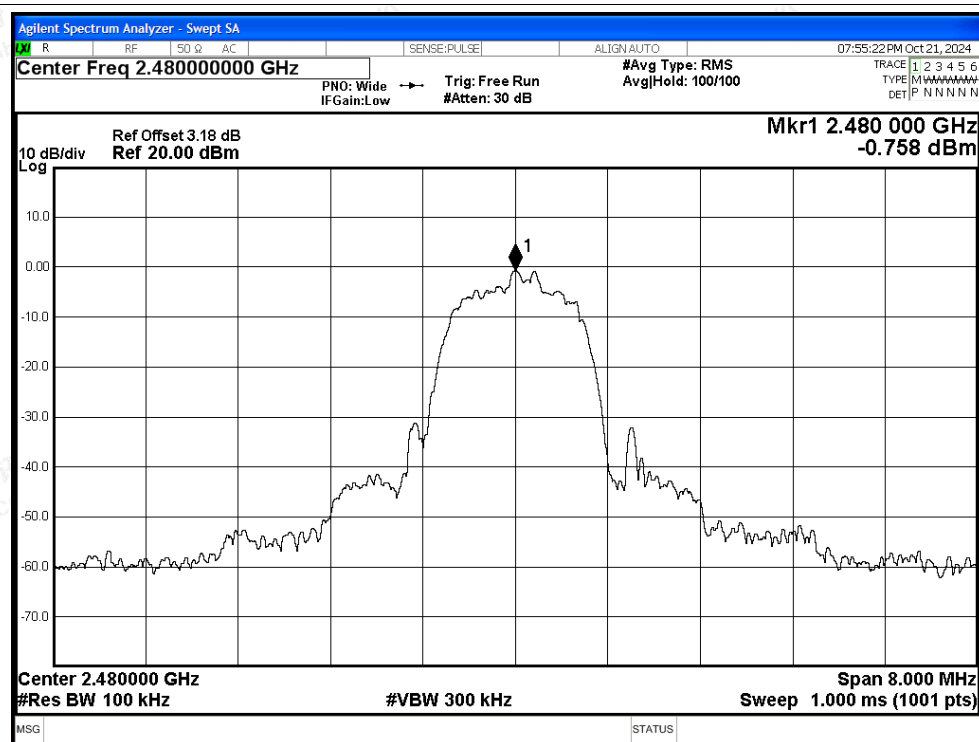


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

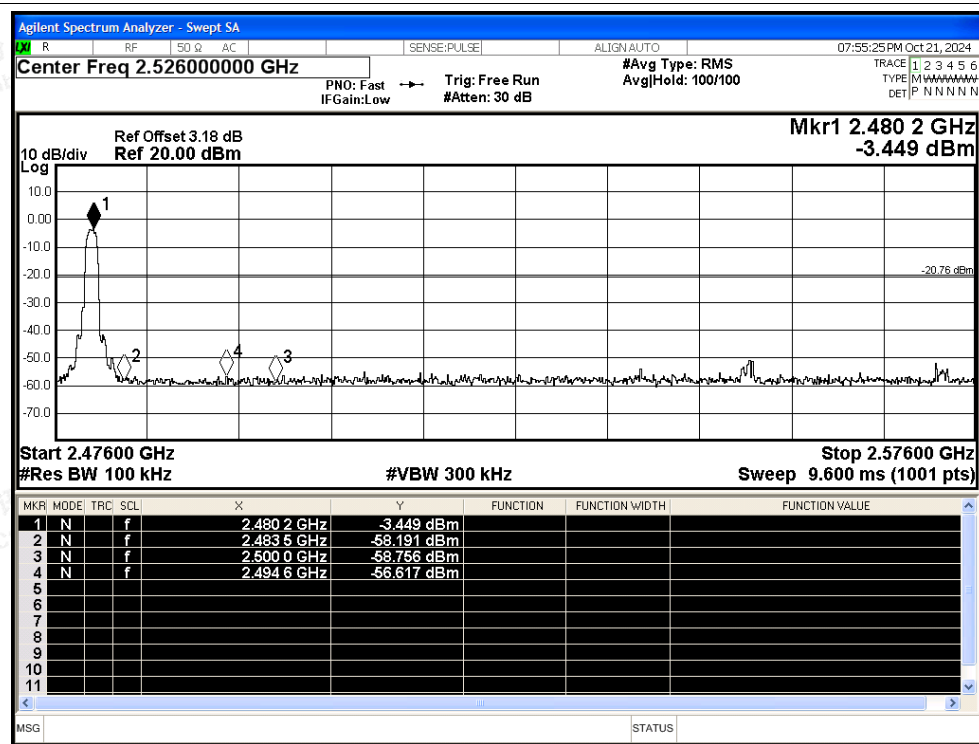




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

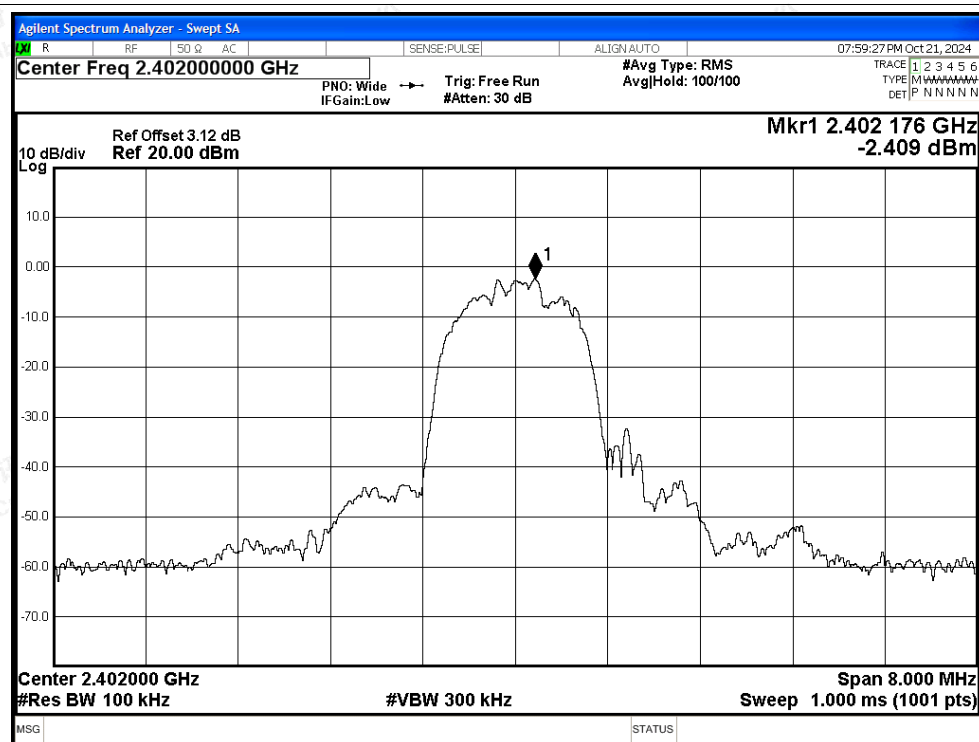


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

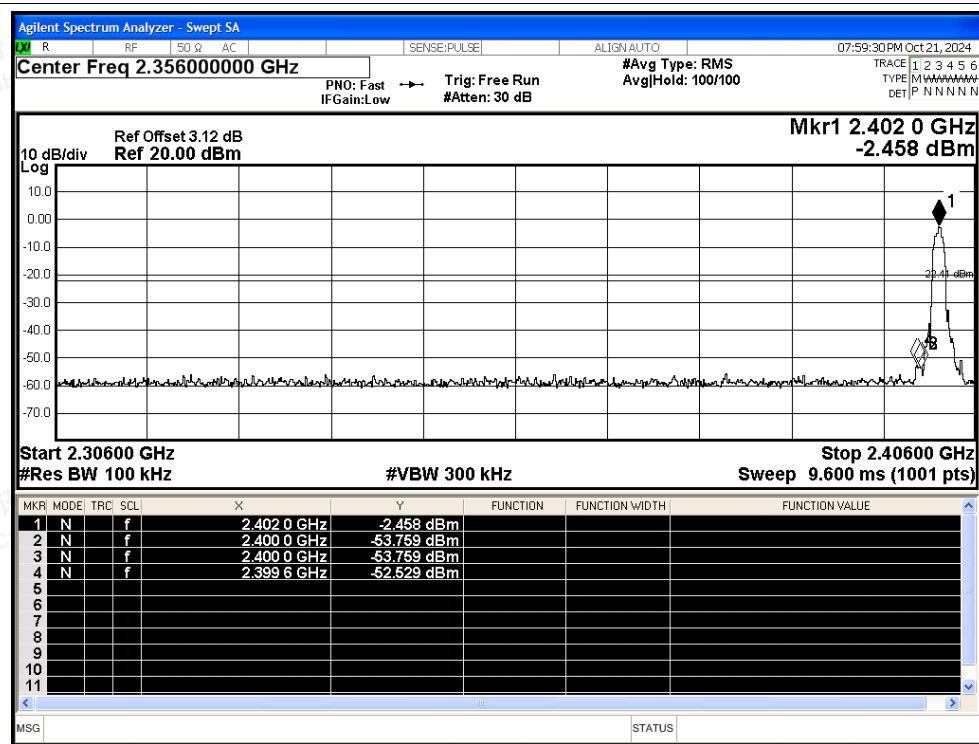




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

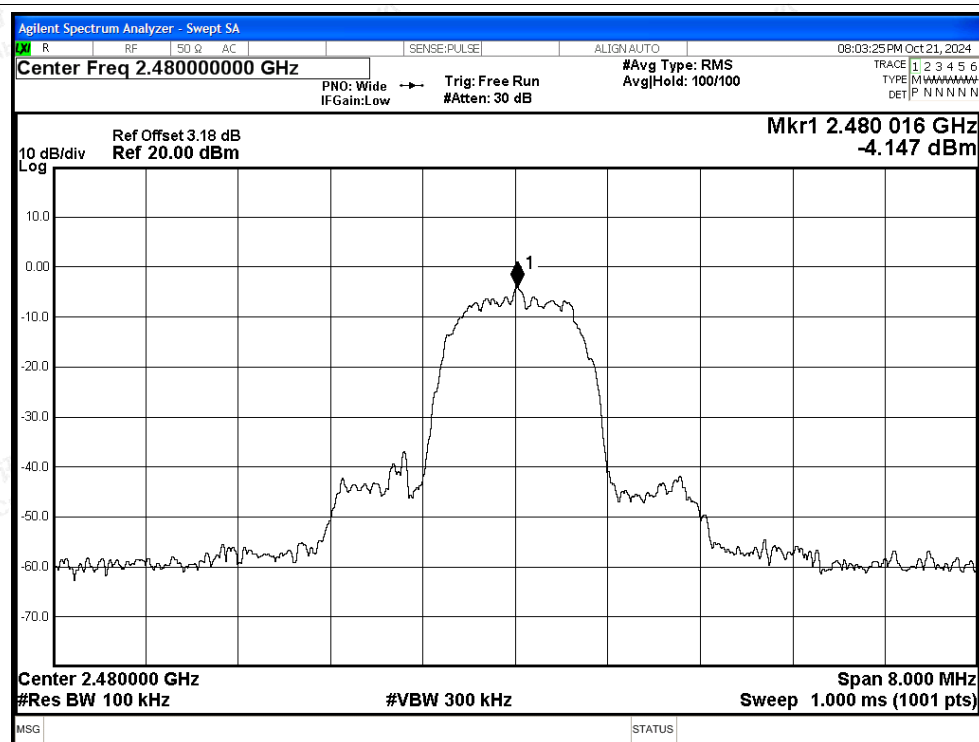

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

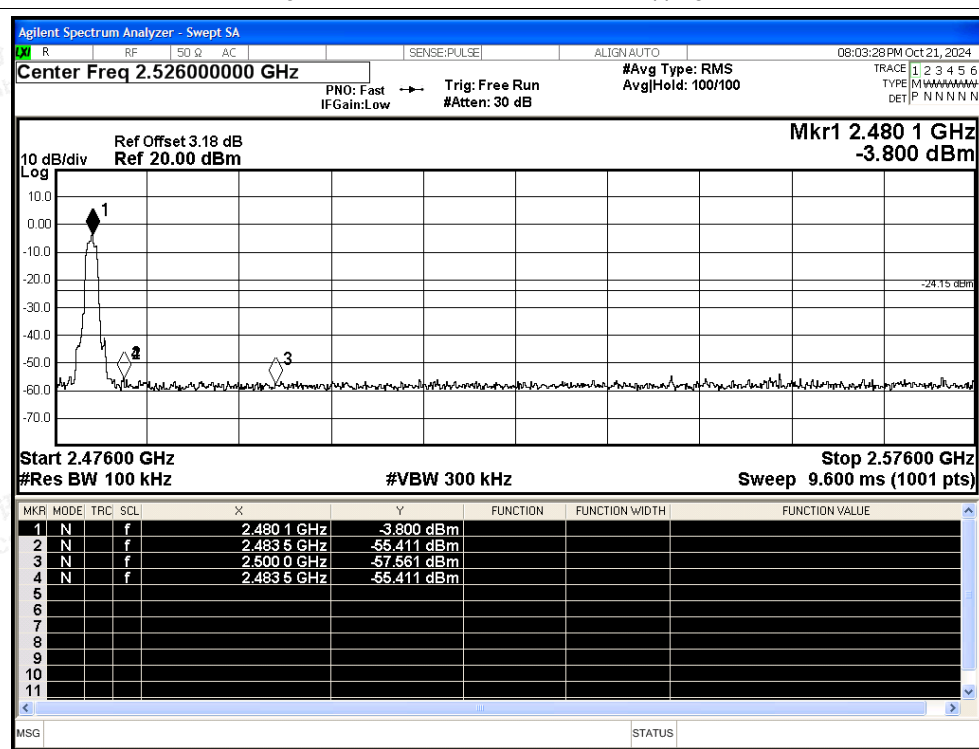



(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-52.59	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-53.53	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-52.42	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-54.39	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-51.87	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-53.96	-20	Pass






Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

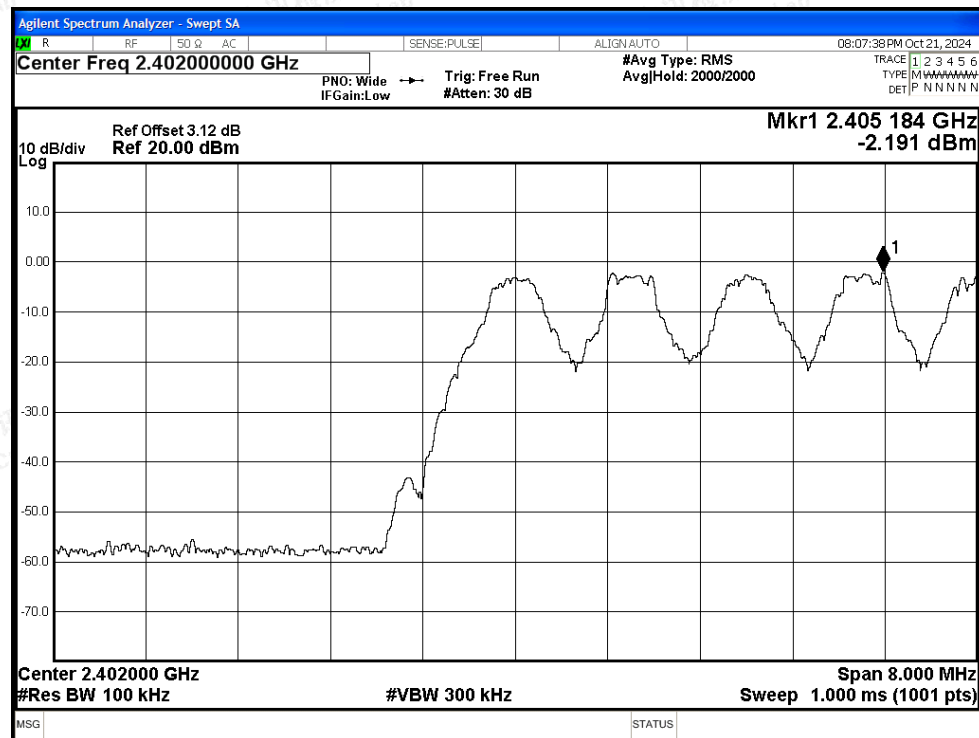


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

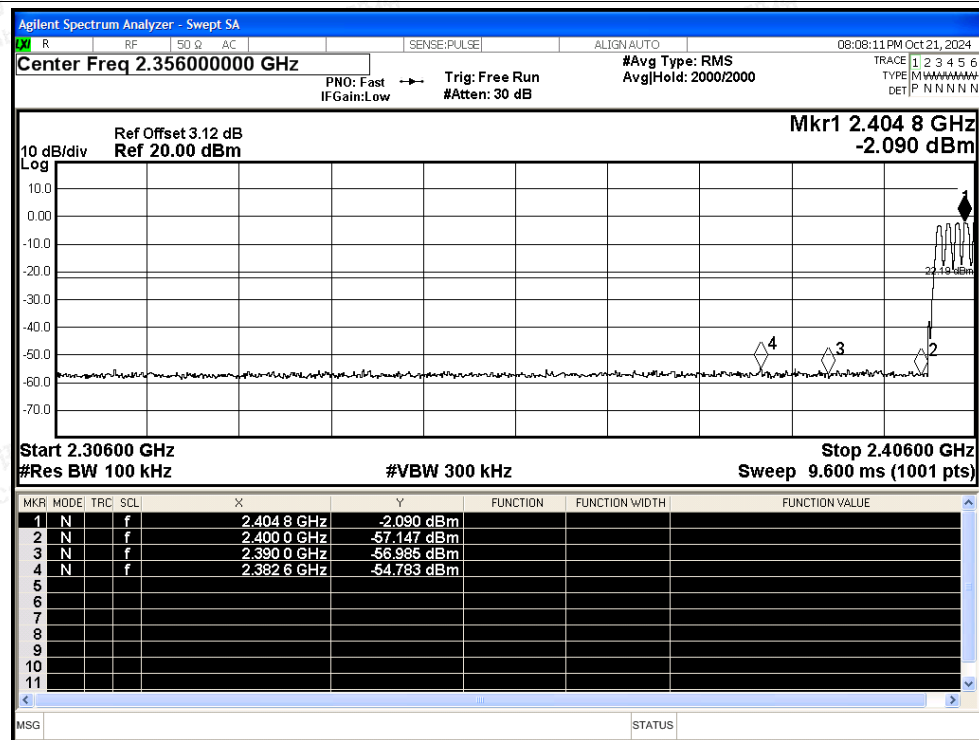




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

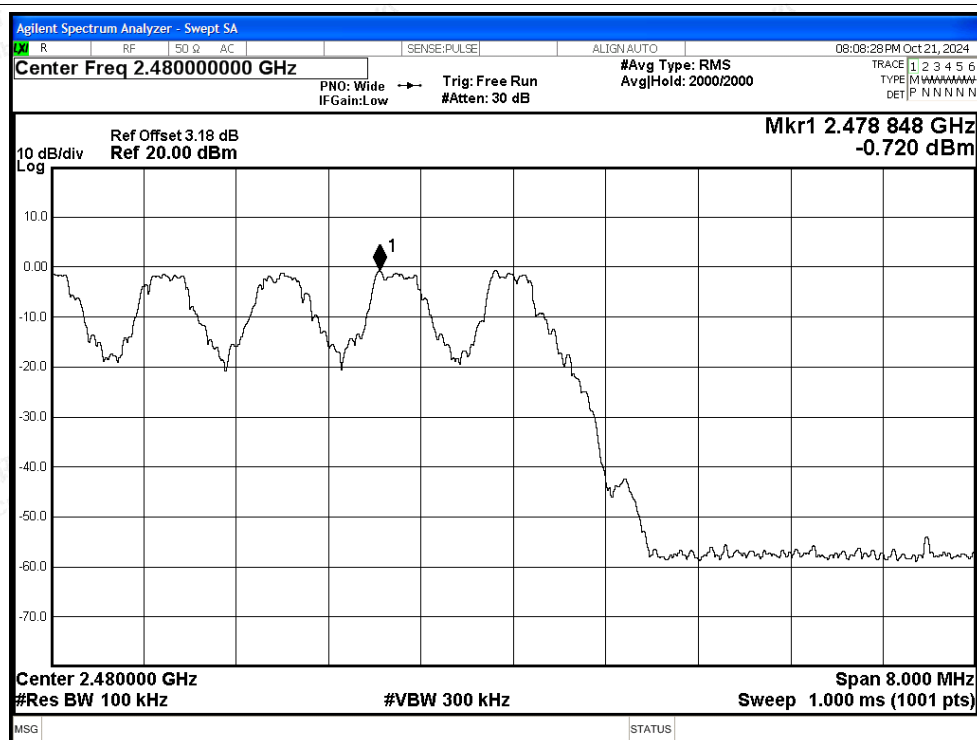

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

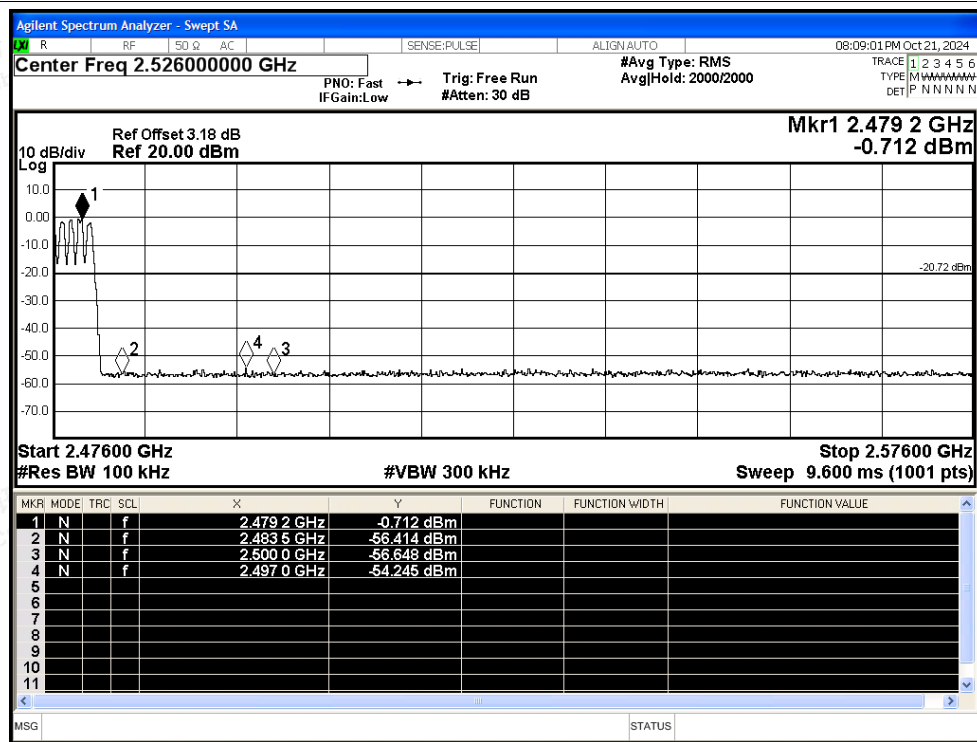

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

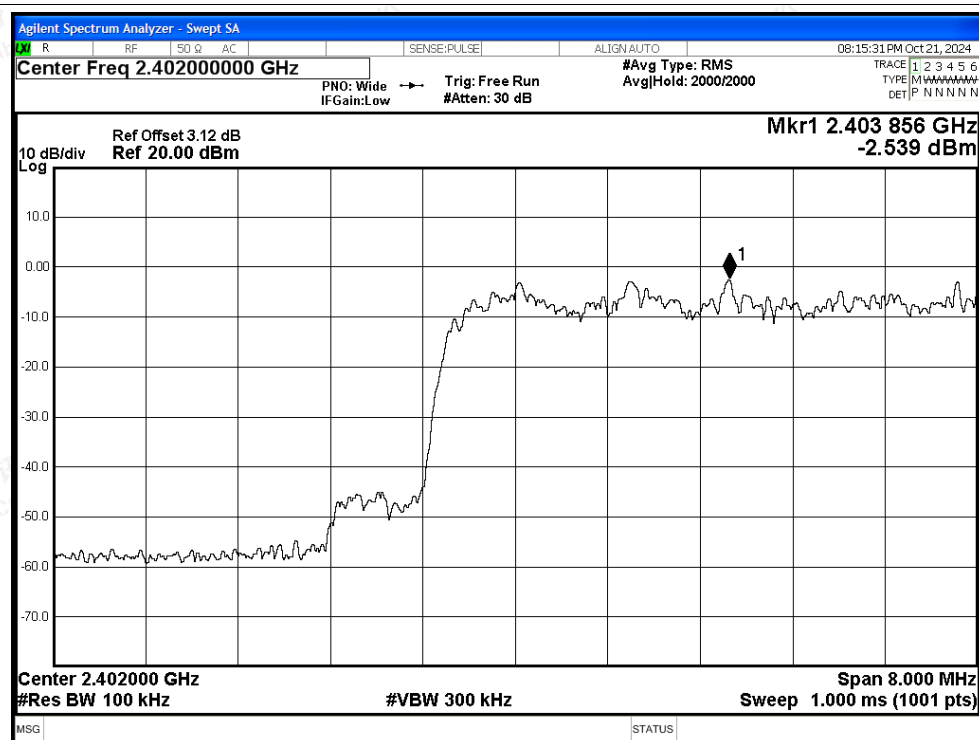

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

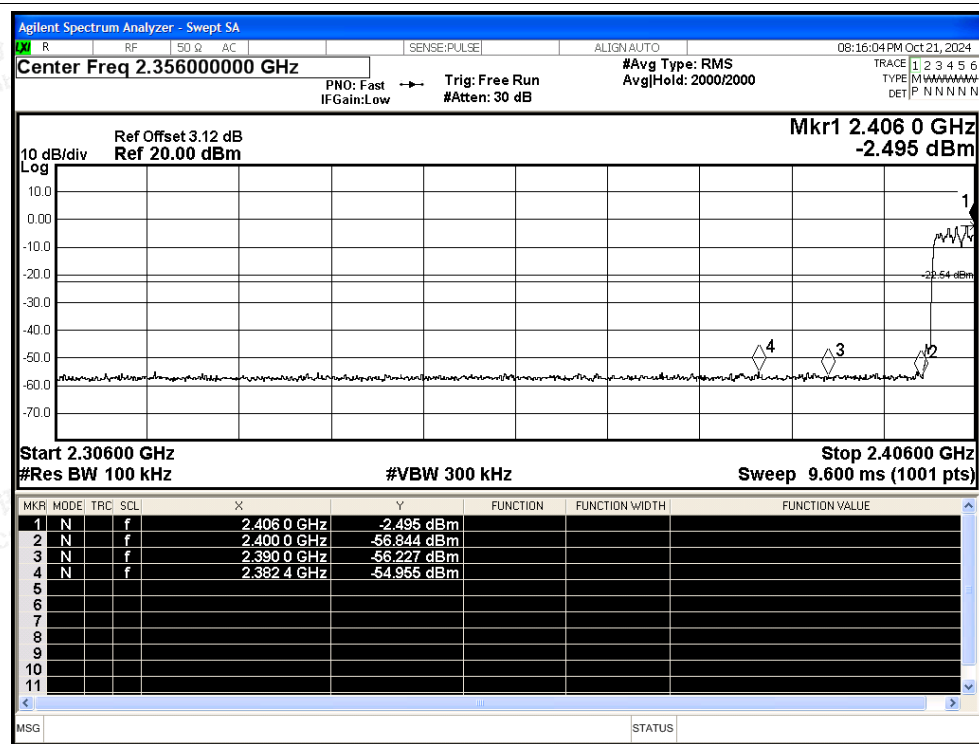

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

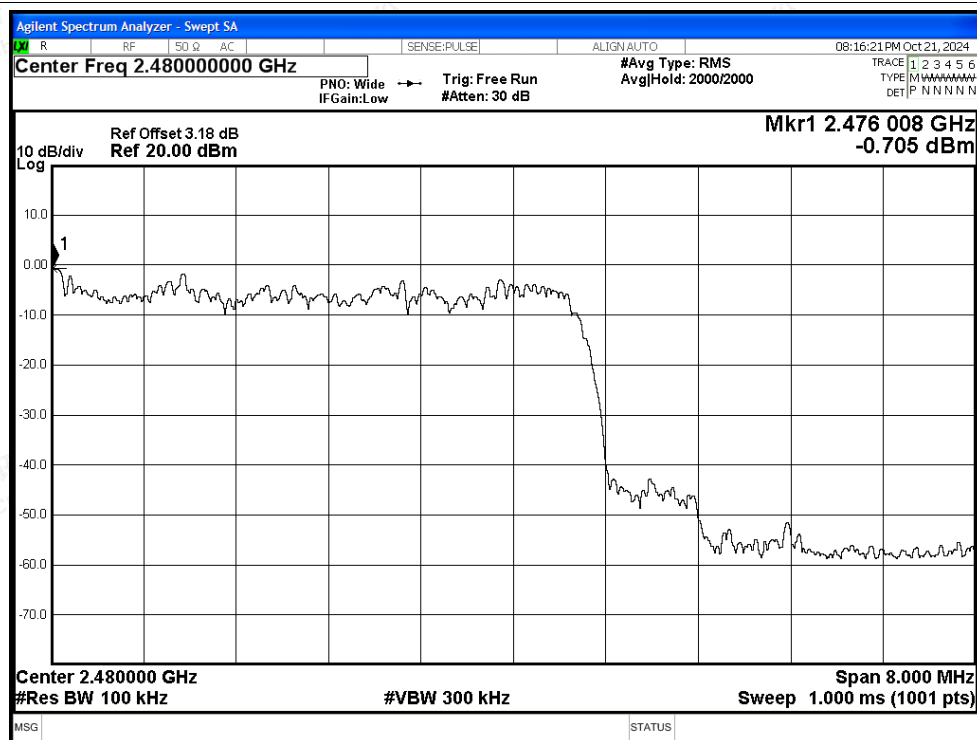

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

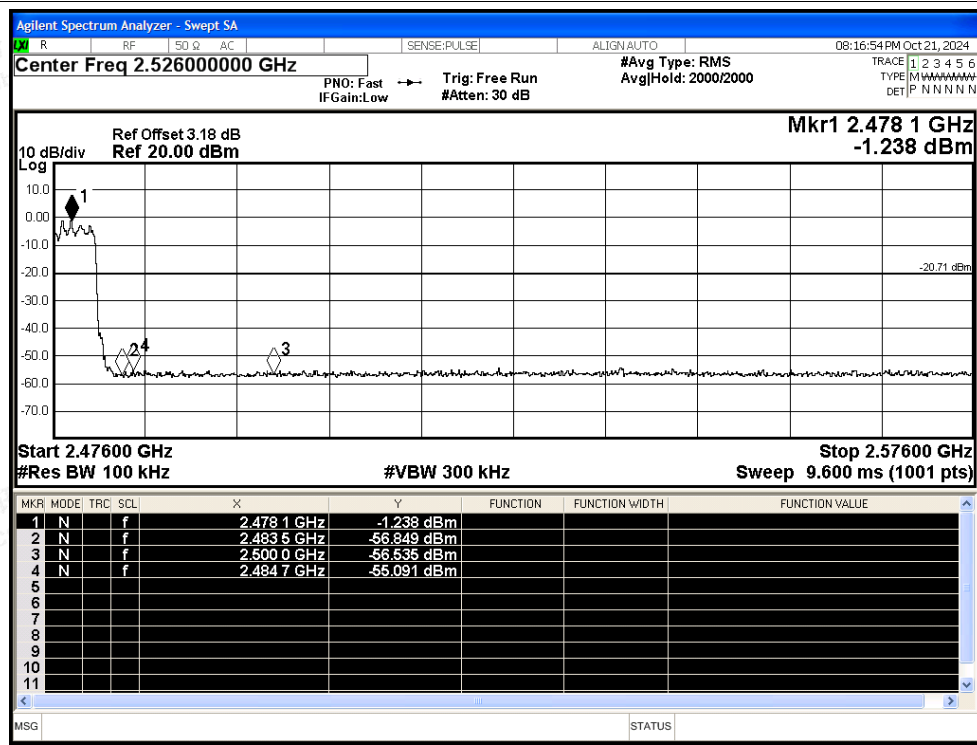

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

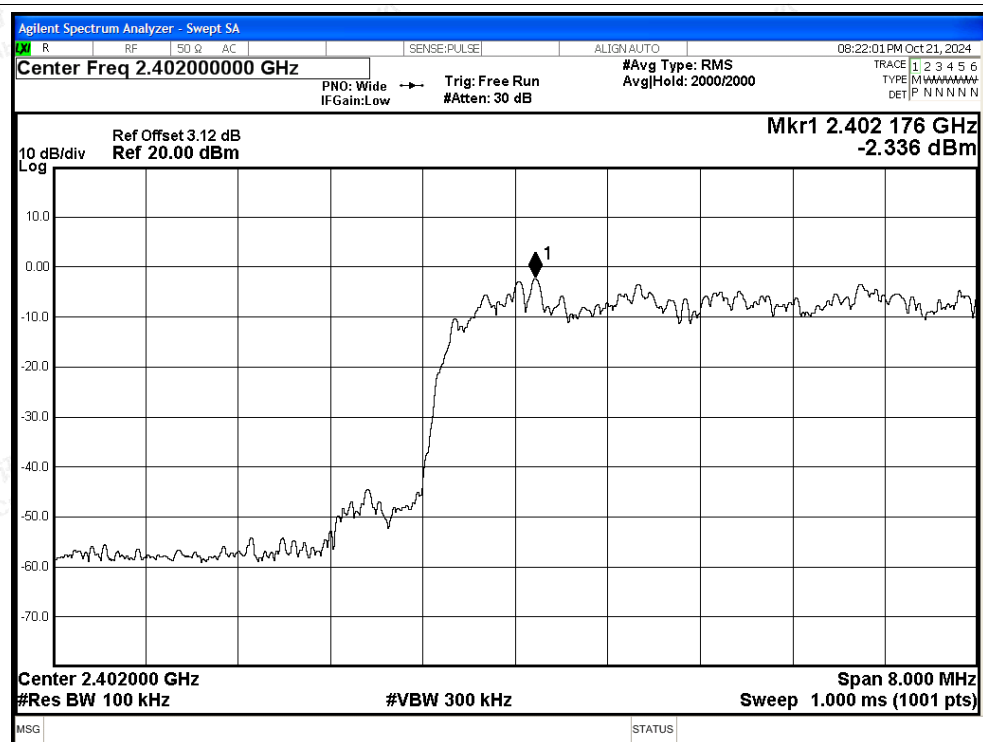

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

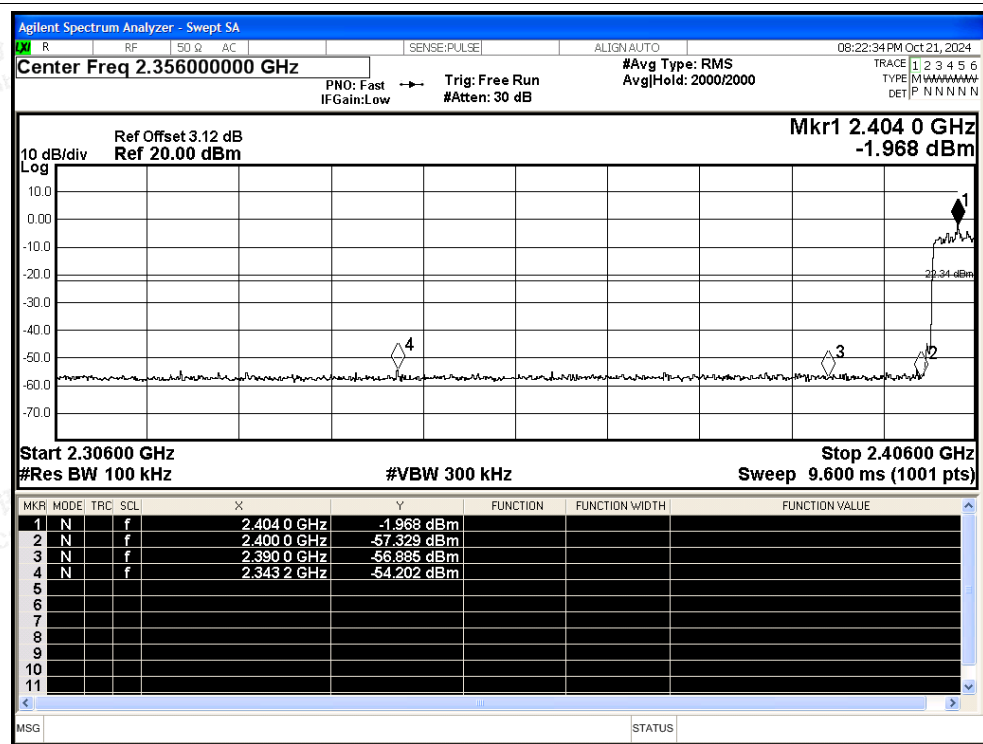




Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

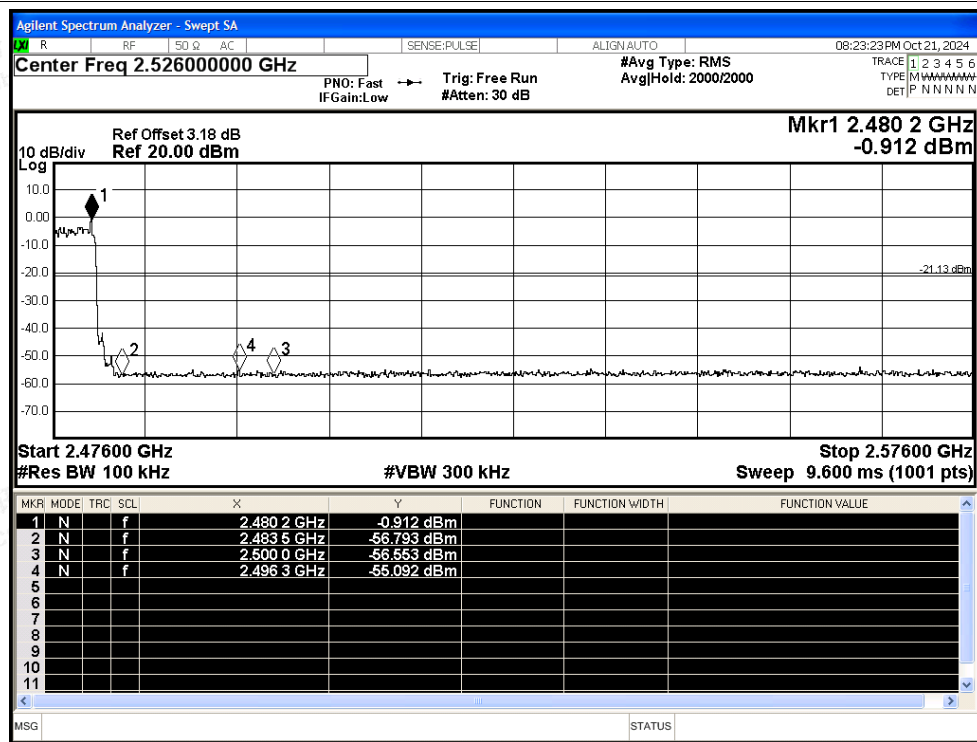

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.7 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-54.35	-20	Pass
NVNT	1-DH5	2441	Ant1	-54.59	-20	Pass
NVNT	1-DH5	2480	Ant1	-52.8	-20	Pass
NVNT	2-DH5	2402	Ant1	-51.77	-20	Pass
NVNT	2-DH5	2441	Ant1	-51.15	-20	Pass
NVNT	2-DH5	2480	Ant1	-53.24	-20	Pass
NVNT	3-DH5	2402	Ant1	-51.11	-20	Pass
NVNT	3-DH5	2441	Ant1	-52.4	-20	Pass
NVNT	3-DH5	2480	Ant1	-50.99	-20	Pass






Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

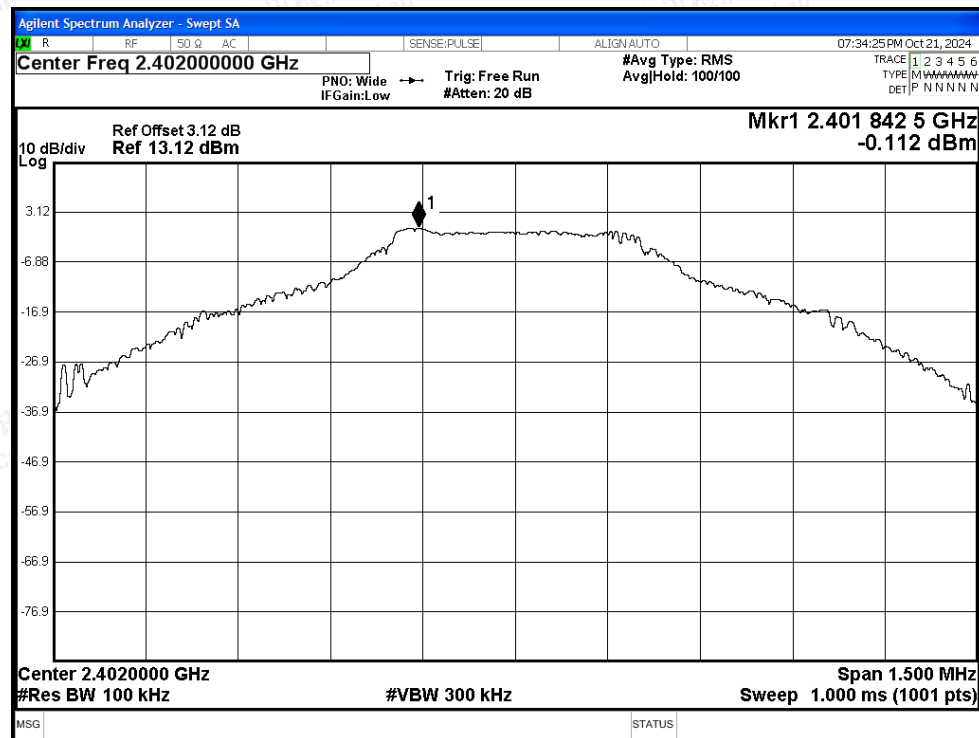


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

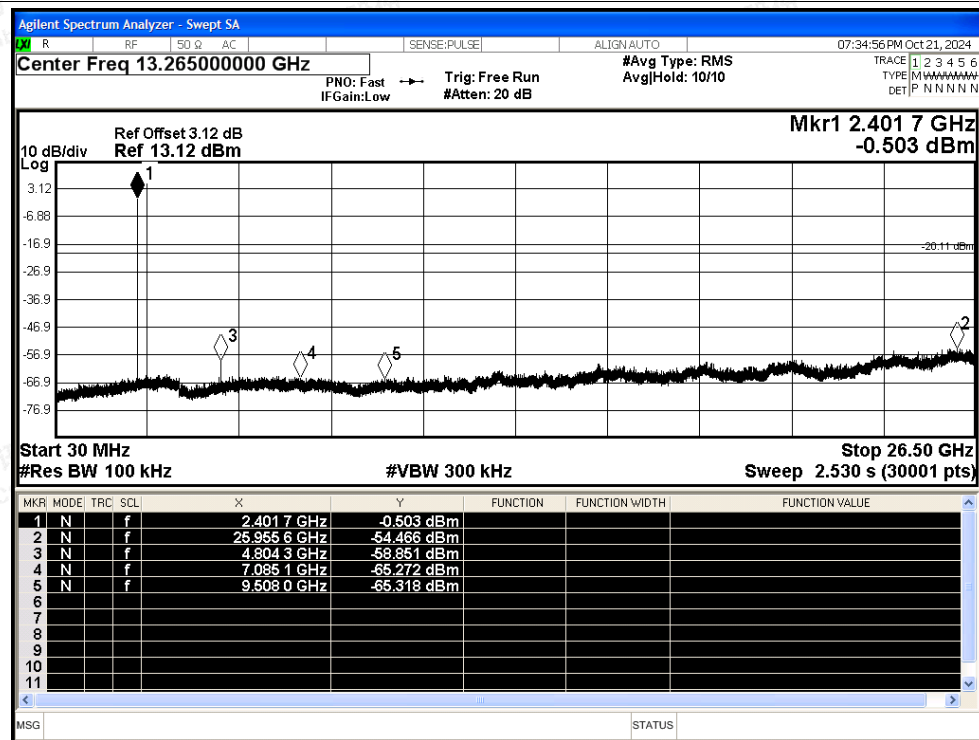




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

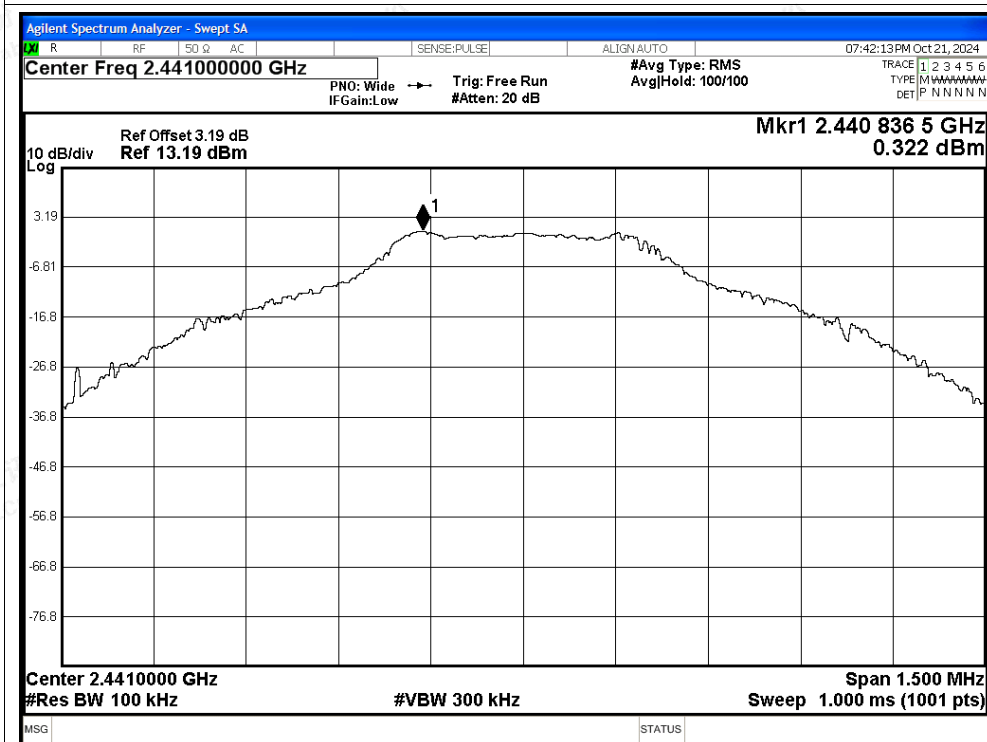

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

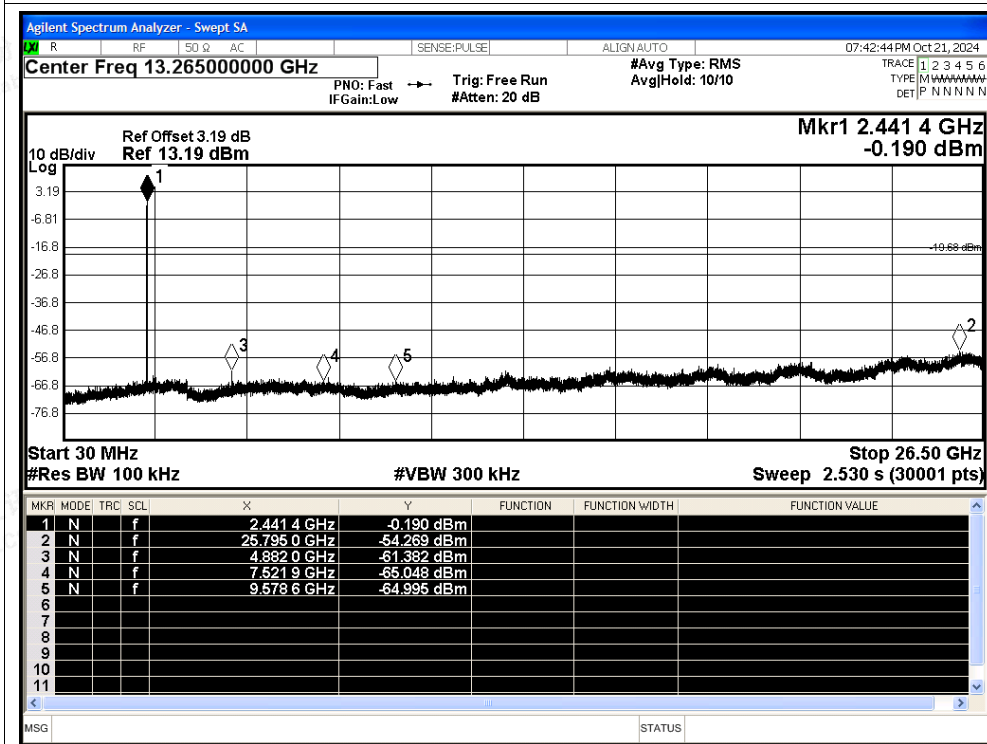

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

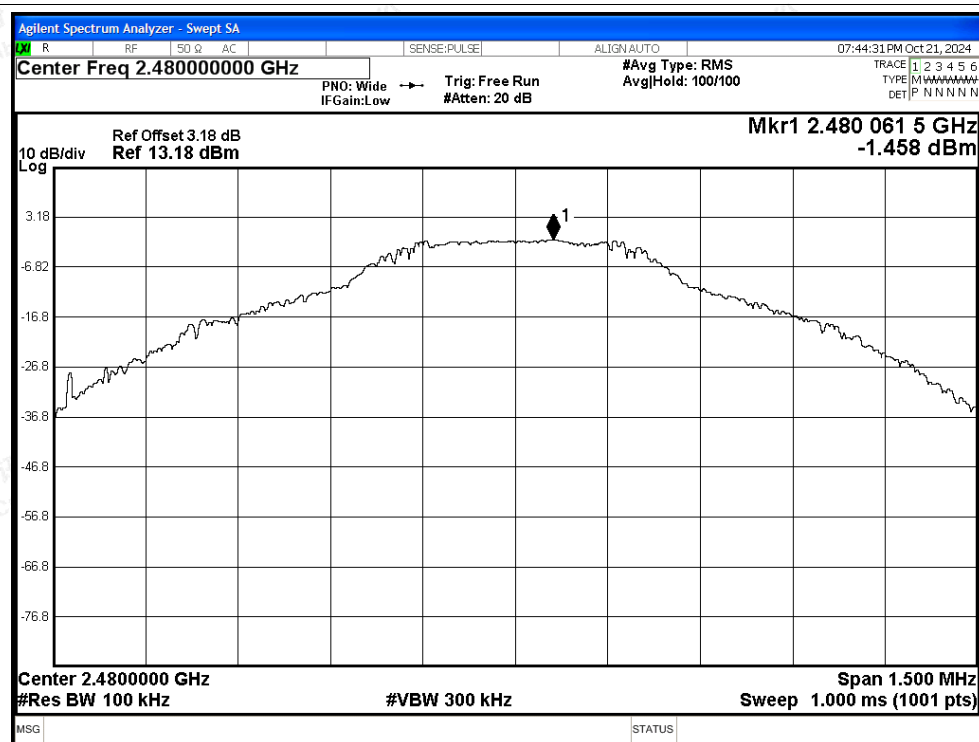


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

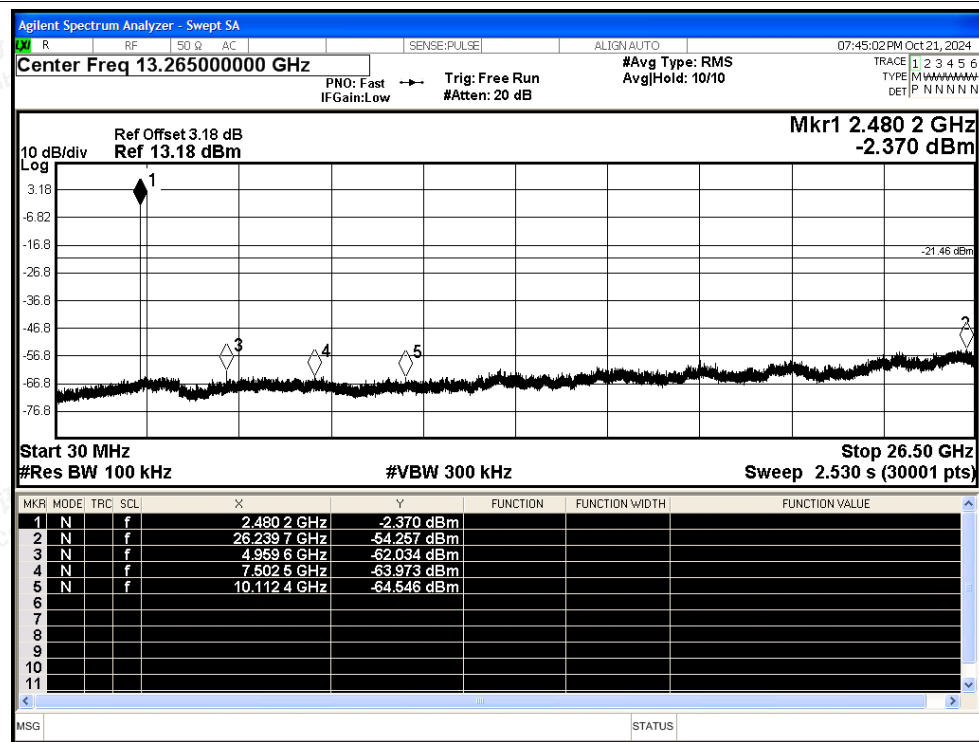




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

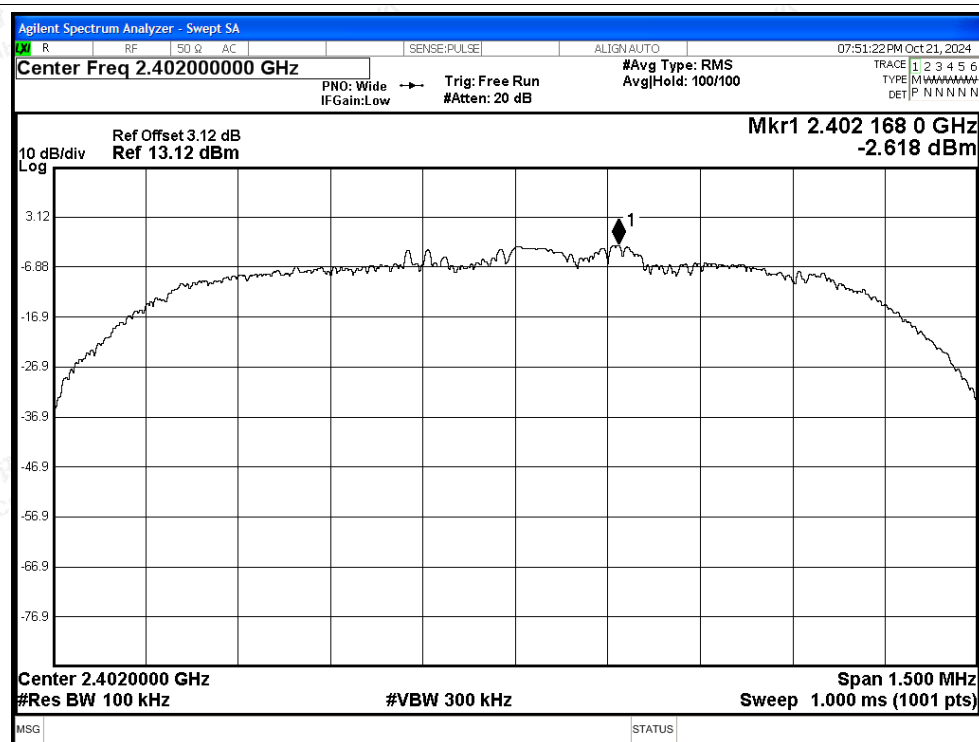


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

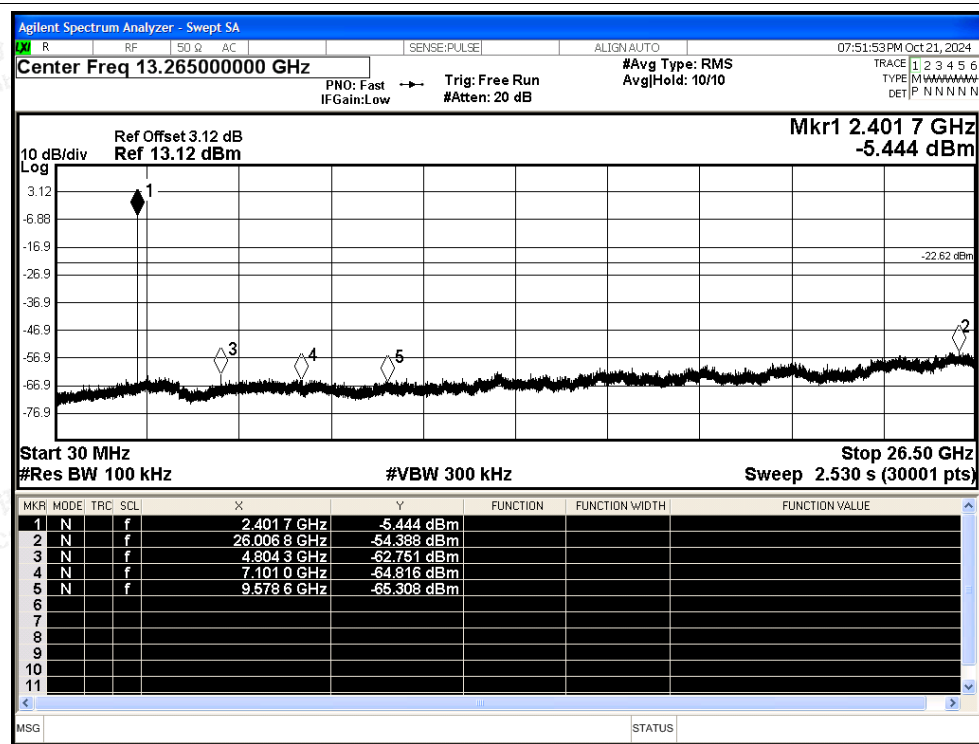




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

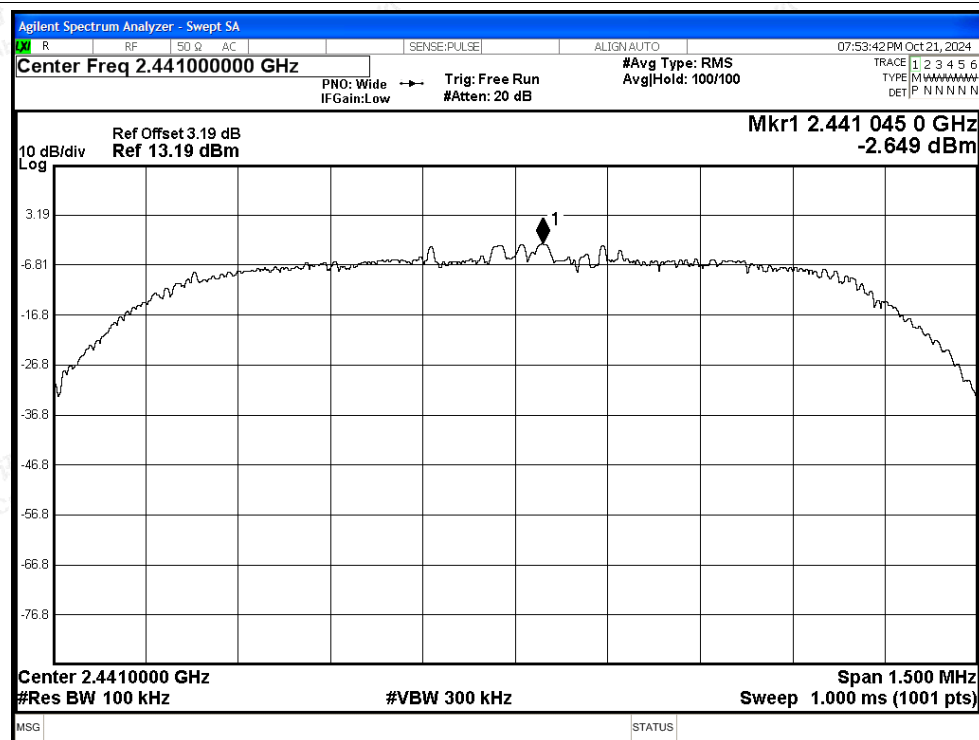


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

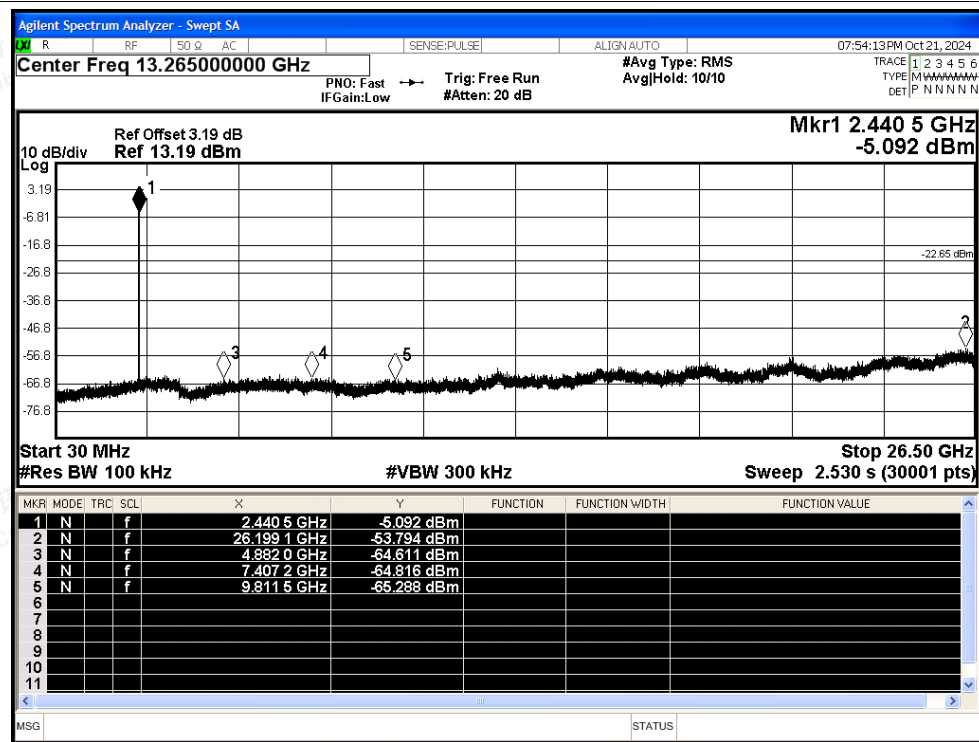




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

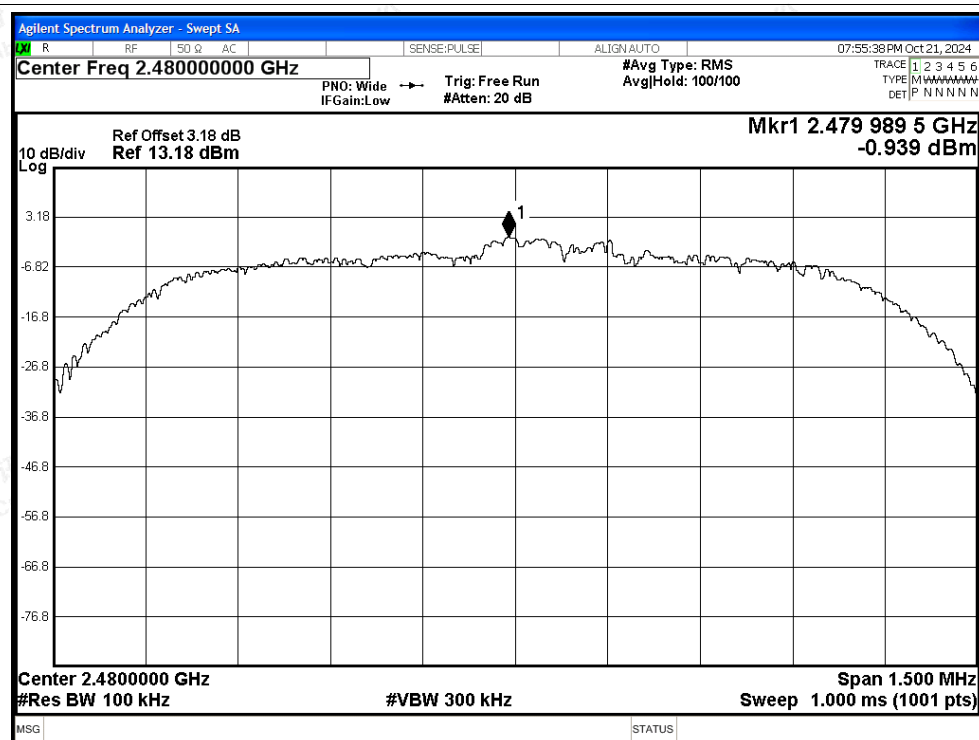


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

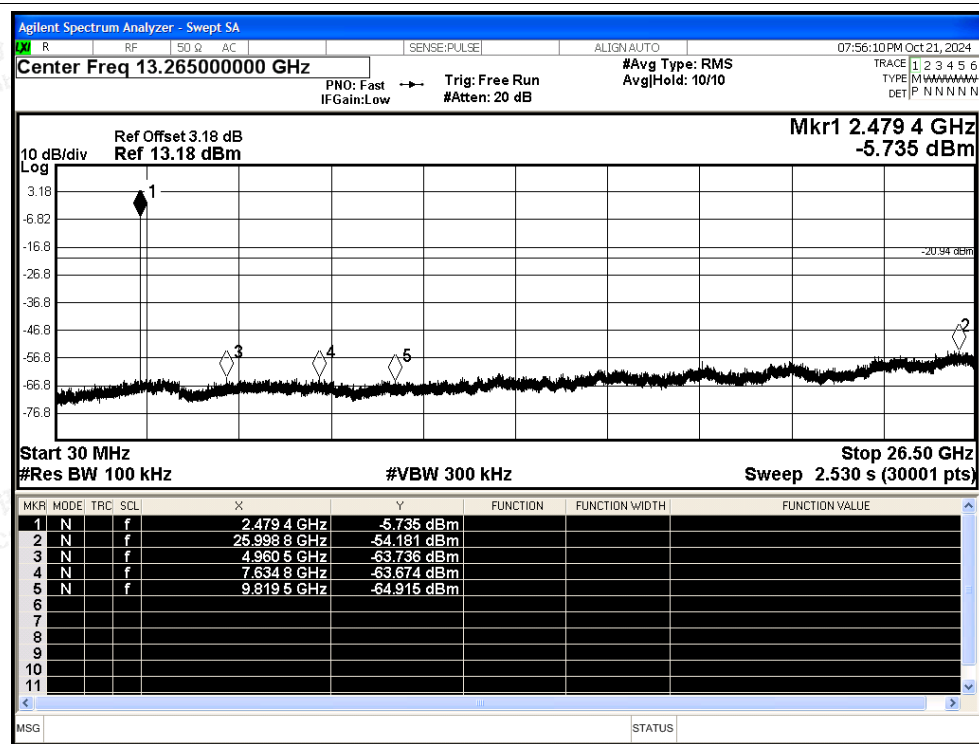




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

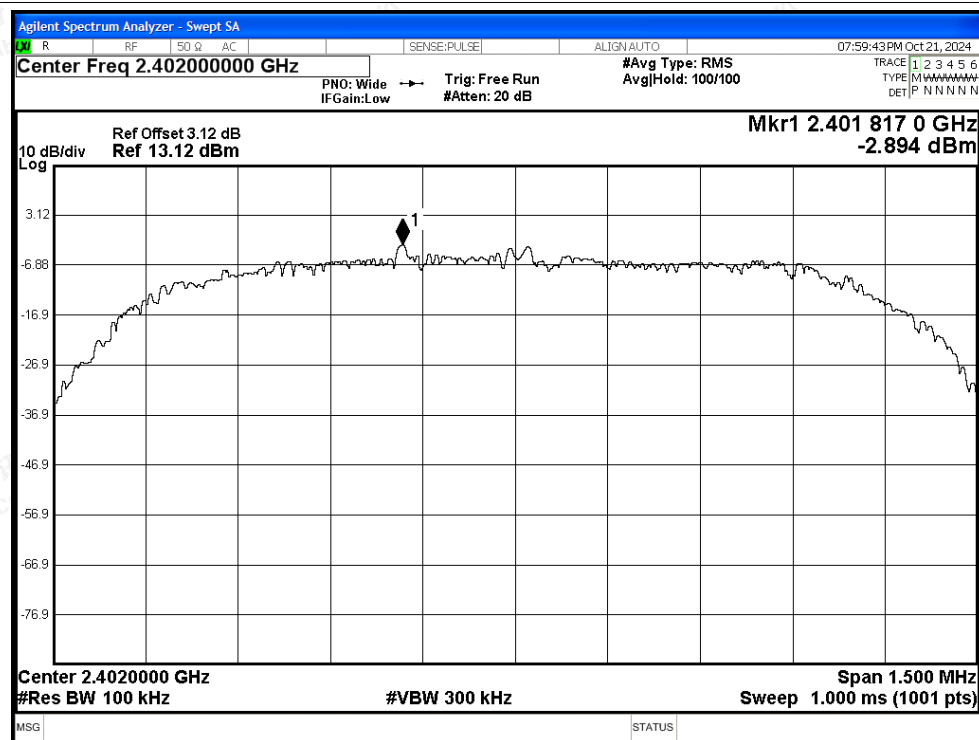


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

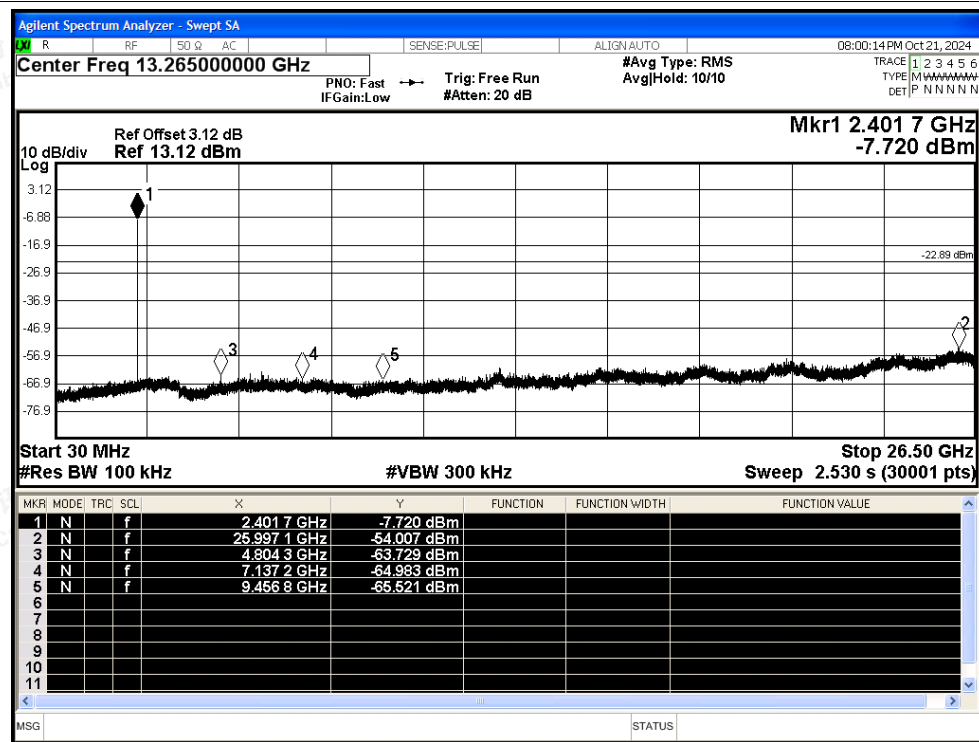




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

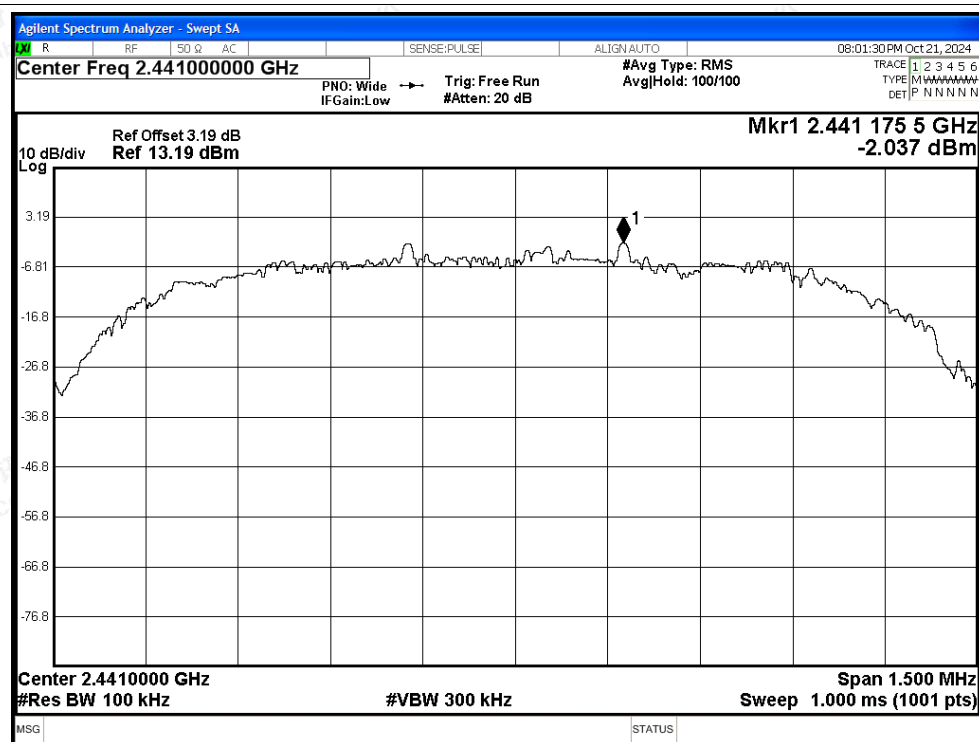


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

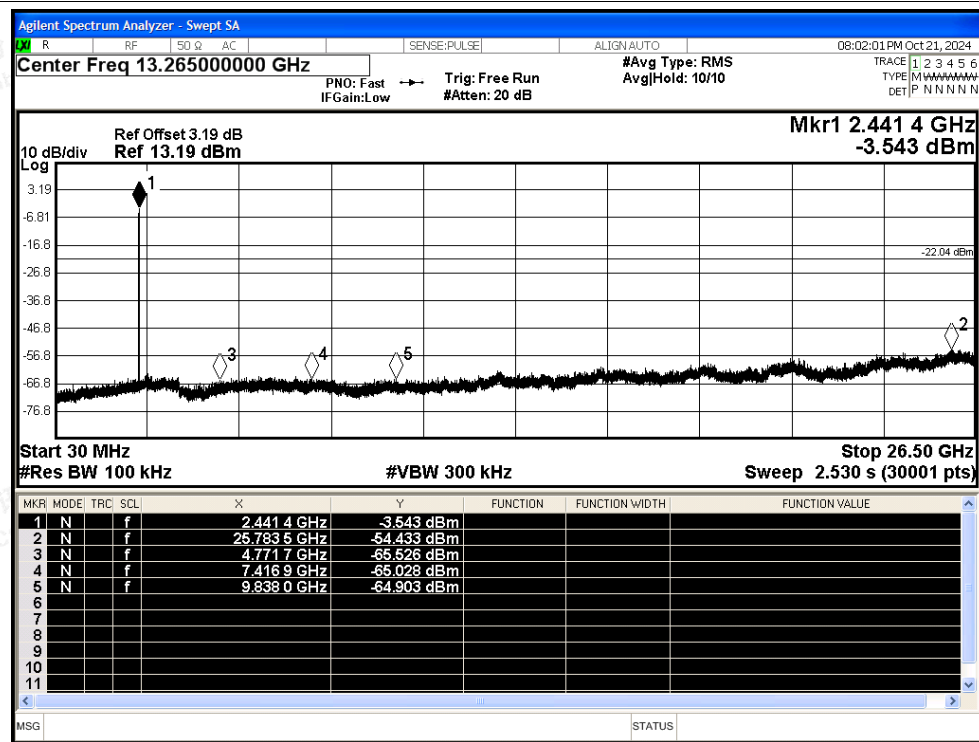




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

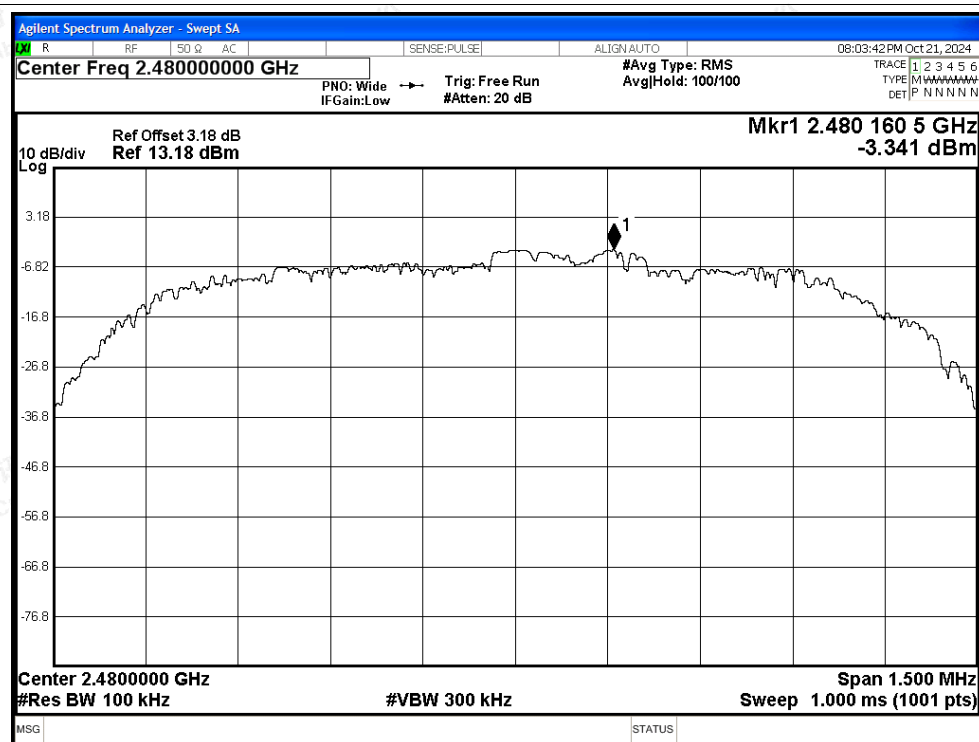

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

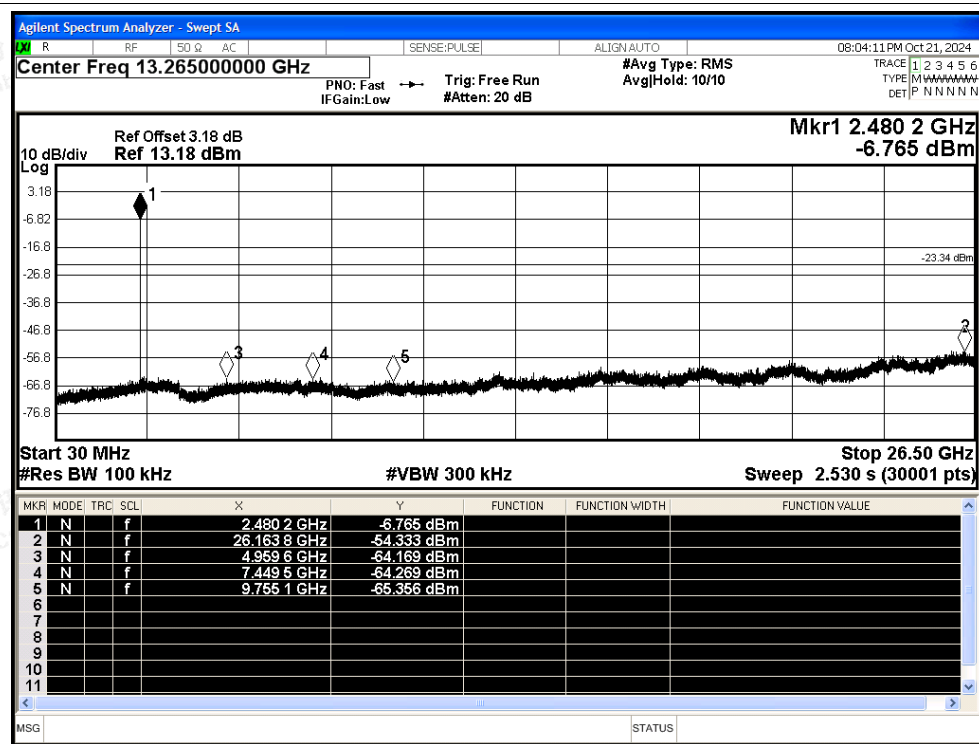



A.8 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	77.63	1.1	0.34
NVNT	1-DH5	2441	Ant1	77.63	1.1	0.34
NVNT	1-DH5	2480	Ant1	77.6	1.1	0.34
NVNT	2-DH5	2402	Ant1	77.28	1.12	0.35
NVNT	2-DH5	2441	Ant1	77.28	1.12	0.35
NVNT	2-DH5	2480	Ant1	77.28	1.12	0.35
NVNT	3-DH5	2402	Ant1	77.28	1.12	0.35
NVNT	3-DH5	2441	Ant1	77.28	1.12	0.35
NVNT	3-DH5	2480	Ant1	77.23	1.12	0.35




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

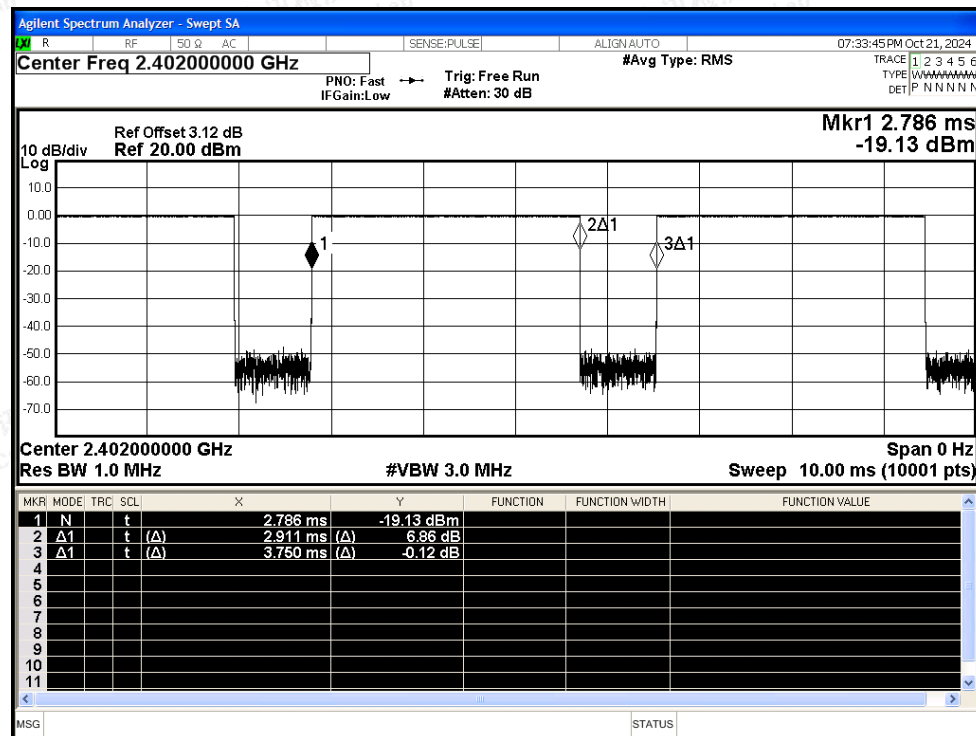


Duty Cycle NVNT 1-DH5 2441MHz Ant1

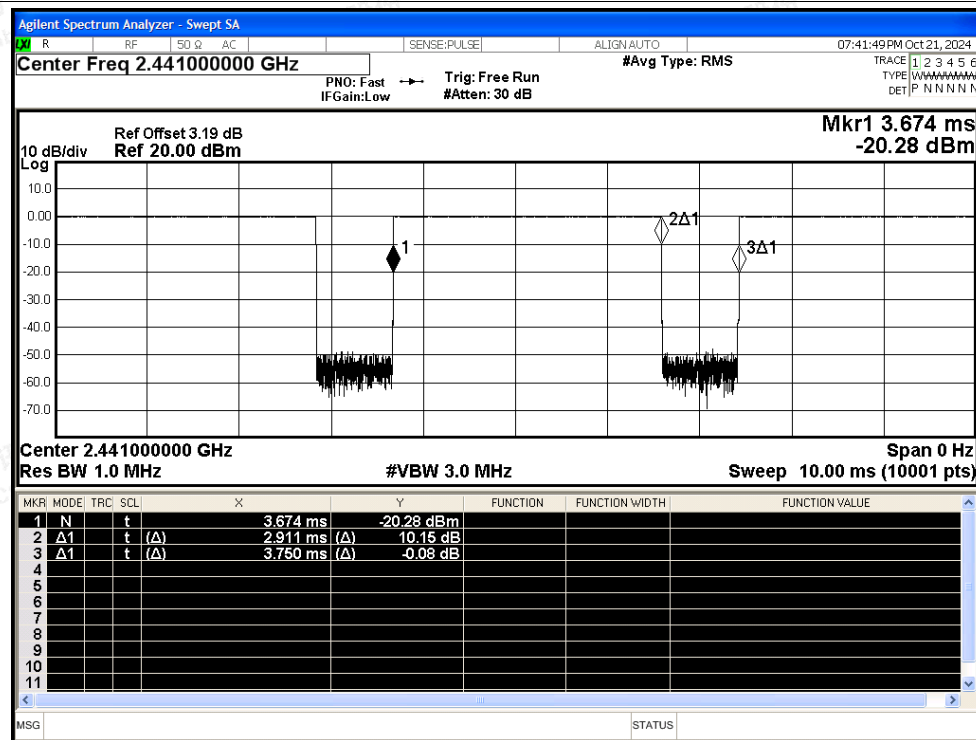




Duty Cycle NVNT 1-DH5 2480MHz Ant1

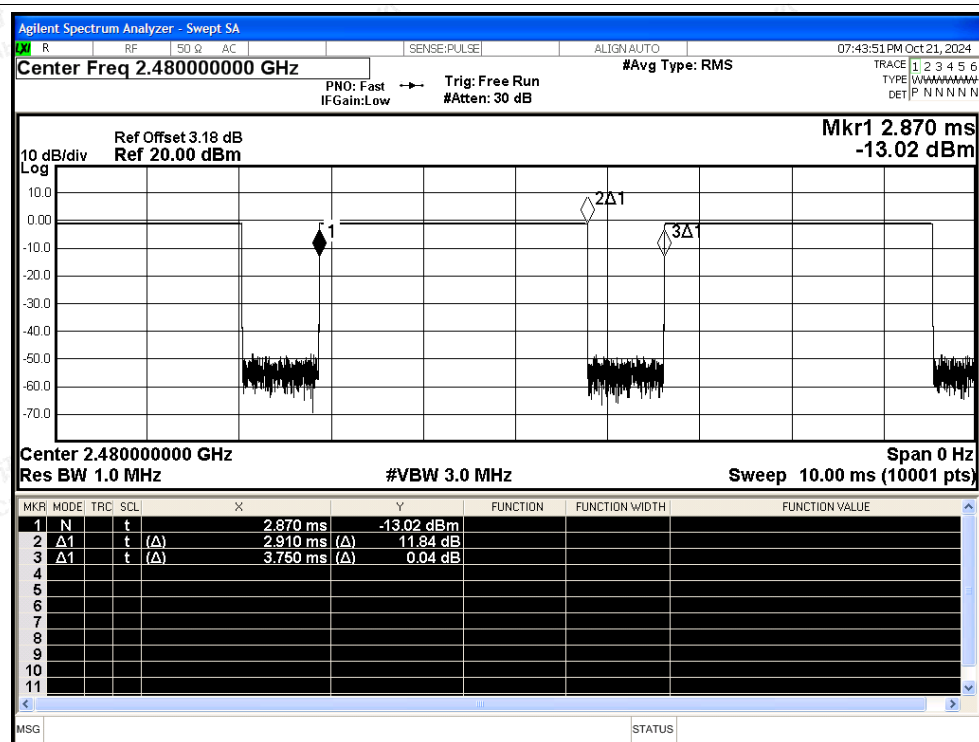


Duty Cycle NVNT 2-DH5 2402MHz Ant1

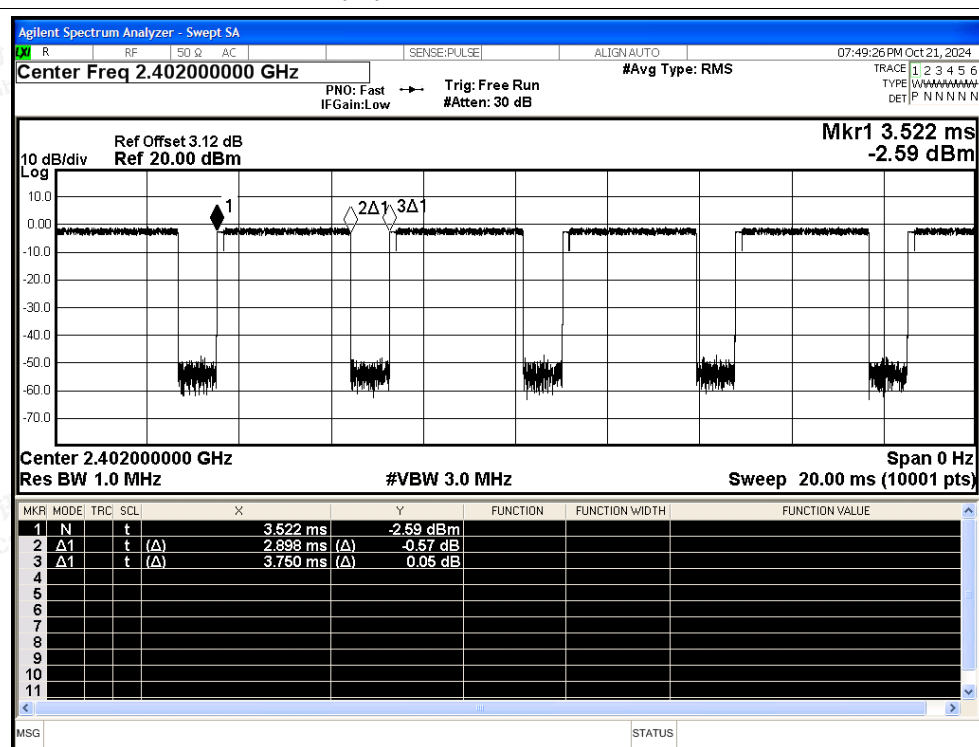




Duty Cycle NVNT 2-DH5 2441MHz Ant1

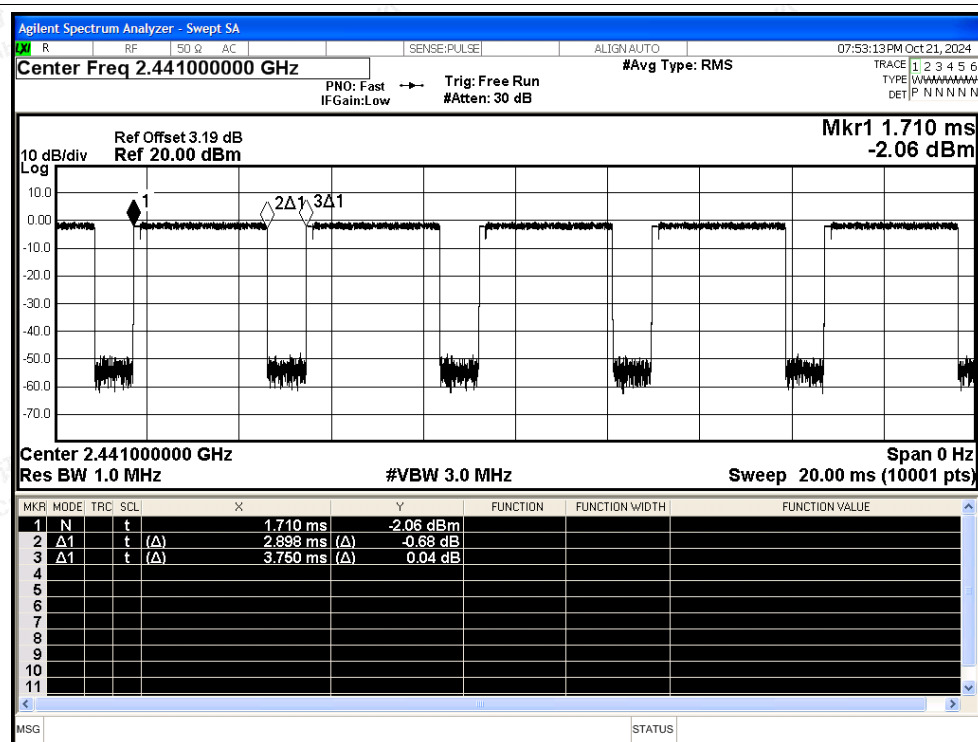


Duty Cycle NVNT 2-DH5 2480MHz Ant1

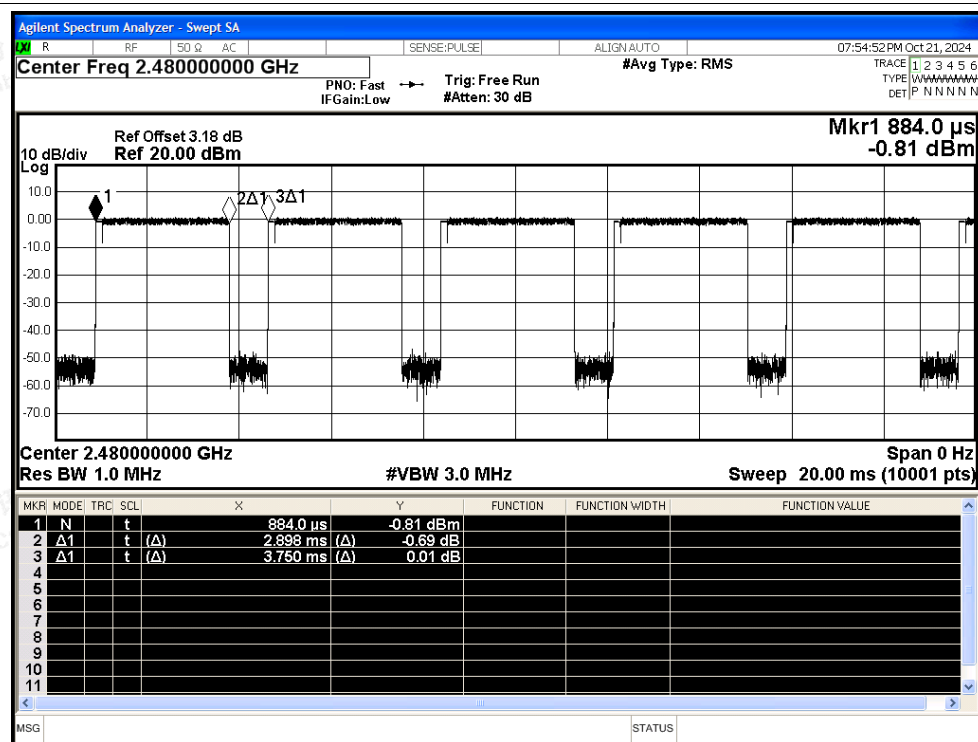





Duty Cycle NVNT 3-DH5 2402MHz Ant1

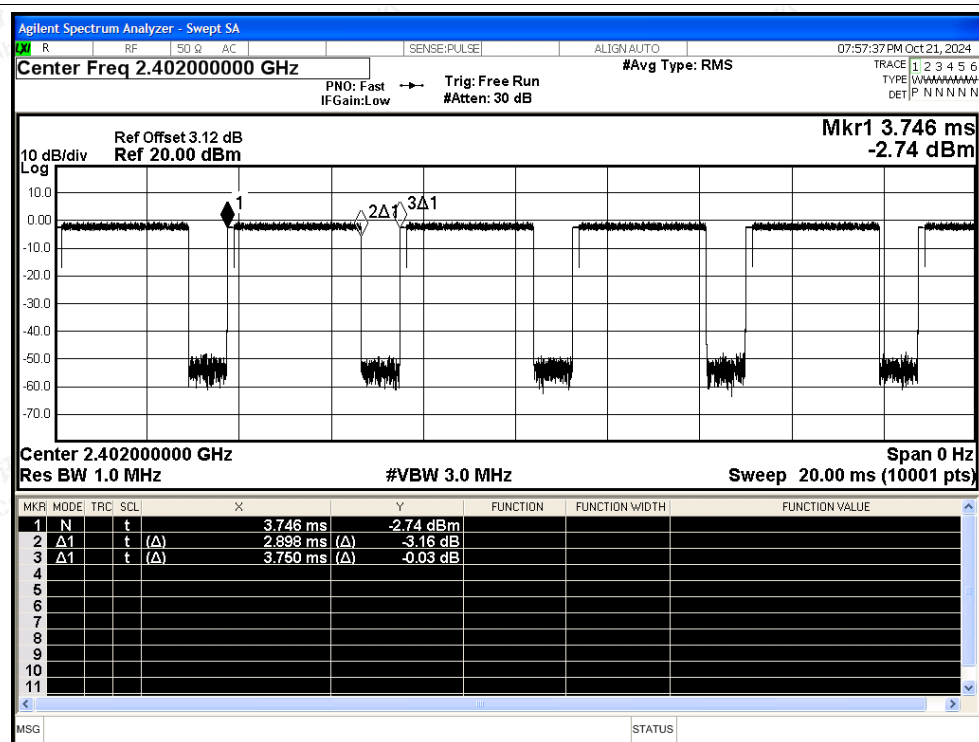

Duty Cycle NVNT 3-DH5 2441MHz Ant1

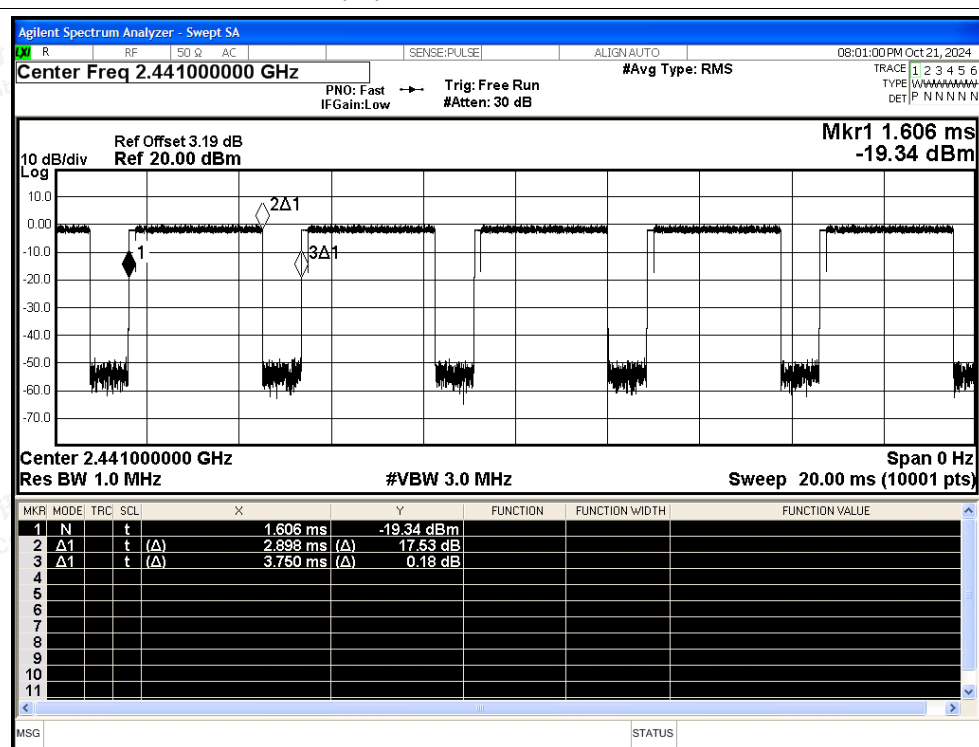

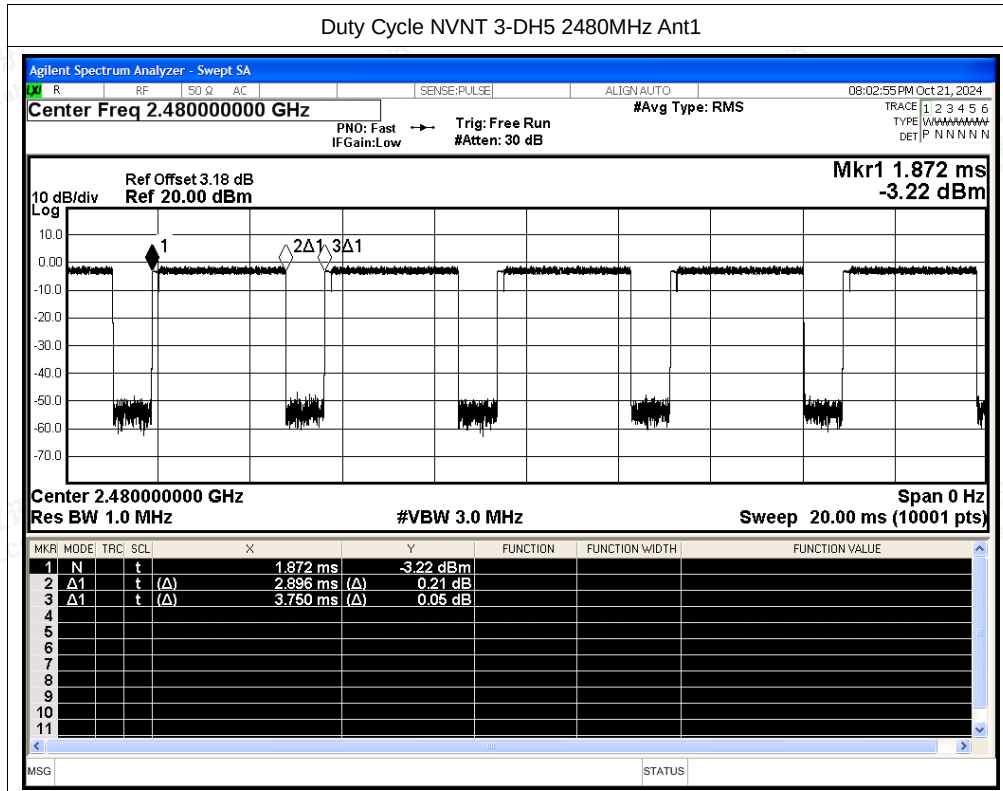



A.9 Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-49.12	2.06	-	48.2	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-57.56	2.06	1.1	40.86	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2385.936	-46.68	2.06	-	50.61	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2380.656	-56.52	2.06	1.1	41.87	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-47.56	2.06	-	49.73	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-57.32	2.06	1.1	41.07	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-48.83	2.06	-	48.46	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-56.56	2.06	1.1	41.83	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2485.024	-46.27	2.06	-	51.05	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2485.936	-56.01	2.06	1.1	42.41	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-48.64	2.06	-	48.65	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-56.96	2.06	1.1	41.43	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-48.88	2.06	-	48.41	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-57.87	2.06	1.12	40.54	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2345.904	-46.21	2.06	-	51.08	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2344.56	-56.41	2.06	1.12	42	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-48.24	2.06	-	49.08	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-57.83	2.06	1.12	40.61	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-48.15	2.06	-	49.14	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-56.95	2.06	1.12	41.46	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2492.152	-45.78	2.06	-	51.51	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2499.664	-56.04	2.06	1.12	42.37	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-49.62	2.06	-	47.67	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-56.81	2.06	1.12	41.6	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-49.23	2.06	-	48.09	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-58.1	2.06	1.12	40.34	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2346.768	-46.68	2.06	-	50.61	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2374.608	-56.5	2.06	1.12	41.91	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-49.21	2.06	-	48.08	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-57.24	2.06	1.12	41.17	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-47.13	2.06	-	50.16	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-56.53	2.06	1.12	41.88	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2486.224	-45.22	2.06	-	52.1	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2485.72	-56.11	2.06	1.12	42.33	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-49.41	2.06	-	47.88	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-56.76	2.06	1.12	41.65	Average	54	Pass






Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

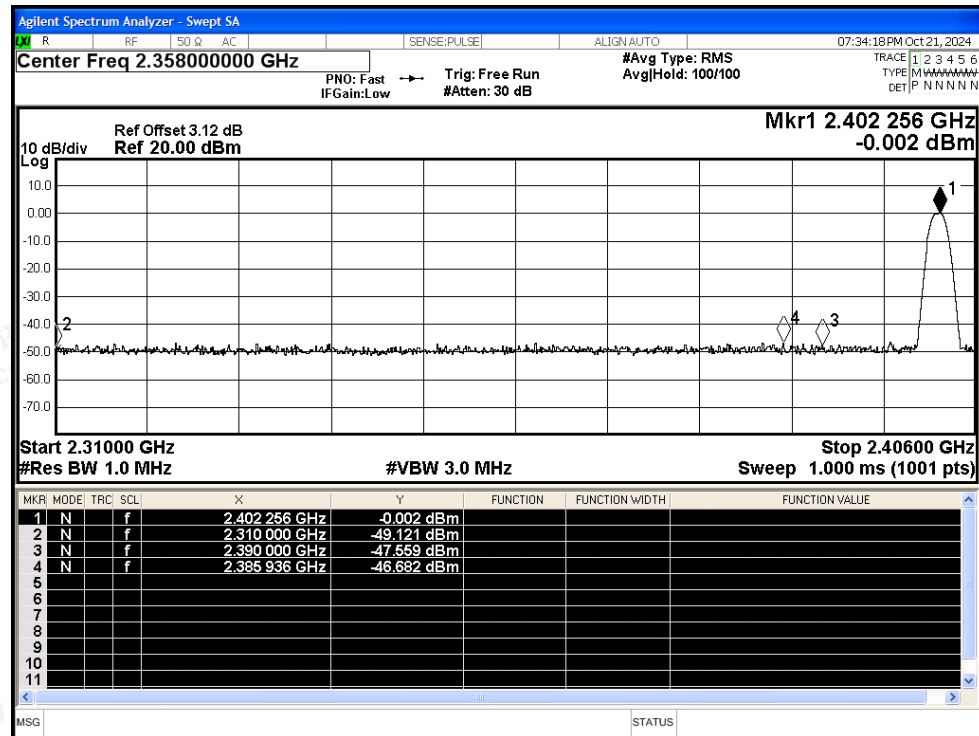


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

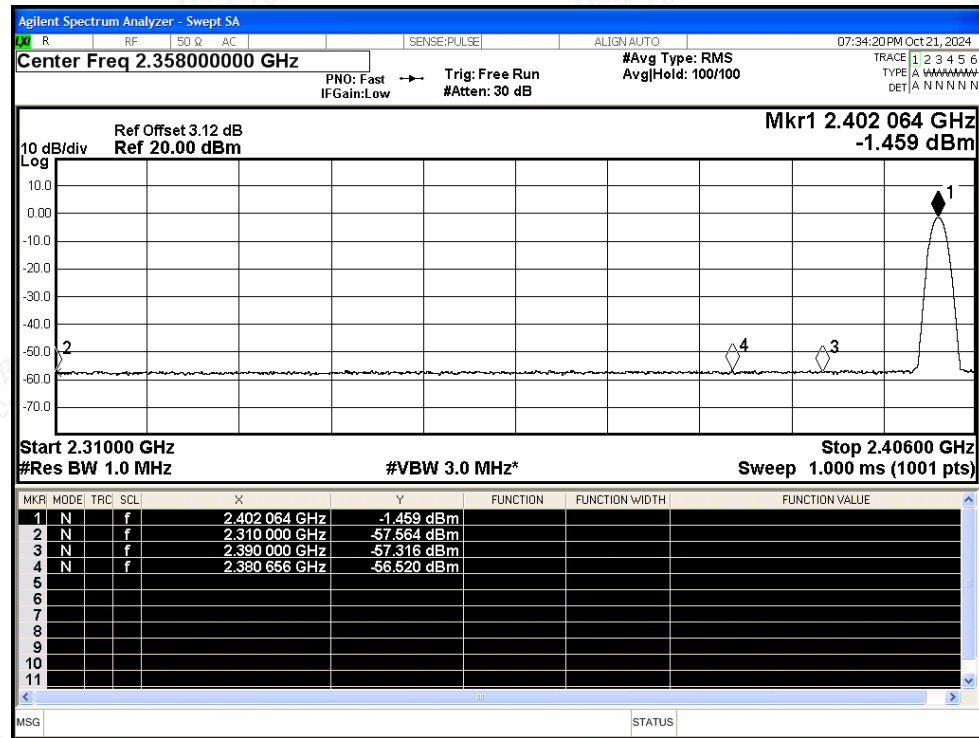




Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

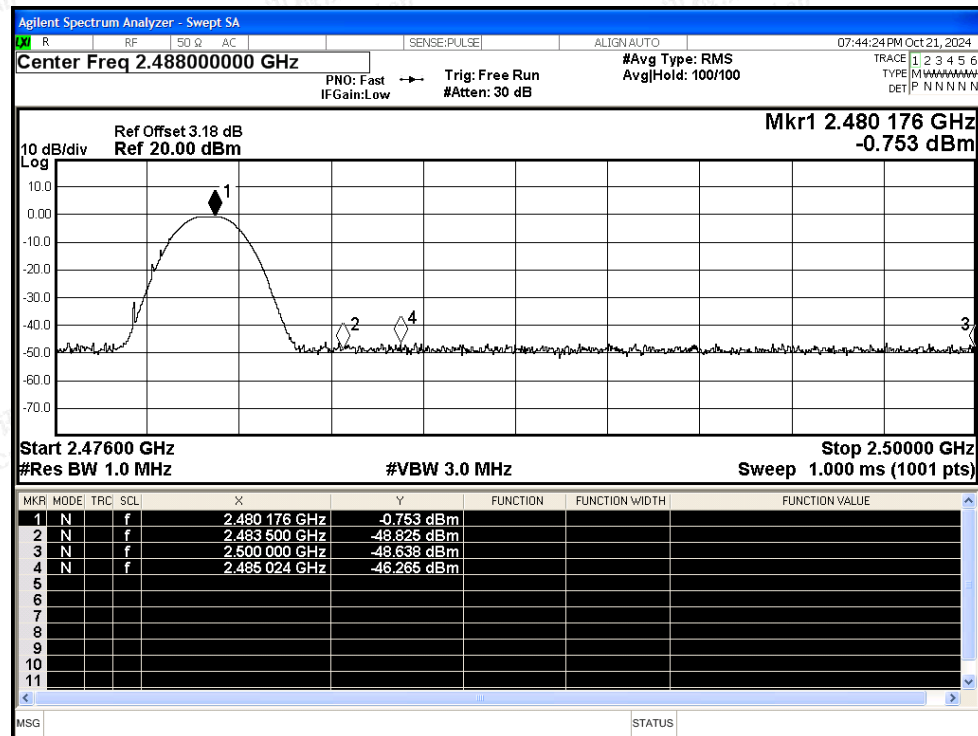


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

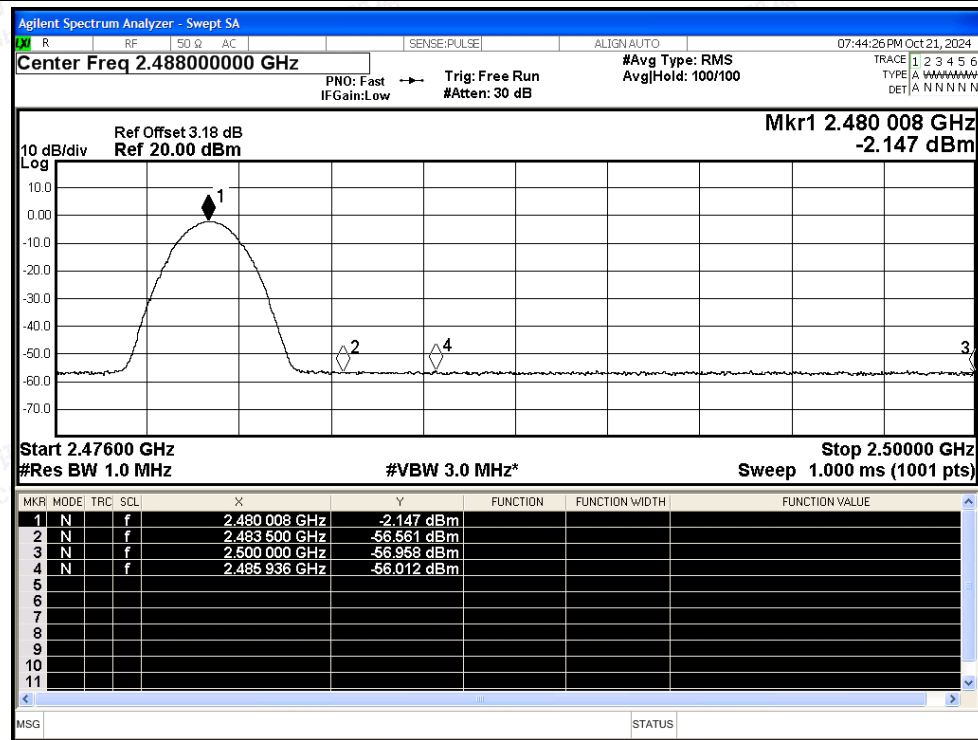




Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

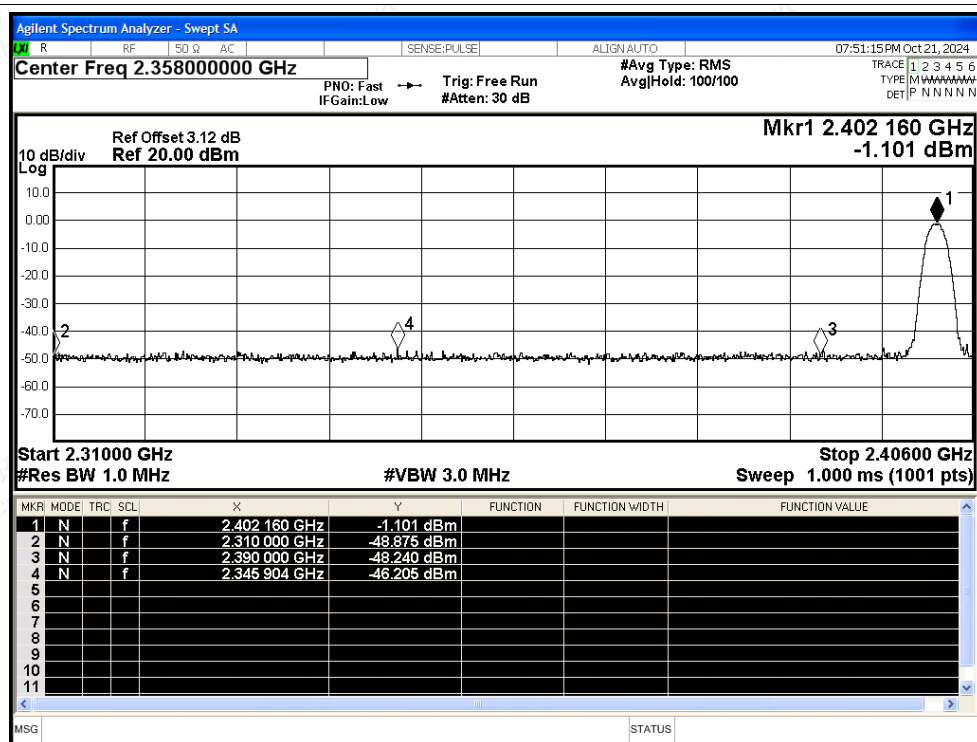


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

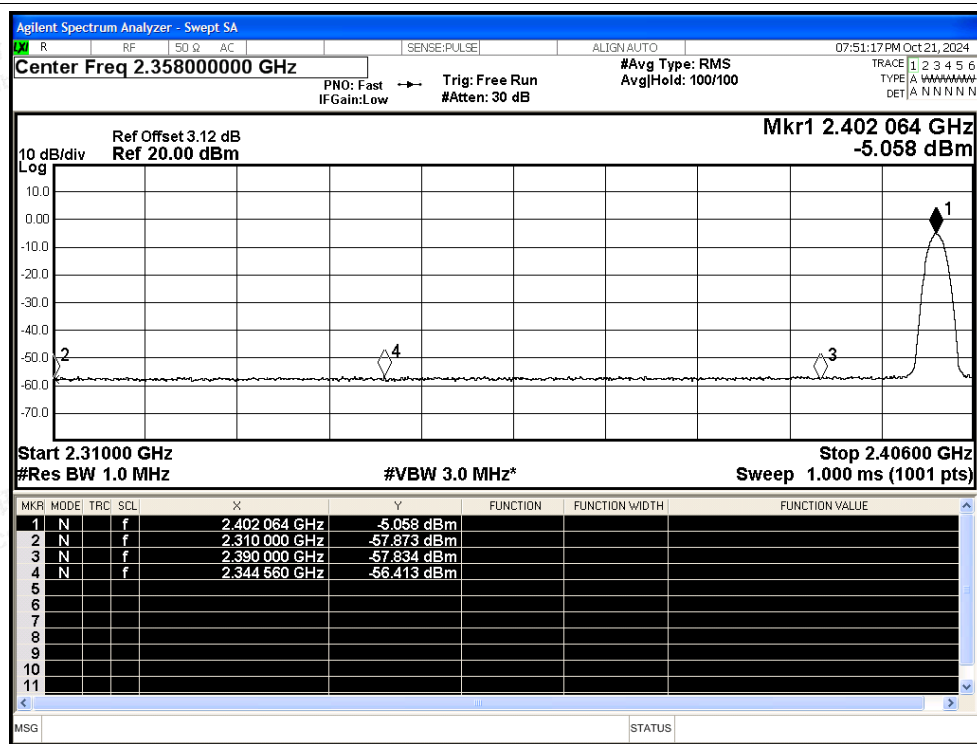




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

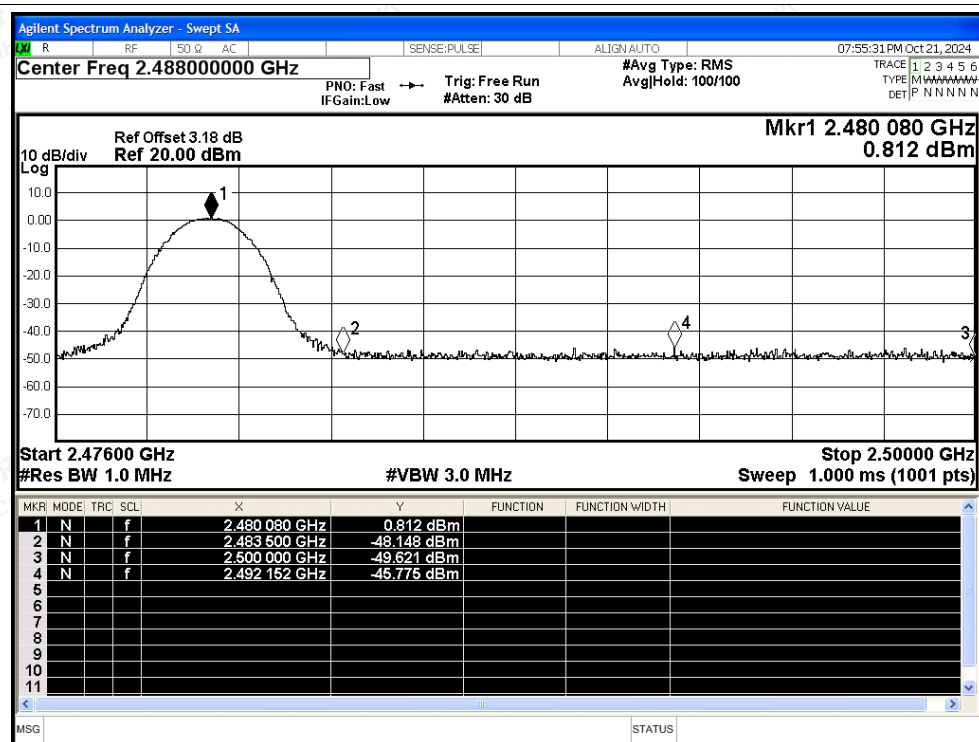


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

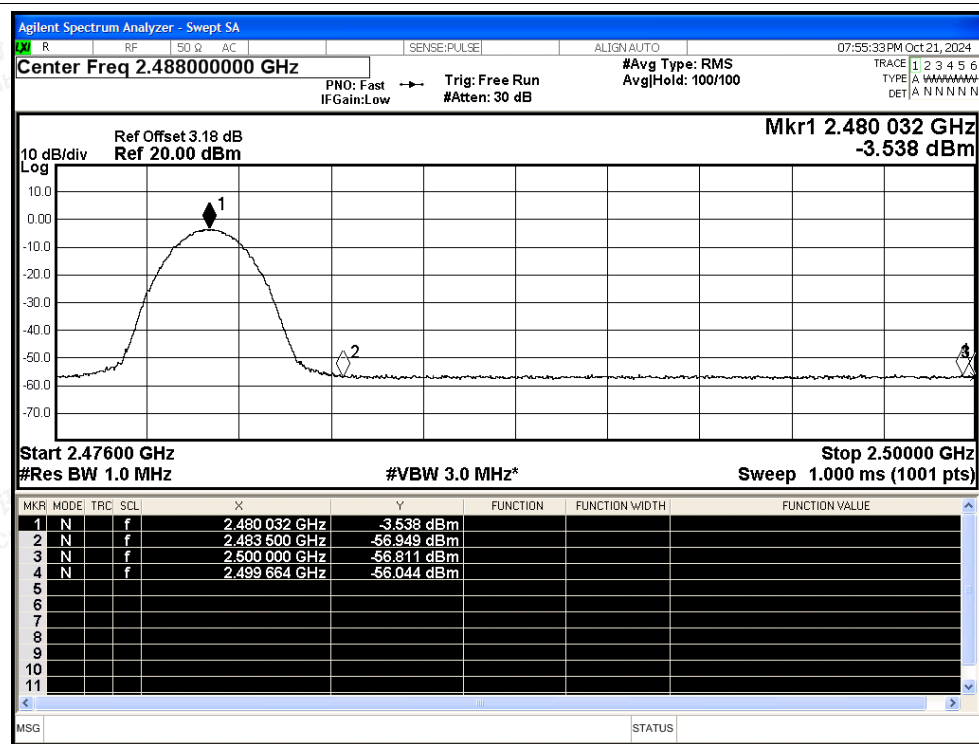




Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

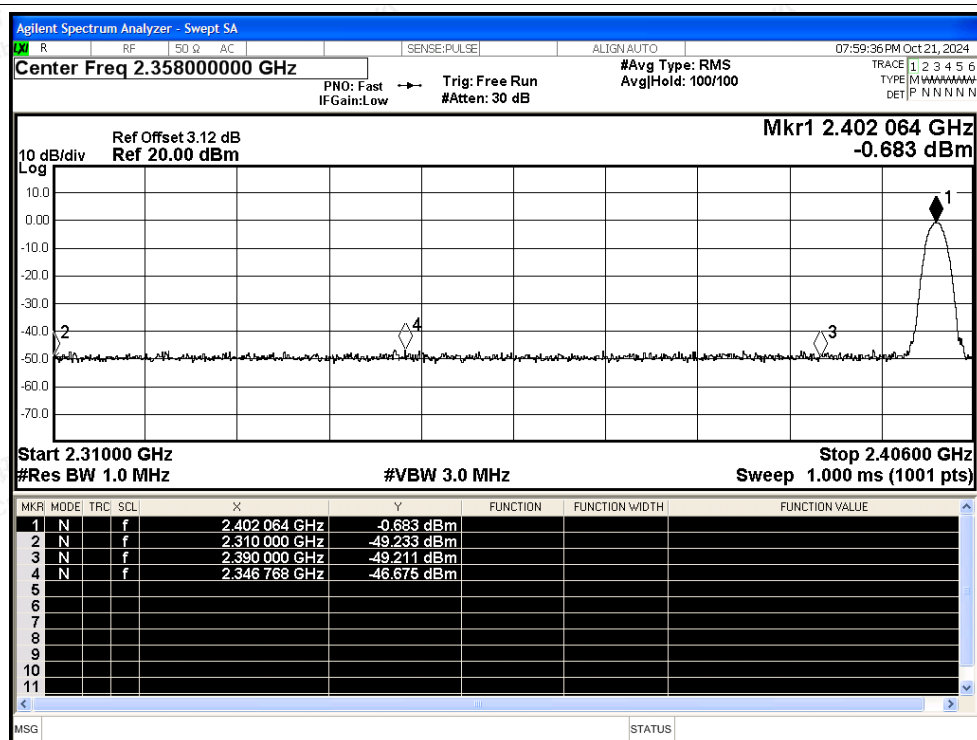

Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

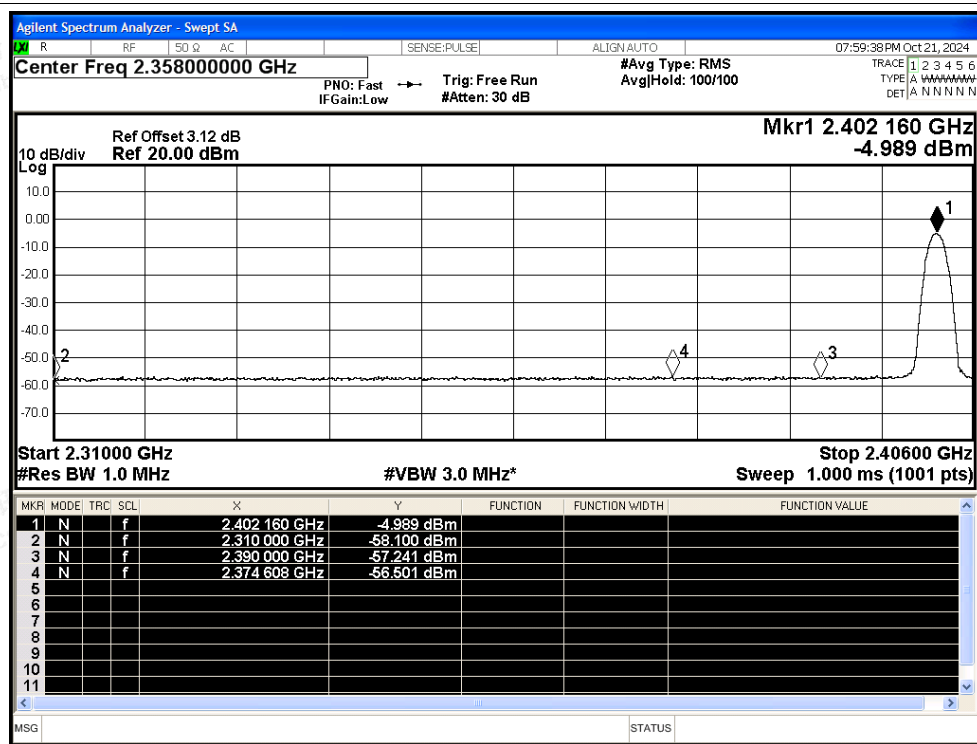

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

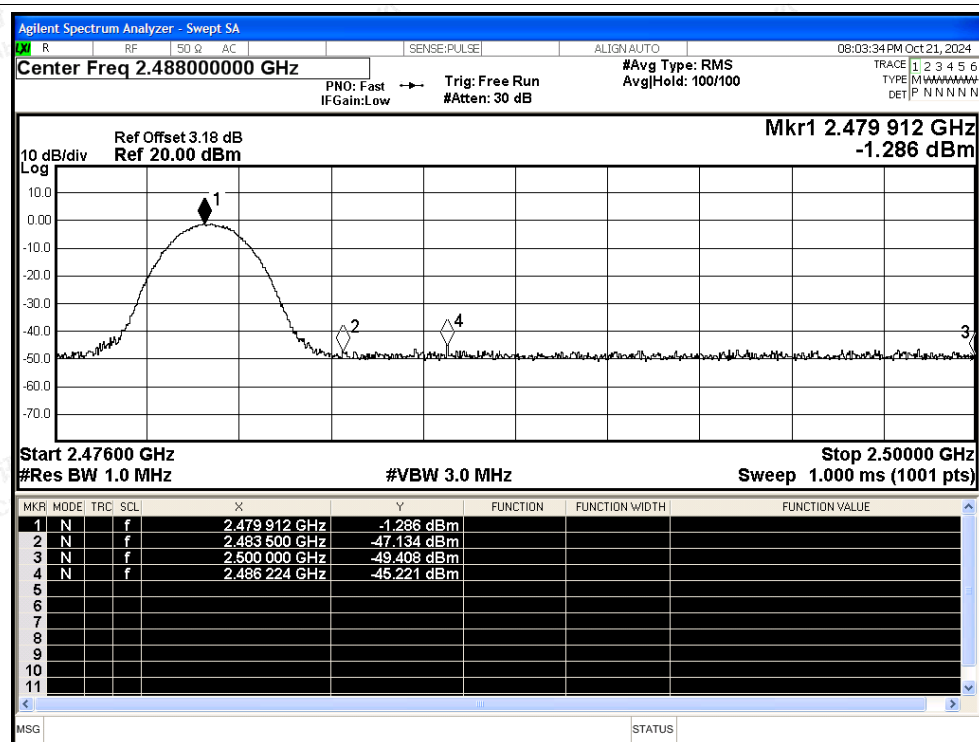

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

