



FCC TEST REPORT

FCC ID: 2BLP4-K04

On Behalf of

Shenzhen Yikexin Electronics Co., Ltd.

Bluetooth headphones

Model No.: K04

Prepared for : Shenzhen Yikexin Electronics Co., Ltd.
Address : 4th Floor, Building 8, Huike Industrial Park, No. 1 Gongye 2nd Road,
ShilongCommunity, Shiyan Street, Bao'an District, Shenzhen, China


Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2508012-C01-R07
Date of Receipt : August 6, 2025
Date of Test : August 7, 2025- August 15, 2025
Date of Report : August 15, 2025
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators.....	8
2.5. Test Mode Description	8
2.6. Software test version and power setting information	9
2.7. Test Conditions.....	10
2.8. Test Facility	10
2.9. Measurement Uncertainty	10
2.10. Test Equipment List.....	11
3. Maximum Peak Output Power	12
3.1. Limit.....	12
3.2. Test Procedure	12
3.3. Test Setup	12
3.4. Test Result.....	12
4. Bandwidth.....	13
4.1. Limit.....	13
4.2. Test Procedure	13
4.3. Test Result.....	13
5. Carrier Frequency Separation.....	24
5.1. Limit.....	24
5.2. Test Procedure	24
5.3. Test Result.....	24
6. Number Of Hopping Channel.....	26
6.1. Limit.....	26
6.2. Test Procedure	26
6.3. Test Result.....	26
7. Dwell Time	28
7.1. Test limit.....	28
7.2. Test Procedure	28
7.3. Test Result.....	28
8. Out-of-band Emissions	38
8.1. Test Limits	38
8.2. Test Procedure	38
8.3. Test Setup	38
8.4. Test Results	38
9. Radiated Emissions	60
9.1. Limit.....	60
9.2. Block Diagram of Test setup	61

9.3. Test Procedure	62
9.4. Test Results	62
10. Band Edge Test	70
10.1. Block Diagram of Test Setup	70
10.2. Test Limit	70
10.3. Test Procedure	70
10.4. Test Results	71
11. Power Line Conducted Emissions	74
11.1. Block Diagram of Test Setup	74
11.2. Limit	74
11.3. Test Procedure	74
11.4. Test Results	75
12. Antenna Requirements	78
12.1. Limit	78
12.2. Result	78
13. Photos of test setup	79
14. Photos of EUT	79

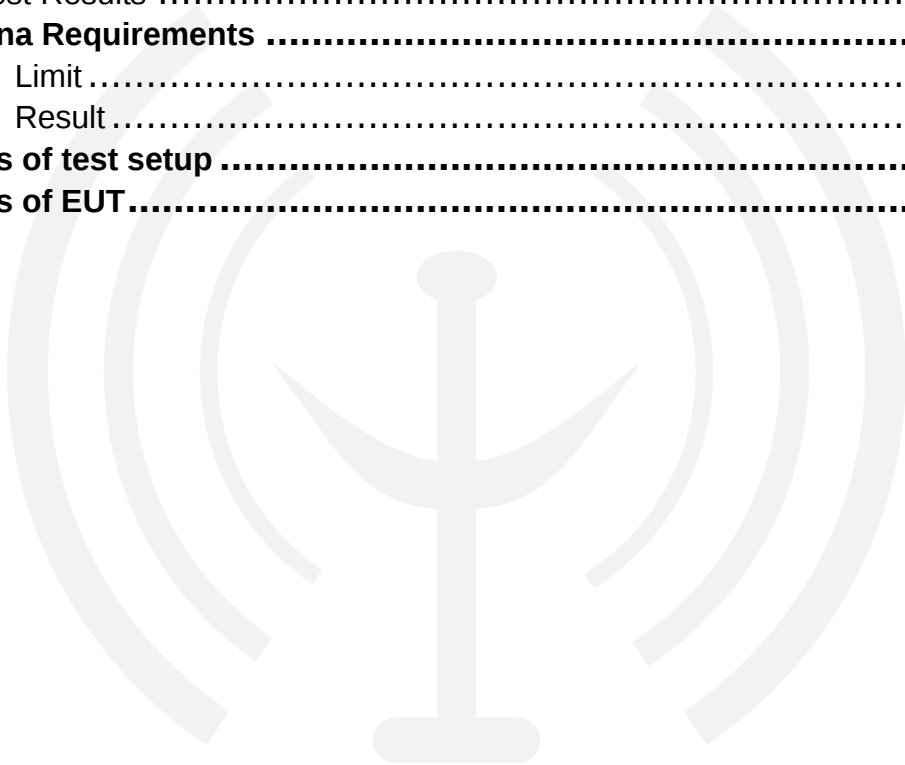

TEST REPORT DECLARATION

Applicant : Shenzhen Yikexin Electronics Co., Ltd.
Address : 4th Floor, Building 8, Huike Industrial Park, No. 1 Gongye 2nd Road,
ShilongCommunity, Shiyan Street, Bao'an District, Shenzhen, China
Manufacturer : Shenzhen Yikexin Electronics Co., Ltd.
Address : 4th Floor, Building 8, Huike Industrial Park, No. 1 Gongye 2nd Road,
ShilongCommunity, Shiyan Street, Bao'an District, Shenzhen, China
EUT Description : Bluetooth headphones
(A) Model No. : K04
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247,

ANSI C63.10-2013

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....: Jensen Wang
Test Engineer

Jensen Wang
.....

Approved by (name + signature).....: Simple Guan
Project Manager

Simple Guan
.....

Date of issue.....: August 15, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	August 15, 2025	Initial released Issue	Jensen Wang



1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15:15.247(a)(1)	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	P
Out-of-band Emissions	FCC Part 15: 15.247(d)	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	P
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty. 5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.		

2. General Information

2.1. Description of Device (EUT)

Description/PMN : Bluetooth headphones

Model List : K04

Diff : N/A

Test Voltage : DC 3.7V from battery, DC 5V from USB

Radio Technology : Bluetooth V5.0 EDR

Operation frequency : 2402MHz-2480MHz

Modulation : GFSK, $\pi/4$ -DQPSK, 8 DPSK

Channel No. : 79 Channels

Channel Separation : 1MHz

Antenna Type : Internal antenna, Maximum Gain is 1.95 dBi.

Software version : V1.0

Hardware version : V1.0

Intend use environment : Residential, commercial and light industrial environment

Note : Antenna information is provided by applicant.
Testing lab is not responsible for the accuracy of the information.


2.2. Accessories of Device (EUT)

Accessories	: N/A
Manufacturer	: N/A
Model	: N/A
Input	: N/A
Output	: N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	Adapter	Baseus	CCXFK65CC	N/A
2	USB Cable	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators

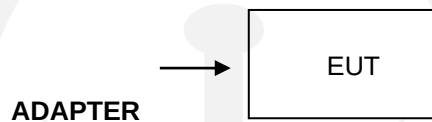

2.5. Test Mode Description

The test software used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
GFSK / Pi/4-DQPSK / 8 DPSK Carrier Tx Mode	CH0	2402
	CH39	2441
	CH78	2480
GFSK / Pi/4-DQPSK / 8 DPSK hopping on Tx Mode	CH0 to CH78	2402 to 2480
GFSK / Pi/4-DQPSK / 8 DPSK hopping off Tx Mode	CH0	2402
	CH39	2441
	CH78	2480

2.6. Software test version and power setting information

Software testing version	bt_tool_v1.1.4.exe		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
GFSK, Pi/4-DQPSK, 8DPSK	CH0	2402	TX level is set as defaults value.
	CH39	2441	TX level is set as defaults value.
	CH78	2480	TX level is set as defaults value.

Channel list:					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH0	2402	CH28	2430	CH56	2458
CH1	2403	CH29	2431	CH57	2459
CH2	2404	CH30	2432	CH58	2460
CH3	2405	CH31	2433	CH59	2461
CH4	2406	CH32	2434	CH60	2462
CH5	2407	CH33	2435	CH61	2463
CH6	2408	CH34	2436	CH62	2464
CH7	2409	CH35	2437	CH63	2465
CH8	2410	CH36	2438	CH64	2466
CH9	2411	CH37	2439	CH65	2467
CH10	2412	CH38	2440	CH66	2468
CH11	2413	CH39	2441	CH67	2469
CH12	2414	CH40	2442	CH68	2470
CH13	2415	CH41	2443	CH69	2471
CH14	2416	CH42	2444	CH70	2472
CH15	2417	CH43	2445	CH71	2473
CH16	2418	CH44	2446	CH72	2474
CH17	2419	CH45	2447	CH73	2475
CH18	2420	CH46	2448	CH74	2476
CH19	2421	CH47	2449	CH75	2477
CH20	2422	CH48	2450	CH76	2478
CH21	2423	CH49	2451	CH77	2479
CH22	2424	CH50	2452	CH78	2480
CH23	2425	CH51	2453	-	-
CH24	2426	CH52	2454	-	-
CH25	2427	CH53	2455	-	-
CH26	2428	CH54	2456	-	-
CH27	2429	CH55	2457	-	-

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	26°C
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power line Conducted Emissions Test	2.17dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	2.74dB(Polarize: V)
	2.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	48.24KHz
Uncertainty for conducted RF Power	0.41dB
Uncertainty for Power Spectral Density	0.39 dB
Occupied Bandwidth	968Hz
Conducted Spurious Emission	1.26dB

2.10. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G18 G-45dB	SK20220329 01	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118G -45	SK20200108 01	/	2024.12.18	1 Year
12	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2024.12.18	1 Year
13	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2024.12.18	1 Year
14	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
15	Regulated DC Power Supply	Xinouhua	ADC120V10 A	2022112516 38		2024.12.18	1 Year
16	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
17	Power meter	Agilent	E4419B	GB40202121	/	2024.12.18	1 Year

For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EZ_EMC	Farad	PSI-3A1
CE	EZ_EMC	Farad	PSI-3A1
RF	RTS	TACHOY	V1.0.0

3. Maximum Peak Output Power

3.1. Limit

Please refer FCC part 15.247 & RSS-247.


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3. Test Setup

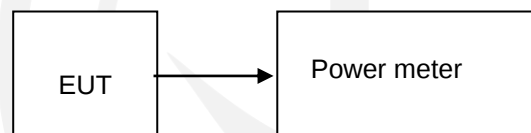

3.4. Test Result

Condition	Antenna	Modulation	Frequency (MHz)	Max. Conducted Power(dBm)	Max. Conducted Power(mW)	Limit(mW)	Result
NVNT	ANT1	1-DH1	2402.00	-0.52	0.89	1000	Pass
NVNT	ANT1	1-DH1	2441.00	0.22	1.05	1000	Pass
NVNT	ANT1	1-DH1	2480.00	0.37	1.09	1000	Pass
NVNT	ANT1	2-DH1	2402.00	0.36	1.09	125	Pass
NVNT	ANT1	2-DH1	2441.00	0.96	1.25	125	Pass
NVNT	ANT1	2-DH1	2480.00	1.18	1.31	125	Pass
NVNT	ANT1	3-DH1	2402.00	0.93	1.24	125	Pass
NVNT	ANT1	3-DH1	2441.00	1.53	1.42	125	Pass
NVNT	ANT1	3-DH1	2480.00	1.67	1.47	125	Pass

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


4.3. Test Result


Condition	Antenna	Modulation	Frequency (MHz)	-20dB BW(MHz)	if larger than CFS
NVNT	ANT1	1-DH1	2402.00	0.875	No
NVNT	ANT1	1-DH1	2441.00	0.877	No
NVNT	ANT1	1-DH1	2480.00	0.876	No
NVNT	ANT1	2-DH1	2402.00	1.265	Yes
NVNT	ANT1	2-DH1	2441.00	1.269	Yes
NVNT	ANT1	2-DH1	2480.00	1.275	Yes
NVNT	ANT1	3-DH1	2402.00	1.223	Yes
NVNT	ANT1	3-DH1	2441.00	1.223	Yes
NVNT	ANT1	3-DH1	2480.00	1.225	Yes

-20dB_Bandwidth_NVNT_ANT1_1-DH1_2402_00**-20dB_Bandwidth_NVNT_ANT1_1-DH1_2441_00**

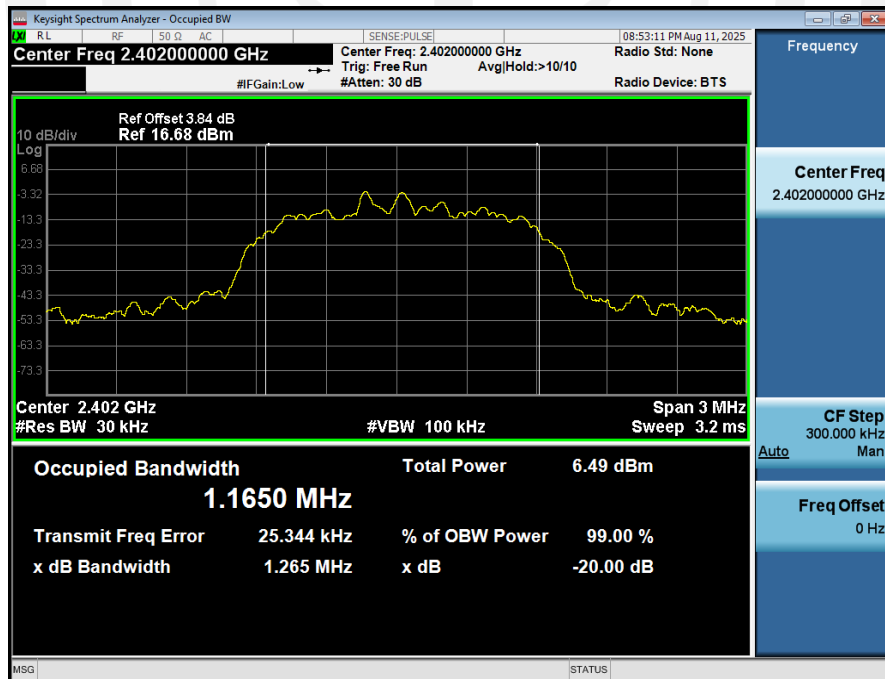-20dB_Bandwidth_NVNT_ANT1_1-DH1_2480_00**-20dB_Bandwidth_NVNT_ANT1_2-DH1_2402_00**

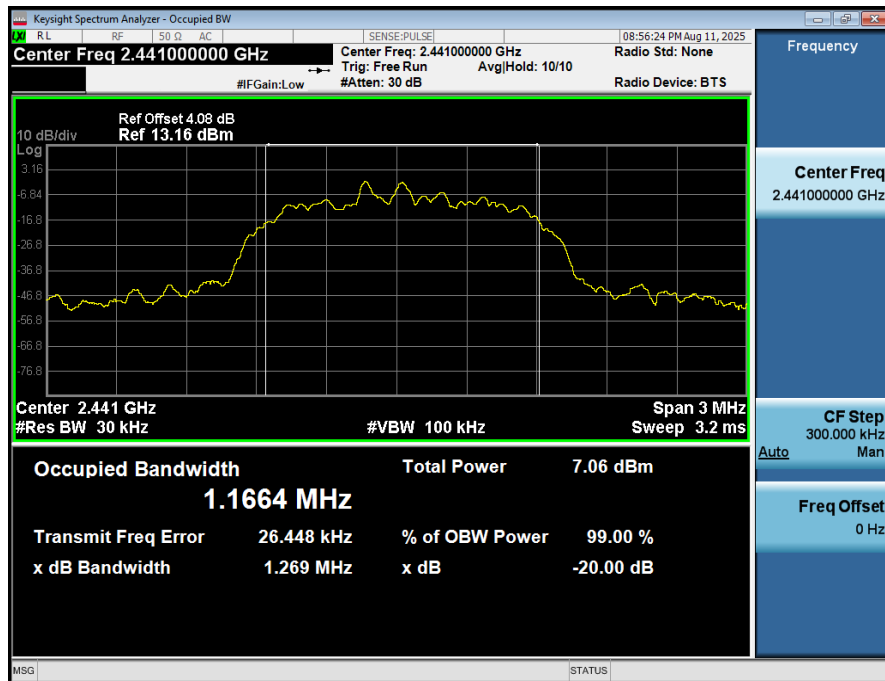-20dB_Bandwidth_NVNT_ANT1_2-DH1_2441_00**-20dB_Bandwidth_NVNT_ANT1_2-DH1_2480_00**

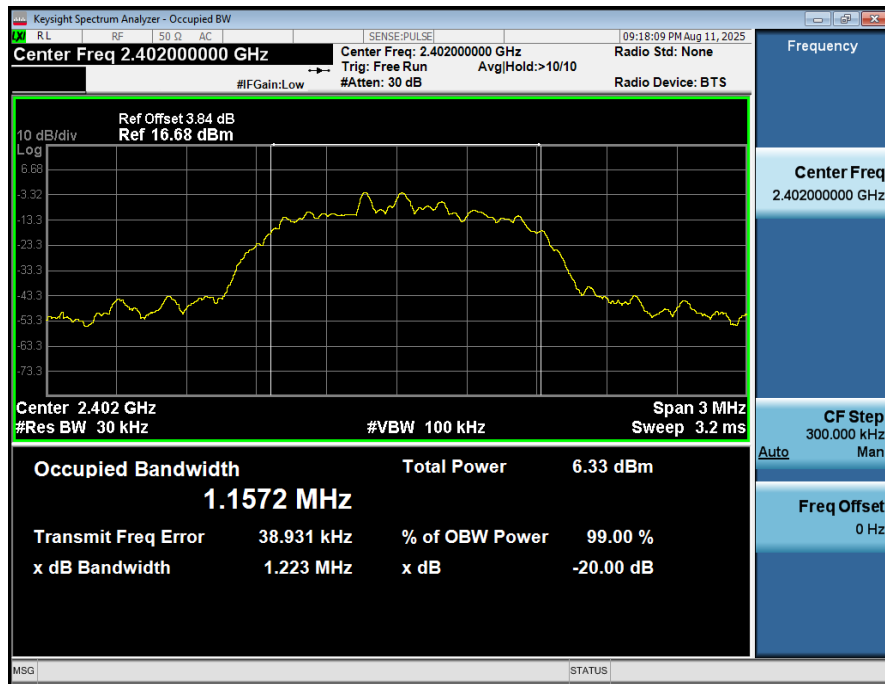-20dB_Bandwidth_NVNT_ANT1_3-DH1_2402_00**-20dB_Bandwidth_NVNT_ANT1_3-DH1_2441_00**

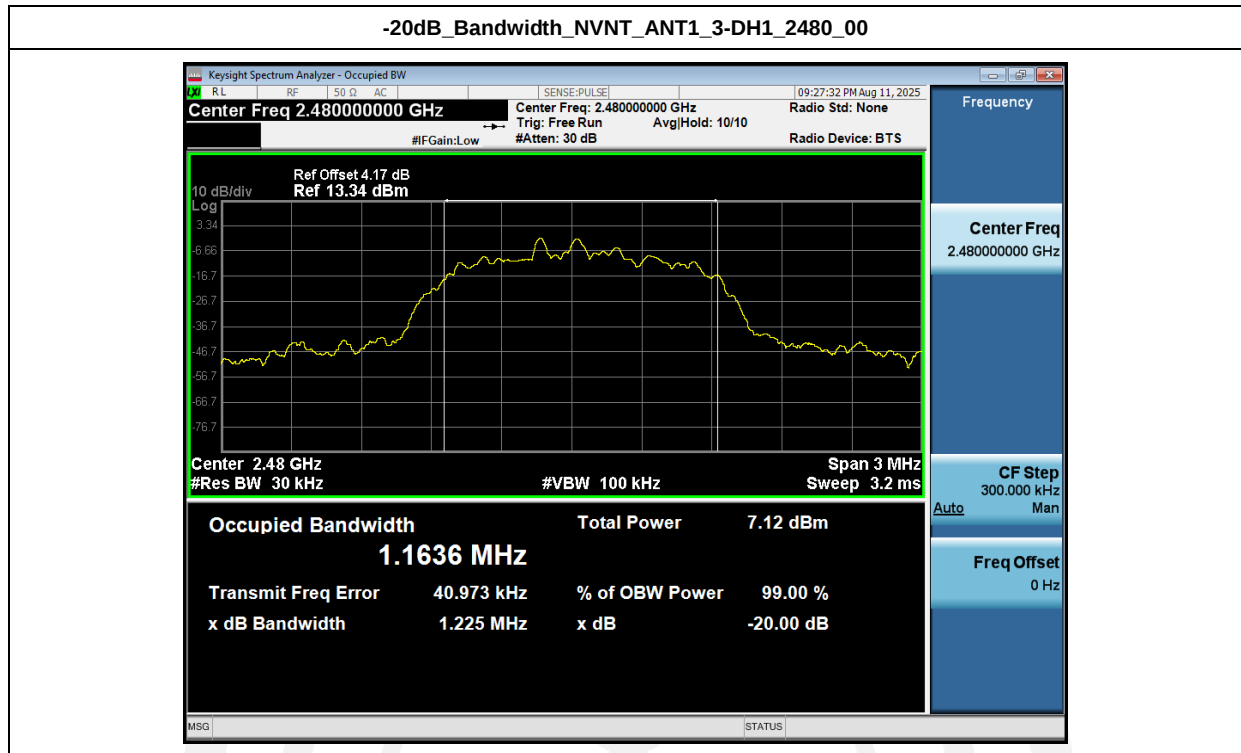


Condition	Antenna	Modulation	Frequency (MHz)	99%BW(MHz)
NVNT	ANT1	1-DH1	2402.00	0.821
NVNT	ANT1	1-DH1	2441.00	0.822
NVNT	ANT1	1-DH1	2480.00	0.827
NVNT	ANT1	2-DH1	2402.00	1.166
NVNT	ANT1	2-DH1	2441.00	1.167
NVNT	ANT1	2-DH1	2480.00	1.170
NVNT	ANT1	3-DH1	2402.00	1.157
NVNT	ANT1	3-DH1	2441.00	1.160
NVNT	ANT1	3-DH1	2480.00	1.163


99%_Occupied_Bandwidth_NVNT_ANT1_1-DH1_2402_00




99%_Occupied_Bandwidth_NVNT_ANT1_1-DH1_2441_00

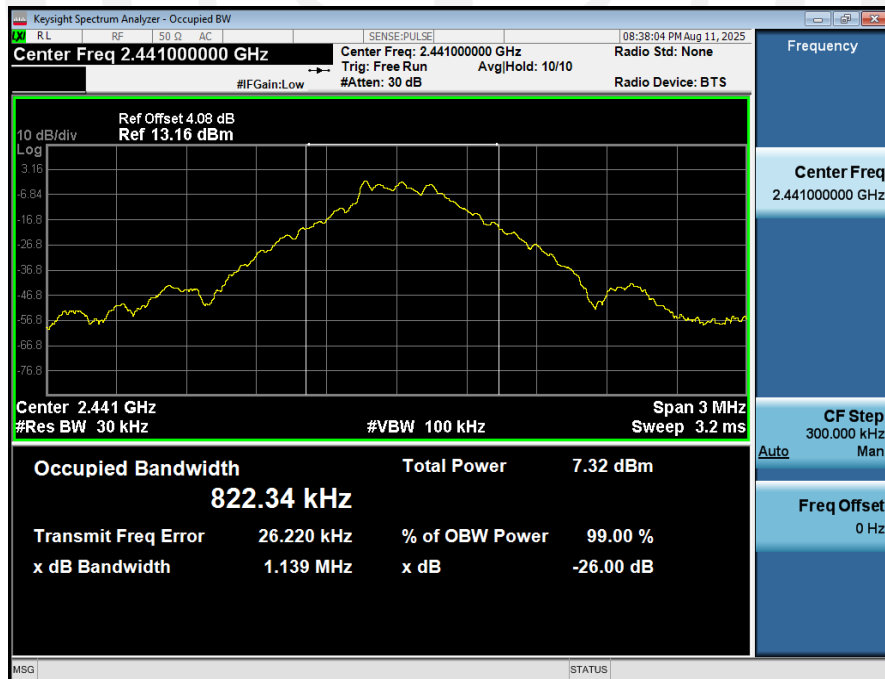


99%_Occupied_Bandwidth_NVNT_ANT1_1-DH1_2480_00

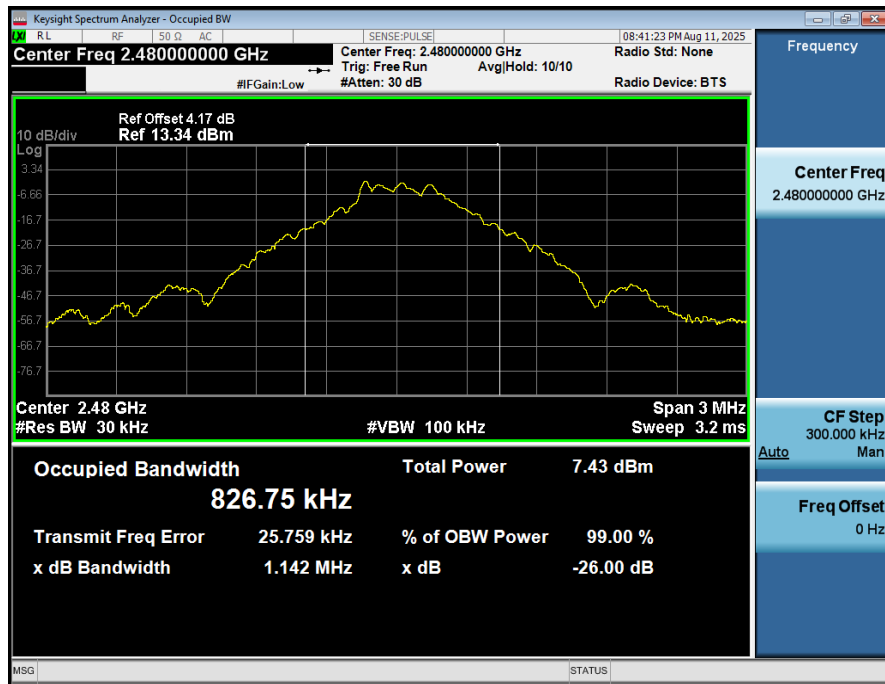

99%_Occupied_Bandwidth_NVNT_ANT1_2-DH1_2402_00

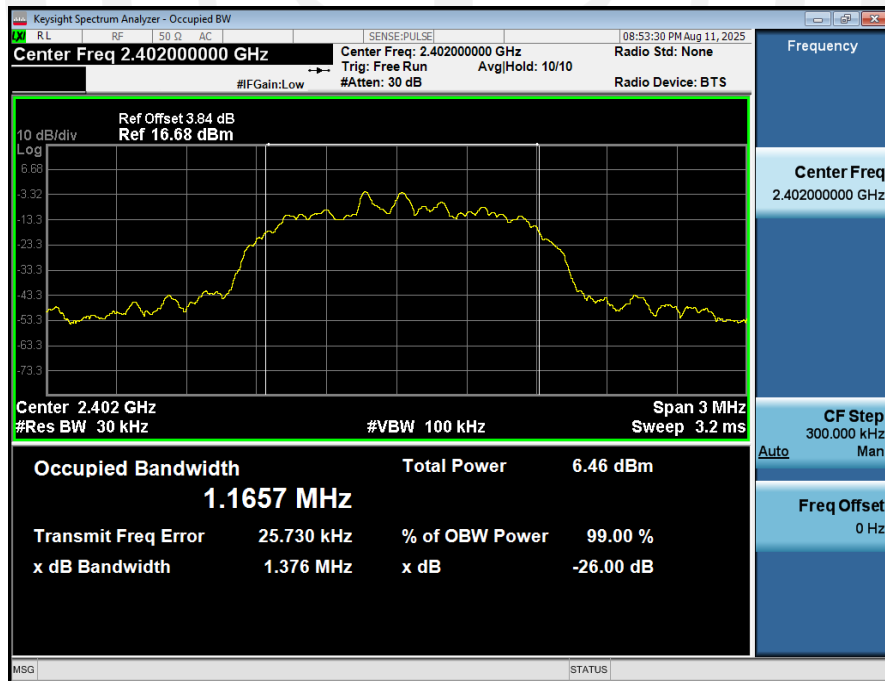


99%_Occupied_Bandwidth_NVNT_ANT1_2-DH1_2441_00

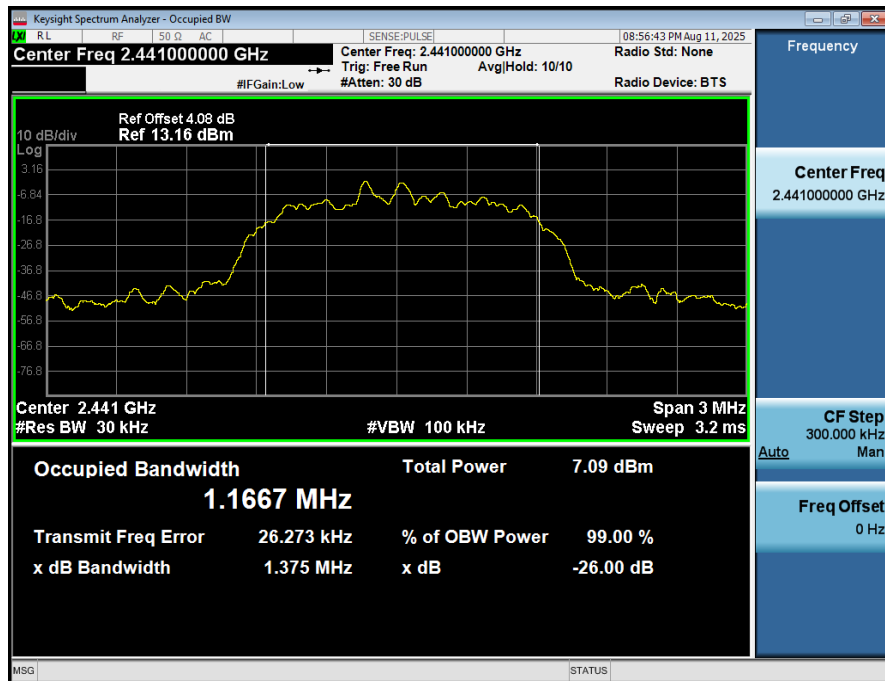

99%_Occupied_Bandwidth_NVNT_ANT1_2-DH1_2480_00




99%_Occupied_Bandwidth_NVNT_ANT1_3-DH1_2402_00

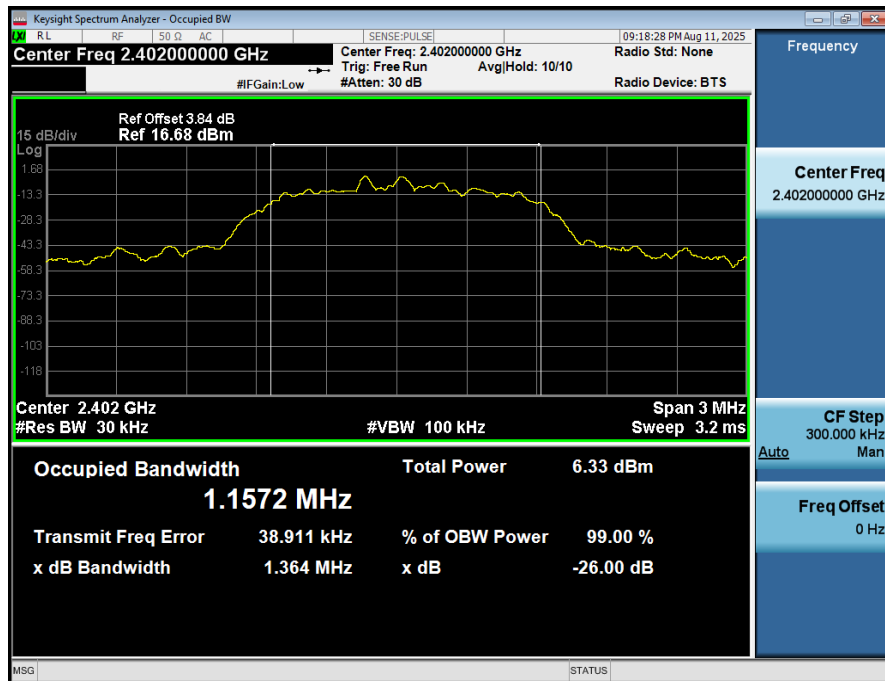

99%_Occupied_Bandwidth_NVNT_ANT1_3-DH1_2441_00



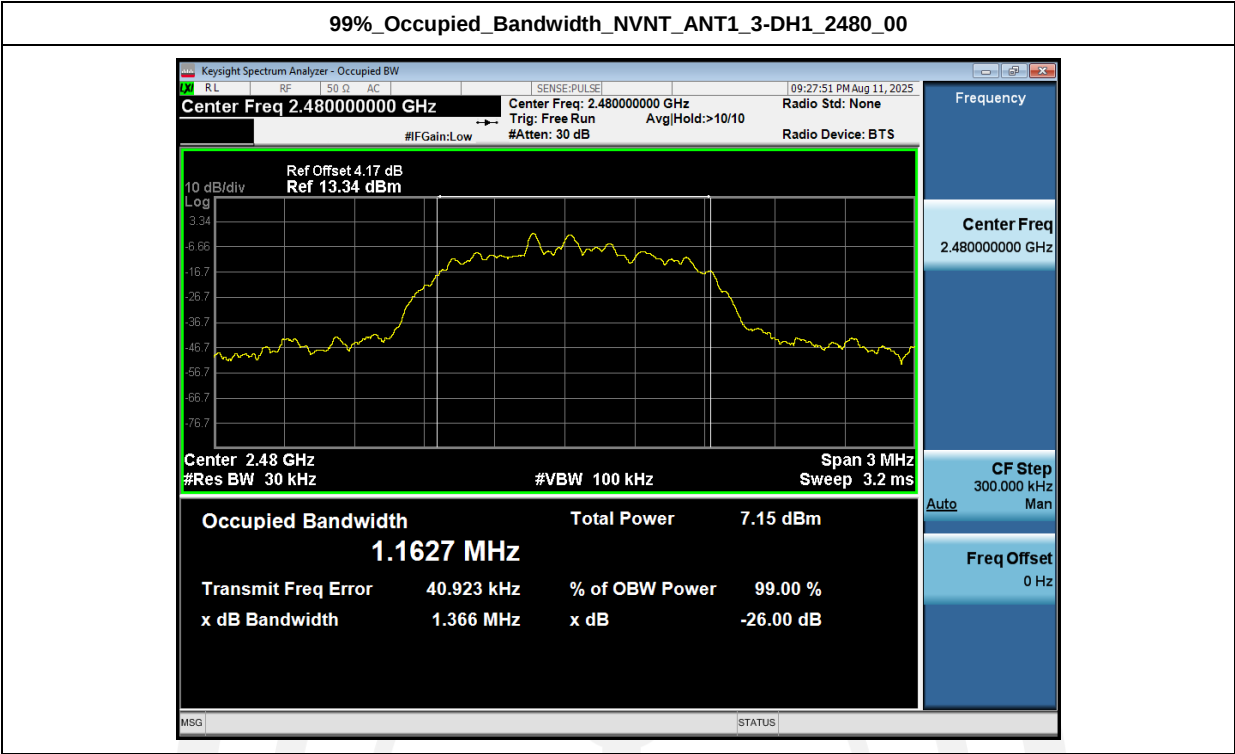

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 300kHz RBW and 1MHz VBW.

5.3. Test Result

Condition	Antenna	Modulation	Frequency(MHz)	Hopping NO.0 (MHz)	Hopping NO.1 (MHz)	Carrier Frequencies Separation(MHz)	Limit(MHz)	Result
NVNT	ANT1	1-DH1	2441.00	2441.035	2442.025	0.99	0.877	Pass
NVNT	ANT1	2-DH1	2441.00	2441.023	2442.022	1.00	0.846	Pass
NVNT	ANT1	3-DH1	2441.00	2441.047	2442.046	1.00	0.815	Pass

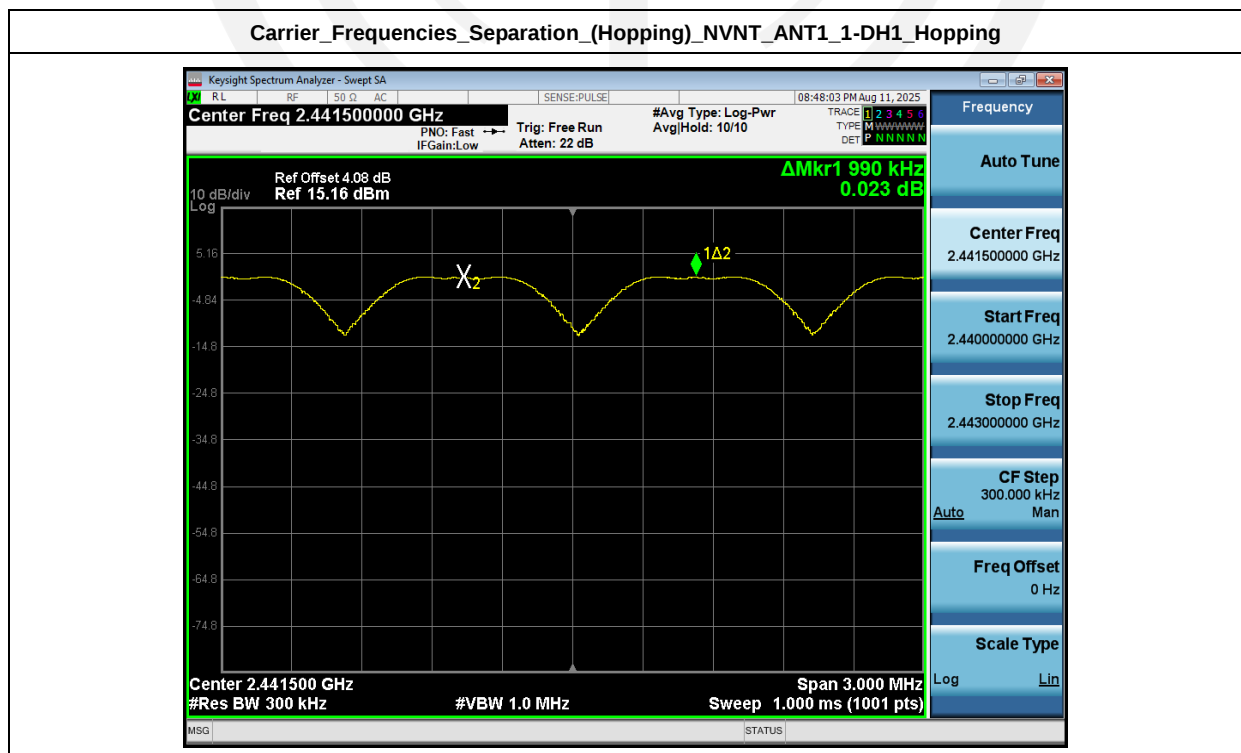

Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_2-DH1_Hopping



Carrier_Frequencies_Separation_(Hopping)_NVNT_ANT1_3-DH1_Hopping



6. Number Of Hopping Channel

6.1. Limit


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3. Test Result


Condition	Antenna	Modulation	Hopping Num	Limit	Result
NVNT	ANT1	1-DH1	79	15	Pass
NVNT	ANT1	2-DH1	79	15	Pass
NVNT	ANT1	3-DH1	79	15	Pass

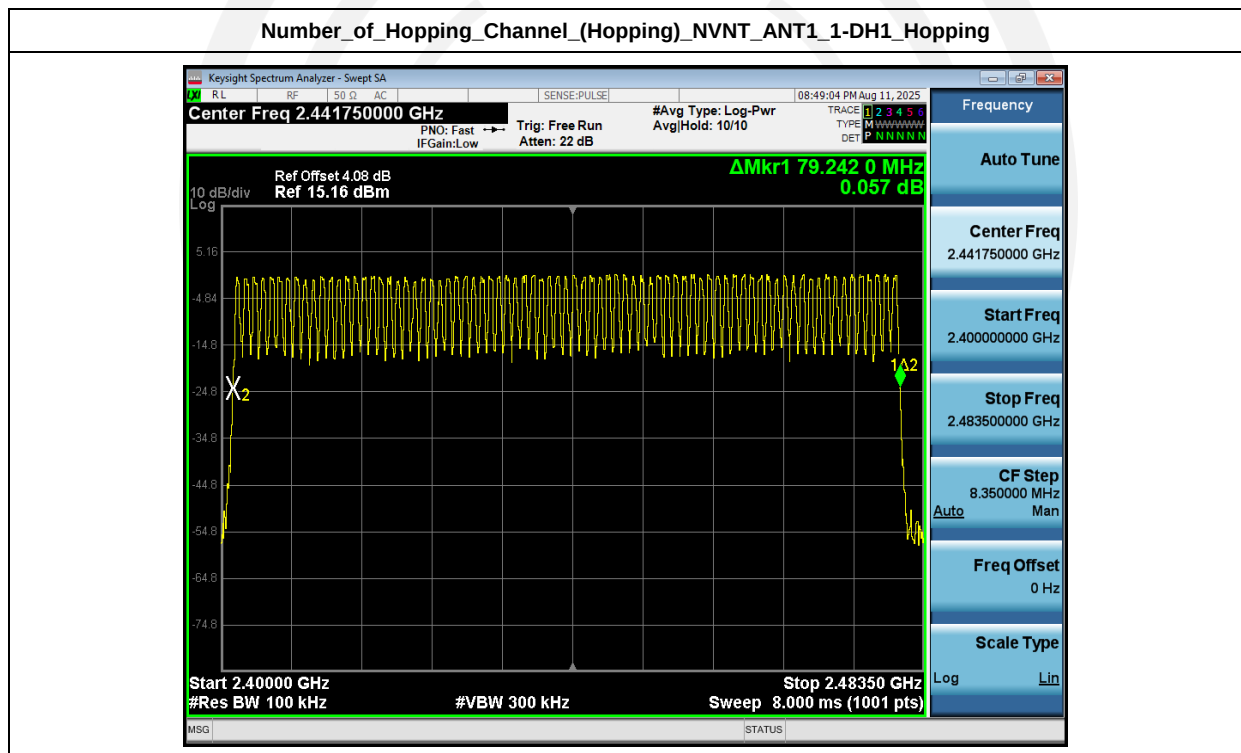

Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_2-DH1_Hopping

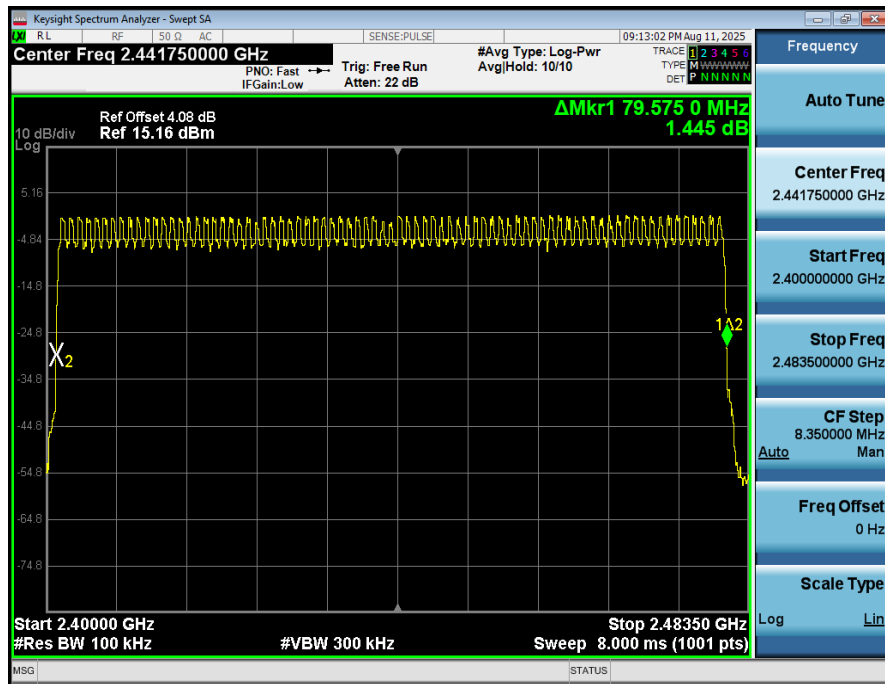

Number_of_Hopping_Channel_(Hopping)_NVNT_ANT1_3-DH1_Hopping

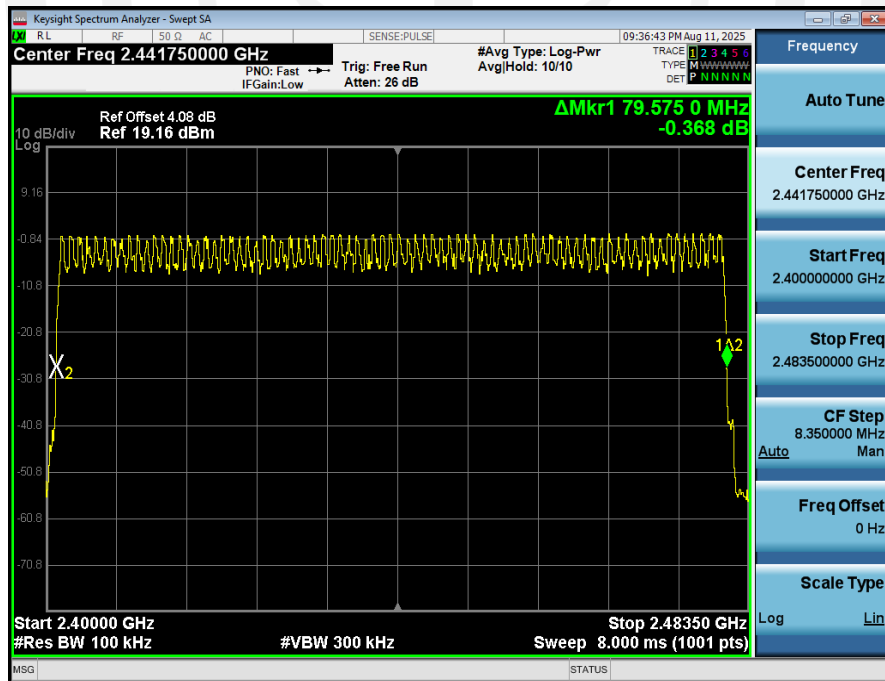

7. Dwell Time

7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Result

Note:

1. The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

2. Dwell Time = Pulse Time * Hops Number

Condition	Antenna	Packet Type	Pulse Time(ms)	Hops	Dwell Time(ms)	Limit(s)	Result
NVNT	ANT1	1-DH1	0.390	320.00	124.800	0.40	Pass
NVNT	ANT1	2-DH1	0.400	320.00	128.000	0.40	Pass
NVNT	ANT1	3-DH1	0.400	319.00	127.600	0.40	Pass
NVNT	ANT1	1-DH3	1.650	159.00	262.350	0.40	Pass
NVNT	ANT1	1-DH5	2.890	105.00	303.450	0.40	Pass
NVNT	ANT1	2-DH3	1.650	164.00	270.600	0.40	Pass
NVNT	ANT1	2-DH5	2.890	107.00	309.230	0.40	Pass
NVNT	ANT1	3-DH3	1.640	159.00	260.760	0.40	Pass
NVNT	ANT1	3-DH5	2.900	108.00	313.200	0.40	Pass

Dwell_Time_(Hopping)_NVNT_ANT1_1-DH1_2441_00_One_Burst_Time

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 15.16 dBm

ΔMkr1 390.0 μs
-60.50 dBm

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 10.00 ms (1001 pts)
Span 0 Hz

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ)	390.0 μs (Δ)	-60.50 dBm		
2	F	1	t		480.0 μs	0.20 dBm		

MSG STATUS

Dwell_Time_(Hopping)_NVNT_ANT1_1-DH1_2441_00_Accumulated

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

Mkr1 26.34 s
0.23 dBm

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 31.60 s (30001 pts)
Span 0 Hz

MSG STATUS

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Trig Delay: 500.0 μ s #Avg Type: Log-Pwr

PNO: Fast IFGain: Low

Trig: Video Atten: 22 dB

09:13:16 PM Aug 11, 2025

TRACE 1 2 3 4 5 6

TYPE W W W W W W

DET P N N N N N

Frequency

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Auto

Freq Offset 0 Hz

Scale Type Log Lin

Ref Offset 4.08 dB

Ref 15.16 dBm

Δ Mkr1 400.0 μ s

-59.48 dB

10 dB/div

Log

5.16

-4.84

-14.6

-24.6

-34.6

-44.6

-54.6

-64.6

-74.6

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 1.0 MHz

Span 0 Hz

Sweep 10.00 ms (1001 pts)

MKR	MODE	TRC	SCU	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	1	t	(Δ)	400.0 μ s	(Δ)	-59.48 dB	
2	F	1	t		480.0 μ s		0.17 dBm	
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG

STATUS

KeySight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

Mkr1 11.81 s
0.29 dBm

10 dB/div
Log

14.1
4.08
-5.92
-15.9
-25.9
-35.9
-45.9
-55.9
-65.9

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 31.60 s (30001 pts)

Span 0 Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man

Auto

Freq Offset
0 Hz

Scale Type
Log

MSG

STATUS

Dwell_Time_(Hopping)_NVNT_ANT1_3-DH1_2441_00_One_Burst_Time

Keysight Spectrum Analyzer - Swept SA

Center Freq **2.441000000 GHz** Trig Delay **500.0 μs** #Avg Type: **Log-Pwr** 09:36:58 PM Aug 11, 2025

PNO: Fast → IFGain: Low Trig: Video Atten: 22 dB TRACE 1 2 3 4 5 6
TYPE W W W W W W W W
DET P N N N N N N

Ref Offset **4.08 dB** **ΔMkr1 400.0 μs -60.18 dB**

10 dB/div Log

Center **2.441000000 GHz** Span **0 Hz**
Res BW **1.0 MHz** #VBW **1.0 MHz** Sweep **10.00 ms (1001 pts)**

MKR	MODE	TRC	SCU	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t	(Δ)	400.0 μs (Δ)	-60.18 dB		
2	F	1	t		480.0 μs	0.22 dBm		
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG [STATUS]

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

Mkr1 28.67 s
0.83 dBm

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Auto

Freq Offset
0 Hz

Scale Type
Log

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Span 0 Hz
Sweep 31.60 s (30001 pts)

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Trig Delay 500.0 μ s #Avg Type: Log-Pwr

PNO: Fast IFGain: Low Trig: Video Atten: 22 dB

Ref Offset 4.08 dB Ref 15.16 dB

Δ Mkr1 2.890 ms -59.85 dB

Center 2.441000000 GHz Span 0 Hz

Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)

MKR	MODE	TRC	SCU	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	1	t	(Δ)	2.890 ms (Δ)	-59.85 dB		
2	F	1	t		480.0 μ s	0.11 dBm		

MSG [] STATUS []

KeySight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

10 dB/div
Log

Mkr1 7.706 s
0.14 dBm

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 31.60 s (30001 pts)

Span 0 Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man

Auto

Freq Offset
0 Hz

Scale Type
Log

KeySight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Trig Delay-500.0 μ s #Avg Type: Log-Pwr

PNO: Fast IFGain:Low Trig: Video Atten: 22 dB

Ref Offset 4.08 dB Ref 15.16 dBm

Δ Mkr1 1.650 ms -19.39 dB

Center 2.441000000 GHz Span 0 Hz

Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	1	t	(Δ)	1.650 ms	(Δ)	-19.39 dB	
2	F	1	t		470.0 μ s		-17.73 dBm	

MSG [STATUS]

KeySight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

10 dB/div
Log

14.1
4.08
-5.92
-15.9
-25.9
-35.9
-45.9
-55.9
-65.9

Mkr1 8.316 s
0.39 dBm

Center 2.441000000 GHz
Res BW 1.0 MHz
#VBW 1.0 MHz
Sweep 31.60 s (30001 pts)

Span 0 Hz

Frequency

Auto Tune

Center Freq
2.441000000 GHz

Start Freq
2.441000000 GHz

Stop Freq
2.441000000 GHz

CF Step
1.000000 MHz
Man

Auto

Freq Offset
0 Hz

Scale Type
Log

MSG | STATUS

Dwell_Time_(Hopping)_NVNT_ANT1_2-DH5_2441_00_One_Burst_Time

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 15.16 dBm

Trig Delay: 500.0 μ s
Trig: Video
Atten: 22 dB

PNO: Fast
IFGain: Low

Trig Delay: 500.0 μ s
Trig: Video
Atten: 22 dB

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

Scale Type Log

Span 0 Hz

Res BW 1.0 MHz

#VBW 1.0 MHz

Sweep 10.00 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	1	t	(Δ)	2.890 ms (Δ)	-32.91 dB		
2	F	1	t		480.0 μ s	0.12 dBm		

Dwell_Time_(Hopping)_NVNT_ANT1_2-DH5_2441_00_Accumulated

Keysight Spectrum Analyzer - Swept SA

Center Freq 2.441000000 GHz

Ref Offset 4.08 dB
Ref 24.08 dBm

Trig: Free Run
Atten: 30 dB

PNO: Fast
IFGain: Low

Trig: Free Run
Atten: 30 dB

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Freq Offset 0 Hz

Scale Type Log

Span 0 Hz

Res BW 1.0 MHz

#VBW 1.0 MHz

Sweep 31.60 s (30001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ 2	1	t	(Δ)	19.23 s (Δ)	0.37 dBm		

Keysight Spectrum Analyzer - Swept A

RL RF 50 Ω AC SENSE:PULSE 09:54:51 PM Aug 11, 2025

Center Freq 2.441000000 GHz Trig Delay: 500.0 μs #Avg Type: Log-Pwr

PNO: Fast IFGain: Low Trig: Video Atten: 22 dB

TRACE 1 2 3 4 5 6 TYPE WWWWWWWW DET P NNNNNN

Ref Offset 4.08 dB Ref 15.16 dBm

ΔMkr1 1.640 ms -36.93 dB

10 dB/div Log

5.16 -4.84 -14.8 -24.8 -34.8 -44.8 -54.8 -64.8 -74.8

Center 2.441000000 GHz Span 0 Hz

Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ2	1	t (Δ)	1.640 ms (Δ)	-36.93 dB			
2	F	1	t	480.0 μs	0.14 dBm			
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS

Frequency

Auto Tune

Center Freq 2.441000000 GHz

Start Freq 2.441000000 GHz

Stop Freq 2.441000000 GHz

CF Step 1.000000 MHz

Auto Man

Freq Offset 0 Hz

Scale Type Lin

Log Lin

Keysight Spectrum Analyzer - Swept SA

RL RF 50 Ω AC SENSE:PULSE 09:55:31 PM Aug 11, 2025

Center Freq 2.441000000 GHz #Avg Type: Log-Pwr

PNO: Fast IFGain:Low Trig: Free Run Atten: 30 dB

TRACE 1 2 3 4 5 6 TYPE WWWWWW DET NNNNN

Ref Offset 4.08 dB Ref 24.08 dBm

10 dB/div Log

Mkr1 6.180 s 0.67 dBm

Center 2.441000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Span 0 Hz Sweep 31.60 s (30001 pts)

Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Auto Mar Freq Offset 0 Hz Scale Type Log Lin

8. Out-of-band Emissions

8.1. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required.

8.2. Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

8.3. Test Setup



8.4. Test Results

PASS.


The test results are listed in next pages.

Band Edge: Pass

1_Reference_Level_NVNT_ANT1_1-DH1_2402_00




2_Bandedge_NVNT_ANT1_1-DH1_2402_00

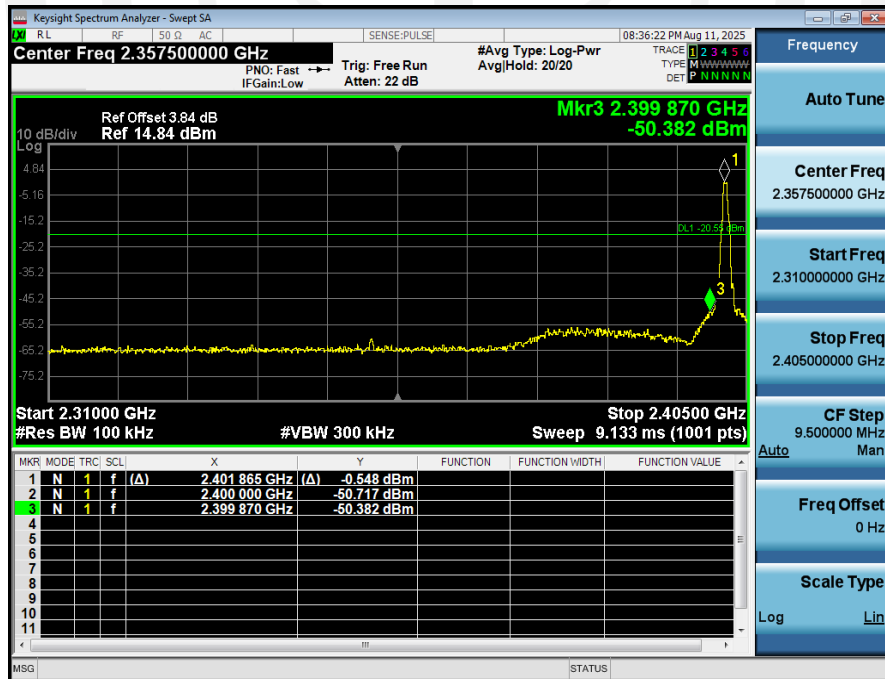

1_Reference_Level_Hopping_NVNT_ANT1_1-DH1_Hopping




2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH1_Hopping

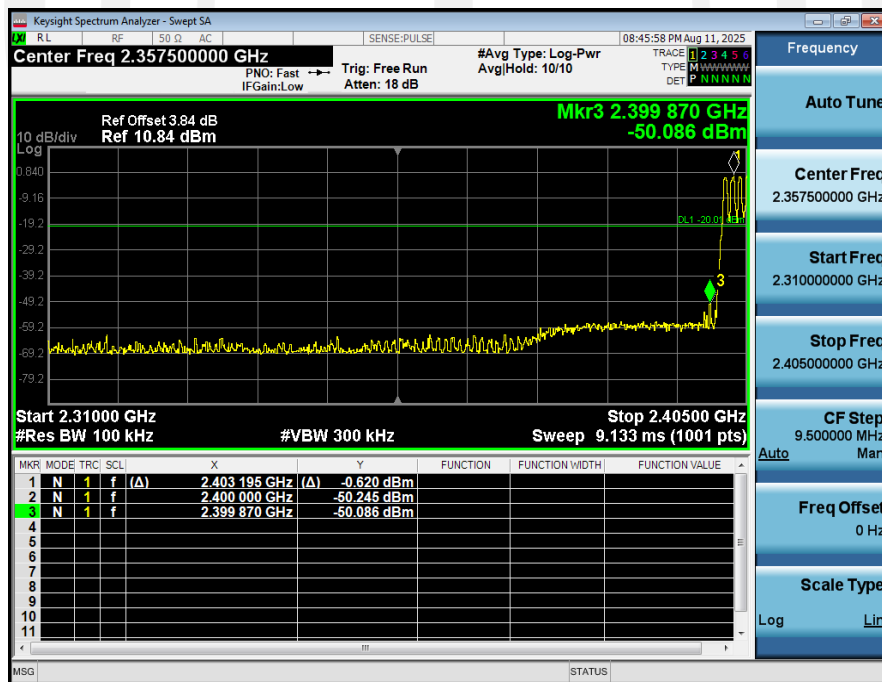


1_Reference_Level_NVNT_ANT1_1-DH1_2480_00




2_Bandedge_NVNT_ANT1_1-DH1_2480_00

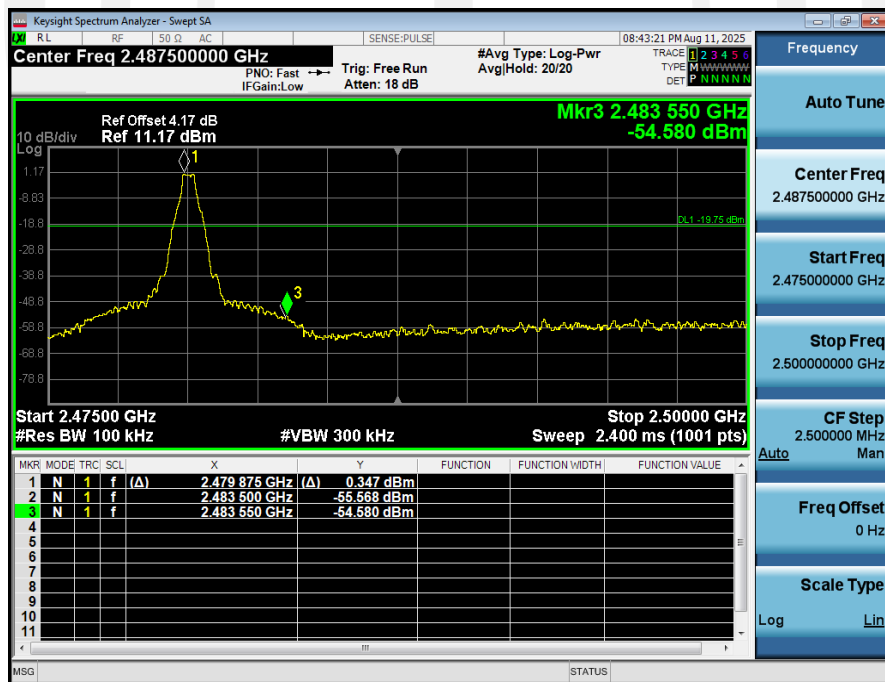

1_Reference_Level_Hopping_NVNT_ANT1_1-DH1_Hopping

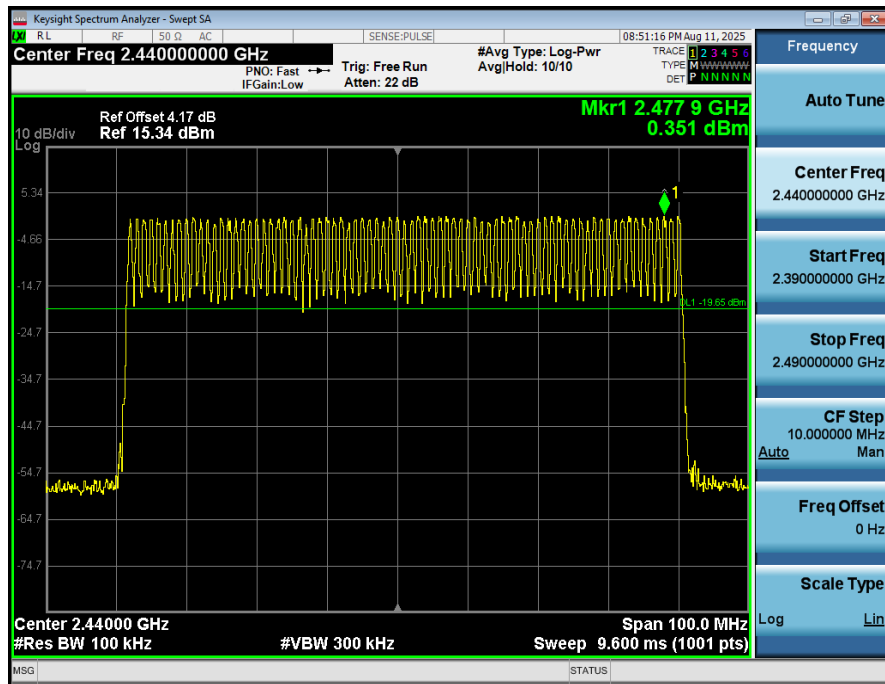


2_Band_Edge_(Hopping)_NVNT_ANT1_1-DH1_Hopping

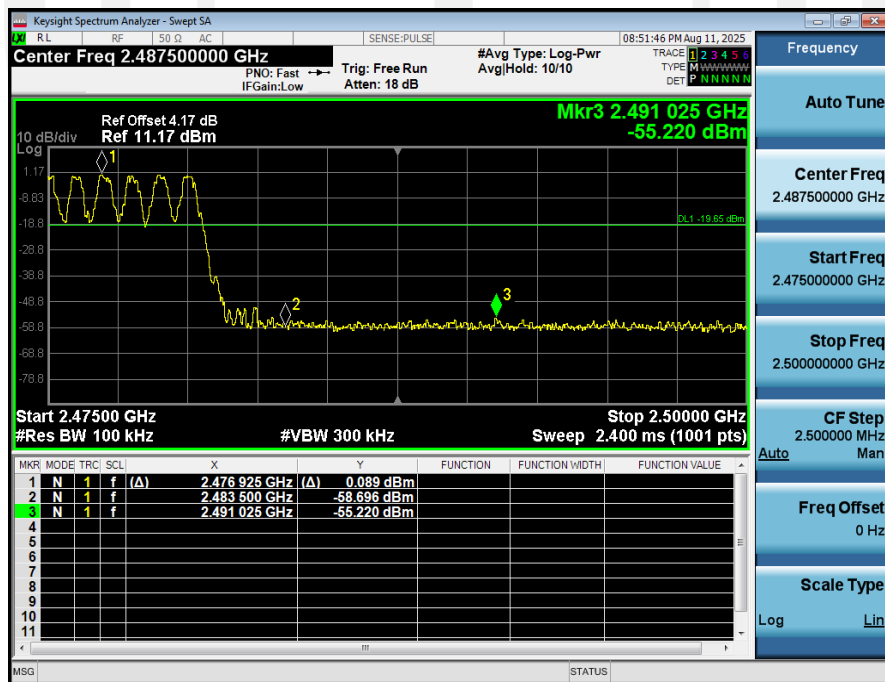


1_Reference_Level_NVNT_ANT1_2-DH1_2402_00




2_Bandedge_NVNT_ANT1_2-DH1_2402_00

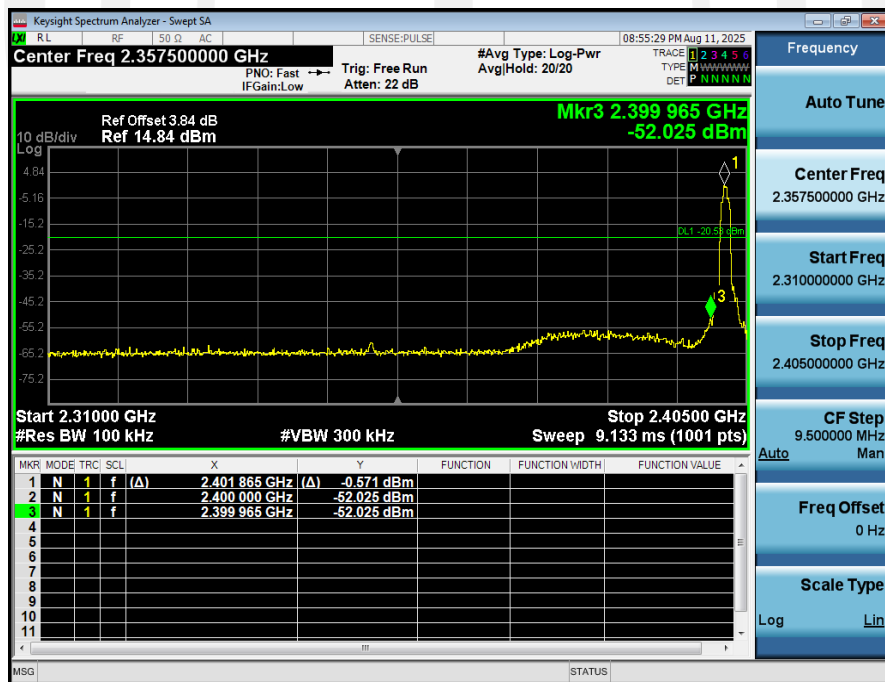

1_Reference_Level_Hopping_NVNT_ANT1_2-DH1_Hopping

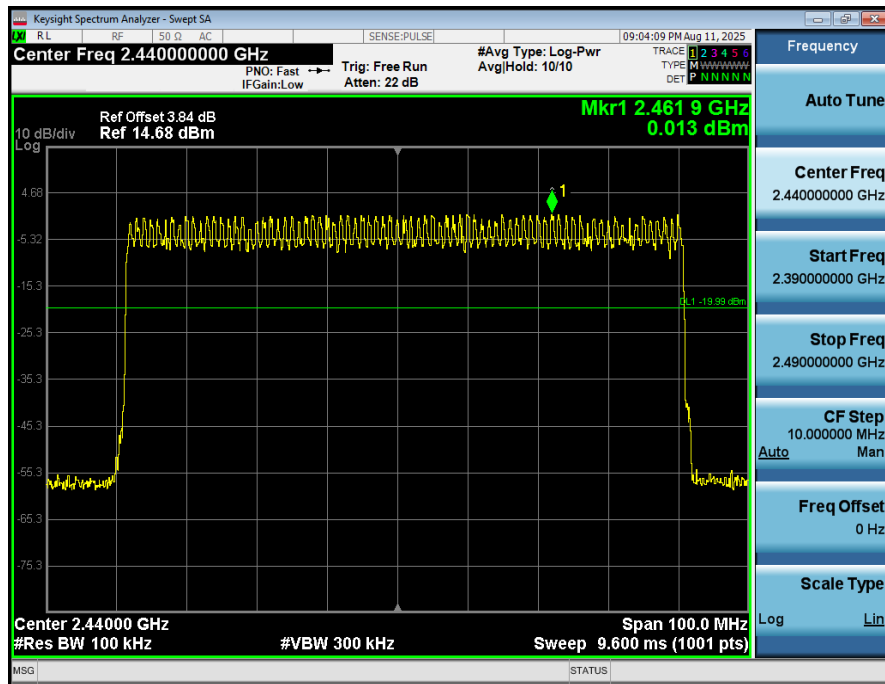


2_Band_Edge_(Hopping)_NVNT_ANT1_2-DH1_Hopping

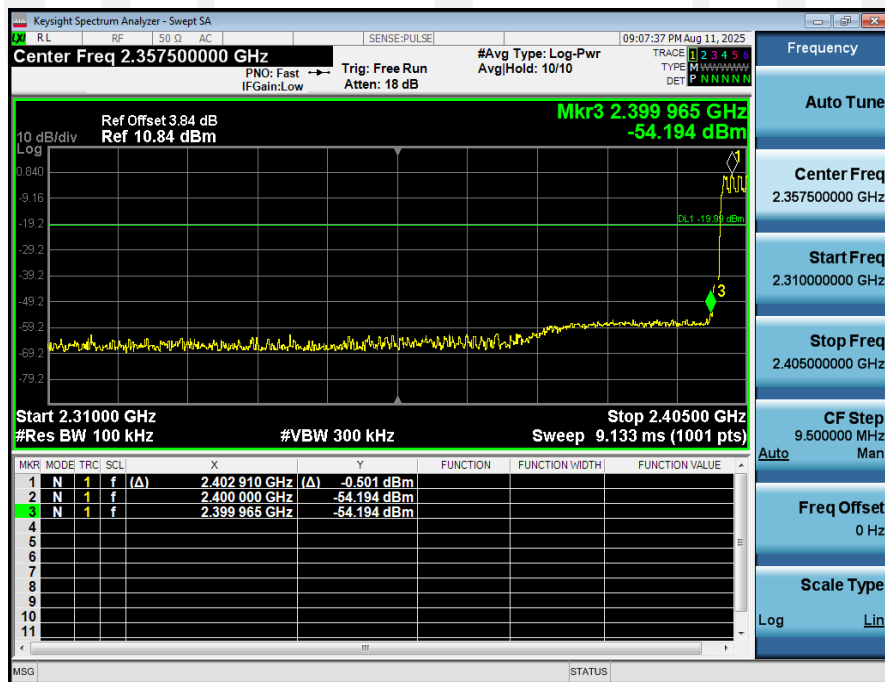


1_Reference_Level_NVNT_ANT1_2-DH1_2480_00




2_Bandedge_NVNT_ANT1_2-DH1_2480_00

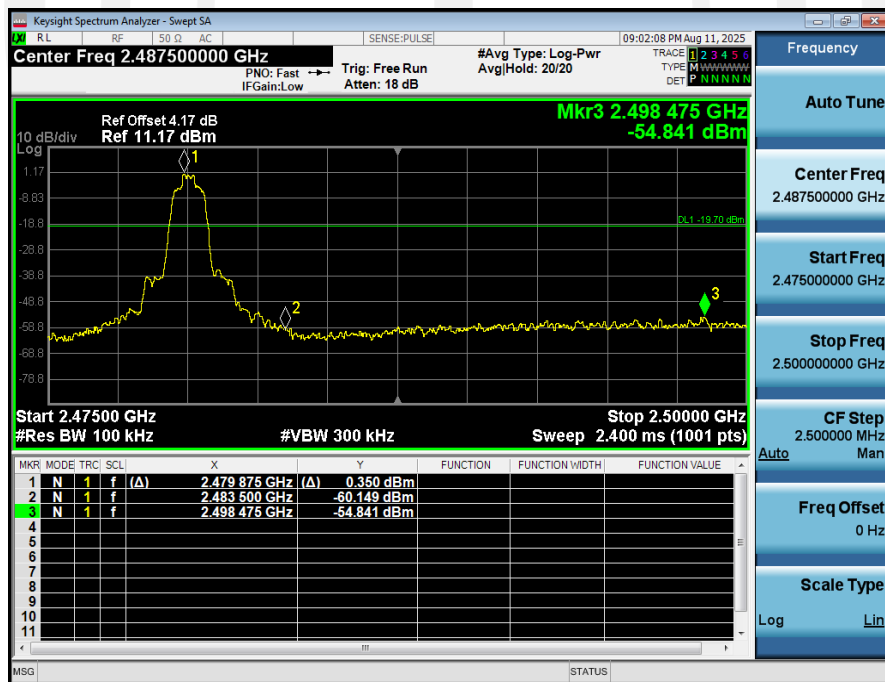

1_Reference_Level_Hopping_NVNT_ANT1_2-DH1_Hopping

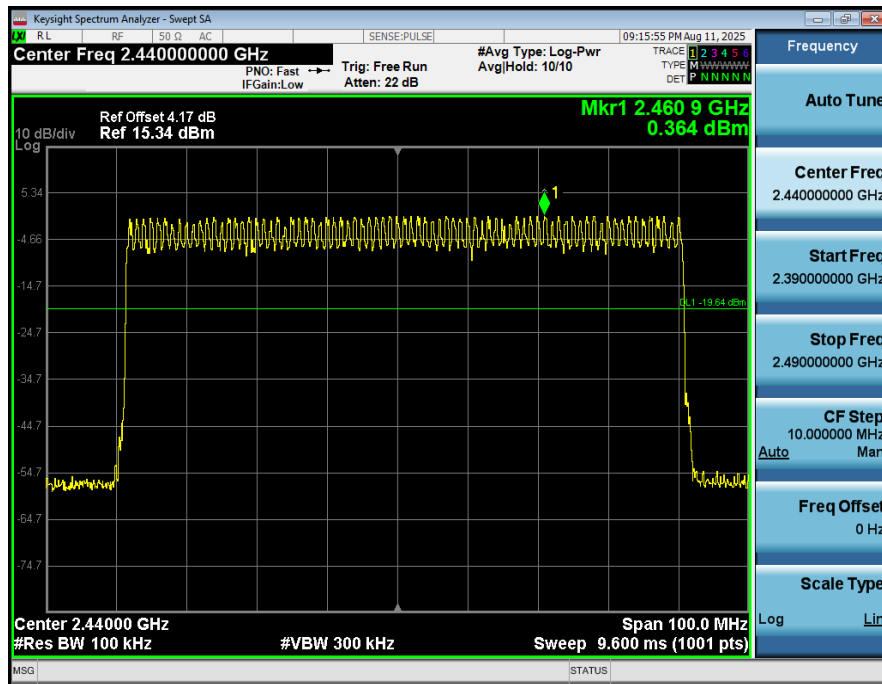


2_Band_Edge_(Hopping)_NVNT_ANT1_2-DH1_Hopping

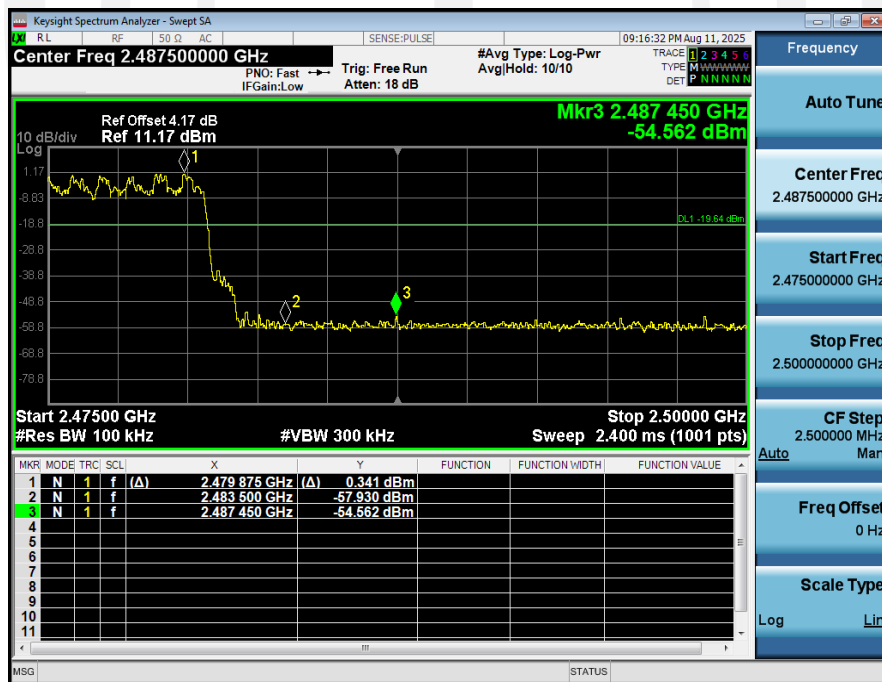


1_Reference_Level_NVNT_ANT1_3-DH1_2402_00




2_Bandedge_NVNT_ANT1_3-DH1_2402_00

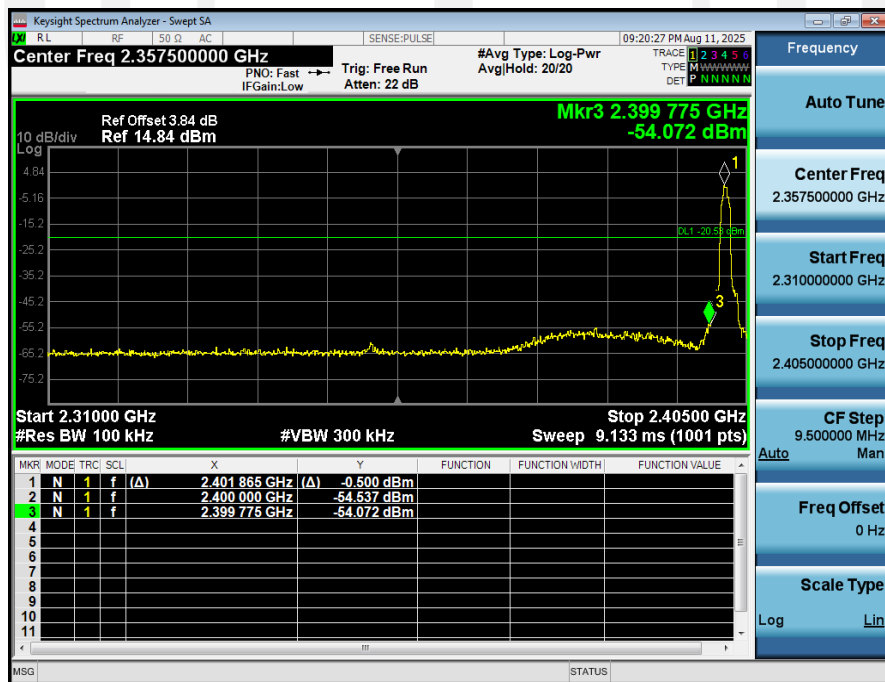

1_Reference_Level_Hopping_NVNT_ANT1_3-DH1_Hopping

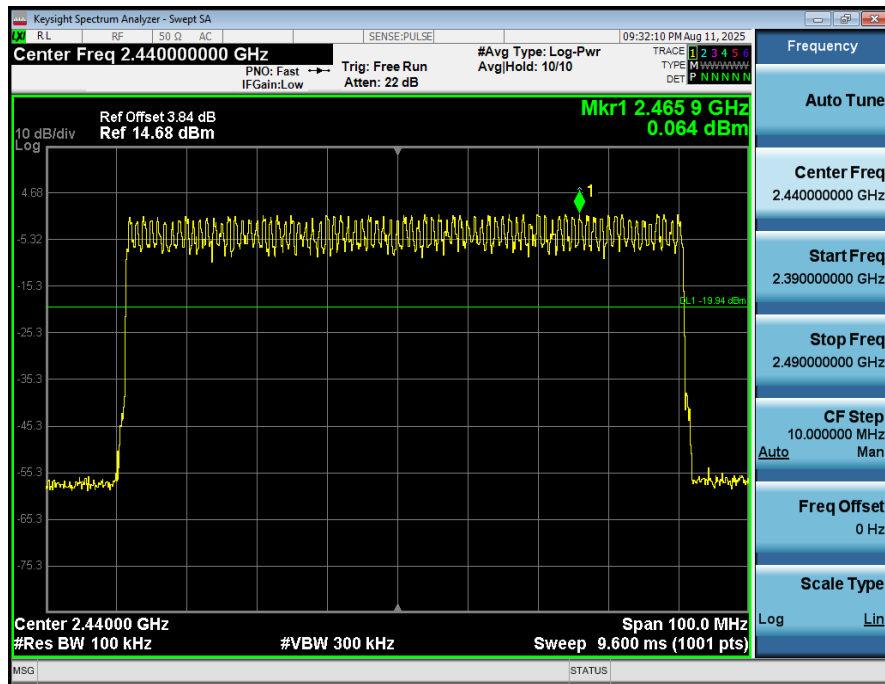


2_Band_Edge_(Hopping)_NVNT_ANT1_3-DH1_Hopping

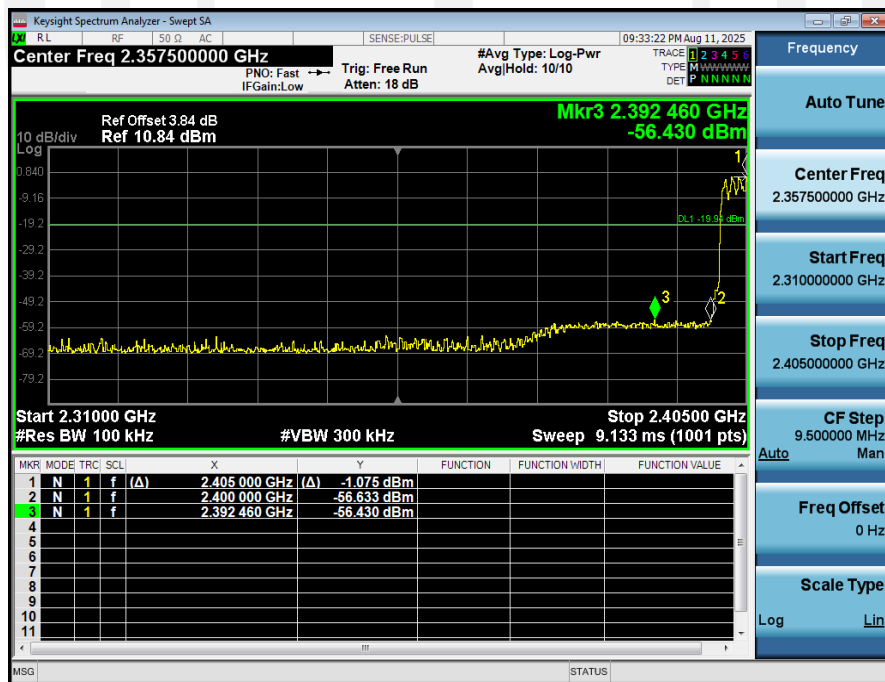


1_Reference_Level_NVNT_ANT1_3-DH1_2480_00




2_Bandedge_NVNT_ANT1_3-DH1_2480_00

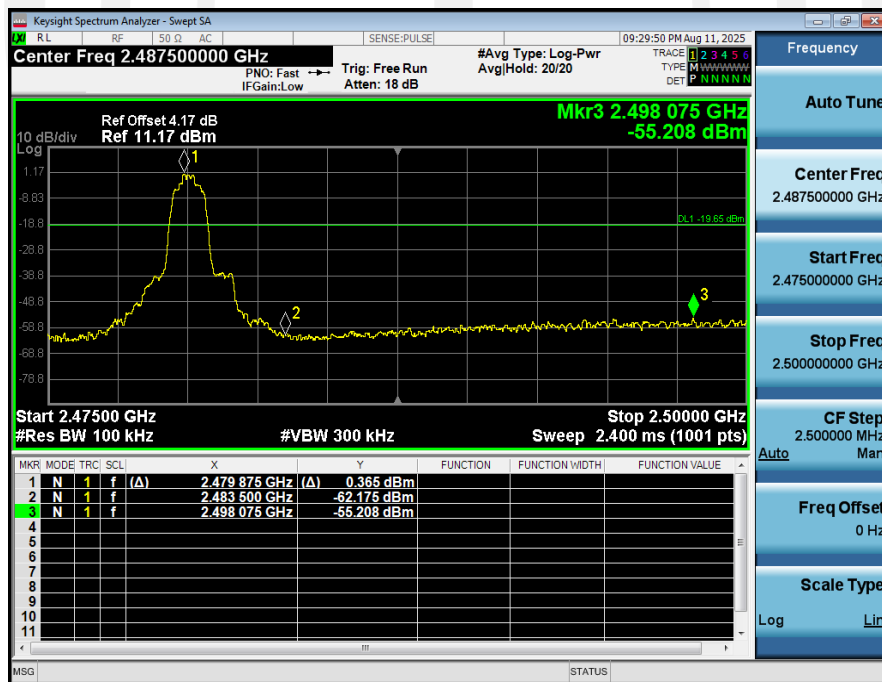

1_Reference_Level_Hopping_NVNT_ANT1_3-DH1_Hopping

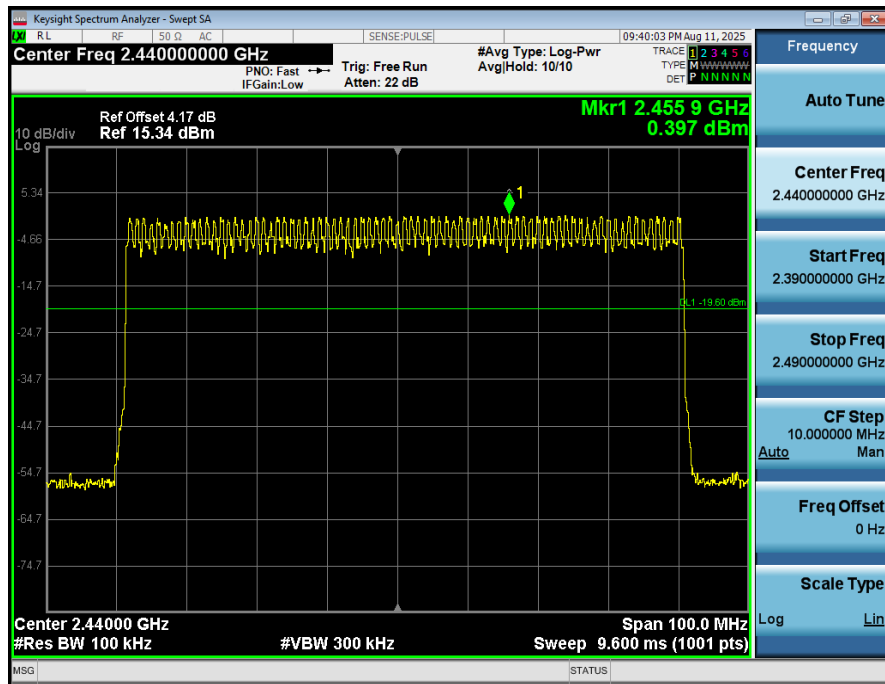

2_Band_Edge_(Hopping)_NVNT_ANT1_3-DH1_Hopping

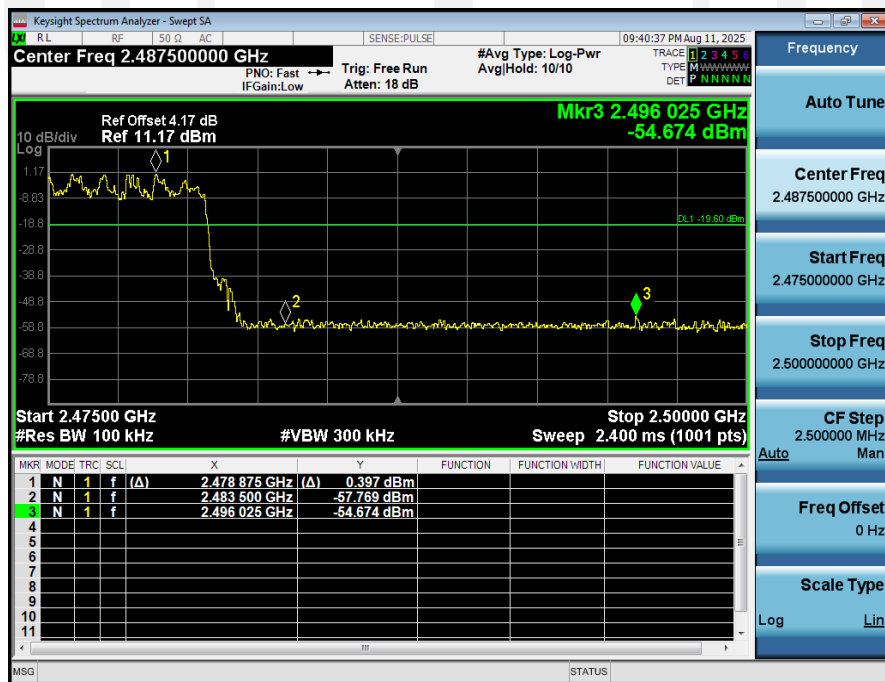


Conducted spurious emission: Pass

1_Reference_Level_NVNT_ANT1_1-DH1_2402_00




2_Spurious_Emissions_NVNT_ANT1_1-DH1_2402_00

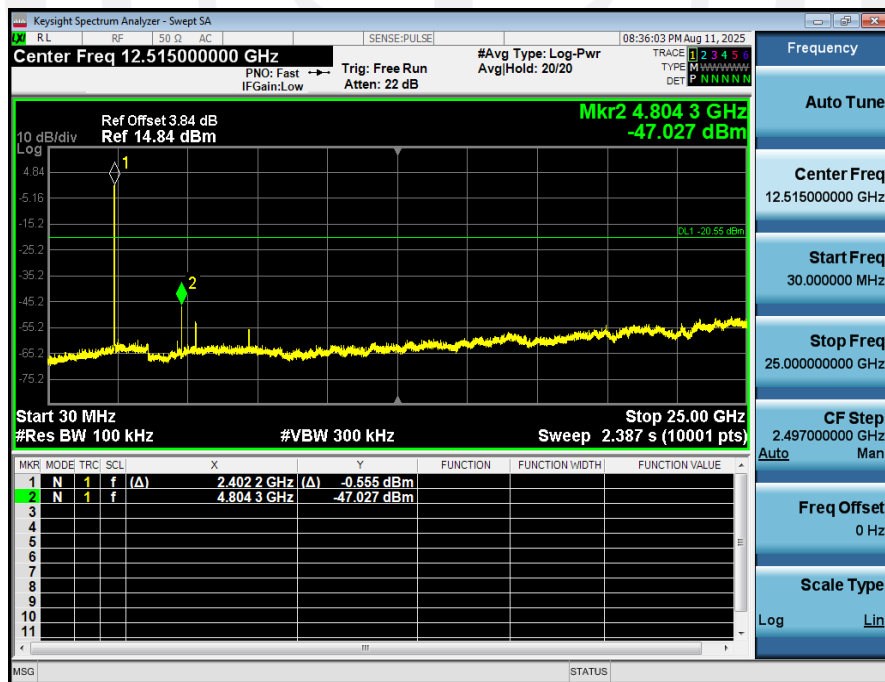

1_Reference_Level_NVNT_ANT1_1-DH1_2441_00




2_Spurious_Emissions_NVNT_ANT1_1-DH1_2441_00

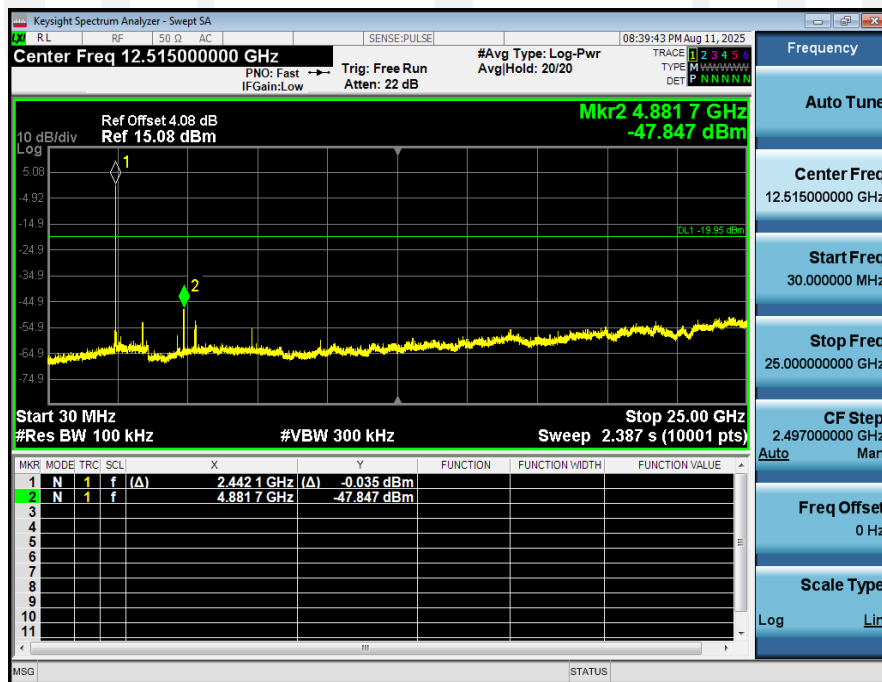

1_Reference_Level_NVNT_ANT1_1-DH1_2480_00




2_Spurious_Emissions_NVNT_ANT1_1-DH1_2480_00

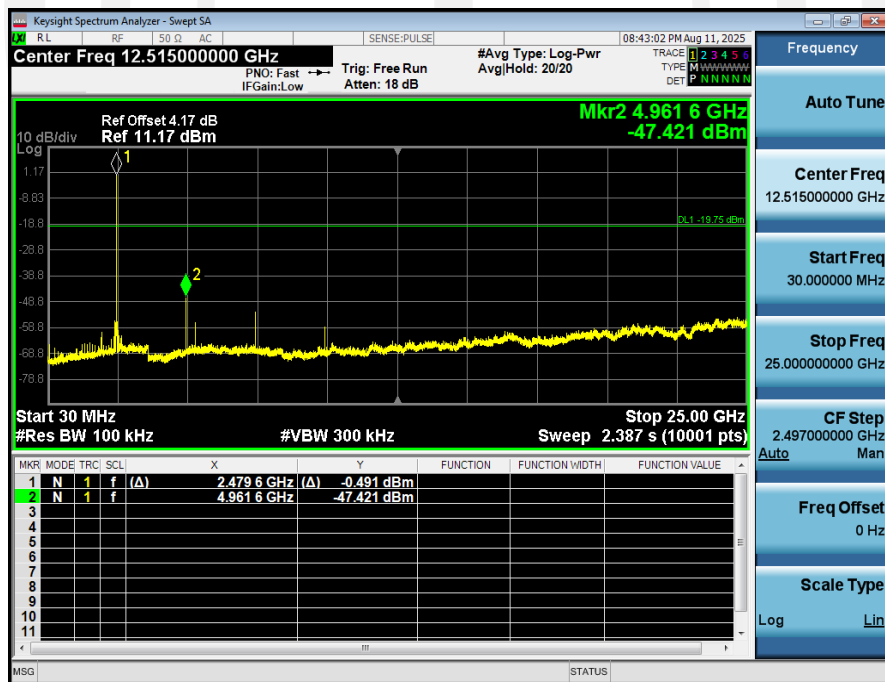

1_Reference_Level_NVNT_ANT1_2-DH1_2402_00




2_Spurious_Emissions_NVNT_ANT1_2-DH1_2402_00

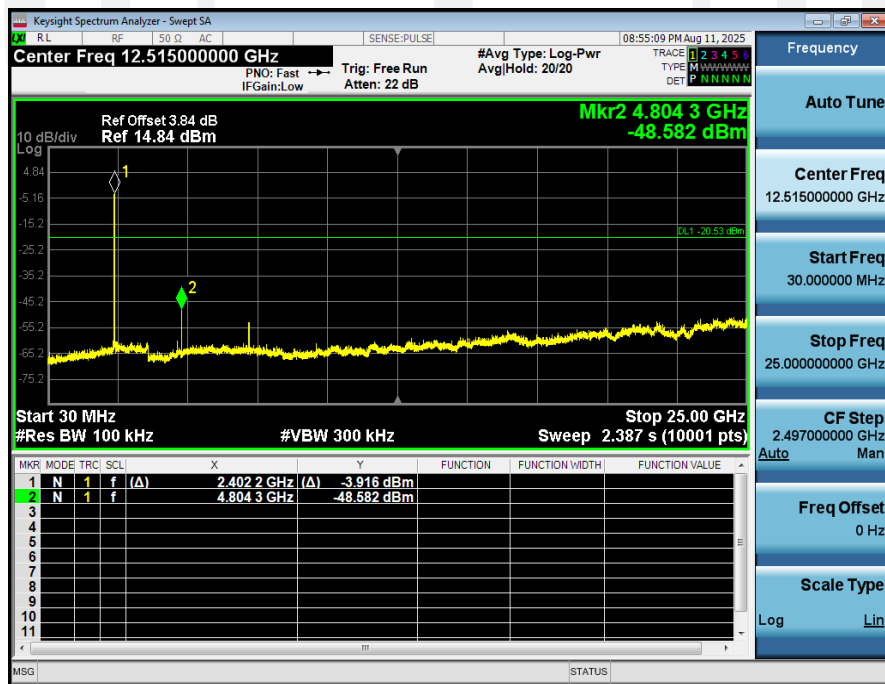

1_Reference_Level_NVNT_ANT1_2-DH1_2441_00




2_Spurious_Emissions_NVNT_ANT1_2-DH1_2441_00

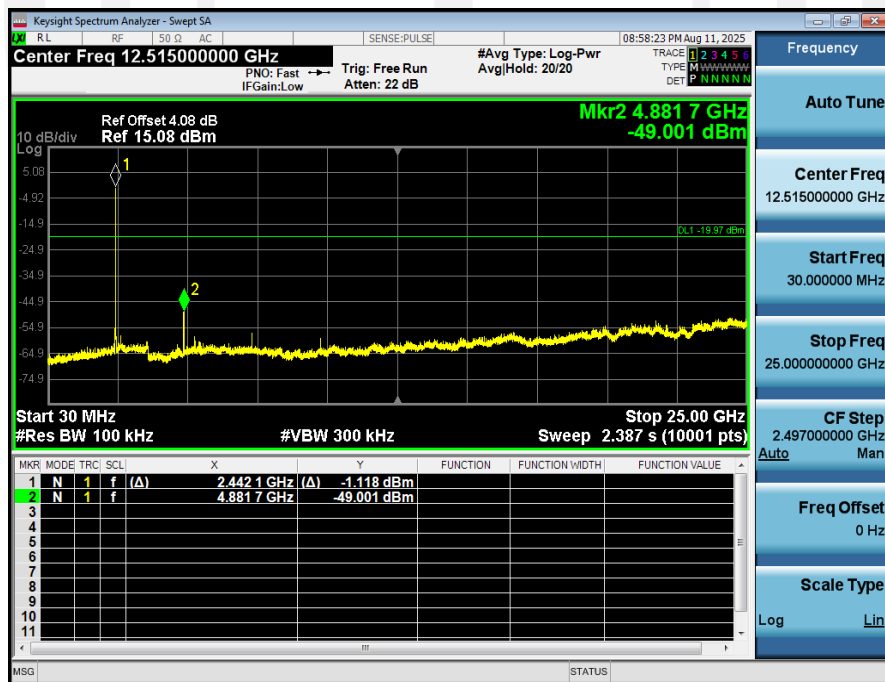

1_Reference_Level_NVNT_ANT1_2-DH1_2480_00




2_Spurious_Emissions_NVNT_ANT1_2-DH1_2480_00

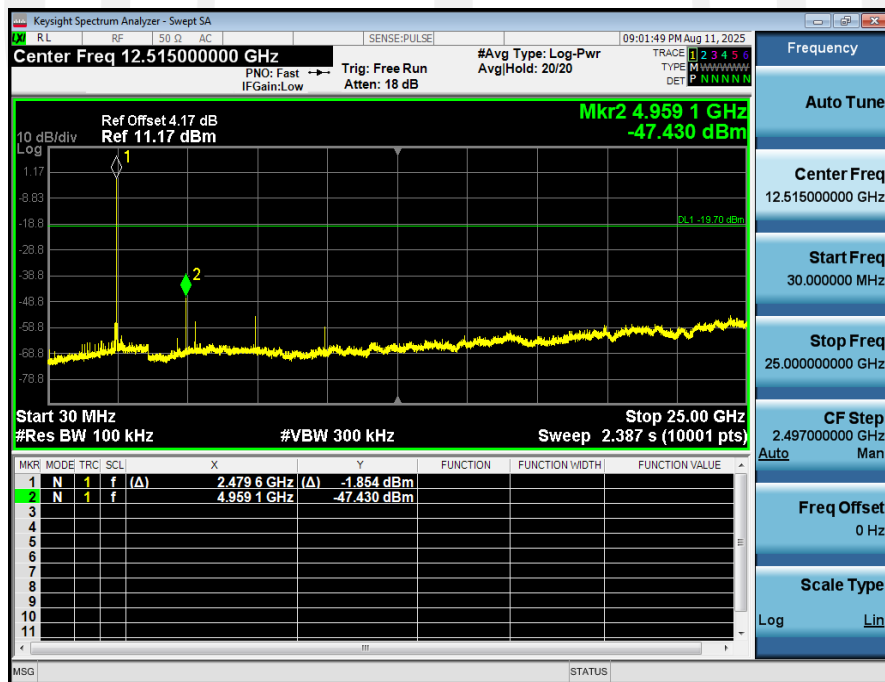

1_Reference_Level_NVNT_ANT1_3-DH1_2402_00




2_Spurious_Emissions_NVNT_ANT1_3-DH1_2402_00

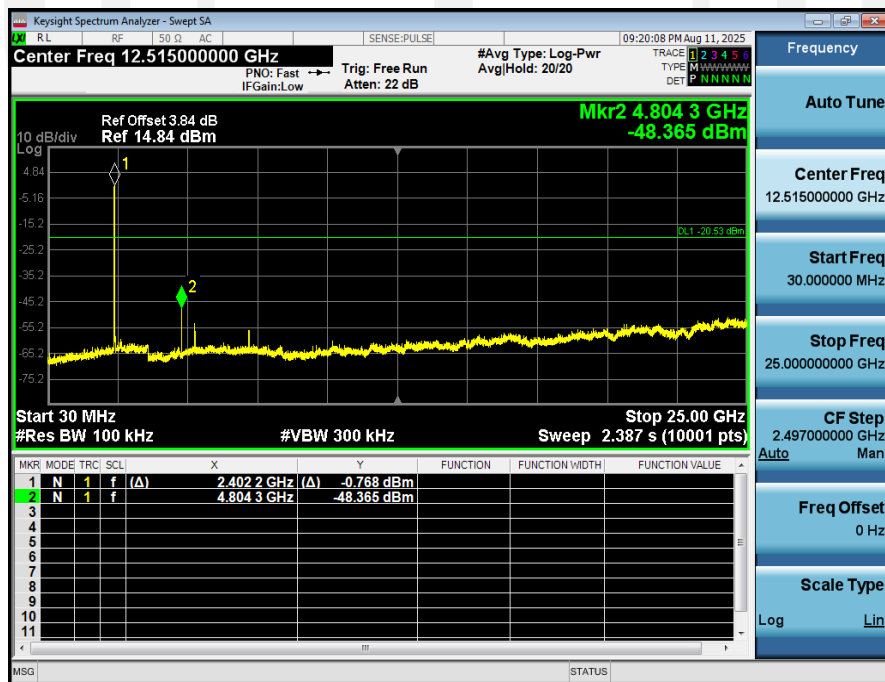

1_Reference_Level_NVNT_ANT1_3-DH1_2441_00




2_Spurious_Emissions_NVNT_ANT1_3-DH1_2441_00

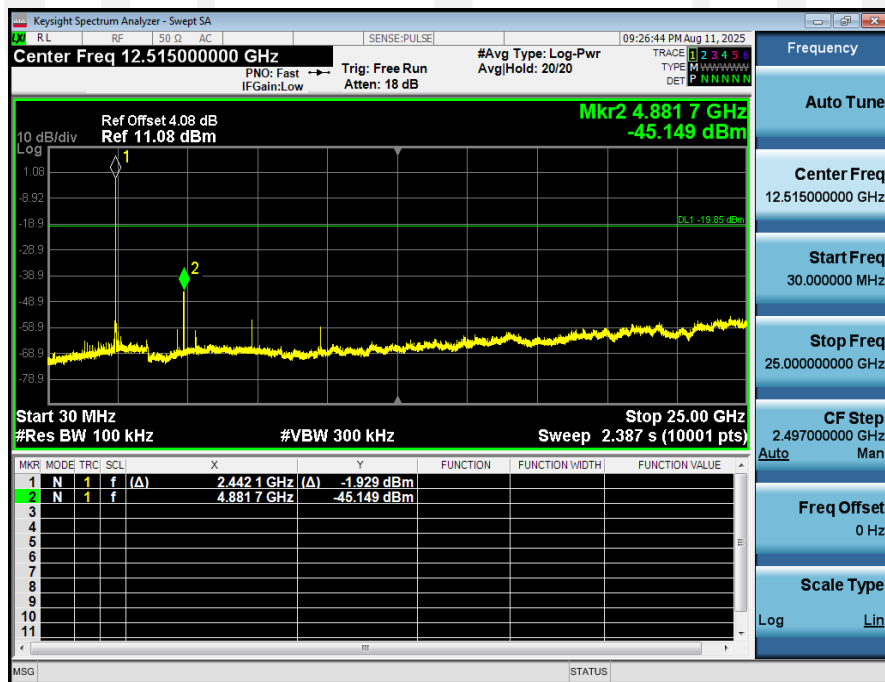

1_Reference_Level_NVNT_ANT1_3-DH1_2480_00



2_Spurious_Emissions_NVNT_ANT1_3-DH1_2480_00

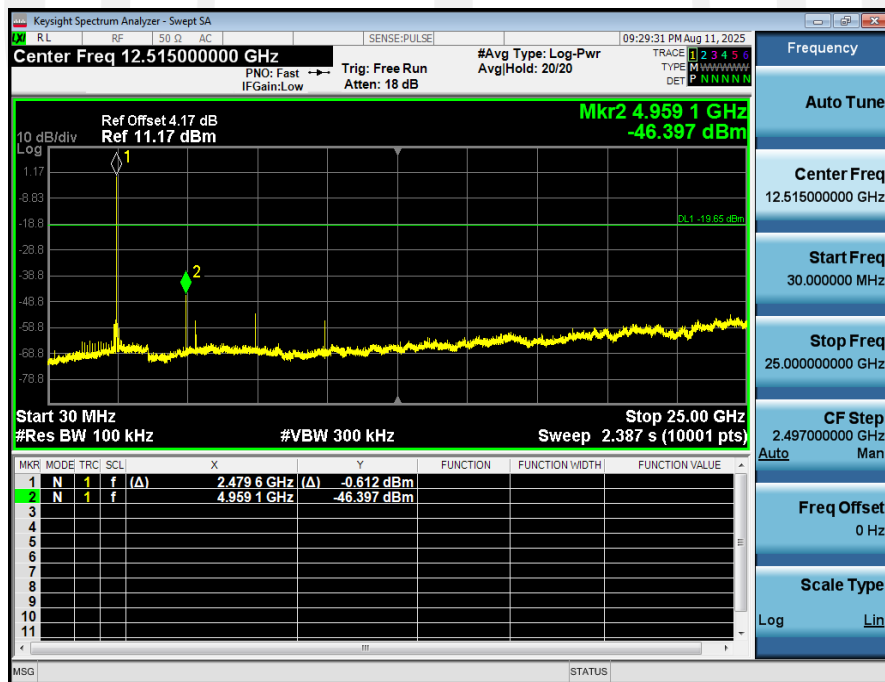

9. Radiated Emissions

9.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	


Note: The peak limit is 20 dB higher than the average limit

9.2. Block Diagram of Test setup


9.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

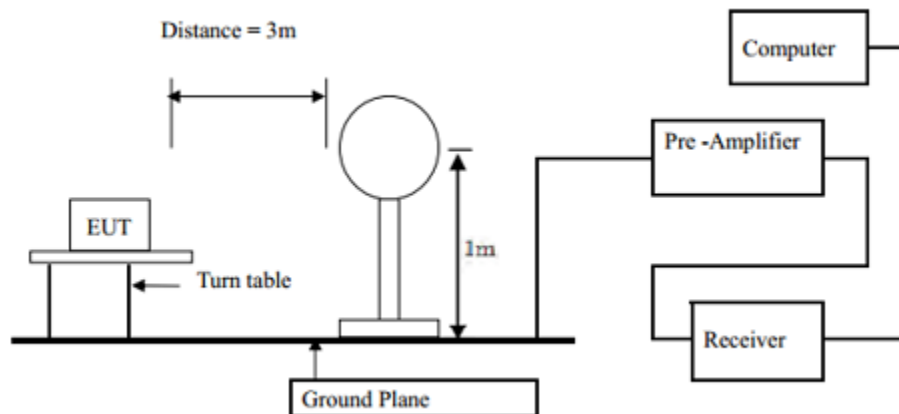

9.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

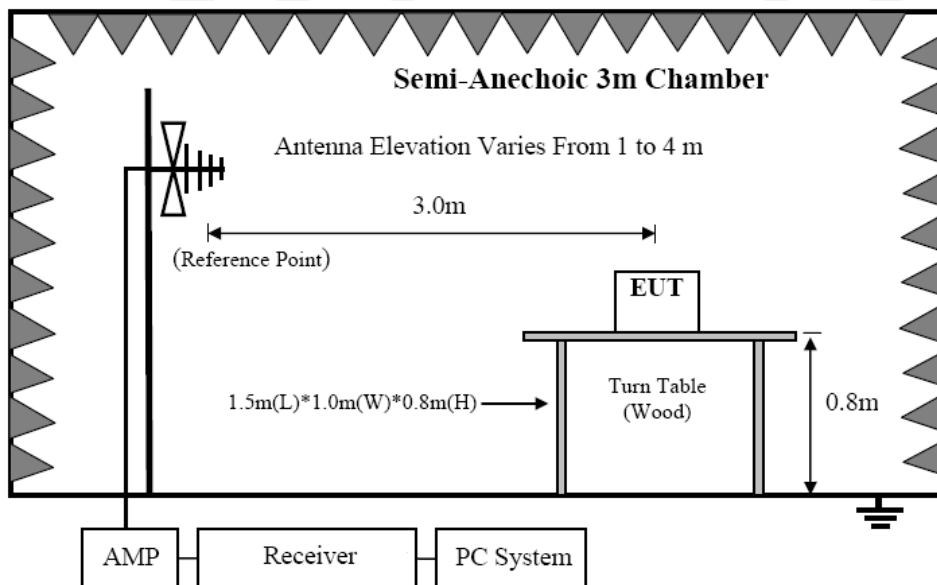

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

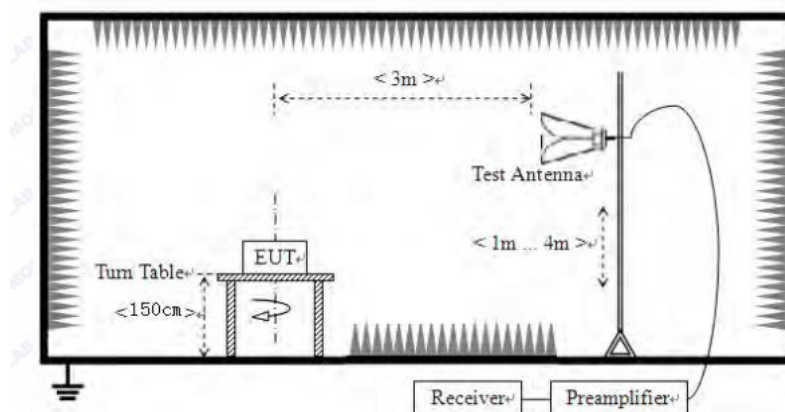

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

9.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

9.4. Test Results

We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.


Detailed information please see the following page.

From 9KHz to 30MHz:	
Test Date : 2025.8.12	Temperature : 26°C
Test Engineer : Jensen Wang	Humidity : 54%
Test Mode : GFSK, $\pi/4$ DQPSK, 8 DPSK mode	
Test Results : PASS	
Note:	The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz:	
Test Date : 2025.8.12	Temperature : 26°C
Test Engineer : Jensen Wang	Humidity : 54%
Test Mode : GFSK, $\pi/4$ DQPSK, 8 DPSK mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz (DC 3.7V) was listed in this report.




Polarization: Vertical

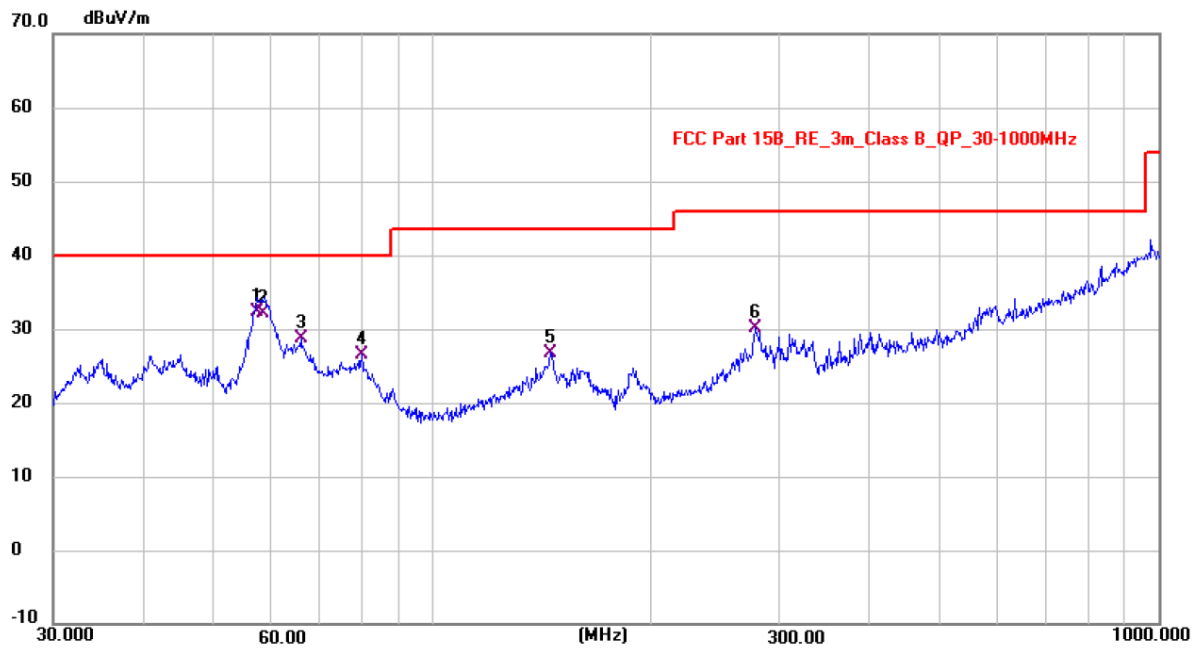

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	57.2918	19.01	13.39	32.40	40.00	-7.60	QP
2	58.6126	18.86	13.25	32.11	40.00	-7.89	QP
3	65.8031	16.20	12.52	28.72	40.00	-11.28	QP
4	79.8353	16.99	9.50	26.49	40.00	-13.51	QP
5	145.4780	12.60	14.02	26.62	43.50	-16.88	QP
6	278.5547	15.60	14.48	30.08	46.00	-15.92	QP

Note: Level = Reading + Factor Margin = Level - Limit

Polarization: Horizontal

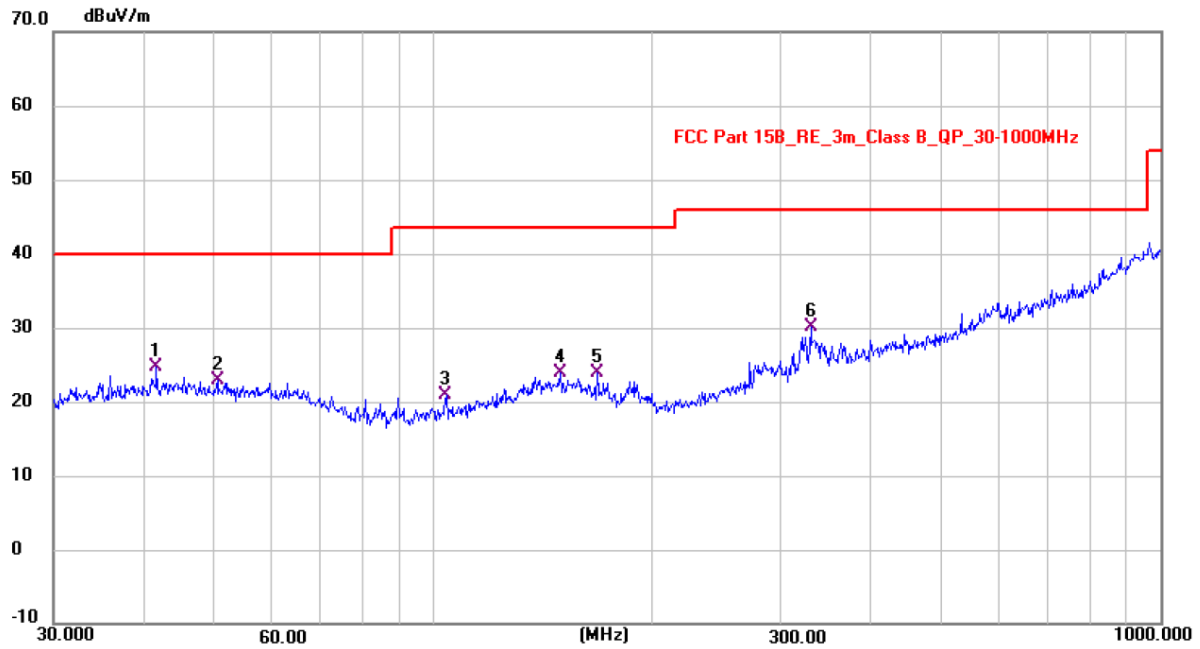

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	41.6948	10.14	14.50	24.64	40.00	-15.36	QP
2	50.5860	8.87	14.09	22.96	40.00	-17.04	QP
3	104.1701	9.99	11.01	21.00	43.50	-22.50	QP
4	149.5513	9.88	14.11	23.99	43.50	-19.51	QP
5	168.3400	10.37	13.54	23.91	43.50	-19.59	QP
6	330.7742	14.41	15.77	30.18	46.00	-15.82	QP

Note: Level = Reading + Factor Margin = Level - Limit

From 1GHz to 25GHz:	
Test Date : 2025.8.12	Temperature : 26°C
Test Engineer : Jensen Wang	Humidity : 54%
Test Mode : GFSK, $\pi/4$ DQPSK, 8 DPSK mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.


Test Mode : GFSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	59.14	-13.25	45.89	74.00	-28.11	Peak
2	4804	V	49.20	-13.25	35.95	54.00	-18.05	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	54.61	-13.25	41.36	74.00	-32.64	Peak
6	4804	H	48.29	-13.25	35.04	54.00	-18.96	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : GFSK TX Mid								
1	4882	V	59.70	-12.98	46.72	74.00	-27.28	Peak
2	4882	V	48.38	-12.98	35.40	54.00	-18.60	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	58.20	-12.98	45.22	74.00	-28.78	Peak
6	4882	H	47.00	-12.98	34.02	54.00	-19.98	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : GFSK TX High								
1	4960	V	59.87	-12.70	47.17	74.00	-26.83	Peak
2	4960	V	49.59	-12.70	36.89	54.00	-17.11	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	57.56	-12.70	44.86	74.00	-29.14	Peak
6	4960	H	46.03	-12.70	33.33	54.00	-20.67	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : $\pi/4$ DQPSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	57.80	-13.25	44.55	74.00	-29.45	Peak
2	4804	V	47.54	-13.25	34.29	54.00	-19.71	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	57.98	-13.25	44.73	74.00	-29.27	Peak
6	4804	H	46.91	-13.25	33.66	54.00	-20.34	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : $\pi/4$ DQPSK TX Mid								
1	4882	V	56.93	-12.98	43.95	74.00	-30.05	Peak
2	4882	V	48.46	-12.98	35.48	54.00	-18.52	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	58.20	-12.98	45.22	74.00	-28.78	Peak
6	4882	H	48.29	-12.98	35.31	54.00	-18.69	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : $\pi/4$ DQPSK TX High								
1	4960	V	57.39	-12.70	44.69	74.00	-29.31	Peak
2	4960	V	47.61	-12.70	34.91	54.00	-19.09	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	57.24	-12.70	44.54	74.00	-29.46	Peak
6	4960	H	45.99	-12.70	33.29	54.00	-20.71	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.							

Test Mode : 8 DPSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	56.91	-13.25	43.66	74.00	-30.34	Peak
2	4804	V	47.06	-13.25	33.81	54.00	-20.19	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	58.12	-13.25	44.87	74.00	-29.13	Peak
6	4804	H	45.19	-13.25	31.94	54.00	-22.06	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : 8 DPSK TX Mid								
1	4882	V	60.08	-12.98	47.10	74.00	-26.90	Peak
2	4882	V	50.34	-12.98	37.36	54.00	-16.64	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	55.11	-12.98	42.13	74.00	-31.87	Peak
6	4882	H	47.65	-12.98	34.67	54.00	-19.33	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : 8 DPSK TX High								
1	4960	V	56.45	-12.70	43.75	74.00	-30.25	Peak
2	4960	V	47.85	-12.70	35.15	54.00	-18.85	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	58.29	-12.70	45.59	74.00	-28.41	Peak
6	4960	H	47.26	-12.70	34.56	54.00	-19.44	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

10. Band Edge Test

10.1. Block Diagram of Test Setup

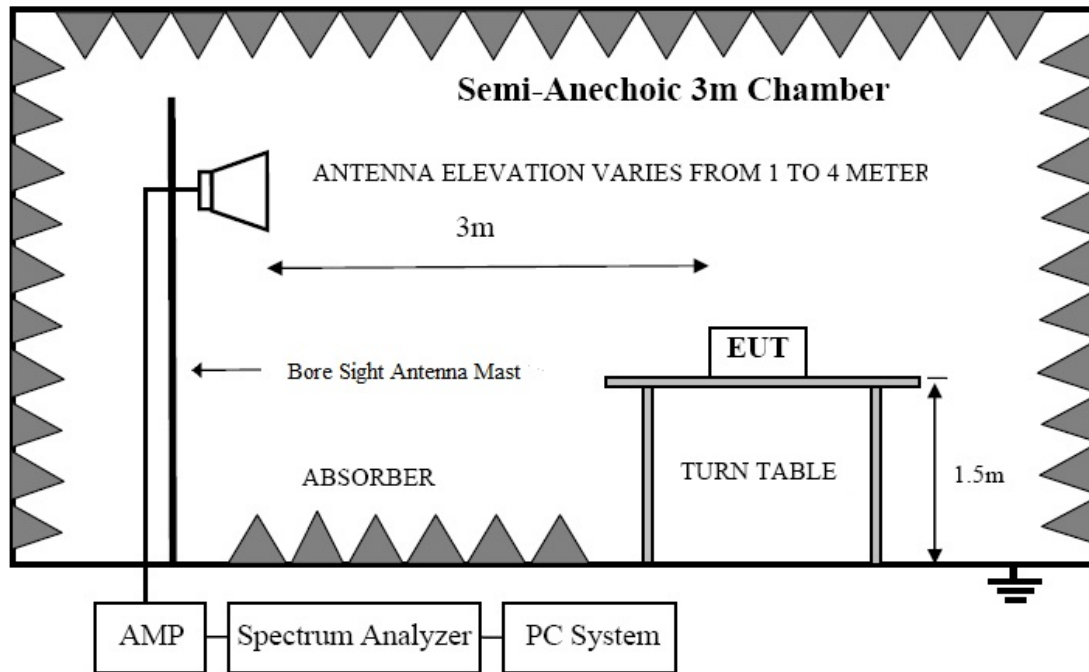

10.2. Test Limit

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

10.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.

All restriction band and non- restriction band have been tested, only worse case is reported.

10.4. Test Results

Test Date	: 2025.8.12	Temperature	: 26°C
Test Engineer	: Jensen Wang	Humidity	: 54%
Test Results	: PASS		


Frequency Range : 2310MHz~2410MHz								
Test Mode : GFSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	60.21	-20.45	39.76	74.00	-34.24	Peak
2	2390	H	45.42	-20.45	24.97	54.00	-29.03	Avg
3	2400	H	61.71	-20.41	41.30	74.00	-32.70	Peak
4	2400	H	52.19	-20.41	31.78	54.00	-22.22	Avg
1	2390	V	61.24	-20.45	40.79	74.00	-33.21	Peak
2	2390	V	50.01	-20.45	29.56	54.00	-24.44	Avg
3	2400	V	64.18	-20.41	43.77	74.00	-30.23	Peak
4	2400	V	54.18	-20.41	33.77	54.00	-20.23	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : GFSK TX 2480MHz								
1	2483.5	H	60.93	-20.15	40.78	74.00	-33.22	Peak
2	2483.5	H	48.76	-20.15	28.61	54.00	-25.39	Avg
1	2483.5	V	64.79	-20.15	44.64	74.00	-29.36	Peak
2	2483.5	V	55.41	-20.15	35.26	54.00	-18.74	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

Frequency Range : 2310MHz~2410MHz								
Test Mode : $\pi/4$ DQPSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	61.07	-20.45	40.62	74.00	-33.38	Peak
2	2390	H	48.74	-20.45	28.29	54.00	-25.71	Avg
3	2400	H	63.49	-20.41	43.08	74.00	-30.92	Peak
4	2400	H	50.55	-20.41	30.14	54.00	-23.86	Avg
1	2390	V	63.90	-20.45	43.45	74.00	-30.55	Peak
2	2390	V	50.97	-20.45	30.52	54.00	-23.48	Avg
3	2400	V	64.13	-20.41	43.72	74.00	-30.28	Peak
4	2400	V	52.46	-20.41	32.05	54.00	-21.95	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : $\pi/4$ DQPSK TX 2480MHz								
1	2483.5	H	62.80	-20.15	42.65	74.00	-31.35	Peak
2	2483.5	H	51.21	-20.15	31.06	54.00	-22.94	Avg
1	2483.5	V	66.16	-20.15	46.01	74.00	-27.99	Peak
2	2483.5	V	55.09	-20.15	34.94	54.00	-19.06	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

Frequency Range : 2310MHz~2410MHz								
Test Mode : 8 DPSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	58.27	-20.45	37.82	74.00	-36.18	Peak
2	2390	H	45.55	-20.45	25.10	54.00	-28.90	Avg
3	2400	H	64.44	-20.41	44.03	74.00	-29.97	Peak
4	2400	H	53.55	-20.41	33.14	54.00	-20.86	Avg
1	2390	V	60.80	-20.45	40.35	74.00	-33.65	Peak
2	2390	V	49.76	-20.45	29.31	54.00	-24.69	Avg
3	2400	V	64.94	-20.41	44.53	74.00	-29.47	Peak
4	2400	V	53.46	-20.41	33.05	54.00	-20.95	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : 8 DPSK TX 2480MHz								
1	2483.5	H	60.35	-20.15	40.20	74.00	-33.80	Peak
2	2483.5	H	51.68	-20.15	31.53	54.00	-22.47	Avg
1	2483.5	V	63.42	-20.15	43.27	74.00	-30.73	Peak
2	2483.5	V	52.96	-20.15	32.81	54.00	-21.19	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

11. Power Line Conducted Emissions

11.1. Block Diagram of Test Setup

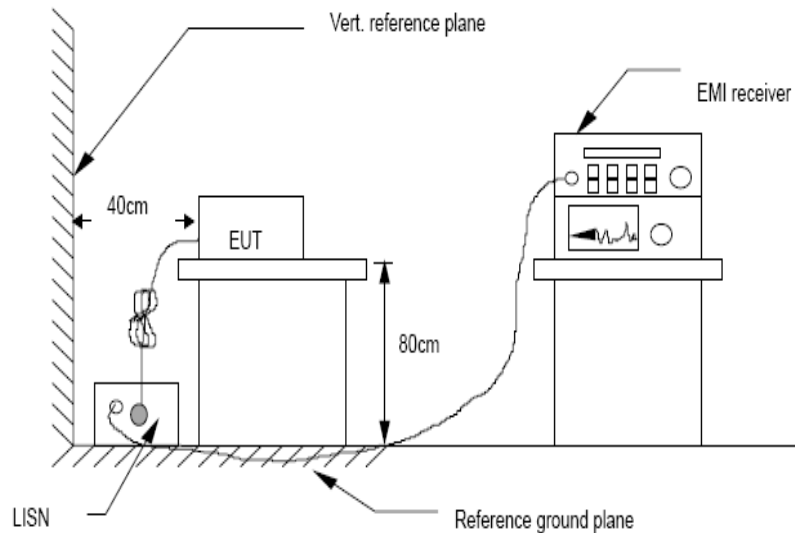

11.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.


11.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

11.4. Test Results

Test Date : 2025.8.12		Temperature : 26°C
Test Engineer : Jensen Wang		Humidity : 54%
Test Mode : GFSK mode		
Test Results : PASS		
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out. 4. All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz (AC 120V/ 60Hz) was listed in this report.	


Polarization: L

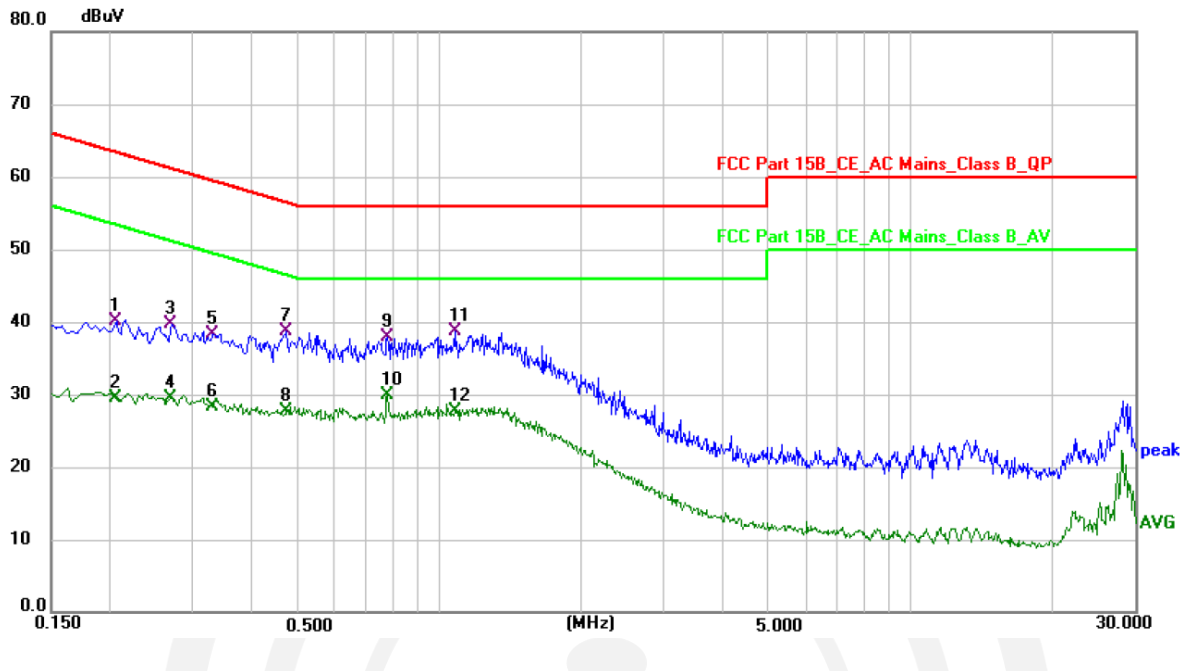

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2060	30.08	9.95	40.03	63.37	-23.34	QP
2	0.2060	19.57	9.95	29.52	53.37	-23.85	AVG
3	0.2700	29.67	9.98	39.65	61.12	-21.47	QP
4	0.2700	19.60	9.98	29.58	51.12	-21.54	AVG
5	0.3300	28.49	9.88	38.37	59.45	-21.08	QP
6	0.3300	18.52	9.88	28.40	49.45	-21.05	AVG
7	0.4740	28.81	9.83	38.64	56.44	-17.80	QP
8	0.4740	17.85	9.83	27.68	46.44	-18.76	AVG
9	0.7780	28.39	9.42	37.81	56.00	-18.19	QP
10 *	0.7780	20.43	9.42	29.85	46.00	-16.15	AVG
11	1.0820	29.31	9.41	38.72	56.00	-17.28	QP
12	1.0820	18.25	9.41	27.66	46.00	-18.34	AVG

Note: Level = Reading + Factor Margin = Level - Limit

Polarization: N

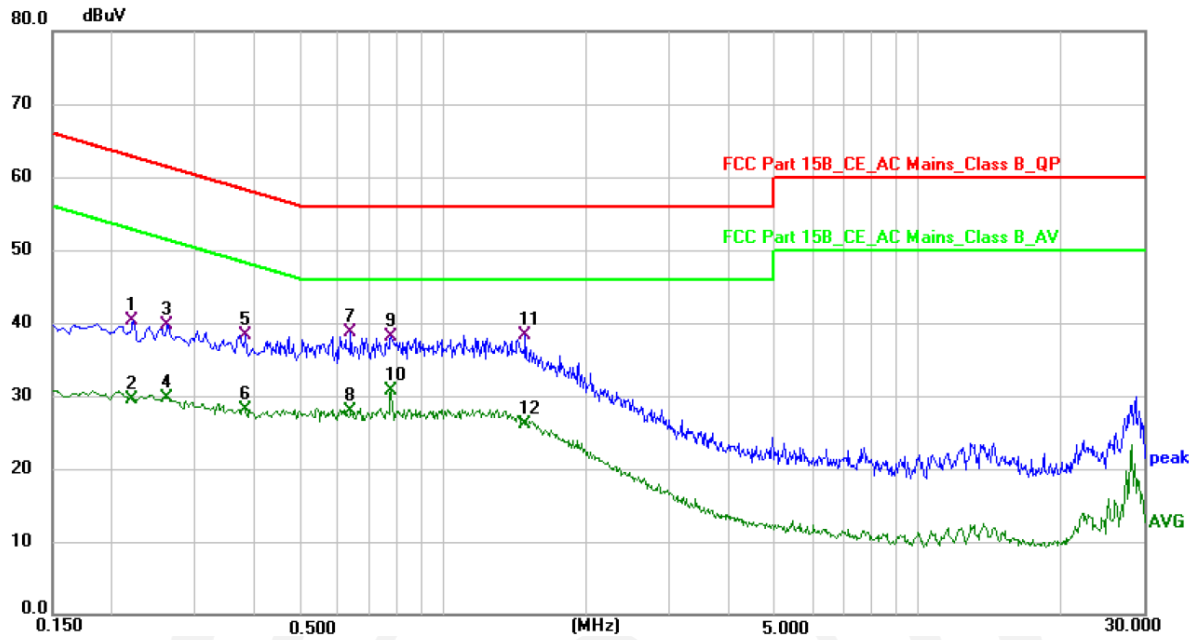

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2220	30.30	9.99	40.29	62.74	-22.45	QP
2	0.2220	19.47	9.99	29.46	52.74	-23.28	AVG
3	0.2620	29.91	9.88	39.79	61.37	-21.58	QP
4	0.2620	19.84	9.88	29.72	51.37	-21.65	AVG
5	0.3820	28.76	9.59	38.35	58.24	-19.89	QP
6	0.3820	18.56	9.59	28.15	48.24	-20.09	AVG
7	0.6380	28.96	9.78	38.74	56.00	-17.26	QP
8	0.6380	18.09	9.78	27.87	46.00	-18.13	AVG
9	0.7780	28.37	9.71	38.08	56.00	-17.92	QP
10 *	0.7780	20.90	9.71	30.61	46.00	-15.39	AVG
11	1.4900	28.92	9.39	38.31	56.00	-17.69	QP
12	1.4900	16.70	9.39	26.09	46.00	-19.91	AVG

Note: Level = Reading + Factor Margin = Level - Limit

12. Antenna Requirements

12.1.Limit

For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2.Result

The EUT antenna is internal antenna. It complies with the standard requirement.



13.Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

14.Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----

