

DX-CP28 Antenna Data Sheet


PCB Antenna

Manufacturer: SZHUHAI JIELI TECHNOLOGY CO.,LTD

Add: 333 KexingRd, NanpingTown, XiangzhouDist,Zhuhai City,

Guangdong Province, China

1. Antenna Size Diagram

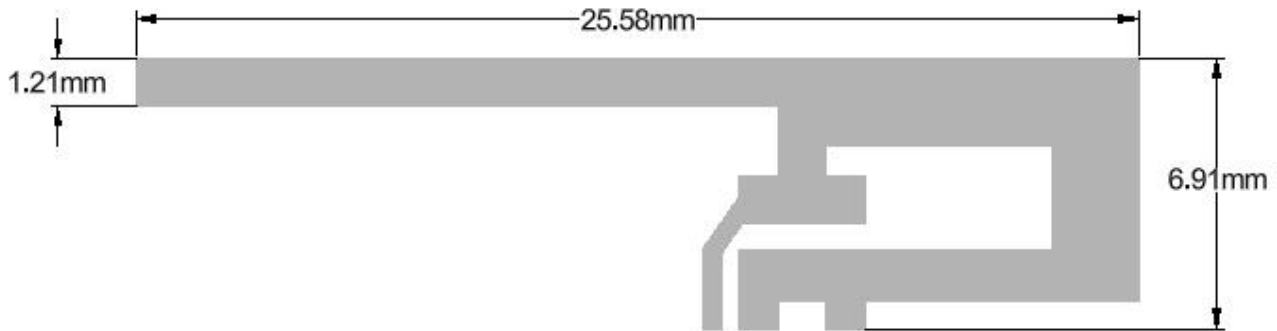

2. Antenna Efficiency And Gain




Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-4.60	-4.45	-4.16	-3.91	-4.10	-4.42	-4.89	-5.15	-5.56	-5.80	-6.19
Gain (dBi)	-0.99	-0.84	-0.50	-0.10	-0.53	-0.92	-1.32	-1.34	-1.61	-1.76	-2.26
Efficiency (%)	34.69	35.87	38.35	40.67	38.90	36.10	32.41	30.53	27.81	26.29	24.05
Directivity (dB)	3.60	3.61	3.67	3.81	3.57	3.51	3.57	3.81	3.94	4.04	3.93
Peak Gain Position (Theta)	120.00	120.00	120.00	120.00	120.00	120.00	120.00	120.00	120.00	120.00	120.00
Peak Gain Position (Phi)	270.00	270.00	270.00	270.00	270.00	270.00	270.00	270.00	270.00	270.00	270.00
Efficiency ThetaPol (%)	22.46	23.33	25.01	26.51	26.22	24.45	21.97	20.62	18.76	17.73	16.25
Efficiency PhiPol (%)	12.23	12.55	13.34	14.15	12.68	11.65	10.44	9.91	9.05	8.56	7.80
Upper Hem. Efficiency (%)	16.65	17.05	18.15	19.24	18.54	17.03	15.10	14.08	12.74	11.99	10.95
Lower Hem. Efficiency (%)	18.04	18.82	20.20	21.43	20.37	19.07	17.32	16.45	15.07	14.31	13.09

T90(H)Roundness	13.42	14.01	14.68	14.90	13.06	14.30	15.22	16.35	17.22	17.77	19.01
E1(XZ)Wave flap width	89.00	87.00	65.00	62.00	57.00	58.00	77.00	76.00	76.00	76.00	77.00
E1(XZ)front-to-back ratio	4.69	4.81	5.17	5.38	5.62	5.42	5.08	4.86	4.49	4.28	4.12
E2(YZ)Wave flap width	62.00	60.00	60.00	59.00	59.00	57.00	56.00	54.00	54.00	55.00	56.00
E2(YZ)front-to-back ratio	4.14	3.97	3.83	3.80	3.33	3.19	3.08	3.29	3.36	3.38	3.28
Axis ratio at maximum gain(P)	11.64	11.14	10.48	9.99	8.49	8.21	8.00	7.84	7.67	7.55	7.59
vertex(Theta=0)Axis ratio(P)	23.32	19.24	11.31	9.01	12.83	12.84	13.29	14.39	15.52	18.66	21.24
Elevation angle 10 degrees worst (large) axis ratio(P)	49.84	52.52	52.07	52.01	55.35	55.09	51.77	51.29	53.43	54.14	55.70
Hc(XY)Wave flap width	228.00	227.00	228.00	231.00	238.00	234.00	231.00	227.00	223.00	223.00	224.00
Hc(XY)Front to back ratio	0.54	0.52	0.42	0.13	0.07	0.31	0.44	0.64	0.69	0.66	0.75
Left-hand circular polarization efficiency(%)	18.53	19.32	20.68	21.50	19.99	18.77	16.82	15.58	14.05	13.12	11.98
Left-hand circular polarization efficiency(%)	16.16	16.56	17.67	19.16	18.92	17.33	15.59	14.96	13.77	13.17	12.06


DX-CP28 Antenna data sheet

2400.0MHz H+V, Eff: 34.7%


Back View

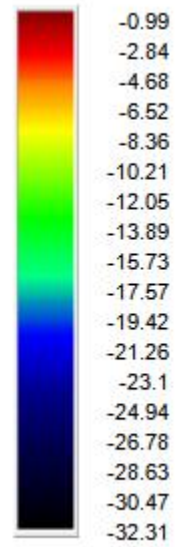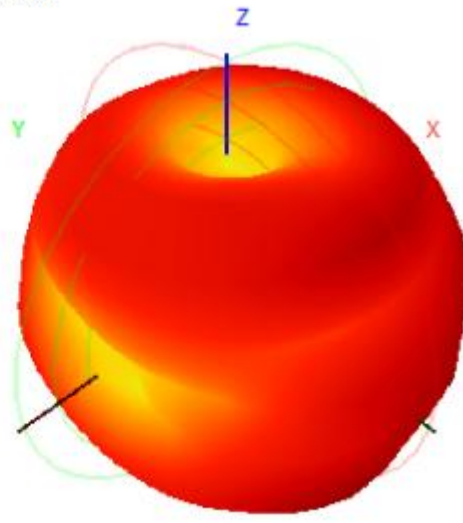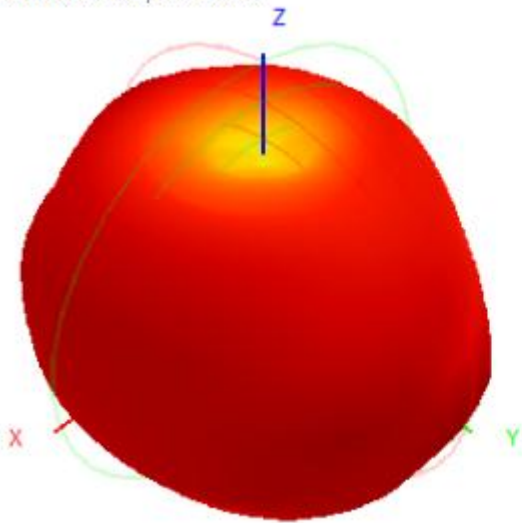


2400.0MHz Total(E1-XZ), Max=-2.23dBi

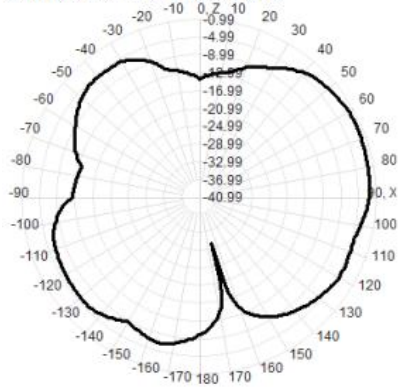

2400.0MHz Total(E2-YZ), Max=-0.99dBi

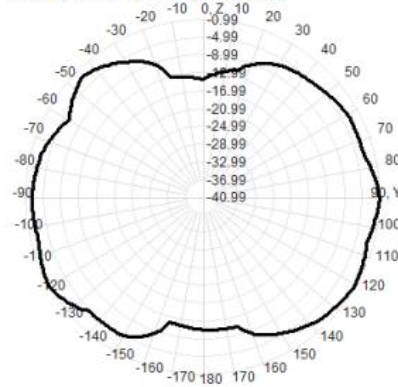


Total(H-XY), Max=-1.33dBi, CirD=13.42

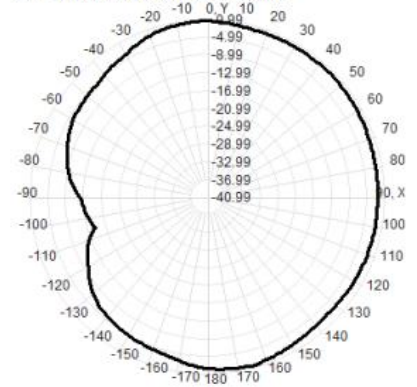

DX-CP28 Antenna data sheet

2450.0MHz H+V, Eff: 36.1%




Back View

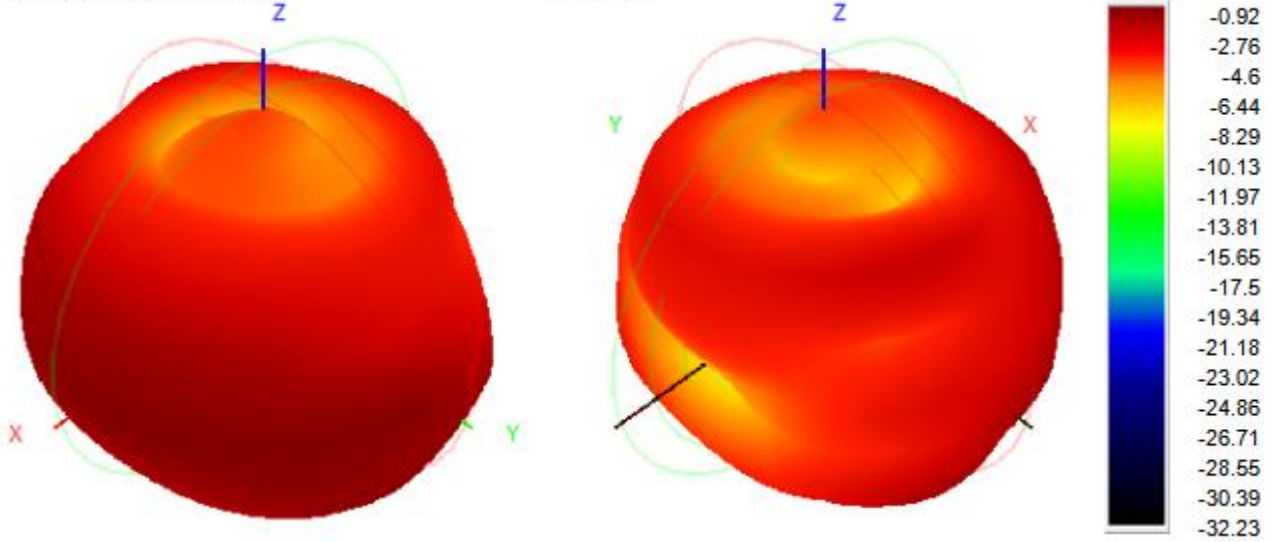

2450.0MHz Total(E1-XZ), Max=-1.28dBi

2450.0MHz Total(E2-YZ), Max=-0.92dBi




Total(H-XY), Max=-1.51dBi, CirD=14.30

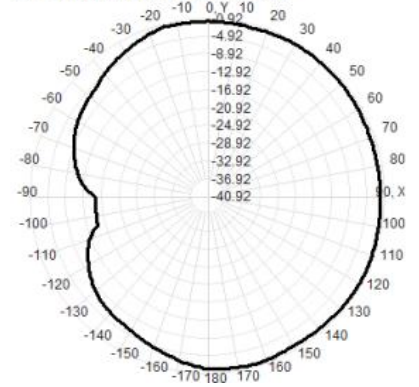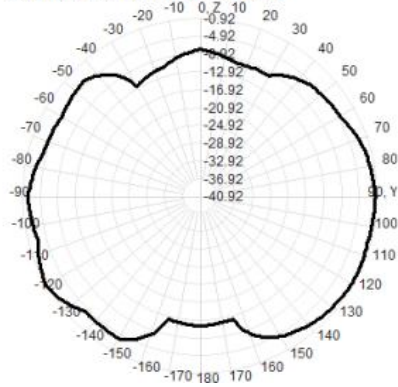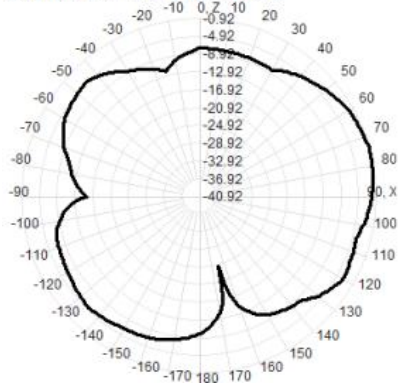


DX-CP28 Antenna data sheet

2500.0MHz H+V, Eff: 24.0%


Back View

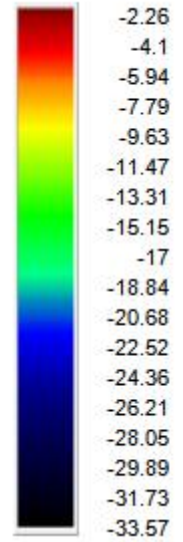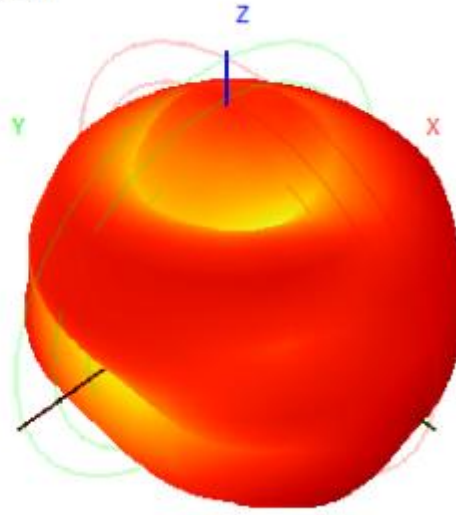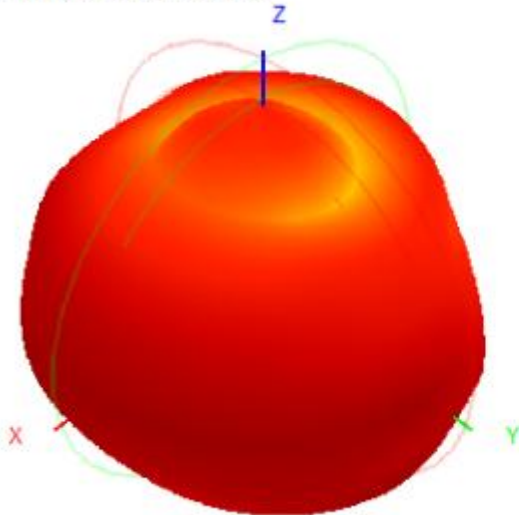


2500.0MHz Total(E1-XZ), Max=-3.38dBi

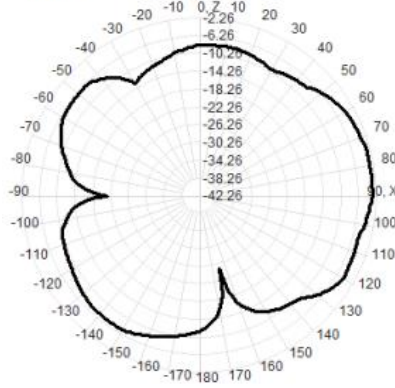

2500.0MHz Total(E2-YZ), Max=-2.26dBi

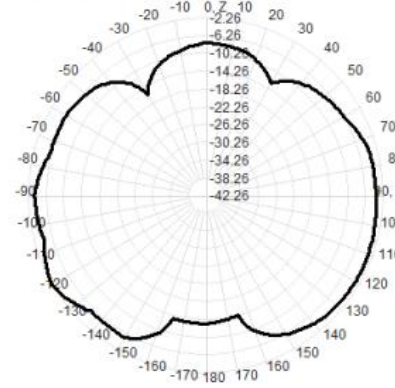


Total(H-XY), Max=-2.62dBi, CirD=19.01

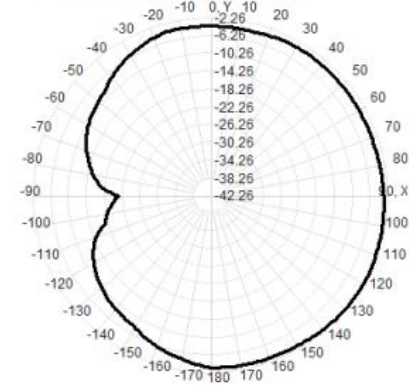

DX-CP28 Antenna data sheet

2430.0MHz H+V, Eff: 42.2%

Back View

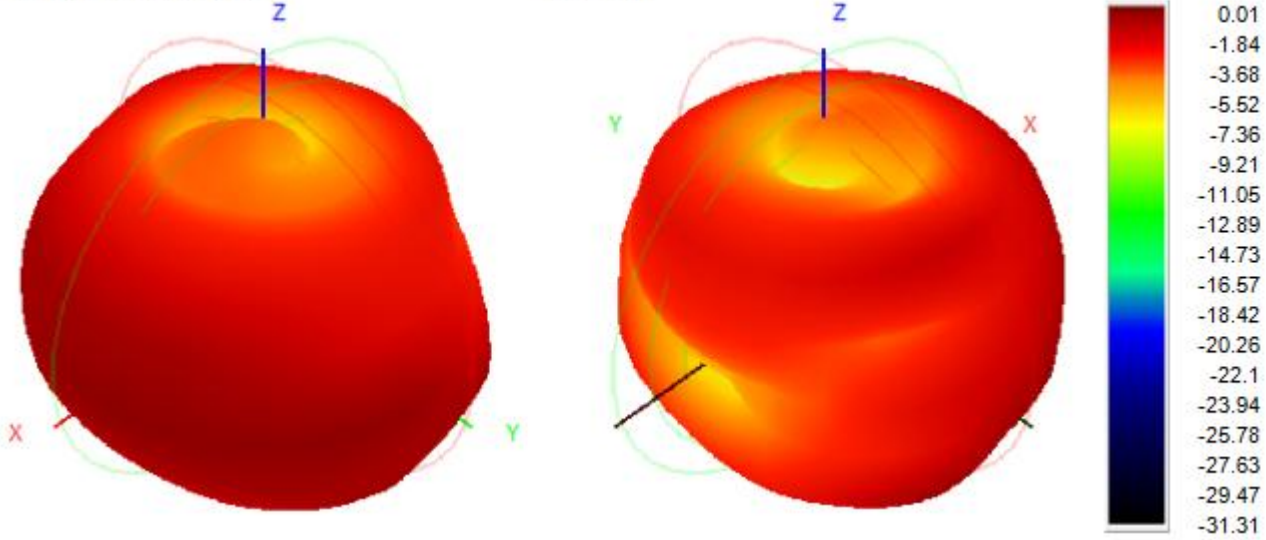

2430.0MHz Total(E1-XZ), Max=-0.68dBi

2430.0MHz Total(E2-YZ), Max=0.01dBi

Total(H-XY), Max=-0.70dBi, CirD=12.73

