



## Appendix A

### RF Test Data for 2.4GWIFI (Conducted Measurement)

**Product Name:** WIFI moving camera

**Test Model:** TY-01

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24.9° C   |
| Relative Humidity: | 52.3%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Can Kun   |
| Supervised by:     | Nick Peng |





## A.1 -6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | b    | 2412            | Ant1    | 7.608                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2437            | Ant1    | 7.619                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2462            | Ant1    | 8.444                 | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2412            | Ant1    | 16.334                | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2437            | Ant1    | 16.315                | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2462            | Ant1    | 16.31                 | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 17.247                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 17.251                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 16.863                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 35.63                 | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 35.641                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 35.056                | $\geq 0.5$                  | Pass    |





## Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1




-6dB Bandwidth NVNT b 2437MHz Ant1






## -6dB Bandwidth NVNT b 2462MHz Ant1

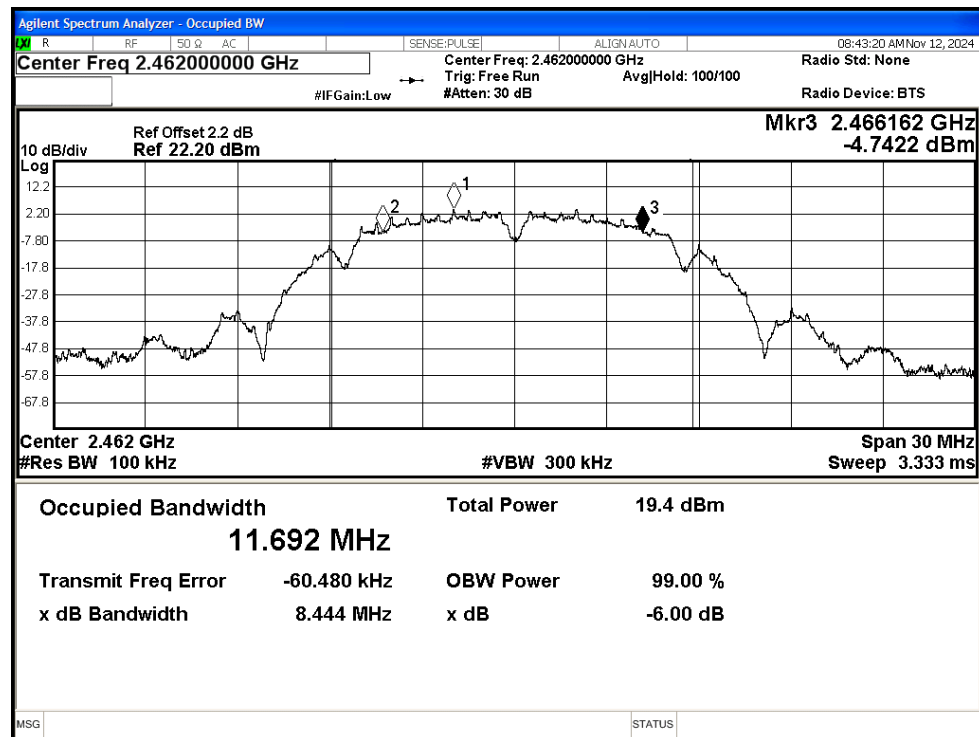


## -6dB Bandwidth NVNT g 2412MHz Ant1

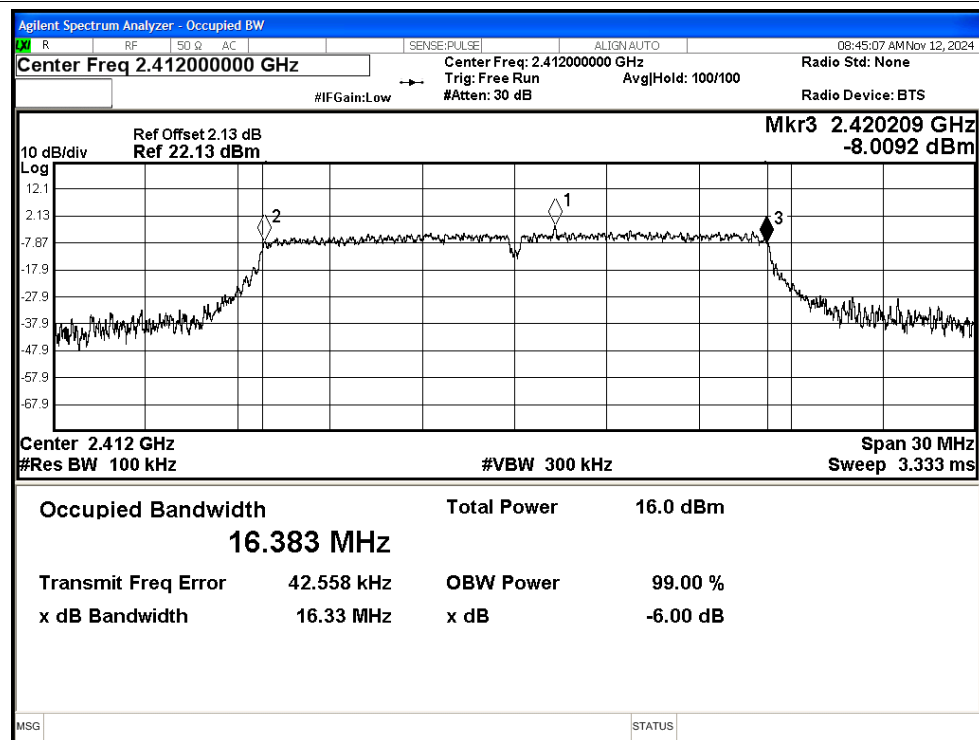




## -6dB Bandwidth NVNT g 2437MHz Ant1

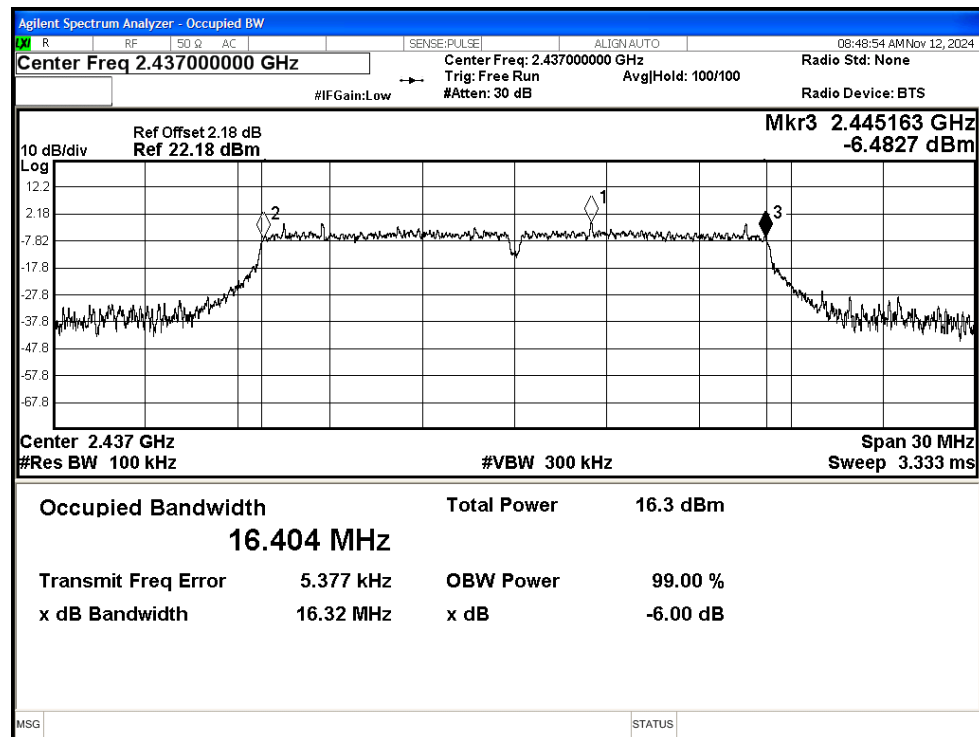


## -6dB Bandwidth NVNT g 2462MHz Ant1

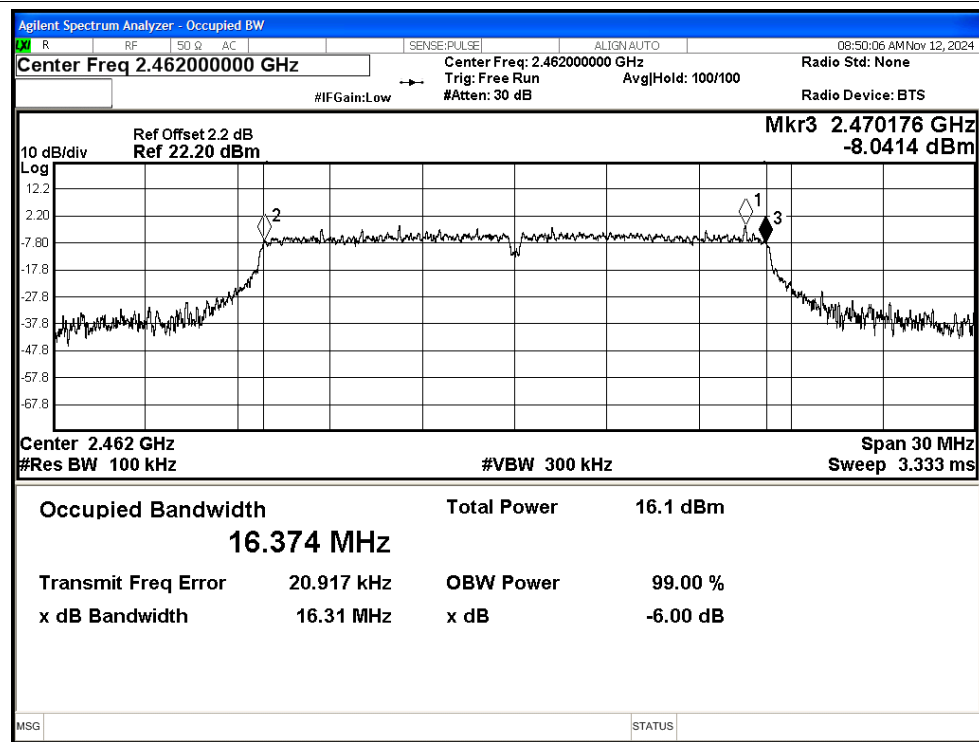




## -6dB Bandwidth NVNT n20 2412MHz Ant1

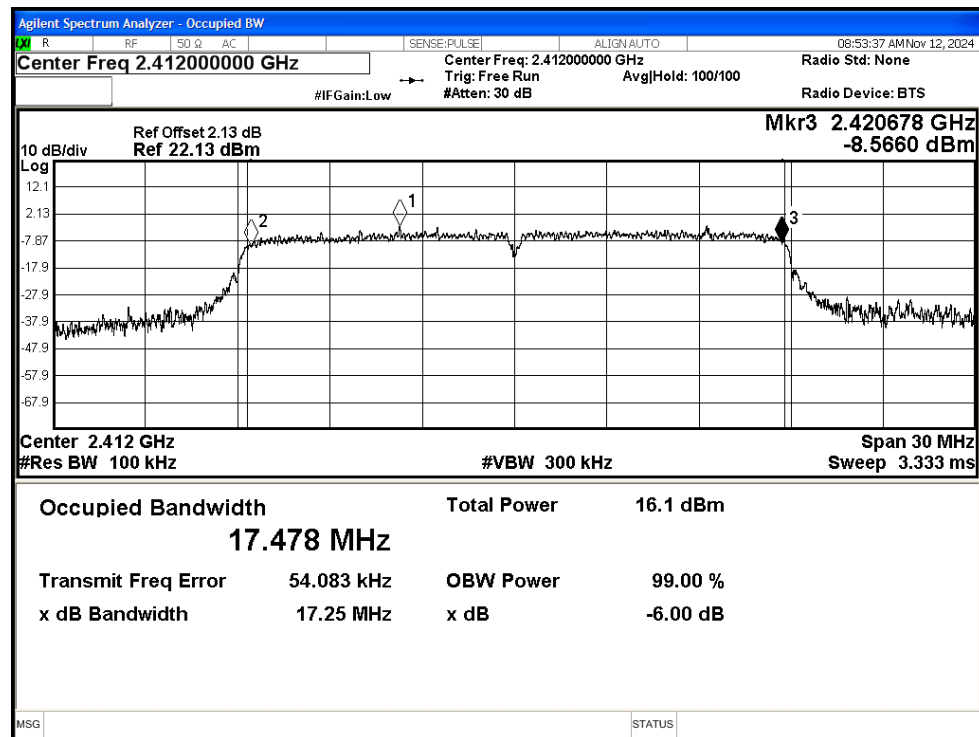


## -6dB Bandwidth NVNT n20 2437MHz Ant1

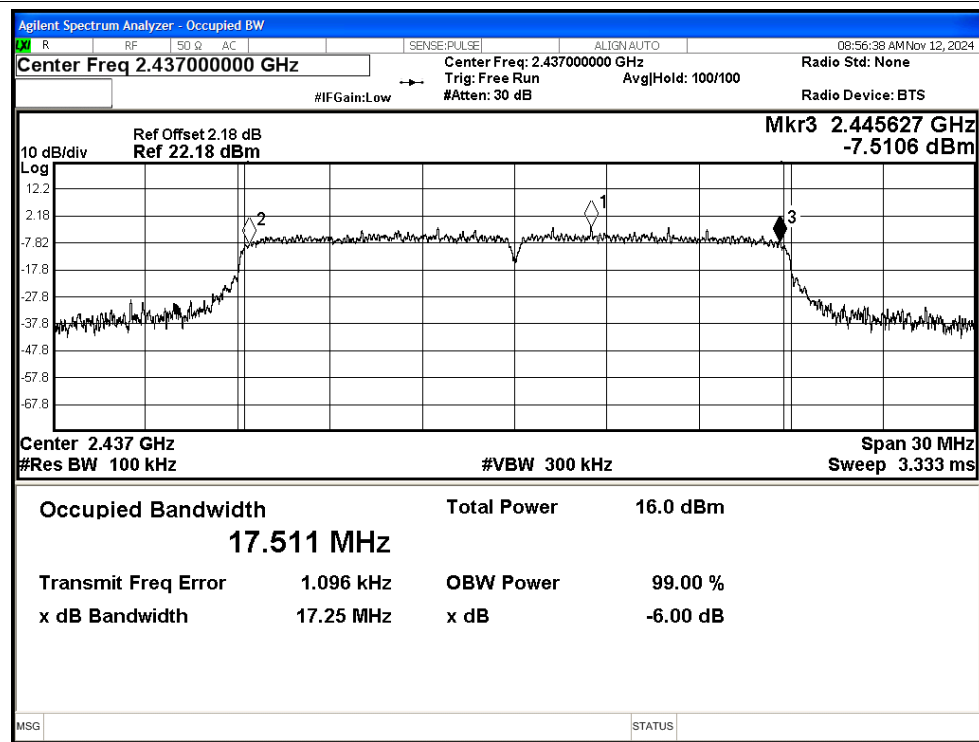




## -6dB Bandwidth NVNT n20 2462MHz Ant1

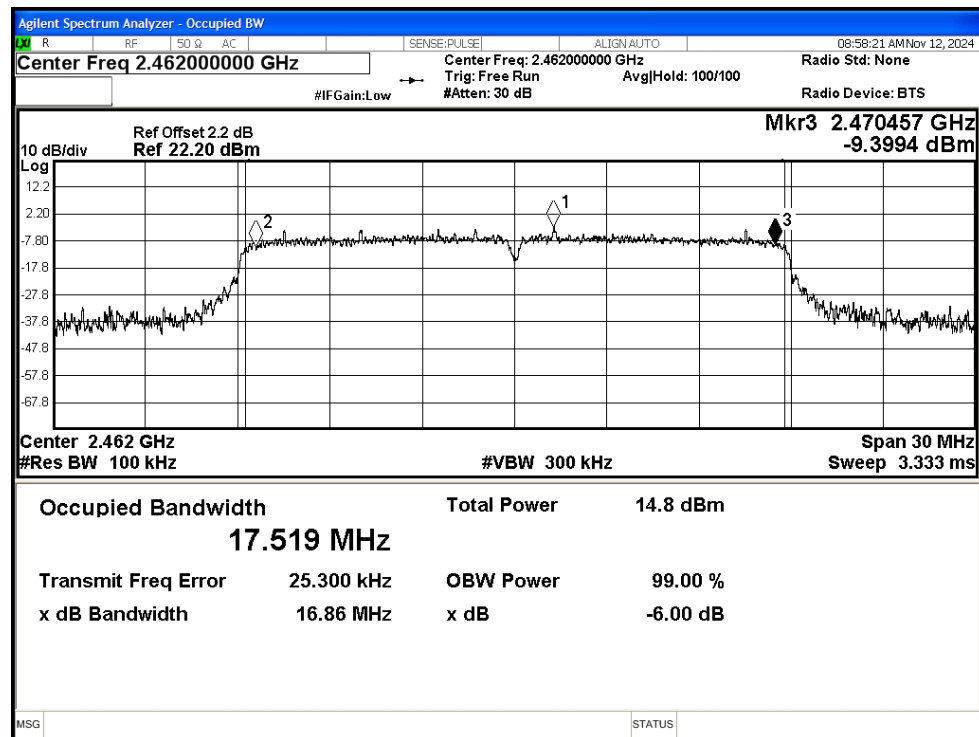


## -6dB Bandwidth NVNT n40 2422MHz Ant1

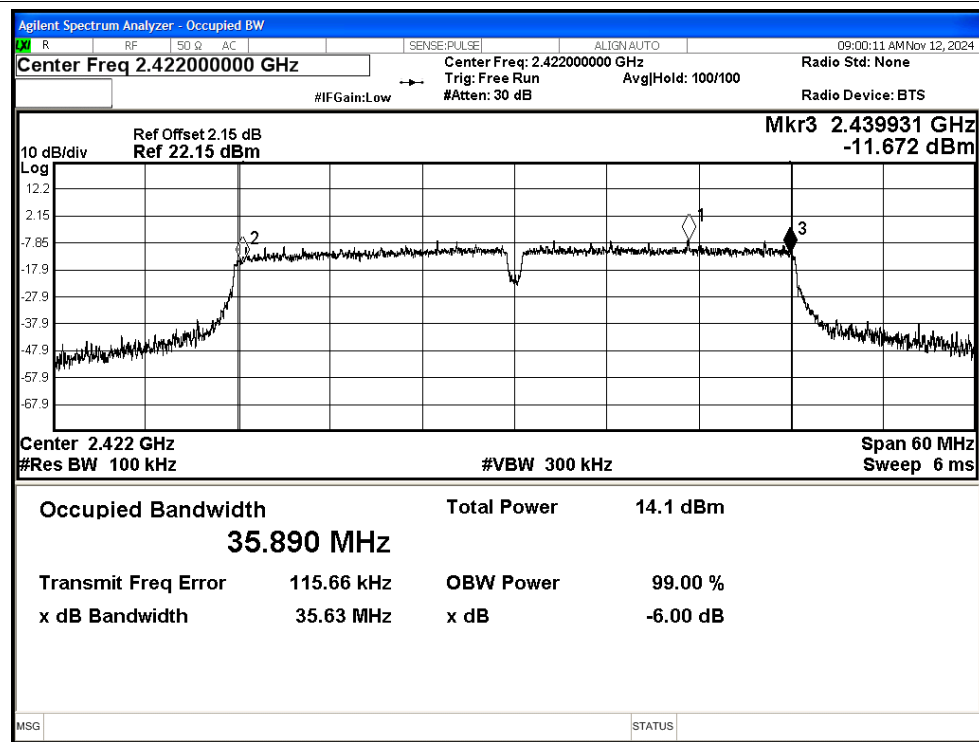




## -6dB Bandwidth NVNT n40 2437MHz Ant1

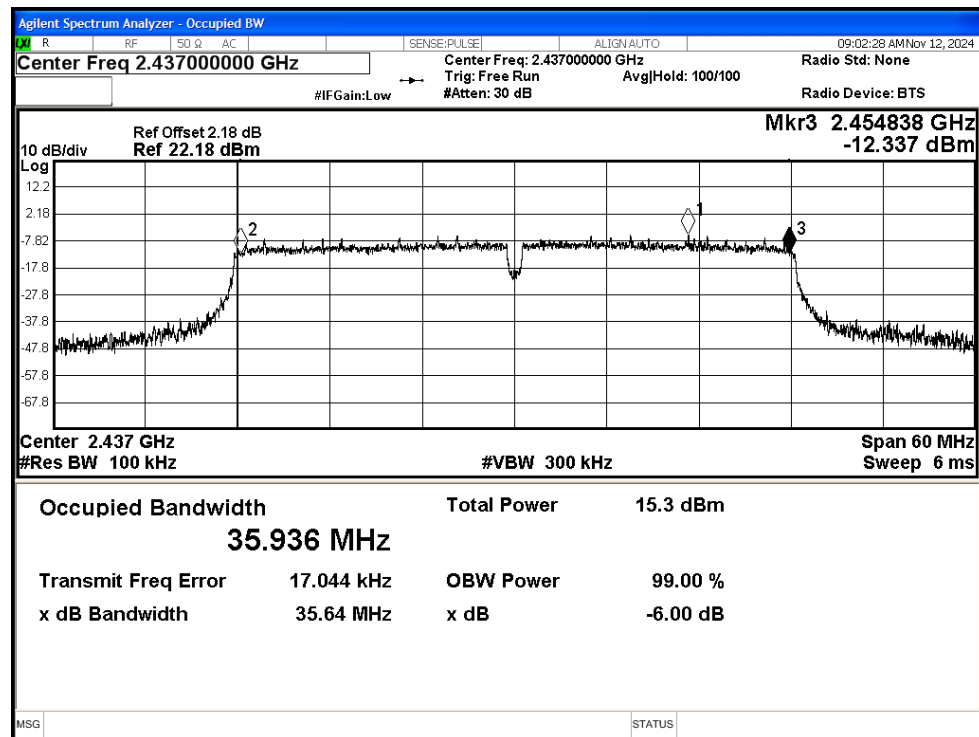

## -6dB Bandwidth NVNT n40 2452MHz Ant1

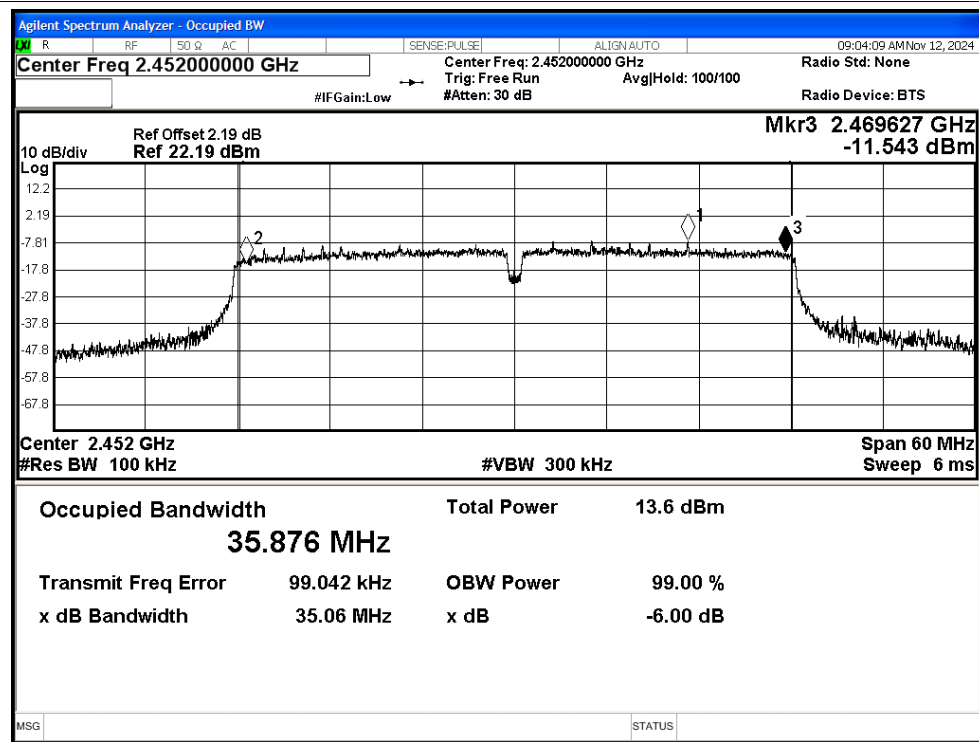



## A.2 Maximum Peak Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | 15.41                 | 30          | Pass    |
| NVNT      | b    | 2437            | Ant1    | 15.75                 | 30          | Pass    |
| NVNT      | b    | 2462            | Ant1    | 14.35                 | 30          | Pass    |
| NVNT      | g    | 2412            | Ant1    | 14.81                 | 30          | Pass    |
| NVNT      | g    | 2437            | Ant1    | 15.03                 | 30          | Pass    |
| NVNT      | g    | 2462            | Ant1    | 14.82                 | 30          | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 13.29                 | 30          | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 14.66                 | 30          | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 13.38                 | 30          | Pass    |
| NVNT      | n40  | 2422            | Ant1    | 12.55                 | 30          | Pass    |
| NVNT      | n40  | 2437            | Ant1    | 13.77                 | 30          | Pass    |
| NVNT      | n40  | 2452            | Ant1    | 12.09                 | 30          | Pass    |





### A.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|---------|--------------------------|------------------|---------|
| NVNT      | b    | 2412            | Ant1    | -9.44                    | 8                | Pass    |
| NVNT      | b    | 2437            | Ant1    | -4.84                    | 8                | Pass    |
| NVNT      | b    | 2462            | Ant1    | -8.73                    | 8                | Pass    |
| NVNT      | g    | 2412            | Ant1    | -15.87                   | 8                | Pass    |
| NVNT      | g    | 2437            | Ant1    | -14.44                   | 8                | Pass    |
| NVNT      | g    | 2462            | Ant1    | -15.22                   | 8                | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -15.65                   | 8                | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -17.03                   | 8                | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -16.26                   | 8                | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -20.7                    | 8                | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -19.68                   | 8                | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -21.32                   | 8                | Pass    |






## Test Graphs

## PSD NVNT b 2412MHz Ant1

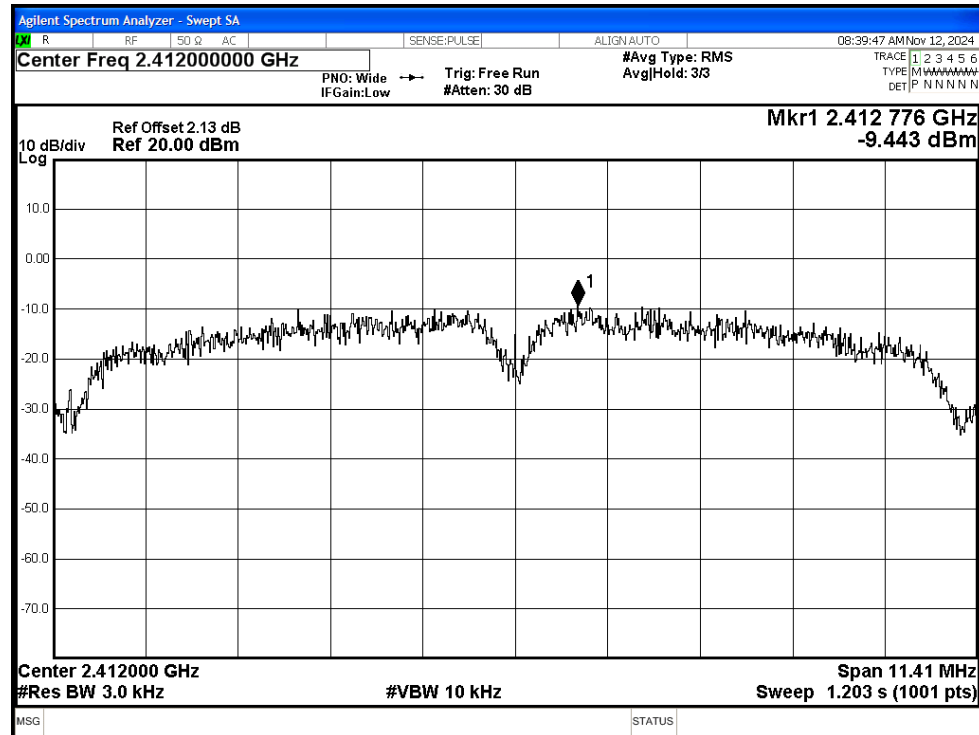


## PSD NVNT b 2437MHz Ant1

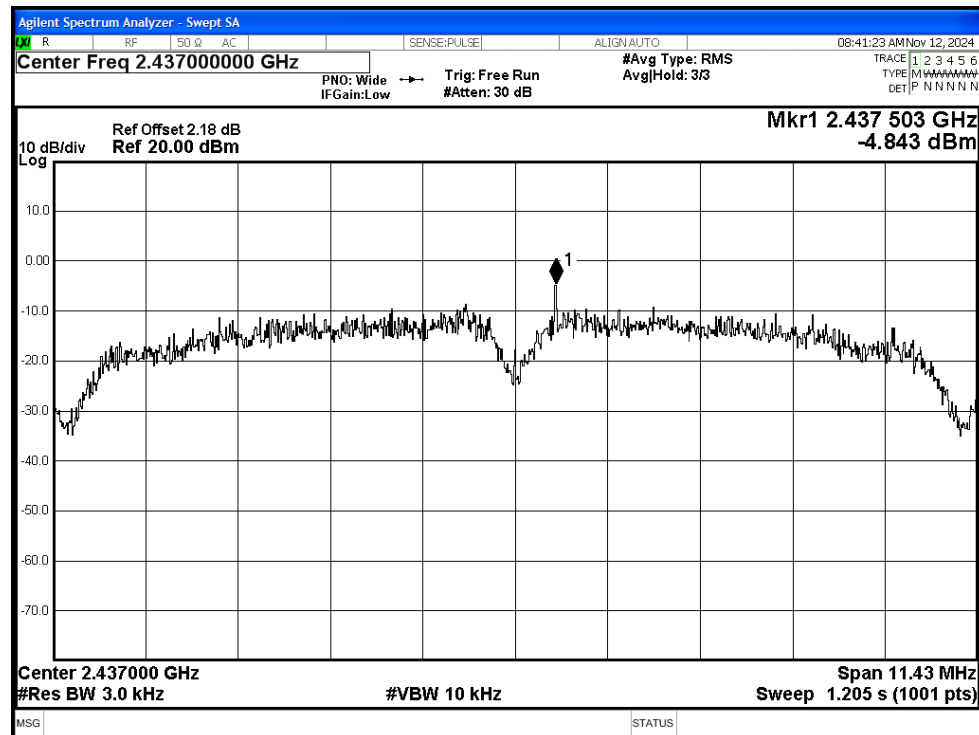




## PSD NVNT b 2462MHz Ant1

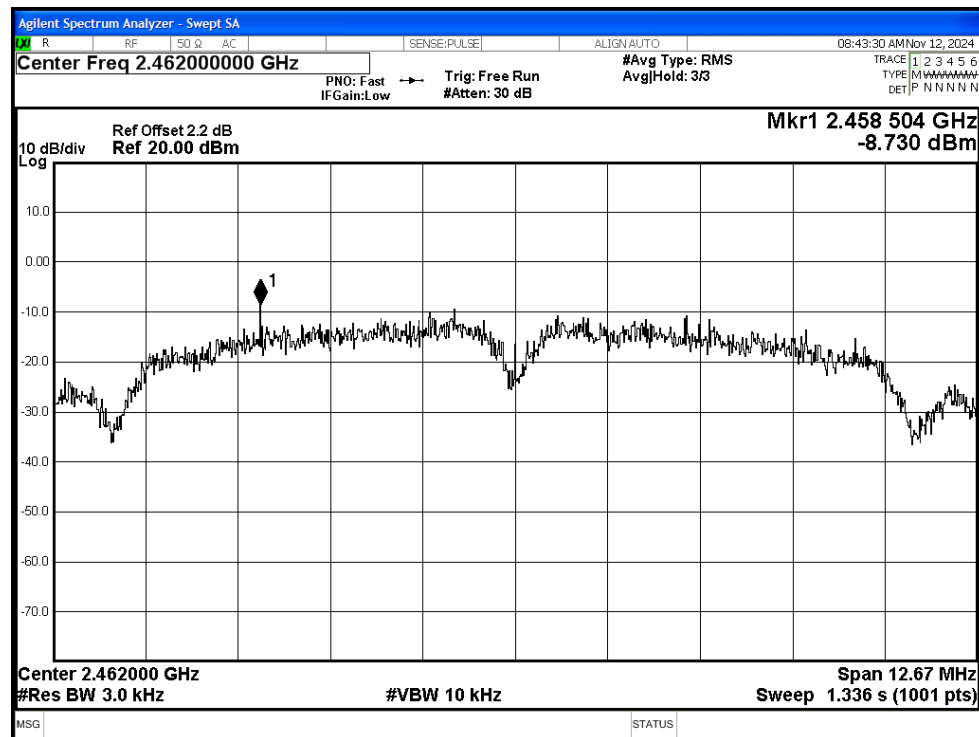


## PSD NVNT g 2412MHz Ant1

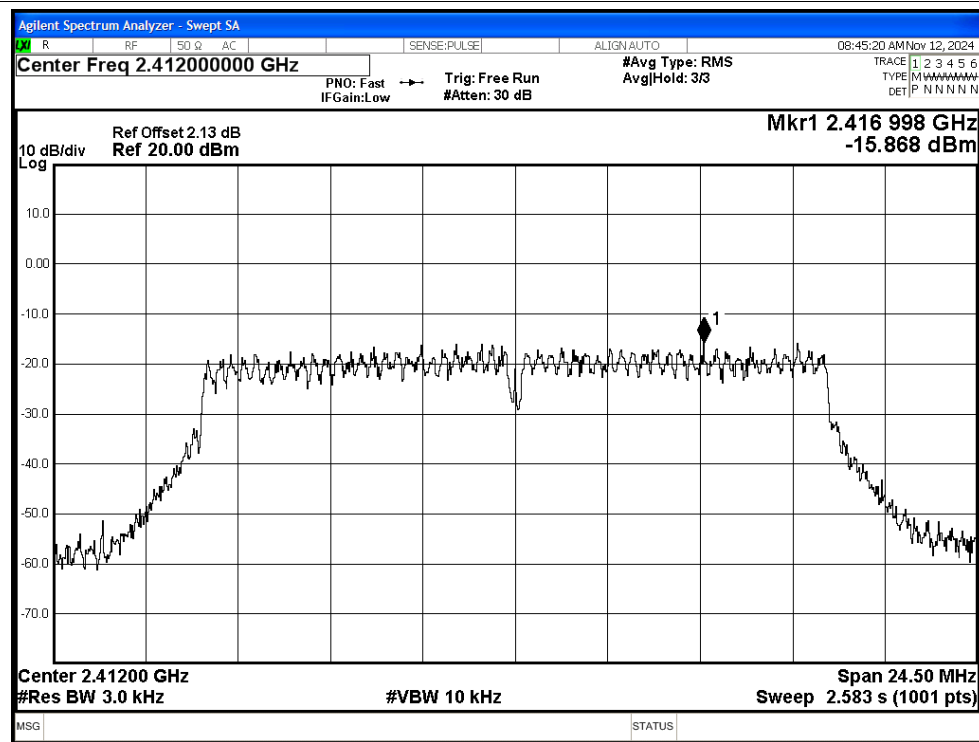







PSD NVNT g 2437MHz Ant1

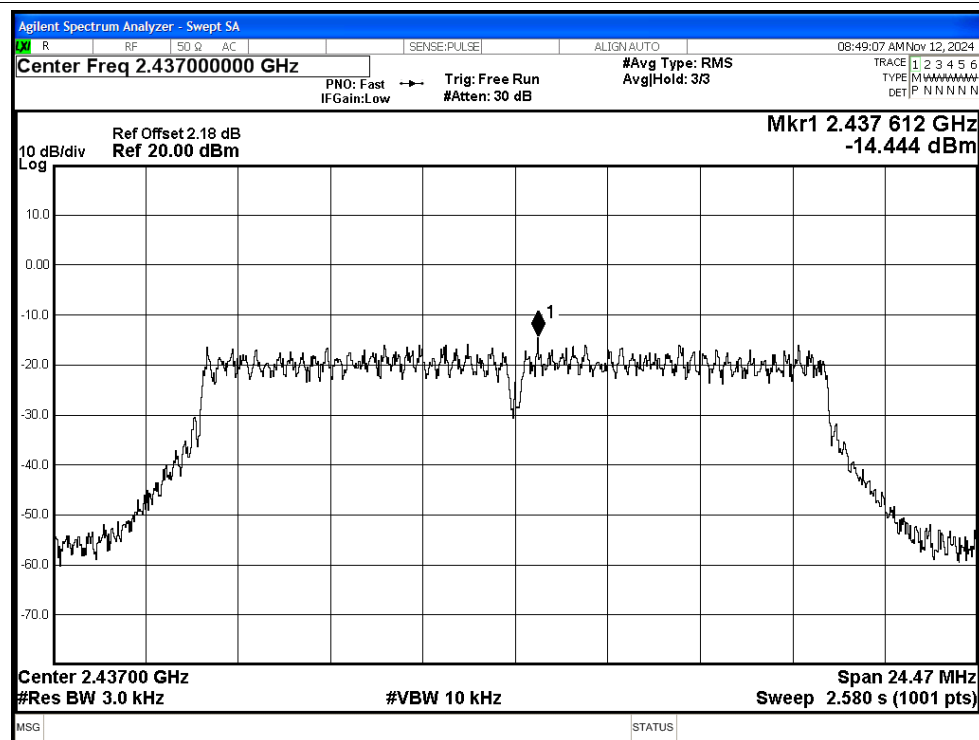


PSD NVNT g 2462MHz Ant1

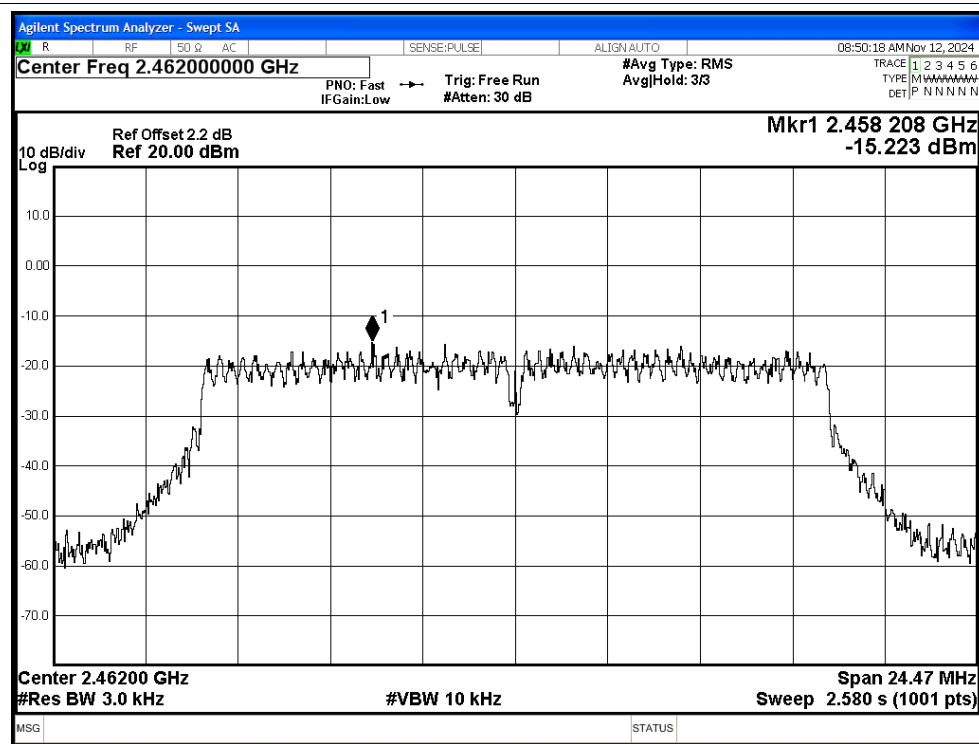

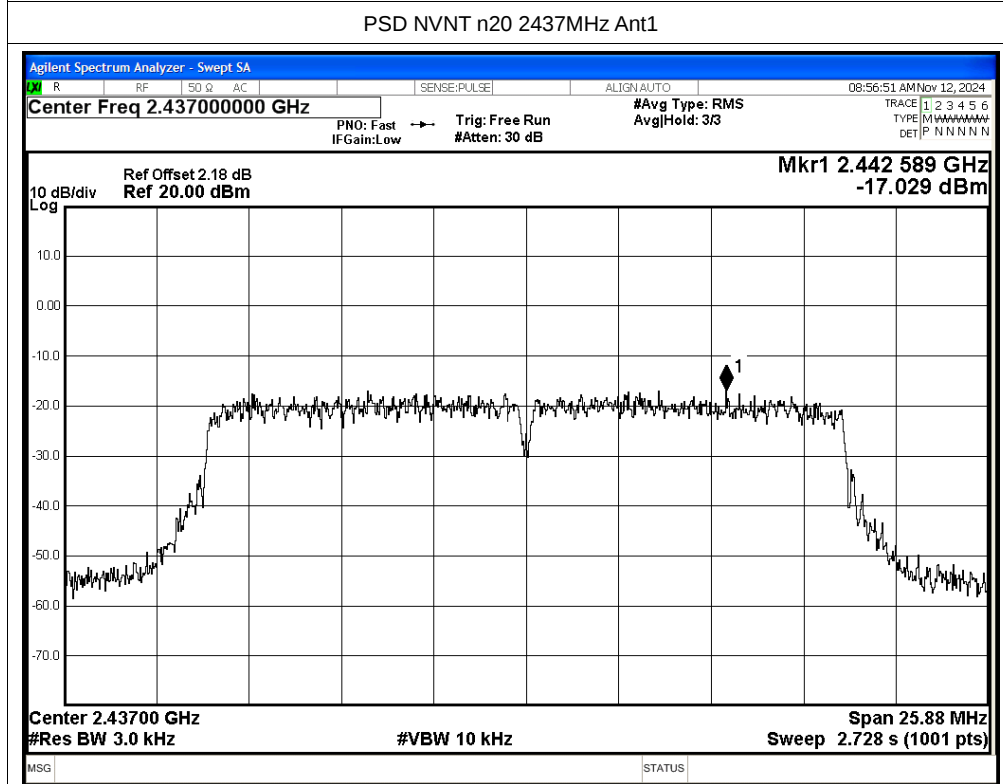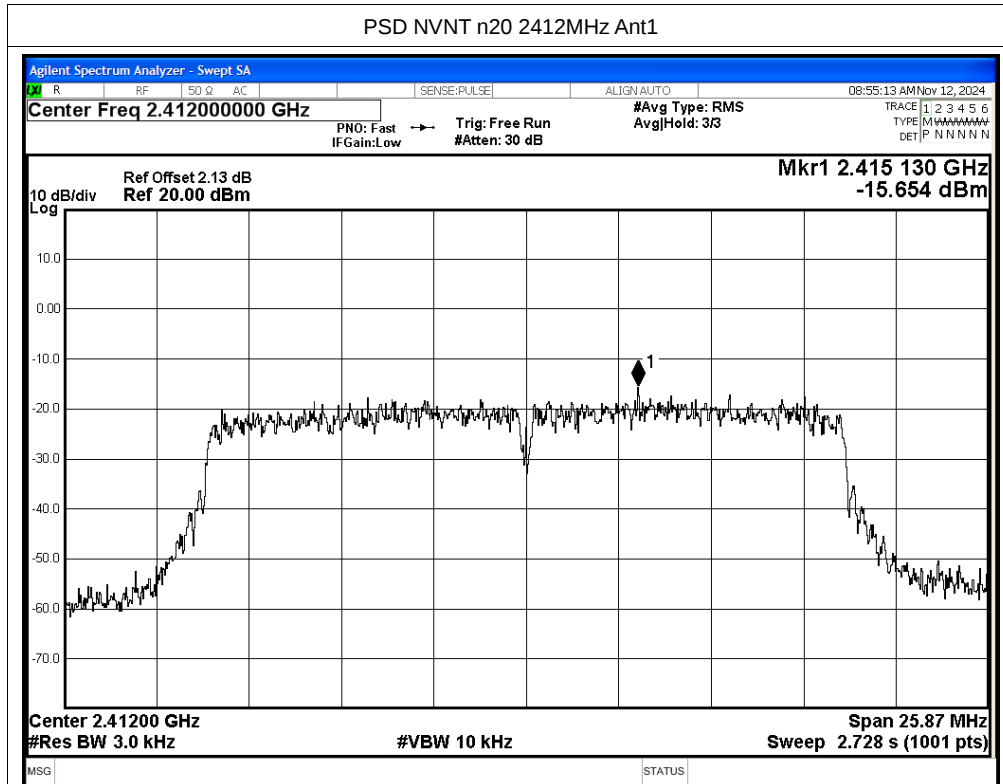

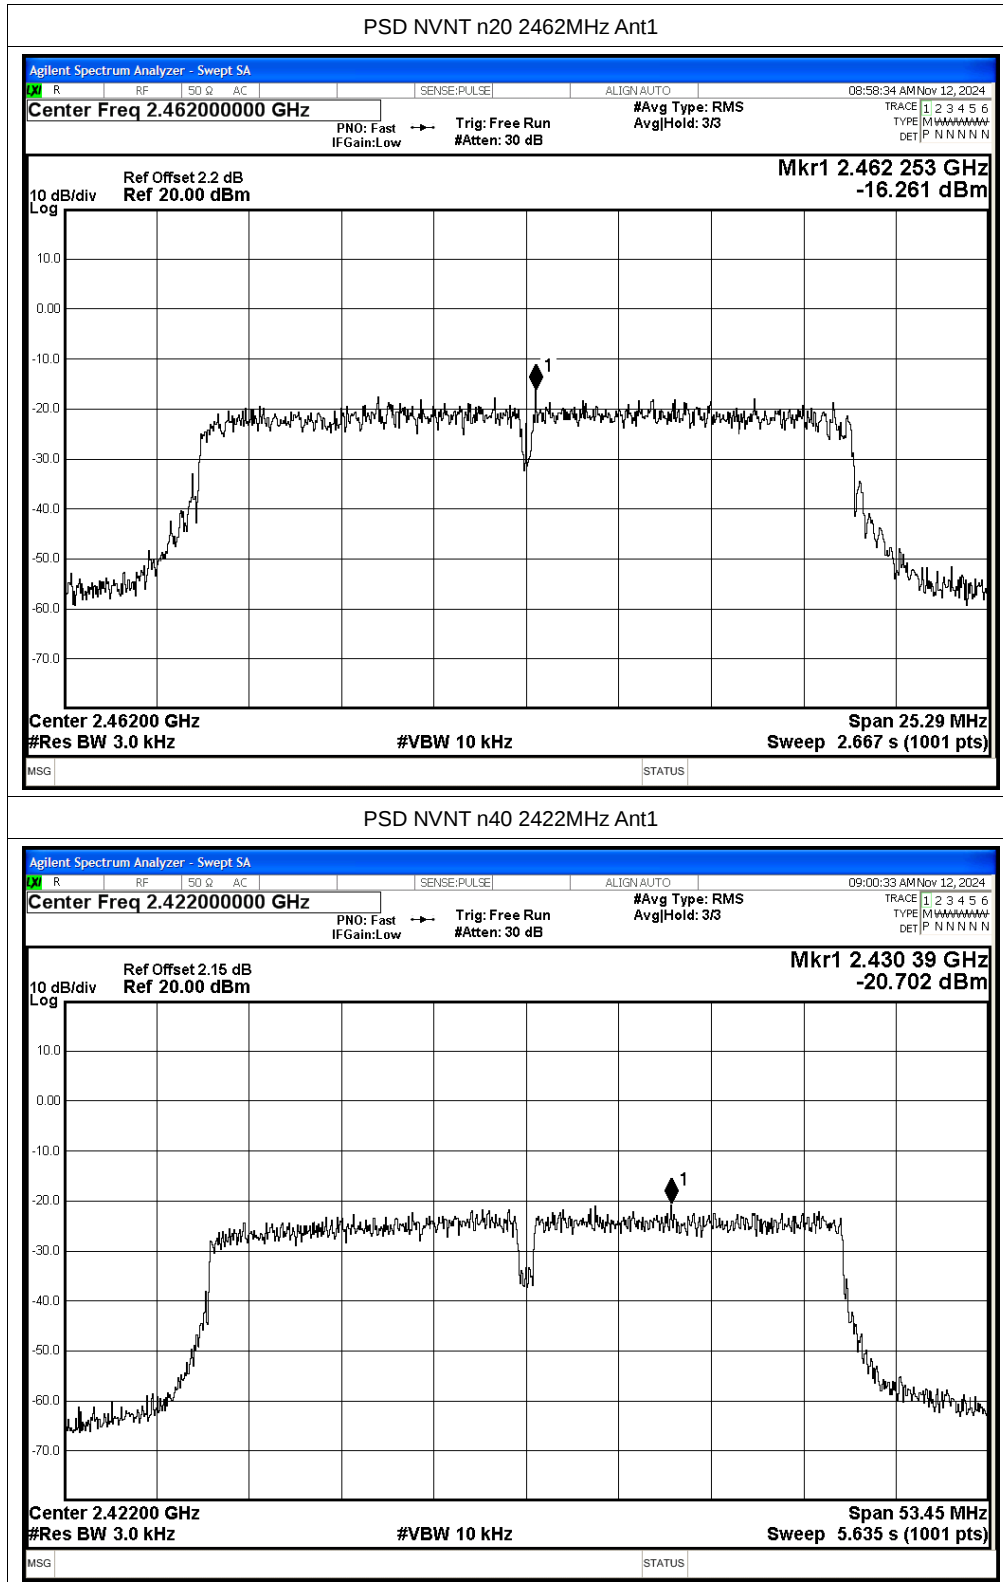

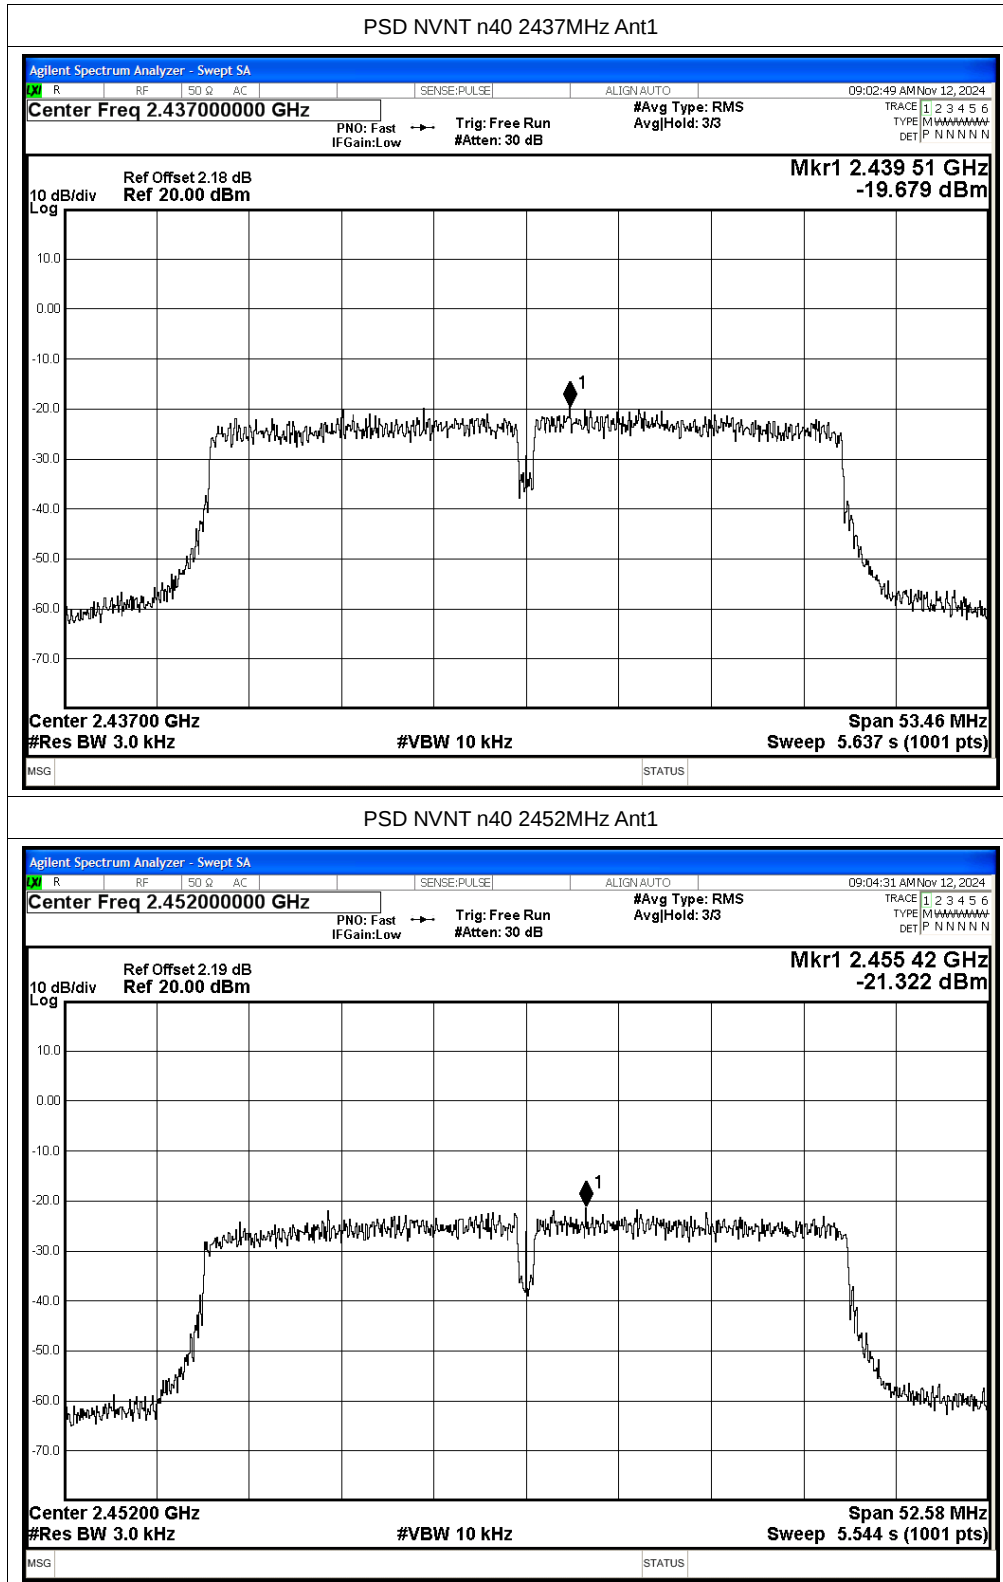



## A.4 Band Edge


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -44.9           | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -59.66          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -32.88          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -42.49          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -29.83          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -40.67          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -33.88          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -38.26          | -20         | Pass    |






## Test Graphs

## Band Edge NVNT b 2412MHz Ant1 Ref

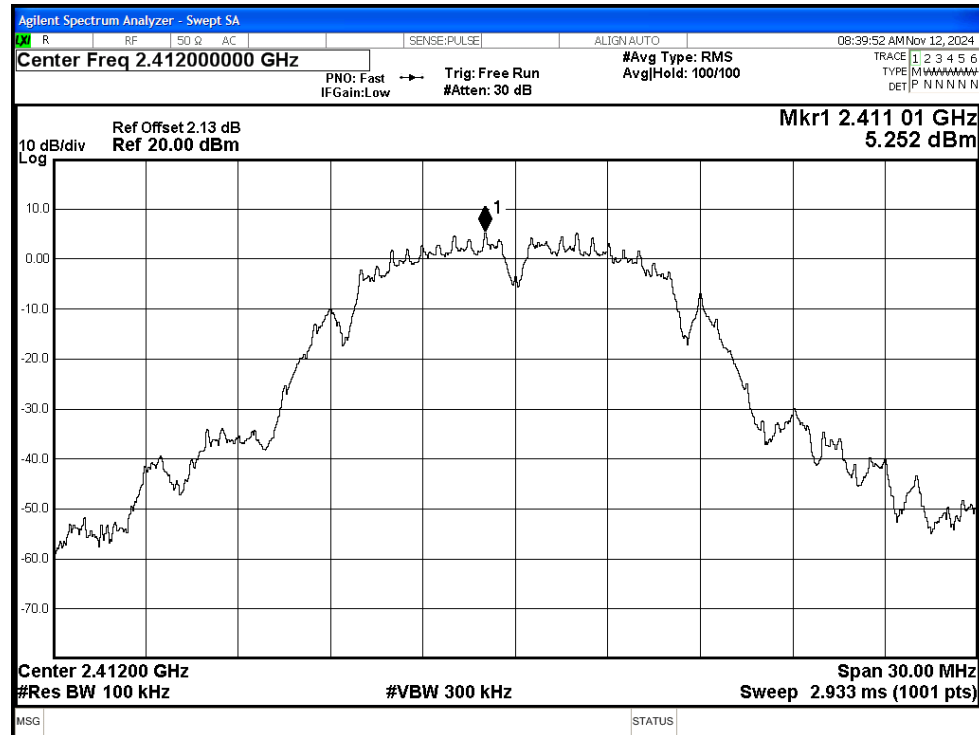

## Band Edge NVNT b 2412MHz Ant1 Emission

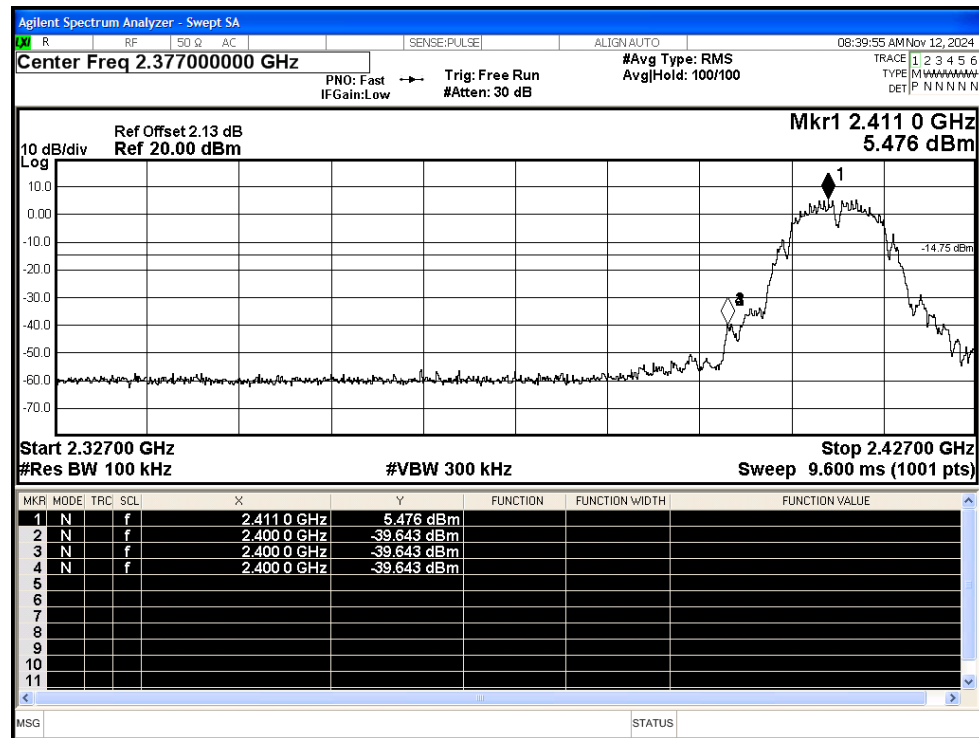

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Band Edge NVNT b 2462MHz Ant1 Ref

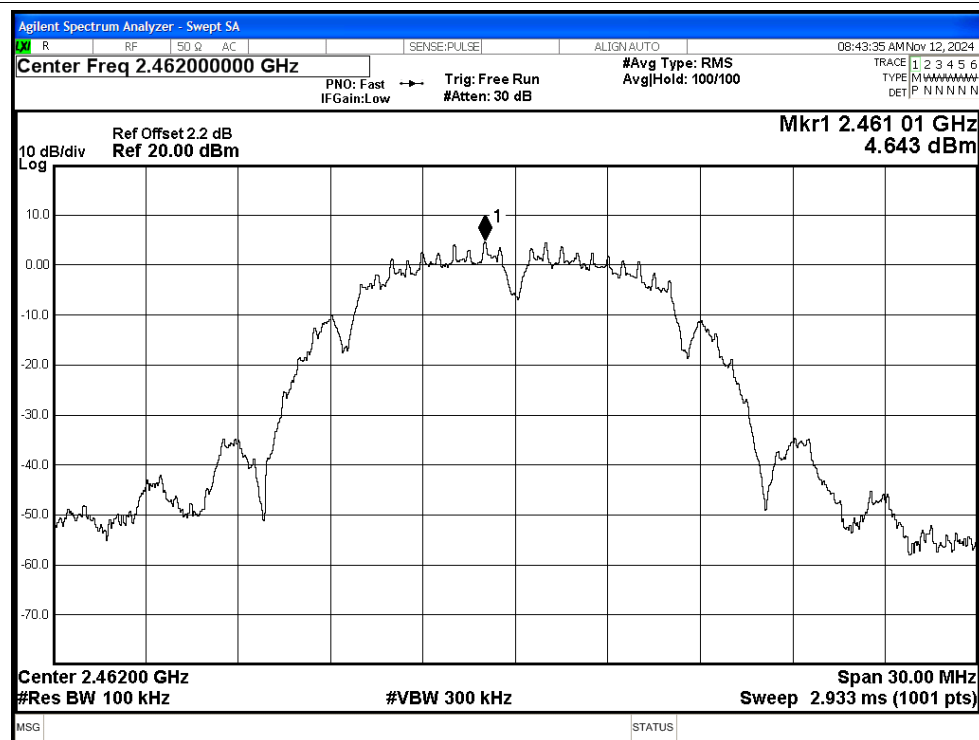


## Band Edge NVNT b 2462MHz Ant1 Emission

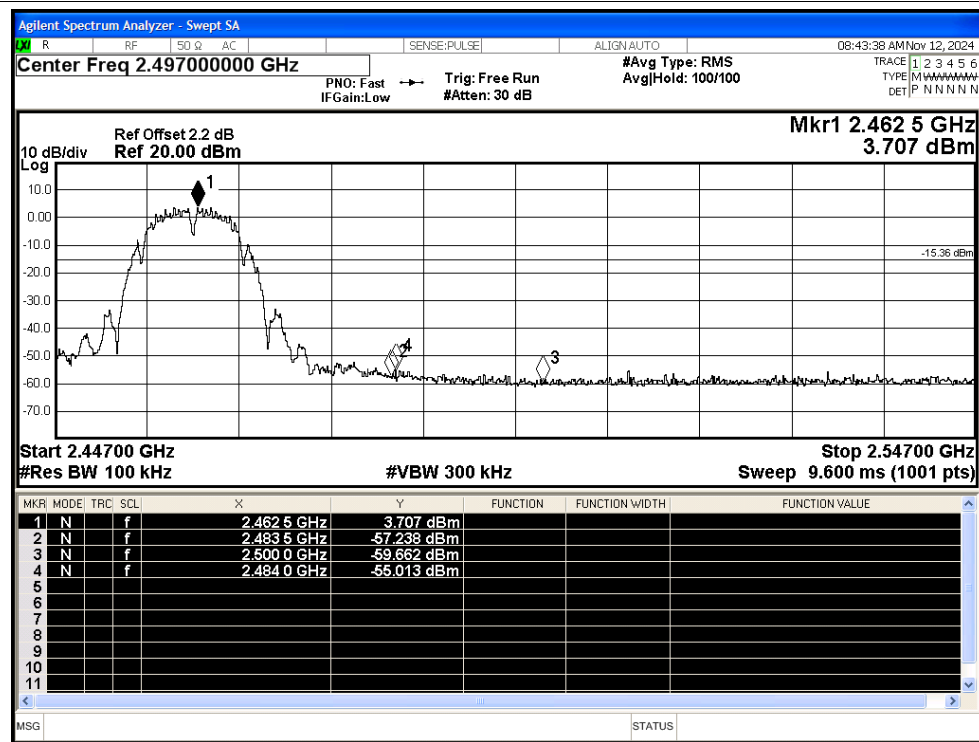




## Band Edge NVNT g 2412MHz Ant1 Ref

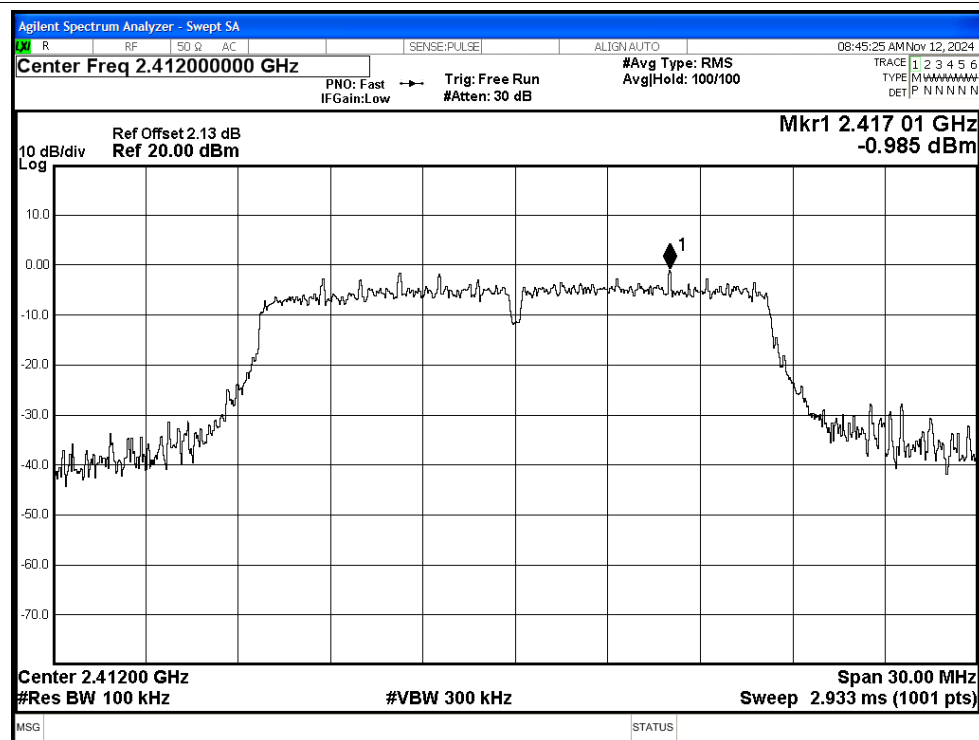


## Band Edge NVNT g 2412MHz Ant1 Emission

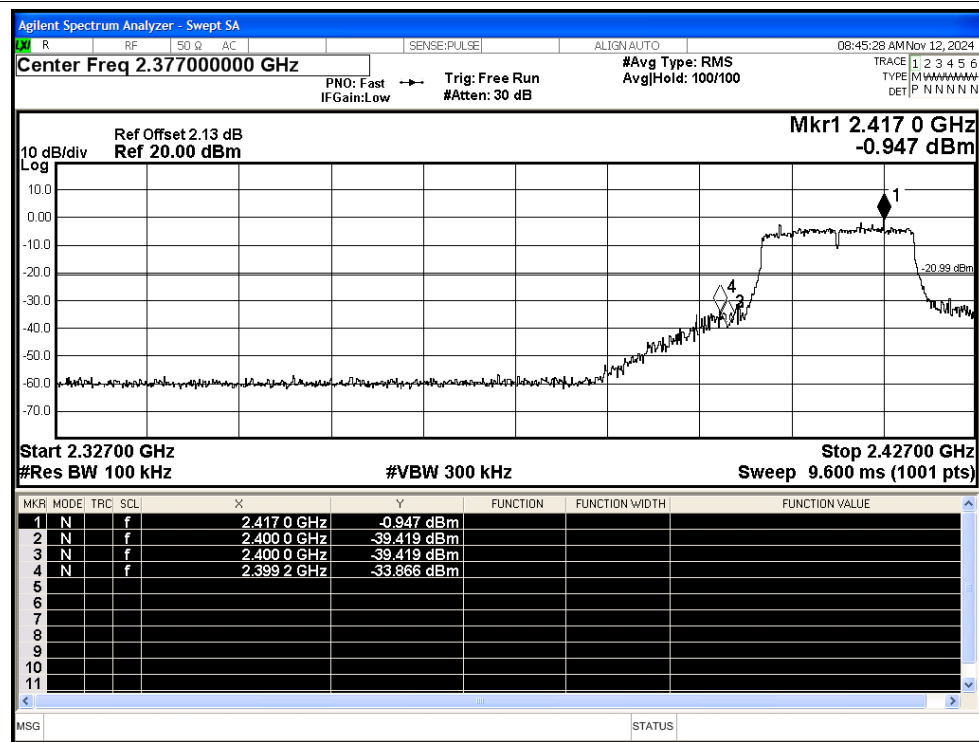




## Band Edge NVNT g 2462MHz Ant1 Ref

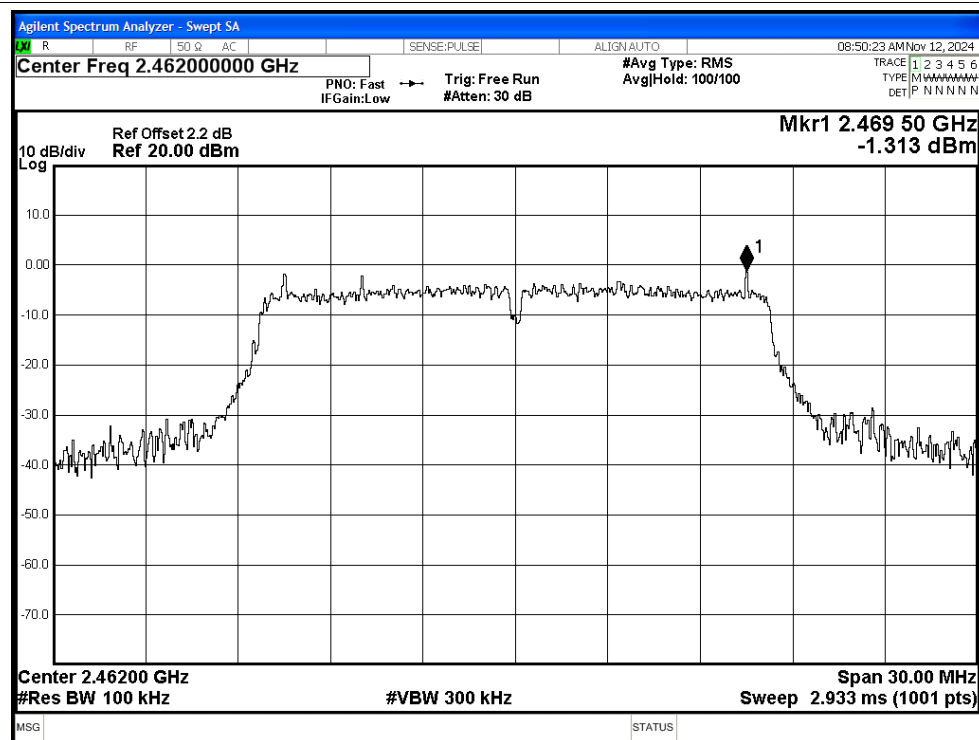


## Band Edge NVNT g 2462MHz Ant1 Emission

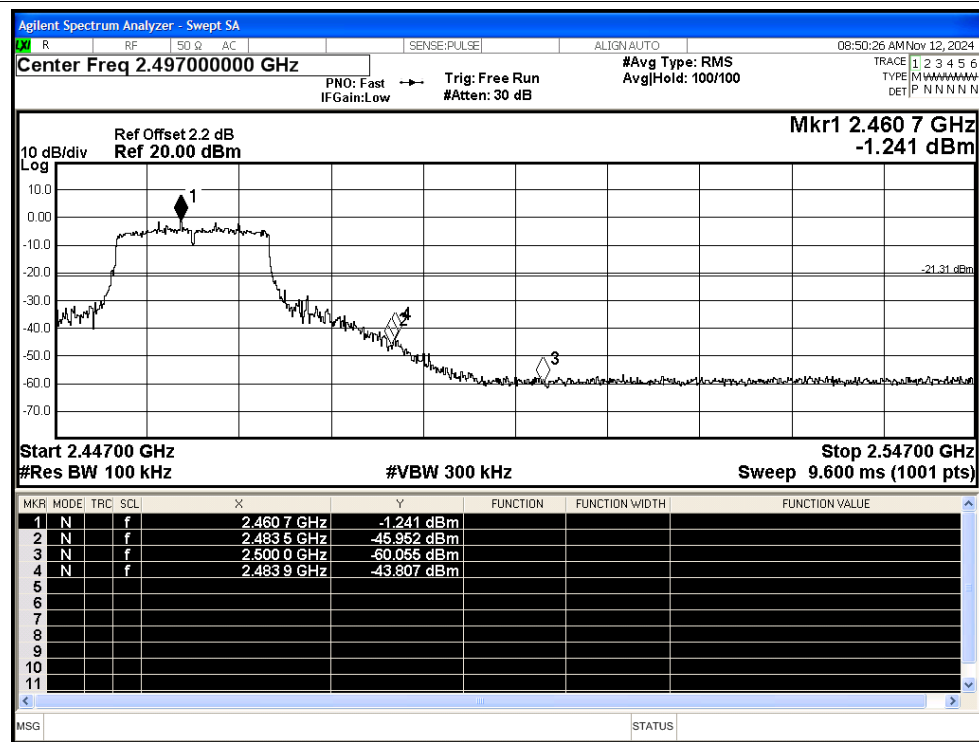




## Band Edge NVNT n20 2412MHz Ant1 Ref

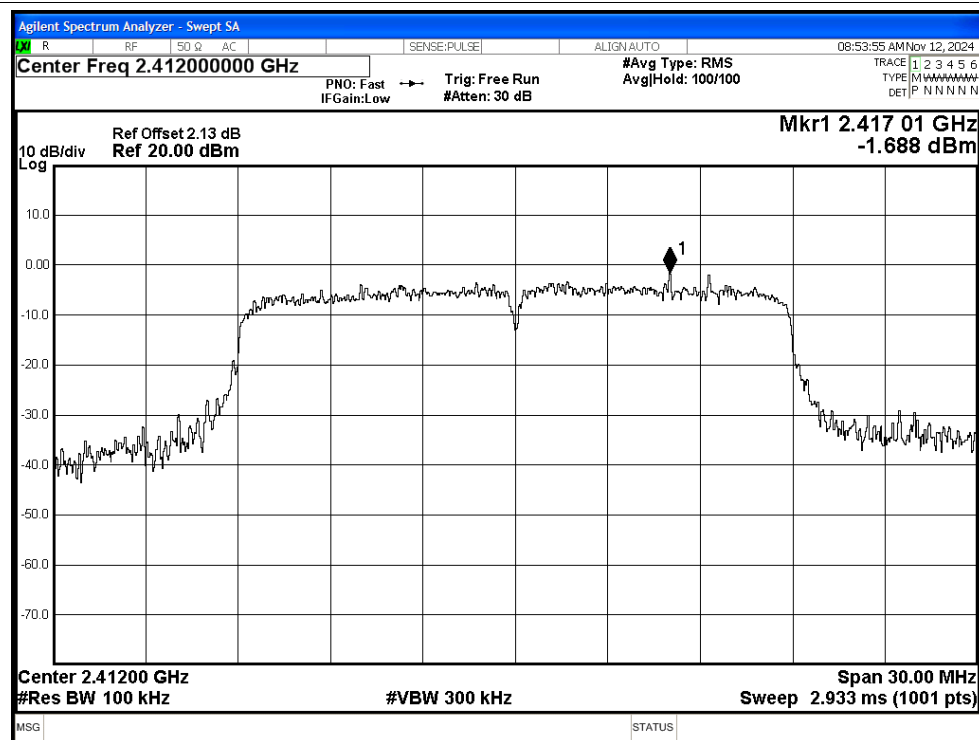


## Band Edge NVNT n20 2412MHz Ant1 Emission

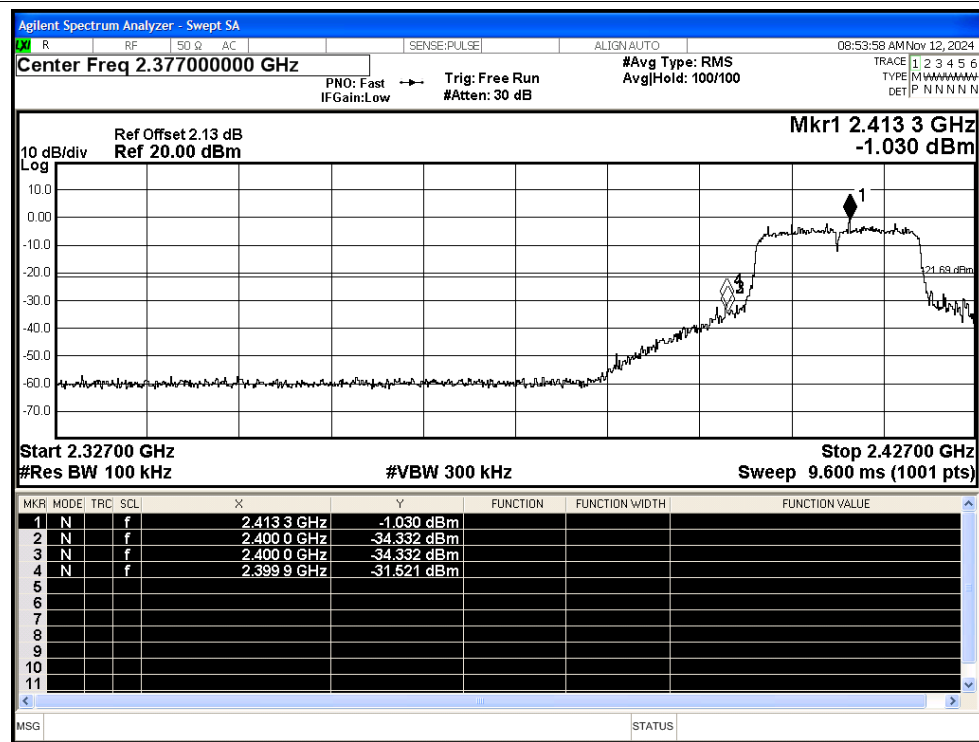






## Band Edge NVNT n20 2462MHz Ant1 Ref

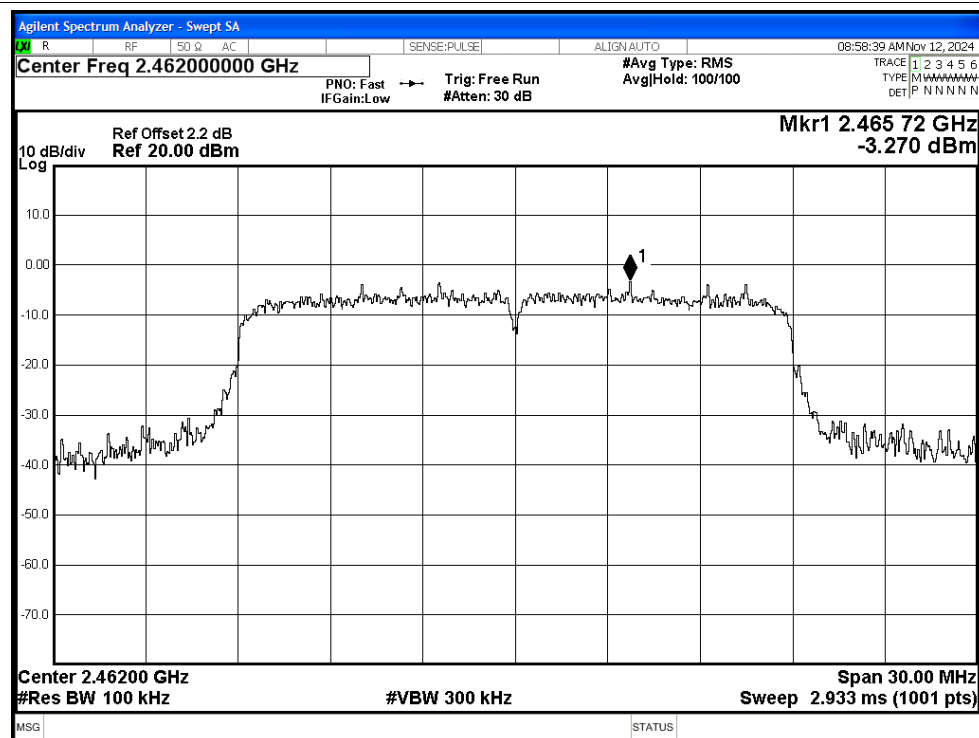


## Band Edge NVNT n20 2462MHz Ant1 Emission

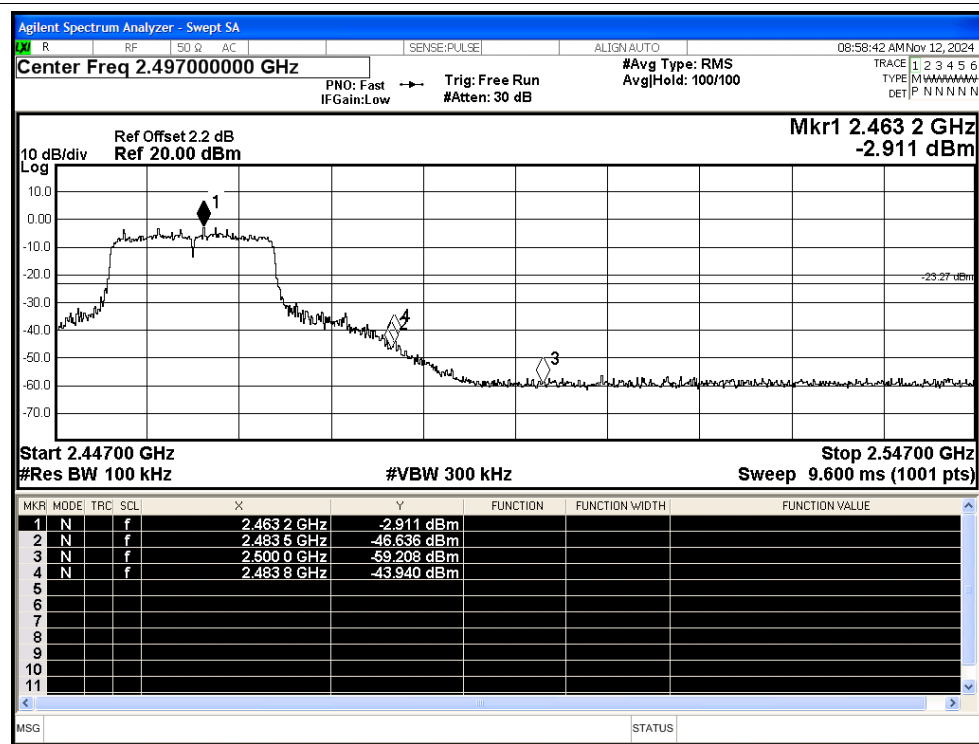

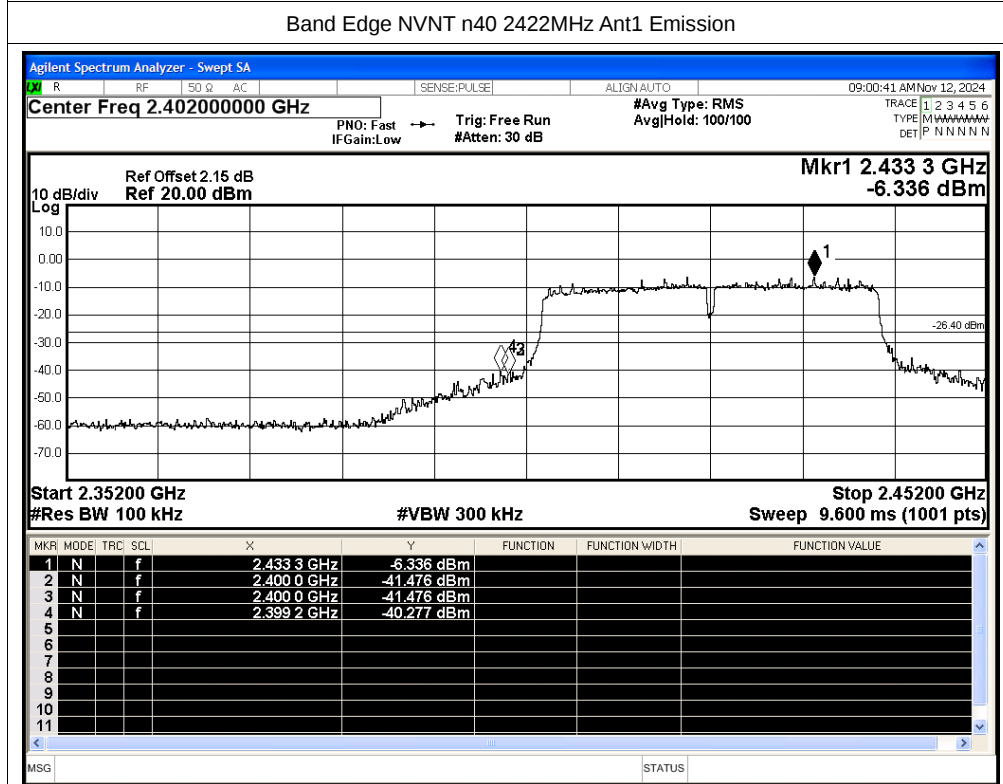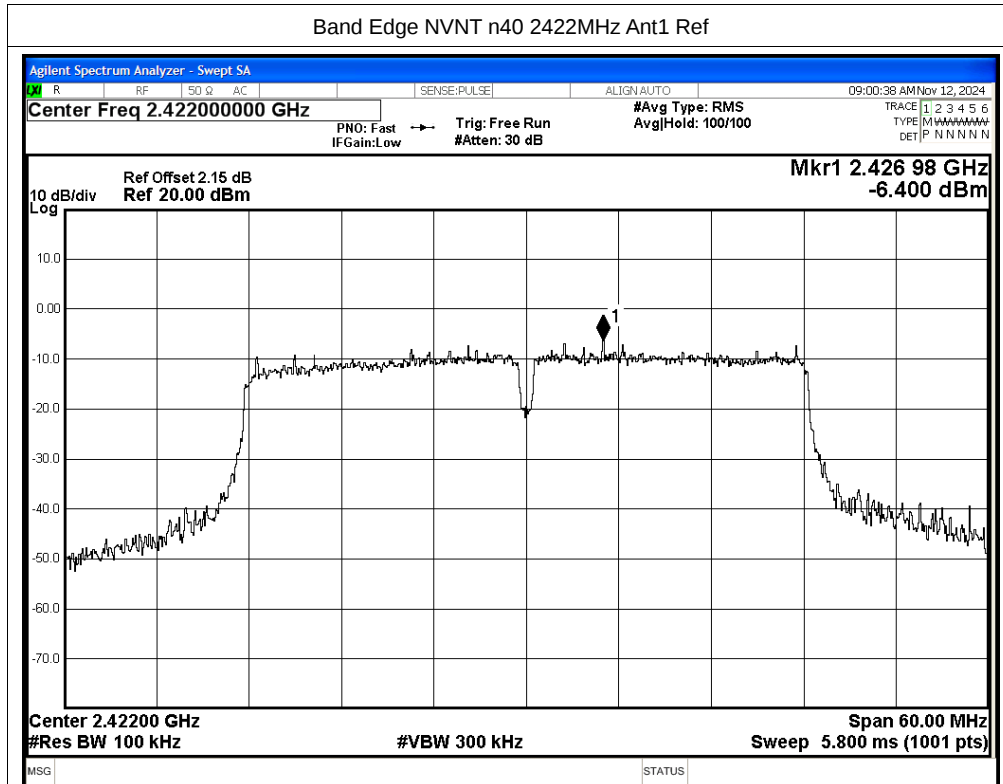




## Band Edge NVNT n40 2452MHz Ant1 Ref

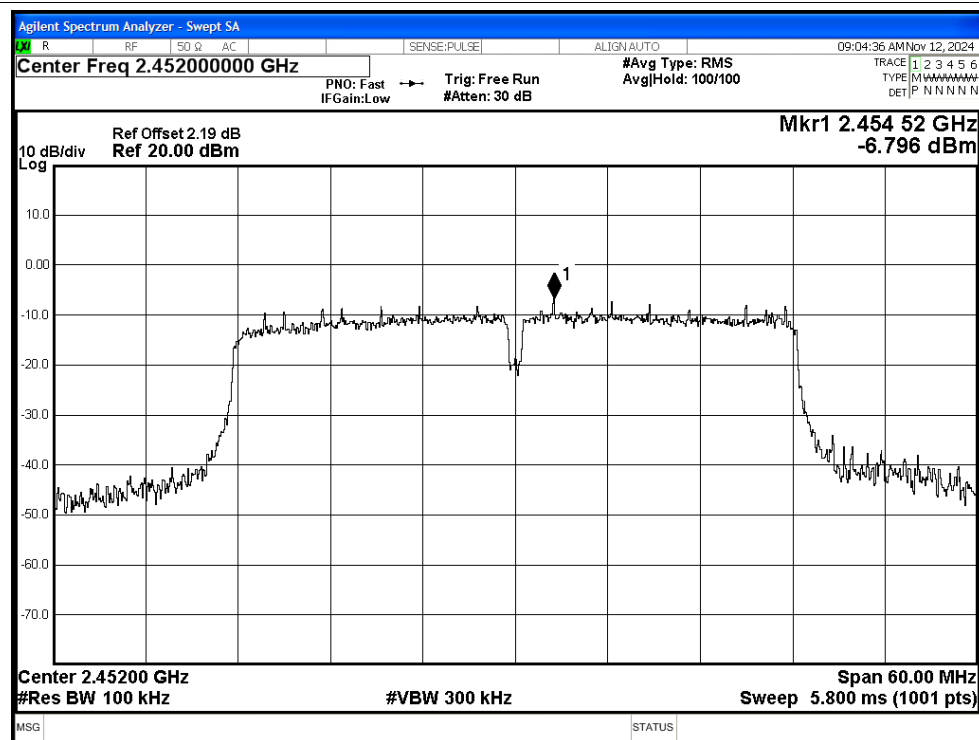

## Band Edge NVNT n40 2452MHz Ant1 Emission

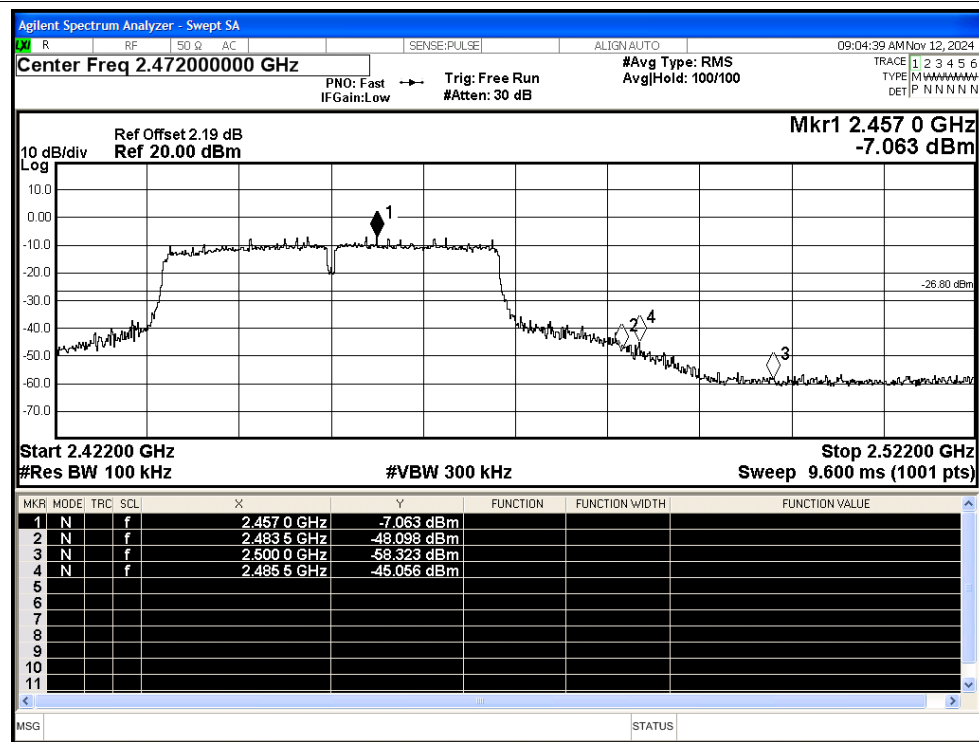



## A.5 Conducted RF Spurious Emission


| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -50.33          | -20         | Pass    |
| NVNT      | b    | 2437            | Ant1    | -51.65          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -50.43          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -44.7           | -20         | Pass    |
| NVNT      | g    | 2437            | Ant1    | -45.92          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -45.33          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -43.01          | -20         | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -43.65          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -42.37          | -20         | Pass    |
| NVNT      | n40  | 2422            | Ant1    | -40.06          | -20         | Pass    |
| NVNT      | n40  | 2437            | Ant1    | -40.99          | -20         | Pass    |
| NVNT      | n40  | 2452            | Ant1    | -39.16          | -20         | Pass    |






## Test Graphs

## Tx. Spurious NVNT b 2412MHz Ant1 Ref

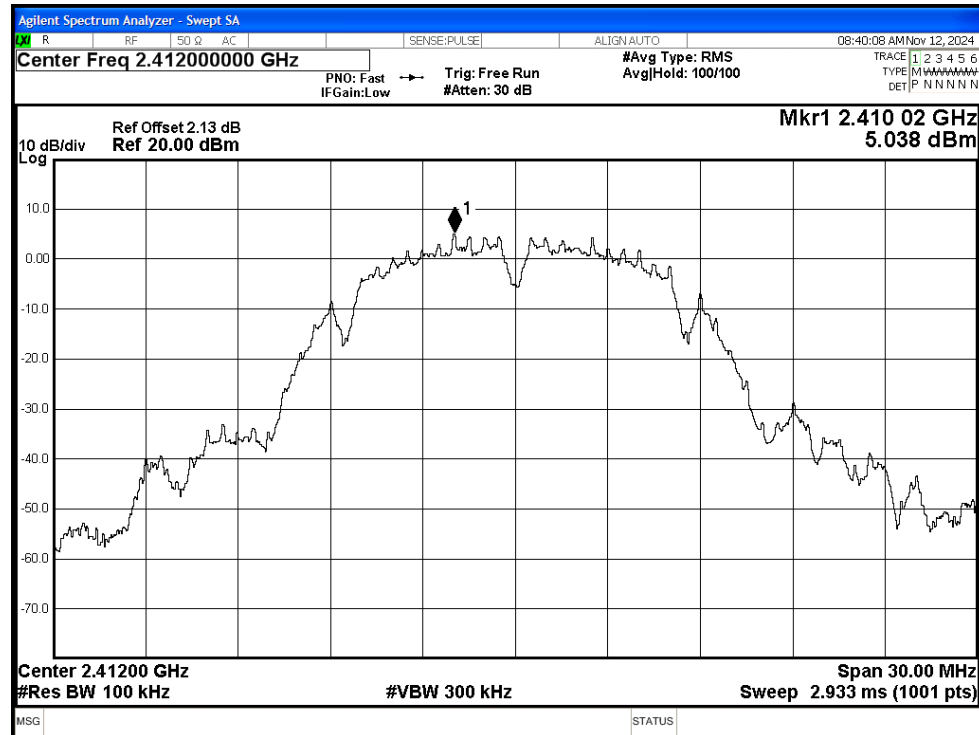


## Tx. Spurious NVNT b 2412MHz Ant1 Emission

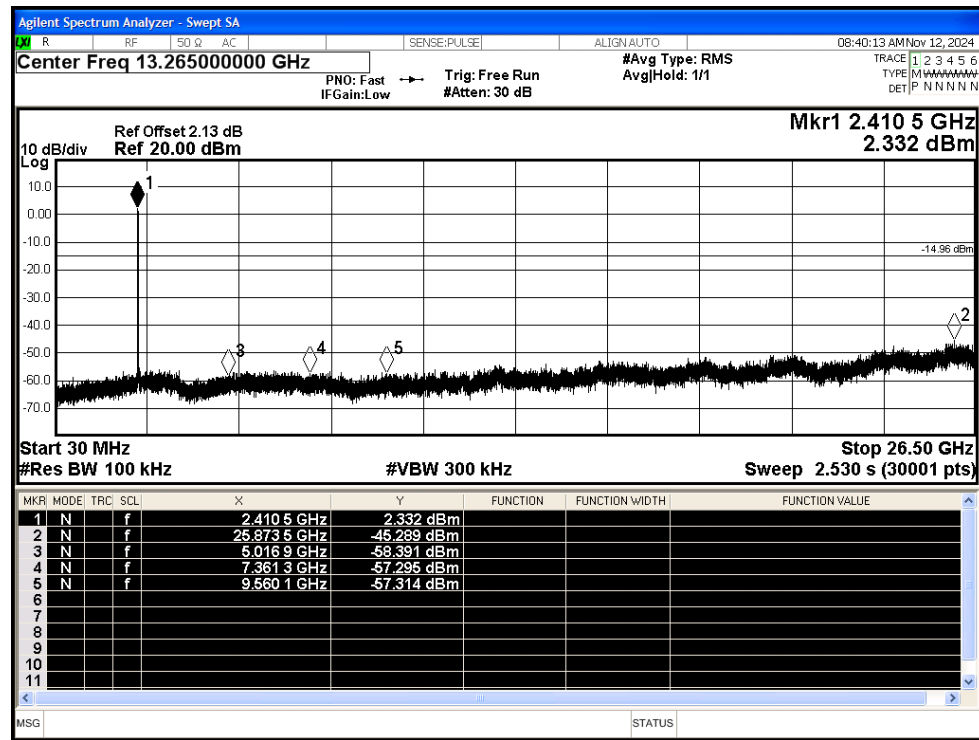




## Tx. Spurious NVNT b 2437MHz Ant1 Ref

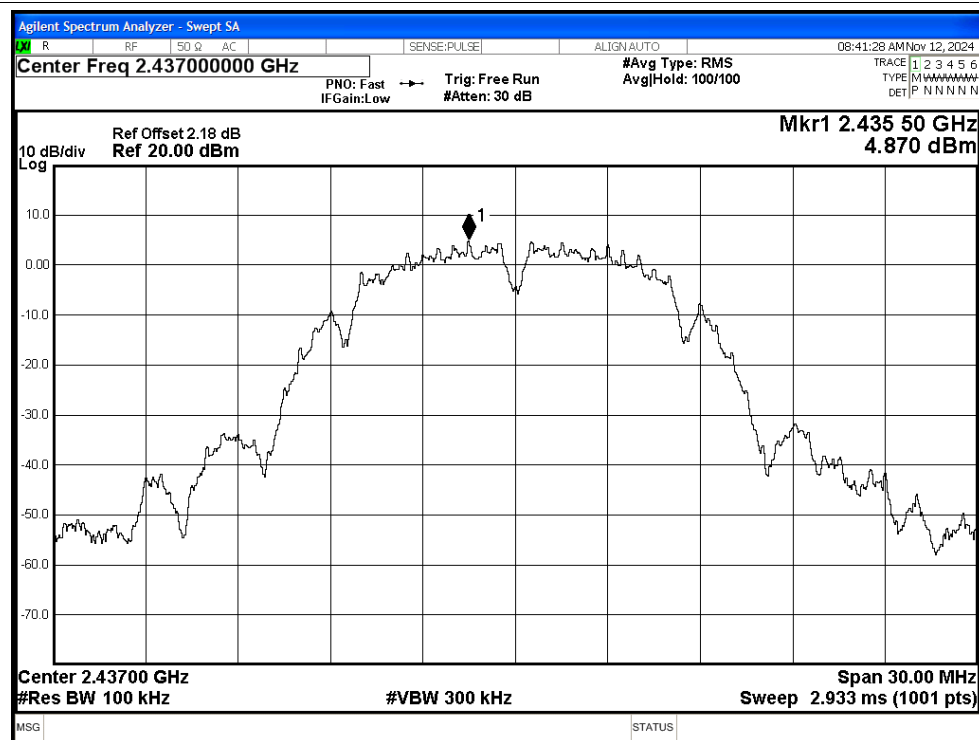


## Tx. Spurious NVNT b 2437MHz Ant1 Emission

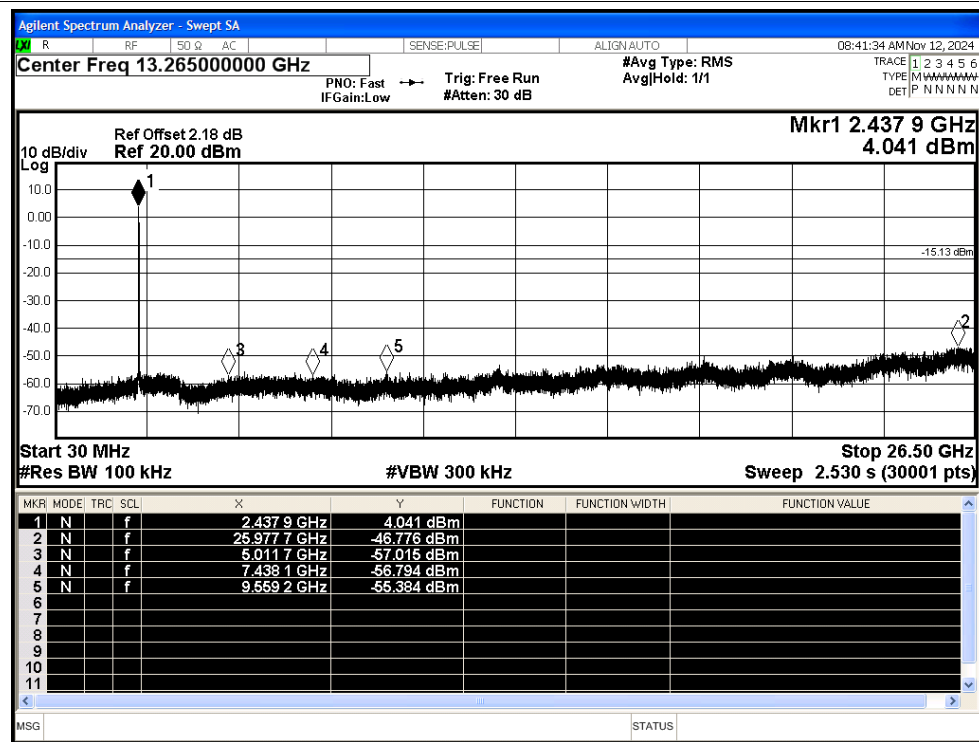




## Tx. Spurious NVNT b 2462MHz Ant1 Ref

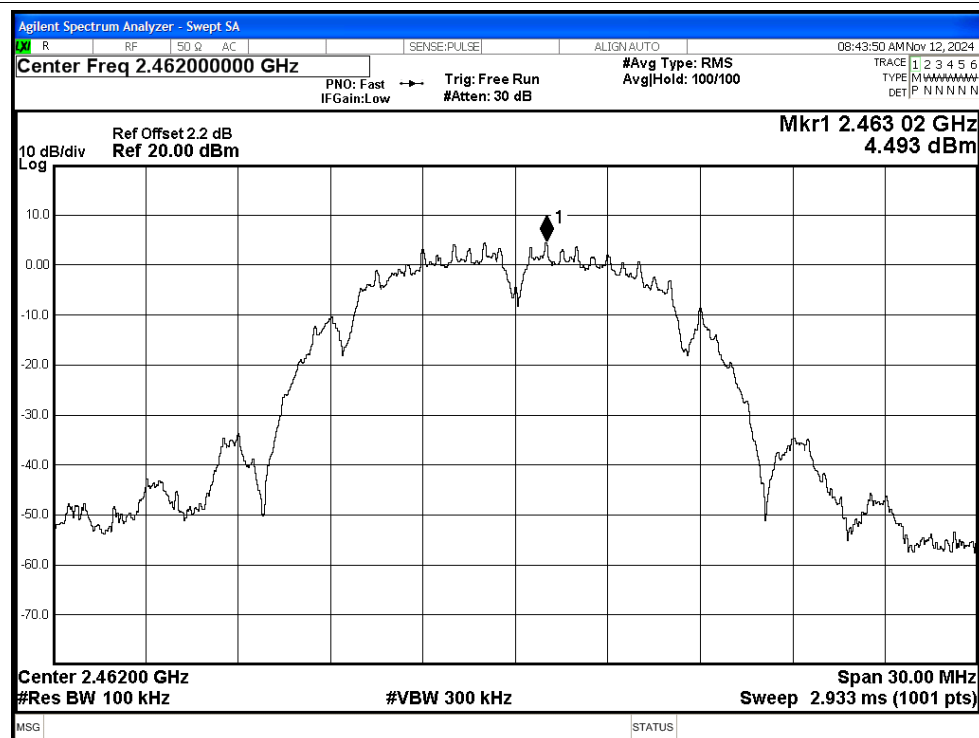


## Tx. Spurious NVNT b 2462MHz Ant1 Emission

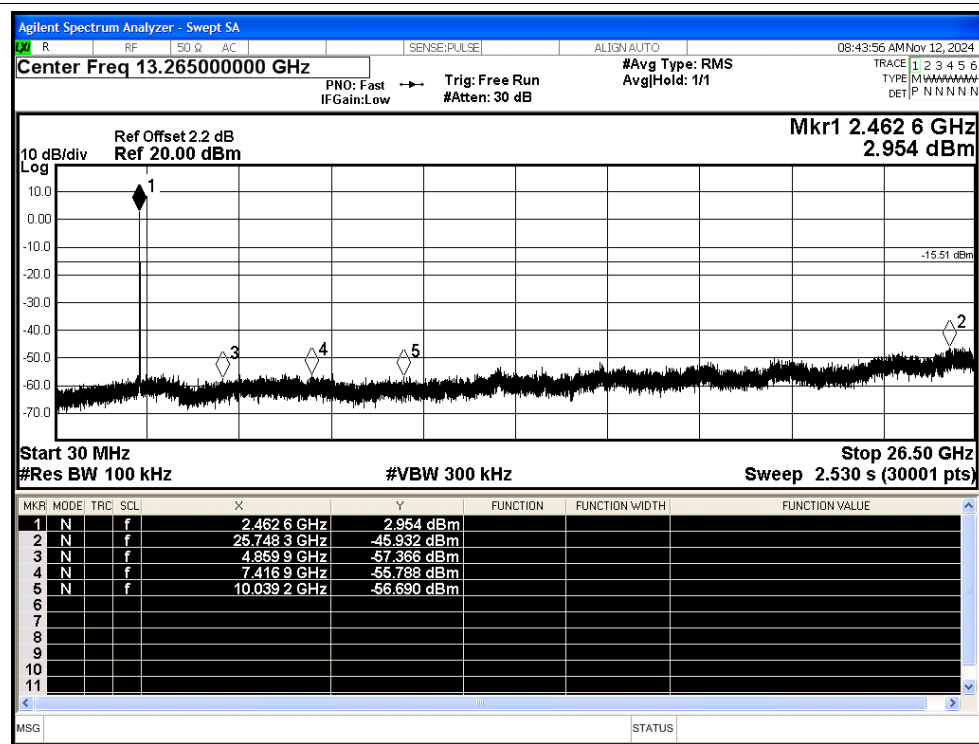




## Tx. Spurious NVNT g 2412MHz Ant1 Ref

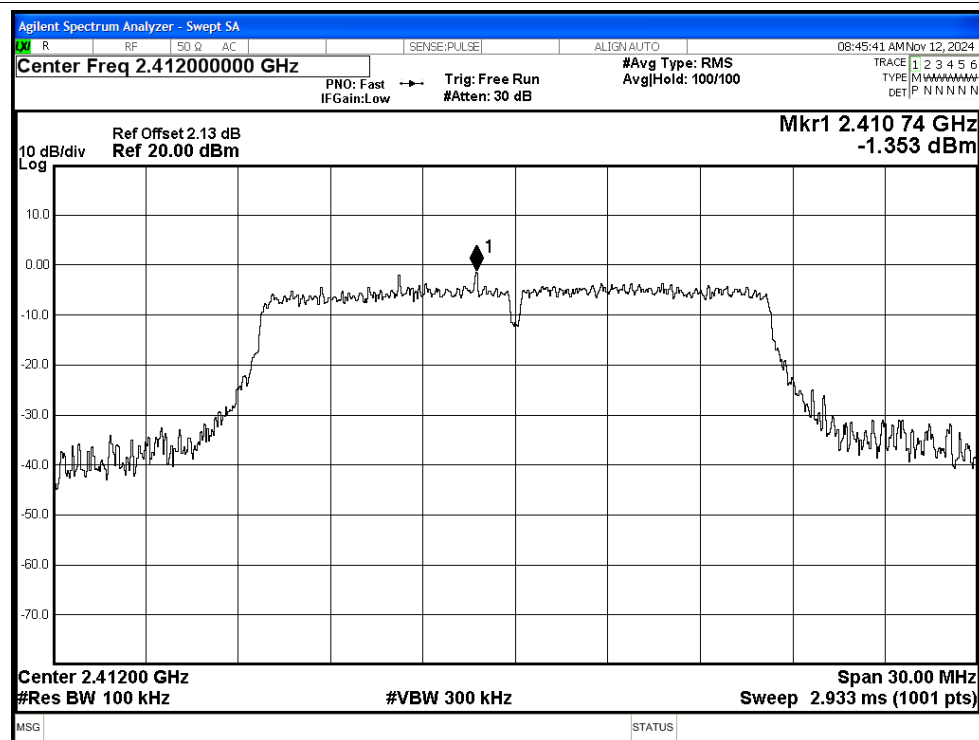


## Tx. Spurious NVNT g 2412MHz Ant1 Emission

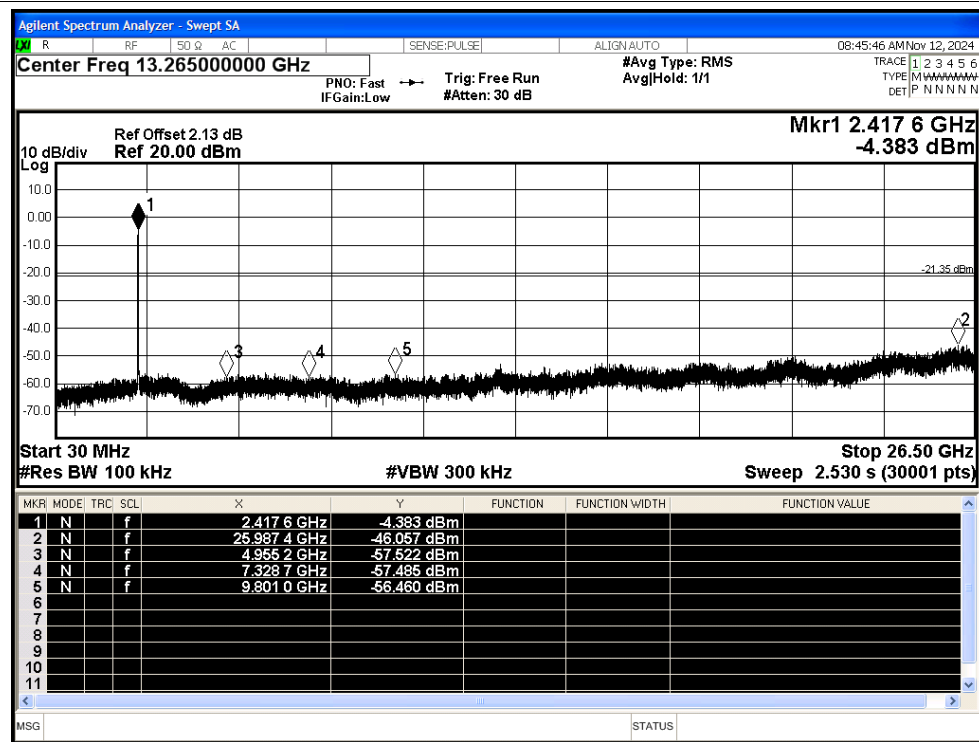




## Tx. Spurious NVNT g 2437MHz Ant1 Ref

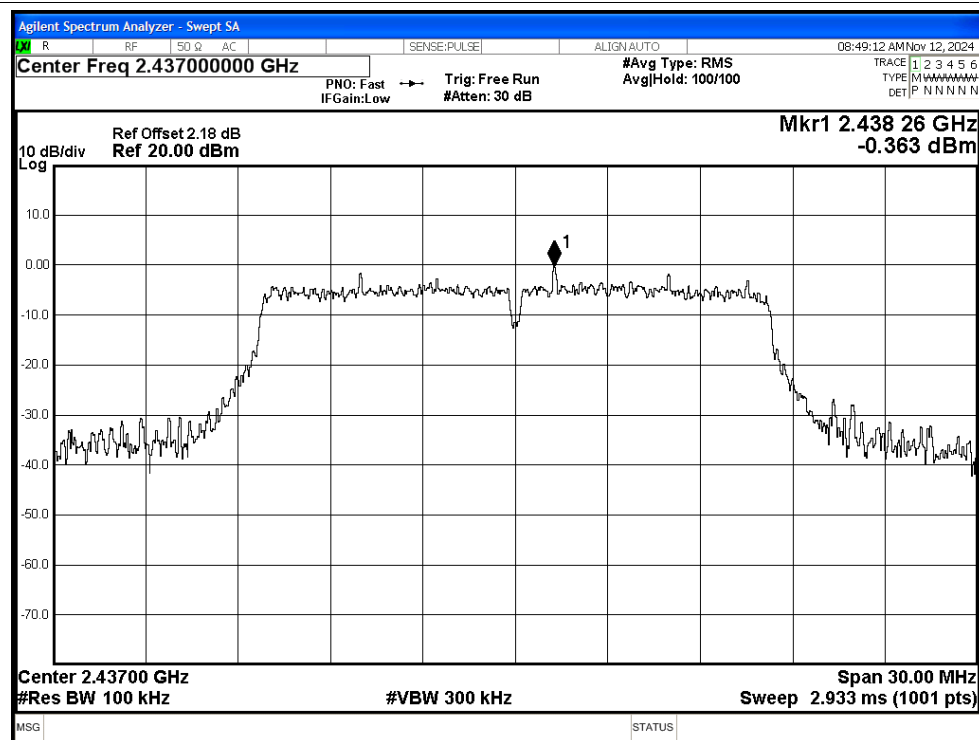


## Tx. Spurious NVNT g 2437MHz Ant1 Emission

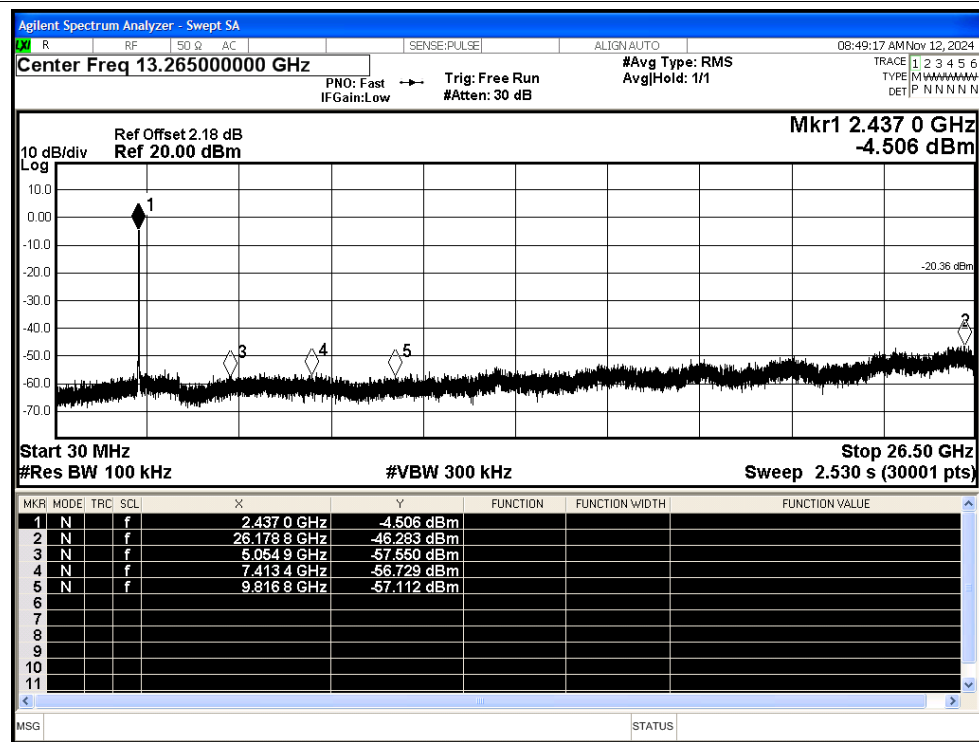




## Tx. Spurious NVNT g 2462MHz Ant1 Ref

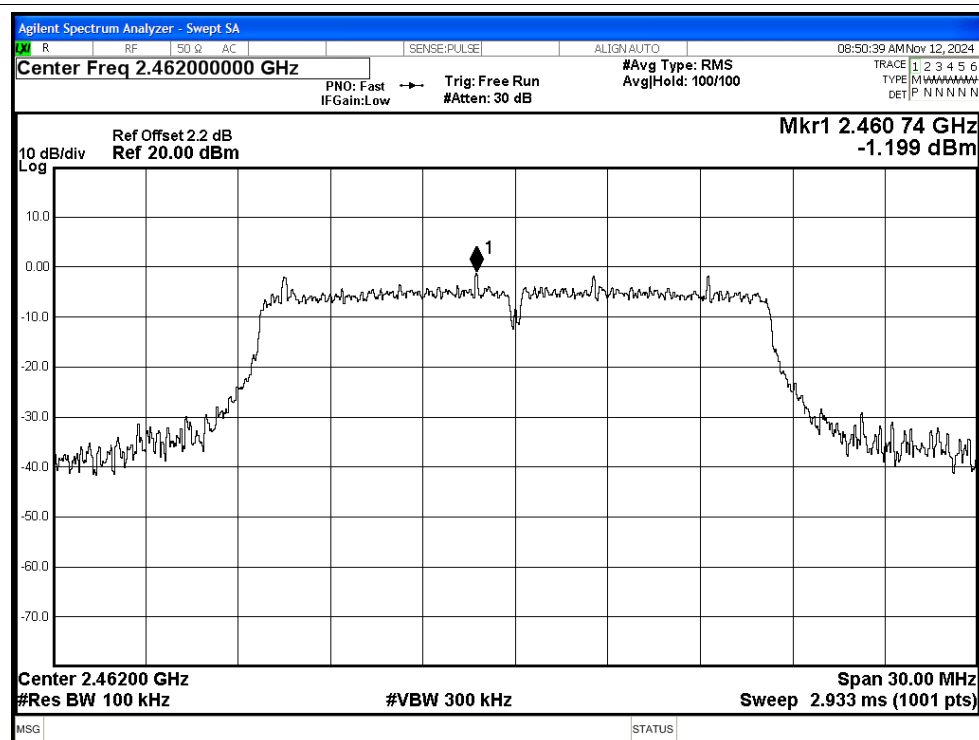


## Tx. Spurious NVNT g 2462MHz Ant1 Emission

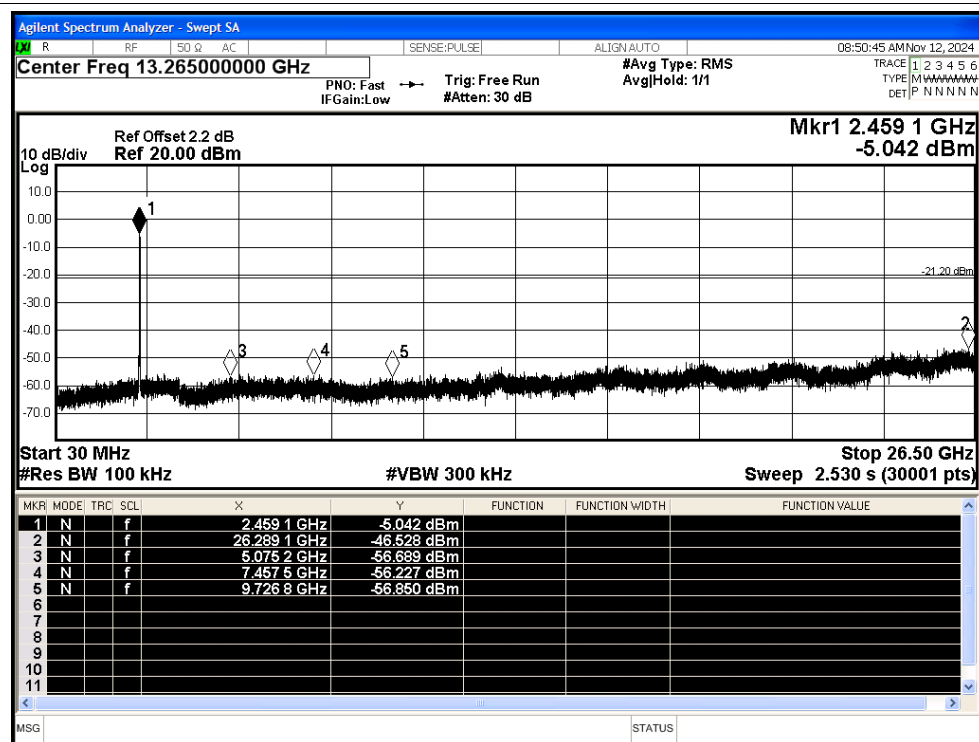




## Tx. Spurious NVNT n20 2412MHz Ant1 Ref

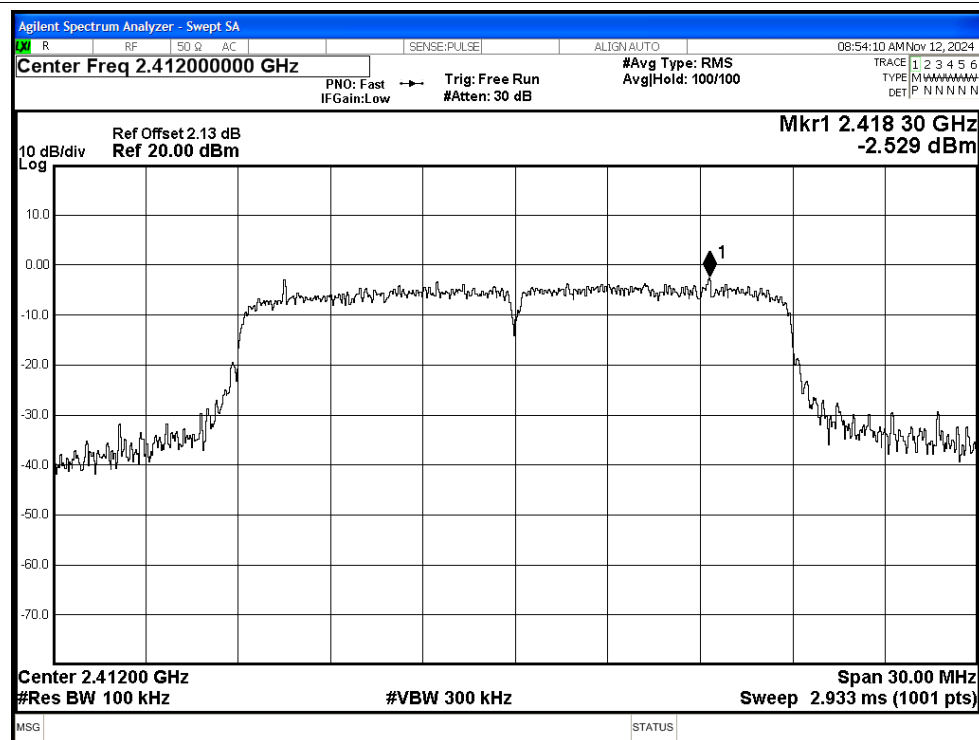


## Tx. Spurious NVNT n20 2412MHz Ant1 Emission

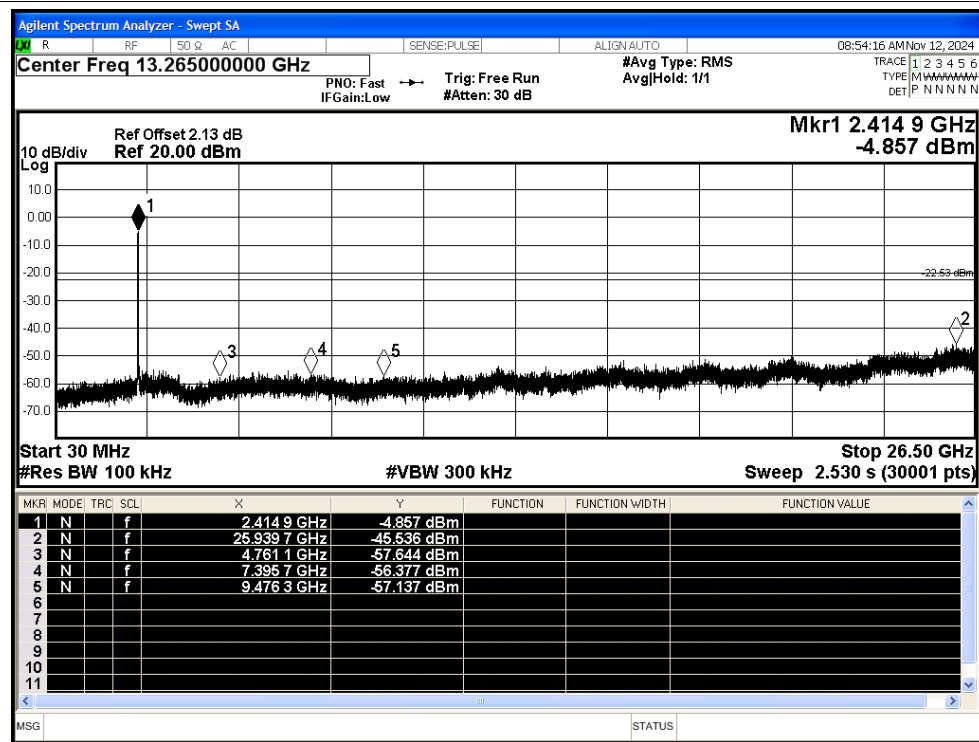




## Tx. Spurious NVNT n20 2437MHz Ant1 Ref

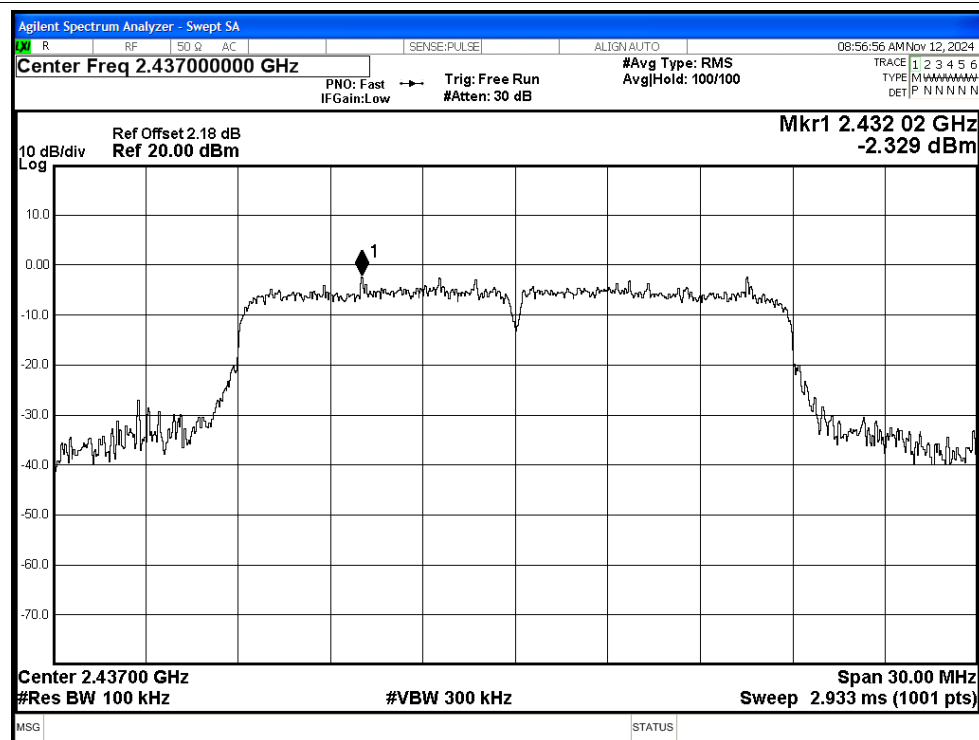


## Tx. Spurious NVNT n20 2437MHz Ant1 Emission

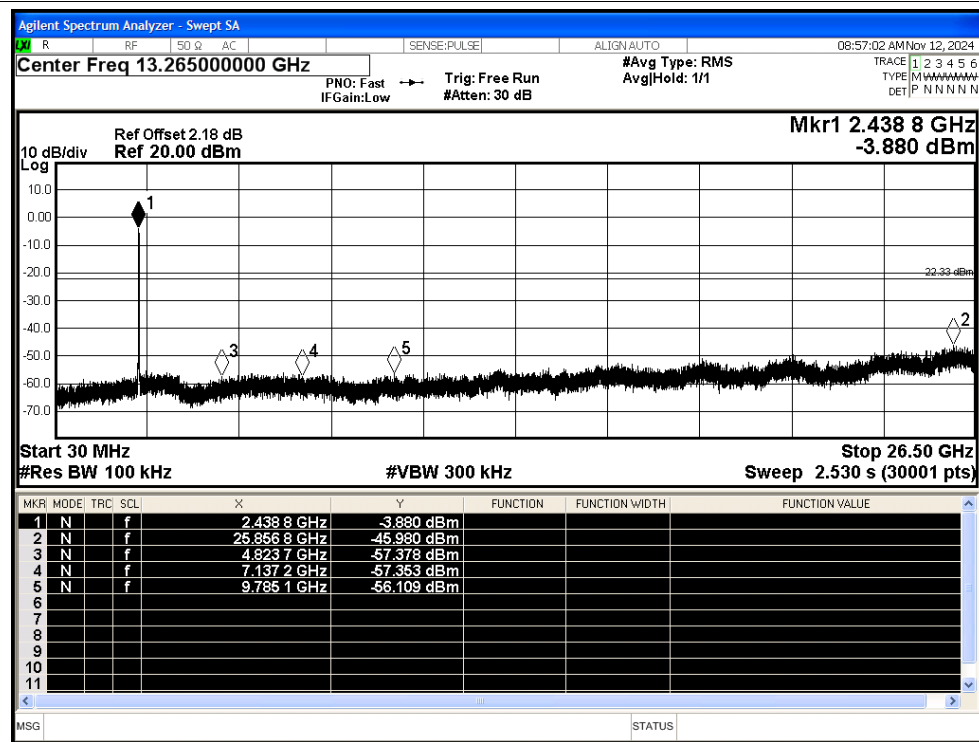




## Tx. Spurious NVNT n20 2462MHz Ant1 Ref

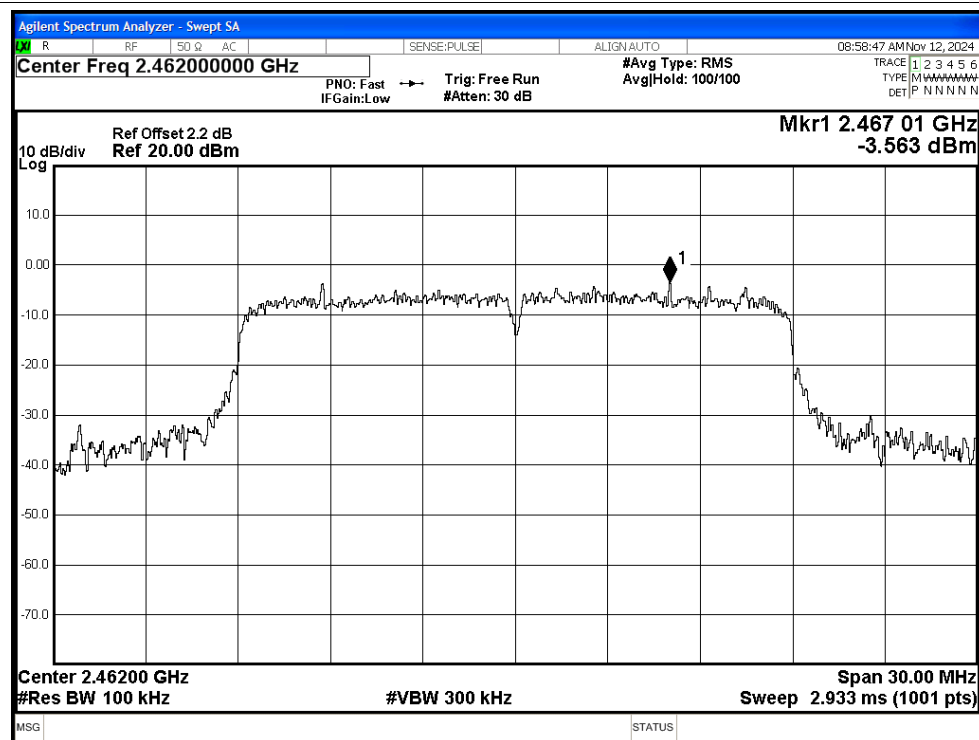


## Tx. Spurious NVNT n20 2462MHz Ant1 Emission

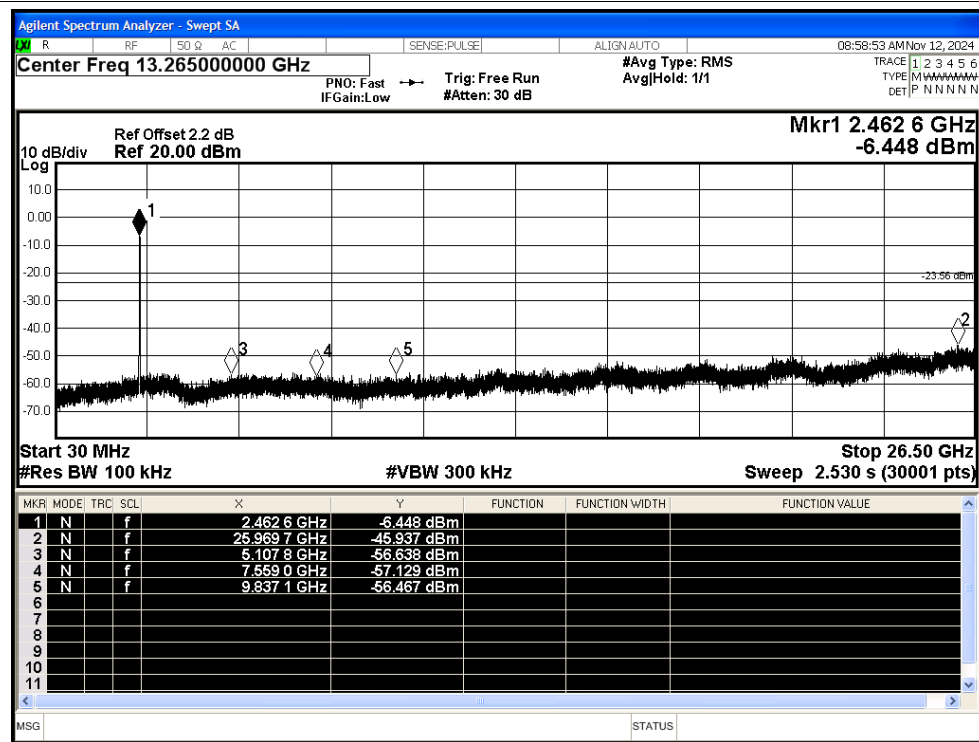




## Tx. Spurious NVNT n40 2422MHz Ant1 Ref

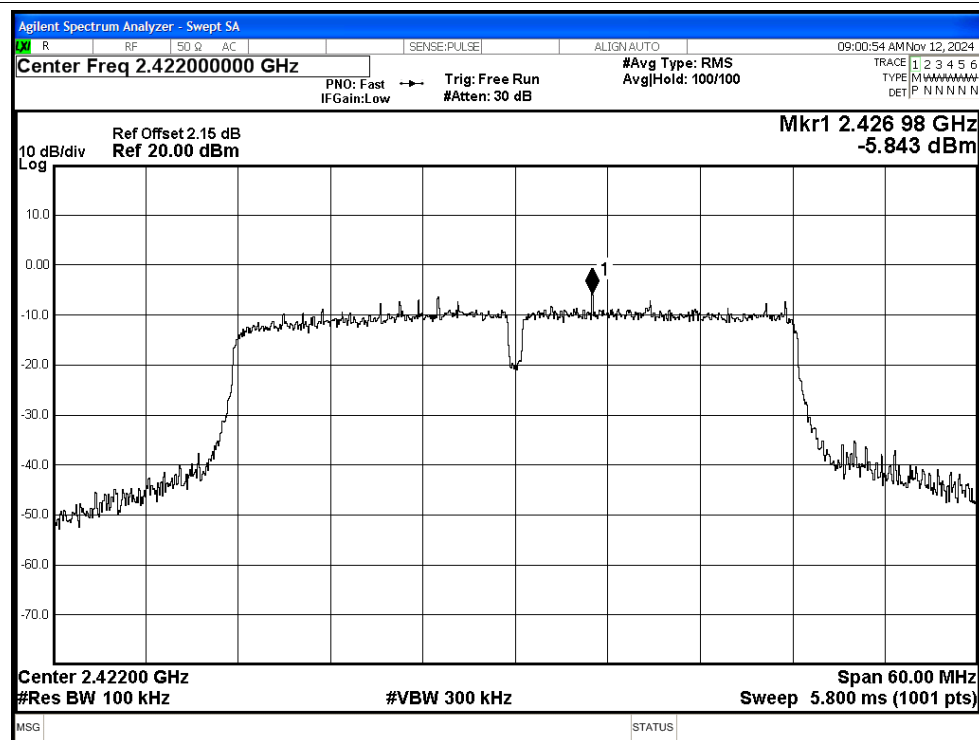


## Tx. Spurious NVNT n40 2422MHz Ant1 Emission

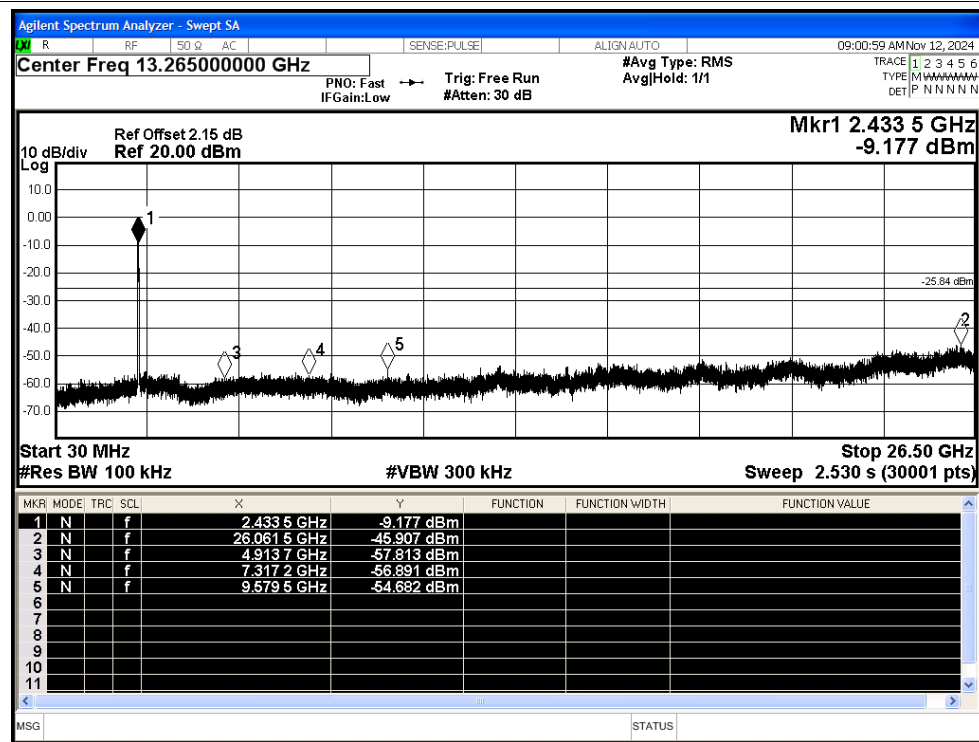




## Tx. Spurious NVNT n40 2437MHz Ant1 Ref

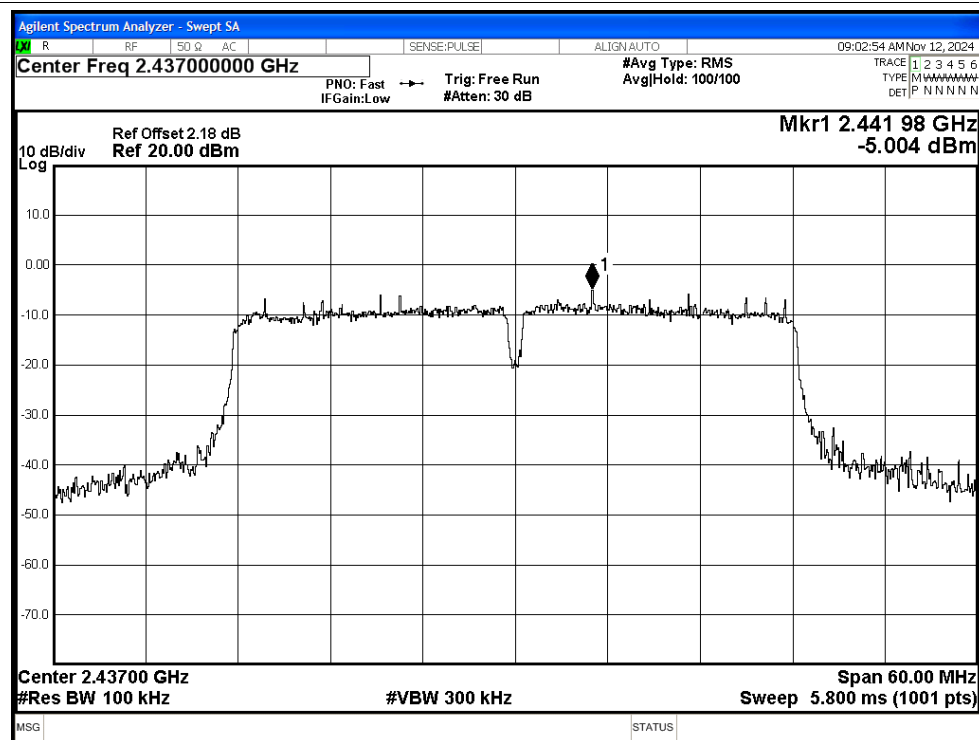


## Tx. Spurious NVNT n40 2437MHz Ant1 Emission

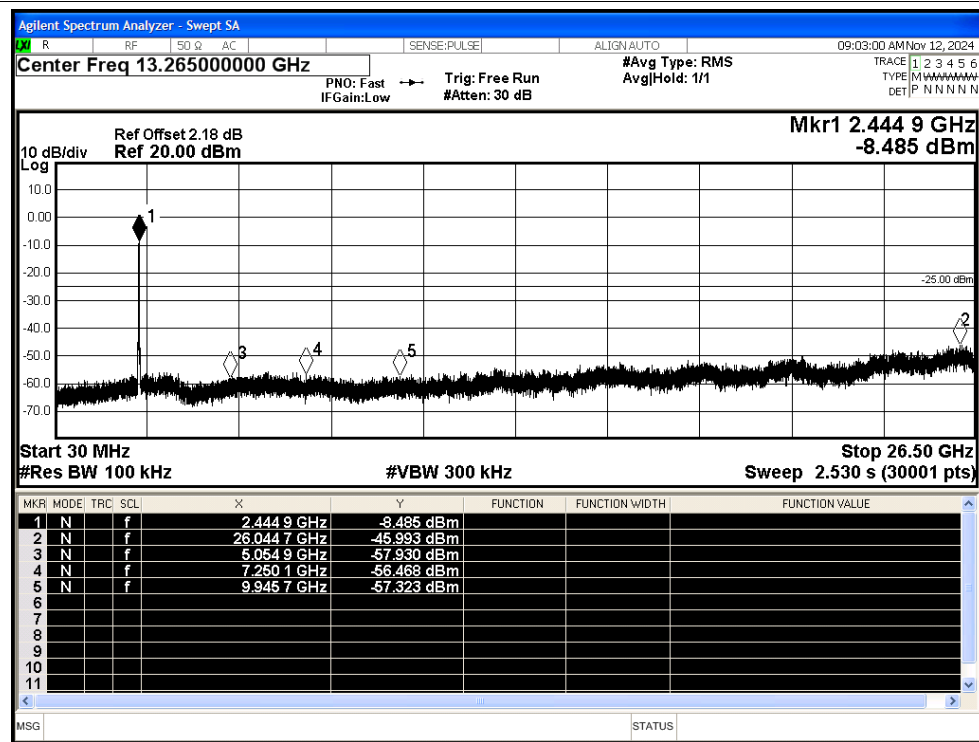




## Tx. Spurious NVNT n40 2452MHz Ant1 Ref

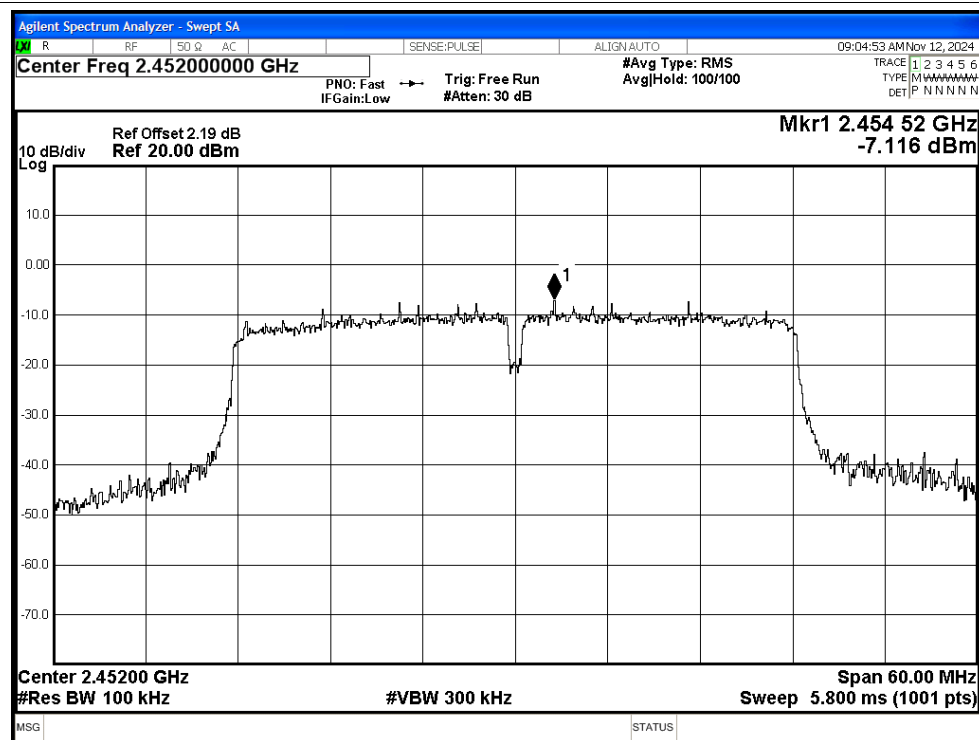

## Tx. Spurious NVNT n40 2452MHz Ant1 Emission

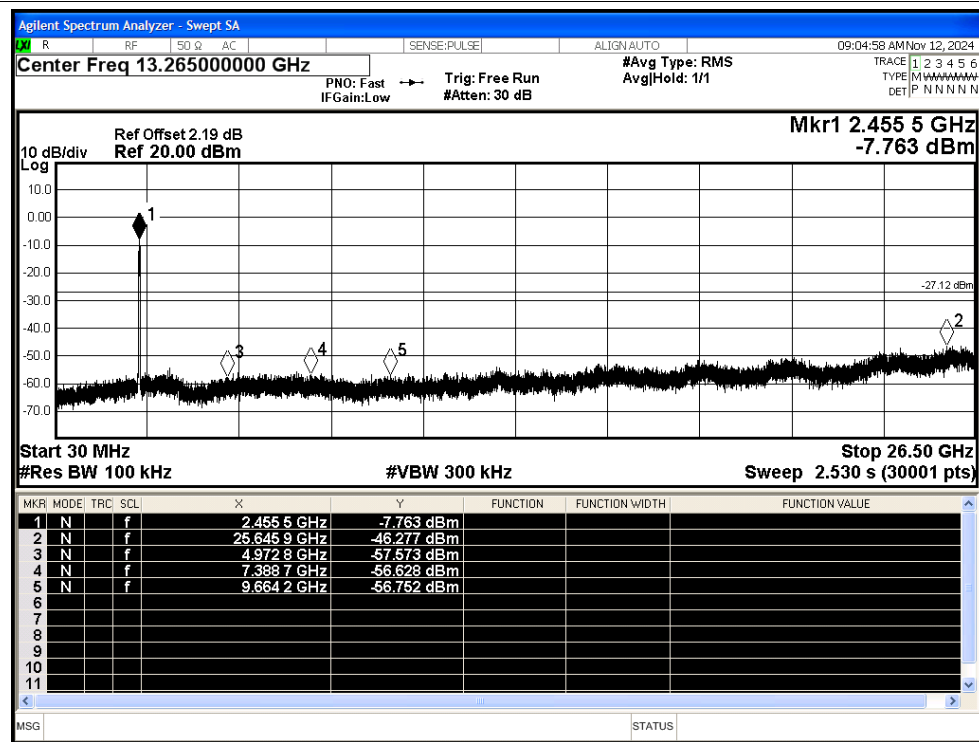



## A.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | b    | 2412            | Ant1    | 99.13          | 0                      | 0.15      |
| NVNT      | b    | 2437            | Ant1    | 99.13          | 0                      | 0.15      |
| NVNT      | b    | 2462            | Ant1    | 99.16          | 0                      | 0.15      |
| NVNT      | g    | 2412            | Ant1    | 97.75          | 0.1                    | 0.37      |
| NVNT      | g    | 2437            | Ant1    | 97.75          | 0.1                    | 0.37      |
| NVNT      | g    | 2462            | Ant1    | 97.75          | 0.1                    | 0.37      |
| NVNT      | n20  | 2412            | Ant1    | 97.25          | 0.12                   | 0.44      |
| NVNT      | n20  | 2437            | Ant1    | 97.33          | 0.12                   | 0.44      |
| NVNT      | n20  | 2462            | Ant1    | 97.33          | 0.12                   | 0.44      |
| NVNT      | n40  | 2422            | Ant1    | 94.7           | 0.24                   | 0.9       |
| NVNT      | n40  | 2437            | Ant1    | 94.71          | 0.24                   | 0.9       |
| NVNT      | n40  | 2452            | Ant1    | 94.71          | 0.24                   | 0.9       |






## Test Graphs

## Duty Cycle NVNT b 2412MHz Ant1

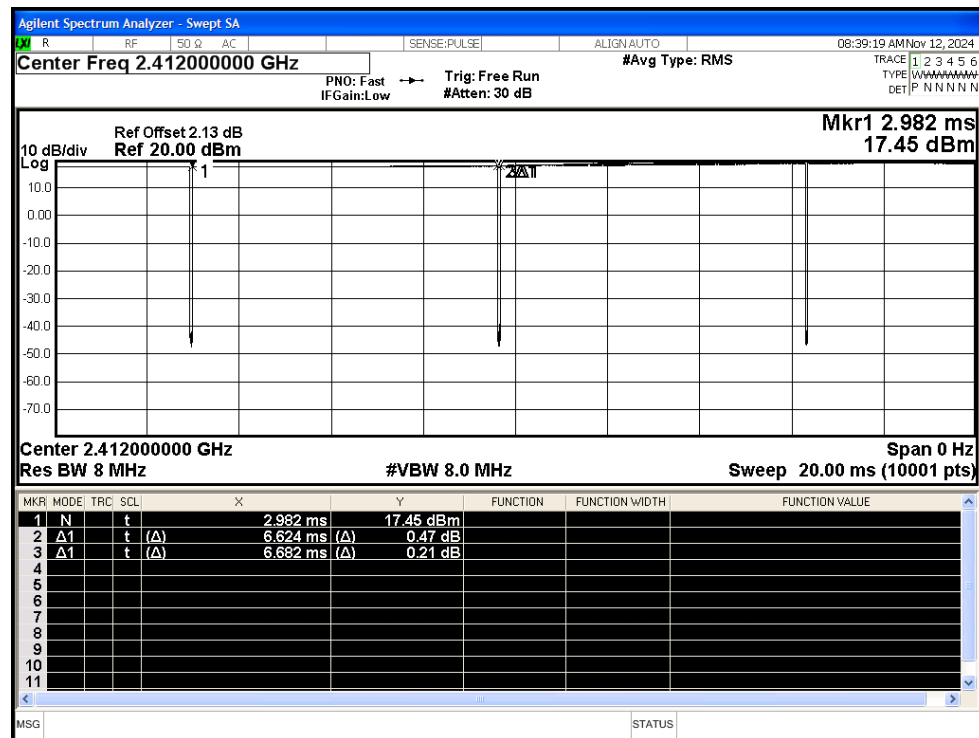


## Duty Cycle NVNT b 2437MHz Ant1

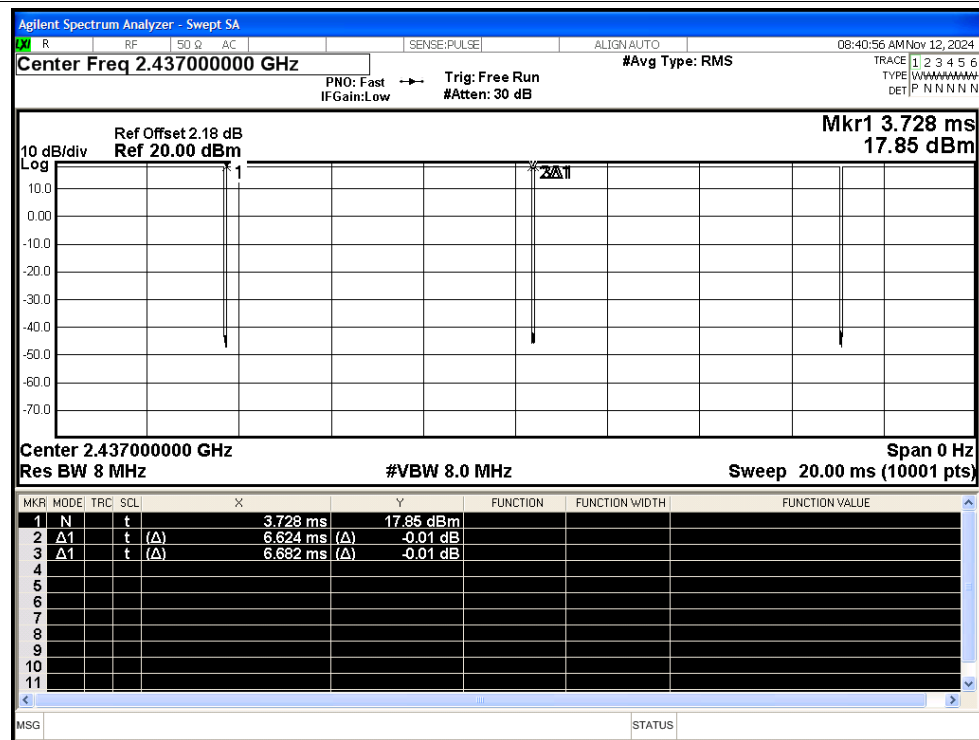




## Duty Cycle NVNT b 2462MHz Ant1

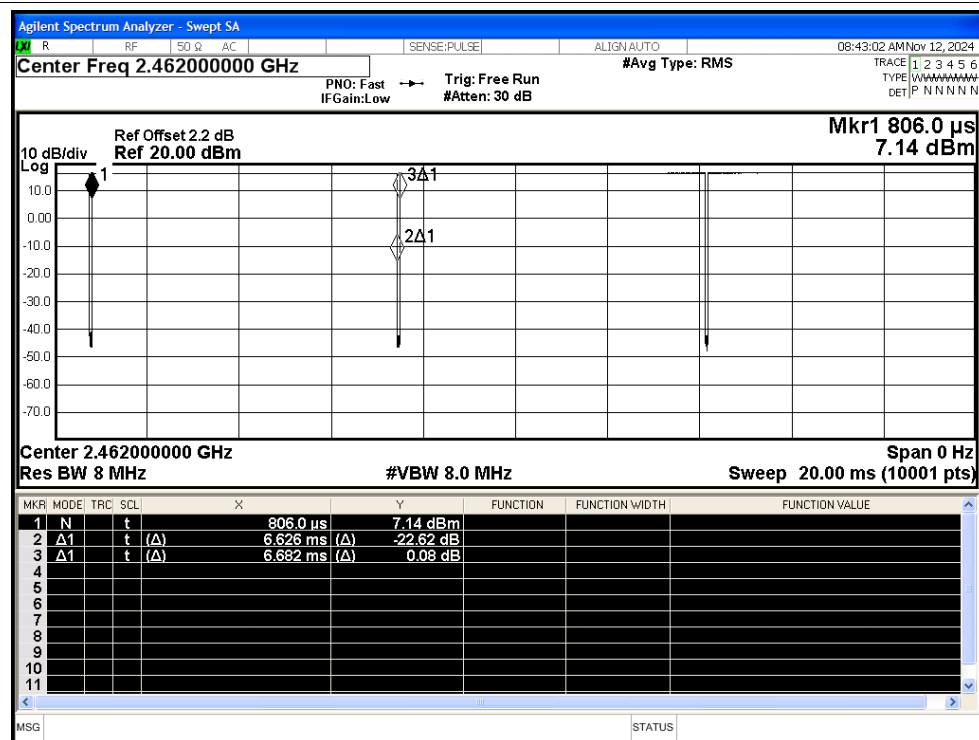

## Duty Cycle NVNT g 2412MHz Ant1

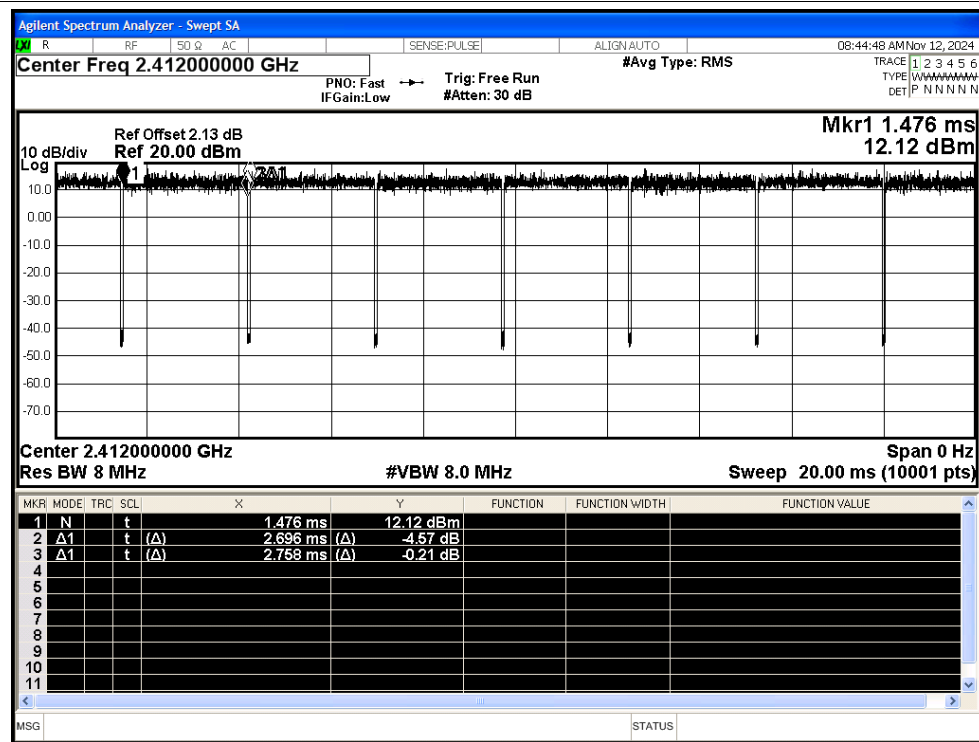

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT g 2437MHz Ant1

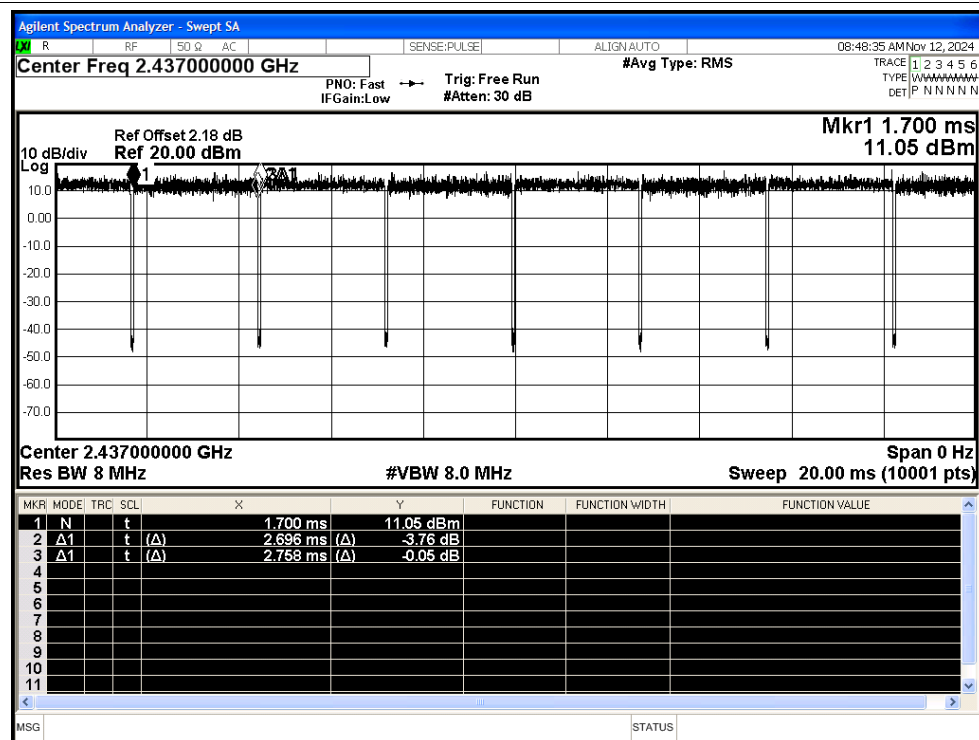


## Duty Cycle NVNT g 2462MHz Ant1

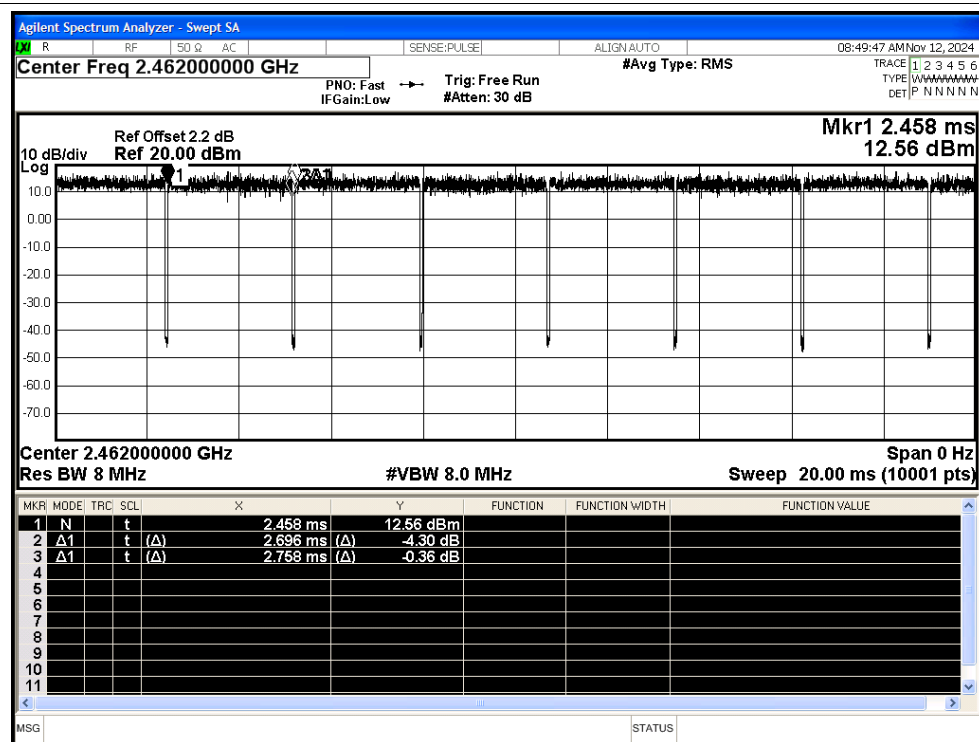




## Duty Cycle NVNT n20 2412MHz Ant1

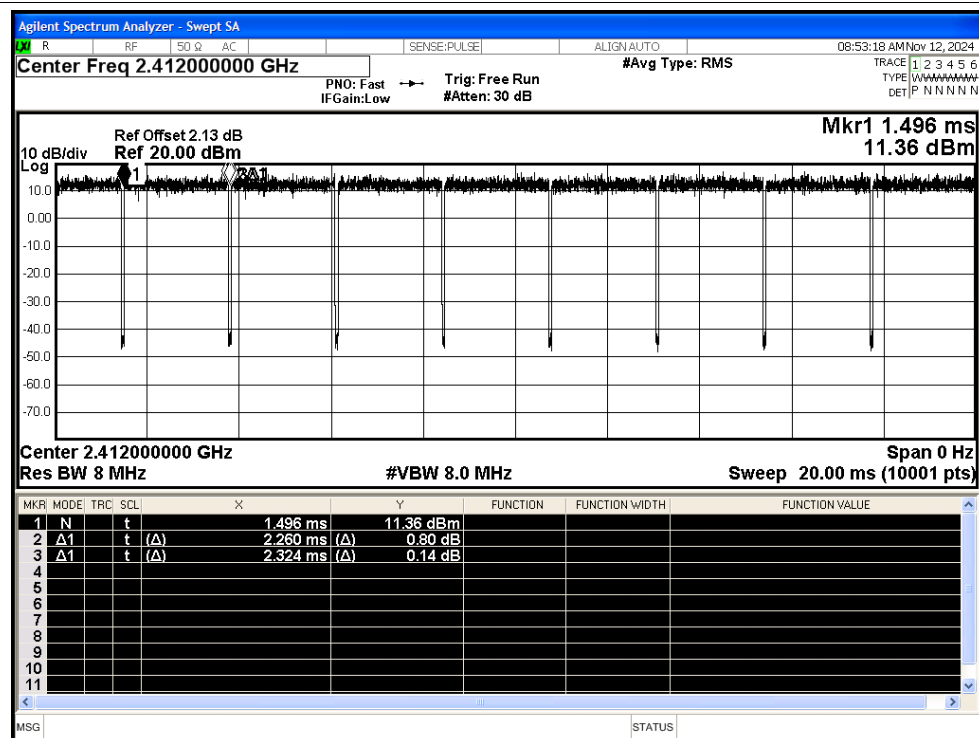


## Duty Cycle NVNT n20 2437MHz Ant1

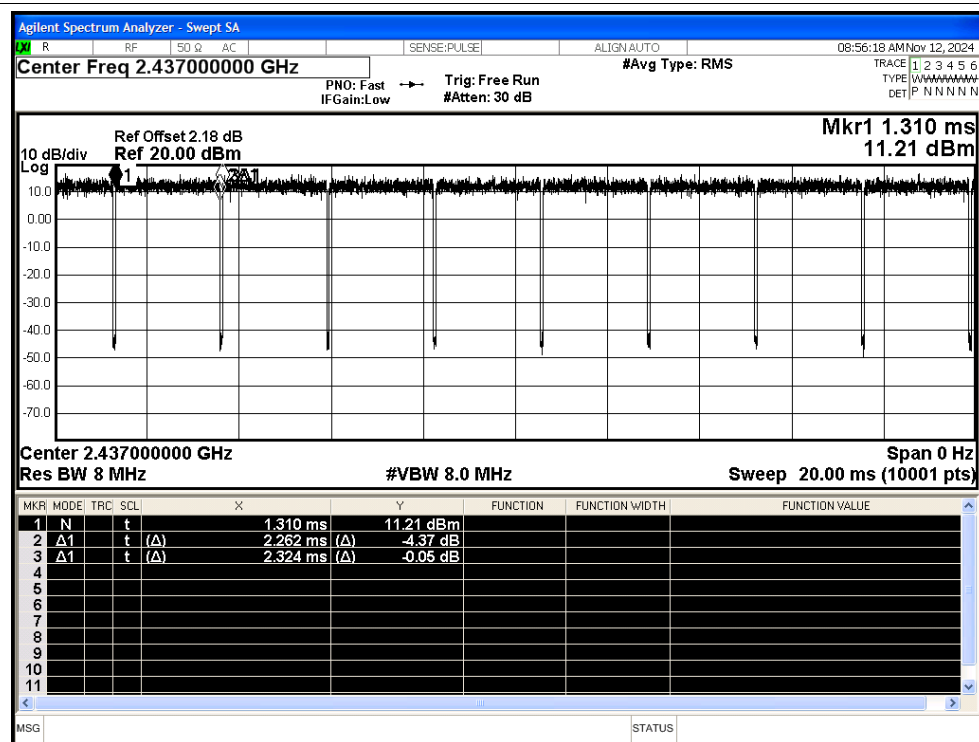




## Duty Cycle NVNT n20 2462MHz Ant1

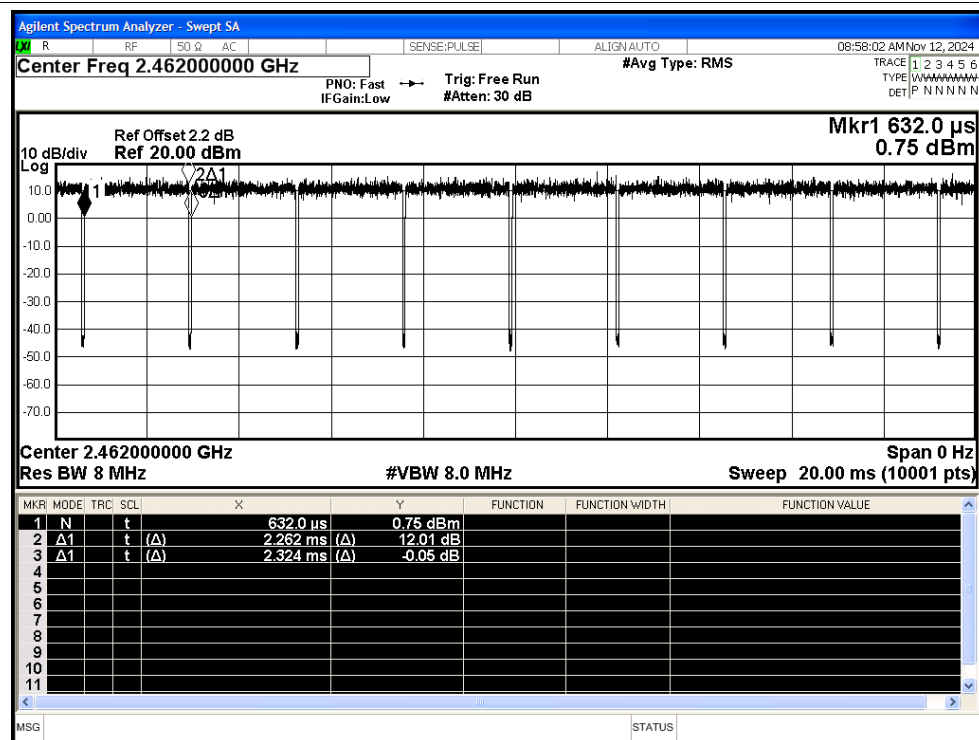


## Duty Cycle NVNT n40 2422MHz Ant1

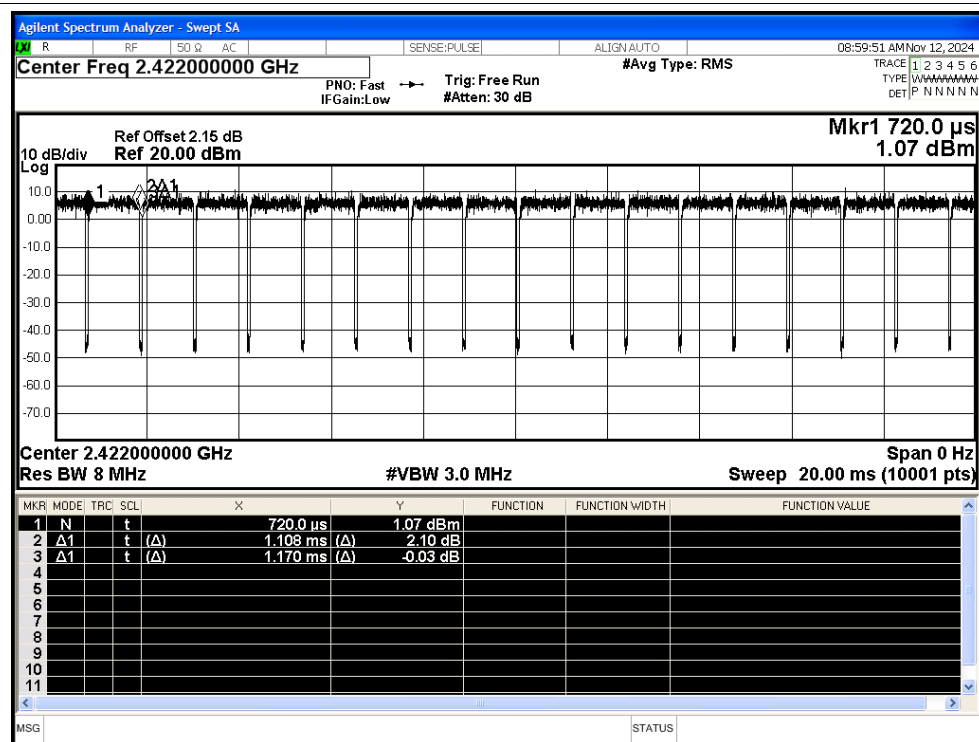




## Duty Cycle NVNT n40 2437MHz Ant1

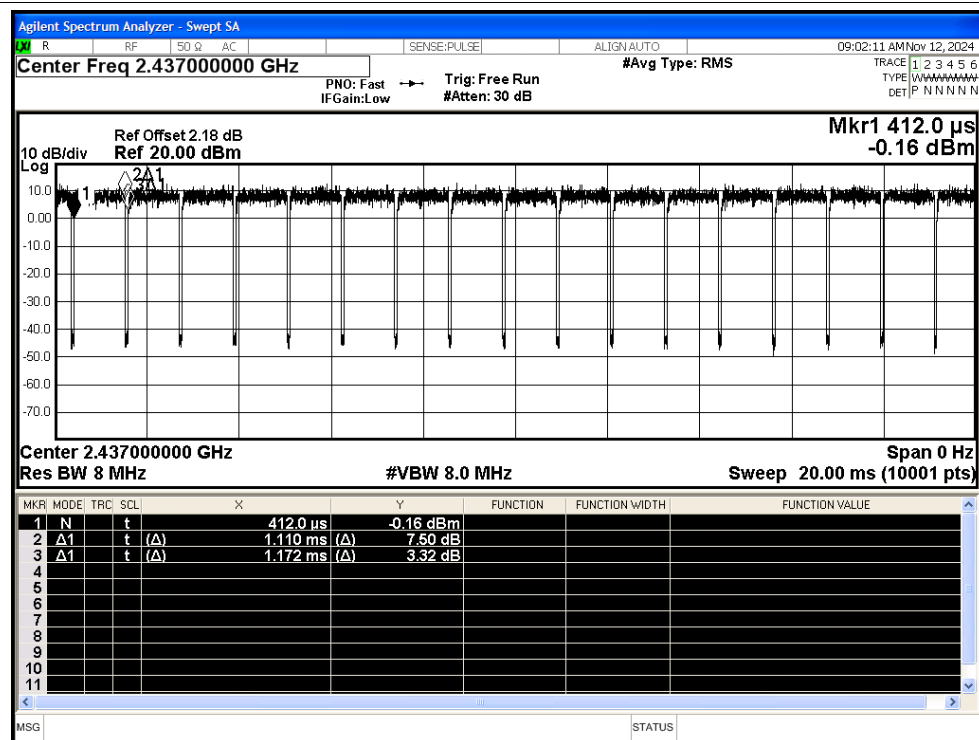

## Duty Cycle NVNT n40 2452MHz Ant1

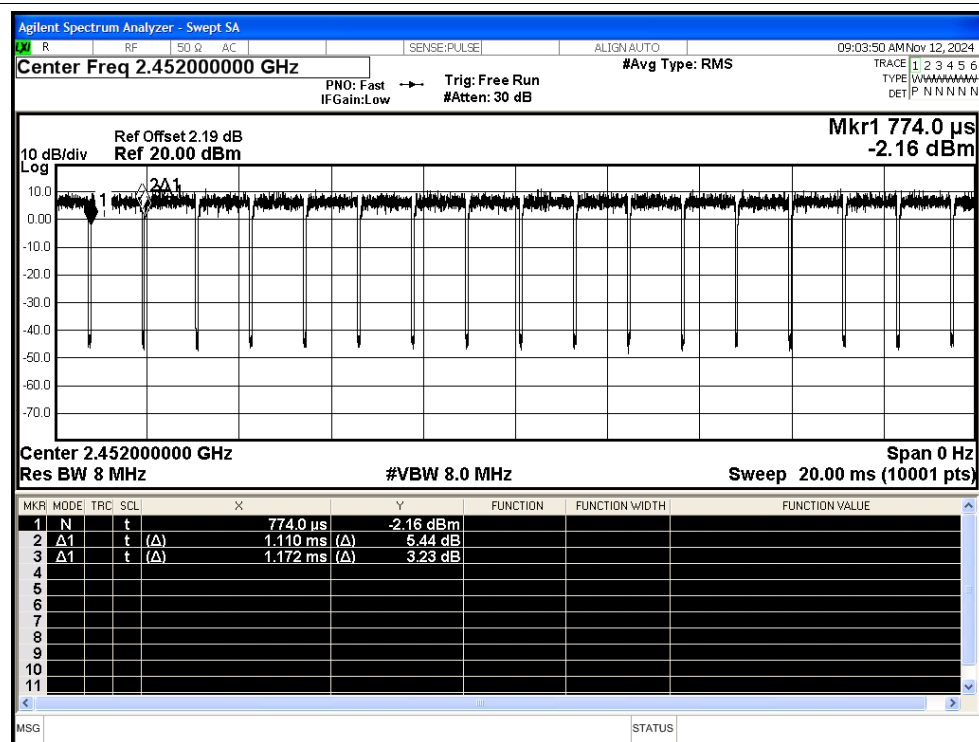



## A.7 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | b    | 2412            | Ant1    | 2310            | -49.38      | 2.23       | -                | 48.11      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2310            | -58.75      | 2.23       | 0                | 38.74      | Average  | 54             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2388.507        | -46.43      | 2.23       | -                | 51.06      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2389.794        | -56.12      | 2.23       | 0                | 41.37      | Average  | 54             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2390            | -48.31      | 2.23       | -                | 49.18      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2390            | -56.56      | 2.23       | 0                | 40.93      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.5          | -47.77      | 2.23       | -                | 49.72      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.5          | -55.73      | 2.23       | 0                | 41.76      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.835        | -44.22      | 2.23       | -                | 53.27      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2484.736        | -54.76      | 2.23       | 0                | 42.73      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2500            | -49.65      | 2.23       | -                | 47.84      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2500            | -57.82      | 2.23       | 0                | 39.67      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2310            | -49.02      | 2.23       | -                | 48.47      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2310            | -58.8       | 2.23       | 0.1              | 38.79      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2389.209        | -35.85      | 2.23       | -                | 61.64      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2389.911        | -51.77      | 2.23       | 0.1              | 45.82      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2390            | -41.25      | 2.23       | -                | 56.24      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2390            | -51.57      | 2.23       | 0.1              | 46.02      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.5          | -42.89      | 2.23       | -                | 54.60      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.5          | -54.54      | 2.23       | 0.1              | 43.05      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.57         | -35.88      | 2.23       | -                | 61.61      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2484.63         | -53.38      | 2.23       | 0.1              | 44.21      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2500            | -49.14      | 2.23       | -                | 48.35      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2500            | -57.68      | 2.23       | 0.1              | 39.91      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2310            | -51.2       | 2.23       | -                | 46.29      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2310            | -58.6       | 2.23       | 0.12             | 39.01      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2389.677        | -31.15      | 2.23       | -                | 66.34      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2389.911        | -51.18      | 2.23       | 0.12             | 46.43      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2390            | -36.42      | 2.23       | -                | 61.07      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2390            | -49.83      | 2.23       | 0.12             | 47.78      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.5          | -34.54      | 2.23       | -                | 62.95      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.5          | -54.57      | 2.23       | 0.12             | 43.04      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.517        | -34.54      | 2.23       | -                | 62.95      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.888        | -52.03      | 2.23       | 0.12             | 45.58      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2500            | -50.65      | 2.23       | -                | 46.84      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2500            | -58.04      | 2.23       | 0.12             | 39.57      | Average  | 54             | Pass    |






|      |     |      |      |          |        |      |      |       |         |    |      |
|------|-----|------|------|----------|--------|------|------|-------|---------|----|------|
| NVNT | n40 | 2422 | Ant1 | 2310     | -49.84 | 2.23 | -    | 47.65 | Peak    | 74 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2310     | -58.97 | 2.23 | 0.24 | 38.76 | Average | 54 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2387.816 | -38.66 | 2.23 | -    | 58.83 | Peak    | 74 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2389.662 | -52    | 2.23 | 0.24 | 45.73 | Average | 54 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2390     | -40.42 | 2.23 | -    | 57.07 | Peak    | 74 | Pass |
| NVNT | n40 | 2422 | Ant1 | 2390     | -52.55 | 2.23 | 0.24 | 45.18 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.5   | -37.83 | 2.23 | -    | 59.66 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.5   | -53.23 | 2.23 | 0.24 | 44.50 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2485.414 | -36.06 | 2.23 | -    | 61.43 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2483.542 | -52.07 | 2.23 | 0.24 | 45.66 | Average | 54 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2500     | -50.19 | 2.23 | -    | 47.30 | Peak    | 74 | Pass |
| NVNT | n40 | 2452 | Ant1 | 2500     | -57.98 | 2.23 | 0.24 | 39.75 | Average | 54 | Pass |






## Test Graphs

## Restrict Band NVNT b 2412MHz Ant1 Peak

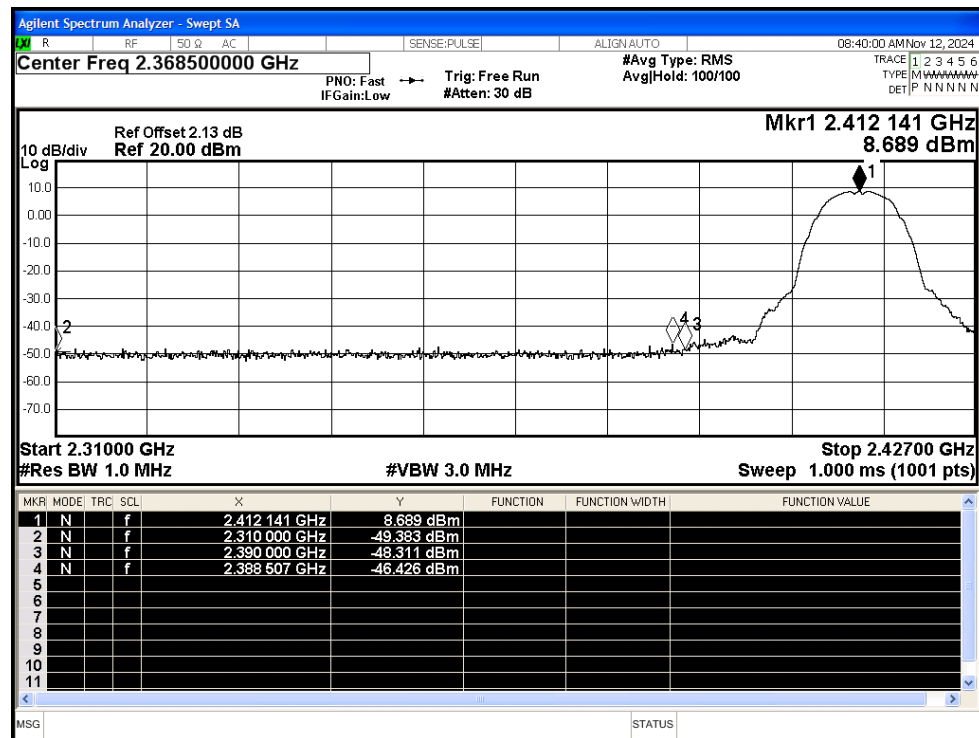


## Restrict Band NVNT b 2412MHz Ant1 Average

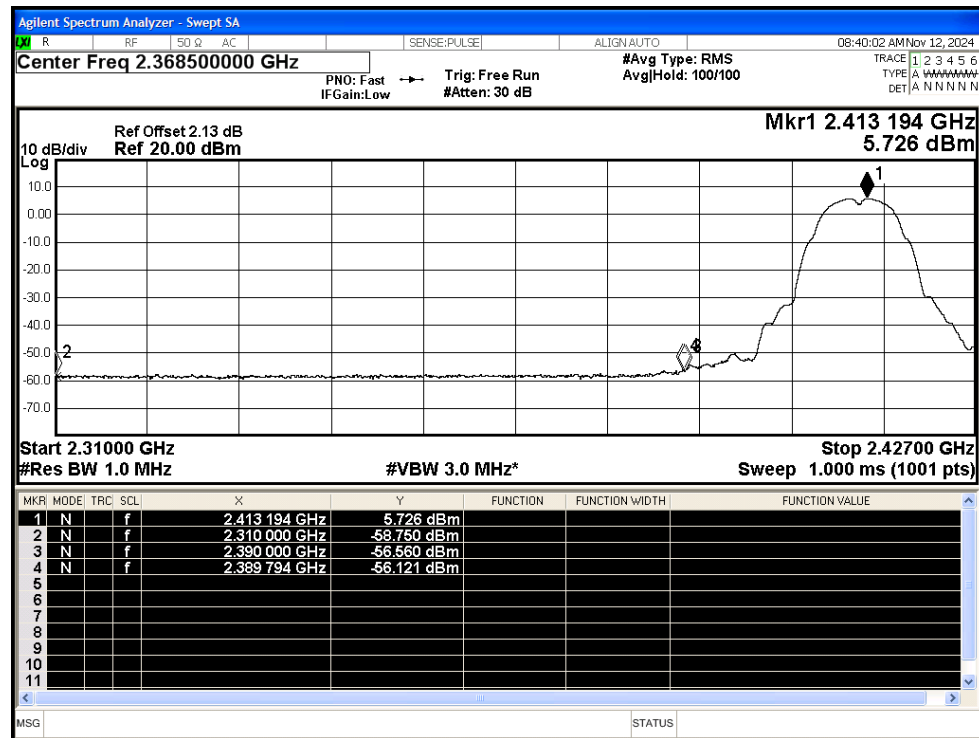




## Restrict Band NVNT b 2462MHz Ant1 Peak

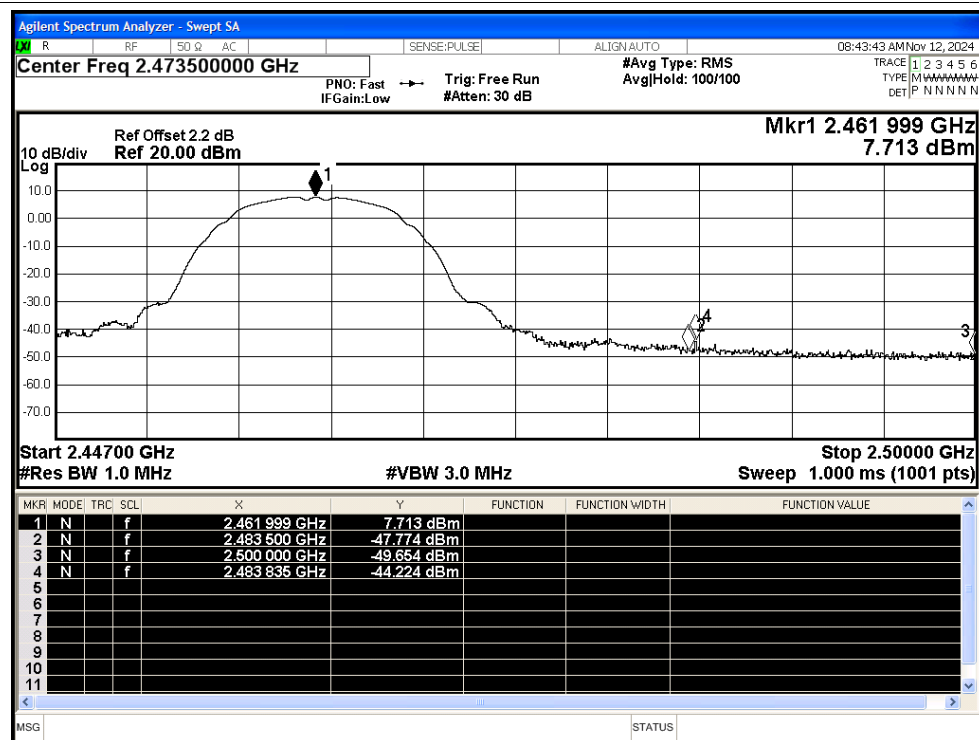


## Restrict Band NVNT b 2462MHz Ant1 Average

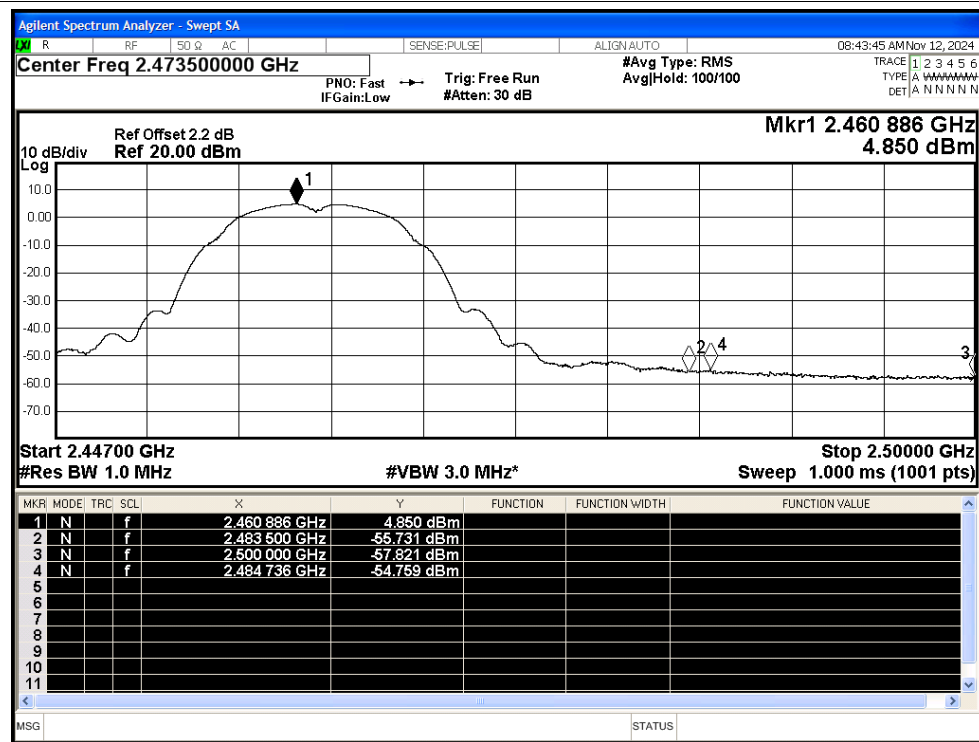




## Restrict Band NVNT g 2412MHz Ant1 Peak

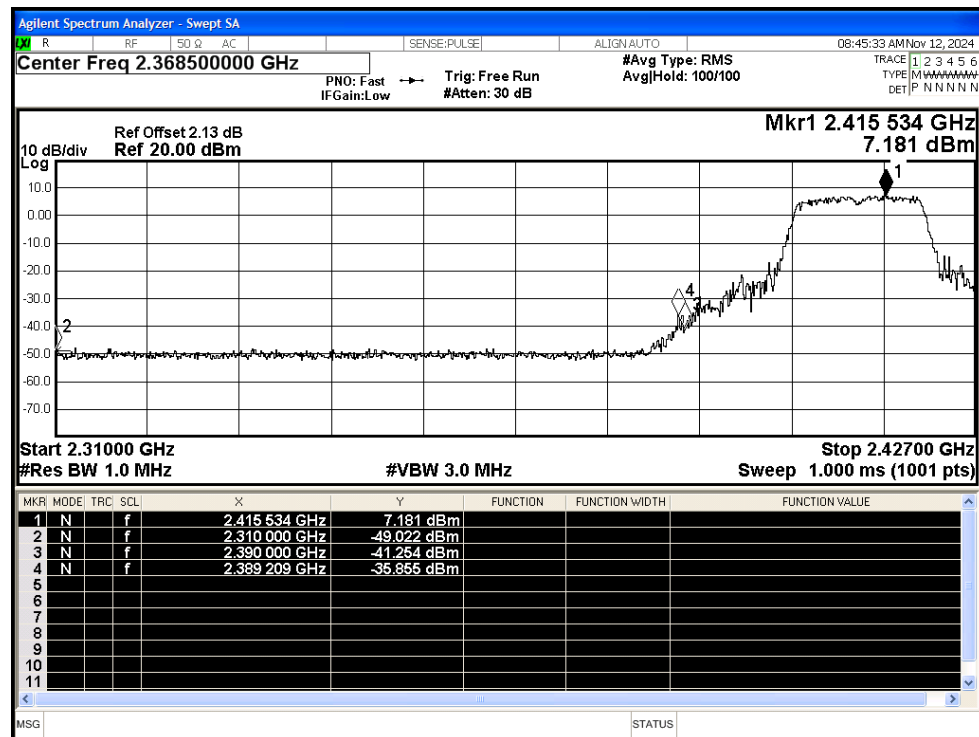


## Restrict Band NVNT g 2412MHz Ant1 Average

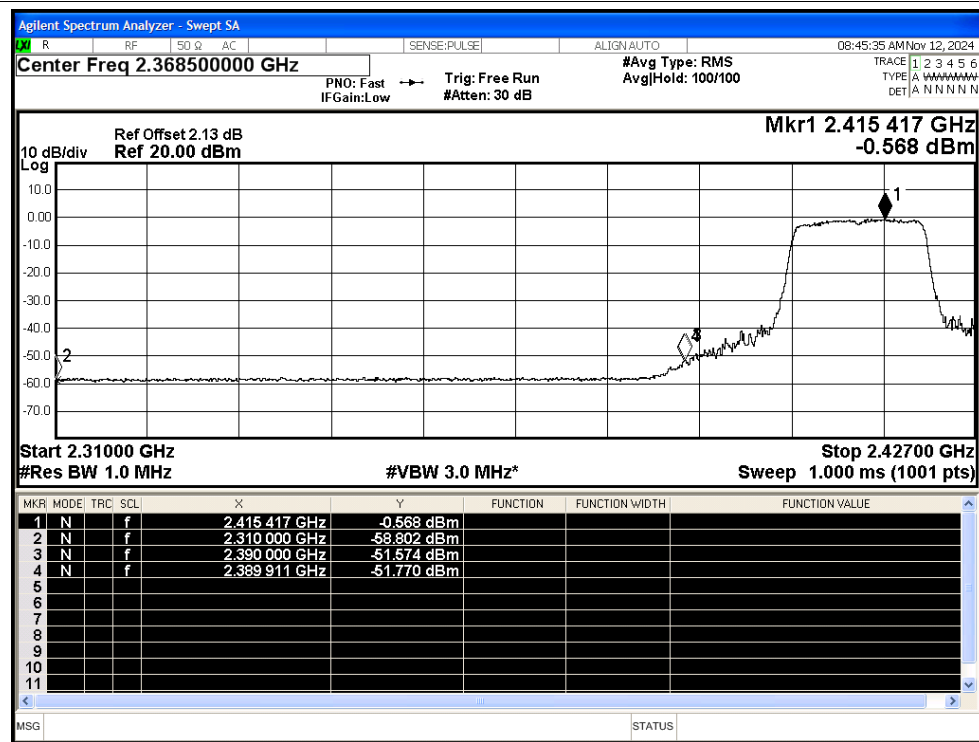




## Restrict Band NVNT g 2462MHz Ant1 Peak

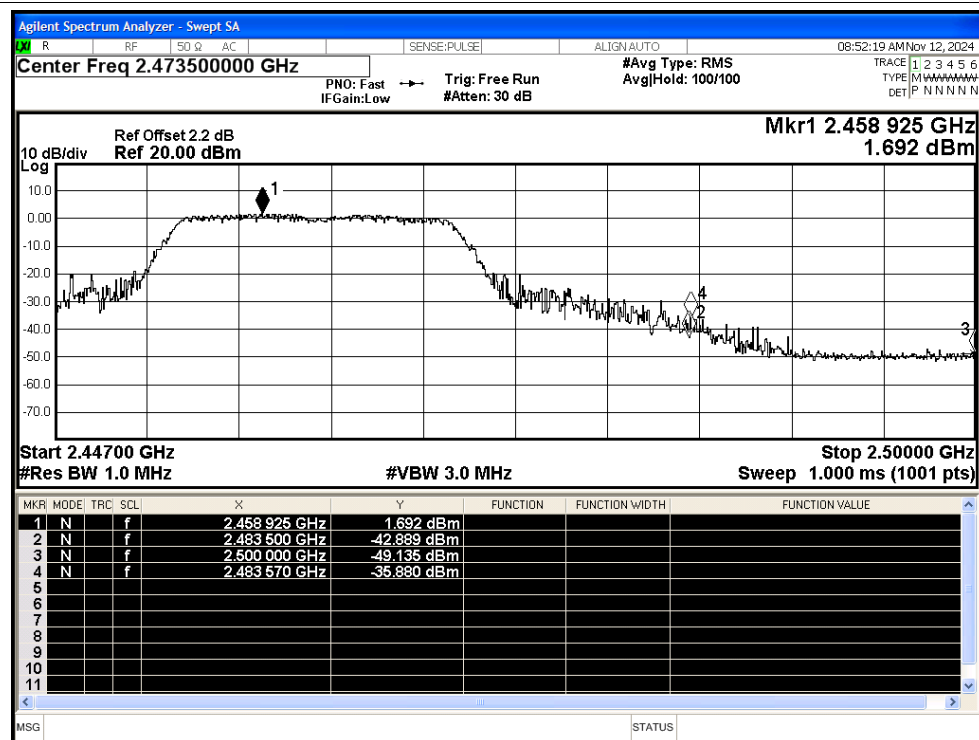


## Restrict Band NVNT g 2462MHz Ant1 Average

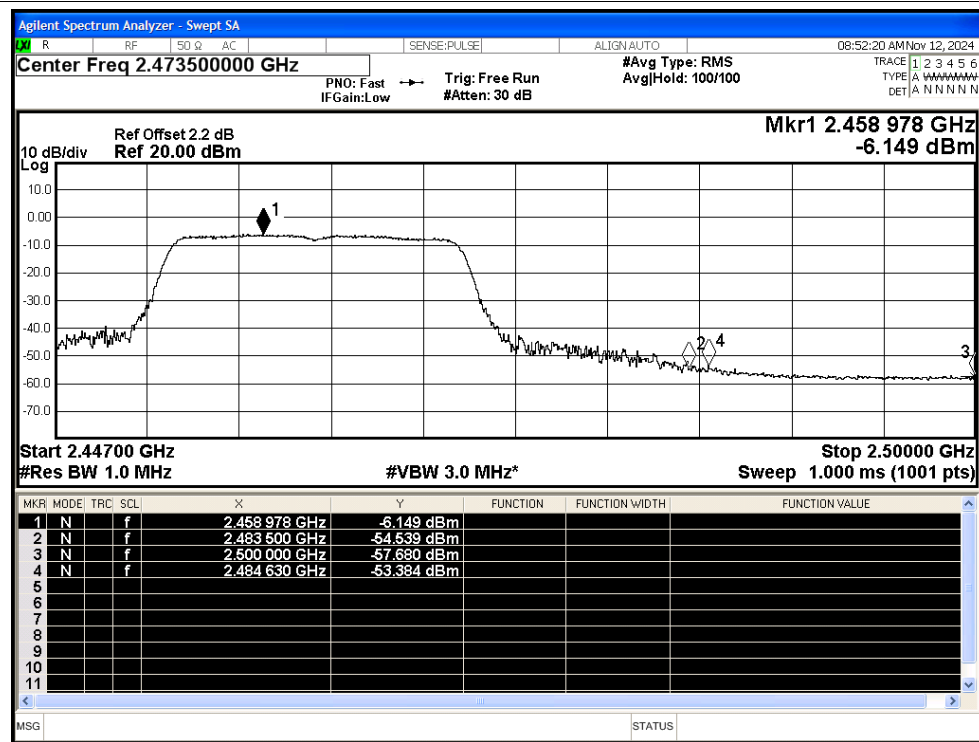




## Restrict Band NVNT n20 2412MHz Ant1 Peak

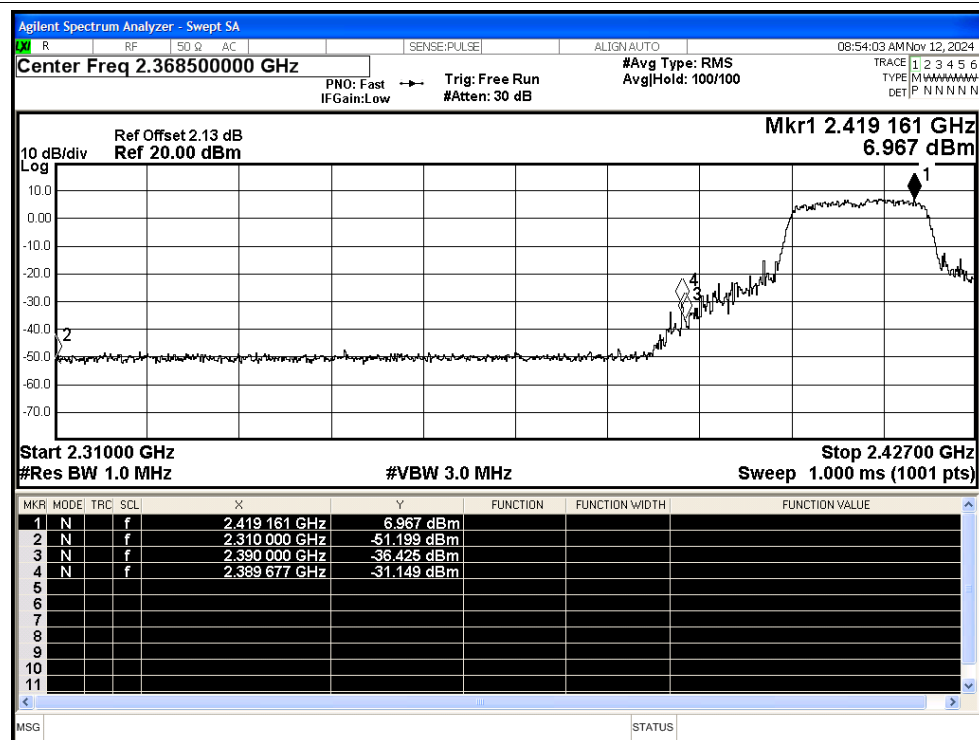


## Restrict Band NVNT n20 2412MHz Ant1 Average

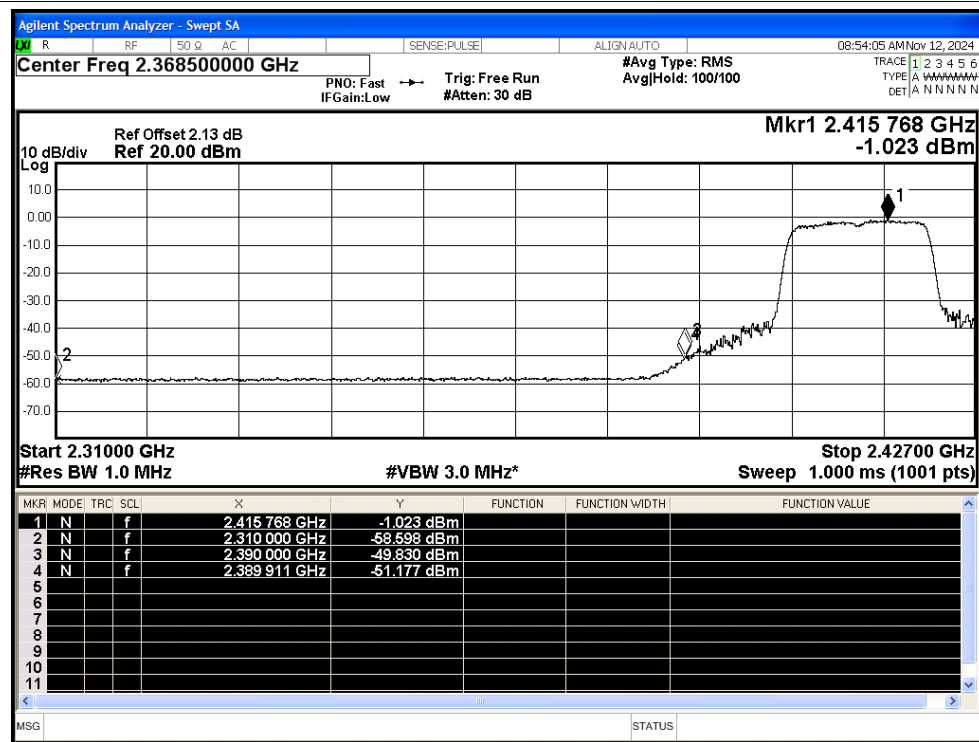




## Restrict Band NVNT n20 2462MHz Ant1 Peak

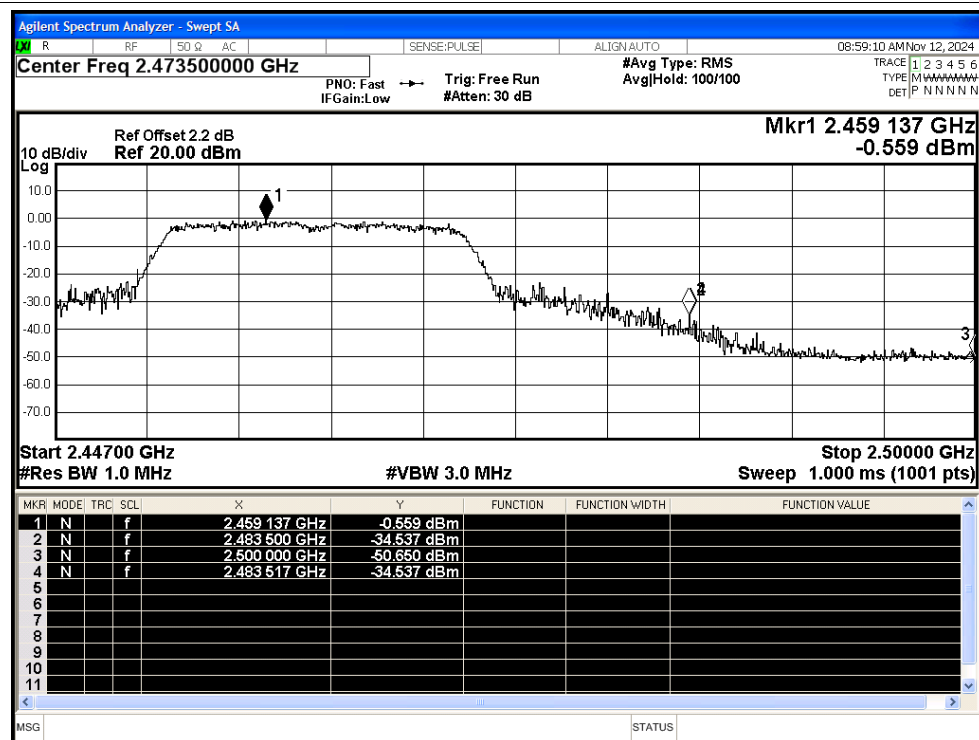


## Restrict Band NVNT n20 2462MHz Ant1 Average

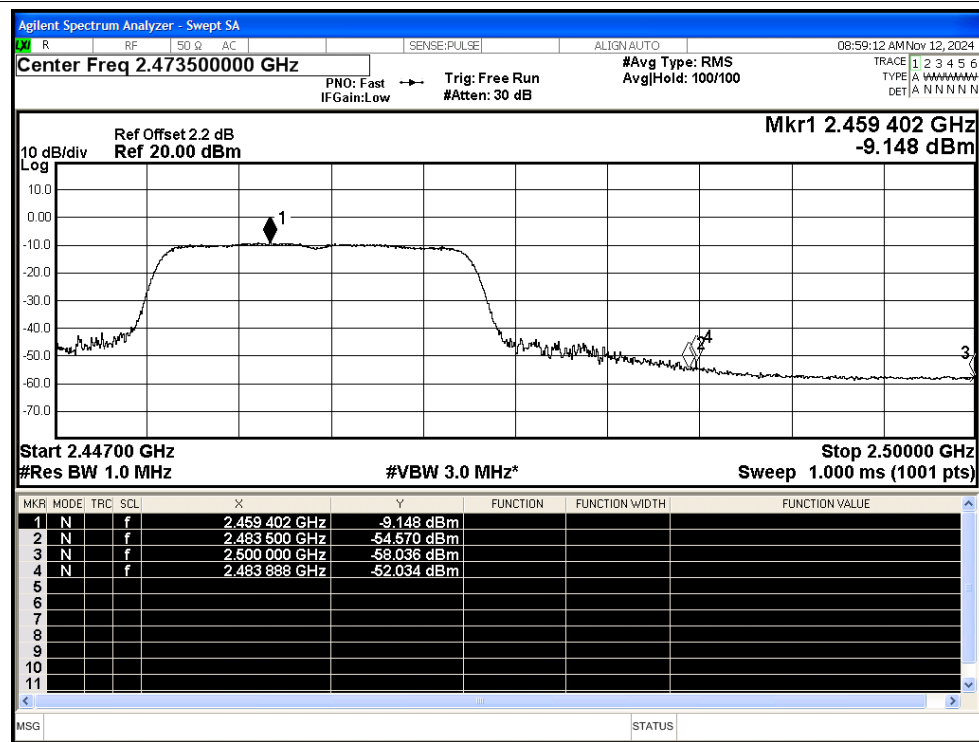




## Restrict Band NVNT n40 2422MHz Ant1 Peak

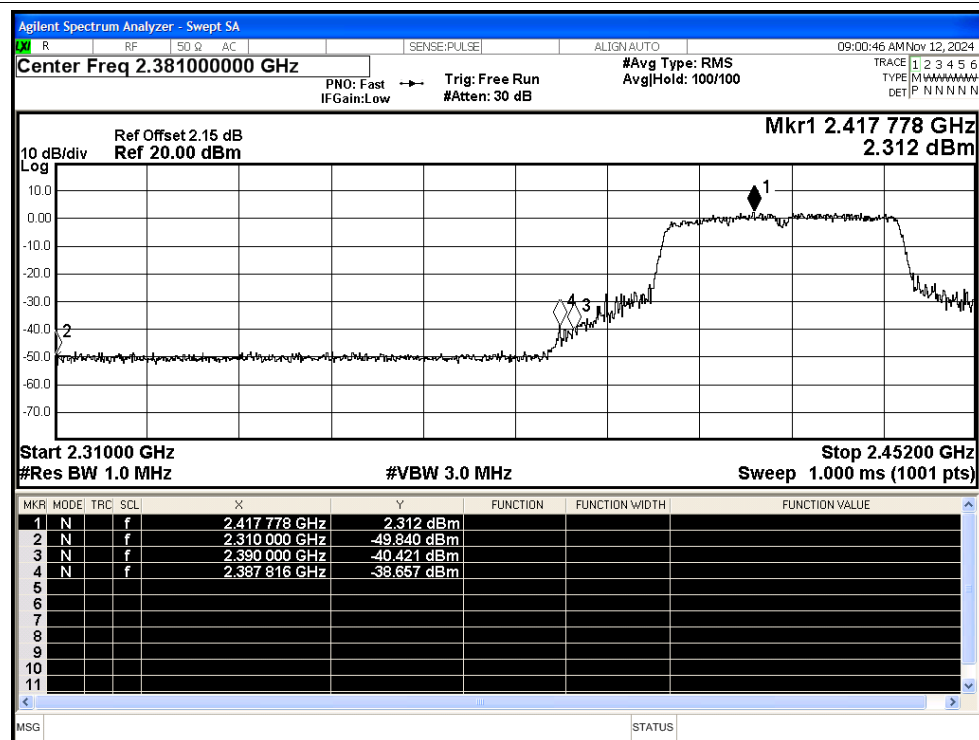


## Restrict Band NVNT n40 2422MHz Ant1 Average

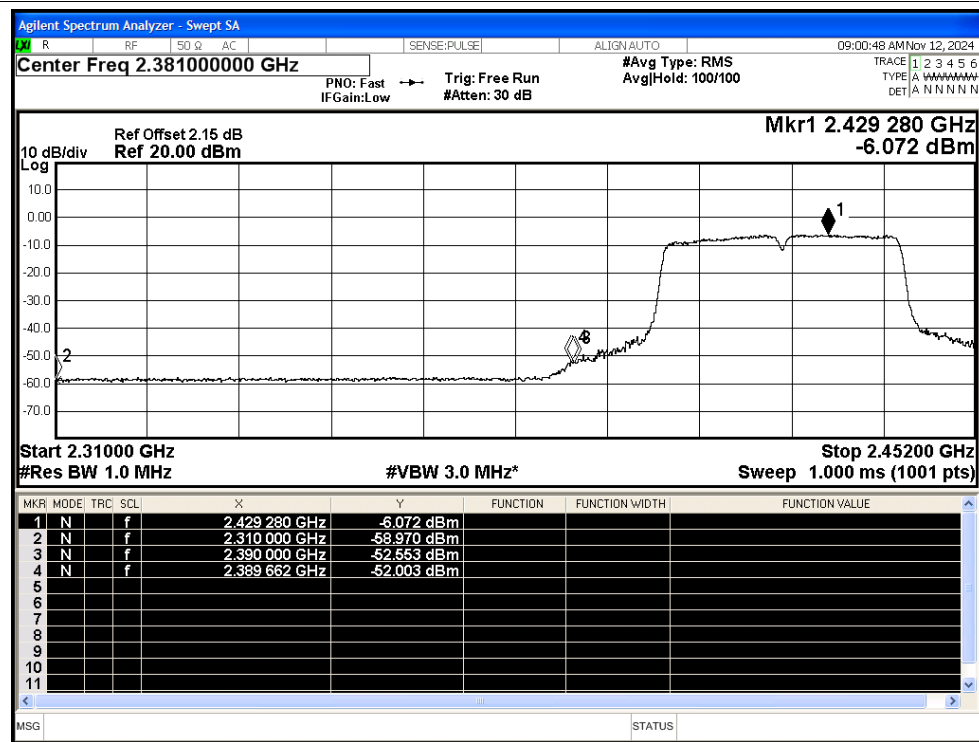



## Restrict Band NVNT n40 2452MHz Ant1 Peak

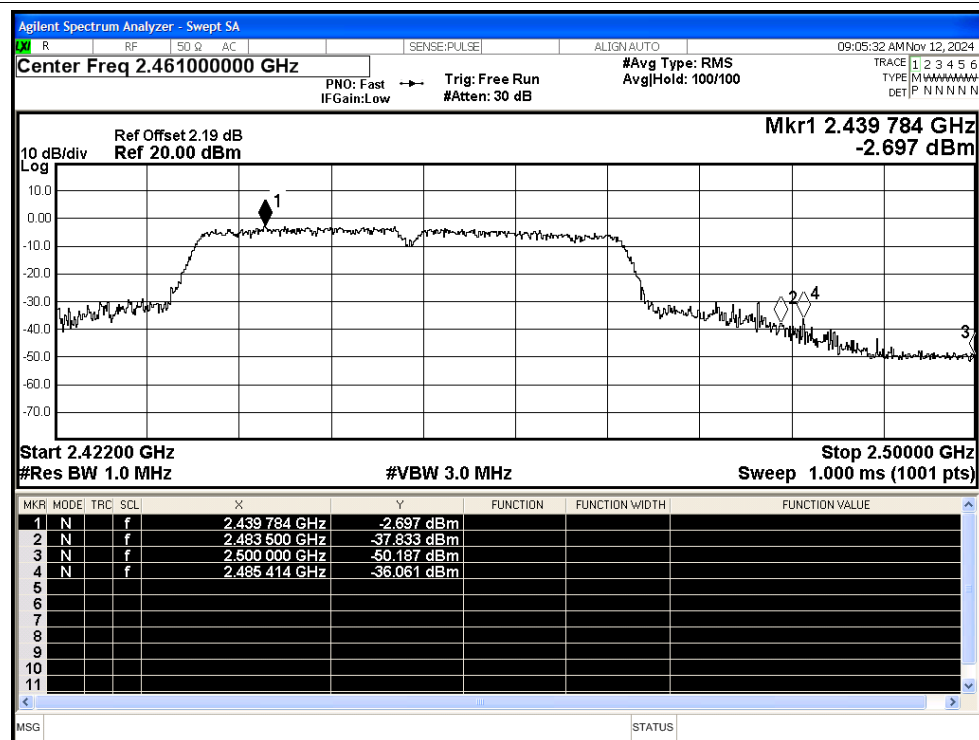

## Restrict Band NVNT n40 2452MHz Ant1 Average

