


Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

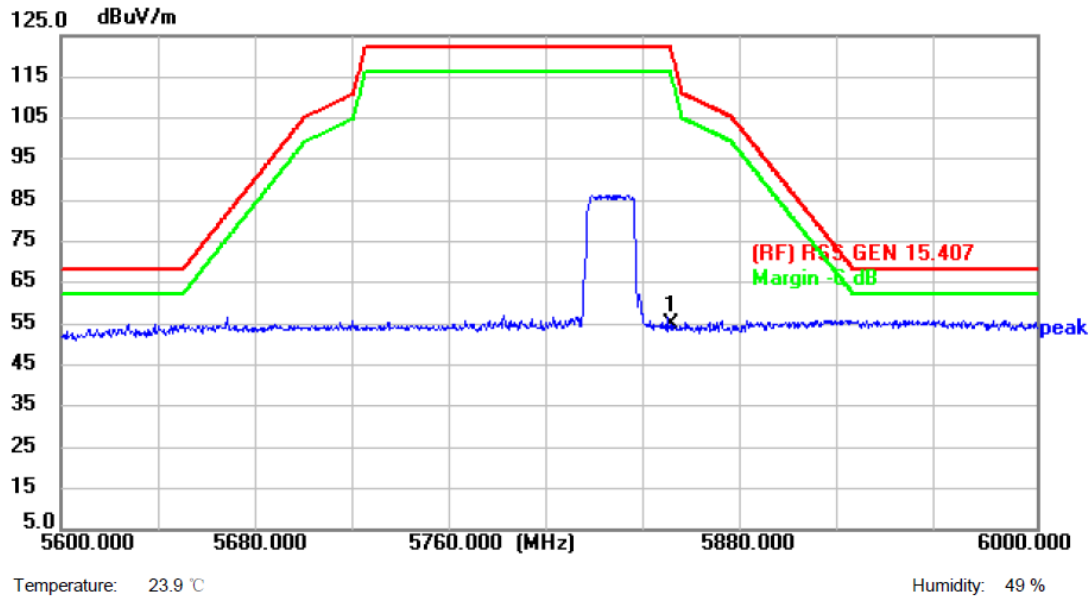


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	43.15	11.90	55.05	122.30	-67.25	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

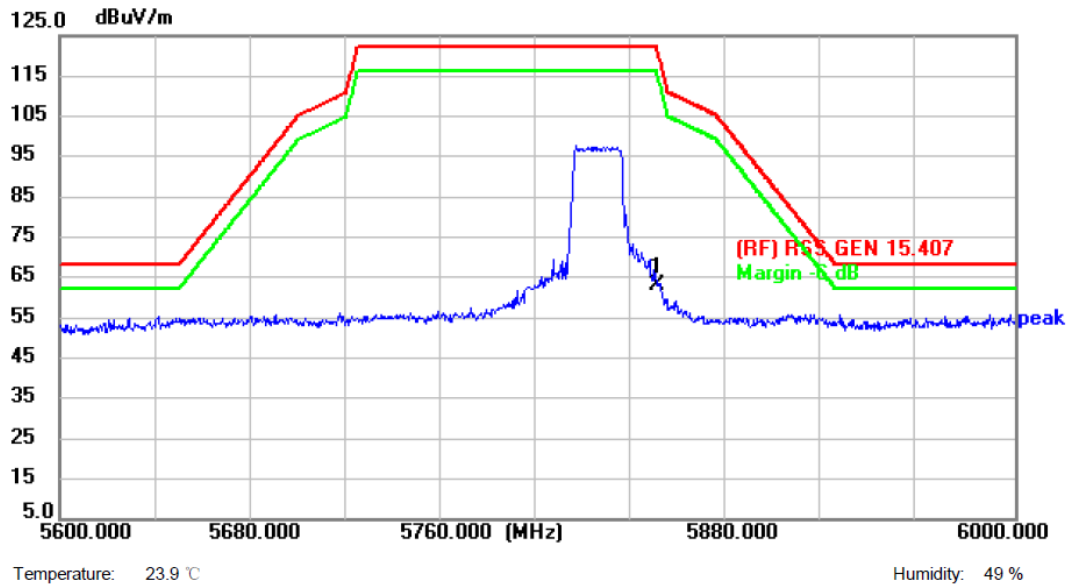


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	51.18	11.90	63.08	122.30	-59.22	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

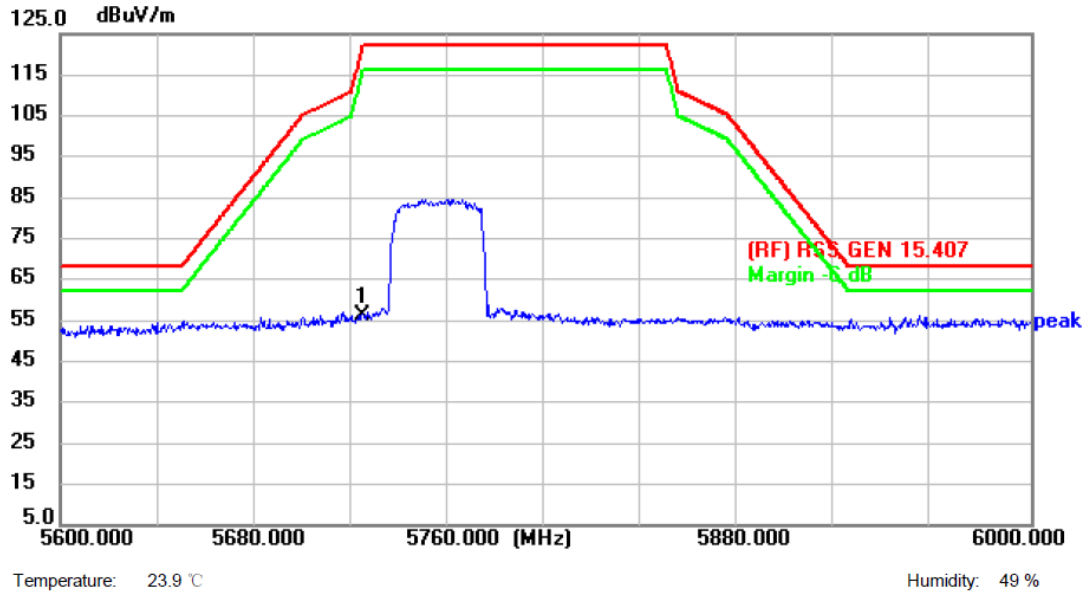


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	44.49	11.59	56.08	122.30	-66.22	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5755 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

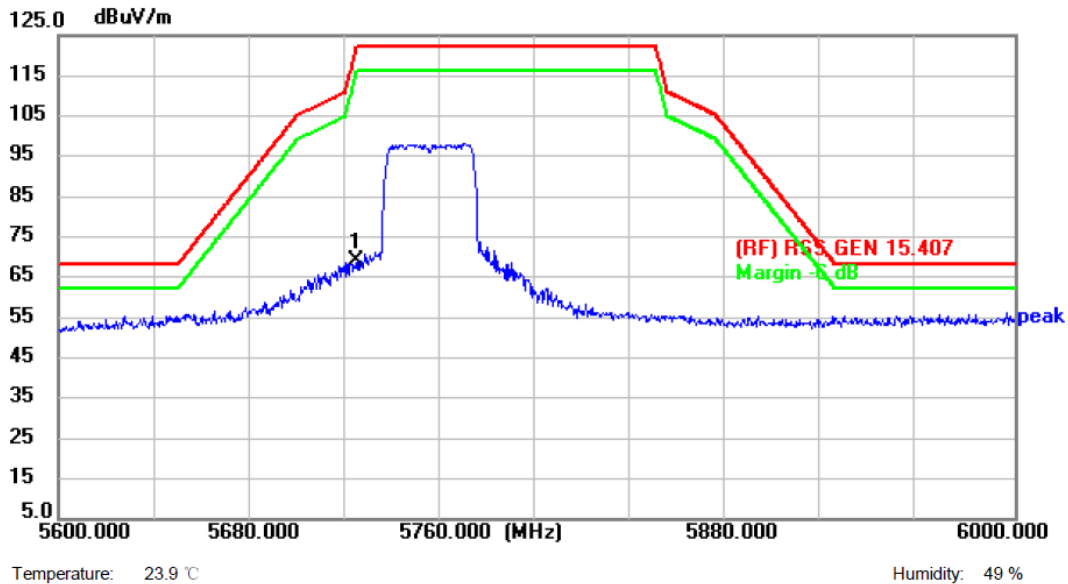


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	57.67	11.59	69.26	122.30	-53.04	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

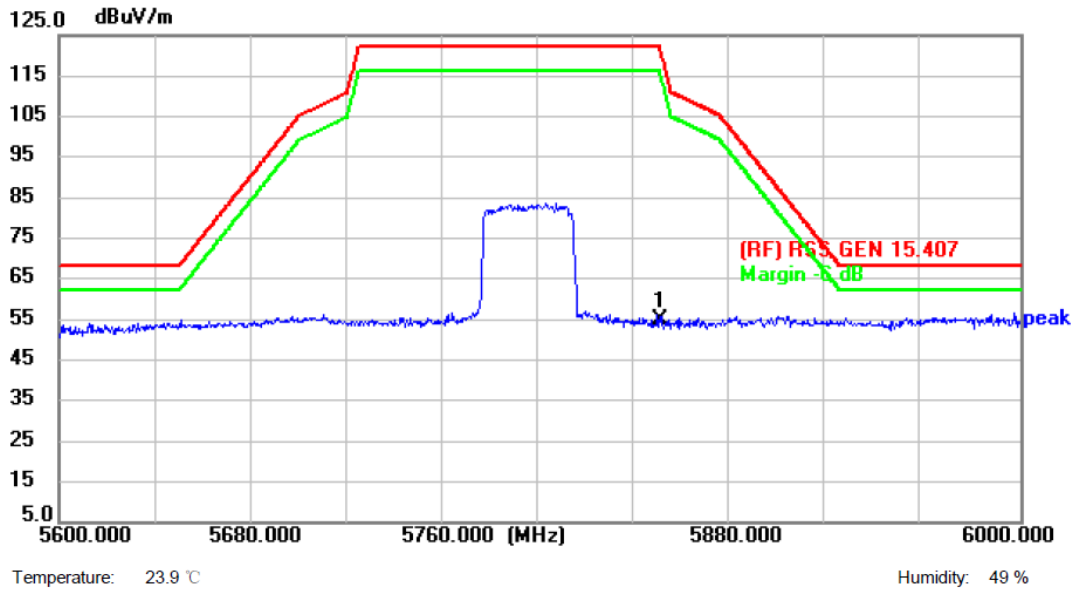


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	42.97	11.90	54.87	122.30	-67.43	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5795 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

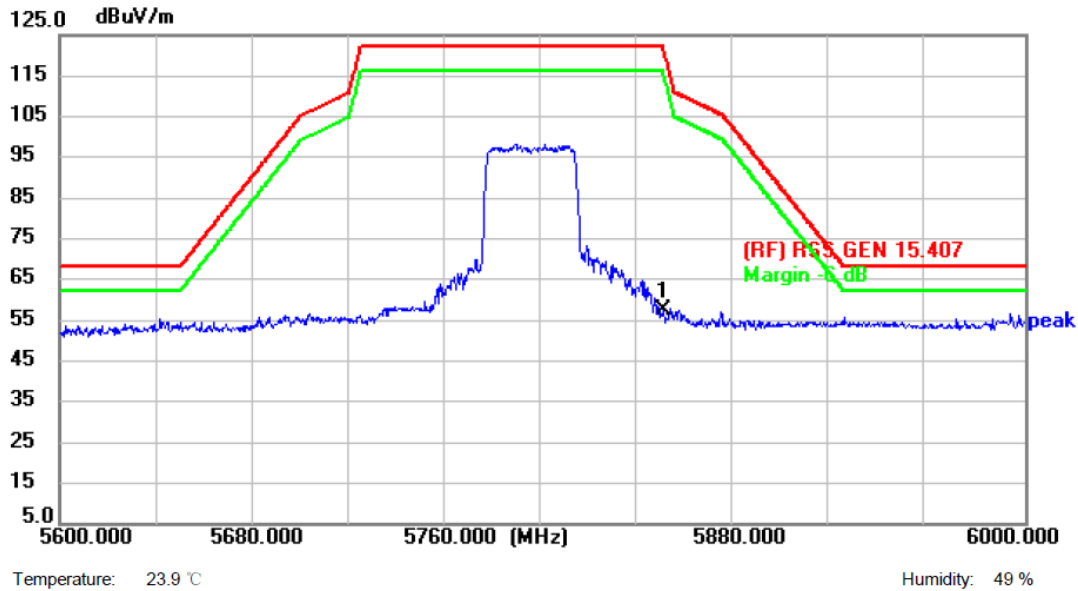


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	45.61	11.90	57.51	122.30	-64.79	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(VHT40) Mode 5755 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

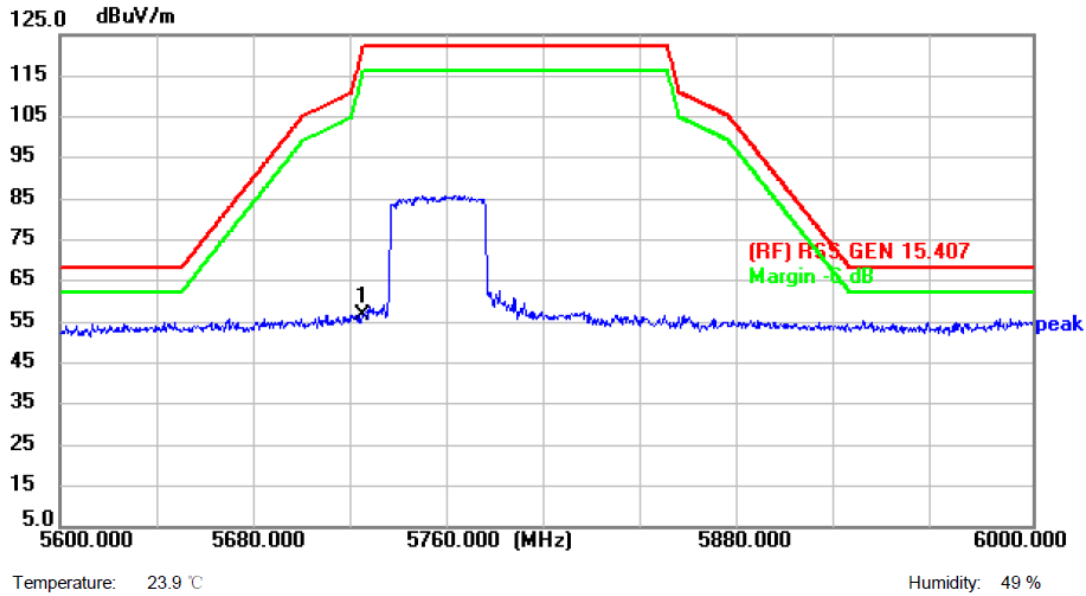


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	45.11	11.59	56.70	122.30	-65.60	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(VHT40) Mode 5755 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

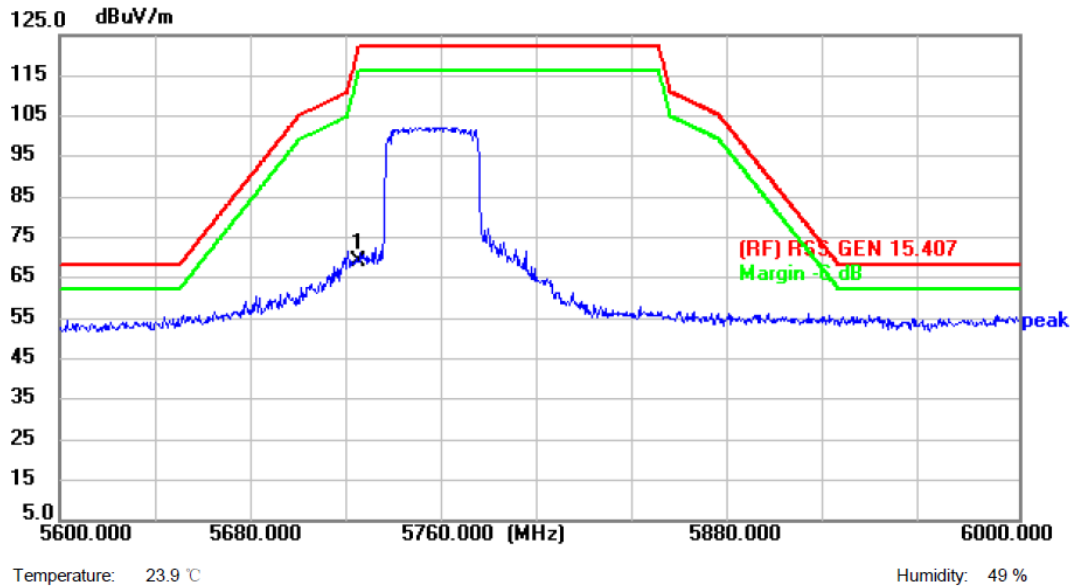


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	57.44	11.59	69.03	122.30	-53.27	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(VHT40) Mode 5795 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

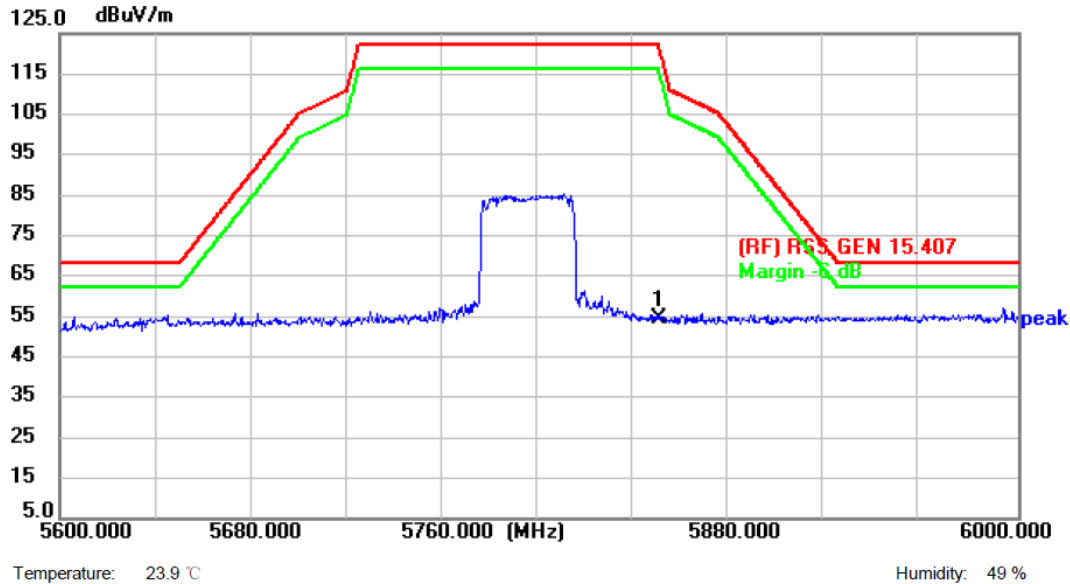


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	42.80	11.90	54.70	122.30	-67.60	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(VHT40) Mode 5795 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

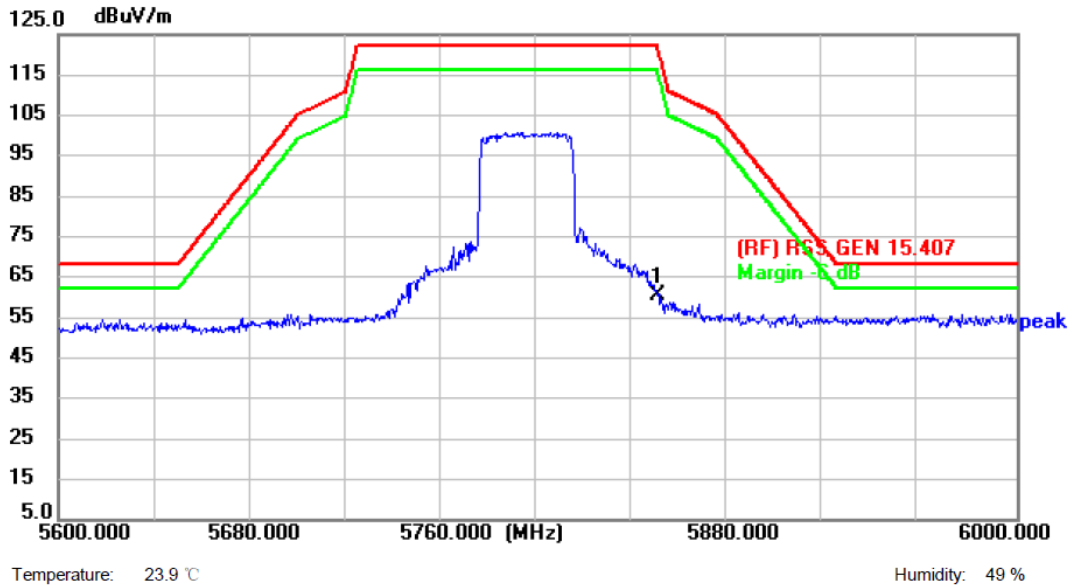


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	48.53	11.90	60.43	122.30	-61.87	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Horizontal
Test Mode:	TX 802.11 ax(VHT80) Mode 5775MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

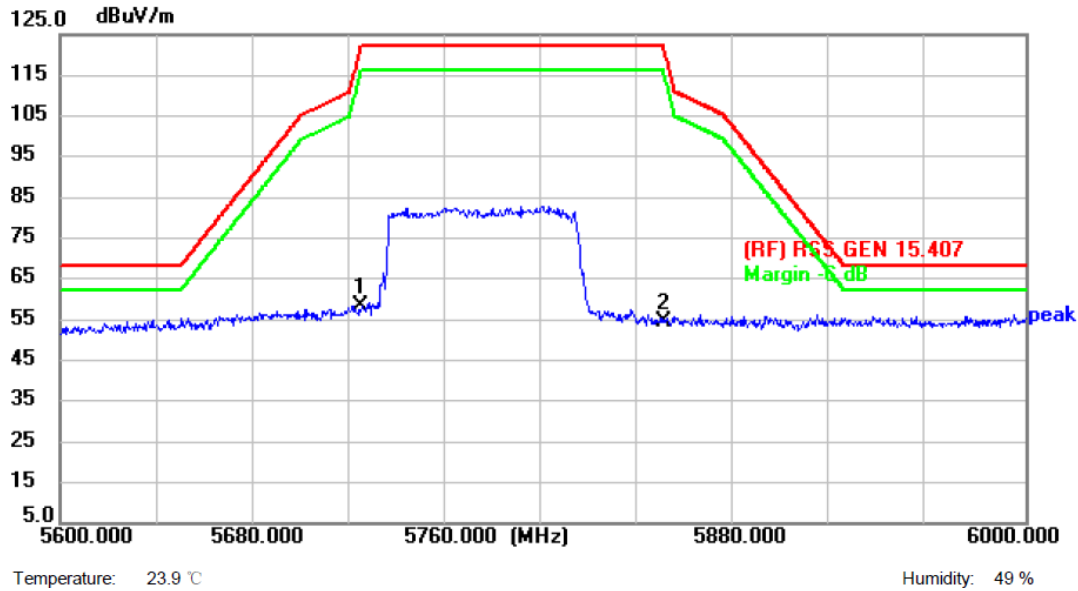


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	46.91	11.59	58.50	122.30	-63.80	peak
2	5850.000	42.75	11.90	54.65	122.30	-67.65	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



Test Voltage:	AC 120V/60Hz
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(VHT80) Mode 5775 MHz (U-NII-3)
Remark:	(Ant.1+Ant.2)

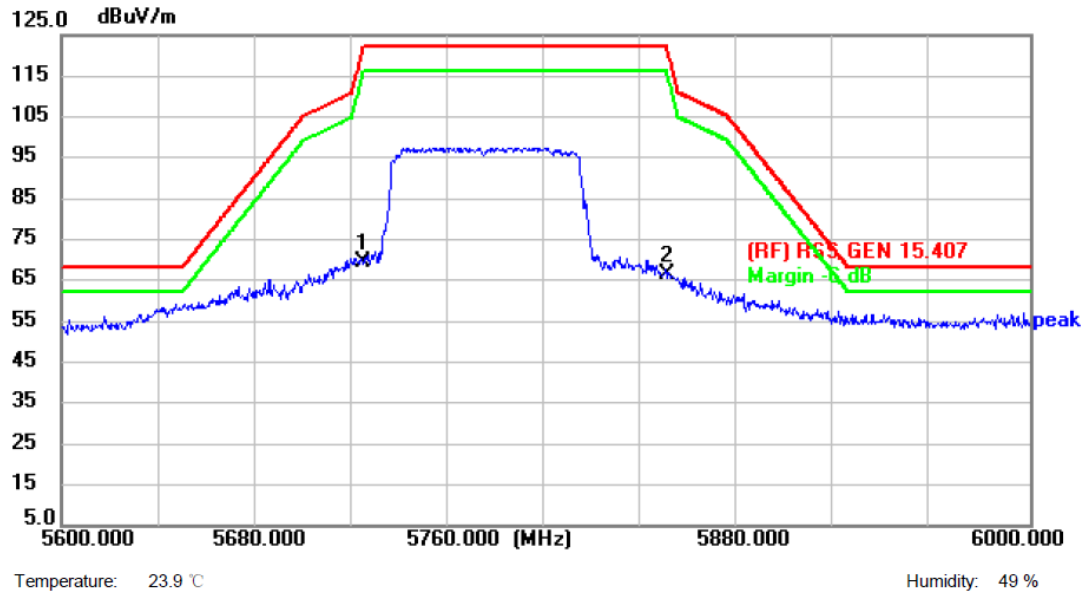

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	57.90	11.59	69.49	122.30	-52.81	peak
2	5850.000	54.78	11.90	66.68	122.30	-55.62	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

-----END OF THE REPORT-----

