


|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5320 MHz (U-NII-2A) |                    |     |
| Remark:       |                                            |                    |     |

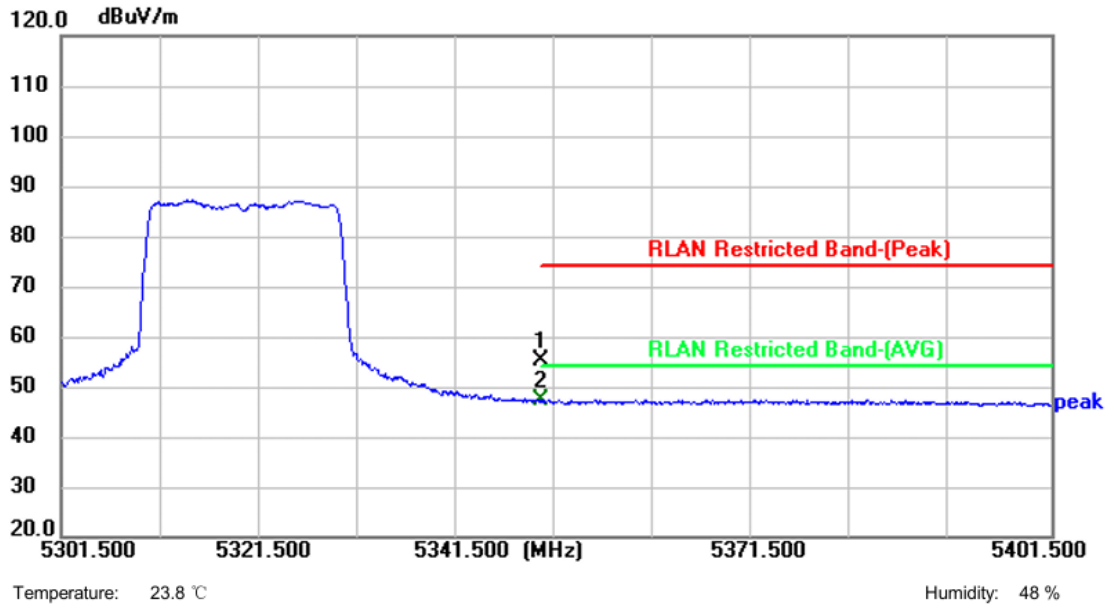


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 43.01          | 12.07         | 55.08          | 74.00          | -18.92      | peak     | P   |
| 2 * | 5350.000        | 35.22          | 12.07         | 47.29          | 54.00          | -6.71       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                          |                    |     |

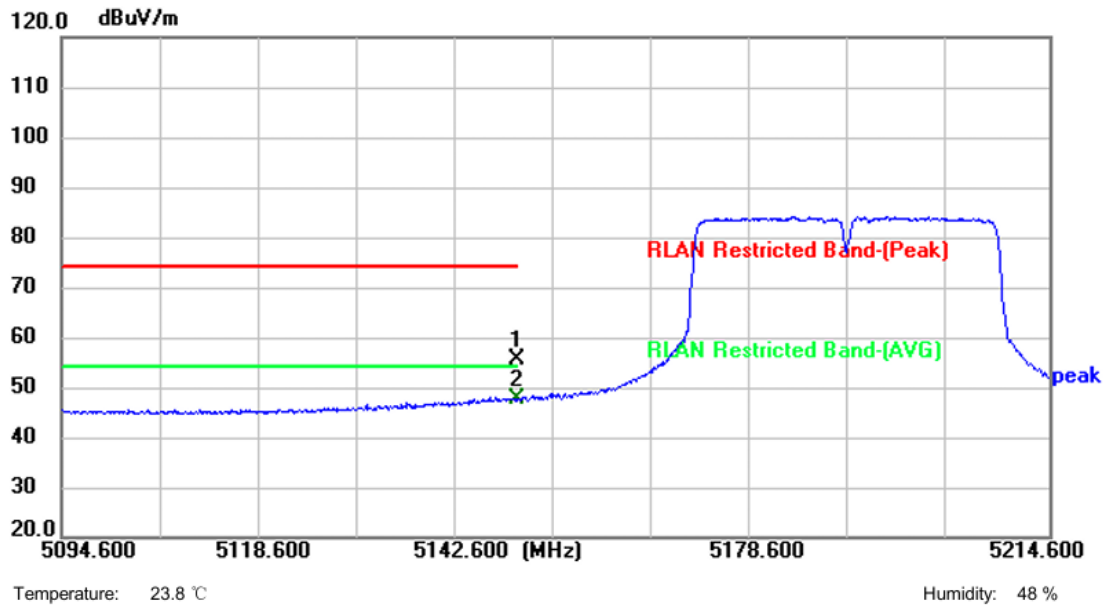


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 43.76          | 11.66         | 55.42          | 74.00          | -18.58      | peak     | P   |
| 2 * | 5150.000        | 36.06          | 11.66         | 47.72          | 54.00          | -6.28       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                          |                    |     |

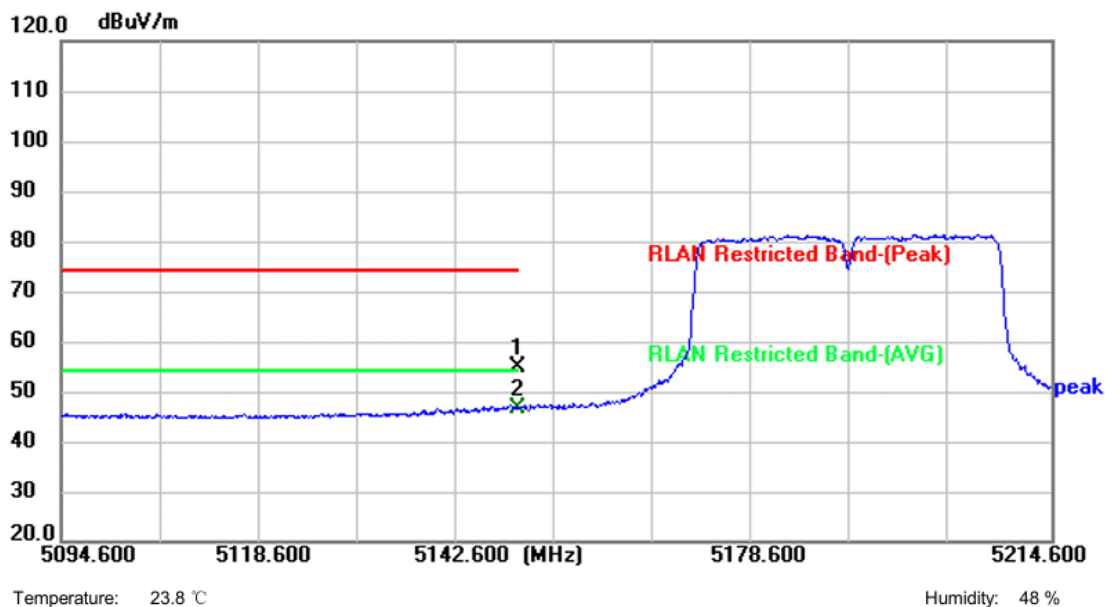


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 43.15          | 11.66         | 54.81          | 74.00          | -19.19      | peak     | P   |
| 2 * | 5150.000        | 34.97          | 11.66         | 46.63          | 54.00          | -7.37       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                           |                    |     |

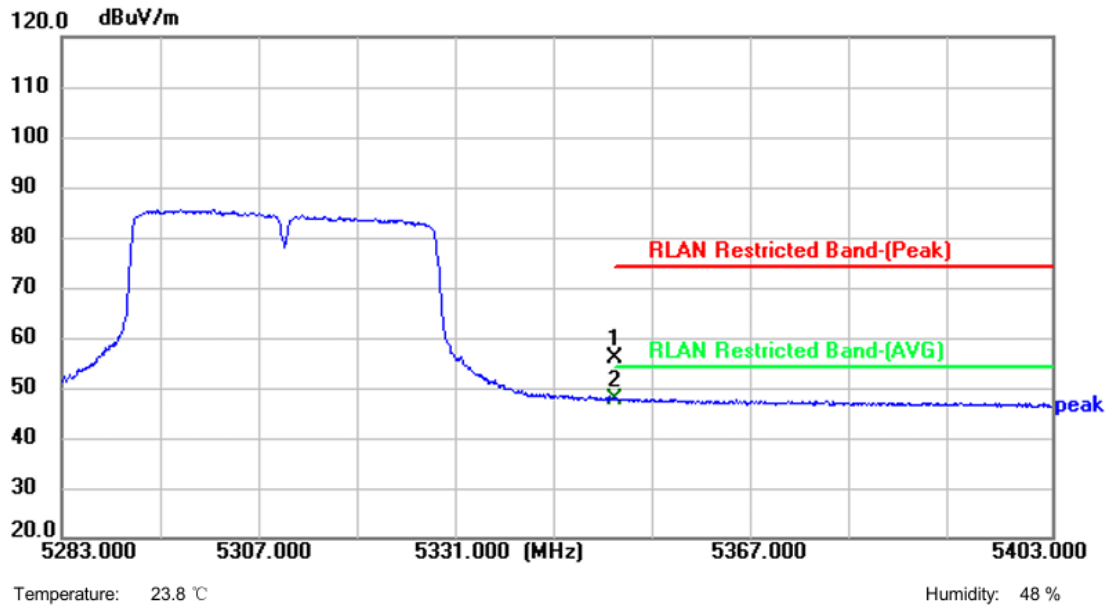


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 43.87          | 12.07         | 55.94          | 74.00          | -18.06      | peak     | P   |
| 2 * | 5350.000        | 35.71          | 12.07         | 47.78          | 54.00          | -6.22       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                           |                    |     |

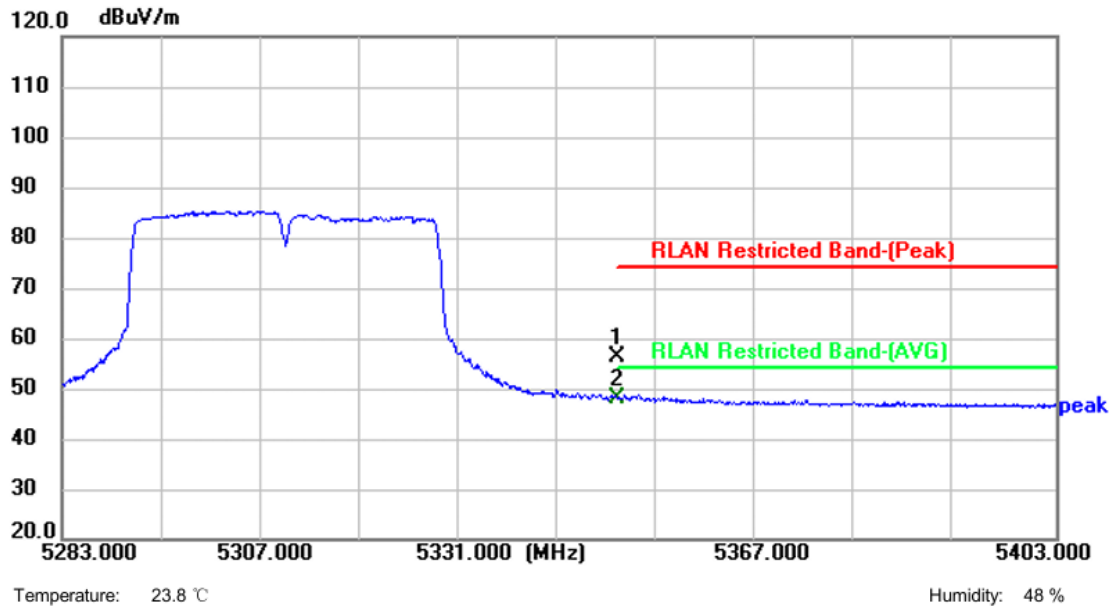


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 44.10          | 12.07         | 56.17          | 74.00          | -17.83      | peak     | P   |
| 2 * | 5350.000        | 35.88          | 12.07         | 47.95          | 54.00          | -6.05       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

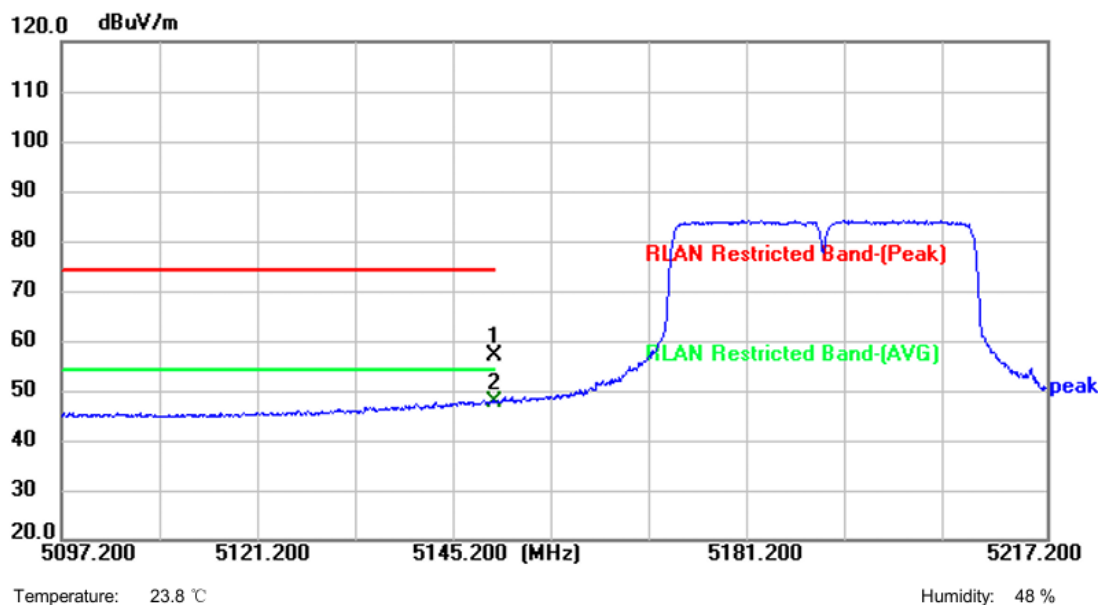


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 45.30          | 11.66         | 56.96          | 74.00          | -17.04      | peak     | P   |
| 2 * | 5150.000        | 35.95          | 11.66         | 47.61          | 54.00          | -6.39       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                            |                    |     |

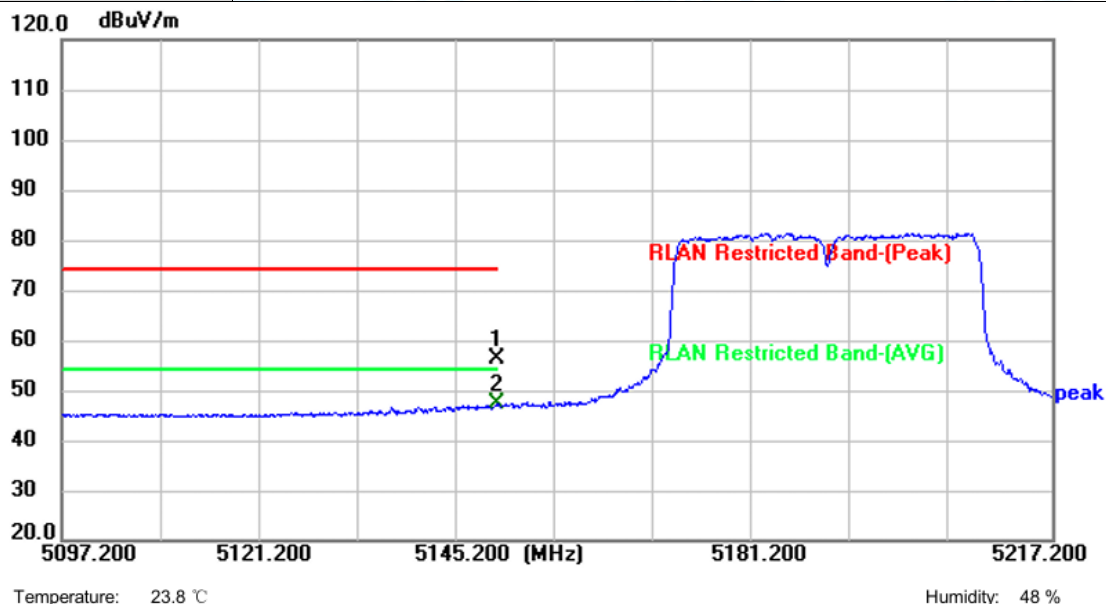


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 44.65          | 11.66         | 56.31          | 74.00          | -17.69      | peak     | P   |
| 2 * | 5150.000        | 35.53          | 11.66         | 47.19          | 54.00          | -6.81       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                                |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                             |                    |     |

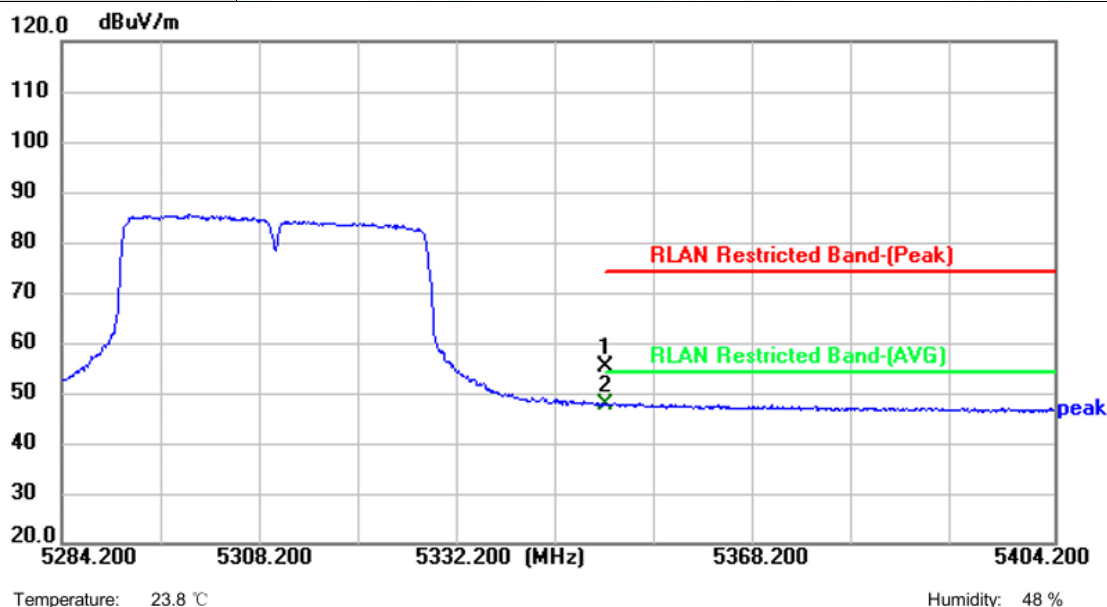


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 43.18          | 12.07         | 55.25          | 74.00          | -18.75      | peak     | P   |
| 2 * | 5350.000        | 35.57          | 12.07         | 47.64          | 54.00          | -6.36       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                                |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                             |                    |     |

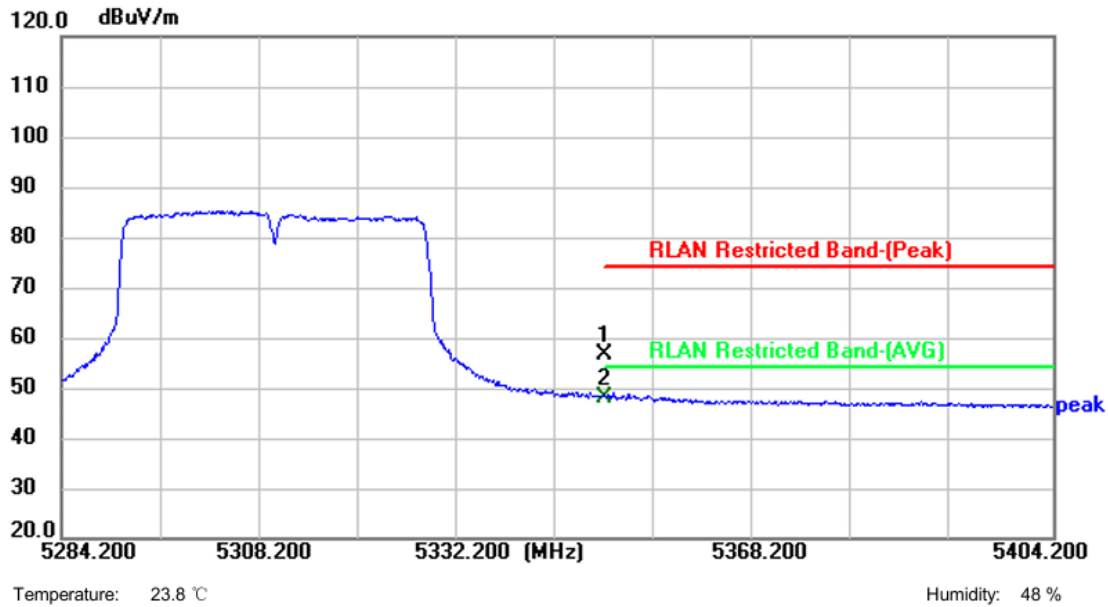


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 44.53          | 12.07         | 56.60          | 74.00          | -17.40      | peak     | P   |
| 2 * | 5350.000        | 36.06          | 12.07         | 48.13          | 54.00          | -5.87       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                           |                    |     |

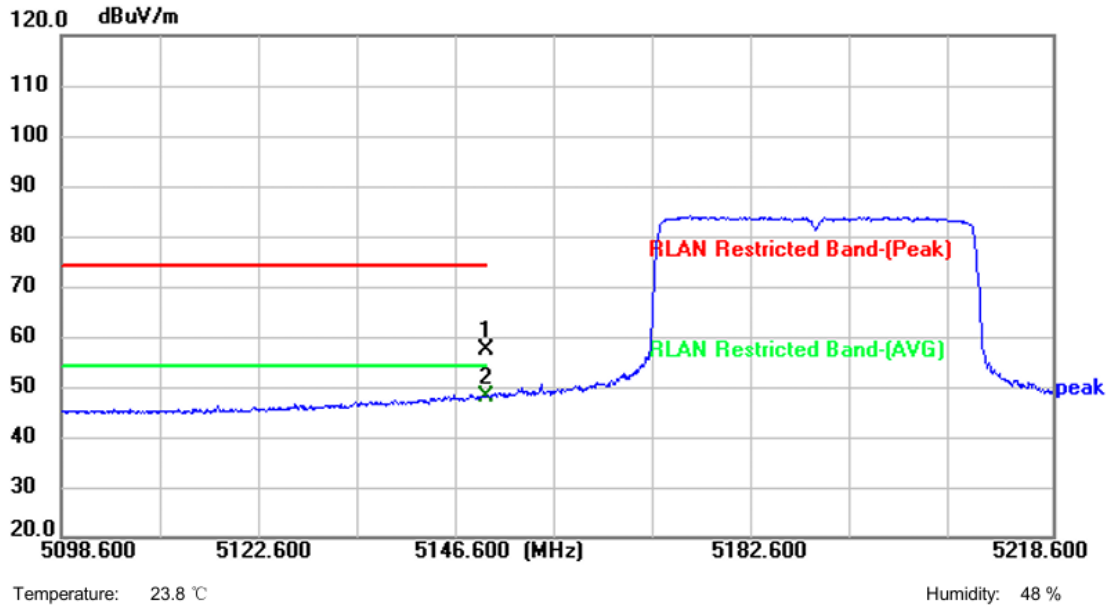


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 45.53          | 11.66         | 57.19          | 74.00          | -16.81      | peak     | P   |
| 2 * | 5150.000        | 36.53          | 11.66         | 48.19          | 54.00          | -5.81       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5190 MHz (U-NII-1) |                    |     |
| Remark:       |                                           |                    |     |

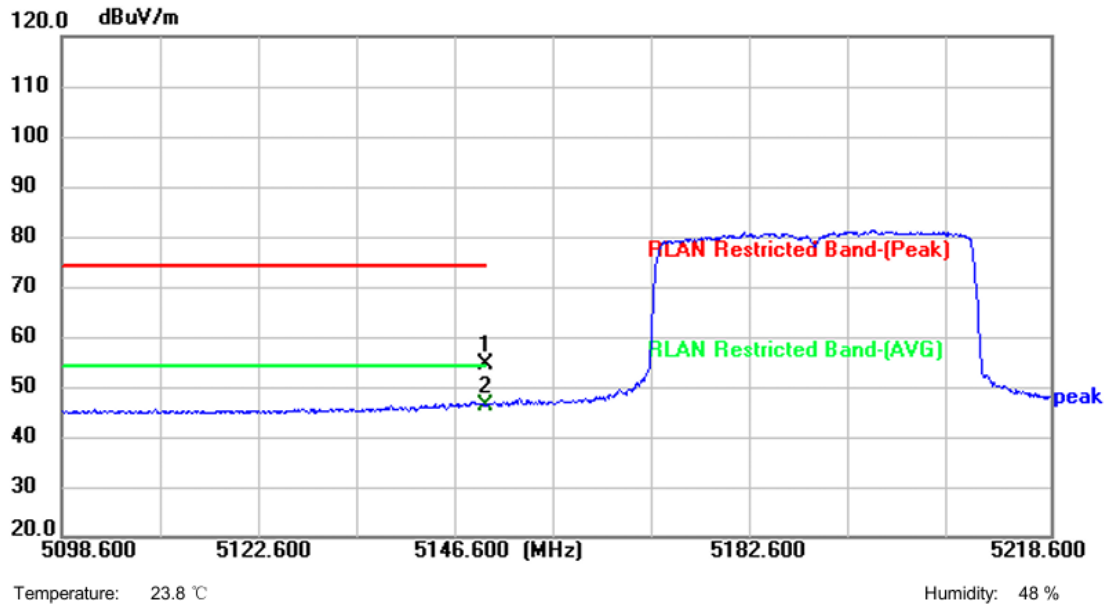


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5150.000        | 42.76          | 11.66         | 54.42          | 74.00          | -19.58      | peak     | P   |
| 2 * | 5150.000        | 34.65          | 11.66         | 46.31          | 54.00          | -7.69       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE40)Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                           |                    |     |

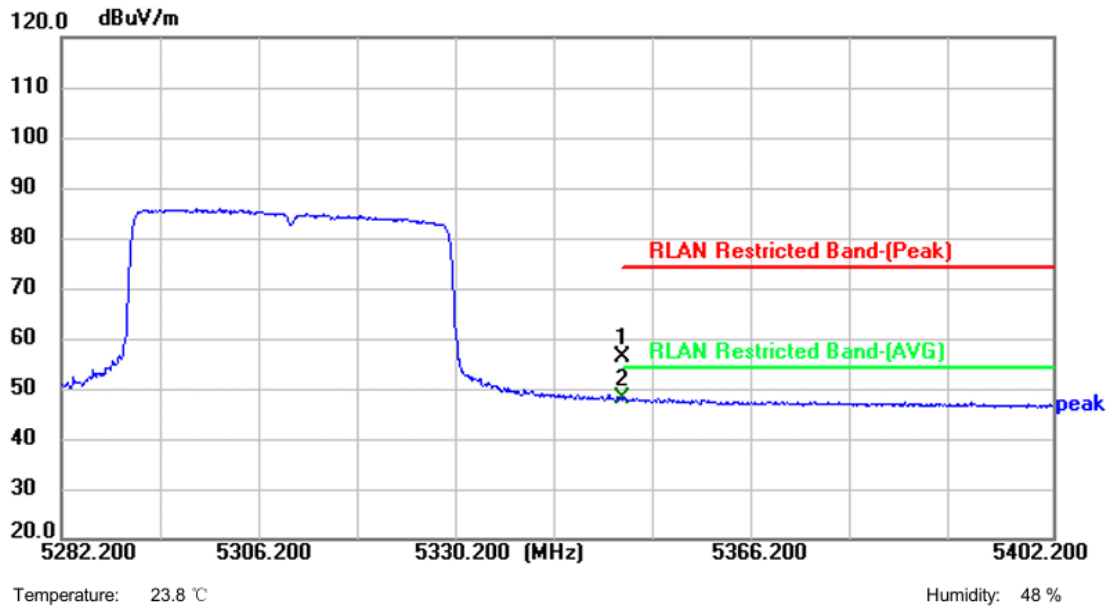


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 44.03          | 12.07         | 56.10          | 74.00          | -17.90      | peak     | P   |
| 2 * | 5350.000        | 35.84          | 12.07         | 47.91          | 54.00          | -6.09       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5310 MHz (U-NII-2A) |                    |     |
| Remark:       |                                            |                    |     |

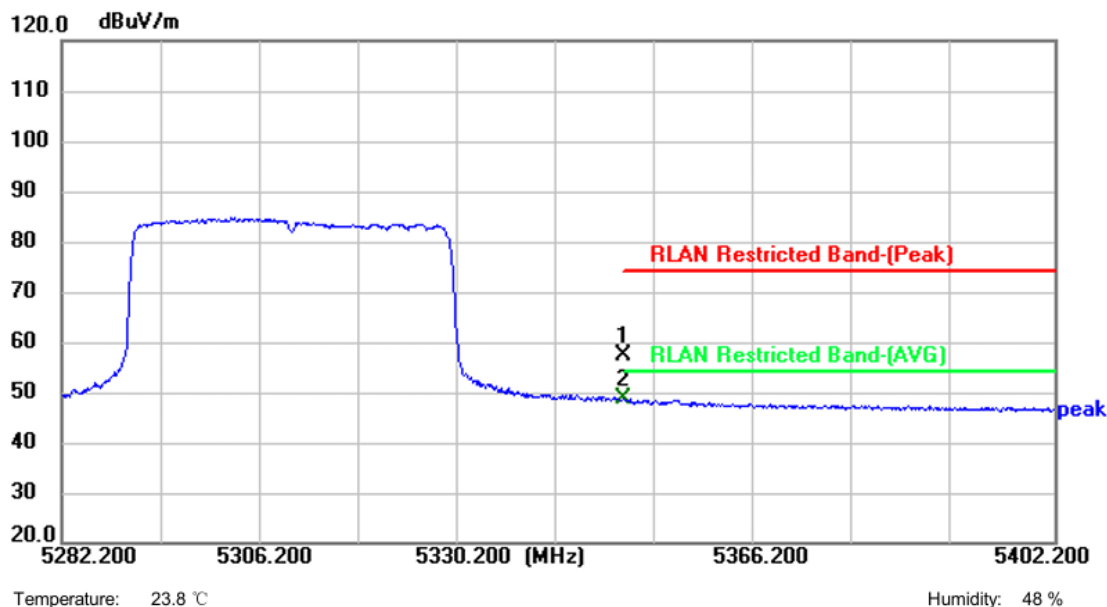


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5350.000        | 45.15          | 12.07         | 57.22          | 74.00          | -16.78      | peak     | P   |
| 2 * | 5350.000        | 36.77          | 12.07         | 48.84          | 54.00          | -5.16       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                     |                    |     |
|---------------|-------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                              | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                        |                    |     |
| Ant. Pol.     | Horizontal                          |                    |     |
| Test Mode:    | TX 802.11a Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                     |                    |     |

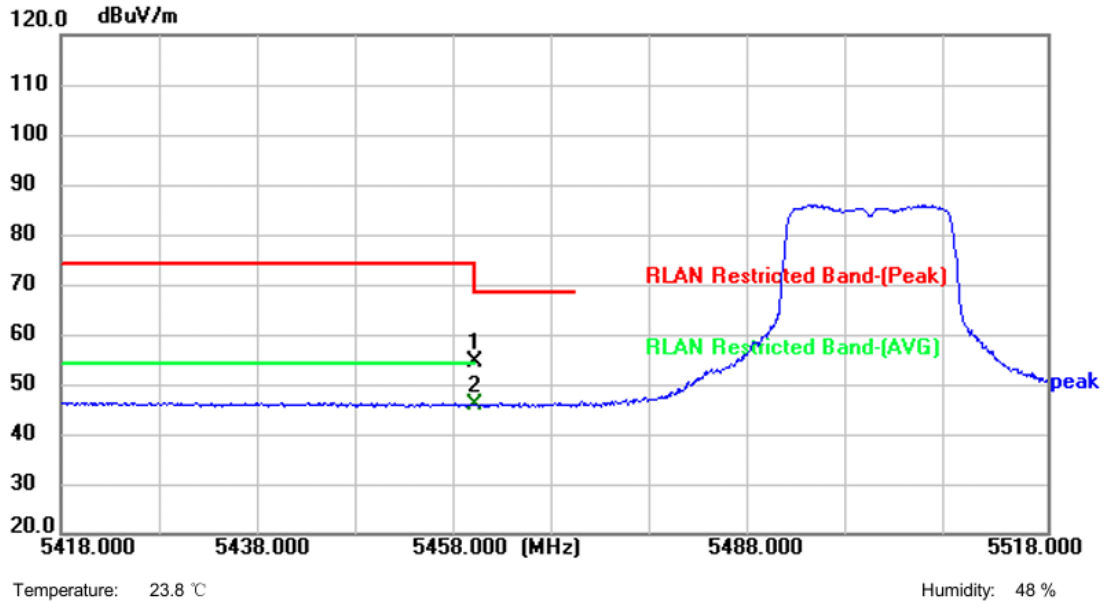


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 42.22          | 12.12         | 54.34          | 68.30          | -13.96      | peak     | P   |
| 2 * | 5460.000        | 33.77          | 12.12         | 45.89          | 54.00          | -8.11       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                     |                    |     |
|---------------|-------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                             | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                        |                    |     |
| Ant. Pol.     | Vertical                            |                    |     |
| Test Mode:    | TX 802.11a Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                     |                    |     |

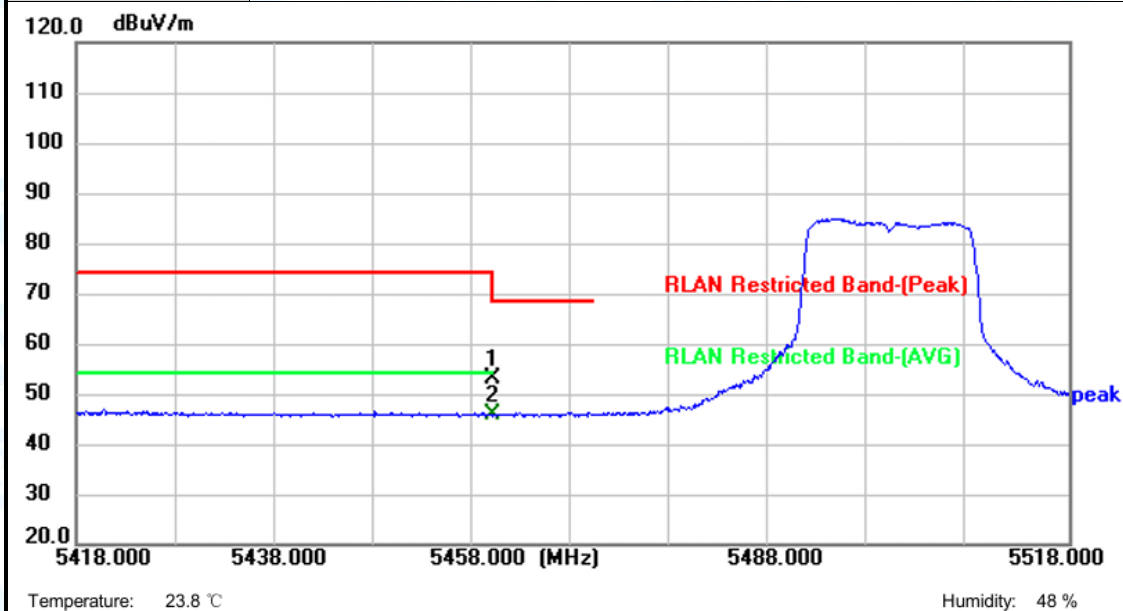


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 41.03          | 12.12         | 53.15          | 68.30          | -15.15      | peak     | P   |
| 2 * | 5460.000        | 33.80          | 12.12         | 45.92          | 54.00          | -8.08       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                           |                    |     |

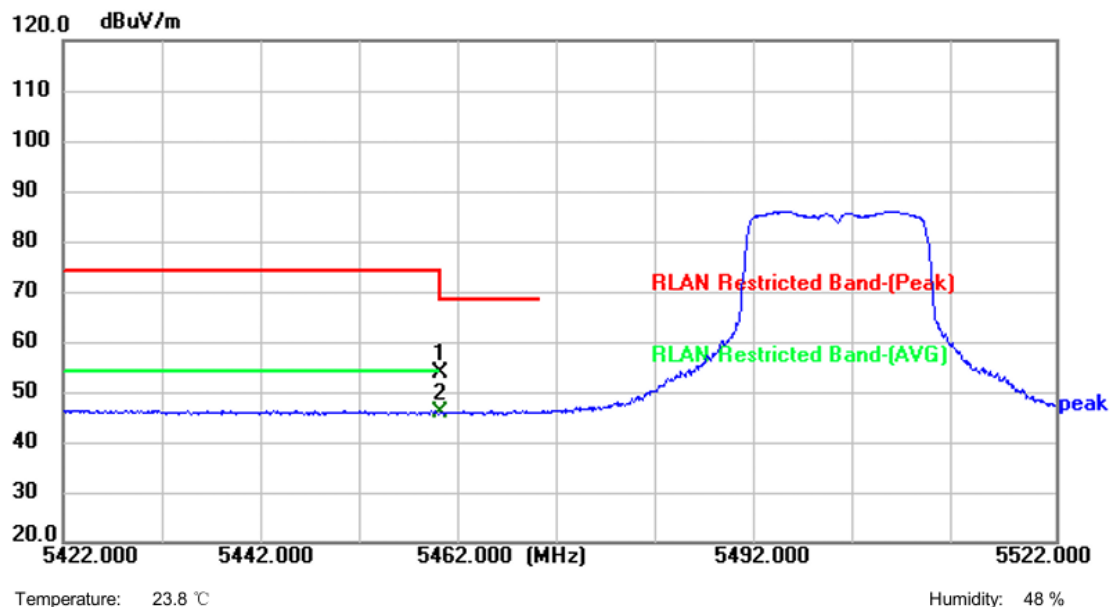


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 41.64          | 12.12         | 53.76          | 68.30          | -14.54      | peak     | P   |
| 2 * | 5460.000        | 33.83          | 12.12         | 45.95          | 54.00          | -8.05       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                           |                    |     |

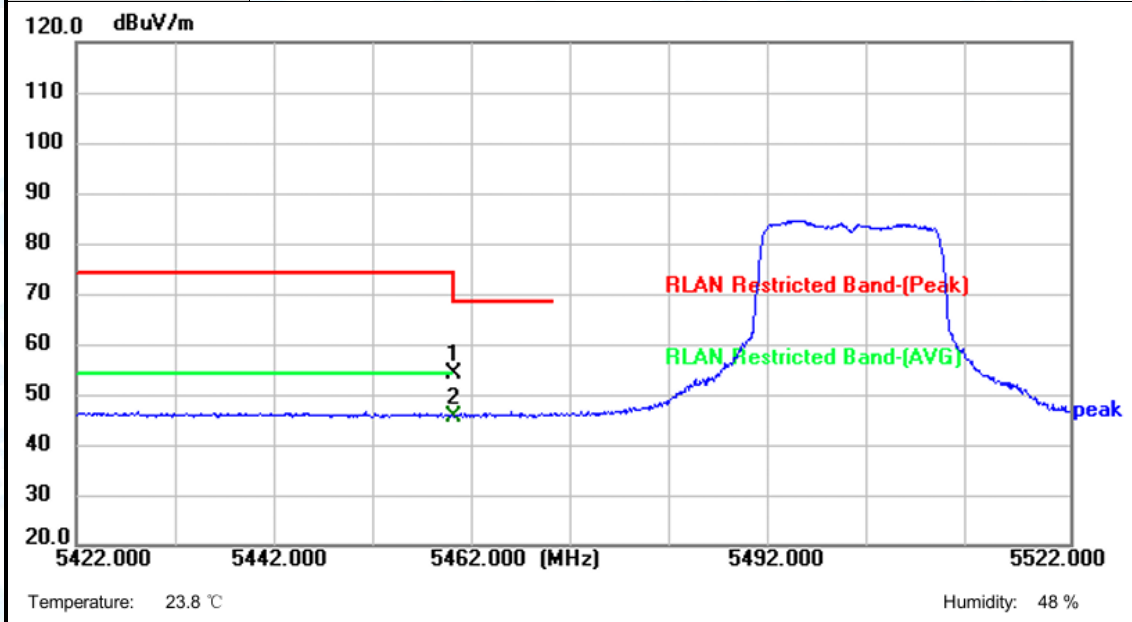


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 42.15          | 12.12         | 54.27          | 68.30          | -14.03      | peak     | P   |
| 2 * | 5460.000        | 33.55          | 12.12         | 45.67          | 54.00          | -8.33       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                      | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                                |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

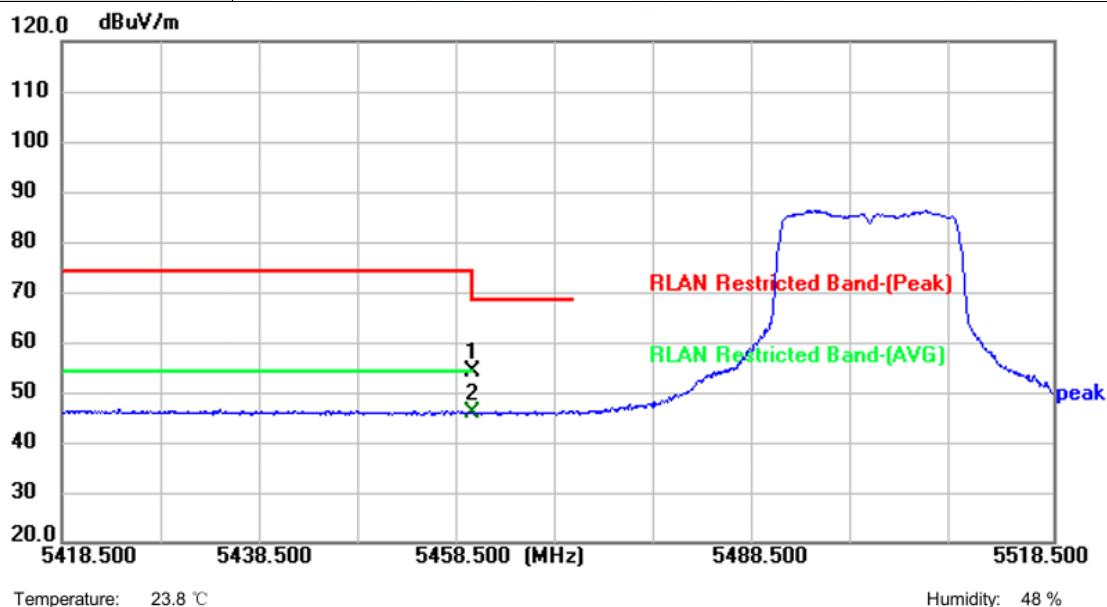


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 41.82          | 12.12         | 53.94          | 68.30          | -14.36      | peak     | P   |
| 2 * | 5460.000        | 33.65          | 12.12         | 45.77          | 54.00          | -8.23       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                                |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

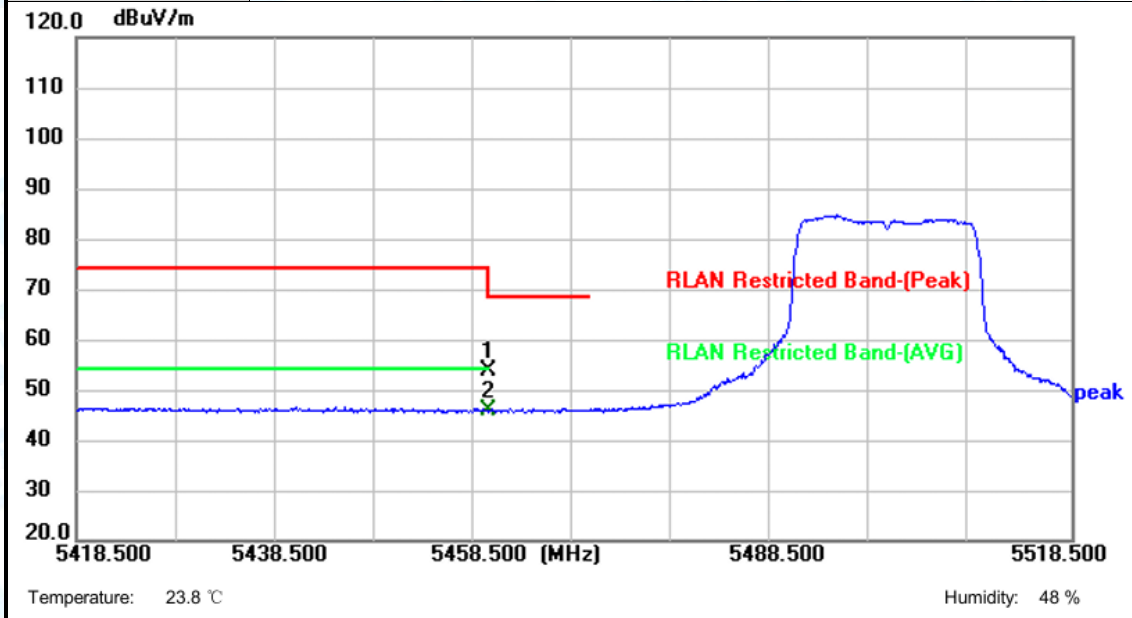


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 41.78          | 12.12         | 53.90          | 68.30          | -14.40      | peak     | P   |
| 2 * | 5460.000        | 33.76          | 12.12         | 45.88          | 54.00          | -8.12       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                            |                    |     |

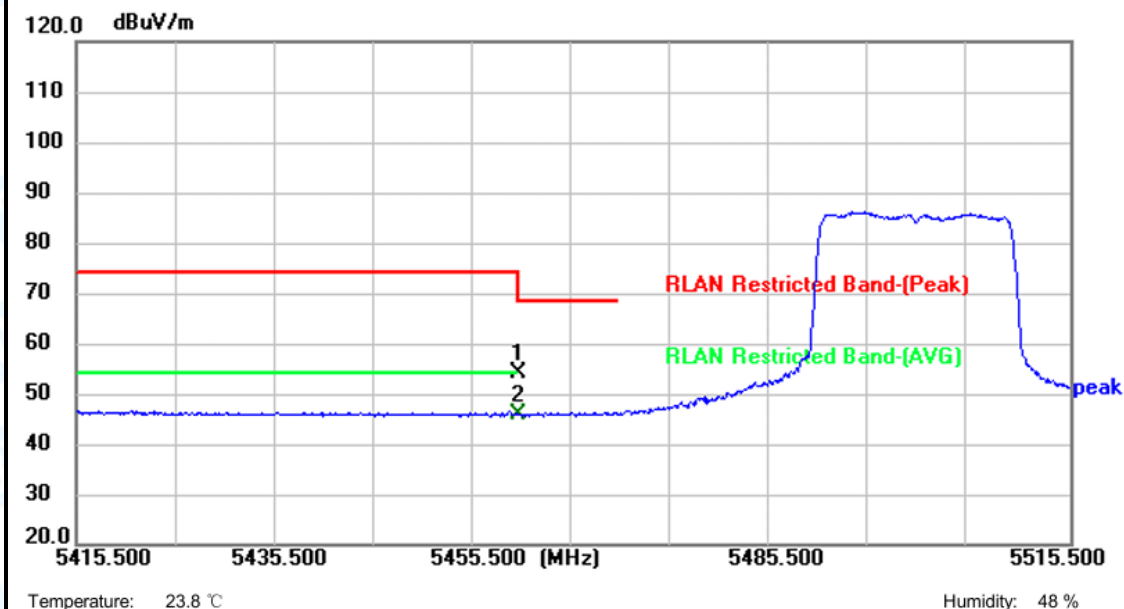


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 42.05          | 12.12         | 54.17          | 68.30          | -14.13      | peak     | P   |
| 2 * | 5460.000        | 33.73          | 12.12         | 45.85          | 54.00          | -8.15       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5500 MHz (U-NII-2C) |                    |     |
| Remark:       |                                            |                    |     |

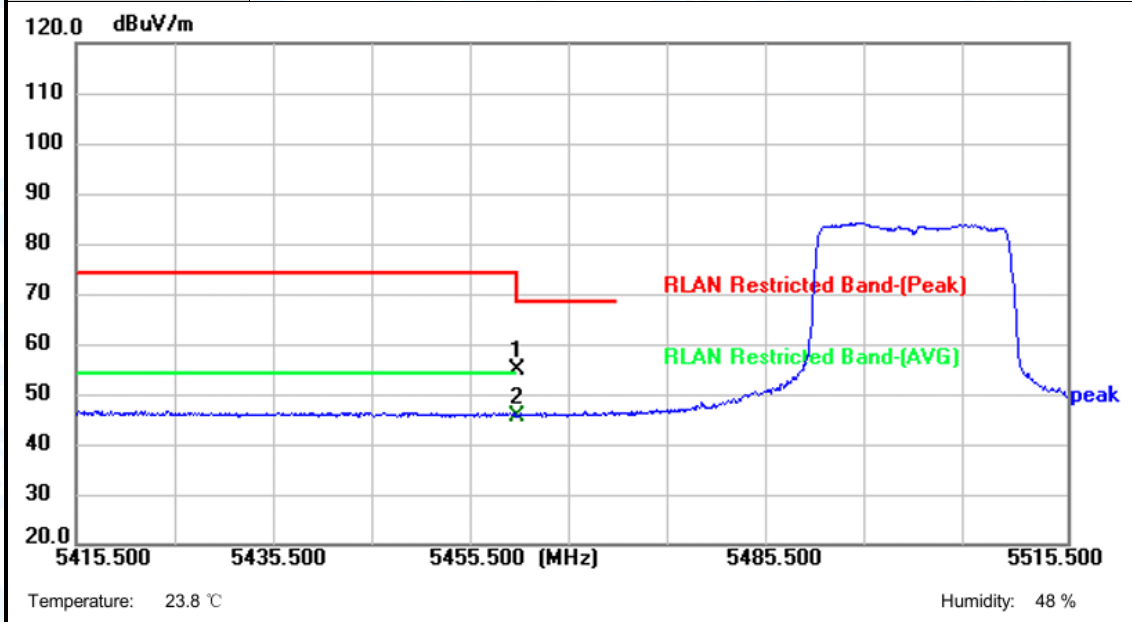


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 42.87          | 12.12         | 54.99          | 68.30          | -13.31      | peak     | P   |
| 2 * | 5460.000        | 33.59          | 12.12         | 45.71          | 54.00          | -8.29       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8°C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                           |                    |     |

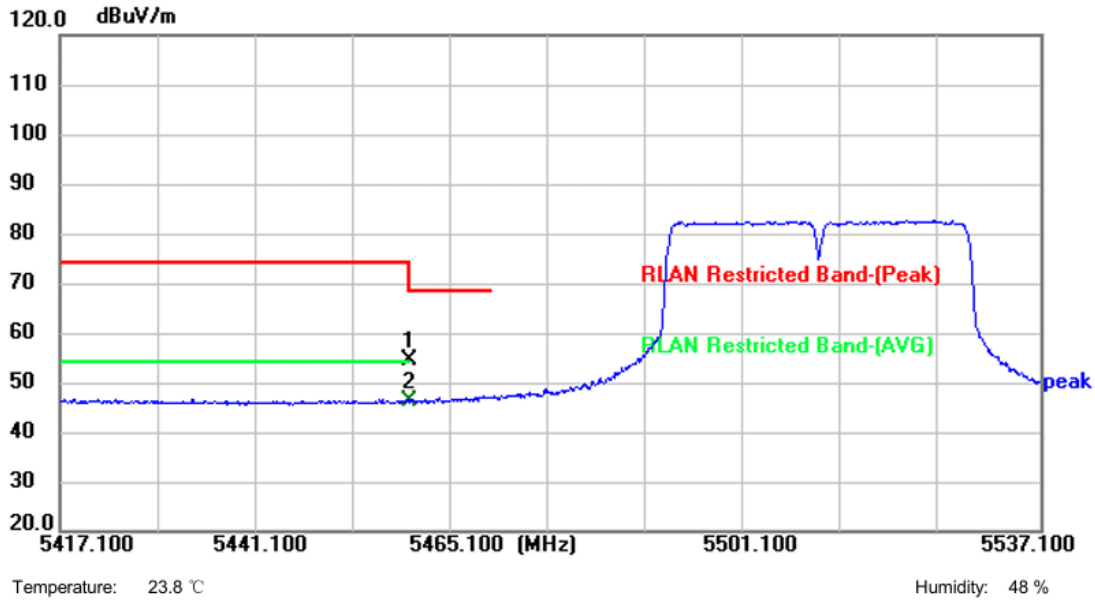


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 42.48          | 12.12         | 54.60          | 68.30          | -13.70      | peak     | P   |
| 2 * | 5460.000        | 34.23          | 12.12         | 46.35          | 54.00          | -7.65       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                           |                    |     |

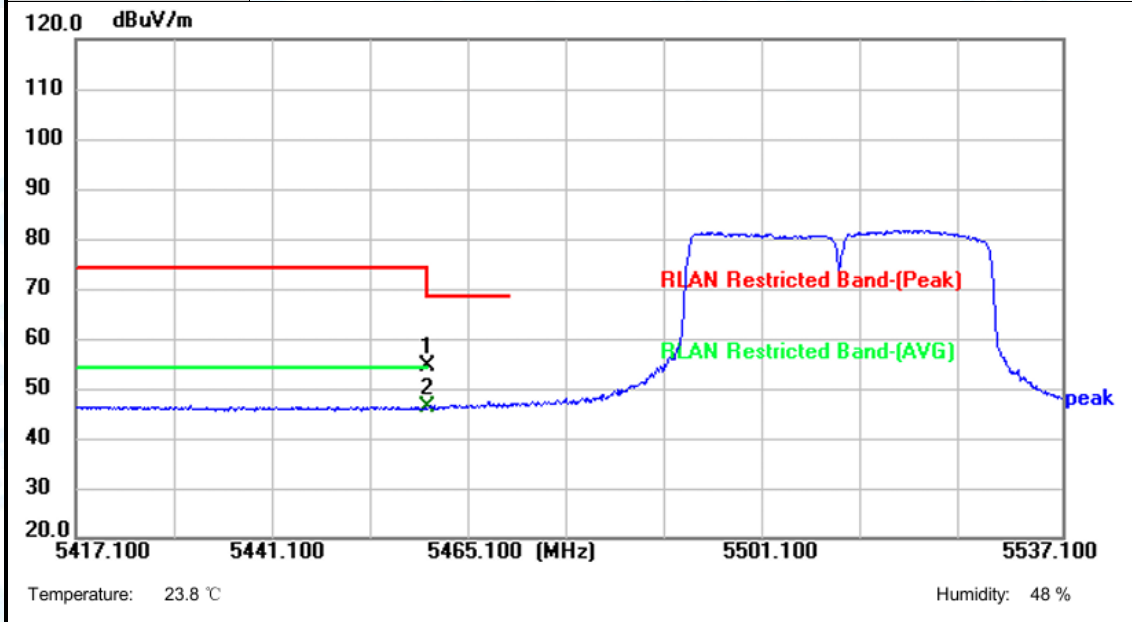


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 42.20          | 12.12         | 54.32          | 68.30          | -13.98      | peak     | P   |
| 2 * | 5460.000        | 34.04          | 12.12         | 46.16          | 54.00          | -7.84       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                                |                    |     |
| Ant. Pol.     | Horizontal                                  |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

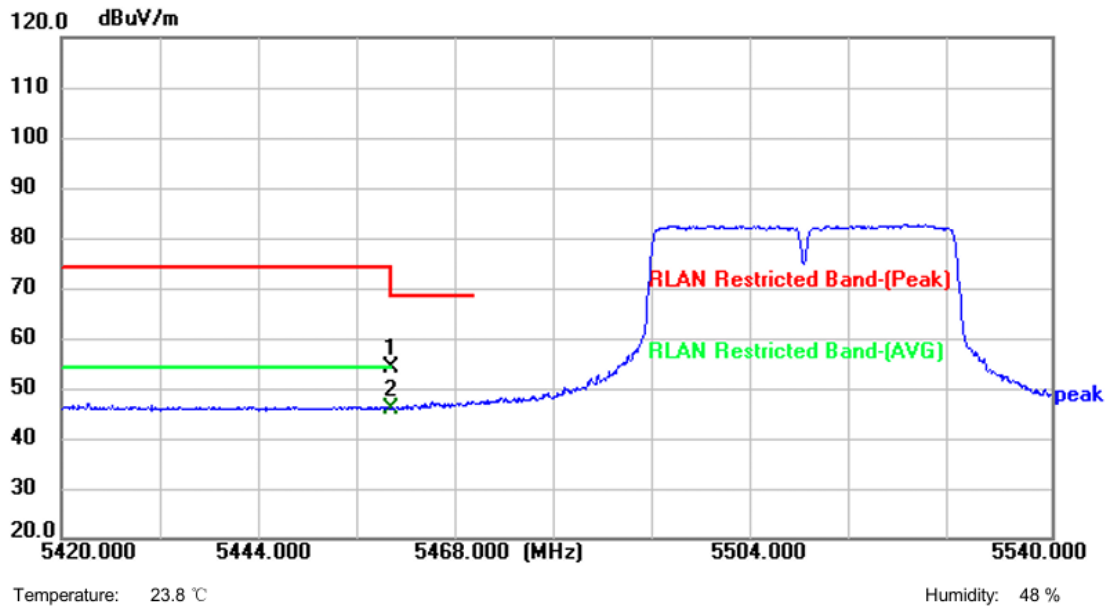


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 42.12          | 12.12         | 54.24          | 68.30          | -14.06      | peak     | P   |
| 2 * | 5460.000        | 33.82          | 12.12         | 45.94          | 54.00          | -8.06       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                             |                    |     |
|---------------|---------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                     | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                                |                    |     |
| Ant. Pol.     | Vertical                                    |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                             |                    |     |

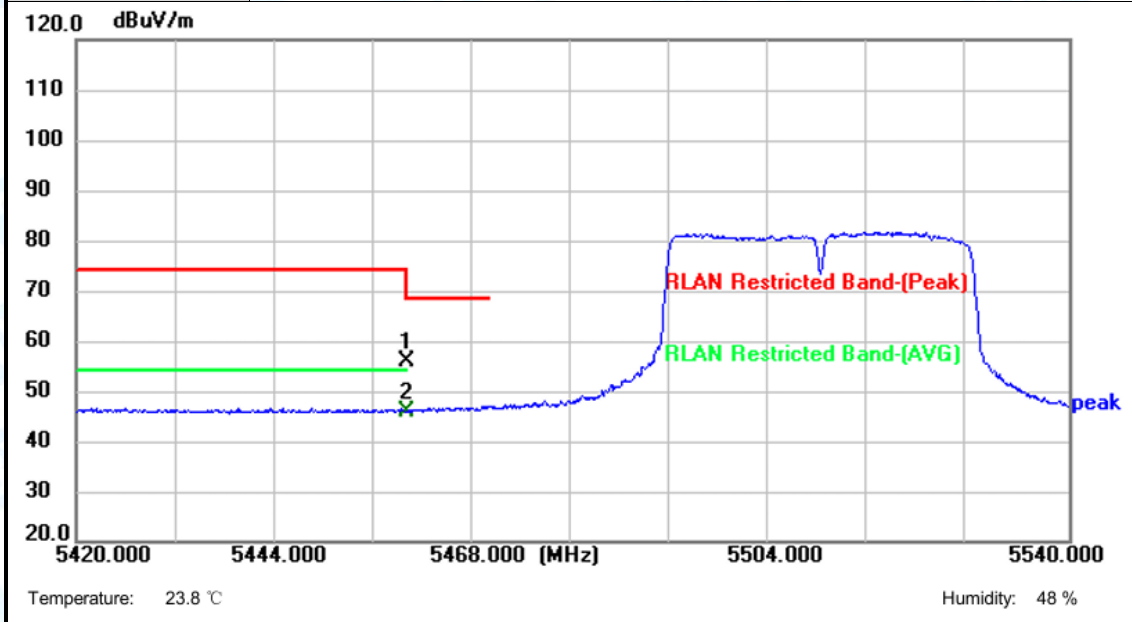


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 43.81          | 12.12         | 55.93          | 68.30          | -12.37      | peak     | P   |
| 2 * | 5460.000        | 33.93          | 12.12         | 46.05          | 54.00          | -7.95       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                            |                    |     |

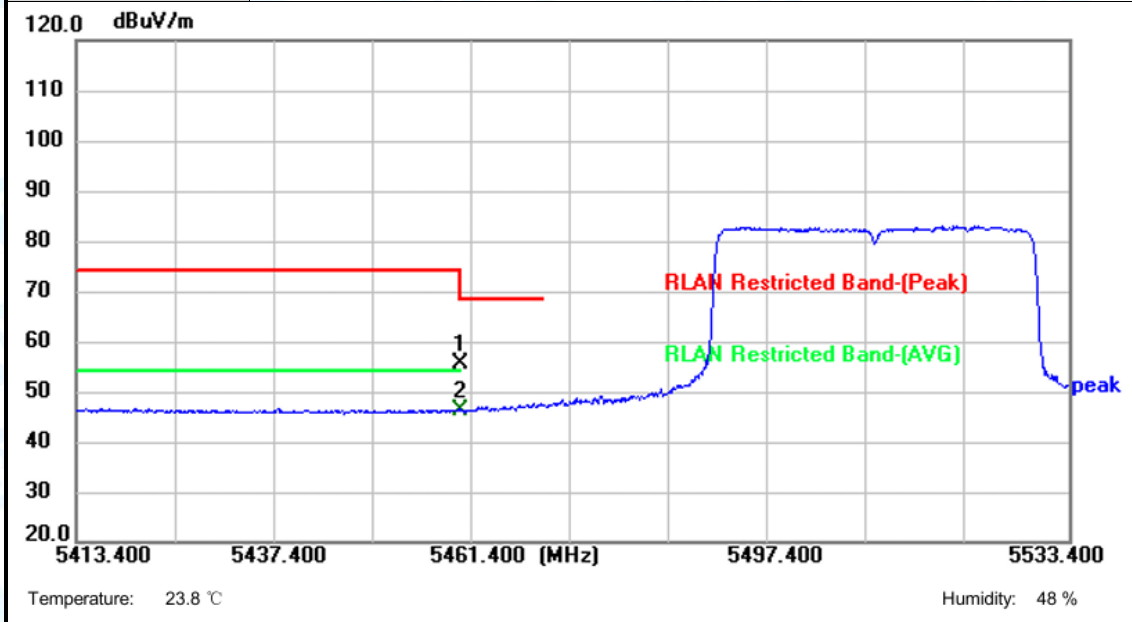


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 43.27          | 12.12         | 55.39          | 68.30          | -12.91      | peak     | P   |
| 2 * | 5460.000        | 34.24          | 12.12         | 46.36          | 54.00          | -7.64       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5510 MHz (U-NII-2C) |                    |     |
| Remark:       |                                            |                    |     |

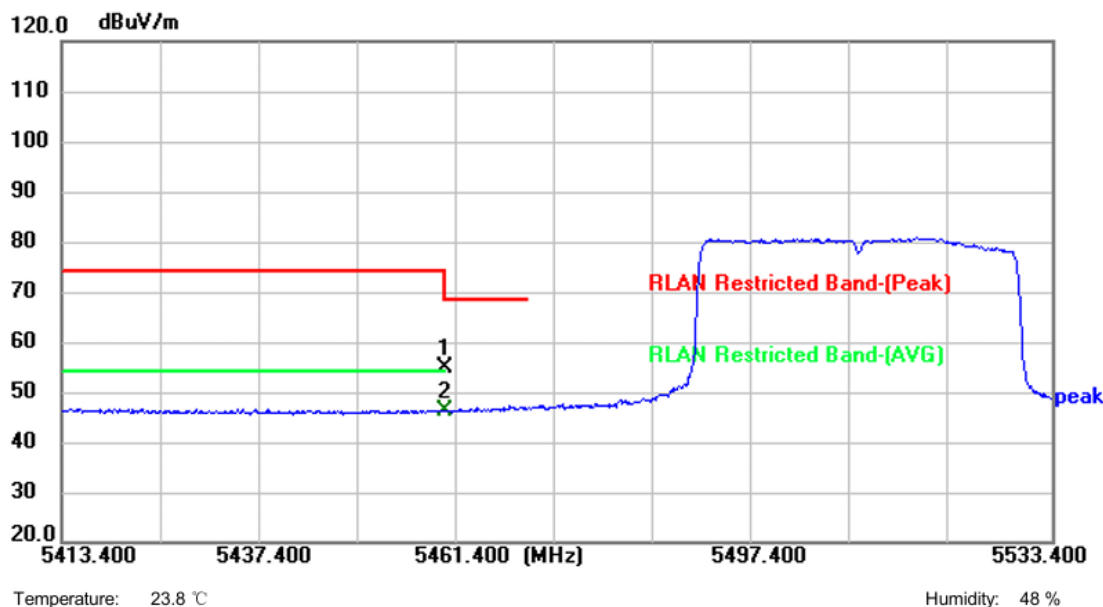


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1   | 5460.000        | 42.65          | 12.12         | 54.77          | 68.30          | -13.53      | peak     | P   |
| 2 * | 5460.000        | 34.07          | 12.12         | 46.19          | 54.00          | -7.81       | AVG      | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                    |                    |     |
|---------------|------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                            | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                       |                    |     |
| Ant. Pol.     | Horizontal                         |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                    |                    |     |

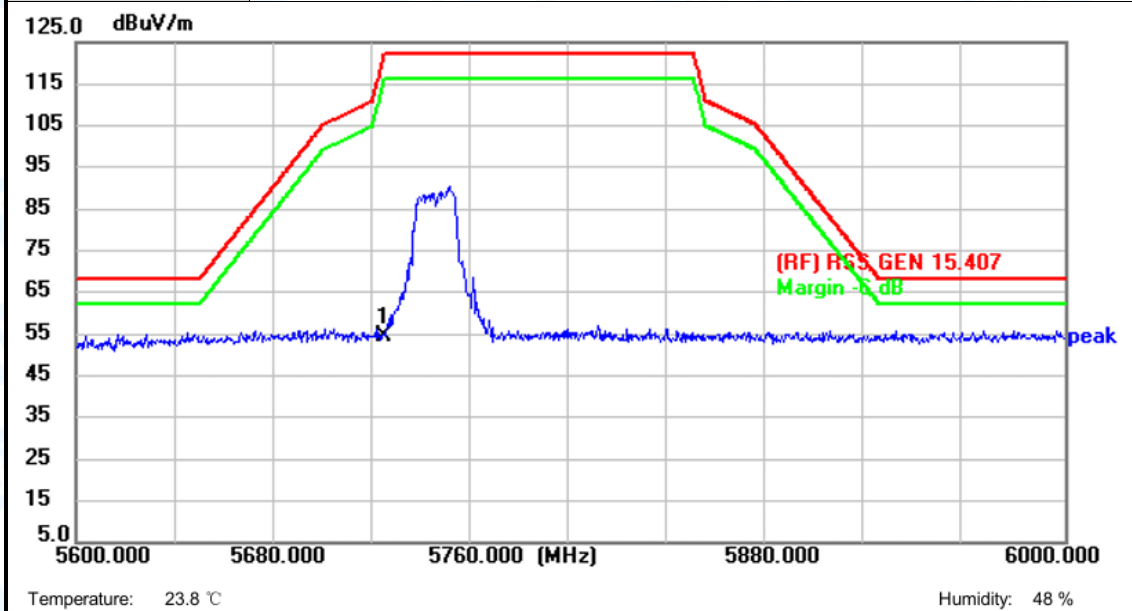


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 43.01          | 11.59         | 54.60          | 122.30         | -67.70      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                    |                    |     |
|---------------|------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                            | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                       |                    |     |
| Ant. Pol.     | Vertical                           |                    |     |
| Test Mode:    | TX 802.11a Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                    |                    |     |

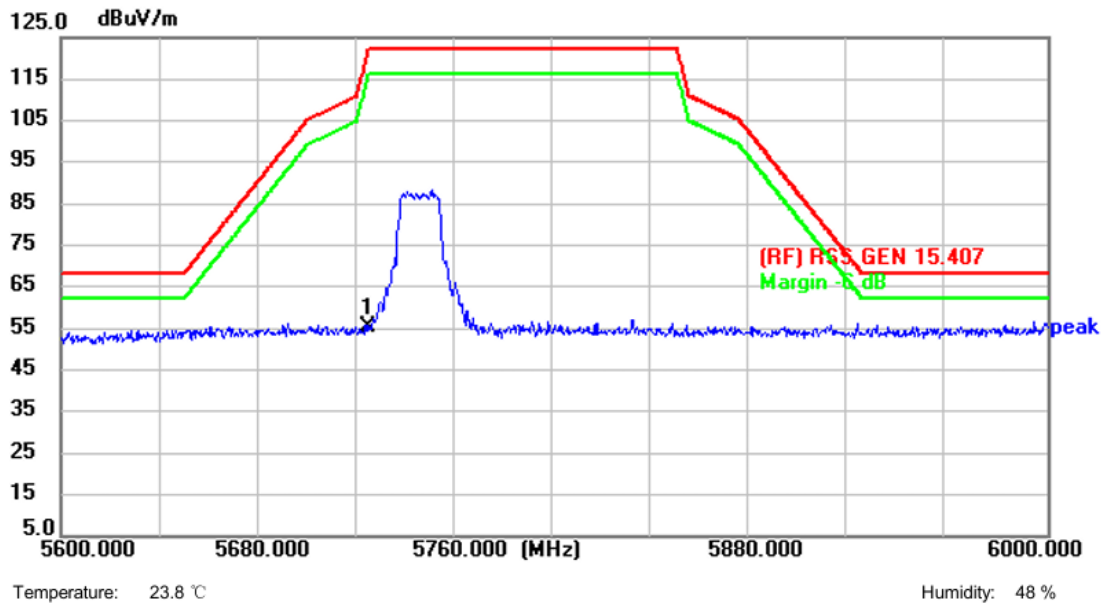


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 43.62          | 11.59         | 55.21          | 122.30         | -67.09      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                    |                    |     |
|---------------|------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                            | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                       |                    |     |
| Ant. Pol.     | Horizontal                         |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                    |                    |     |

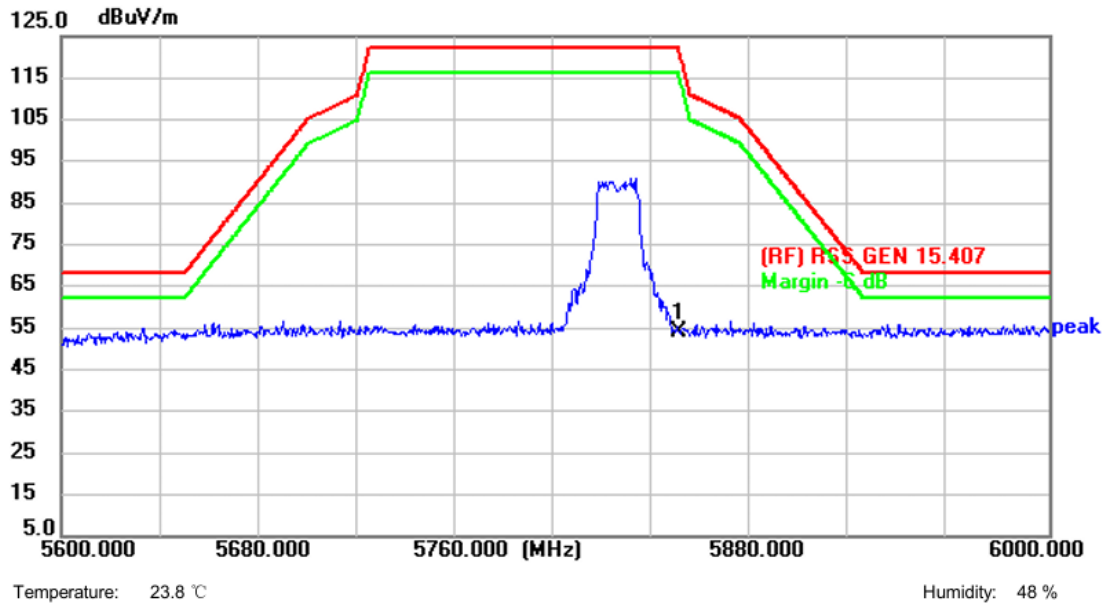


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.28          | 11.90         | 54.18          | 122.30         | -68.12      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                    |                    |     |
|---------------|------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                            | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                       |                    |     |
| Ant. Pol.     | Vertical                           |                    |     |
| Test Mode:    | TX 802.11a Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                    |                    |     |

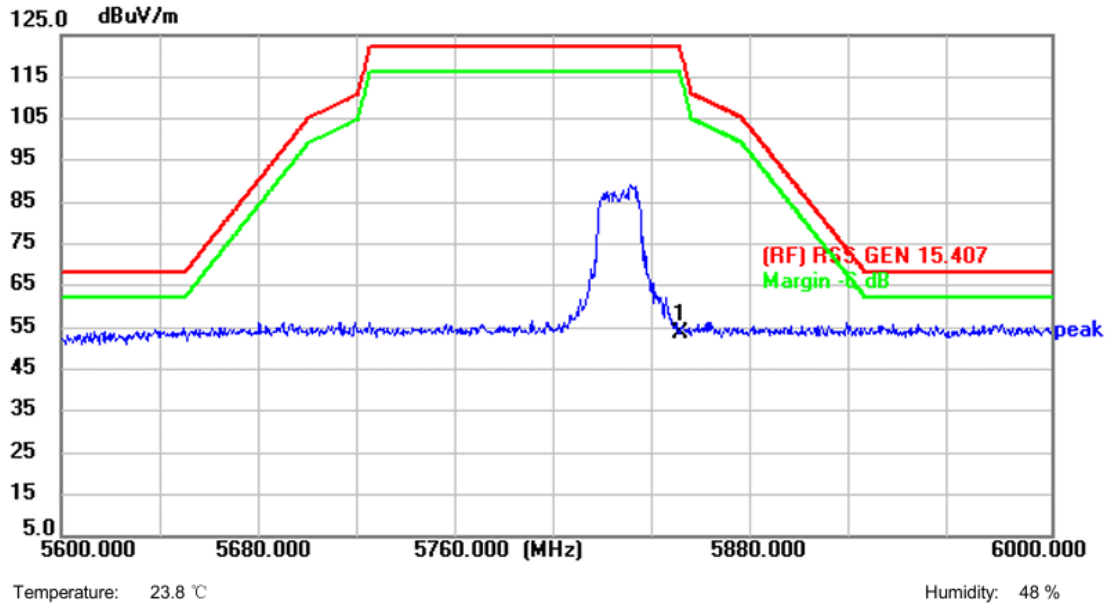


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 41.58          | 11.90         | 53.48          | 122.30         | -68.82      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

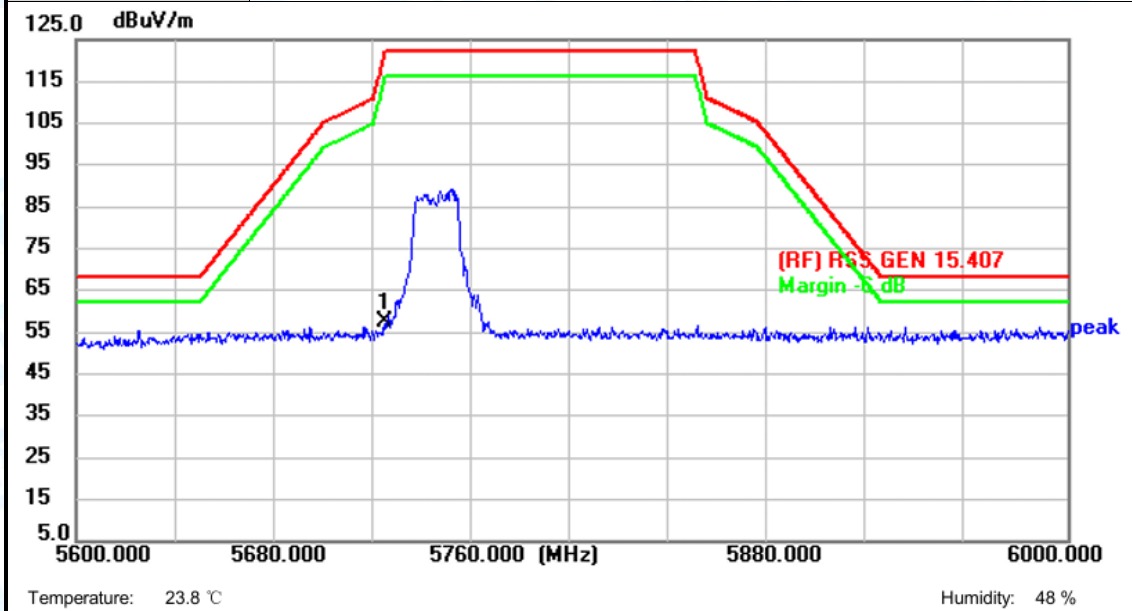


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 45.92          | 11.59         | 57.51          | 122.30         | -64.79      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

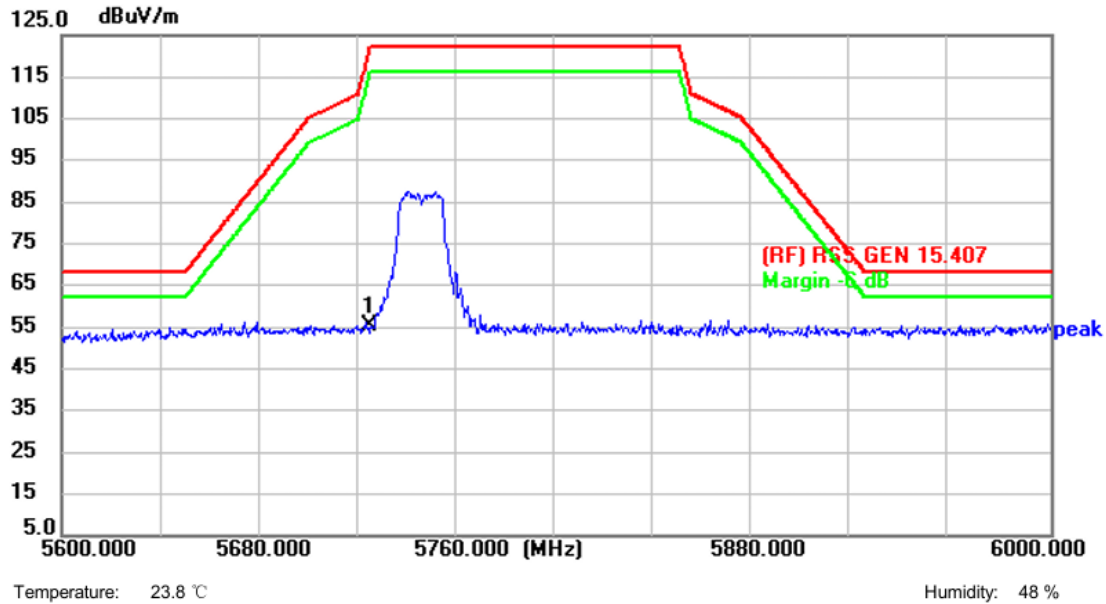


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 43.64          | 11.59         | 55.23          | 122.30         | -67.07      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

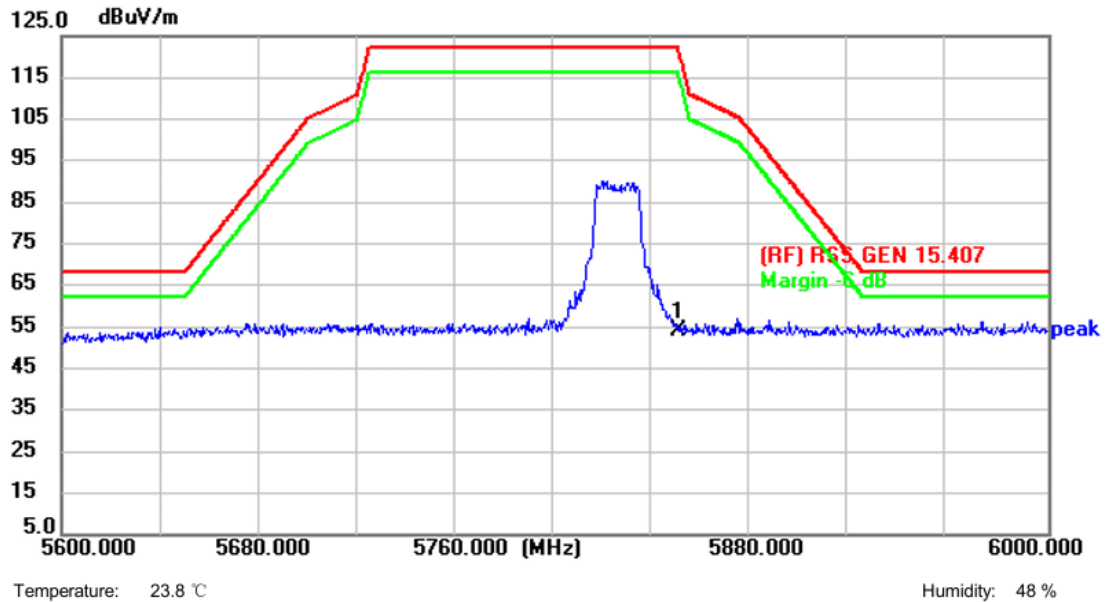


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.36          | 11.90         | 54.26          | 122.30         | -68.04      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

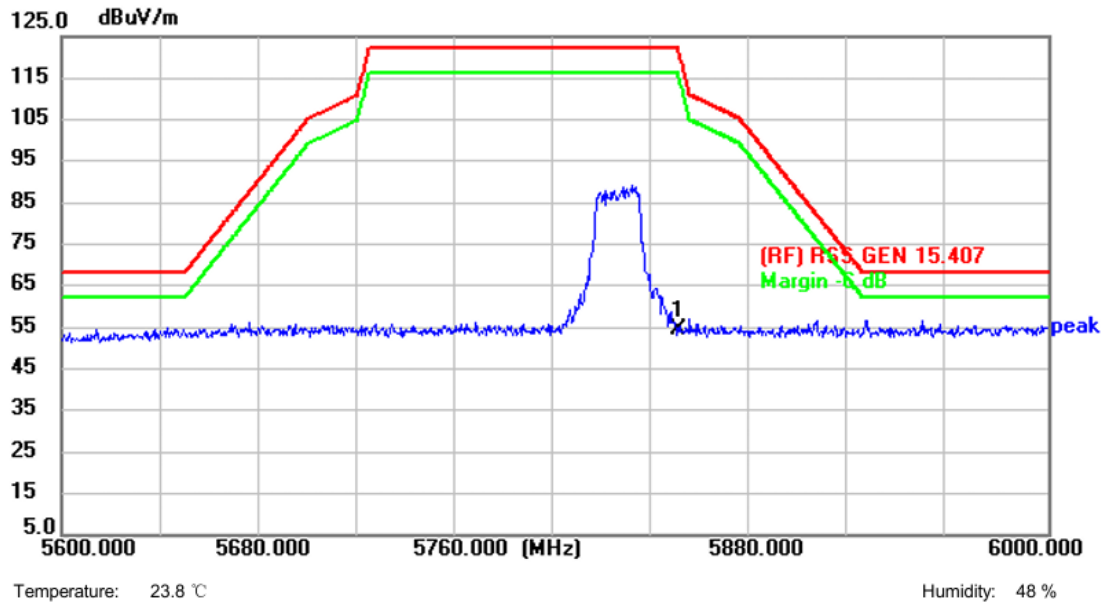


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.59          | 11.90         | 54.49          | 122.30         | -67.81      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

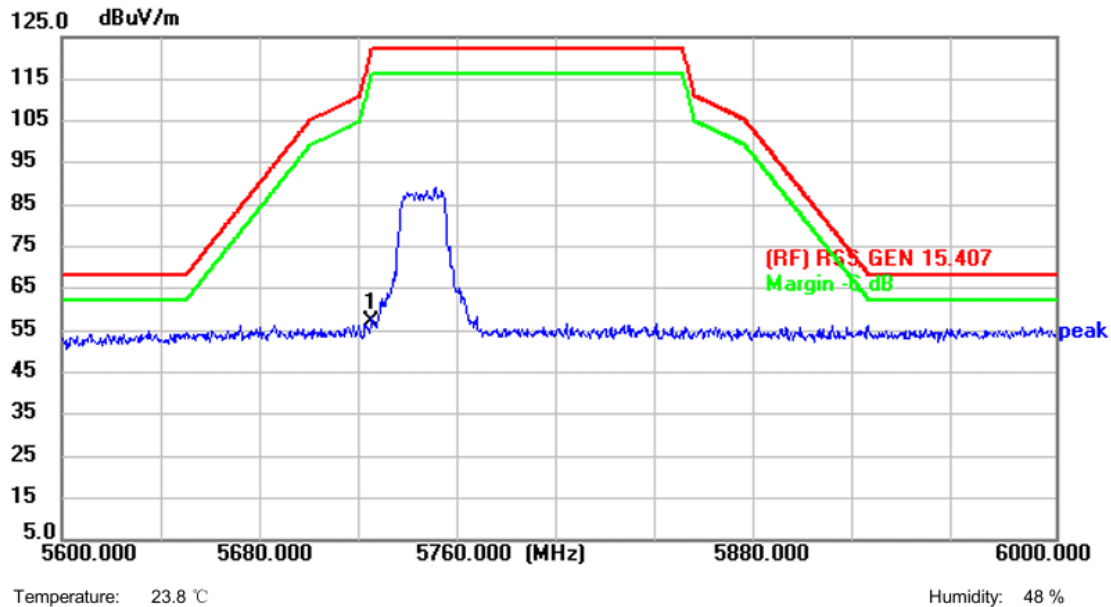


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 45.34          | 11.59         | 56.93          | 122.30         | -65.37      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

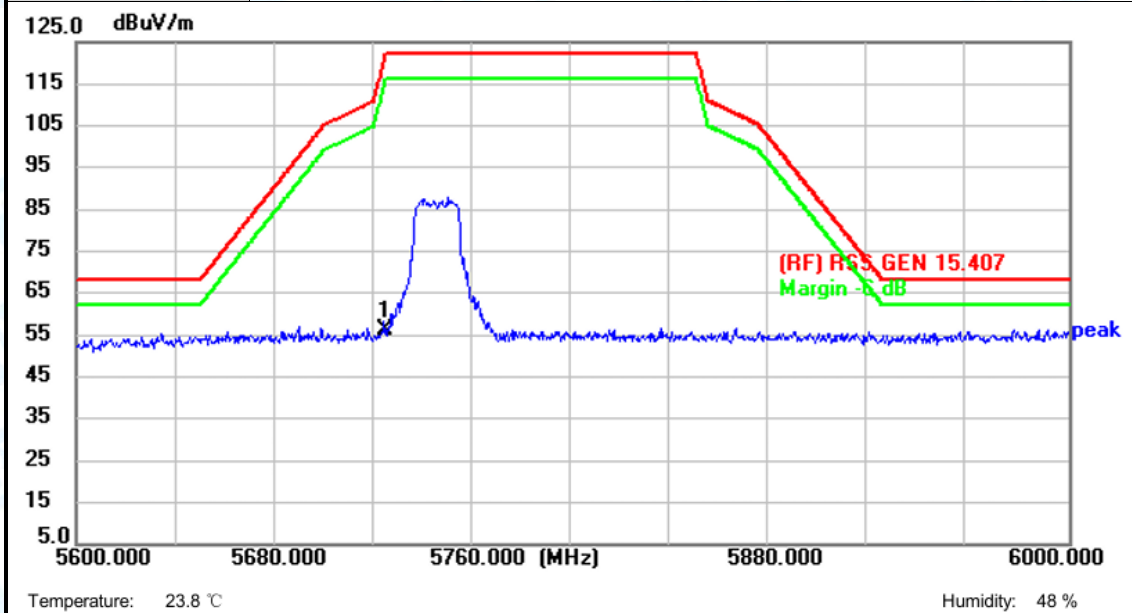


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 44.49          | 11.59         | 56.08          | 122.30         | -66.22      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

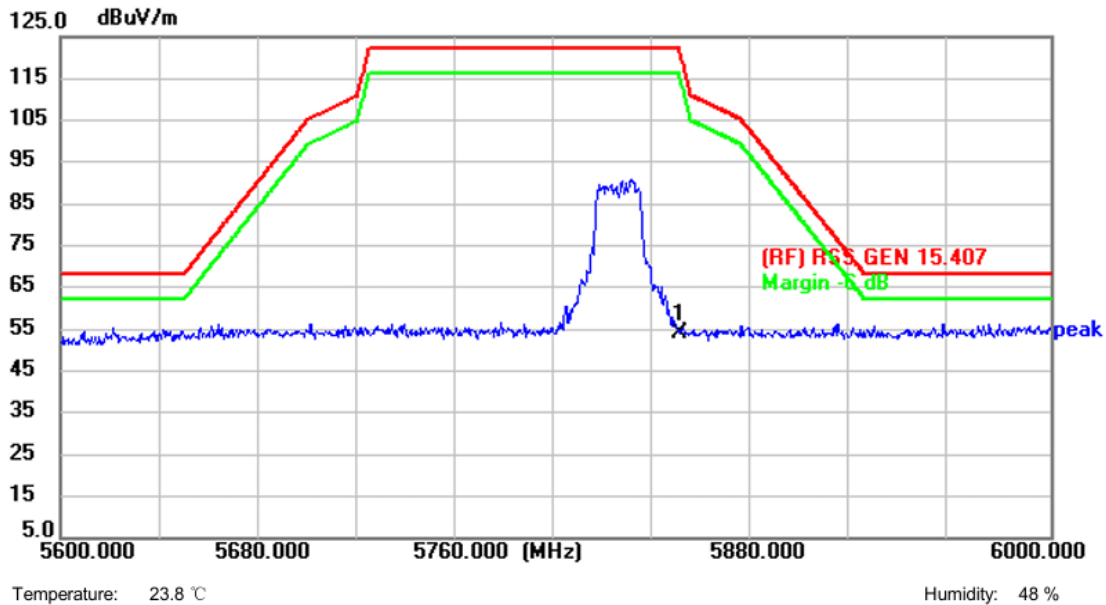


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.37          | 11.90         | 54.27          | 122.30         | -68.03      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

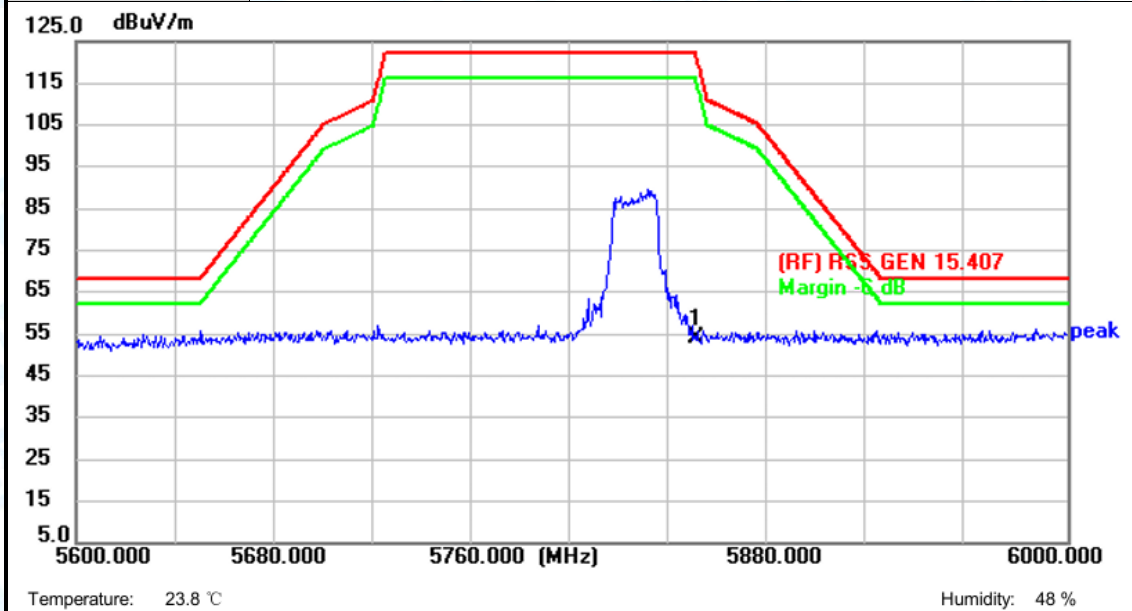


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.32          | 11.90         | 54.22          | 122.30         | -68.08      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

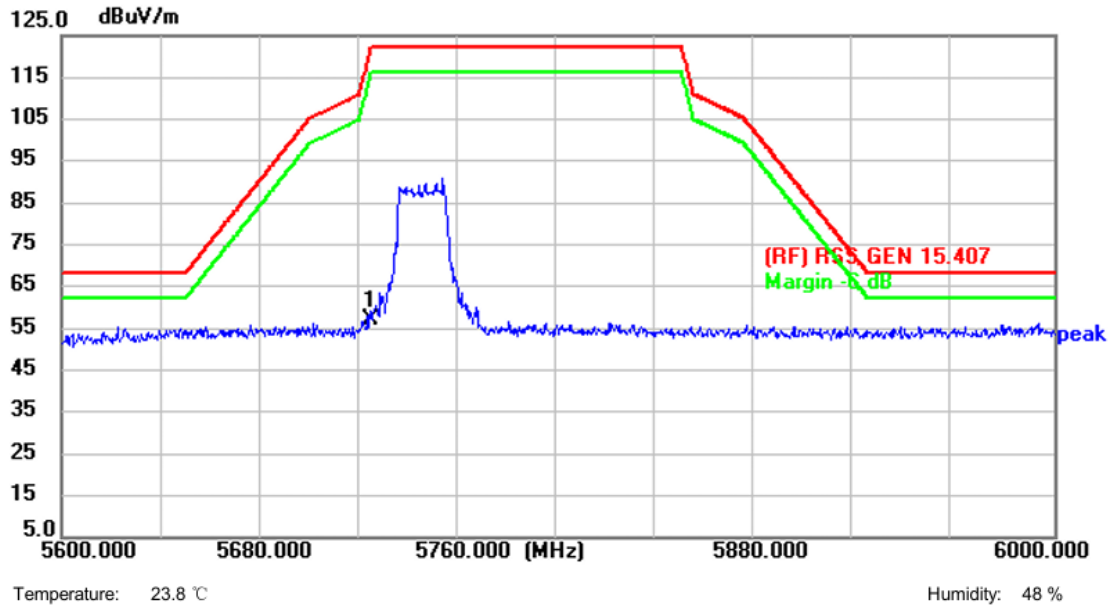


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 45.55          | 11.59         | 57.14          | 122.30         | -65.16      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5745 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

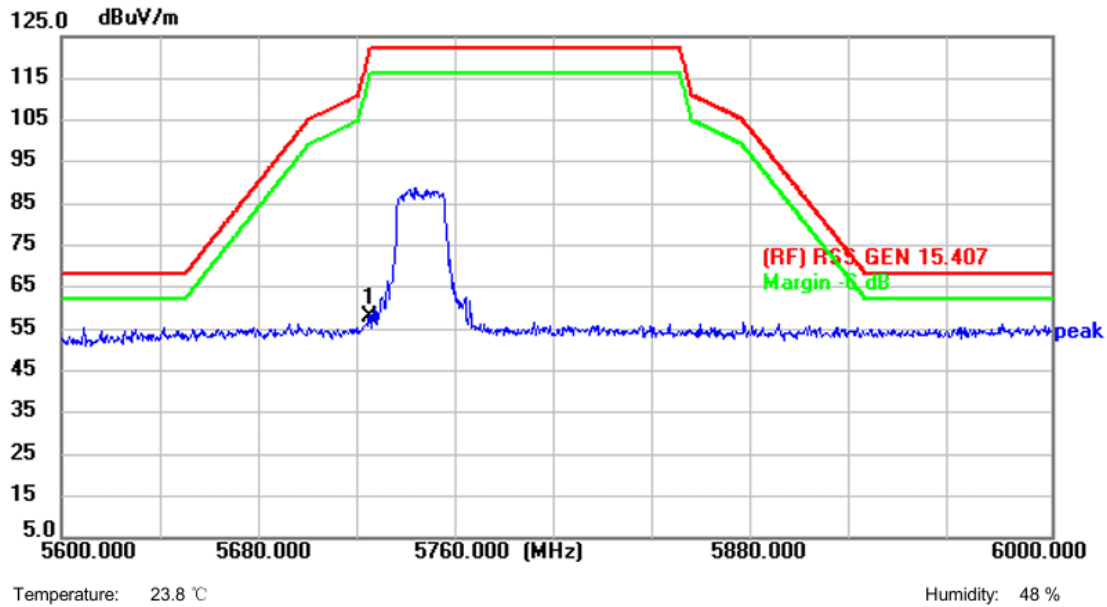


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 46.52          | 11.59         | 58.11          | 122.30         | -64.19      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

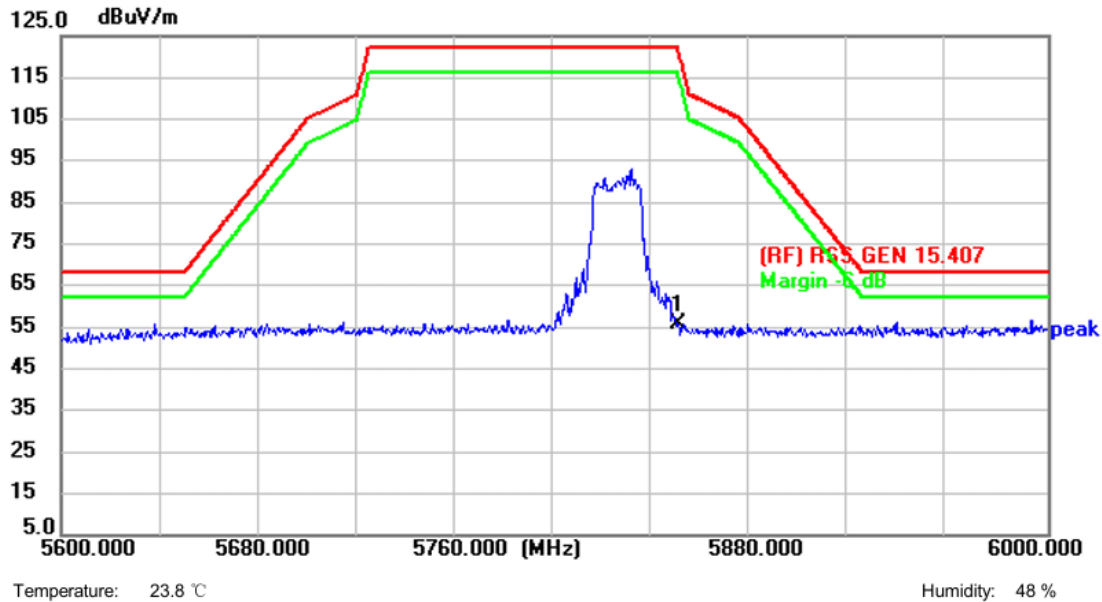


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 43.92          | 11.90         | 55.82          | 122.30         | -66.48      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE20) Mode 5825 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

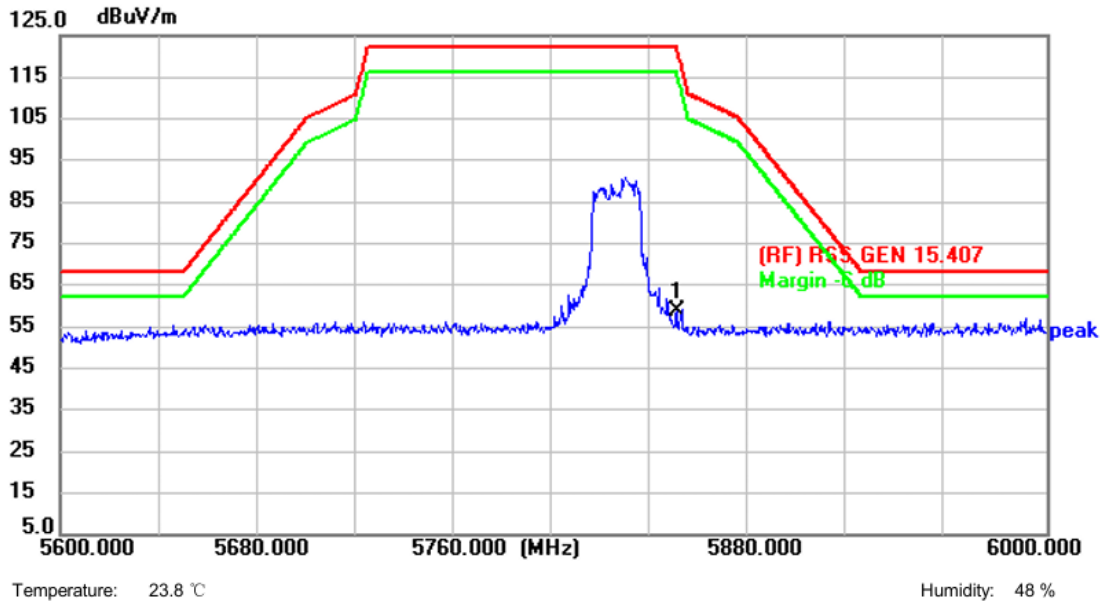


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 47.01          | 11.90         | 58.91          | 122.30         | -63.39      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

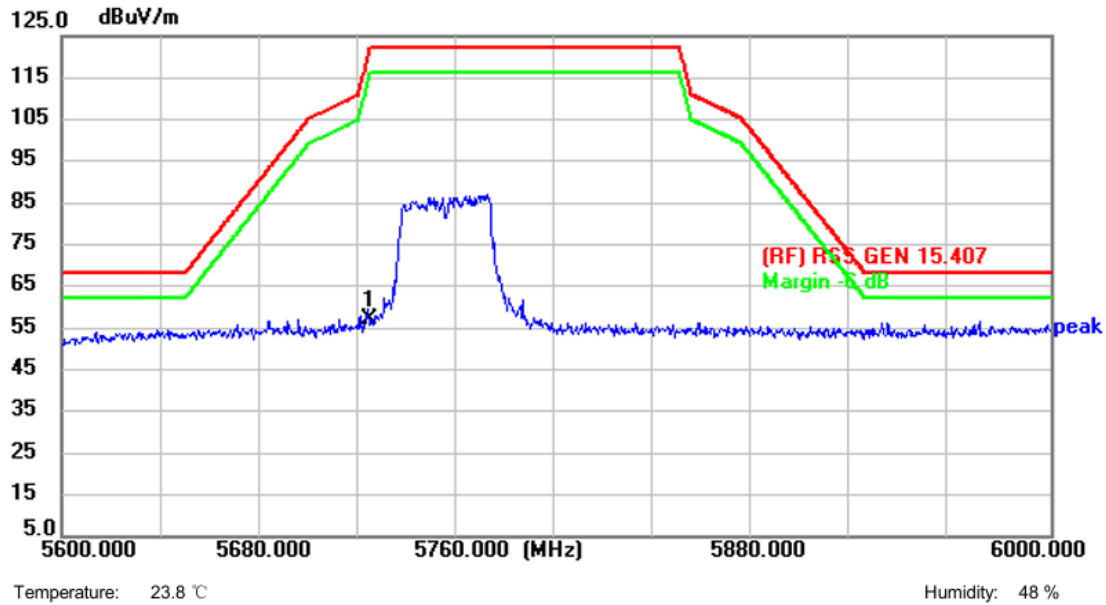


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 45.60          | 11.59         | 57.19          | 122.30         | -65.11      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

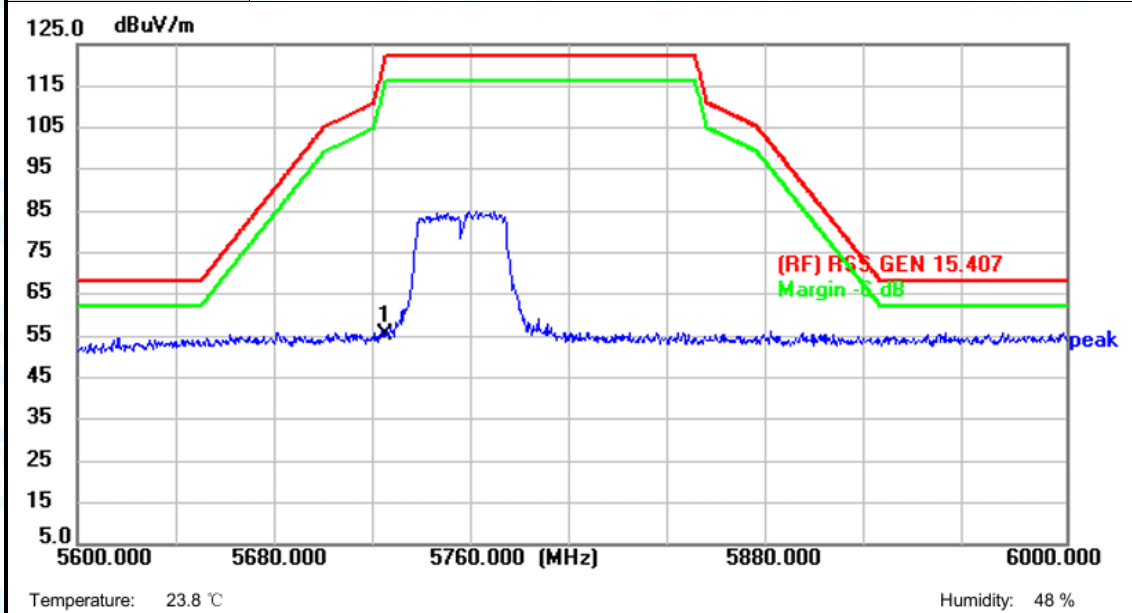


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 43.70          | 11.59         | 55.29          | 122.30         | -67.01      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Horizontal                               |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

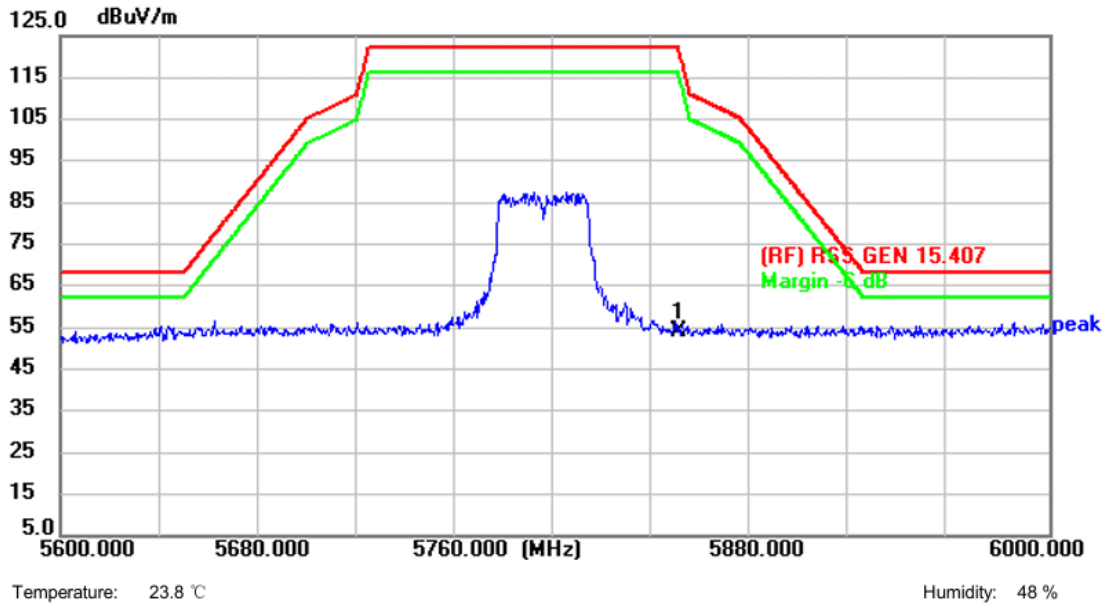


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.30          | 11.90         | 54.20          | 122.30         | -68.10      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                          |                    |     |
|---------------|------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                  | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                             |                    |     |
| Ant. Pol.     | Vertical                                 |                    |     |
| Test Mode:    | TX 802.11n(HT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                          |                    |     |

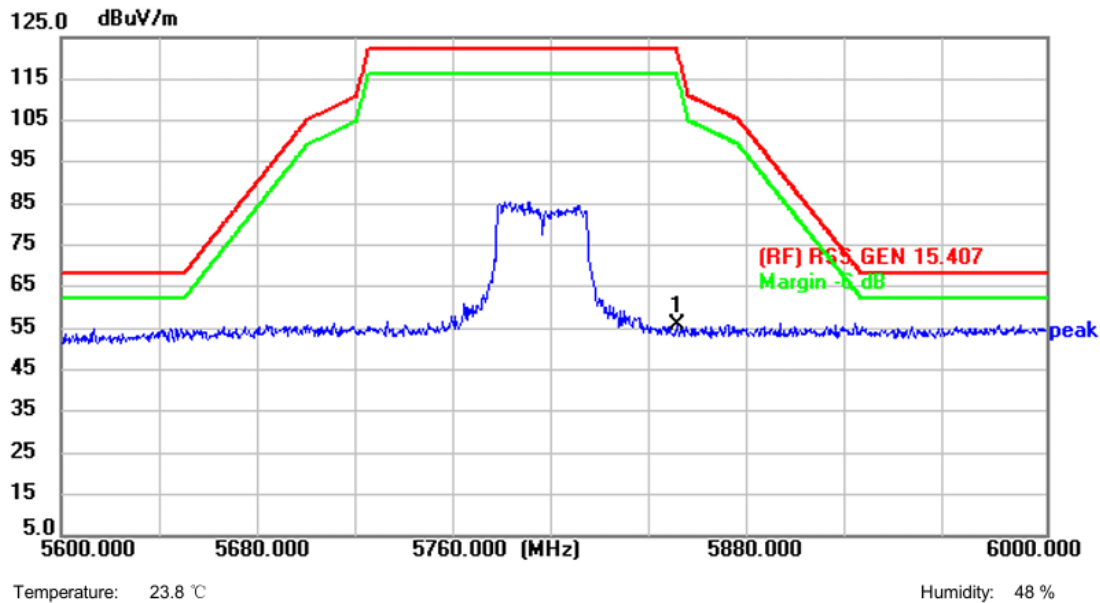


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 43.94          | 11.90         | 55.84          | 122.30         | -66.46      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

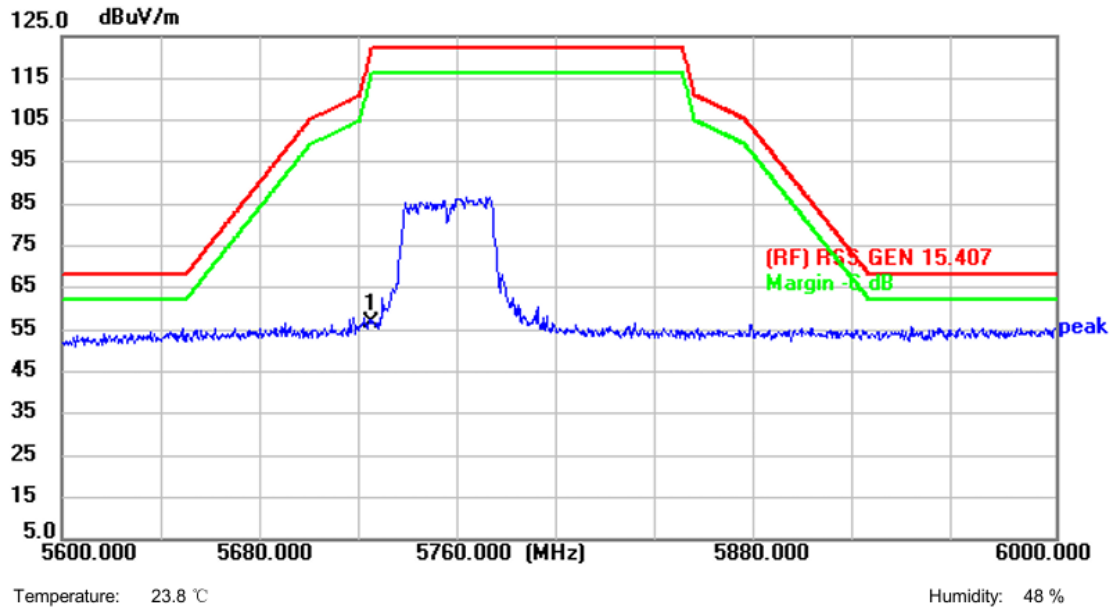


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 45.24          | 11.59         | 56.83          | 122.30         | -65.47      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

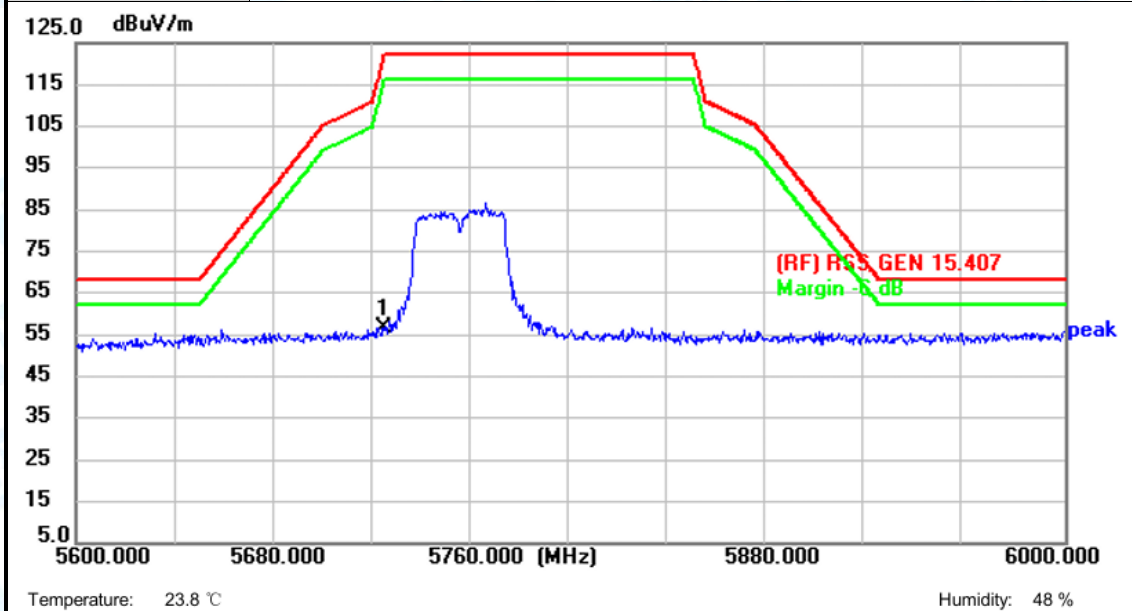


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 44.99          | 11.59         | 56.58          | 122.30         | -65.72      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Horizontal                                 |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

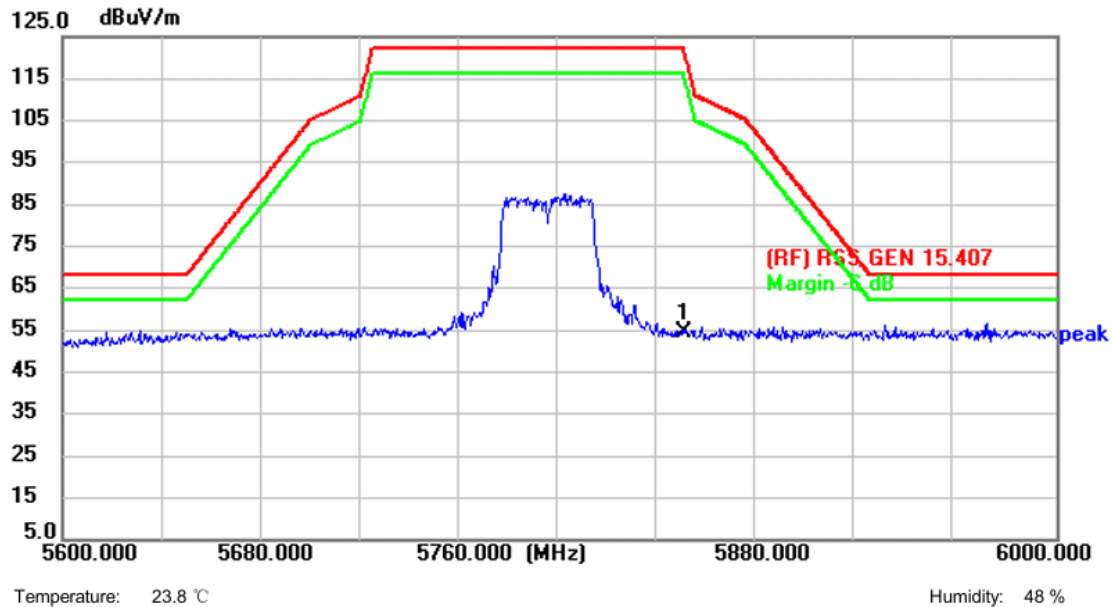


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 42.41          | 11.90         | 54.31          | 122.30         | -67.99      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                            |                    |     |
|---------------|--------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                    | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                               |                    |     |
| Ant. Pol.     | Vertical                                   |                    |     |
| Test Mode:    | TX 802.11ac(VHT40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                            |                    |     |

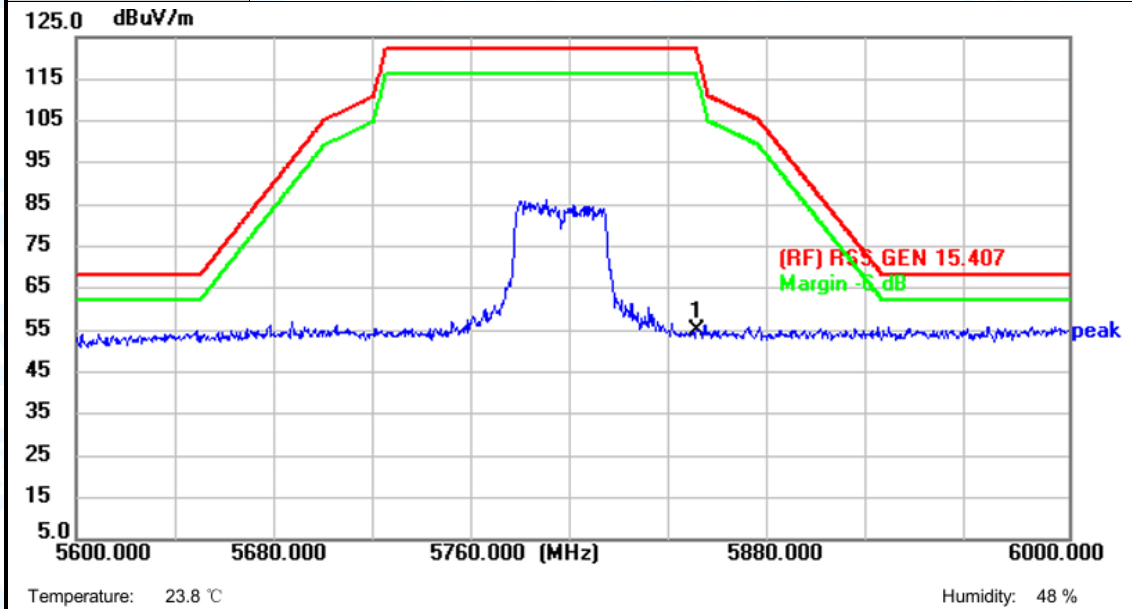


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 43.21          | 11.90         | 55.11          | 122.30         | -67.19      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

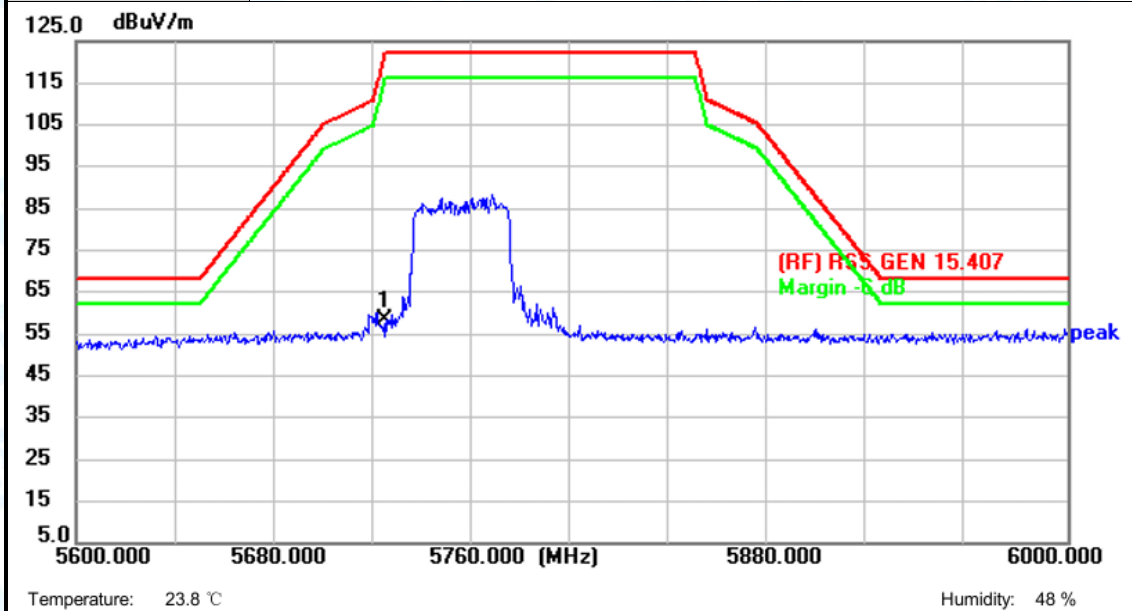


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 46.78          | 11.59         | 58.37          | 122.30         | -63.93      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5755 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

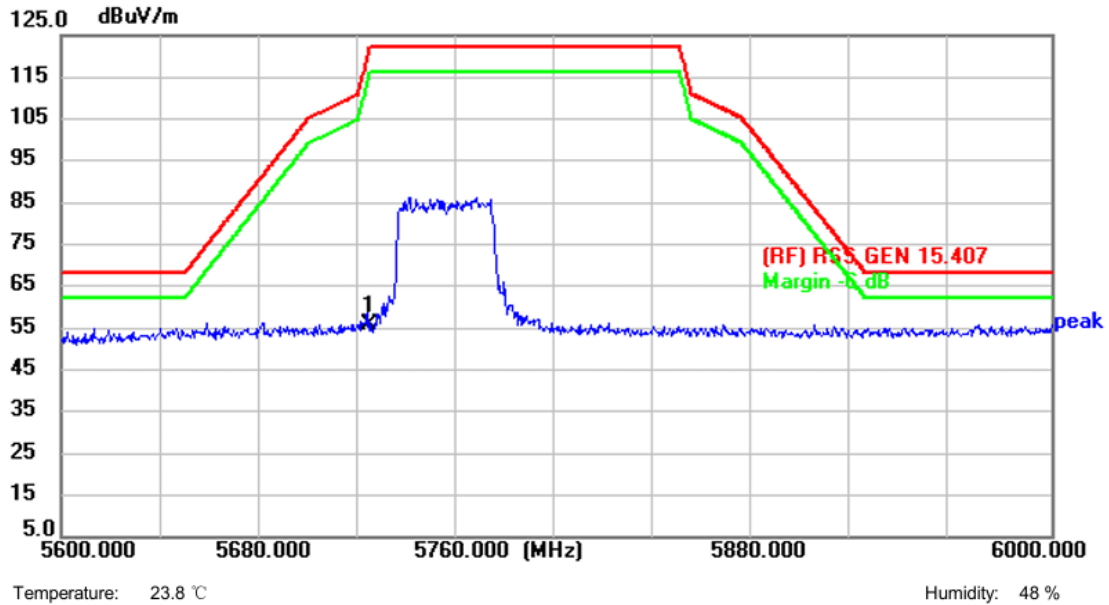


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5725.000        | 44.37          | 11.59         | 55.96          | 122.30         | -66.34      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Horizontal                                |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

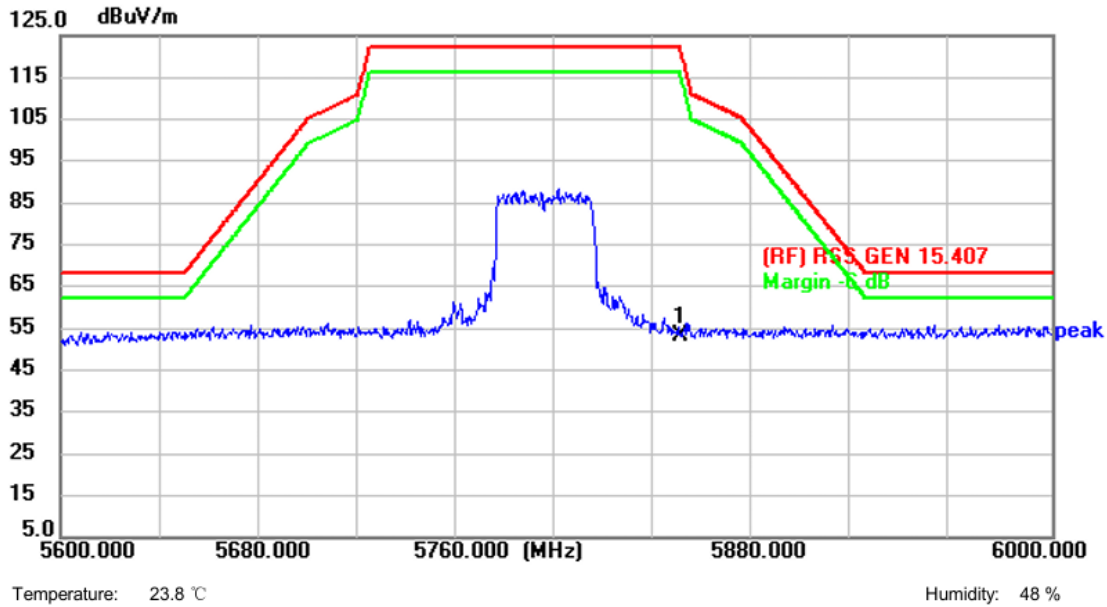


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 41.41          | 11.90         | 53.31          | 122.30         | -68.99      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)



|               |                                           |                    |     |
|---------------|-------------------------------------------|--------------------|-----|
| Temperature:  | 23.8 °C                                   | Relative Humidity: | 48% |
| Test Voltage: | AC 120V/60Hz                              |                    |     |
| Ant. Pol.     | Vertical                                  |                    |     |
| Test Mode:    | TX 802.11ax(HE40) Mode 5795 MHz (U-NII-3) |                    |     |
| Remark:       |                                           |                    |     |

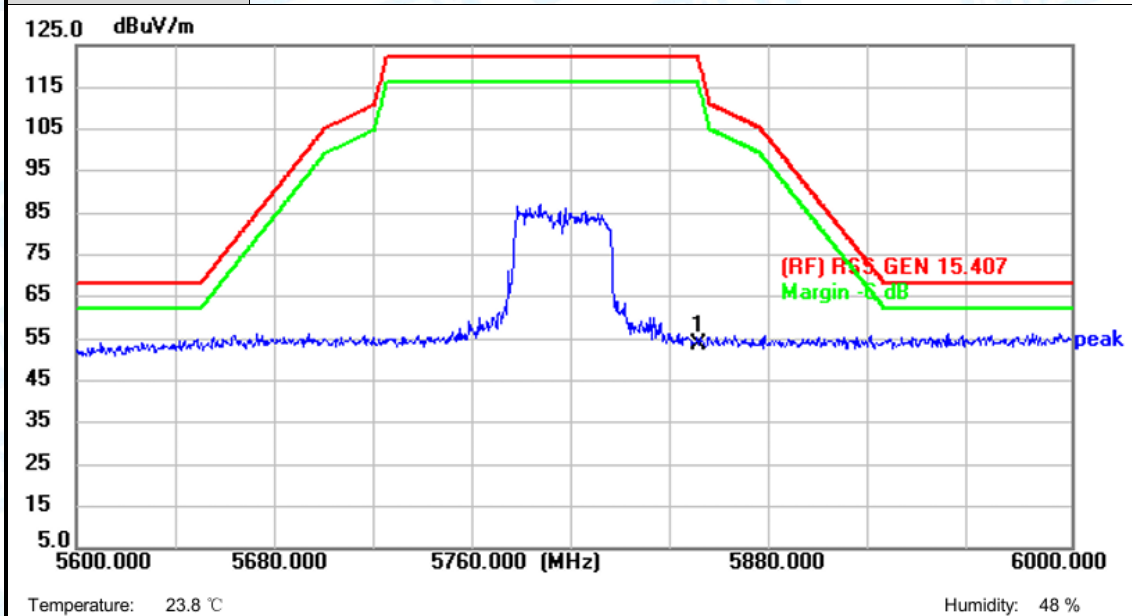

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-----|
| 1 * | 5850.000        | 41.57          | 11.90         | 53.47          | 122.30         | -68.83      | peak     | P   |

**Remark:**

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

-----END OF THE REPORT-----

