


CONQUEROR

Bluetooth Speaker

USER MANUAL

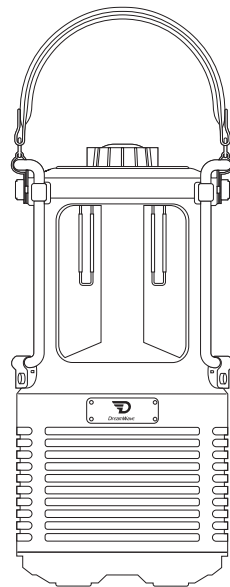

DreamWave Technologies LLC

269 Woodruff Way Milpitas, CA 95035

www.godreamwave.com

info@godreamwave.com



Godreamwave



※Thank you for purchasing DREAMWAVE speaker. Before using this product, make sure to read the instructions carefully to ensure correct usage.

Contents

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.


NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

What's in the Box	01
General Description	02
General Description Continue	03
Turning the CONQUEROR ON/OFF	04
Bluetooth Pairing	05
Connecting via LINE IN Input	06
Charging other devices with the speaker	06
Adjusting Bass/Treble EQ	07
Lighting Function	08
Standby Mode	09
TWS Pairing	09-10
Charging the speaker	11
Technical Information	12
Trouble Shooting	13
Technical Information in 10 Languages	14-18

What's in the Box

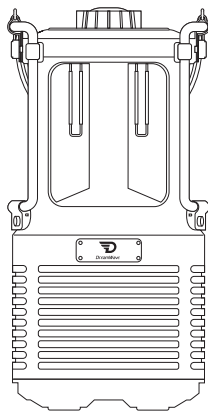


• DreamWave CONQUEROR-
Portable Bluetooth Speaker
with Camping Lantern*1



• Detachable Handle*1




M4 screw× 2pcs



• User Manual*1



• Warranty Card*1




• Type-C Power Lead*1




• 3.5mm Audio Cable*1


General Description

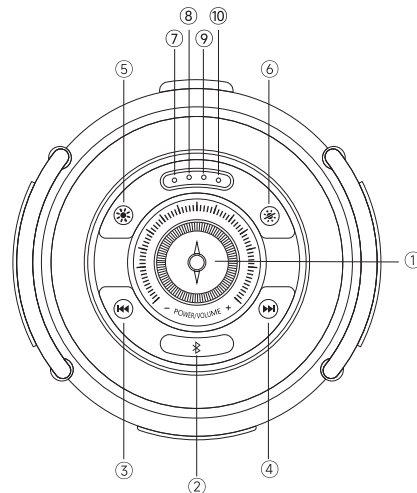

- | | |
|-------------------------------|---|
| ① Power/Volume Knob | ⑥ Brightness Button |
| ② Bluetooth Button | ⑦ Charging Indicator (RED) |
| ③ PREV | ⑧ TWS Paring/ EQ adjustment Indicator (WHITE) |
| ④ Next Song | ⑨ LINE IN Input/ Low Battery Indicator (RED) |
| ⑤ Light ON/OFF,
Light Mode | ⑩ Bluetooth Indicator (BLUE) |

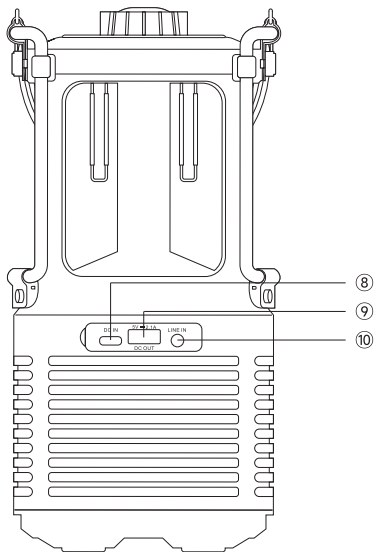


- ⑧ Type-C Power Charging Input
- ⑨ Power Output: 5V,2.1A
- ⑩ AUX Input for 3.5mm Jack




Long press Power/Volume Knob for 3 seconds to turning ON/OFF the speaker.

Adjusting the Volume



Turn Power/Volume Knob clockwise to increase the volume+



Turn Power/Volume Knob counter clockwise to decrease the volume-

Note: Make sure the volume is set to low on both the speaker and the audio source before using the speaker.

Bluetooth Pairing


① Long press Power/Volume Knob for 3 seconds to turn on the speaker and it will automatically enter into the Bluetooth pairing mode, the indicator will be Flash Blue.

② Turn on Bluetooth of your device (smart phone, computer or tablet PC), search Bluetooth name-"Conqueror" for pairing.

If use an iPhone with IOS 5.0 and above system, you can check the speaker battery status from the phone after pairing.

③ When Bluetooth pairing is completed, the indicator will be Solid Blue.

④ Long press Bluetooth button for 3 seconds to disconnect previous device, and then you can pair it with current device.

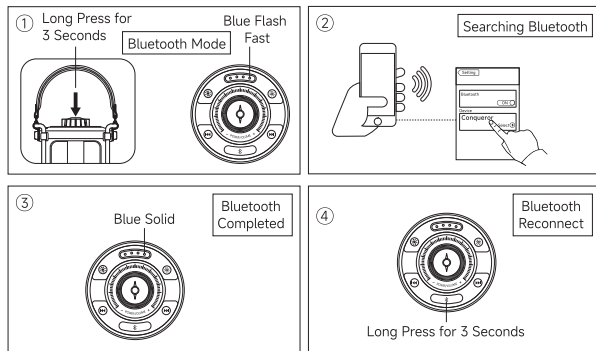


Connecting via LINE IN Input

① Connect a 3.5mm audio cable to the input marked LINE IN on the back of the speaker. Connect the other end of the lead of the audio output on your audio device.

② After connection, the red LED light will be ON.

(Note: When using the LINE IN connection, the Bluetooth connection will automatically disconnect.)

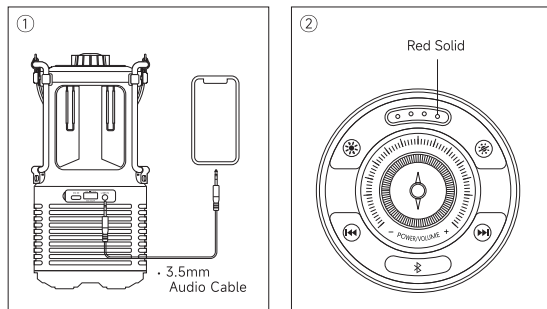

Adjusting Bass/Treble EQ



- Short press Power/Volume Knob to enter into bass EQ mode, and the white light will flash slowly. Turn the knob clockwise to increase the bass, and turn it counter-clockwise to reduce the bass.
- Short press Power/Volume Knob again to enter treble EQ mode, and the white light will quickly flash. Turn the knob clockwise to increase the treble, and turn it counter-clockwise to reduce the treble.

Adjusting Bass/Treble EQ


① Short press Power/Volume Knob to enter into bass EQ mode, and the white light will flash slowly.

Turn the knob clockwise to increase the bass, and turn it counter-clockwise to reduce the bass.

② Short press Power/Volume Knob again to enter treble EQ mode, and the white light will quickly flash. Turn the knob clockwise to increase the treble, and turn it counter-clockwise to reduce the treble.

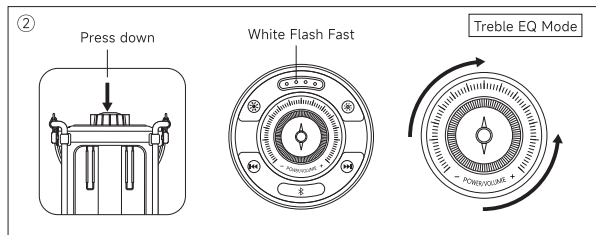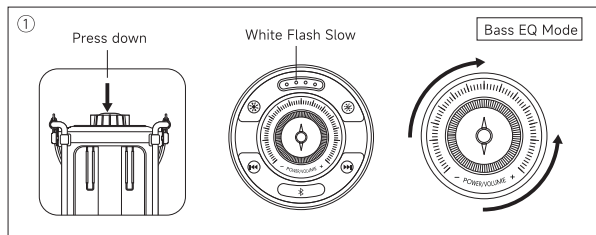

Lighting Function

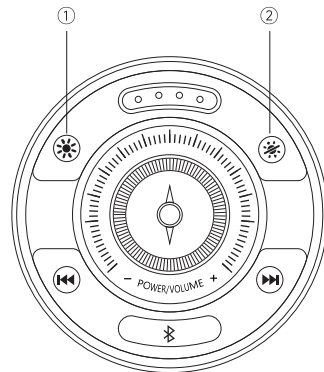

① Lighting ON/OFF, Lighting Mode Button ☼

- Long press the button for 3 seconds ☼ to turn on or off lighting.
- Short press the button ☼ to switch between 5 different lighting modes.

5 Lighting modes in the following order: Orange Light Mode -> Warm White Light Mode -> Orange Light + Warm White Light Mode -> Light flash with music playing - SOS Mode (Universal standard 3-short, 3-long, and 3-short switch light mode)

② Brightness Button ☼

- There are 5 different brightness levels. Short press the button to adjust brightness.

Standby Mode

If not use for music playing in 30 minutes, the speaker will automatically turn off.

(Note: Standby mode only works for music playing, not for light. The light will automatically turn off only if the speaker is under a low battery.)

TWS Pairing

For better listening experience, you can pair TWO CONQUERORs together to get a stereo sounds effects.

Before TWS pairing, please make sure two CONQUERORs disconnect with any other devices.

Master: CONQUEROR -A


Slave: CONQUEROR -B

The step of DUAL PAIRING MODE is as follows:

Step ①


Make sure you turn off all music Apps on your device before entering DUAL PAIRING Mode.

Turn on CONQUEROR -A, it will automatically enter into Bluetooth pair status, then search "Conqueror" on your phone to get Bluetooth connected.

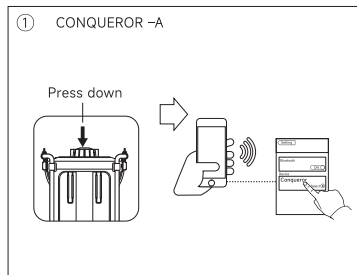


Step ②

Double-press the Bluetooth button on the CONQUEROR -A and the TWS indication shows White Flash Fast.

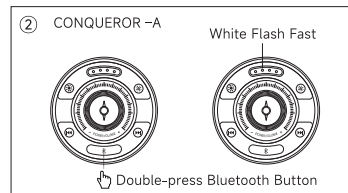


Step ③

Turn on CONQUEROR -B then double-press the Bluetooth button as well. The TWS pairing indication shows White Flash Fast.

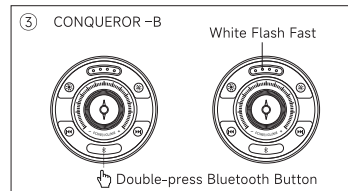

Step ④

CONQUEROR -A and CONQUEROR -B will automatically pair themselves to be left and right channels. The indication of the master shows Blue and White, the slave shows only White.

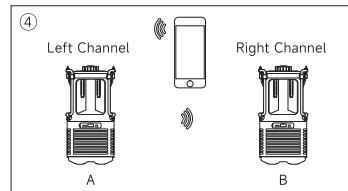

Note:



1. In DUAL PAIRING MODE, pressing the power button on either of the two CONQUERORs, both of them will turn off.

2. Two CONQUERORs are connected DUAL pairing successfully. They will automatically stay connected when they turn on next time.


Charging the speaker

① Support quick charging and it is compatible with most QC and PD power adaptors in the market.


(Note: Need to use an adapter with 5V,2A or above standard. This is not included in the package)

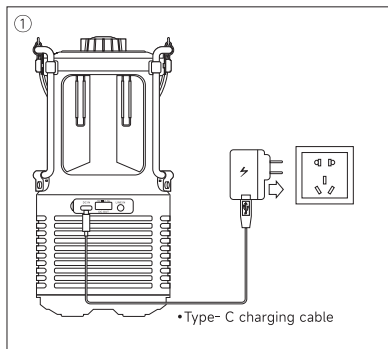

② When the speaker is low battery, LED indication shows Red Flash Slow.



③ In charging, charging LED indication shows Red Solid.



④ When the speaker is full charged, Red charging indication turns OFF.

Technical Information

Portable Bluetooth Speaker with Camping Lantern

Model: Conqueror Rating Power: 30W

Speaker Specifications

- 2" Full Range Speaker × 2
- Passive speaker x2
- EQ Function: 2 channels Audio EQ, Bass & treble can be adjusted
- S/N Ratio: ≥78dB
- Frequency Response: 55Hz-20KHz



Connection Mode

- **Bluetooth®**: Bluetooth 5.0+EDR, A2DP, AVRCP
- LINE IN: 3.5 mm stereo jack



Lighting

- Orange LEDs: 2700K
- Warm White LEDs: 3000K
- Brightness: 10-300 Lumens



Battery

- Battery Type: Built-in rechargeable Lithium battery
- Battery Capacity: 9,600mAh
- Lighting Time: 18 hours at max brightness, without music playing
- Music Playback Time: 5-8 hours without lighting
- Charge Time: 4-5 hours, fast charge in 3 hours



Power

- Input Power: 5-9V, Type-C
- Output Power: 5V, 2.1A, USB-A



(Note: The speaker support quick charging, QC and PD adapters. Need to use an adapter with 5V,2A or above standard. The product doesn't include an adapter. User needs to purchase the proper adaptor accordingly.)

Product

- Top oil-filled compass: Do not use the compass at any angle and do not use the compass near metal objects or magnetic fields.
- Water proof level: IPX5
- Dimension: W106×D106×H220mm
- Weight: 0.93kg



Trouble Shooting

Problem	Cause	Action
The speaker does not turn on	The battery is discharged	Connect the Type-C cable lead to the speaker and an adapter.. To extend battery life, you need to charge the speaker 1-2 one month even on use.
The speaker is not response	A software problem has occurred.	Turn the speaker off then turn it on again.
No sounds	- The wrong audio source is selected. - Volume is set too low on either the audio source or the speaker.	- Ensure that the device is connected to the Conqueror. Check that no other connected device is playing. - Slightly increase the volume on your audio source or the speaker.
The speaker is not response	- The audio stream or audio file is poor quality. - Volume is set too high on the speaker or the audio source device	- Try another good audio file or music player. - Decrease the volume on the speaker or the audio source devices
Sound is intermittent/ Bluetooth disconnected	The device far away from the speaker, or there are some obstacles between them	Distance between Device and speaker less than 10 meters, and make sure there are no obstacles like walls, or doors, etc. between them.
Sound is intermittent/ sound too low	Low battery	Connect the Type-C cable lead to the speaker and an adapter..
Bluetooth Connection drops out	- Speaker already connected to other devices - Too much paired in the devices	- Long press the Bluetooth button to disconnect and re-pairing - Delete the unnecessary paired devices, and re-pair.

If you still have any questions, please send e-mail to support@godreamwave.com

EN

Bluetooth Version:	5.0+EDR, A2DP, AVRCP
IP rate:	IPX5, splashproof
Power:	30W
Frequency response:	55Hz-20kHz
SN Ratio:	≥78dB
Input:	3.5mm Line In Type-C Charge
Output:	USB_A (5V, 2.1A)
Lighting:	Orange LEDs: 2700K Warm White LEDs: 3000K
Brightness:	10-300 Lumens
Battery type:	Li-ion 9600mAh
Music playing time:	5-8 hours without lighting
Lighting time:	18 hours at max brightness, without music playing
Charge time:	4-5 hours, fast charge in 3 hours
Dimensions:	W106×D106×H220mm/4.17×4.17×8.66inch
Weight:	930g/0.93kg/2.05lb/32.8 oz

JP

Bluetoothバージョン	5.0+EDR, A2DP, AVRCP
防水性能:	IPX5、防水
定格出力:	30W
再生周波数:	55Hz-20kHz
SNレシオ:	≥78dB
入力:	3.5mm Line In オーディオ Type-C 充電
出力:	USB_A (5V, 2.1A)
照明:	オレンジ LEDs: 2700K 暖かい白色 LEDs: 3000K
明るさ:	10-300 Lumens
バッテリー・タイプ:	リチウムリオン 9600mAh
連続再生時間:	5-8時間
照明時間:	最大照明で18時間
充電時間:	4-5時間, ブースト充電で3時間
寸法:	W106×D106×H220mm/4.17×4.17×8.66inch
重量:	930g/0.93kg/2.05lb/32.8 oz

DK

Bluetooth Version:	5.0+EDR,A2DP, AVRCP
IP rate:	IPX5, splashproof
Effekt:	30W
Frekvensområde:	55Hz-20kHz
Signal/støj forhold:	≥78dB
Indgang:	3.5 mm stregindgang Type-C opladning
Output:	USB_A (5V,2.1A)
Belysning:	Orange LEDs:2700K Varm hvid LEDs:3000K
Lysstyrke:	10-300 Lumens
Batteri type:	Lithium-ion 9600mAh
Afspilningstid:	5-8 timer uden belysning
Belysningstid:	18 timer ved maksimal lysstyrke uden musikafspilning
Opladningstid:	4-5 timer, hurtigt opladning på 3 timer
Dimensioner:	W106×D106×H220mm/4.17×4.17×8.66inch
Vægt:	930g/0.93kg/2.05lb/32.8 oz

FR

Bluetooth Version:	5.0+EDR,A2DP, AVRCP
IP niveau:	IPX5,etanche
Puissance :	30W
Frequence	55Hz-20kHz
SN taux	≥78dB
Entrée en ligne:	3.5mm Ligne en Charge de type-C
La production:	USB_A (5V,2.1A)
éclairage:	Led Orange:2700K LEDs blanches chaudes:3000K
Luminosité:	10-300 Lumens
Batterie type:	Lithium-ion 9600mAh
Temps de lecture:	5-8 heures sans éclairage
Temps d'éclairage:	18 heures à la luminosité maximale, sans jeu de musique
Temps de charge:	4-5 heures, charge rapide en 3 heures
Dimensions:	W106×D106×H220mm/4.17×4.17×8.66inch
Poids	930g/0.93kg/2.05lb/32.8 oz

ES

Bluetooth versión :	5.0+EDR,A2DP, AVRCP
tasa de IP:	IPX5, a prueba de salpicaduras
Potencia nominal:	30W
Respuesta de frecuencia:	55Hz-20kHz
Proporcion de SN:	≥78dB
Entrada:	Entrada de línea de 3,5 mm Cargo type-C
Salida:	USB_A (5V,2.1A)
Alumalum:	Led de color naranja:2700K Led de color blanco cálido:3000K
El brillo:	10-300 Lumens
Tipo de batería:	Lones de litio 9600mAh
Tiempo de reproducción de música:	5-8 horas sin iluminación
Tiempo de iluminación:	18 horas al máximo brillo, sin tocar música
Tiempo de carga:	4-5 horas, carga rápida en 3 horas
Dimensiones:	W106×D106×H220mm/4.17×4.17×8.66inch
Peso:	930g/0.93kg/2.05lb/32.8 oz

DE

Bluetooth Version:	5.0+EDR,A2DP, AVRCP
IP rate:	IPX5, spritzwasser geschützt
Power:	30W
Frequenz:	55Hz-20kHz
SN Verhältnis:	≥78dB
Füg es ein:	Das ist ein 3,5 mm draht Elektrische ladung type-C
Output:	USB_A (5V,2.1A)
Beleuchtung:	Orang emit roten lampen:2700K Warme led:3000K
Leuchtkraft:	10-300 Lumens
Batterietyp:	Lithium-Ionen 9600mAh
Musik Wiedergaberzeit:	5-8 stunden lang kein licht
Lighting time:	Arbeite 18 stunden in maximalem licht und ohne musik
Zeit zum aufladen:	Vier bis fünf stunden, drei stunden laden
Abmessungen:	W106×D106×H220mm/4.17×4.17×8.66inch
Gewicht:	930g/0.93kg/2.05lb/32.8 oz

CHS

蓝牙版本:	5.0+EDR,A2DP, AVRCP
防水等级:	IPX5
功率:	30W
频率:	55Hz-20kHz
信噪比:	≥78dB
输入接口:	3.5mm Line In 音频输入 Type-C 充电输入
输出接口:	USB_A (5V,2.1A)输出
照明:	灯丝:2700K LED灯:3000K
亮度:	10-300 lm
电池:	9600毫安锂电池
播放时长:	照明关闭状态下续航5-8小时
照明时长:	无音乐播放, 最大亮度下续航18小时
充电时间:	4-5小时, 快充3小时
产品尺寸:	W106×D106×H220mm/4.17×4.17×8.66inch
产品净重:	930g/0.93kg/2.05lb/32.8 oz

CHT

藍牙版本:	5.0+EDR,A2DP, AVRCP
防水等級:	IPX5
功率:	30W
頻率:	55Hz-20kHz
信噪比:	≥78dB
輸入接口:	3.5mm Line In 音頻輸入 Type-C 充電輸入
輸出接口:	USB_A (5V,2.1A)輸出
照明:	燈絲:2700K LED燈:3000K
亮度:	10-300 lm
電池:	9600毫安鋰電池
播放時長:	照明關閉狀態下續航5-8小時
照明時長:	無音樂播放, 最大亮度下續航18小時
充電時間:	4-5小時, 快充3小時
產品尺寸:	W106×D106×H220mm/4.17×4.17×8.66inch
產品淨重:	930g/0.93kg/2.05lb/32.8 oz

PL

Wersja Bluetooth	5.0+EDR,A2DP, AVRCP
Stopień ochrony:	IPX5, odporny na zachłapania
Moc znamionowa:	30W
Pasma przenoszenia:	55Hz-20kHz
Stosunek sygnału do szumu (S/N):	≥78dB
Wkład:	Wejście liniowe 3.5 mm Opłata typu C
Wyjście:	USB_A (5V,2.1A)
Oświetlenie:	Pomarańczowe diody LED:2700K Diody LED w kolorze ciepłej bieli:3000K
Jasność:	10-300 Lumenów
Bateria:	Litowo-jonowa 9600mAh
Czas odtwarzania muzyki	5-8 godzin bez oświetlenia
Czas świecenia:	18 godzin przy maksymalnej jasności, bez odtwarzania muzyki
Czas ładowania:	4-5 godzin, szybkie ładowanie w 3 godzin
Wymiary:	W106×D106×H220mm/4.17×4.17×8.66inch
Waga:	930g/0.93kg/2.05lb/32.8 oz


RU

Версия Bluetooth:	5.0+EDR,A2DP, AVRCP
Степень защиты (IP):	IPX5, защита от брызг
Мощность:	30W
Частотная характеристика:	55Hz-20kHz
Отношение сигнал/шум:	≥78dB
Информация о проекте:	Линия 3.5 мм Зарядка типа c
Выход из строя:	USB_A (5V,2.1A)
Освещенность:	Светодиоды оранжевые:2700K Теплые белые светодиоды:3000K
Яркость:	10-300 луменс
Тип батареи:	Литиево-ионная 9600mAh
Продолжительность проигрывания:	5-8 часов без освещения
Время освещения:	18 часов в макс. яркости, без музыки
Время зарядки:	4-5 часов, быстрая зарядка за 3 часа
Параметры:	W106×D106×H220mm/4.17×4.17×8.66inch
Вес:	930g/0.93kg/2.05lb/32.8 oz

CONQUEROR

蓝牙音箱

使用说明书

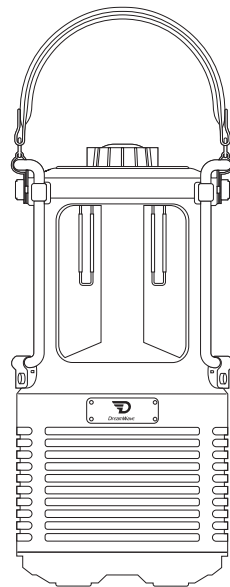

Patent: 202430017132X

Designed in California, Assembled in P.R.C



DreamWave Technologies LLC

269 Woodruff Way Milpitas, CA 95035

www.godreamwave.com

info@godreamwave.com




Godreamwave



目录

内含物件	01
顶部旋钮/按键说明	02
背面端口说明	03
打开/关闭CONQUEROR	04
通过Bluetooth连接 (蓝牙配对)	05
通过LINE IN输入接口连接	06
给音箱充电	06
调节低音/高音EQ	07
照明灯开关/模式切换/亮度调节	08
待机模式	09
TWS双重配对模式	09-10
使用音箱为设备充电	11
技术信息	12
故障排除	13

内含物件

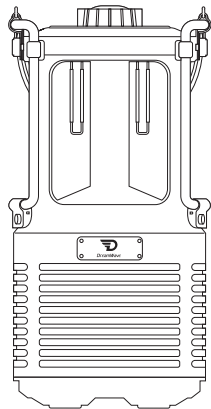


· CONQUEROR/征服者
便携式露营灯音箱*1



· 可拆卸手提带*1




· M4螺丝*2
(手提带组装用)



· 使用说明书*1



· 保修卡*1




· Type-C电源线*1



· 3.5mm音频线*1

顶部旋钮/按键说明

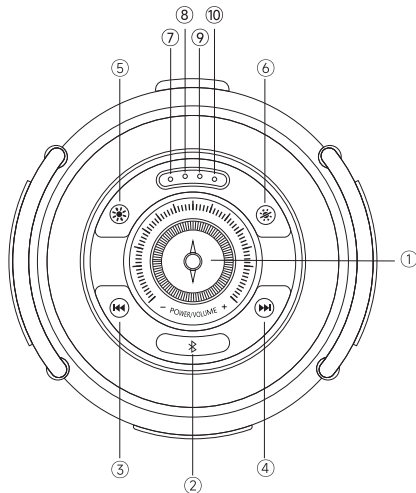

① 音箱电源开关/总音量旋钮

② Bluetooth蓝牙按键

③ 上一曲

④ 下一曲

⑤ 灯电源开关/灯模式切换


⑥ 灯亮度调节

⑦ 充电指示灯 (红色)

⑧ TWS配对/EQ调节指示灯 (白色)


⑨ LINE IN输入/低电量指示灯 (红色)

⑩ 蓝牙指示灯 (蓝色)

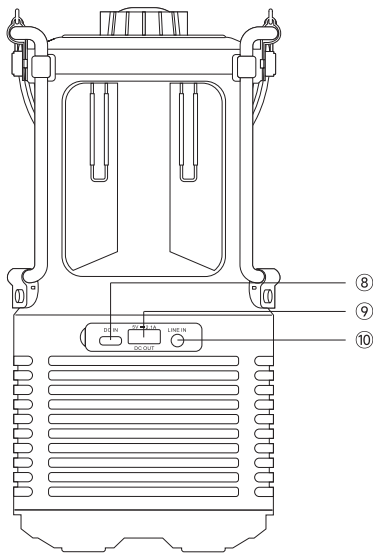


- ⑧ Type-C电源充电输入
- ⑨ 5V,2.1A电源输出
- ⑩ 3.5mm接口Aux音频输入

使用【音箱电源/总音量旋钮】可以打开和关闭CONQUEROR。




向下长按【音箱电源/总音量旋钮】3秒, 音箱随即开启;
再次向下长按【音箱电源/总音量旋钮】3秒, 音箱随即关闭。

音量调节



以顺时针方向转动旋钮,
音量加大。



以逆时针方向转动旋钮,
音量减小。

注意: 在使用音箱之前确保音箱和音源的音量调低。

通过Bluetooth连接（蓝牙配对）


① 通过向下长按【音箱电源/总音量旋钮】3秒打开CONQUEROR, 音箱自动进入蓝牙配对模式, 蓝牙指示灯显示蓝灯快闪。

② 打开您设备（智能手机、电脑、平板电脑）上的蓝牙开关, 搜索并从列表中点击【Conqueror】进行配对。

（备注：若是（iOS5.0及以上系统）iPhone设备，配对完成后可通过手机通知面板端查看音箱电量情况。）

③ 当蓝牙连接成功时, 蓝牙指示灯显示蓝灯常亮。

④ 若要断开当前设备的蓝牙连接, 可以长按【蓝牙键】3秒重新进行蓝牙配对模式来连接其他设备。

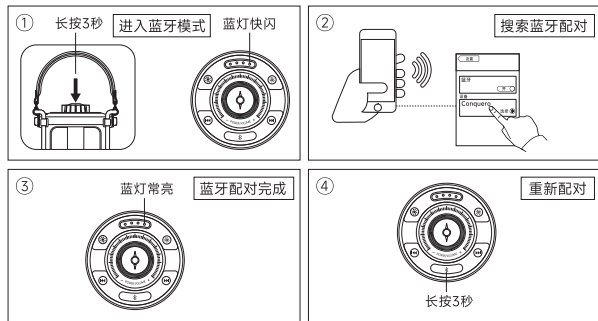


通过 LINE IN输入接口连接

① 使用音箱配件中的3.5mm音频线接入音箱背面显示【LINE IN】端口, 音频线另一端连接手机等音频设备的音频输出接口。

② 完成连接后, LED指示灯显示红灯常亮。

（注：通过音频线连接音频设备播放, 音箱系统将自动断开蓝牙连接播放。）


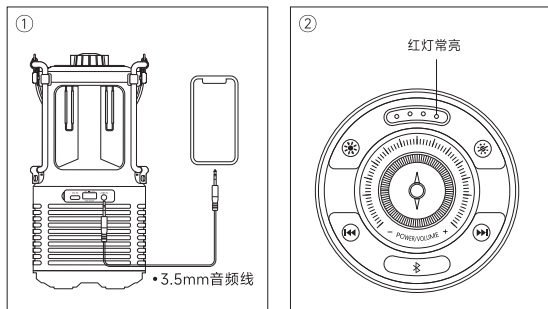


使用音箱为设备充电


- CONQUEROR音箱有9,600mAh内置电池, 可使用音箱背面的DC OUT(5V,2.1A)端口为您的手机、平板电脑或其他兼容设备充电。
- 为外接设备充电, 需要把CONQUEROR音箱打开或打开照明灯, 并确保音箱的电量不低于20%。
- 当电池低电量时, 音箱会自动关闭电源。

调节低音/高音EQ

- ① 向下点按【音箱电源/总音量旋钮】进入低音EQ模式，LED灯显示白灯慢闪；顺时针转动旋钮，低音加大；逆时针转动旋钮，低音减小。
- ② 再次向下点按【音箱电源/总音量旋钮】进入高音EQ模式，LED灯显示白灯快闪；顺时针转动旋钮，高音加大；逆时针转动旋钮，高音减小。

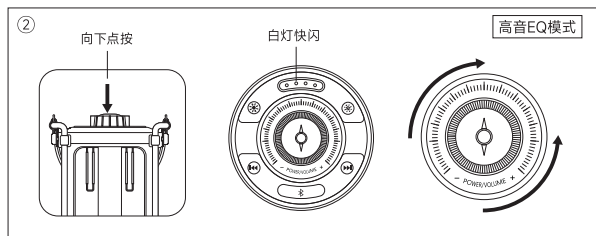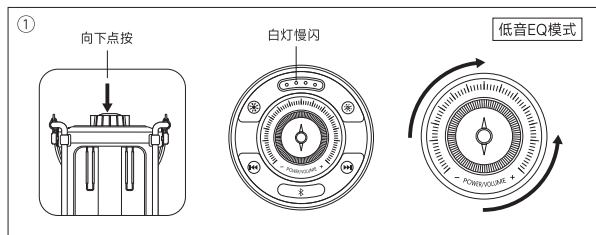

照明灯开关/模式切换/亮度调节

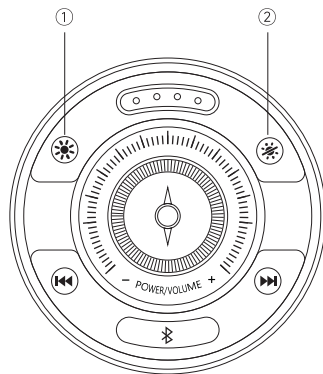

① 照明灯开关/模式切换复合键

- 长按3秒 打开/关闭照明灯。
- 点按 进入灯光模式切换。

灯光模式变换顺序：

橙光灯常亮模式 → 暖白灯常亮模式 → 橙光+暖白同时常亮模式 → 音乐播放自动灯闪模式 → SOS紧急求救信号模式（国际通用三短三长三短开关灯模式）

② 灯光亮度调节键

- 点按 调节5档光亮度

待机模式

如果30分钟未使用CONQUEROR播放音乐, 音箱会自动关机。

(注: 音乐播放的待机模式不影响照明灯使用, 照明灯只有在音箱本身低电量情况下才会自动关机。)

TWS双重配对模式


想要体验最佳的音效, 可通过蓝牙进行双重配对模式, 同时连接两台CONQUEROR形成左右立体声播放。

在启动TWS双重配对操作前, 需要**确保两台CONQUEROR需断开和所有设备的连接**。操作步骤如下:

主机: CONQUEROR -A 副机: CONQUEROR -B


步骤 ①

向下长按3秒CONQUEROR -A电源旋钮键自动开机进入蓝牙配对模式, 确保使用蓝牙连接的手机等通讯设备关闭所有音乐播放器, 通讯设备打开搜索蓝牙“Conqueror”并进行连接。

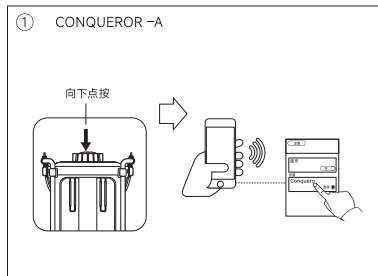


步骤 ②

双击CONQUEROR -A的蓝牙键, LED灯显示白色灯快闪。

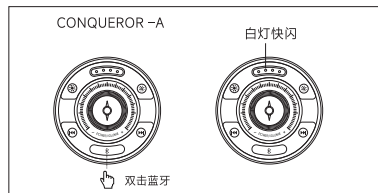


步骤 ③

双击CONQUEROR -B的蓝牙键, LED灯显示白色灯快闪。

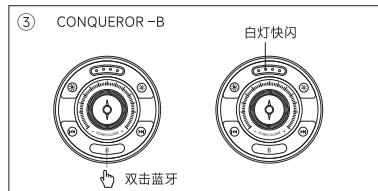

步骤 ④

CONQUEROR-A和CONQUEROR-B自动完成TWS配对形成左右声道。主机A的LED灯显示蓝白灯常亮, 副机B的LED灯显示白灯常亮。

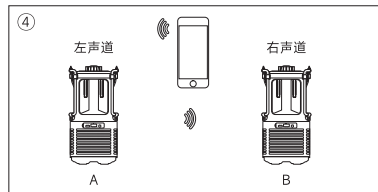



补充事项:

1. 在TWS双重配对模式下, 长按3秒任意一台CONQUEROR-A或CONQUEROR -B, 两台CONQUEROR会同时关闭。
2. 两台CONQUEROR完成TWS双重配对后, 下次两台CONQUEROR开机后会自动进入TWS双重配对模式。


给音箱充电

① 使用配备的Type-C电源线连接适配器插入DC IN插口给音箱充电。支持快充，并兼容大部分QC和PD适配器。


(注：适配器需使用正规的5V, 2A以上规格，产品不附带)

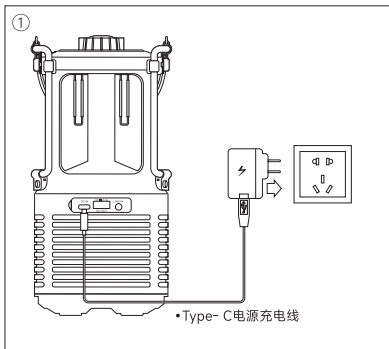

② 当音箱低电量时，充电指示灯显示红灯慢闪。(正常电量下无指示灯闪)



③ 充电状态中，充电指示灯显示红灯常亮



④ 充满电时，充电指示灯显示红灯熄灭。

技术信息

便携式露营灯立体声音箱

型号名: Conqueror 额定功率: 30瓦

喇叭规格

- 2寸全频扬声器× 2
- 无源辐射器× 2
- EQ功能: 2段音频EQ, 可调节高音和低音
- 信噪比: ≥78dB
- 频率响应: 55Hz-20KHz



连接方式

- **Bluetooth®**: Bluetooth 5.0+EDR, A2DP, AVRCP
- LINE IN: 3.5mm立体声插头



照明

- 灯丝 2700K
- LED灯 3000K
- 亮度: 10-300Lm



电池

- 电池类型: 内置可充电锂电池
- 电池容量: 9,600mAh
- 照明续航: 约14小时 (没有播放音乐, 最大亮度)
- 播放时间: 5~8小时 (没有开启照明)
- 充电时间: 4-5小时 (快充3小时)



电源

- 输入电源: 5-9V, Type-C
 - 输出电源: 5V, 2.1A, USB-A
- (选用5V/2A以上规格的电源适配器进行充电, 支持快充, 以及QC和PD适配器。)



产品

- 顶部注油指南针: 请勿将指南针倾斜使用, 请勿将指南针靠近金属物品或磁场使用
- 防水等级: IPX5
- 尺寸: W106×D106×H220mm
- 重量: 0.93kg



故障排除

问题	原因	操作建议
无法打开音箱	• 电池没电	将Type-C电源线连接电源适配器给音箱充电。长时间未使用音箱的情况下, 也需要1~2个月给音箱充一次电, 延长电池使用寿命。
音箱无反应	• 软件故障	• 关闭音箱后再重启音箱
没有声音	• 音源选择错误 • 连接的设备音源或音箱上的音量设置为最小音量	• 确保设备和音箱连接, 检查是否有其他设备连接音箱正在播放。 • 调大设备音源或音箱上的音量
声音失真/破音	• 源音频文件质量差 • 音源或是音箱音量设置过大	• 更换无损音乐 • 调小音源或是音箱上的音量
声音断续/ 蓝牙断开连接	• 设备与音箱距离太远, 或是受到中间障碍物的影响	• 设备距离音箱10米内, 不被墙壁或门隔开。
声音断续/ 音量变小	• 电池电量过低	• 将Type-C电源线连接电源适配器给音箱充电
无法连接或 配对蓝牙设备	• 音箱已连接其他设备 • 设备上蓝牙列表已配对的设备过多	• 长按蓝牙键断开连接, 重新配对。 • 清除蓝牙列表上已配对设备后, 再重新进行蓝牙搜索。



若仍存在问题, 可拨打官方售后电话或关注“君伍音响”官方公众号联系售后。
全国统一售后电话: 0755-29866692



Patent: 202430017132X
Designed in California, Assembled in P.R.C