

THANK YOU FOR YOUR PURCHASE.




DO NOT USE INFERIOR CARBON BATTERIES AS  
THEY MAY CAUSE ABNORMAL OPERATION!

Manufacturer: Yongkang Le Ban Pet Co., Ltd., Zhejiang Province

Company Address: No. 2, Building 1, Fengkang Small and Micro Enterprise Park,  
Xicheng Street, Yongkang City, Jinhua City, Zhejiang Province

MADE IN CHINA

## BUTTON MODEL OPERATING INSTRUCTIONS

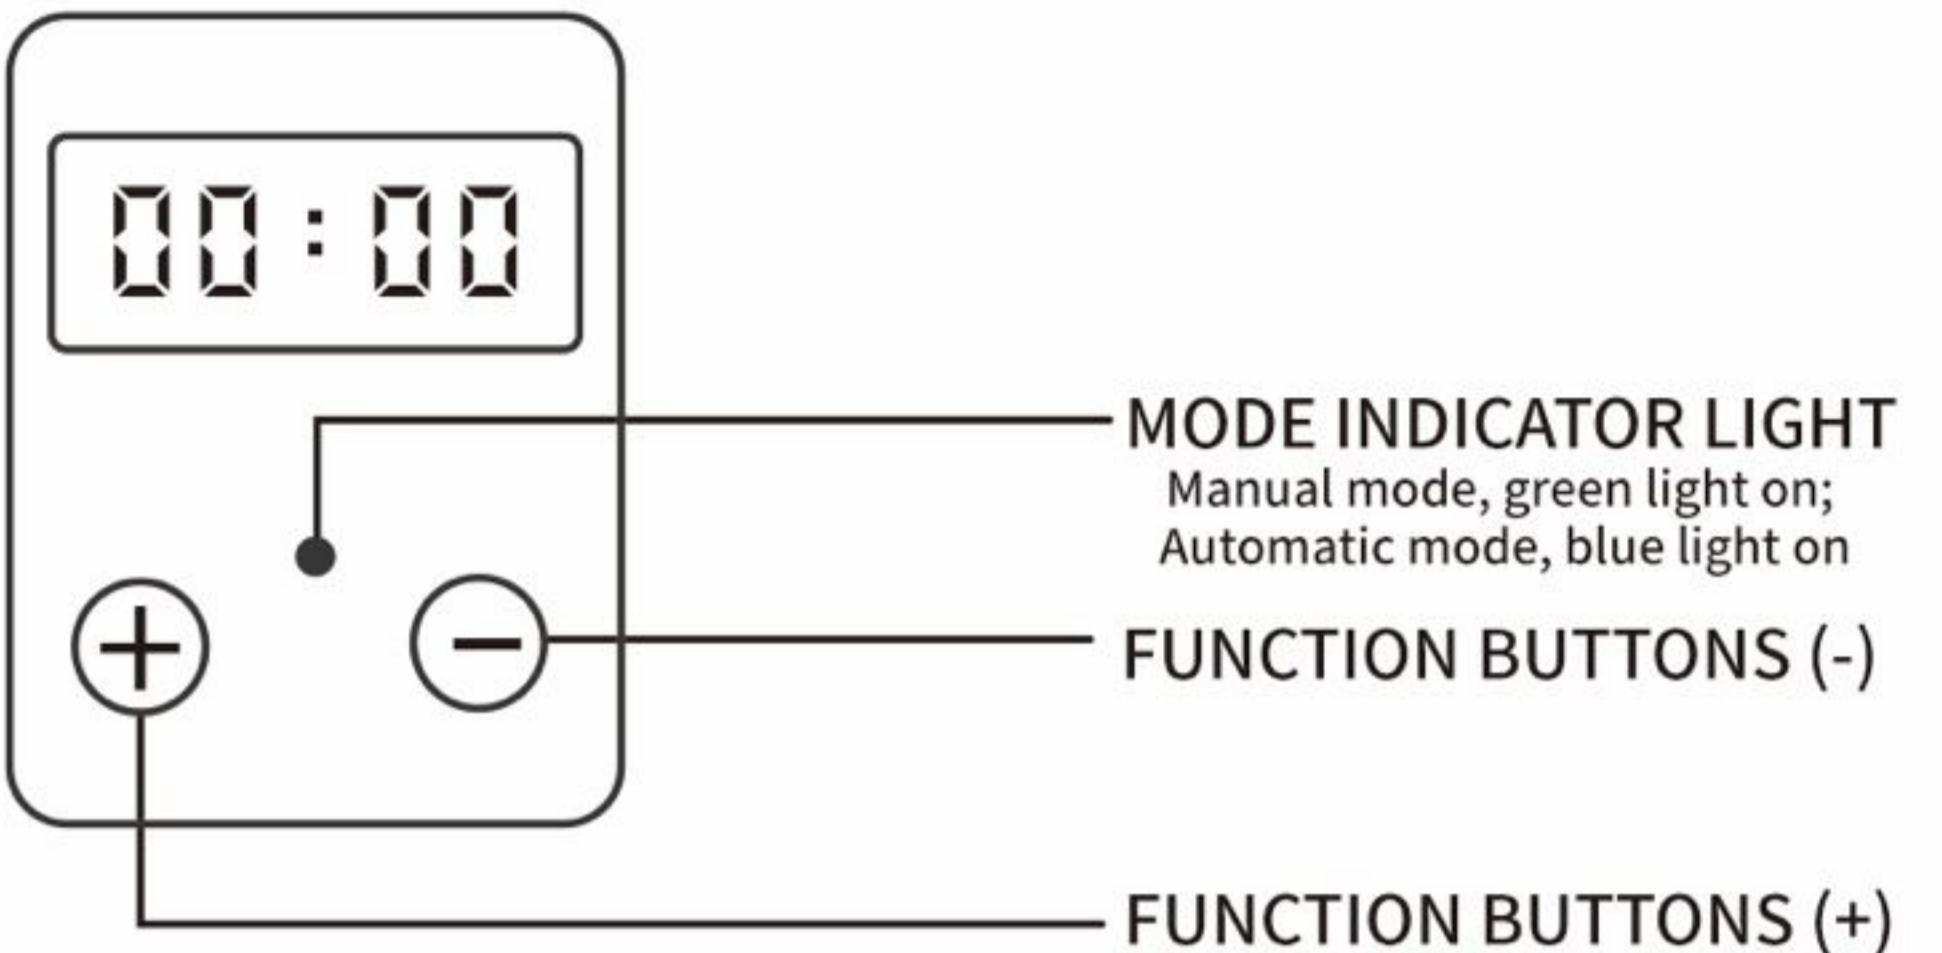

1. Open the battery compartment at the bottom and insert the batteries. Plug the power cord into the power socket. After connecting the power, the digital display will light up and show 00:00. (Please note: Use the power cord included with the product to avoid the risk of electric shock and fire. The battery compartment can hold 4 AA batteries, which must be provided by the user. Using dual power supply ensures the feeder continues to work in the event of a power outage.)

### 2. Set the current time

After powering on, the display will show 00:00. Press and hold the (+) and (-) buttons simultaneously for 2 seconds, and the digital screen numbers will flash, indicating you have entered the time setting mode. First, the hour digits (00) will flash. Press the (+) button to increase the value by 1, and press the (-) button to decrease the value by 1. Once you have selected the desired value, do not press any buttons, and the setting will be automatically saved. Next, the minute digits (00) will flash. Again, press the (+) button to increase the value by 1, and press the (-) button to decrease the value by 1. After selecting the desired value, do not press any buttons, and the numbers will flash 5 times before being automatically saved. The digital screen will then display the set time. The current time setting is now complete.

### 3. Scheduled Automatic Mode

For the standard clock version machine, you can set up to 6 automatic feedings per day. After setting the clock, press and hold the (-) button for 2 seconds, and the digital screen numbers will flash, indicating the start of the setting operation.

Step 1: The hour digits will flash. Press the (+) button to increase the value by 1, and press the (-) button to decrease the value by 1. Once you have selected the desired value, release the buttons, and the setting will be automatically saved, moving on to the next step.


Step 2: The minute digits will flash. Press the (+) button to increase the value by 1, and press the (-) button to decrease the value by 1. Once you have selected the desired value, release the buttons, and the setting will be automatically saved, moving on to the next step.

Step 3: Feeding quantity setting, the digital screen displays C1-\*, with the numbers flashing. Press the (+) button to increase the value by 1, and press the (-) button to decrease the value by 1, with options from 0 to 9. After selecting the desired value, release the buttons, and the setting will be automatically saved, moving on to the 2nd meal setting. A value of 0 means no feed is dispensed for this meal; values 1 to 9 represent 1 to 9 portions of feed, with 1 being the smallest portion and 9 being the largest. For example: setting C1-3 means dispensing 3 basic portions of feed at the 1st meal time, and setting C1-0 means no feed is dispensed at the 1st meal time; that is, no feed is given at this time. By performing the same operations, you can continue to set the parameters for the remaining 5 meals. After the 6th meal parameters are set, the digital screen returns to the normal time display, and the blue indicator light on the control panel remains on. The machine will operate in automatic mode according to the above settings of time and quantity, looping daily.

### 4. Manual Feeding

In any mode, pressing the (+) button once will dispense one unit of feed.

## SMART VERSION OPERATING INSTRUCTIONS

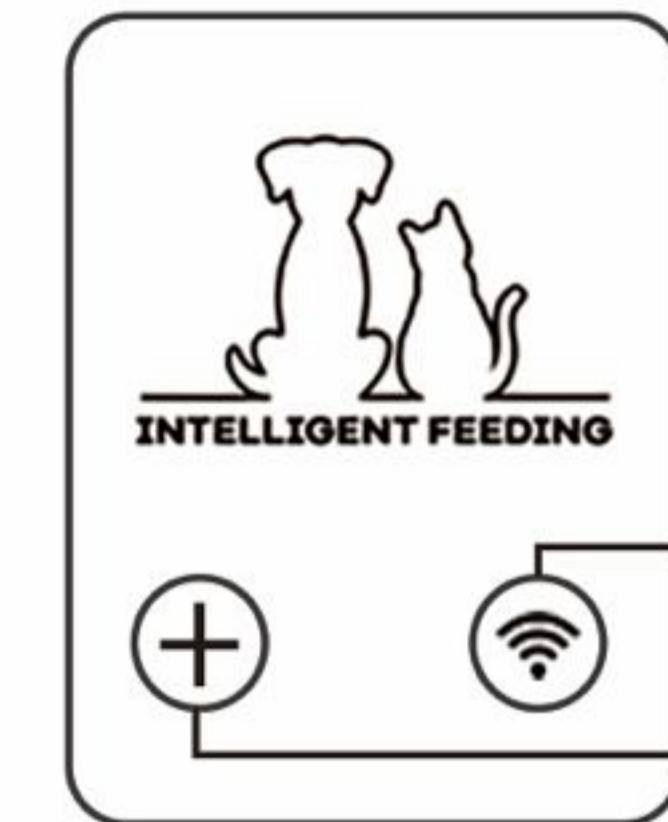

### DISTRIBUTION NETWORK INDICATOR LIGHT

The green light of the distribution network status is flashing, and the blue light is constantly on when the distribution network is successful

### FUNCTION BUTTONS (+)

1. Open the battery compartment at the bottom and insert the batteries. Plug the power cord into the power socket. After connecting the power, the digital display will light up and show 00:00. (Please note: Use the power cord included with the product to avoid the risk of electric shock and fire. The battery compartment can hold 4 AA batteries, which must be provided by the user. Using dual power supply ensures the feeder continues to work in the event of a power outage.)

### 2. Connect to the Mobile APP

First, scan the QR code on the right to download the "Smart Life" APP, register, and log in.

Click on "Add Device" and select to connect with the Smart Pet Feeder (During the first power-up, the indicator light will flash, indicating that it is networking; once networking is successful, the blue light will remain on. Press and hold the (+) button for 5 seconds to re-network if needed). After successful networking, ensure that the Wi-Fi account password is correct to use the device



Scan the QR code to download the Smart Life APP

### 3. Feeding Settings


After connecting to the APP, you can directly select the portion size and click the feeding button to dispense food, with a maximum of 12 portions per feeding;

Click on the scheduling button to set the timing and portion size for scheduled feedings;

Click on the feeding history button to view historical feeding records.


### 4. Manual Feeding

Regardless of whether the device is networked or not, pressing the (+) button will dispense one portion of food.

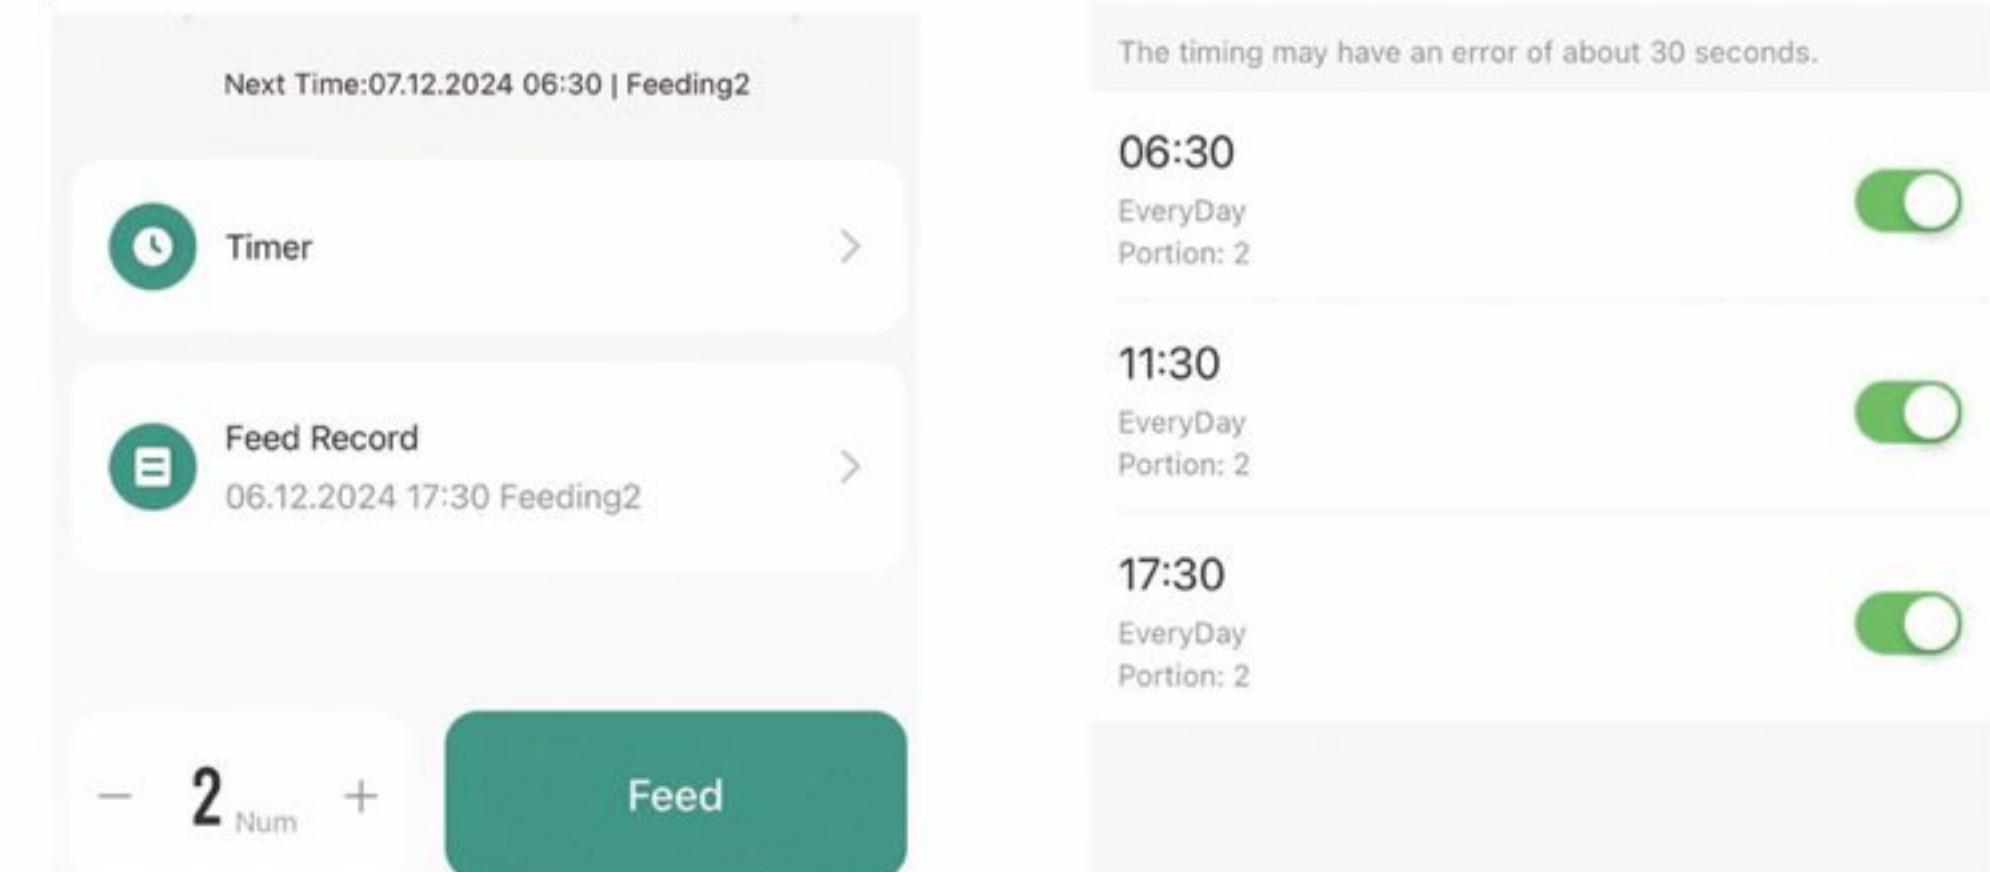

# INTELLIGENT FEEDER

## INSTRUCTION MANUAL

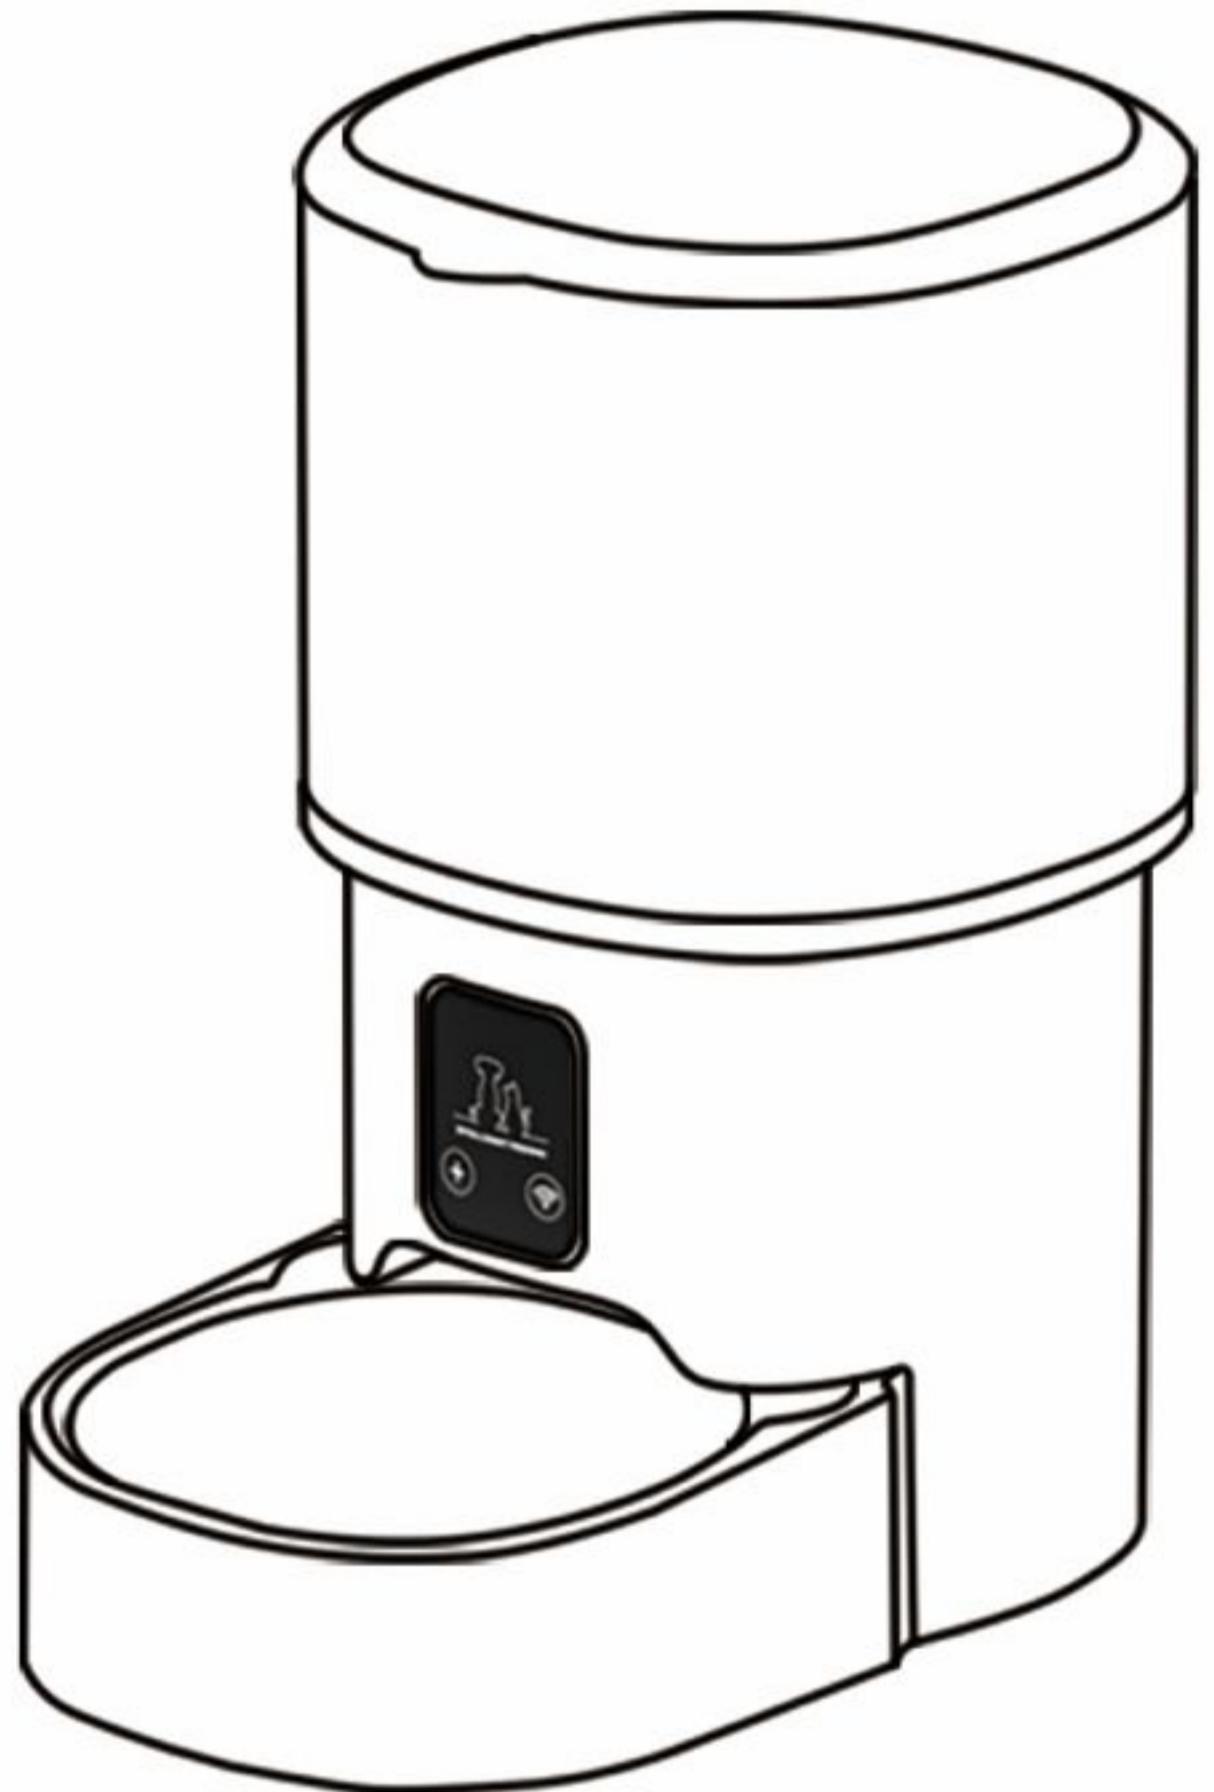


PLEASE READ THIS MANUAL CAREFULLY BEFORE USING THIS PRODUCT.

— PET CARE EXPERT —



### ACCESSORIES

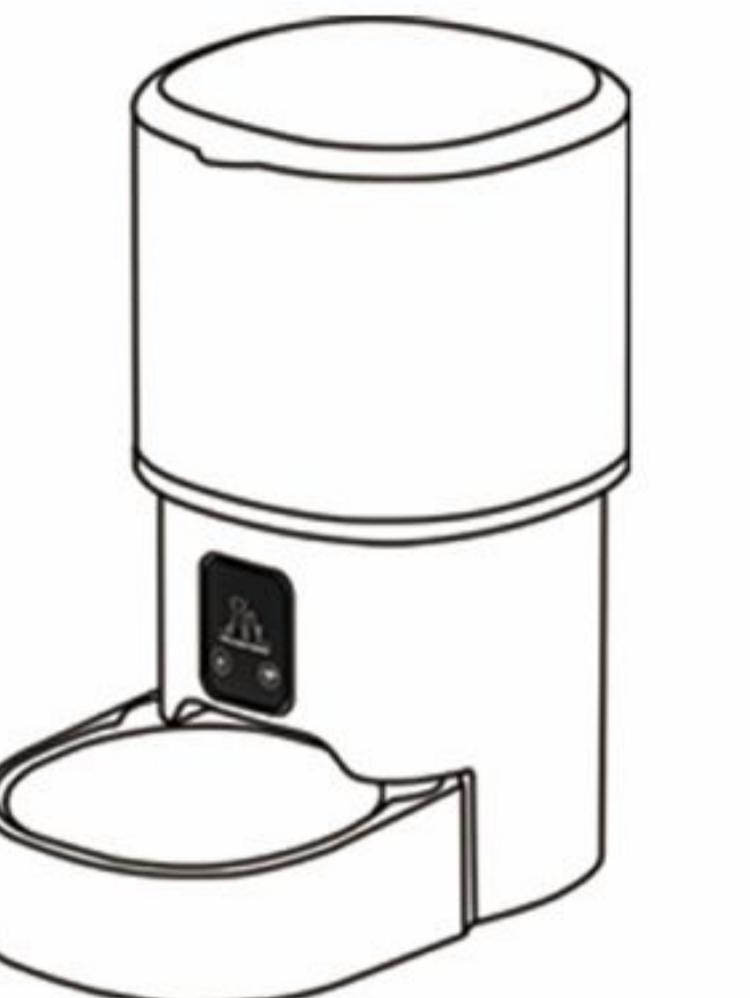

MAIN DEVICE



POWER CORD

### PRECAUTIONS

1. Please use this product in an indoor environment.
2. Please install and use the product according to the instruction manual.
3. Suitable for hard granulated food with a diameter of 16mm or less.
4. Children should use this product under the guidance of an adult.
5. Do not disassemble, deconstruct, modify, or add additional functions without authorization.
6. This product is in low voltage mode, but pets chewing on the power cord can still cause electrical leakage; please take precautions.
7. Ensure the machine is placed on a hard, level surface, otherwise it may cause the product to operate abnormally or spill.
8. This product is rated for 5V; do not connect any power accessories from other brands to this product to prevent accidents.
9. Please use dual power supply with battery backup; otherwise, power outages may affect the timing accuracy.

### DAILY CLEANING

1. Please do not place the pet automatic feeder in damp or sunny locations, as this may affect its normal operation.
2. The pet automatic feeder is only suitable for dry food; please do not place moist, perishable food in it.
3. If you find any faults or abnormalities with the pet automatic feeder, please stop using it immediately and contact after-sales service.
4. It is recommended to regularly replace the food to prevent spoilage or expiration.
5. If you need to be away from home for an extended period, ensure that the pet automatic feeder has enough food and ask a friend or neighbor to check the operation of the feeder regularly.
6. To maintain the hygiene of the pet automatic feeder, clean it at least once a week.
7. Clean the feeder's food storage compartment, feeding port, and surrounding area with warm water and a neutral detergent.
8. After thorough cleaning, wipe it dry with a clean cloth and place it in a ventilated area to air dry.

### WARRANTY

NAME	INTELLIGENT FEEDER	WARRANTY PERIOD
MODEL	LB-WS01	1 YEAR FROM THE DATE OF PURCHASE
PURCHASE DATE		

1. This product has undergone strict quality control and inspection during the manufacturing process.
2. If there are any quality issues with the product, returns and exchanges are accepted within 7 days from the date of purchase, and the body of the product is warranted for 1 year.
3. If the product requires repair after the warranty period, our company will provide appropriate and reasonable suggestions after inspecting the damaged product and will charge the corresponding repair costs.
4. At any time (including during the warranty period), if the following situations occur and require repair, corresponding repair costs must be paid:
  - Unauthorized repairs and modifications by parties other than our company, causing damage to the product's appearance and structure.
  - Improper use by the consumer, causing damage to the product's appearance and structure.
  - Damage to the product caused by force majeure events (such as fire, lightning, flood, pet chewing, etc.).

### PET FEEDER

### CERTIFICATE

PRODUCTION DATE: OCTOBER 2024

INSPECTOR: 01



## FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To satisfy FCC RF exposure requirements, a separation distance of 20cm or more should be maintained between the antenna of this device and persons during device operation. To ensure compliance, operations at closer than this distance is not recommended.