

TEST REPORT

Applicant: JiangXi MeiDong Technology Co., Ltd.
Address of Applicant: No. 1, Food Avenue, Jingshan Comprehensive District
Shanggao Prefecture Industri Yichun China
Manufacturer: JiangXi MeiDong Technology Co., Ltd.
Address of Manufacturer: No. 1, Food Avenue, Jingshan Comprehensive District
Shanggao Prefecture Industri Yichun China
Factory: JiangXi MeiDong Technology Co., Ltd.
Address of Factory: No. 1, Food Avenue, Jingshan Comprehensive District
Shanggao Prefecture Industri Yichun China

Equipment Under Test (EUT)

Product Name: Active Noise Cancelling Headphones
Model No.: SE8, SE8A, SE7, SE7MAX
Trade Mark:



FENSOL/ Silensys/ MOVSSOU/ PurelySound/ Synthphonics

FCC ID: 2A4ND-SE7-SE8
IC: 29076-SE7SE8
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-247, Issue 2, Feb. 2017
RSS-Gen, Issue 5, Amendment 2, Feb. 2021
Date of sample receipt: Mar. 04, 2023
Date of Test: Mar. 06, 2023~ Mar. 08, 2023
Date of report issued: Mar. 08, 2023
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Luo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	Mar. 08, 2023	Original

Prepared By:



Project Engineer

Date:

Mar. 08, 2023

Check By:



Reviewer

Date:

Mar. 08, 2023

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY	7
5.7 TEST LOCATION	7
5.8 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 CONDUCTED PEAK OUTPUT POWER	16
7.4 20dB EMISSION BANDWIDTH	20
7.5 CARRIER FREQUENCIES SEPARATION	24
7.6 HOPPING CHANNEL NUMBER	26
7.7 DWELL TIME	28
7.8 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS	36
7.8.1 Conducted Emission Method	36
7.8.2 Radiated Emission Method	46
8 TEST SETUP PHOTO	55
9 EUT CONSTRUCTIONAL DETAILS	55

4 Test Summary

Test Item	Standard(s) Section	Result
Antenna Requirement	FCC 15.203/15.247 (c) RSS-Gen 6.8	Pass
AC Power Line Conducted Emission	FCC 15.207 RSS-Gen 8.8	Pass
Conducted Peak Output Power	FCC15.247 (b)(1) RSS-247 5.1 (b) RSS-247 5.4 (b)	Pass
20dB Occupied Bandwidth	FCC15.247 (a)(1) RSS-247 5.1 (a) RSS-Gen 6.7	Pass
Carrier Frequencies Separation	FCC15.247 (a)(1) RSS-247 5.1 (b)	Pass
Hopping Channel Number	FCC15.247 (a)(1)(iii) RSS-247 5.1 (d)	Pass
Dwell Time	FCC15.247 (a)(1)(iii) RSS-247 5.1 (d)	Pass
Radiated Emission	FCC15.205/15.209 RSS-247 5.5	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013 and RSS-Gen.

Measurement Uncertainty

Test Item	Measurement Uncertainty	Notes
Radiated Emission	3.1dB(9kHz-30MHz)	(1)
Radiated Emission	3.8039dB(30MHz-200MHz)	(1)
Radiated Emission	3.9679dB(200MHz-1GHz)	(1)
Radiated Emission	4.29dB(1GHz-18GHz)	(1)
Radiated Emission	3.30dB(18GHz-40GHz)	(1)
AC Power Line Conducted Emission	3.44dB(0.15MHz ~ 30MHz)	(1)
Occupied Bandwidth	±3%	(1)
RF conducted power	±0.75dB	(1)
RF power density	±3dB	(1)
Conducted Spurious emissions	±2.58dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Active Noise Cancelling Headphones
Model No.:	SE8, SE8A, SE7, SE7MAX
Test Model No.:	SE8
Remark: They have the same circuit diagram, the only difference is the appearance structure and the key plate.	
Test sample(s) ID:	GTS2023030175-1
Sample(s) Status:	Engineer sample
S/N:	N/A
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Internal Antenna
Antenna gain:	0dBi
Power supply:	DC 5V from adapter or DC 3.7V from battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
-------------------	---

5.3 Description of Support Units

Support Equipment				
No.	Equipment	Manufacturer	Model Name	Remarks
1	Adapter	Canary	CAN100USAPTW	/
2	Mobile phone	Huawei	PCT-AL10	/

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC—Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● IC —Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).
--

5.7 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

5.8 Additional Instructions

Test Software	Special test software provided by manufacturer
Power level setup	Default

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 02, 2020	July 01, 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 22, 2022	April 21, 2023
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 21, 2022	March 20, 2023
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June 12, 2022	June 11, 2023
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 23, 2022	June 22, 2023
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	April 22, 2022	April 21, 2023
9	Coaxial Cable	GTS	N/A	GTS211	April 22, 2022	April 21, 2023
10	Coaxial cable	GTS	N/A	GTS210	April 22, 2022	April 21, 2023
11	Coaxial Cable	GTS	N/A	GTS212	April 22, 2022	April 21, 2023
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	April 22, 2022	April 21, 2023
13	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 23, 2022	June 22, 2023
14	Band filter	Amindeon	82346	GTS219	June 23, 2022	June 22, 2023
15	Power Meter	Anritsu	ML2495A	GTS540	June 23, 2022	June 22, 2023
16	Power Sensor	Anritsu	MA2411B	GTS541	June 23, 2022	June 22, 2023
17	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 22, 2022	April 21, 2023
18	Splitter	Agilent	11636B	GTS237	June 23, 2022	June 22, 2023
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
20	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 22, 2022	April 21, 2023
21	Breitband hornantenna	SCHWARZBECK	BBHA 9170	GTS579	Oct. 16, 2022	Oct. 15, 2023
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 16, 2022	Oct. 15, 2023
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 16, 2022	Oct. 15, 2023
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June 23, 2022	June 22, 2023
25	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 22, 2022	April 21, 2023

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May 14, 2022	May 13, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 24, 2022	April 23, 2023
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 23, 2022	June 22, 2023
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	April 22, 2022	April 21, 2023
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	JINCHUANG	GSP-8A	GTS639	April 28, 2022	April 27, 2023
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	April 15, 2022	April 14, 2023
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	April 22, 2022	April 21, 2023
10	High voltage probe	SCHWARZBECK	TK9420	GTS537	April 22, 2022	April 21, 2023

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 22, 2022	April 21, 2023
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 22, 2022	April 21, 2023
3	Spectrum Analyzer	KEYSIGHT	N9010A-44	MY51440158	April 22, 2022	April 21, 2023
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 22, 2022	April 21, 2023
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 22, 2022	April 21, 2023
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 22, 2022	April 21, 2023
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 22, 2022	April 21, 2023
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 22, 2022	April 21, 2023

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	April 25, 2022	April 24, 2023
2	Barometer	KUMAO	SF132	GTS647	July 26, 2022	July 25, 2023

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
Standard requirement:	RSS-Gen Section 6.8
<p>A transmitter can only be sold or operated with antennas with which it was approved. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power</p>	
E.U.T Antenna:	
<i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi, reference to the appendix II for details</i>	

7.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207 & RSS-Gen 8.8					
Test Method:	ANSI C63.10:2013 and RSS-Gen					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak	Average		
	0.15-0.5		66 to 56*	56 to 46*		
	0.5-5		56	46		
5-30		60	50			
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:


Pre-scan all test modes, found worst case at GFSK 2402MHz, and so only show the test result of it

For SE8

Line:

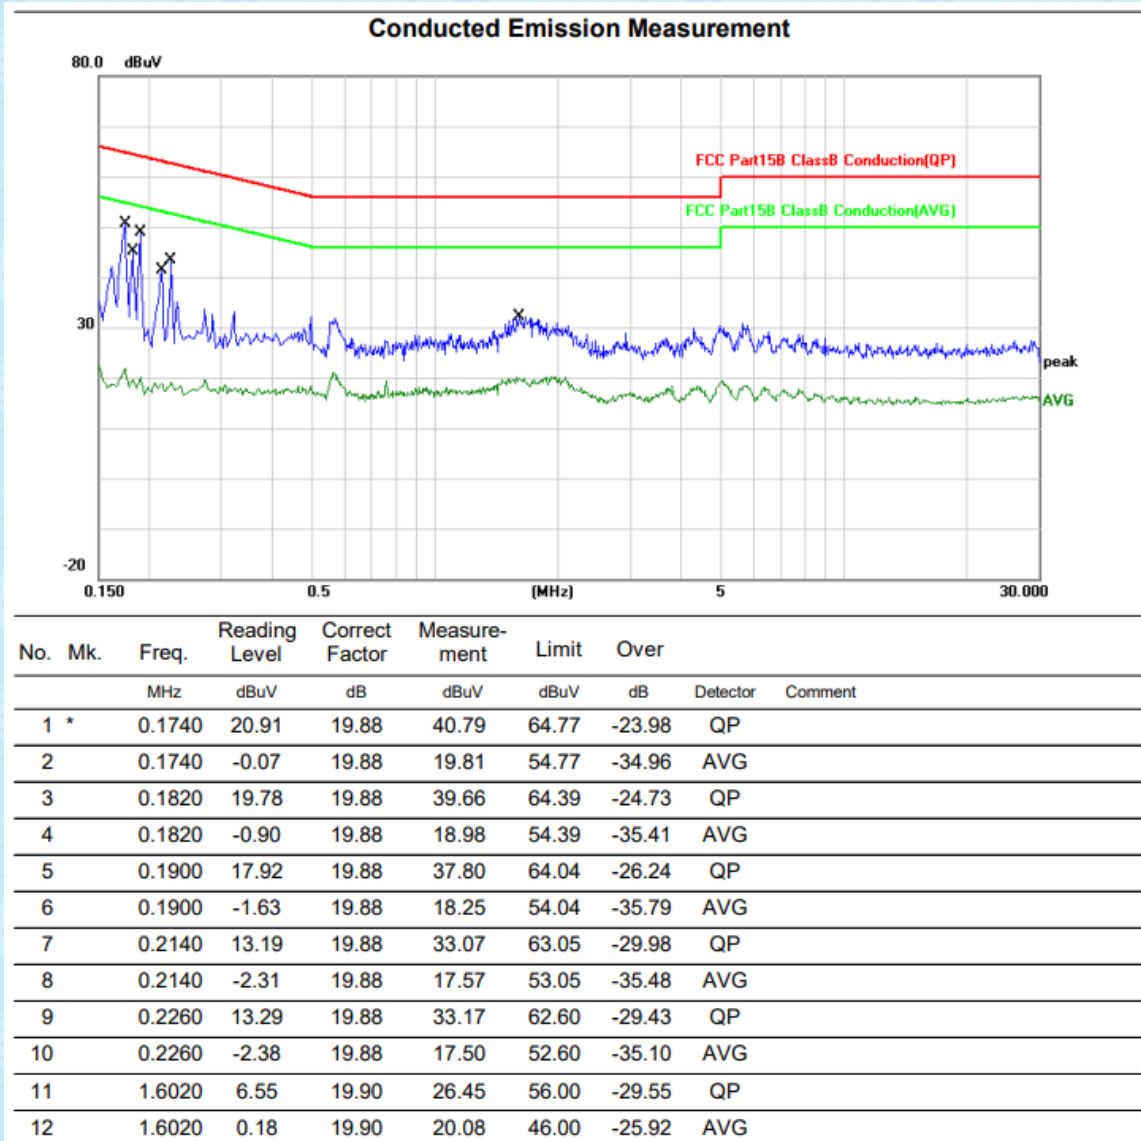


Neutral:

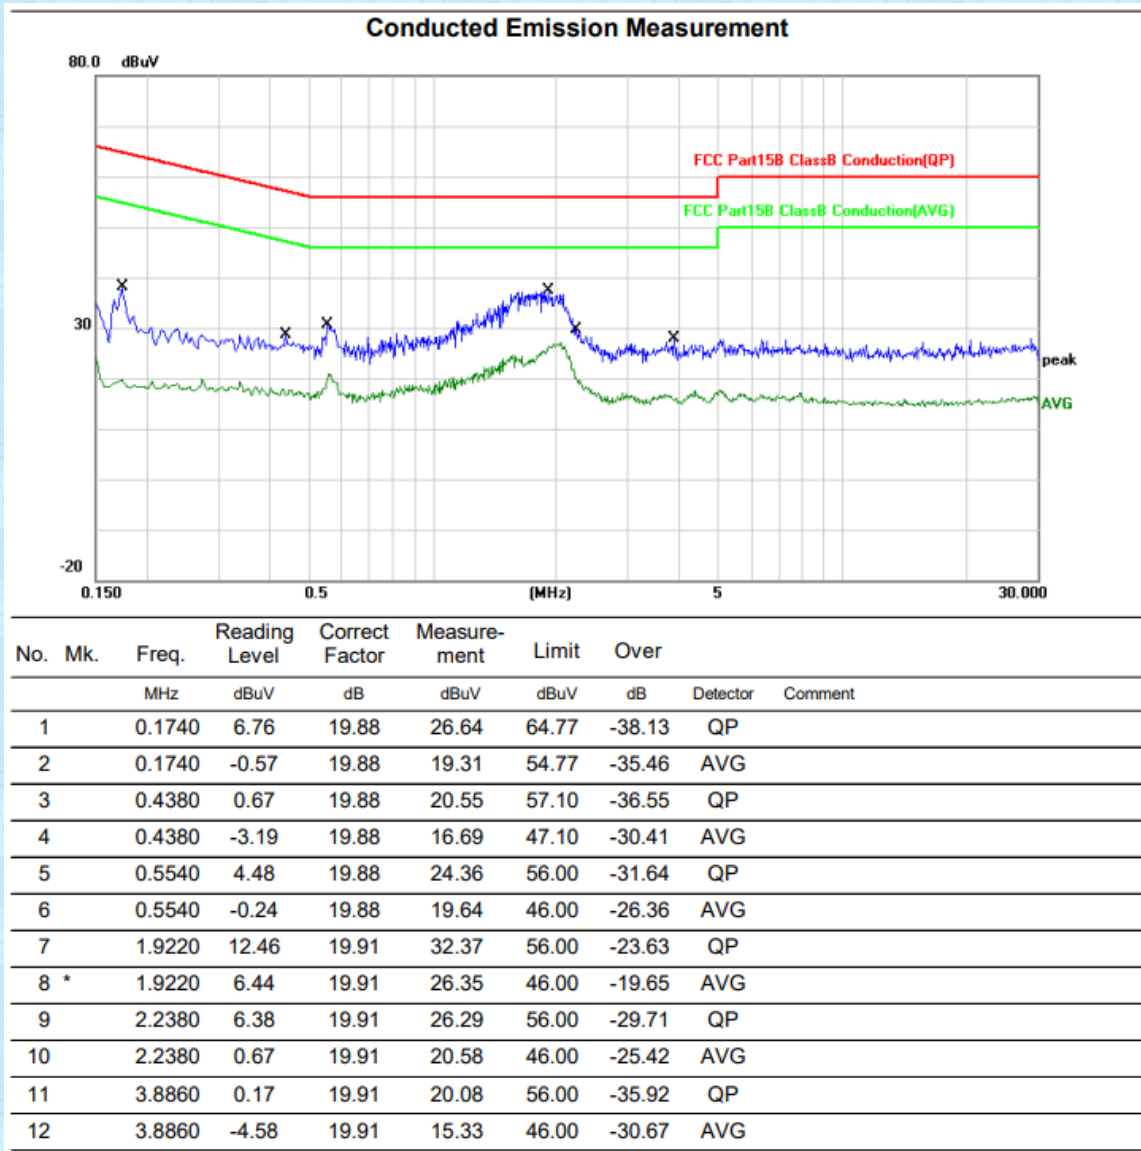


For SE7

Line:

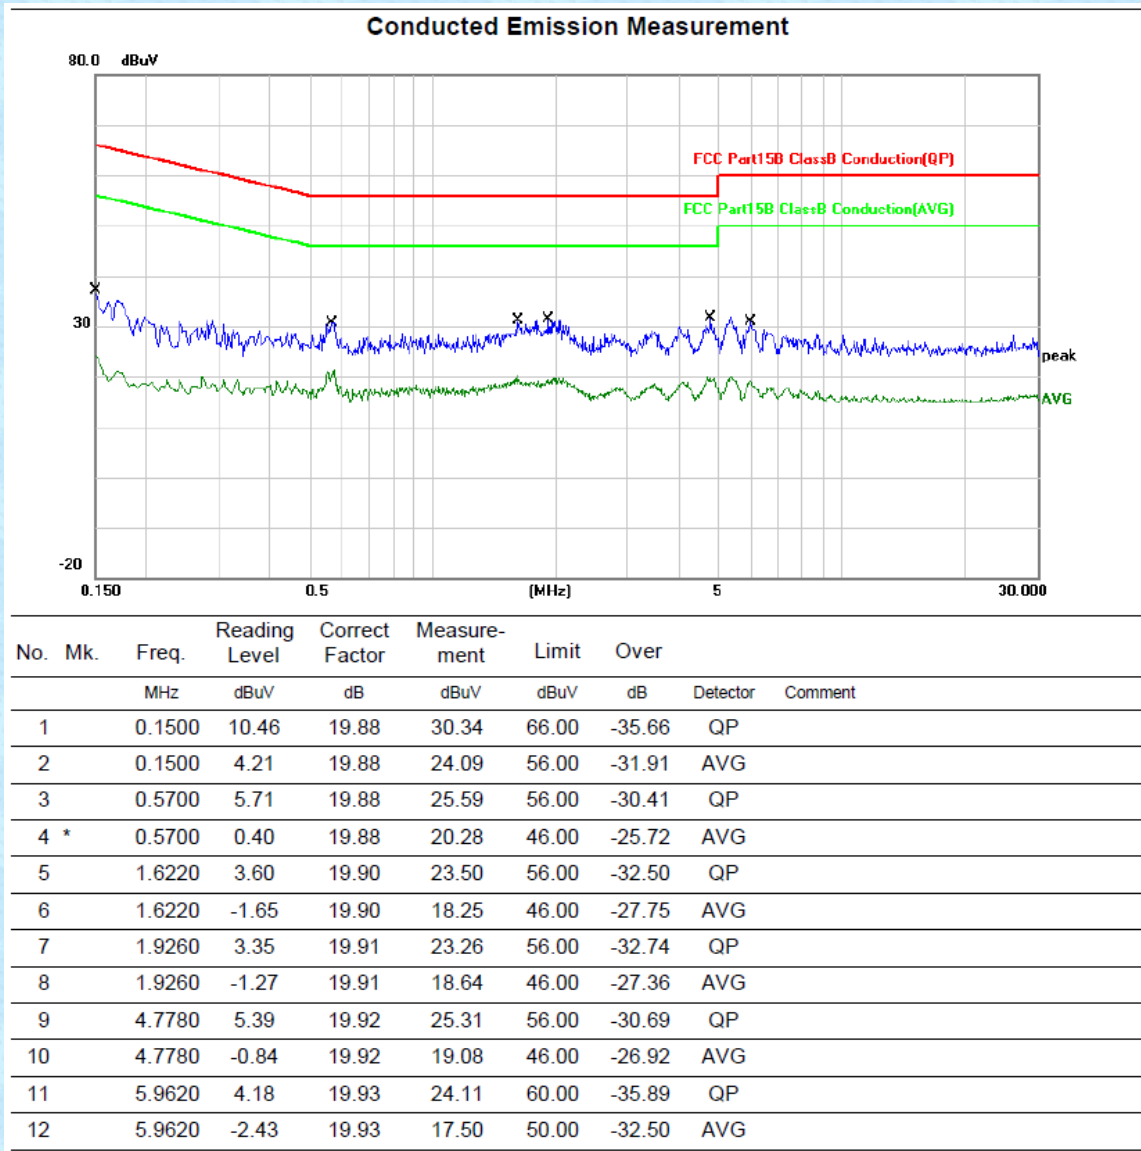


Neutral:

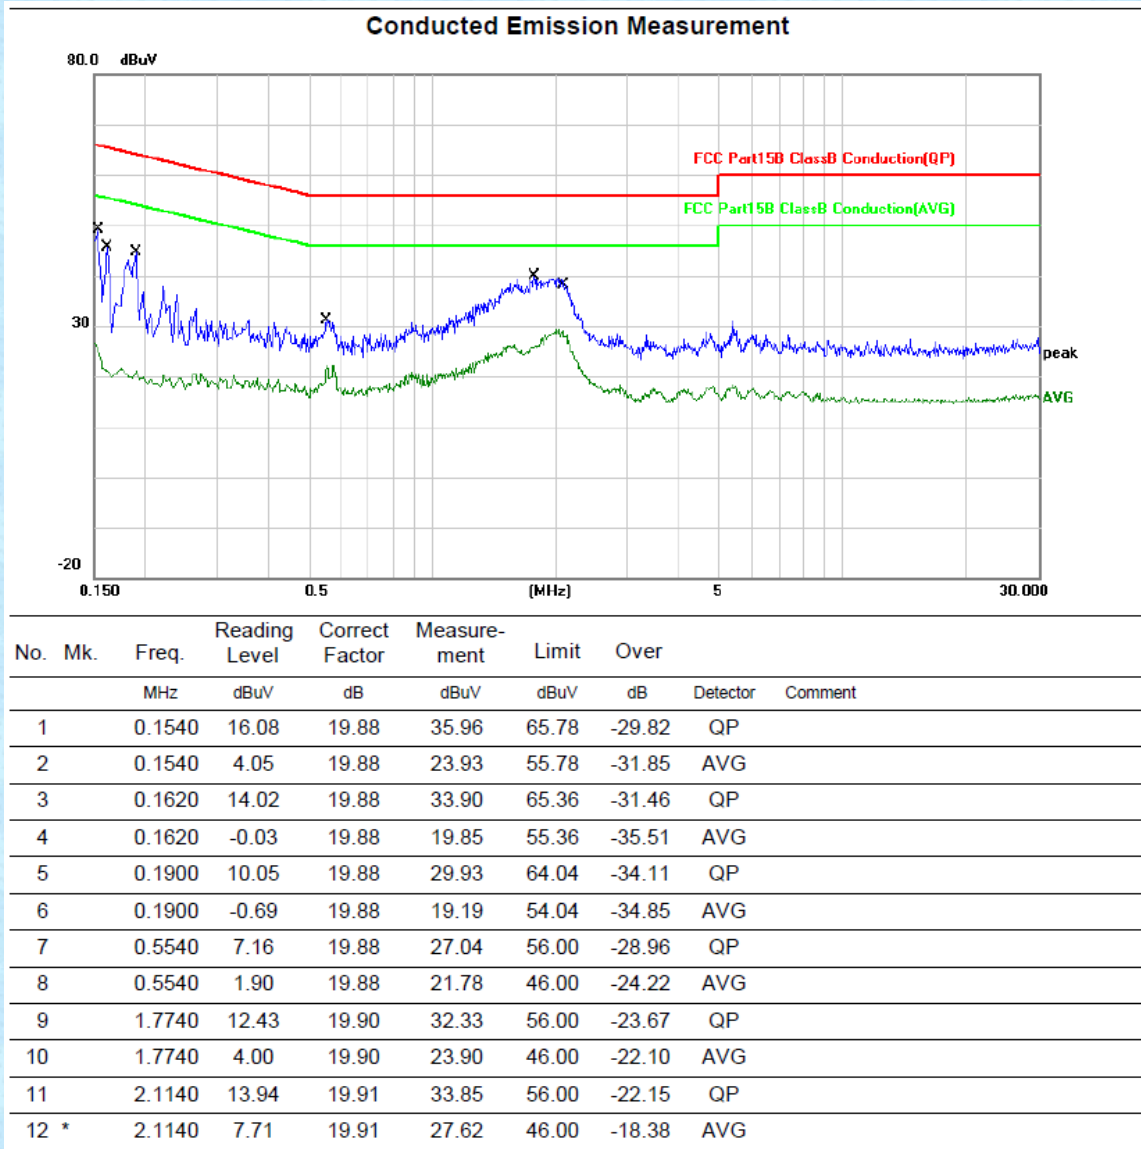

Notes:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

7.3 Conducted Peak Output Power

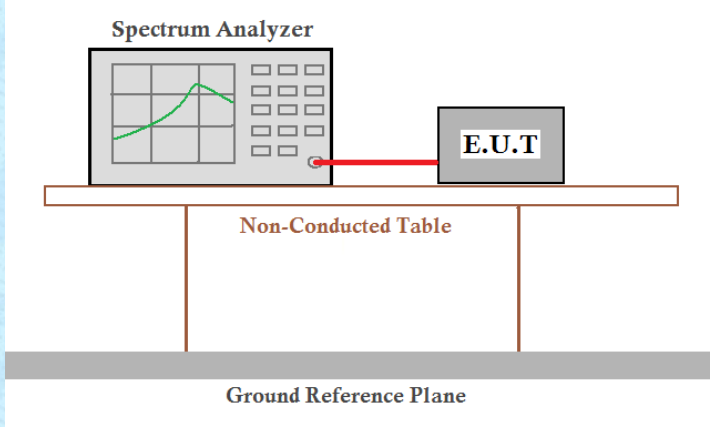
Test Requirement:	FCC Part15 C Section 15.247 (b)(1) & RSS-247 5.1 (b) & RSS-247 5.4 (b)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Limit:	20.97dBm 36.02dBm(4W for e.i.r.p.)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	e.i.r.p. (dBm)	e.i.r.p. limit (dBm)	Result
GFSK	Lowest	3.46	20.97	3.46	36.02	Pass
	Middle	3.19		3.19		
	Highest	2.81		2.81		
$\pi/4$ -DQPSK	Lowest	3.42	20.97	3.42	36.02	Pass
	Middle	3.00		3.00		
	Highest	2.64		2.64		
8-DPSK	Lowest	3.32	20.97	3.32	36.02	Pass
	Middle	3.08		3.08		
	Highest	2.70		2.70		

Test plot as follows:

Test mode:	GFSK mode
------------	-----------

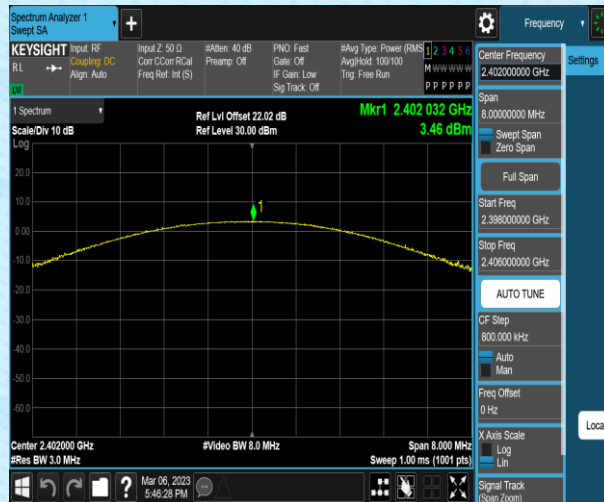

Lowest channel

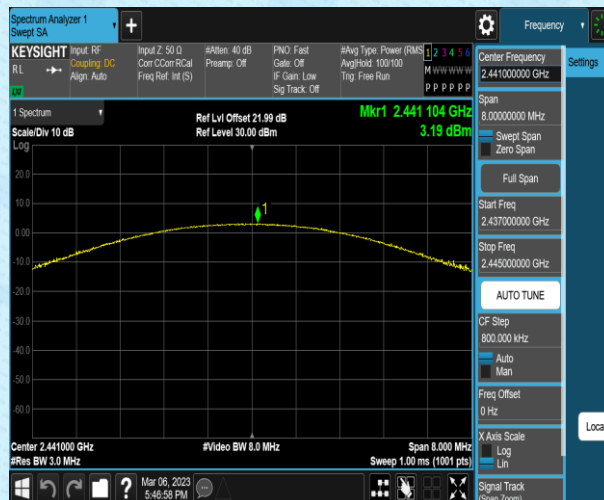


Middle channel




Highest channel

Test mode: $\pi/4$ -DQPSK mode

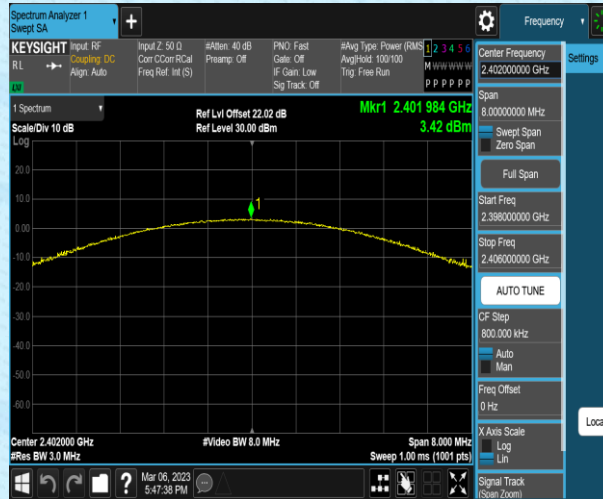

Lowest channel

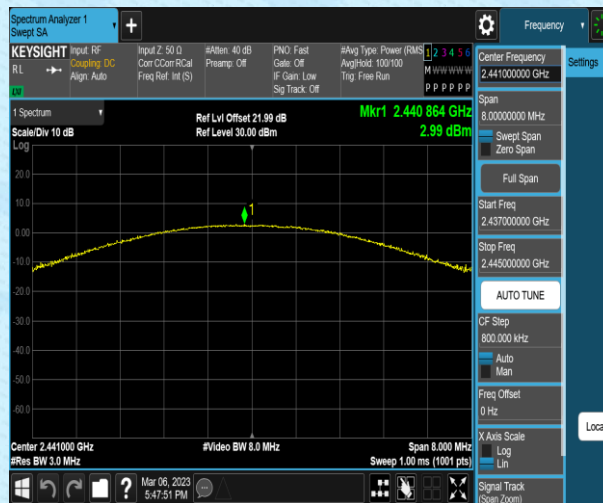

Middle channel



Highest channel


Test mode: 8-DPSK mode



Lowest channel




Middle channel

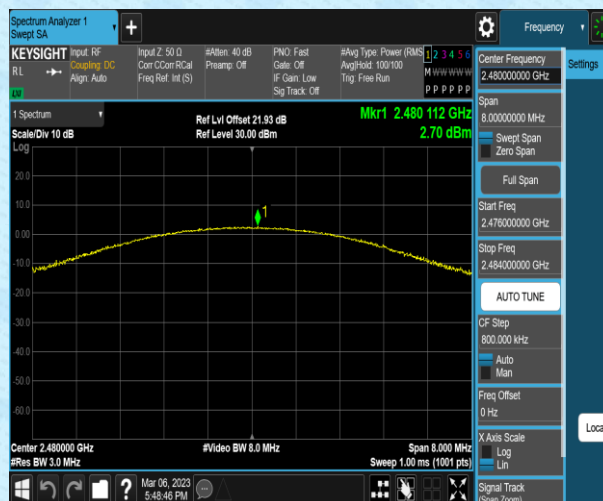

Highest channel

7.4 20dB Emission Bandwidth

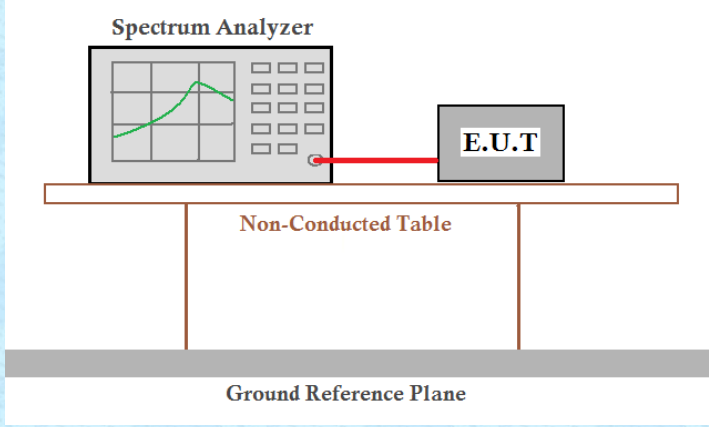Test Requirement:	FCC Part15 C Section 15.247 (a)(1) & RSS-247 5.1 (a)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Limit:	N/A
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	0.963	Pass
	Middle	1.107	
	Highest	0.963	
$\pi/4$ -DQPSK	Lowest	1.266	Pass
	Middle	1.248	
	Highest	1.278	
8-DPSK	Lowest	1.266	Pass
	Middle	1.287	
	Highest	1.278	

Test mode: GFSK mode



Lowest channel



Middle channel



Highest channel

Test mode: $\pi/4$ -DQPSK mode



Lowest channel



Middle channel



Highest channel

Test mode: 8-DPSK mode



Lowest channel




Middle channel



Highest channel

7.5 Carrier Frequencies Separation

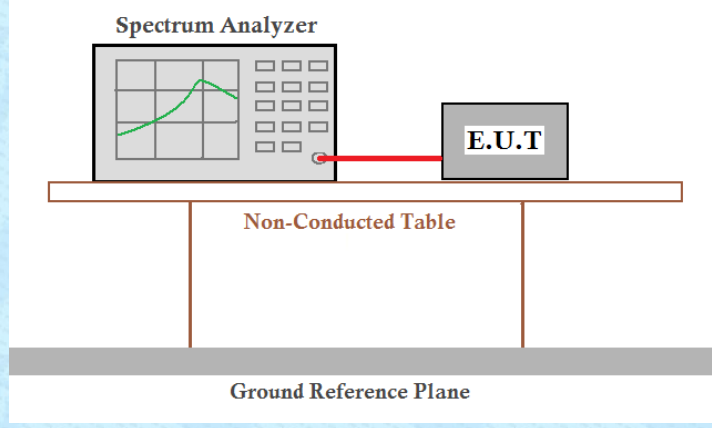Test Requirement:	FCC Part15 C Section 15.247 (a)(1) & RSS-247 5.1 (b)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Receiver setup:	RBW=300KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
GFSK	Hop	1180	738	Pass
$\pi/4$ -DQPSK	Hop	1152	852	Pass
8-DPSK	Hop	1186	858	Pass

Note: According to section 7.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	1107	738
$\pi/4$ -DQPSK	1278	852
8-DPSK	1287	858

Test plot as follows:


Modulation mode: **GFSK**

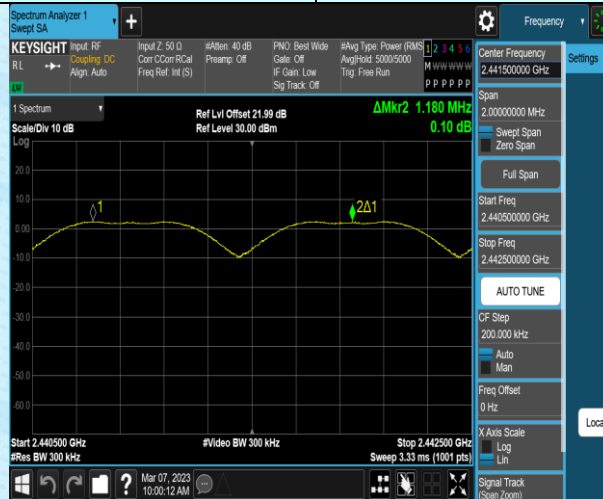


Test mode: **$\pi/4$ -DQPSK**



Test mode: **8-DPSK**

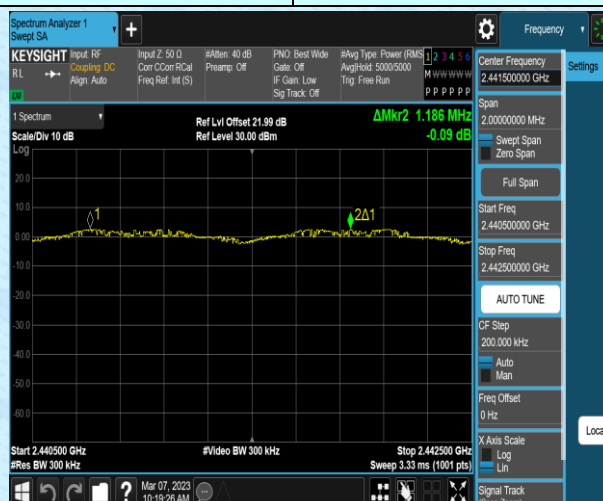

7.6 Hopping Channel Number

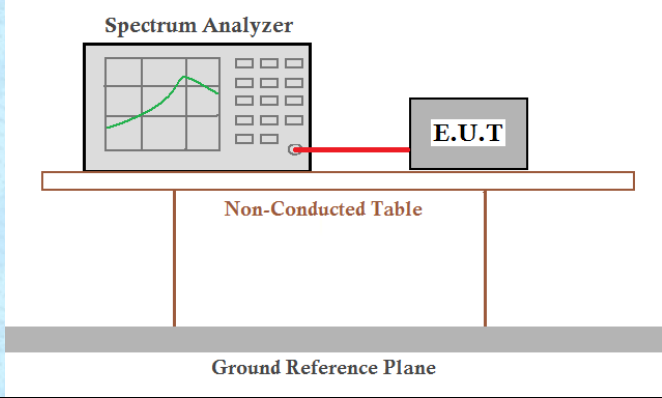
Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii) & RSS-247 5.1 (d)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Receiver setup:	RBW=VBW=300kHz, Frequency range=2398MHz-2485.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 <p>The diagram shows a Spectrum Analyzer on the left and an E.U.T. on the right, connected by a red cable. They are both on a table labeled 'Non-Conducted Table'. Below the table is a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Mode	Hopping channel numbers	Limit	Result
GFSK	79	15	Pass
$\pi/4$ -DQPSK	79	15	Pass
8-DPSK	79	15	Pass

Test plot as follows:


Test mode: GFSK

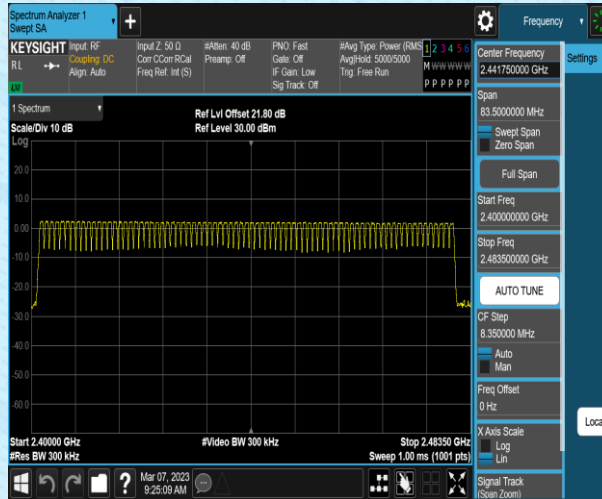


Test mode: $\pi/4$ -DQPSK

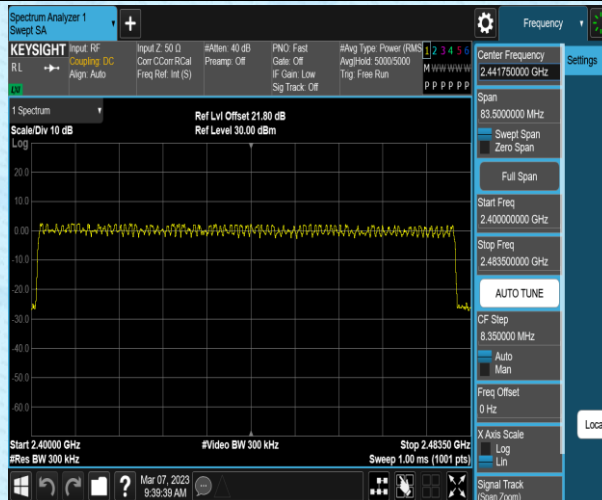

Test mode: 8-DPSK

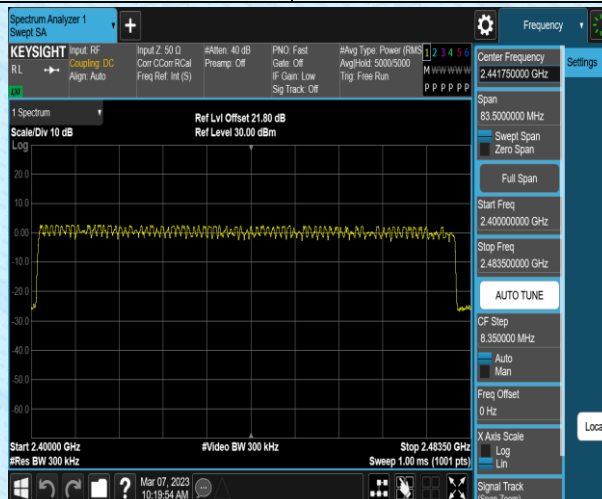

7.7 Dwell Time

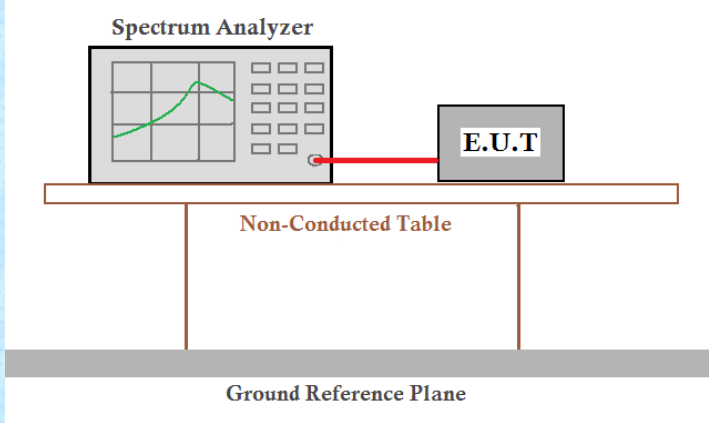Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii) & RSS-247 5.1 (d)
Test Method:	ANSI C63.10:2013 and RSS-Gen
Receiver setup:	RBW=VBW=0.91MHz, Span=0Hz, Detector=Peak RBW=VBW=100kHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass