



| Passive Test For 902-928 |             |              |               |               |            |             |             |             |                     |                    |              |              |
|--------------------------|-------------|--------------|---------------|---------------|------------|-------------|-------------|-------------|---------------------|--------------------|--------------|--------------|
| Freq<br>(MHz)            | Effi<br>(%) | Effi<br>(dB) | Gain<br>(dBi) | Gain<br>(dBd) | UHS<br>(%) | DHIS<br>(%) | Max<br>(dB) | Min<br>(dB) | irectivity<br>(dBi) | Beamwidth<br>(3dB) | AttH<br>(dB) | AttV<br>(dB) |
| 902                      | 47.73       | -3.21        | 0.5           | -1.65         | 21.223     | 26.503      | 0.5         | -10.14      | 3.71                | 60                 | 43.21        | 42.96        |
| 904                      | 49.41       | -3.06        | 0.77          | -1.38         | 21.449     | 27.963      | 0.77        | -10.63      | 3.83                | 60                 | 43.22        | 42.97        |
| 906                      | 50.86       | -2.94        | 0.97          | -1.18         | 21.648     | 29.217      | 0.97        | -11.02      | 3.91                | 60                 | 43.24        | 42.98        |
| 908                      | 52.06       | -2.84        | 1.11          | -1.04         | 21.782     | 30.277      | 1.11        | -11.28      | 3.94                | 60                 | 43.26        | 42.99        |
| 910                      | 53.1        | -2.75        | 1.21          | -0.94         | 21.889     | 31.213      | 1.21        | -11.4       | 3.96                | 60                 | 43.29        | 42.99        |
| 912                      | 53.44       | -2.72        | 1.22          | -0.93         | 21.729     | 31.711      | 1.22        | -11.37      | 3.94                | 60                 | 43.28        | 42.97        |
| 914                      | 53.26       | -2.74        | 1.18          | -0.97         | 21.374     | 31.889      | 1.18        | -11.26      | 3.92                | 60                 | 43.26        | 42.94        |
| 916                      | 52.92       | -2.76        | 1.1           | -1.05         | 20.961     | 31.961      | 1.1         | -10.98      | 3.86                | 60                 | 43.26        | 42.94        |
| 918                      | 52.82       | -2.77        | 1.02          | -1.13         | 20.697     | 32.125      | 1.02        | -10.59      | 3.79                | 60                 | 43.27        | 42.96        |
| 920                      | 52.99       | -2.76        | 0.96          | -1.19         | 20.642     | 32.343      | 0.96        | -10.23      | 3.72                | 60                 | 43.28        | 42.98        |
| 922                      | 53.2        | -2.74        | 0.88          | -1.27         | 20.794     | 32.404      | 0.88        | -10.02      | 3.62                | 90                 | 43.26        | 42.97        |
| 924                      | 53.72       | -2.7         | 0.83          | -1.32         | 21.258     | 32.462      | 0.83        | -10.39      | 3.53                | 90                 | 43.24        | 42.96        |
| 926                      | 54.48       | -2.64        | 0.8           | -1.35         | 21.928     | 32.55       | 0.8         | -11         | 3.44                | 90                 | 43.22        | 42.94        |
| 928                      | 55.07       | -2.59        | 0.76          | -1.39         | 22.524     | 32.55       | 0.76        | -11.58      | 3.35                | 90                 | 43.2         | 42.9         |

| Application Information |              |
|-------------------------|--------------|
| 04Version               | 5.256.357    |
| TotalTime               | 4m 22s 710ms |
| AdditionalInfor         | NULL         |


902.00MHz - 928.00MHz Gain

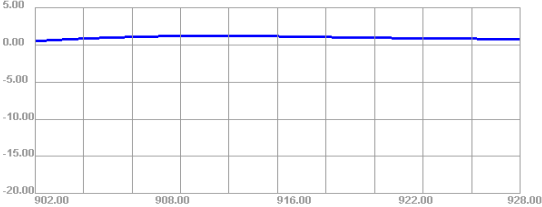


902.00MHz - 928.00MHz Efficiency

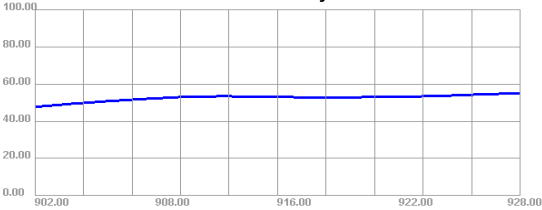


902.000MHz




902.000MHz H




902.000MHz E1




902.000MHz E2




904.000MHz




904.000MHz H





904.000MHz E1




904.000MHz E2







906.000MHz




906.000MHz H




906.000MHz E1




906.000MHz E2




908.000MHz




908.000MHz H




908.000MHz E1




908.000MHz E2




910.000MHz




910.000MHz H



910.000MHz E1




910.000MHz E2







912.000MHz




912.000MHz H




912.000MHz E1




912.000MHz E2




914.000MHz




914.000MHz H




914.000MHz E1




914.000MHz E2




916.000MHz




916.000MHz H




916.000MHz E1




916.000MHz E2




918.000MHz




918.000MHz H




918.000MHz E1




918.000MHz E2




920.000MHz




920.000MHz H




920.000MHz E1




920.000MHz E2




922.000MHz




922.000MHz H




922.000MHz E1




922.000MHz E2





924.000MHz




924.000MHz H







924.000MHz E1




924.000MHz E2




926.000MHz




926.000MHz H




926.000MHz E1




926.000MHz E2




928.000MHz




928.000MHz H



928.000MHz E1



928.000MHz E2



Antenna picture

