
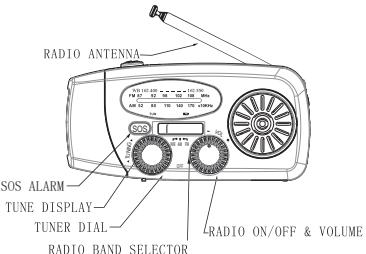


RADIO FLASHLIGHT

NO BATTERIES—HANDCRANK OR SOLAR POWER

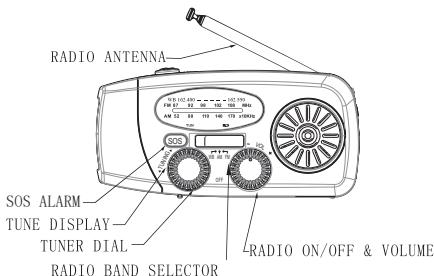

FUNCTION:

- 1W bright white LED
- FM / AM / NOAA
- SOS ALARM
- Recharge cell phone in emergencies
- Charge / discharge protection
- Multiple ways to power the radio flashlight:
 - hand crank
 - solar
 - direct USB charging
- Water-resistant with Ipx3 rating

USING THE RADIO


- Turn the VOLUME dial clockwise to turn the radio on and control volume.
- Select AM or FM, WB with radio band. For better reception, extend the RADIO ANTENNA.
- Turn TUNER DIAL to select station. The green tune indicator light will come on when the station selected is fully engaged.

USING THE FLASHLIGHT


- Press the flashlight switch to turn it ON.
- Press the flashlight switch to turn it OFF.

SOLAR / HANDCRANK / USB POWER

A SOLAR POWER




- Place product in average sunlight for approximately 10-12 hours, the red POWER INDICATOR illuminates when charging.

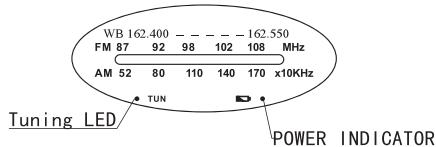

B HANDCRANK POWER


- Lift the HANDCRANK.
- Hand crank either clockwise or counterclockwise for 3-5 minutes to activate the internal battery for initial use, or when the unit has been idle for more than 60 days. The red POWER INDICATOR illuminates when cranking.

- For subsequent charges, turn the handle crank for one minute (crank speed \geq 130rmp) to produce: 15-20 minutes of continuous light for three LED; 15-20 minutes of continuous radio usage (medium volume); 3-5 minutes of talk time.

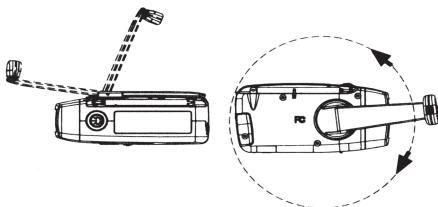


C USB PORT CHARGING

- Insert one end of the CHARGING CORD into the Type-C USB JACK and the other end into the computer USB port. The red POWER INDICATOR illuminates when the battery is charging.



CHARGING YOUR SMART PHONE

- Lift the rubber tab on the side of the unit.

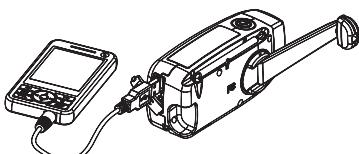

- Use USB cord to charge your phone. The phone will automatically charge. No need to crank.

Charging Protection

- Red LED will stop flashes when the unit is fully charged.

Discharging Protection

- When battery is over loading or short circuit, it would stop output automatically
- When battery voltage is lower 2.5v, power source will get cut off automatically.

SPECIFICATION:

- Dimensions: 128 x 60 x 45 (mm)
- Weight: approximately 300g
- maximum power consumption: 1.5W
- Frequency range:
AM: 520~1710 KHz
FM: 87~108 MHz
NOAA: 162.440~162.550 MHz

- Working voltage: 2.7~4.2V
- Power source: 18650 / 3.7 / 2000mAh Li-ion

CARE AND MAINTENANCE:

- Wipe the outside of the unit with a soft, damp cloth.
- Clean the lens with a standard lens cleaning product.
- Do not clean unit with harsh abrasive or any solvents.
- Unit is NOT fully waterproof— only waterproof Ipx3. DO NOT submerge in water.
- When unit is idle over 60 days, or FIRST USE. Please hand crank or sunlight recharge for 3 to 5 minutes to activate the internal battery.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.