



Appendix B

RF Test Data for 2.4GWIFI(Conducted Measurement)

Product Name: Home IP Camera

Test Model: TAI3320

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



B.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.622	≥ 0.5	Pass
NVNT	b	2437	Ant1	8.616	≥ 0.5	Pass
NVNT	b	2462	Ant1	7.938	≥ 0.5	Pass
NVNT	g	2412	Ant1	16.333	≥ 0.5	Pass
NVNT	g	2437	Ant1	16.269	≥ 0.5	Pass
NVNT	g	2462	Ant1	16.45	≥ 0.5	Pass
NVNT	n20	2412	Ant1	15.04	≥ 0.5	Pass
NVNT	n20	2437	Ant1	16.602	≥ 0.5	Pass
NVNT	n20	2462	Ant1	16.978	≥ 0.5	Pass
NVNT	n40	2422	Ant1	32.591	≥ 0.5	Pass
NVNT	n40	2437	Ant1	35.399	≥ 0.5	Pass
NVNT	n40	2452	Ant1	36.007	≥ 0.5	Pass
NVNT	ax20	2412	Ant1	16.668	≥ 0.5	Pass
NVNT	ax20	2437	Ant1	17.103	≥ 0.5	Pass
NVNT	ax20	2462	Ant1	17.24	≥ 0.5	Pass
NVNT	ax40	2422	Ant1	35.721	≥ 0.5	Pass
NVNT	ax40	2437	Ant1	35.237	≥ 0.5	Pass
NVNT	ax40	2452	Ant1	34.649	≥ 0.5	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1




-6dB Bandwidth NVNT b 2437MHz Ant1

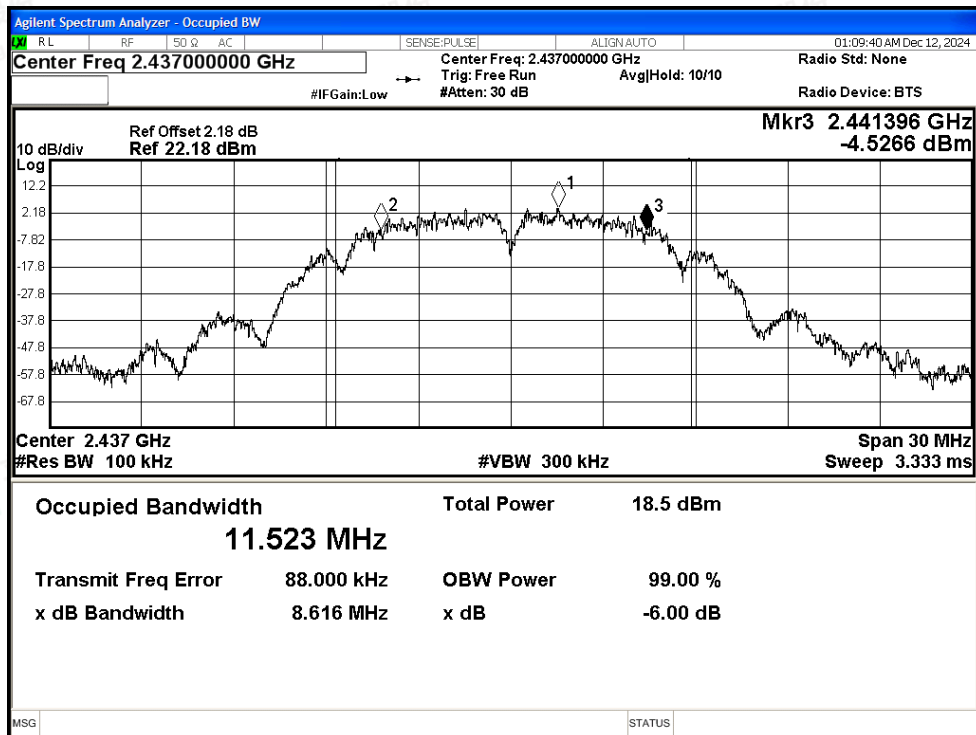




-6dB Bandwidth NVNT b 2462MHz Ant1

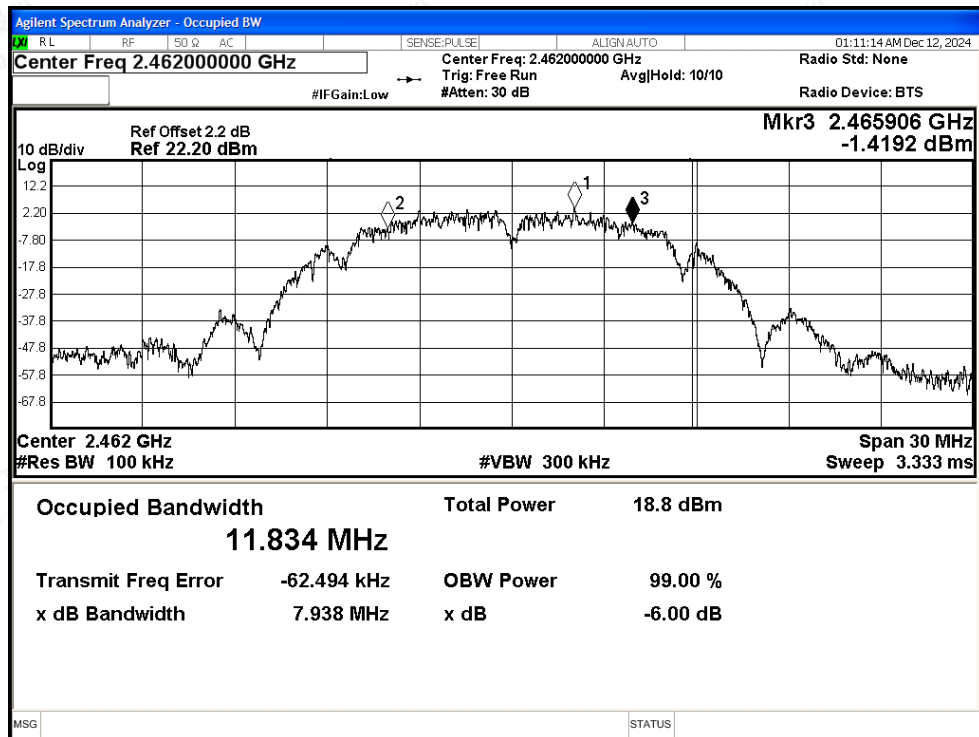


-6dB Bandwidth NVNT g 2412MHz Ant1

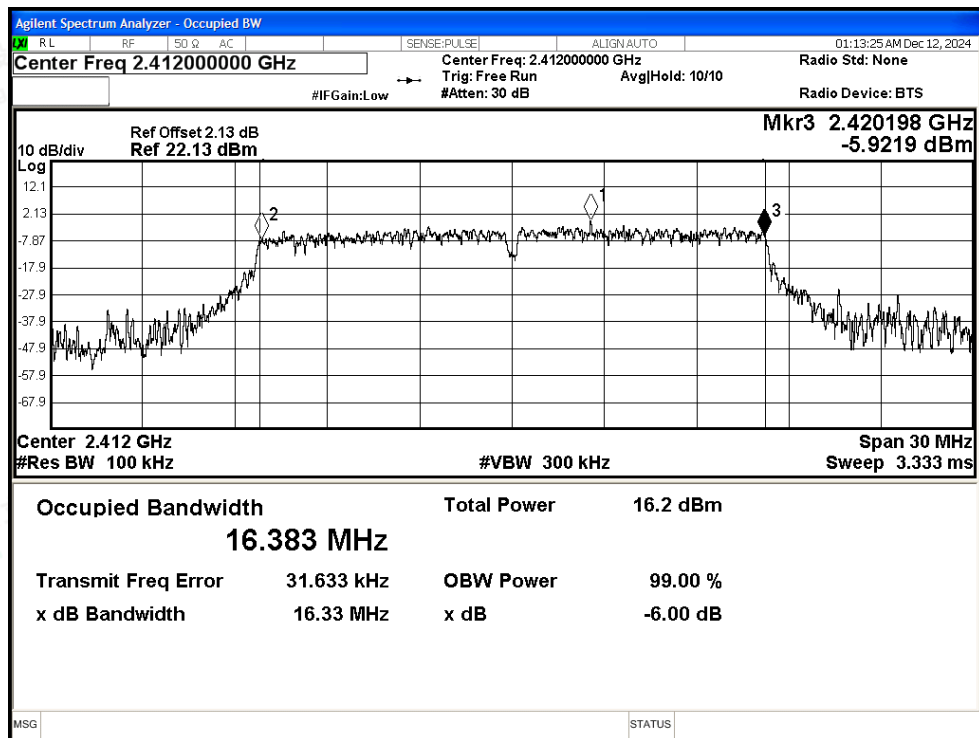




-6dB Bandwidth NVNT g 2437MHz Ant1

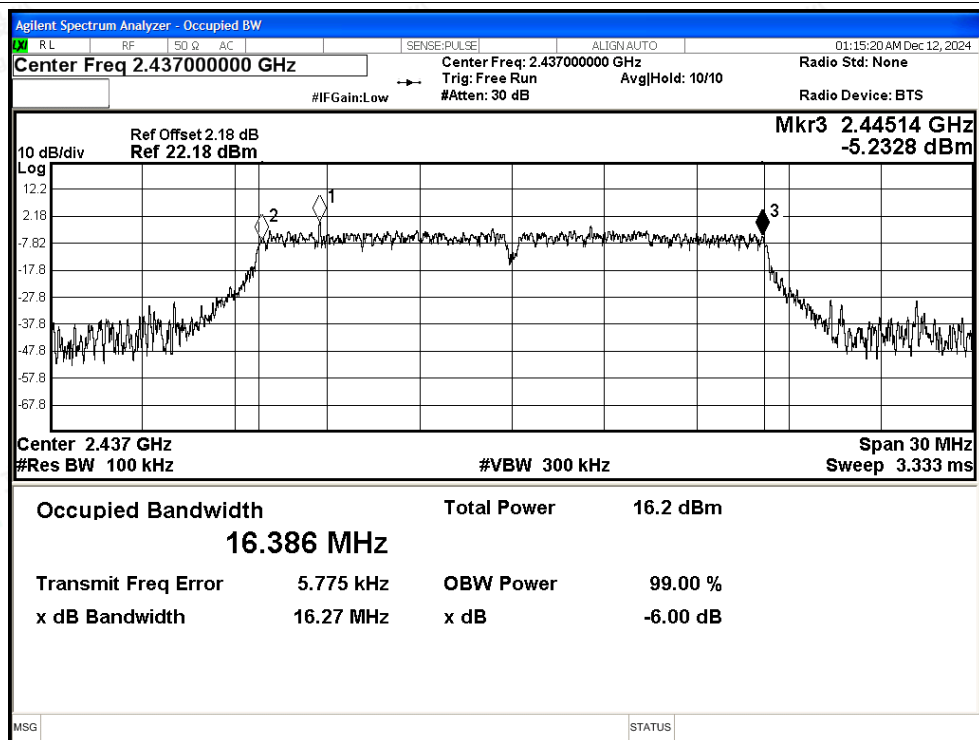


-6dB Bandwidth NVNT g 2462MHz Ant1

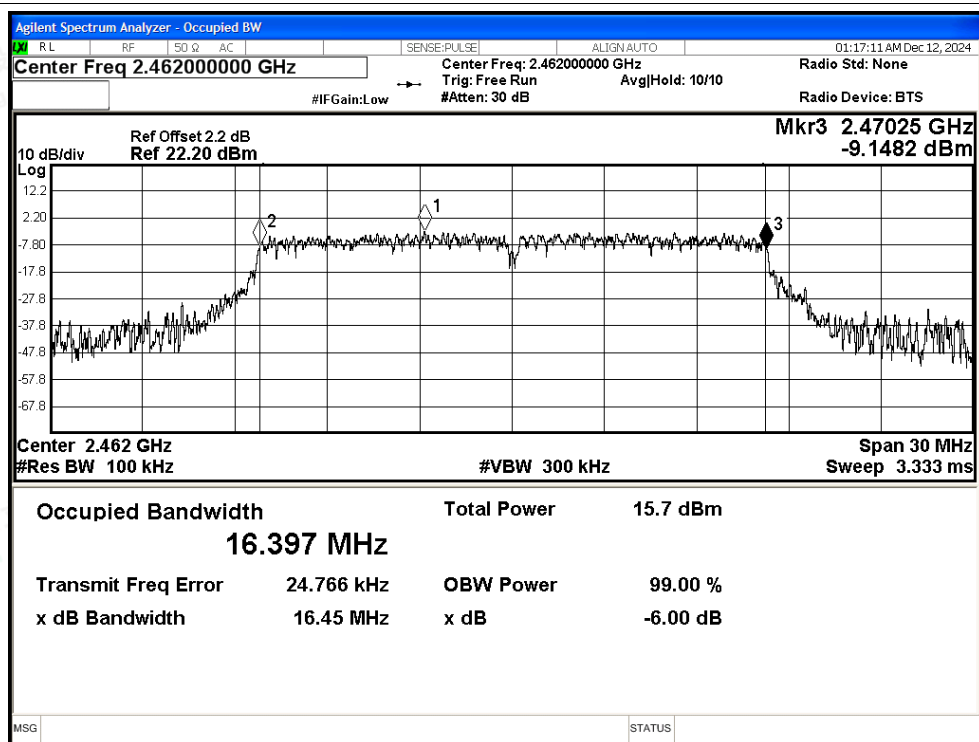




-6dB Bandwidth NVNT n20 2412MHz Ant1

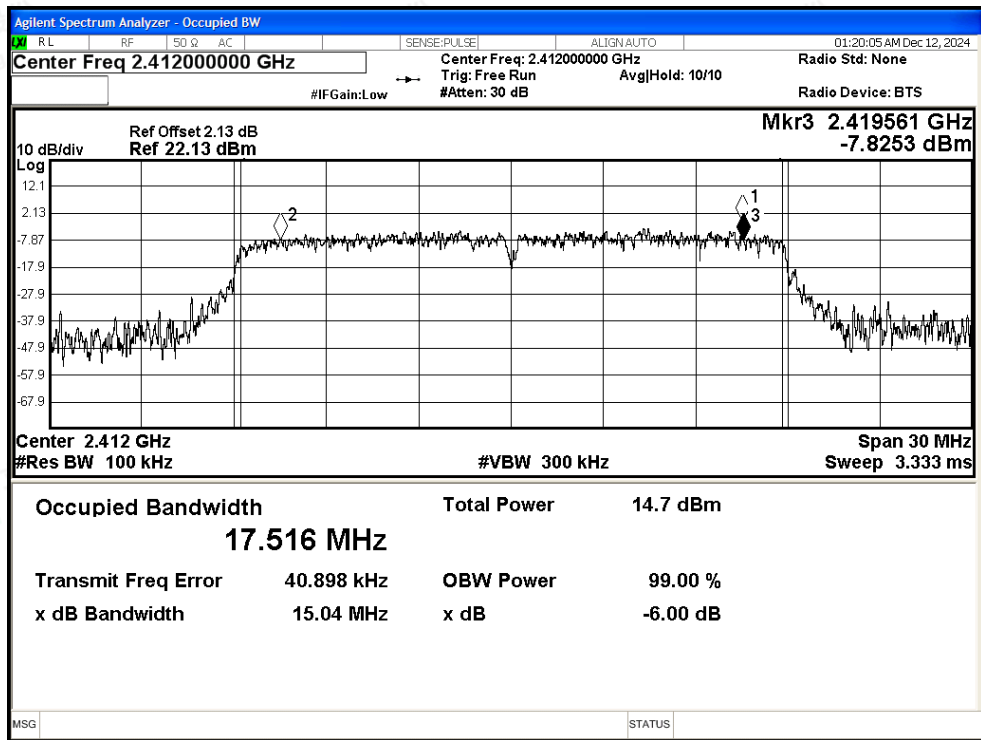


-6dB Bandwidth NVNT n20 2437MHz Ant1

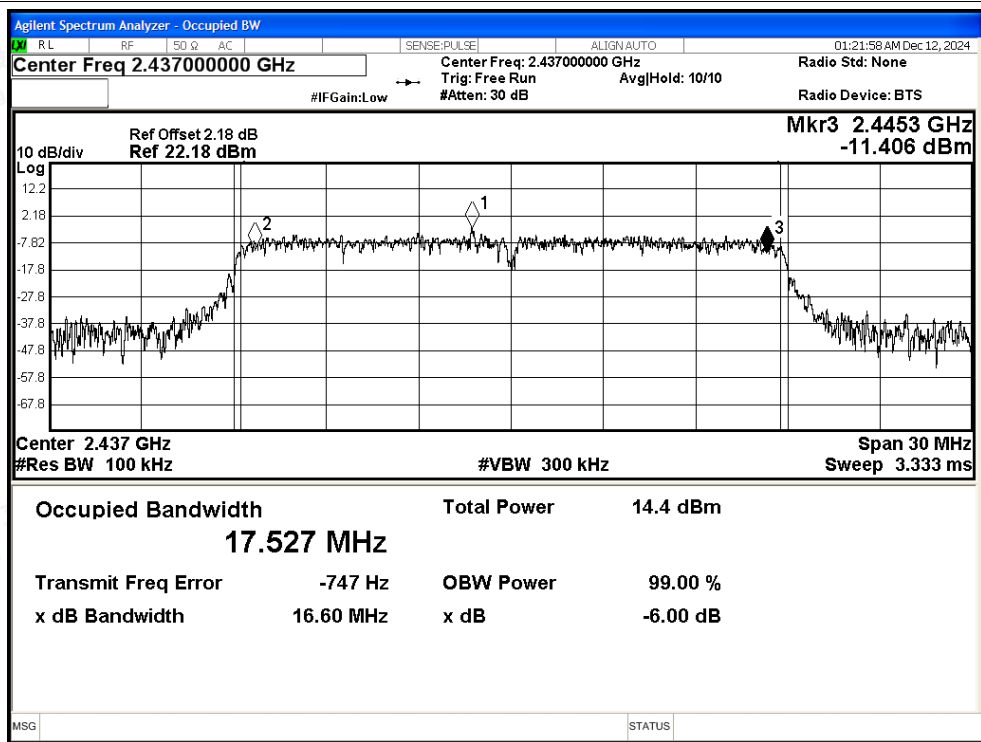




-6dB Bandwidth NVNT n20 2462MHz Ant1

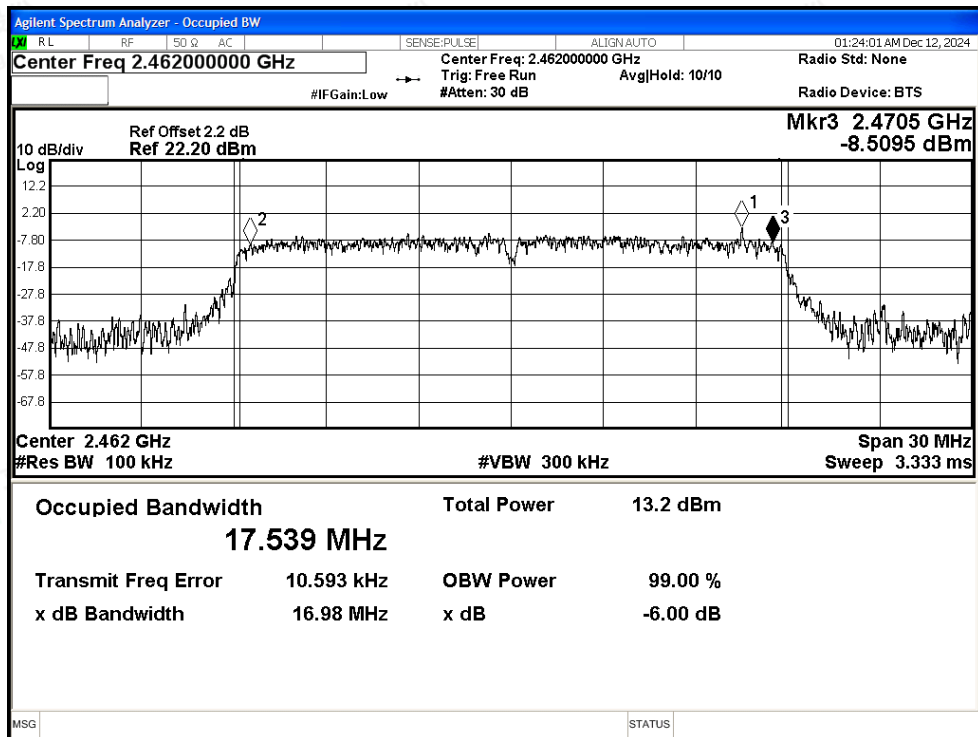


-6dB Bandwidth NVNT n40 2422MHz Ant1

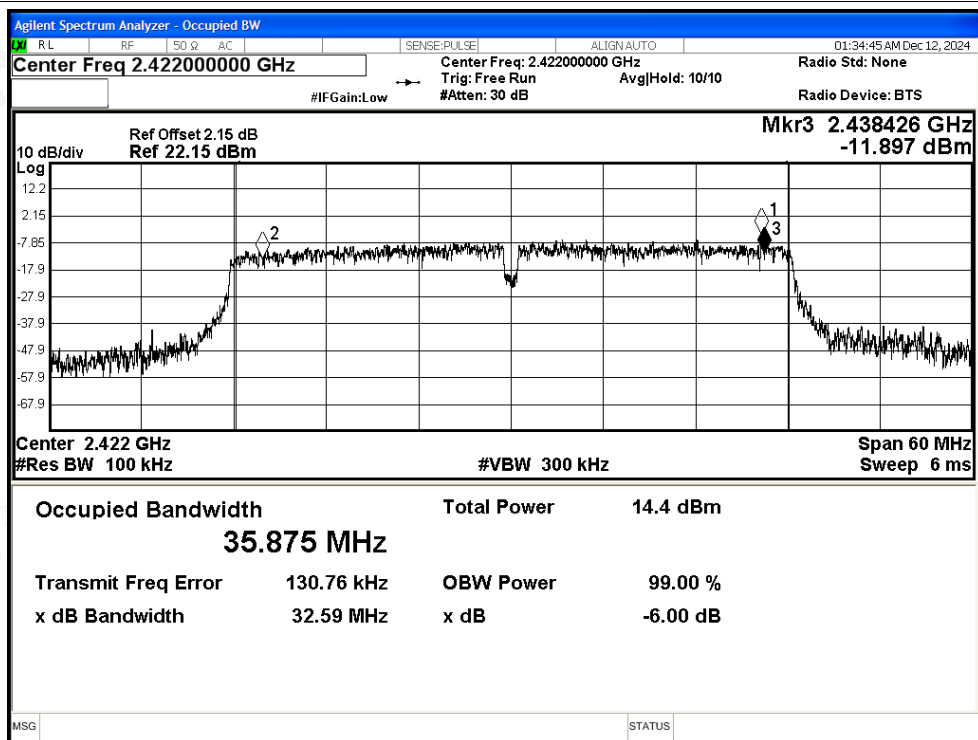




-6dB Bandwidth NVNT n40 2437MHz Ant1

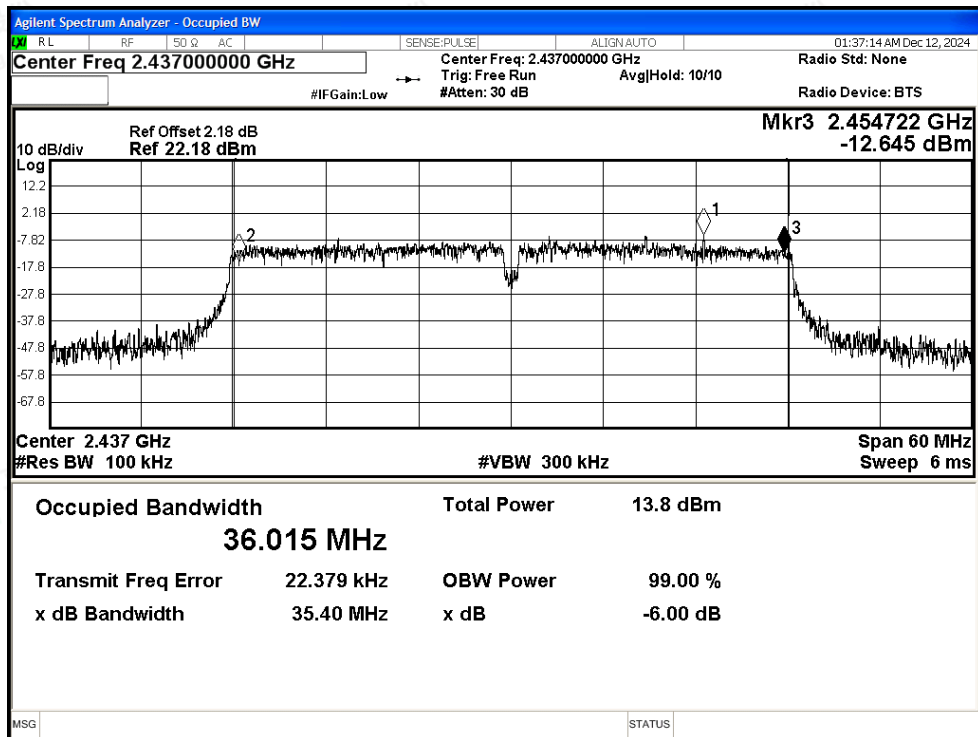

-6dB Bandwidth NVNT n40 2452MHz Ant1

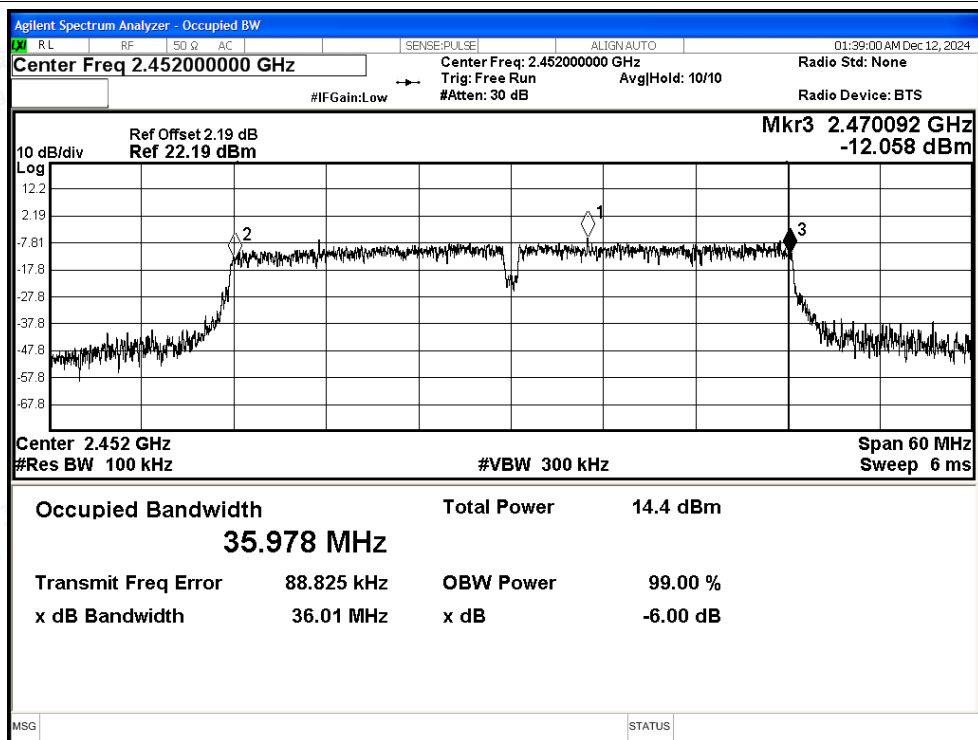

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-6dB Bandwidth NVNT ax20 2412MHz Ant1

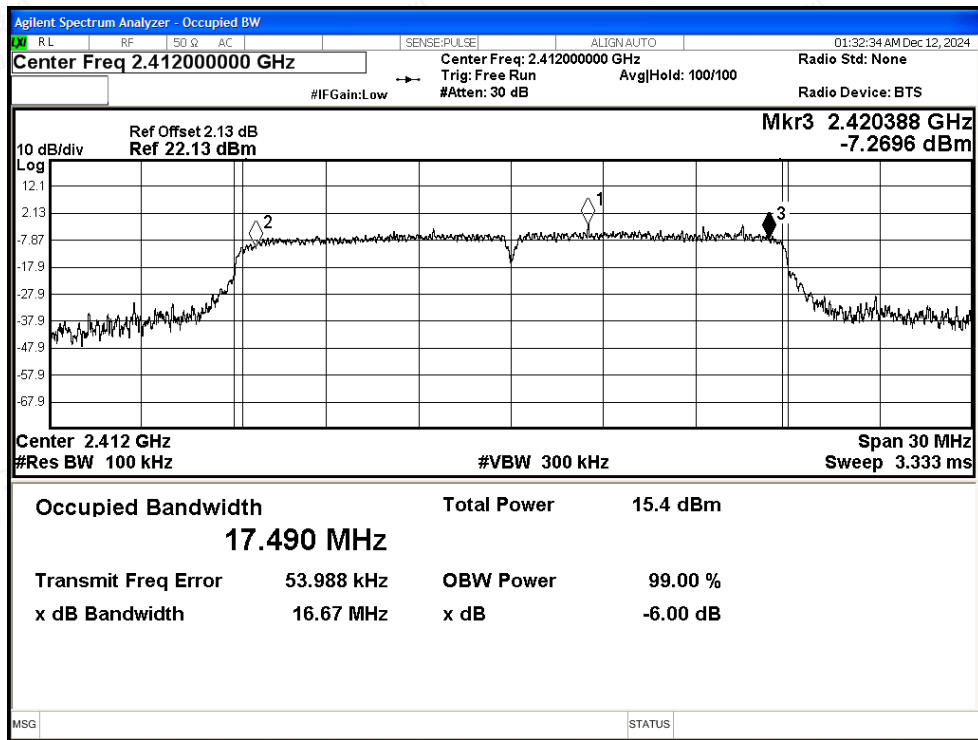


-6dB Bandwidth NVNT ax20 2437MHz Ant1

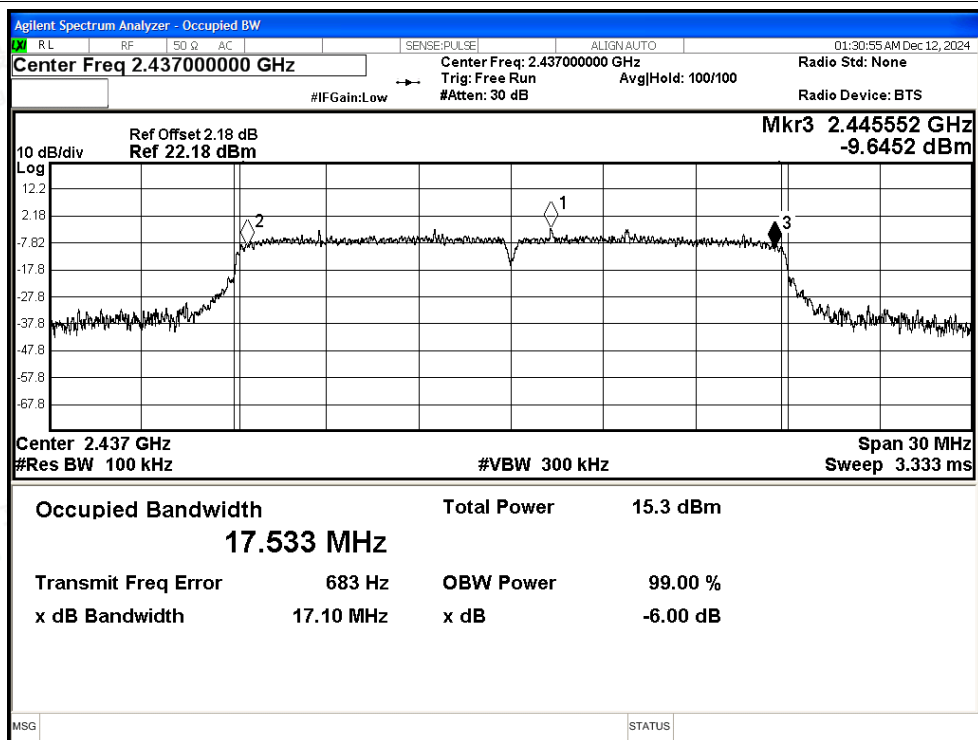




-6dB Bandwidth NVNT ax20 2462MHz Ant1

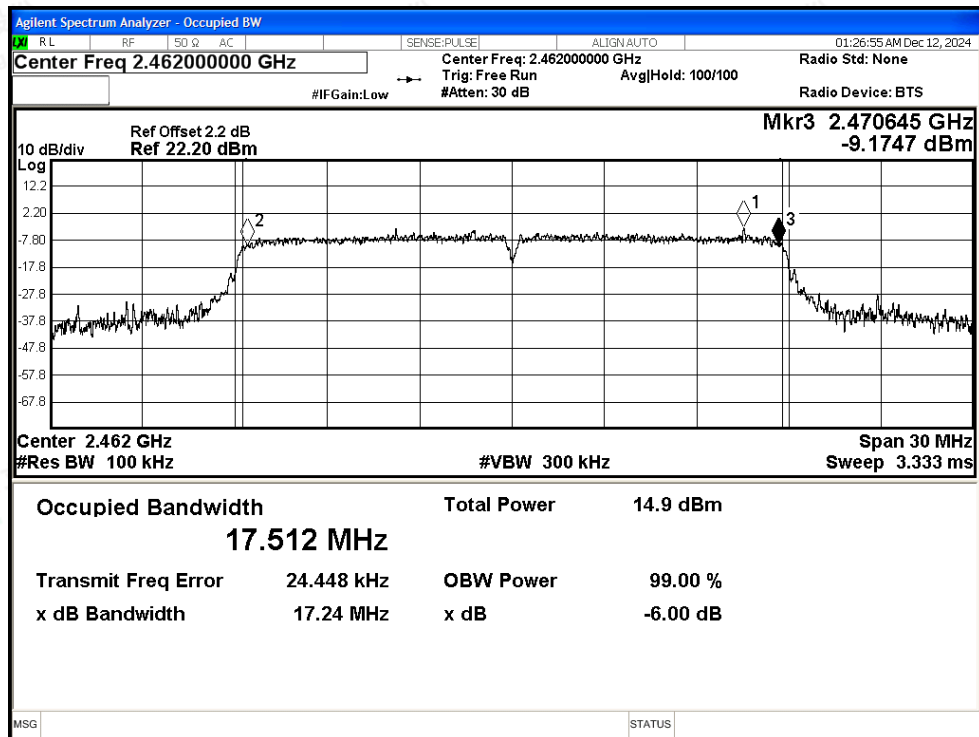


-6dB Bandwidth NVNT ax40 2422MHz Ant1

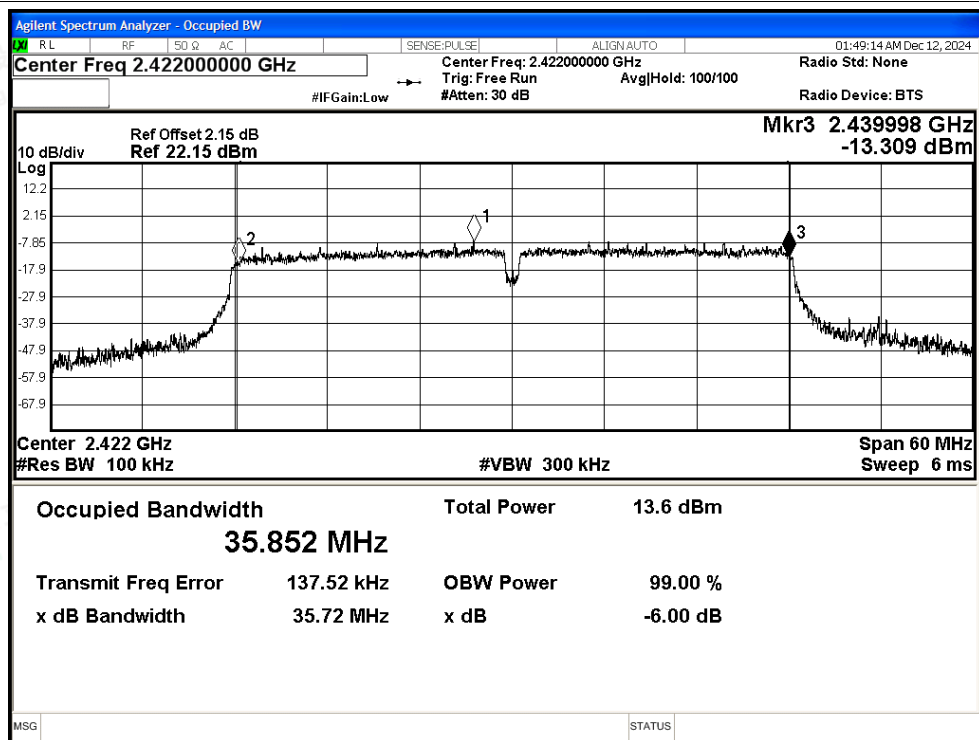




-6dB Bandwidth NVNT ax40 2437MHz Ant1

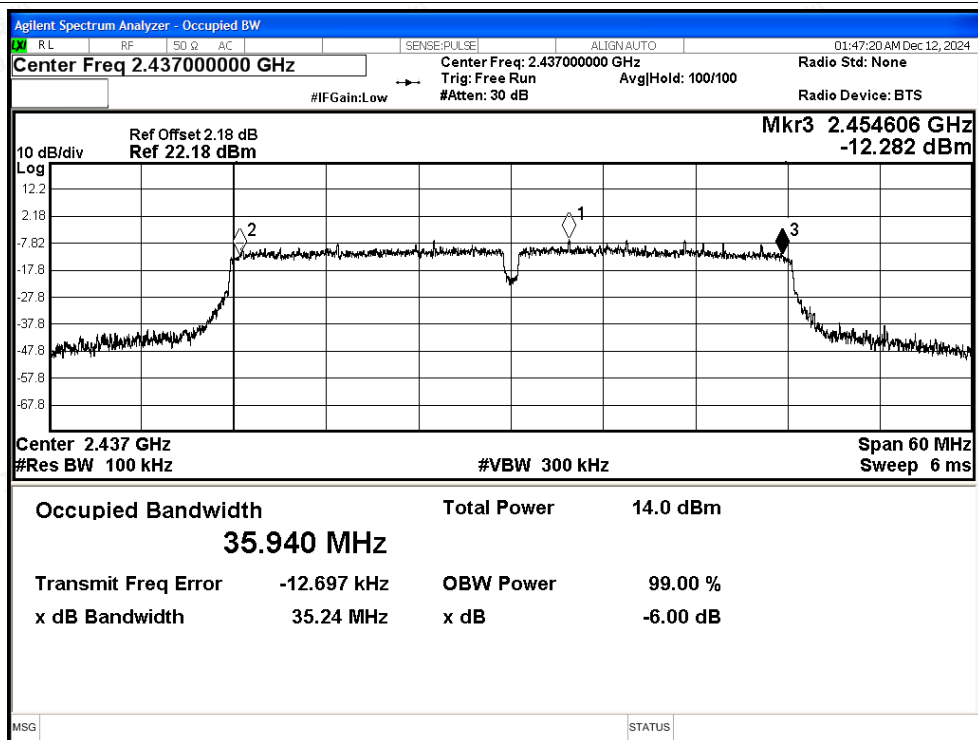

-6dB Bandwidth NVNT ax40 2452MHz Ant1

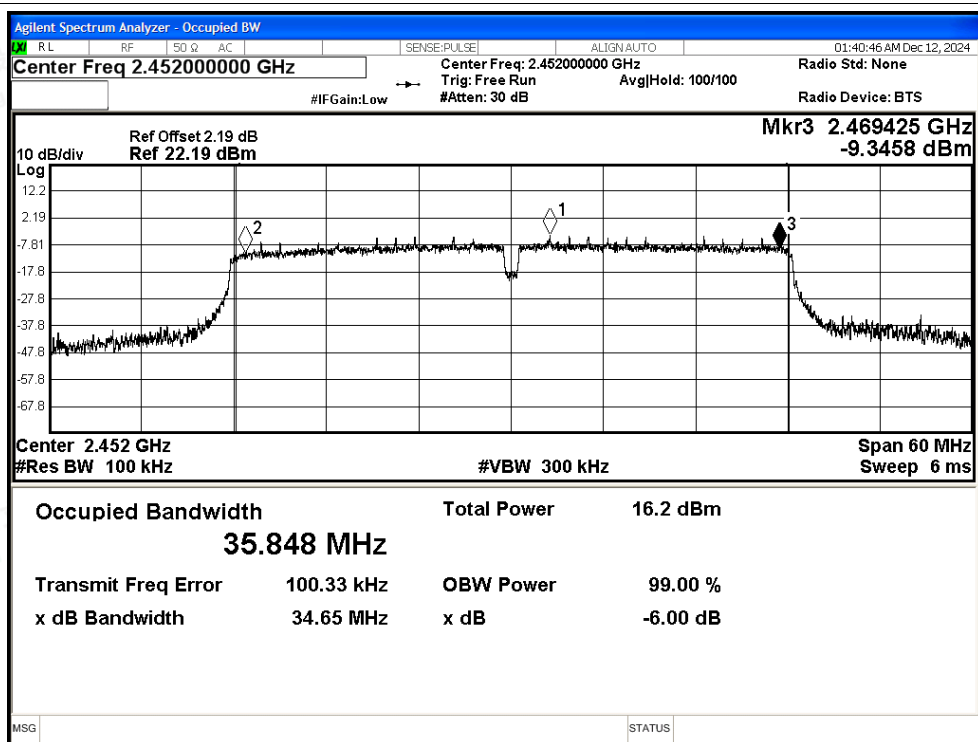



B.2 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	15.6	30	Pass
NVNT	b	2437	Ant1	15.13	30	Pass
NVNT	b	2462	Ant1	15.39	30	Pass
NVNT	g	2412	Ant1	14.96	30	Pass
NVNT	g	2437	Ant1	14.78	30	Pass
NVNT	g	2462	Ant1	14.5	30	Pass
NVNT	n20	2412	Ant1	13.24	30	Pass
NVNT	n20	2437	Ant1	13	30	Pass
NVNT	n20	2462	Ant1	13.58	30	Pass
NVNT	n40	2422	Ant1	12.81	30	Pass
NVNT	n40	2437	Ant1	12.25	30	Pass
NVNT	n40	2452	Ant1	12.85	30	Pass
NVNT	ax20	2412	Ant1	14.05	30	Pass
NVNT	ax20	2437	Ant1	13.87	30	Pass
NVNT	ax20	2462	Ant1	13.67	30	Pass
NVNT	ax40	2422	Ant1	11.85	30	Pass
NVNT	ax40	2437	Ant1	12.6	30	Pass
NVNT	ax40	2452	Ant1	14.64	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-7.25	8	Pass
NVNT	b	2437	Ant1	-8.07	8	Pass
NVNT	b	2462	Ant1	-9.19	8	Pass
NVNT	g	2412	Ant1	-13.84	8	Pass
NVNT	g	2437	Ant1	-13.99	8	Pass
NVNT	g	2462	Ant1	-13.97	8	Pass
NVNT	n20	2412	Ant1	-16.05	8	Pass
NVNT	n20	2437	Ant1	-14.22	8	Pass
NVNT	n20	2462	Ant1	-16.62	8	Pass
NVNT	n40	2422	Ant1	-18.52	8	Pass
NVNT	n40	2437	Ant1	-19.87	8	Pass
NVNT	n40	2452	Ant1	-16.78	8	Pass
NVNT	ax20	2412	Ant1	-16.41	8	Pass
NVNT	ax20	2437	Ant1	-17.04	8	Pass
NVNT	ax20	2462	Ant1	-15.78	8	Pass
NVNT	ax40	2422	Ant1	-21.29	8	Pass
NVNT	ax40	2437	Ant1	-21.7	8	Pass
NVNT	ax40	2452	Ant1	-18.93	8	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

PSD NVNT b 2412MHz Ant1

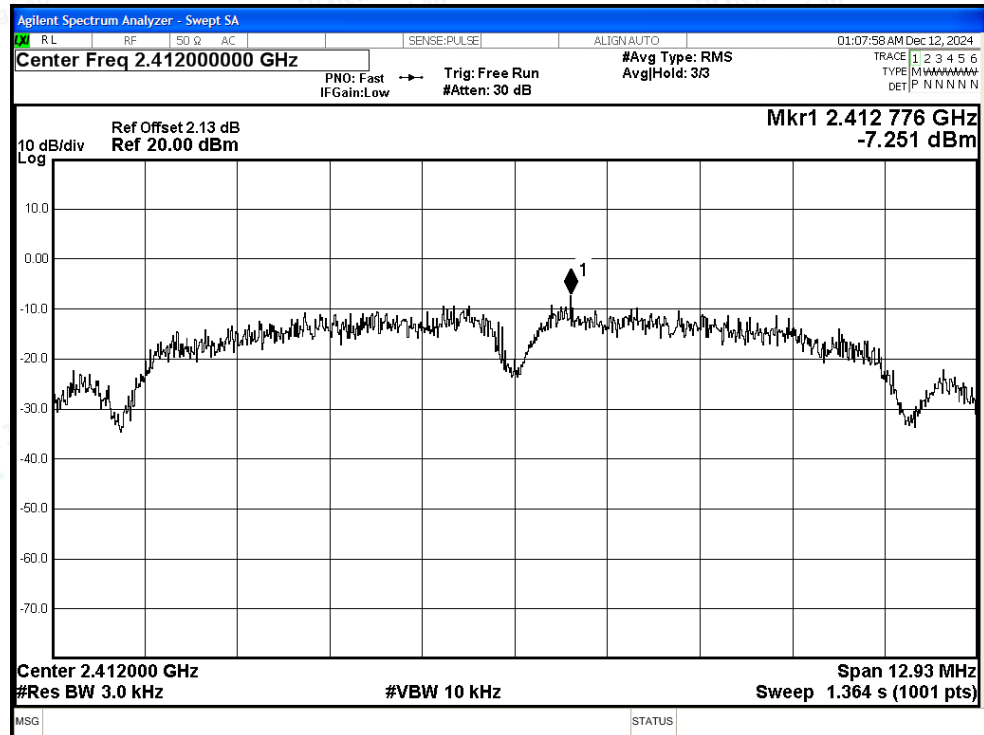


PSD NVNT b 2437MHz Ant1

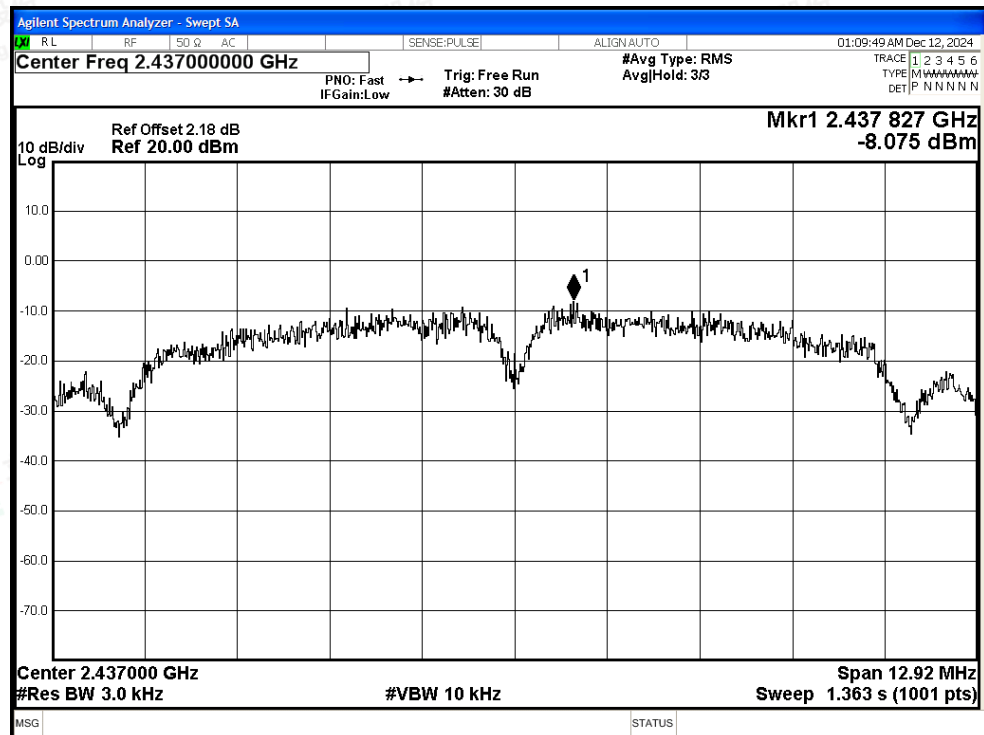




PSD NVNT b 2462MHz Ant1

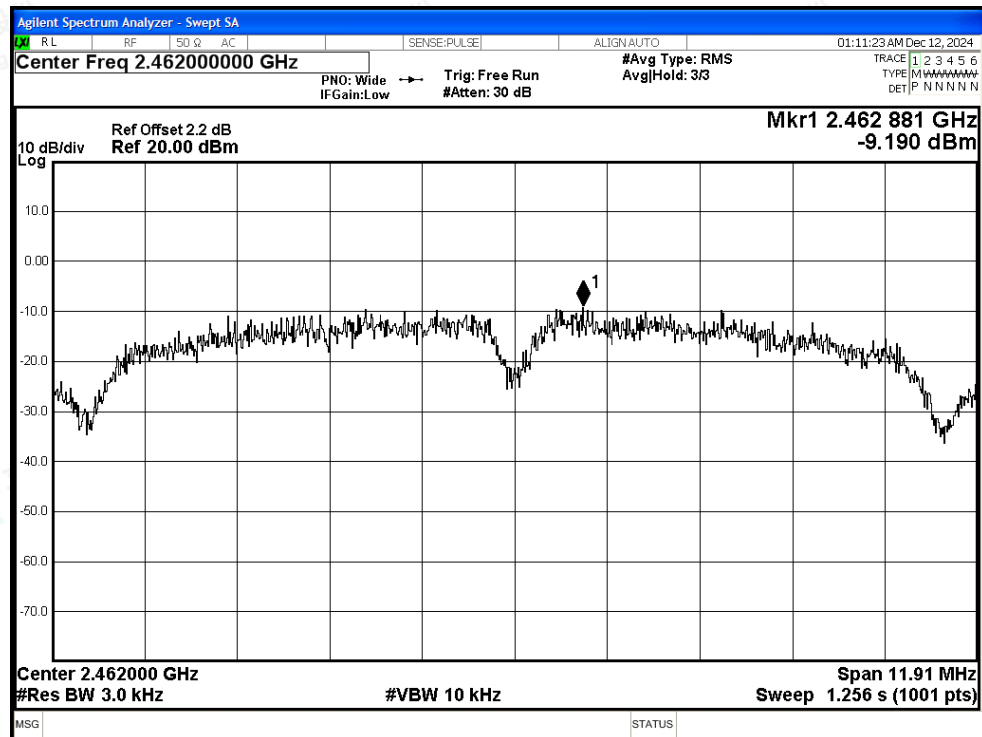


PSD NVNT g 2412MHz Ant1

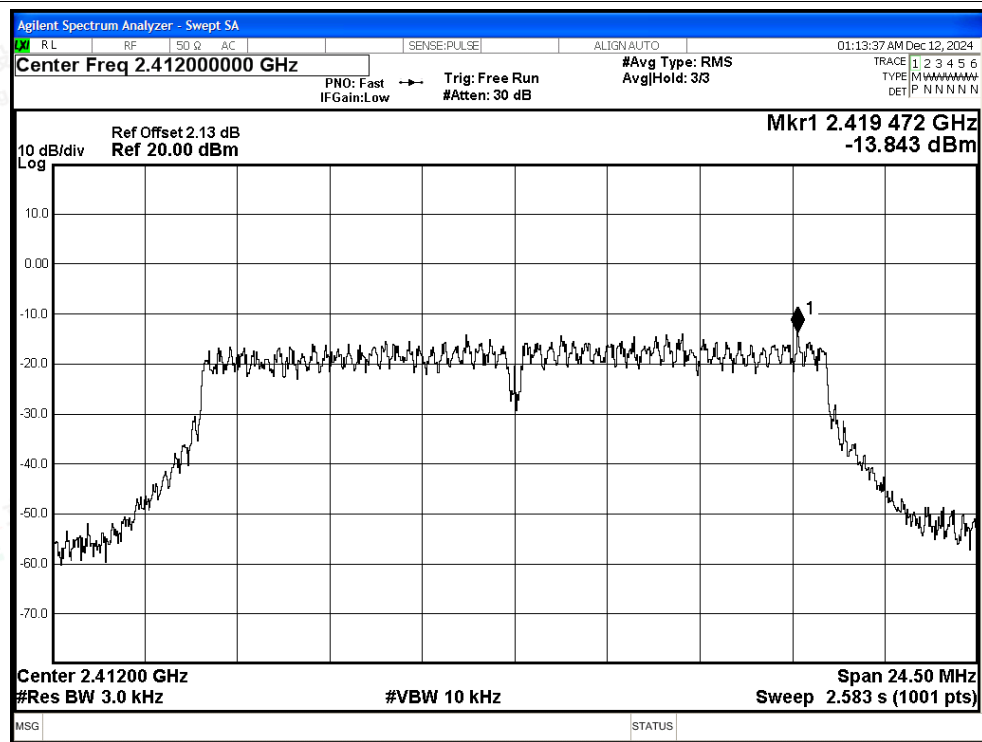




PSD NVNT g 2437MHz Ant1

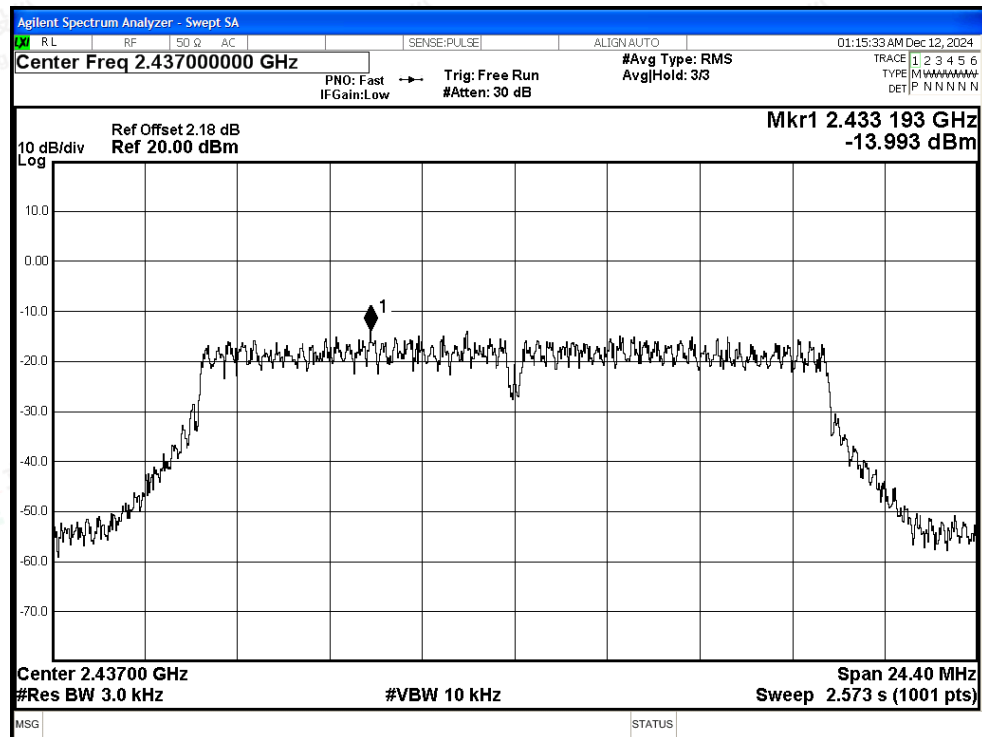


PSD NVNT g 2462MHz Ant1

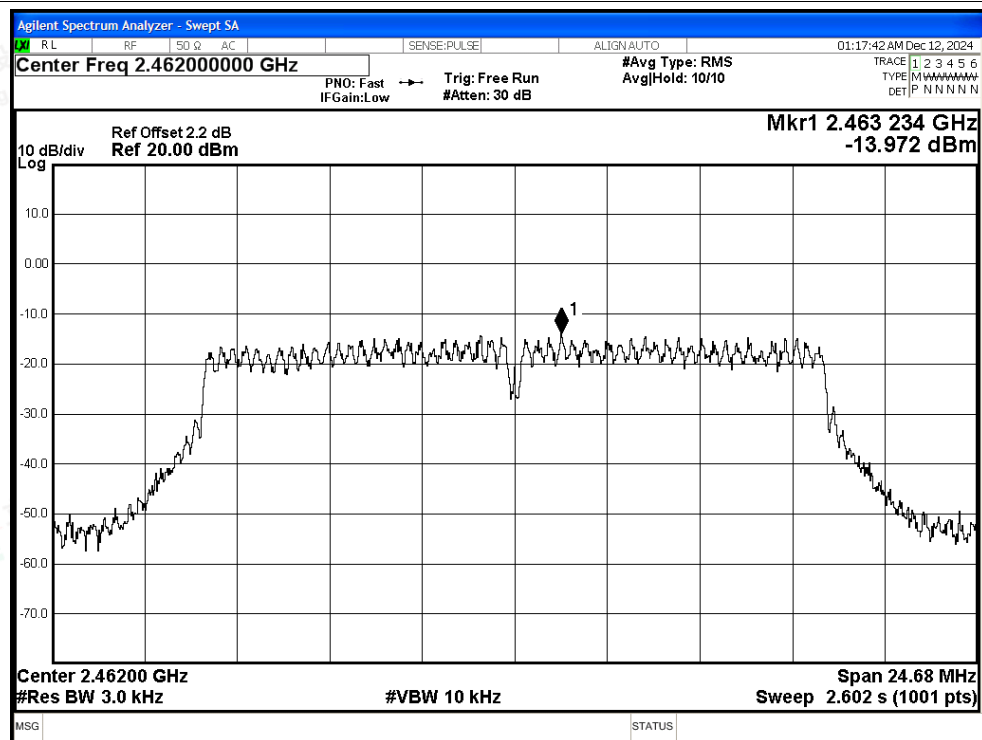




PSD NVNT n20 2412MHz Ant1

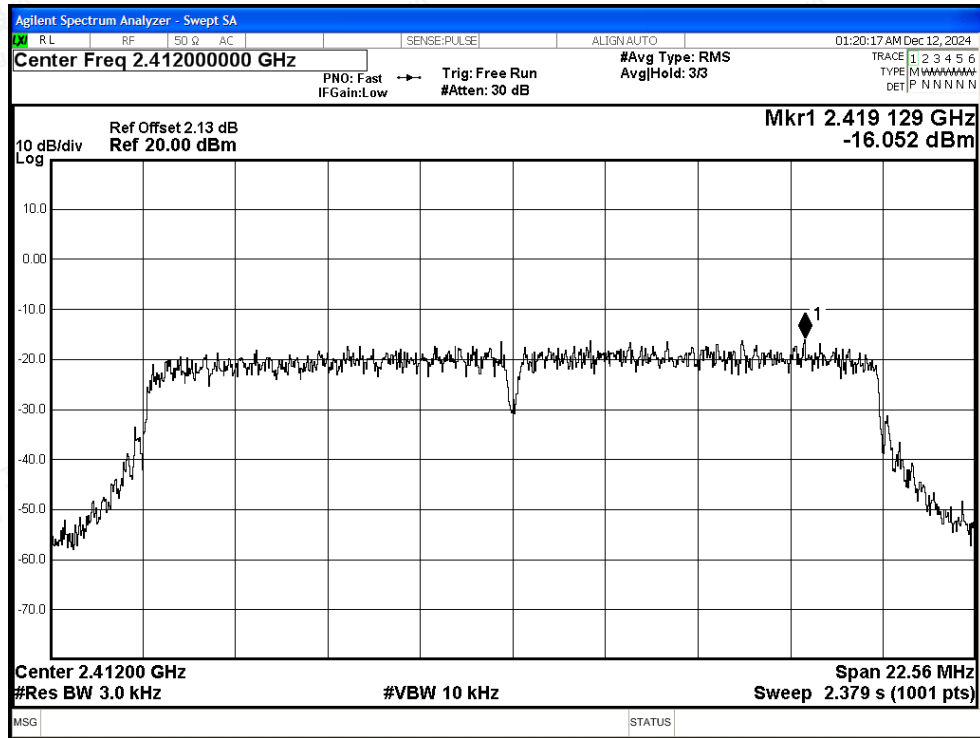


PSD NVNT n20 2437MHz Ant1

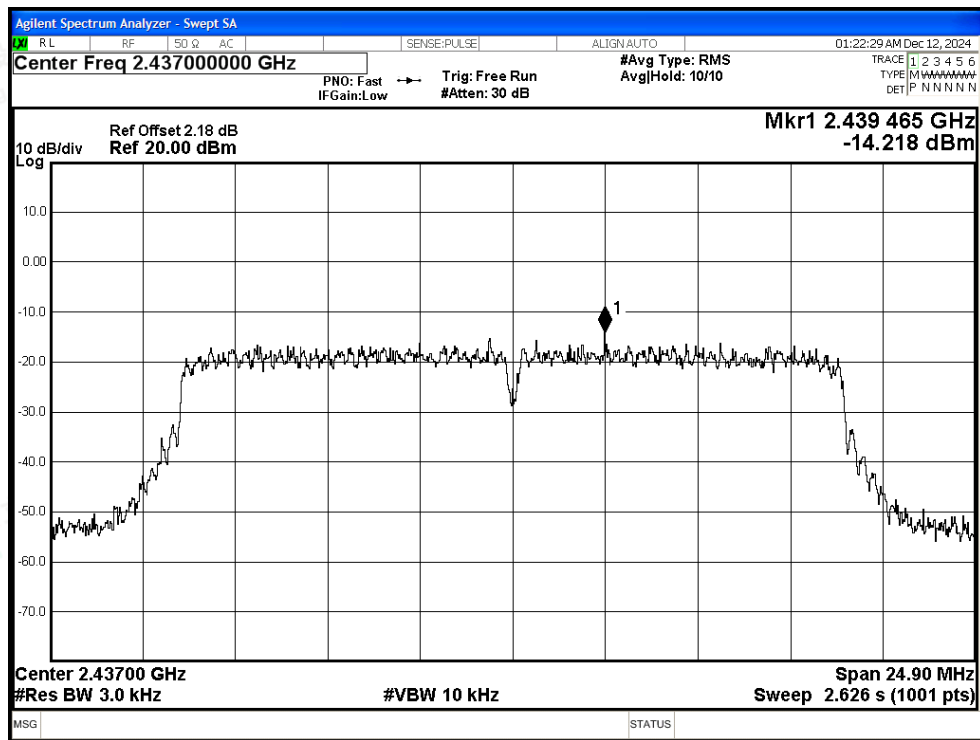




PSD NVNT n20 2462MHz Ant1

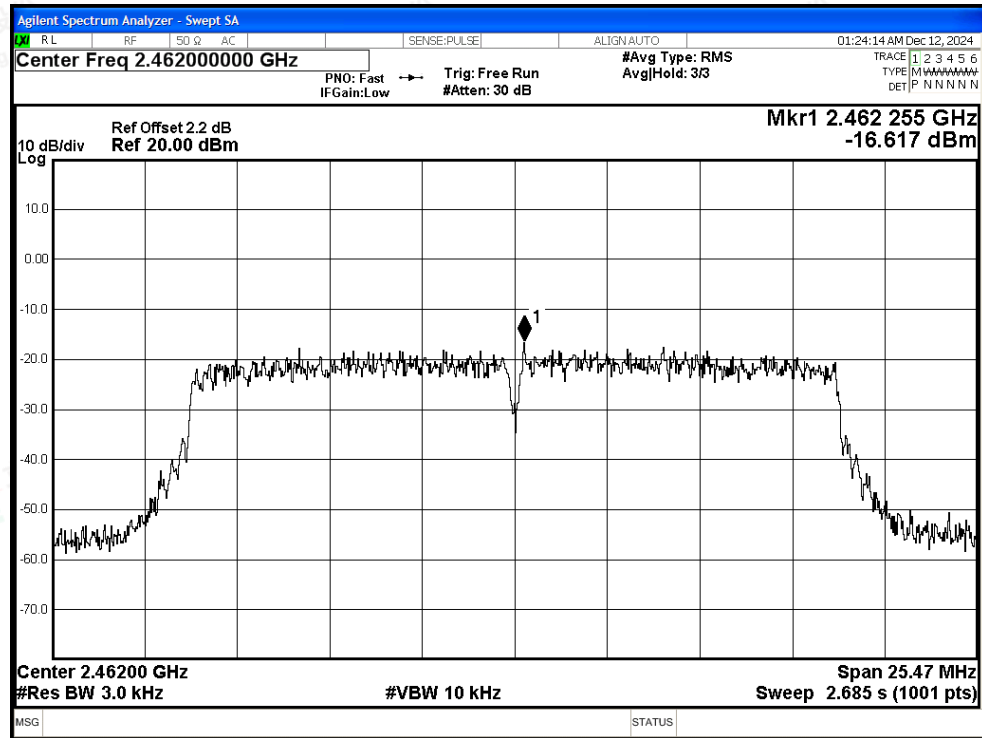


PSD NVNT n40 2422MHz Ant1

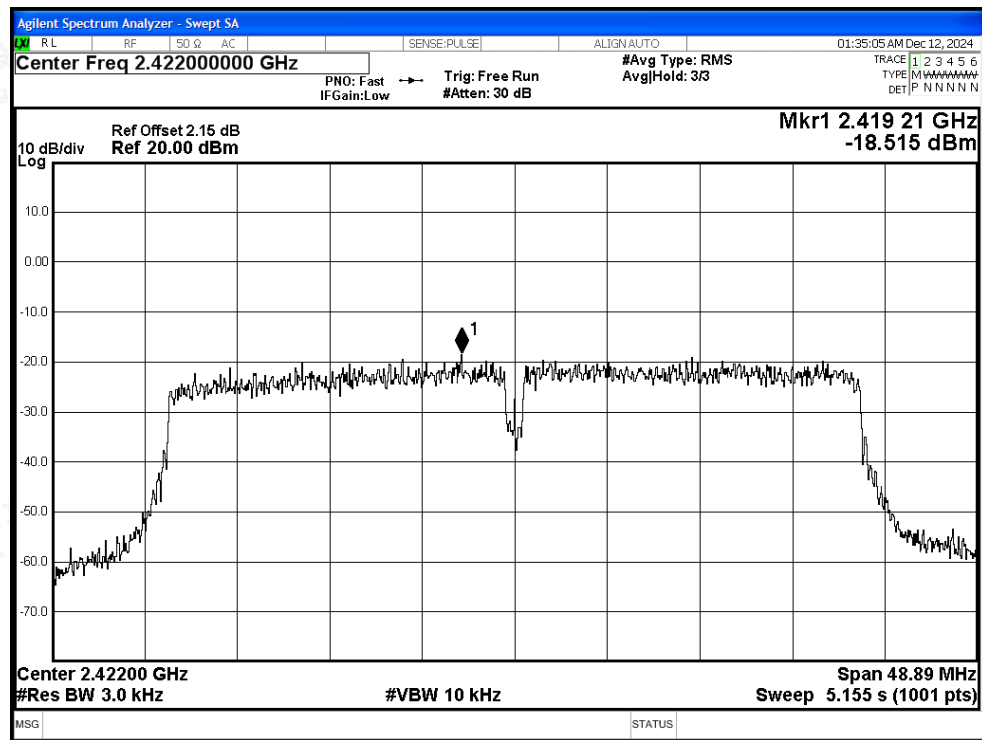




PSD NVNT n40 2437MHz Ant1

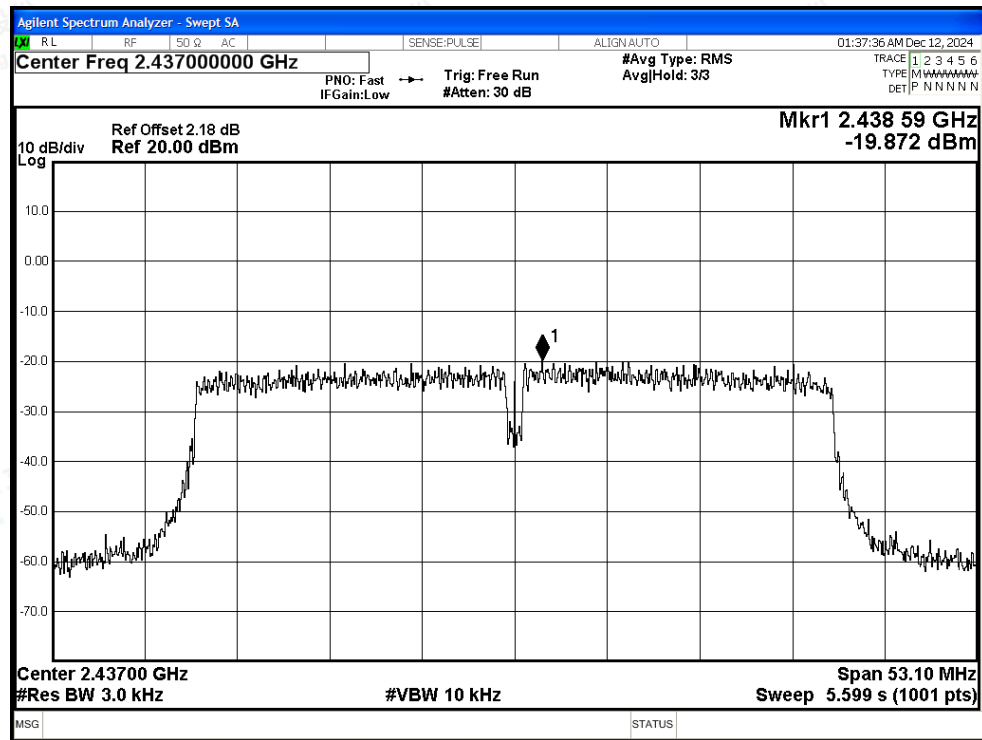


PSD NVNT n40 2452MHz Ant1

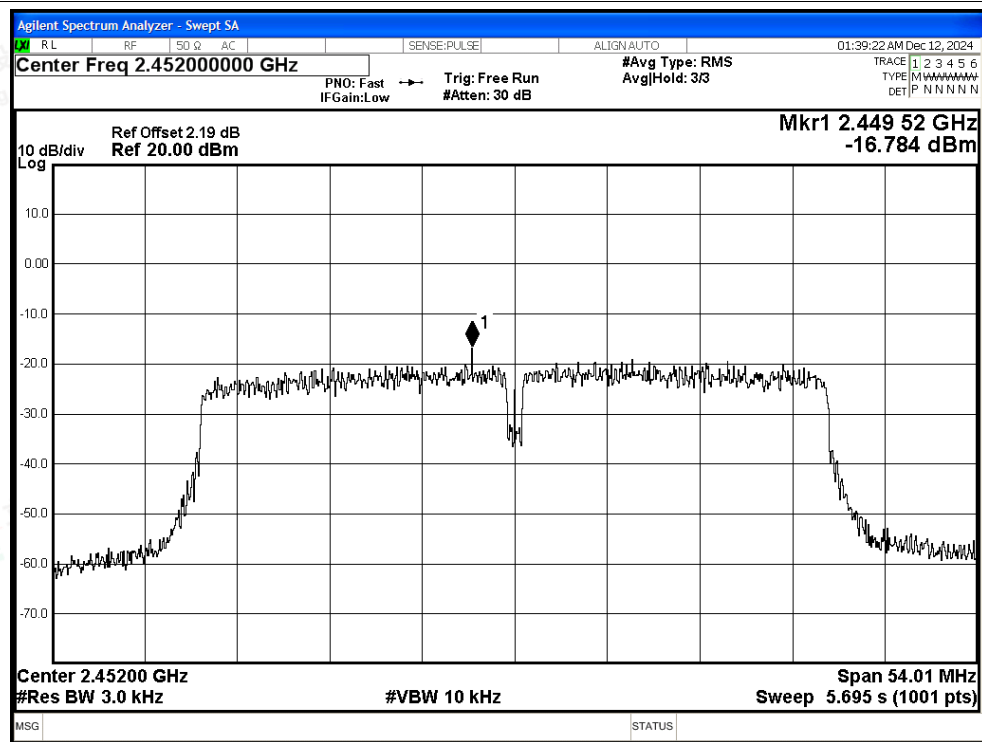






PSD NVNT ax20 2412MHz Ant1

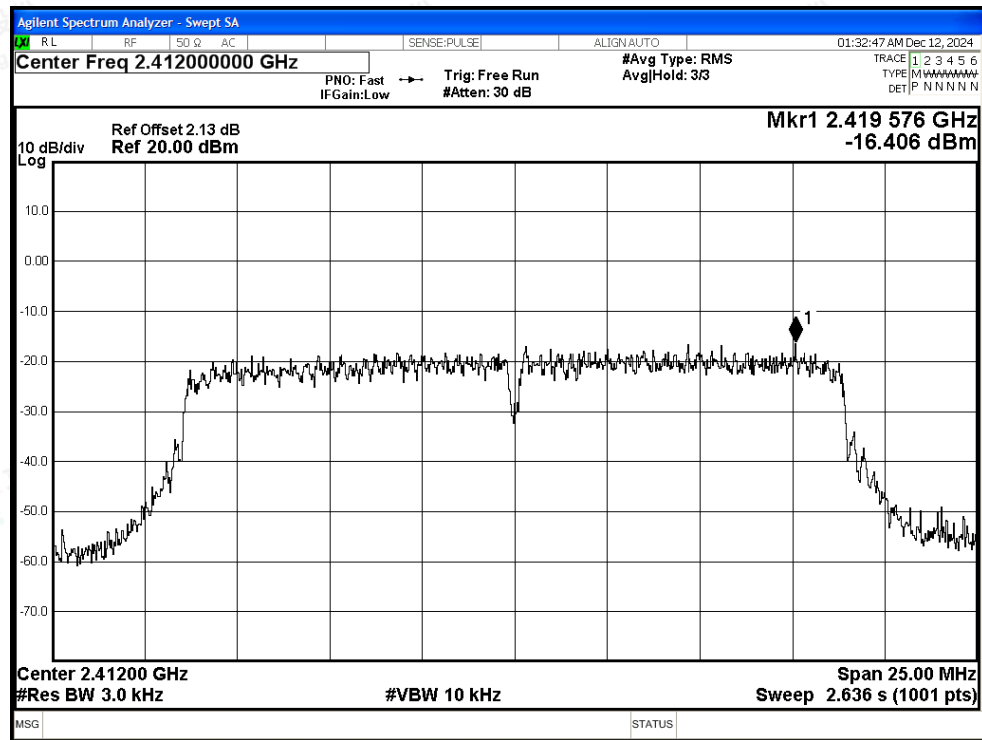


PSD NVNT ax20 2437MHz Ant1

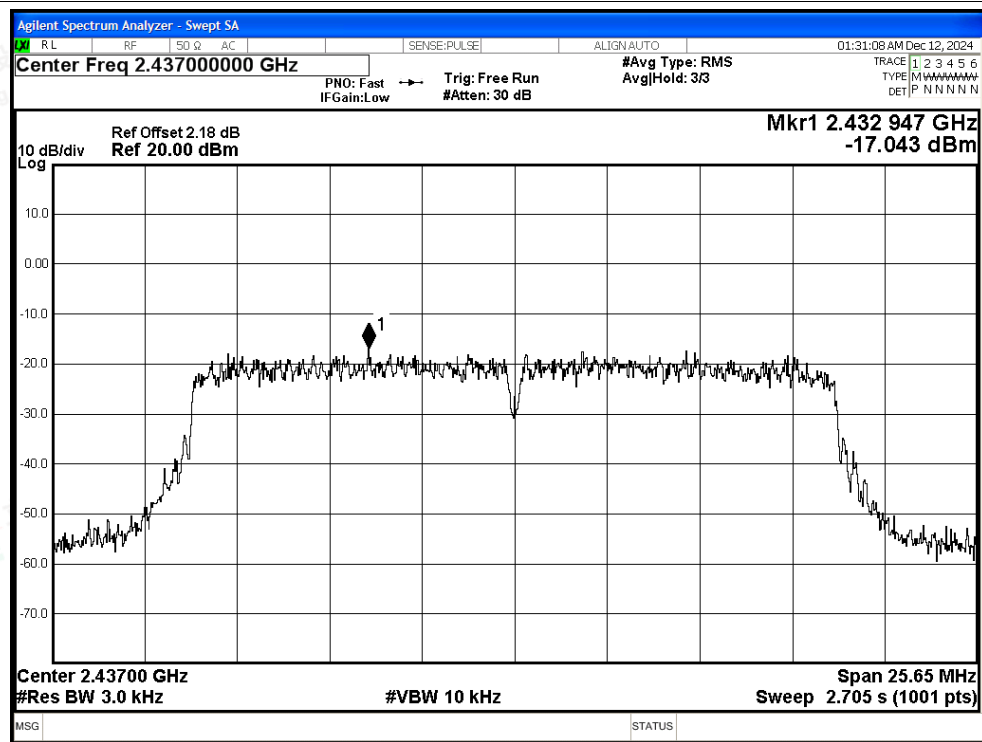

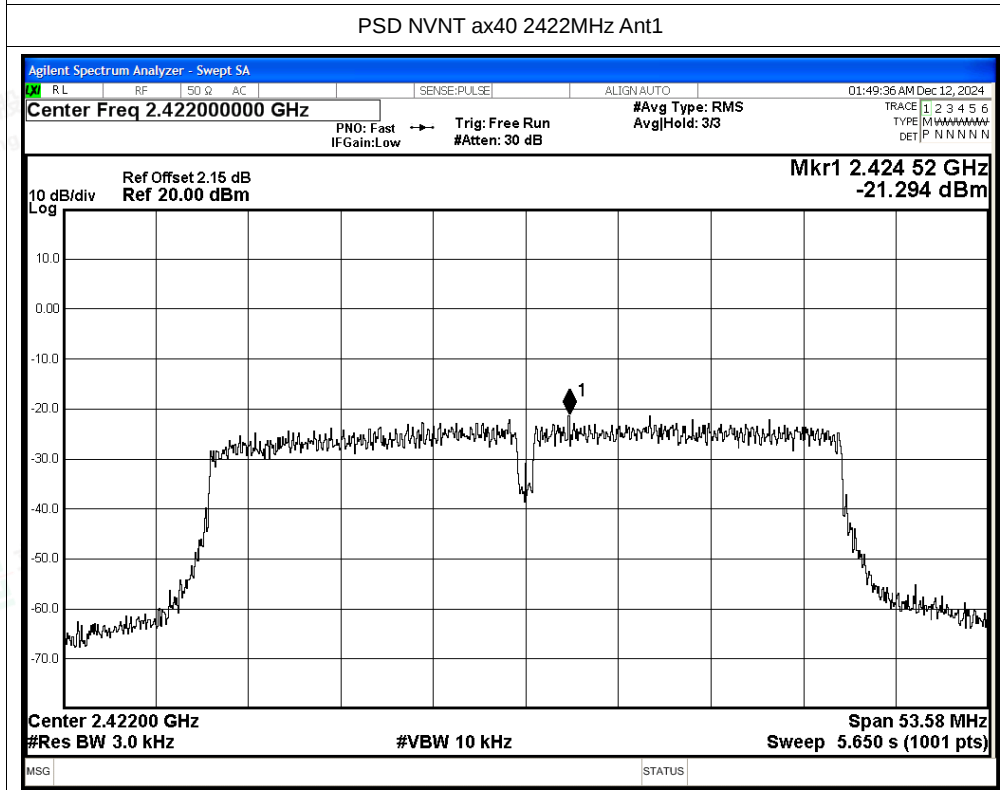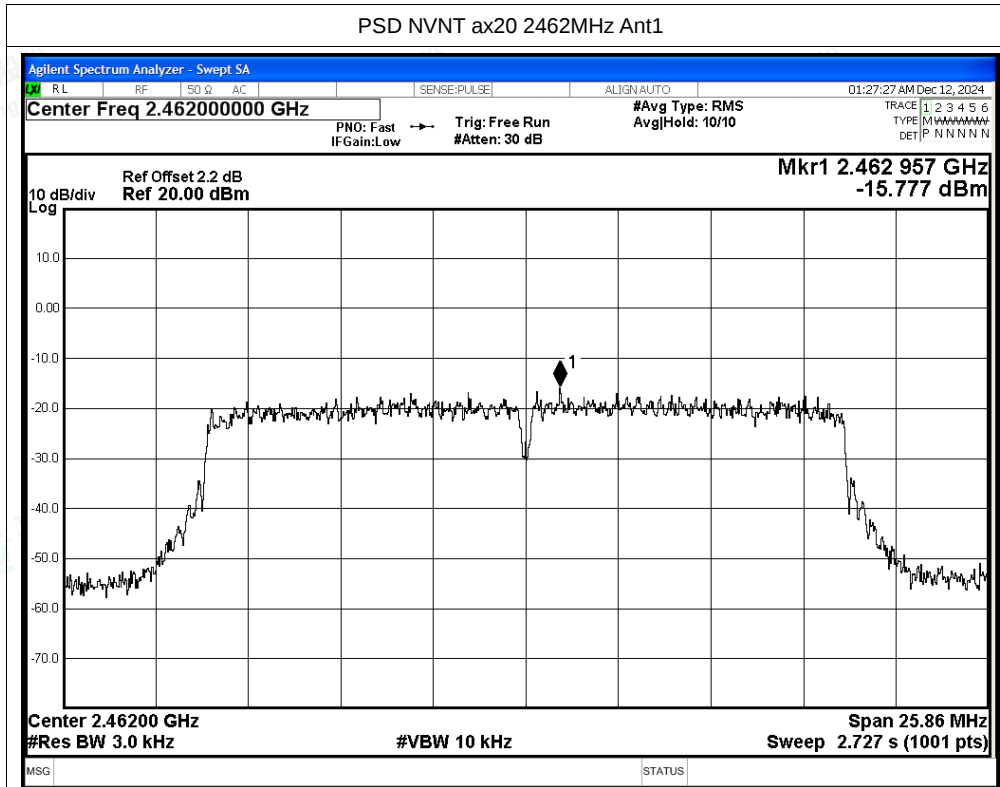




PSD NVNT ax40 2437MHz Ant1

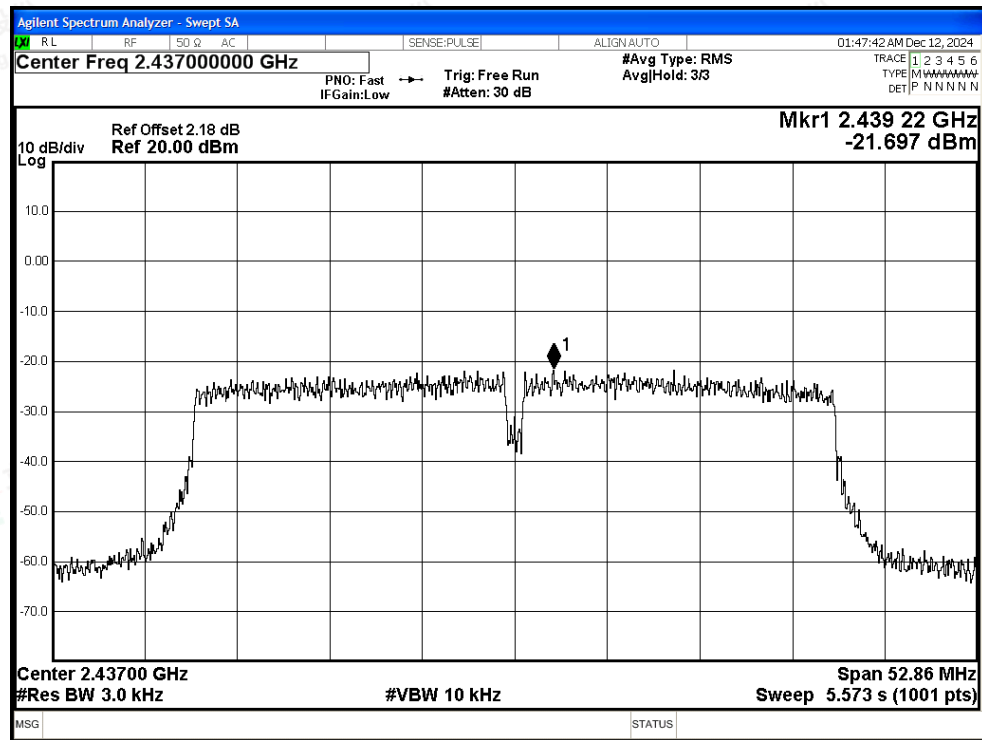

PSD NVNT ax40 2452MHz Ant1

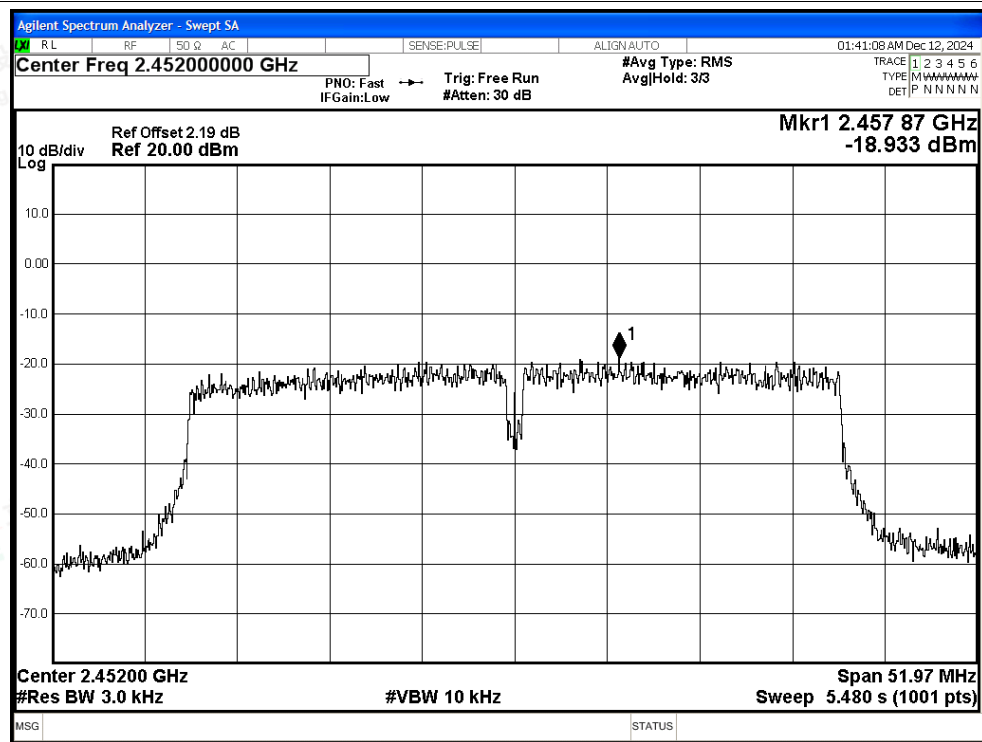



B.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-48.32	-20	Pass
NVNT	b	2462	Ant1	-60.55	-20	Pass
NVNT	g	2412	Ant1	-33.91	-20	Pass
NVNT	g	2462	Ant1	-43.7	-20	Pass
NVNT	n20	2412	Ant1	-33.69	-20	Pass
NVNT	n20	2462	Ant1	-41.79	-20	Pass
NVNT	n40	2422	Ant1	-36.01	-20	Pass
NVNT	n40	2452	Ant1	-39.72	-20	Pass
NVNT	ax20	2412	Ant1	-32.52	-20	Pass
NVNT	ax20	2462	Ant1	-39.42	-20	Pass
NVNT	ax40	2422	Ant1	-34.82	-20	Pass
NVNT	ax40	2452	Ant1	-35.92	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref

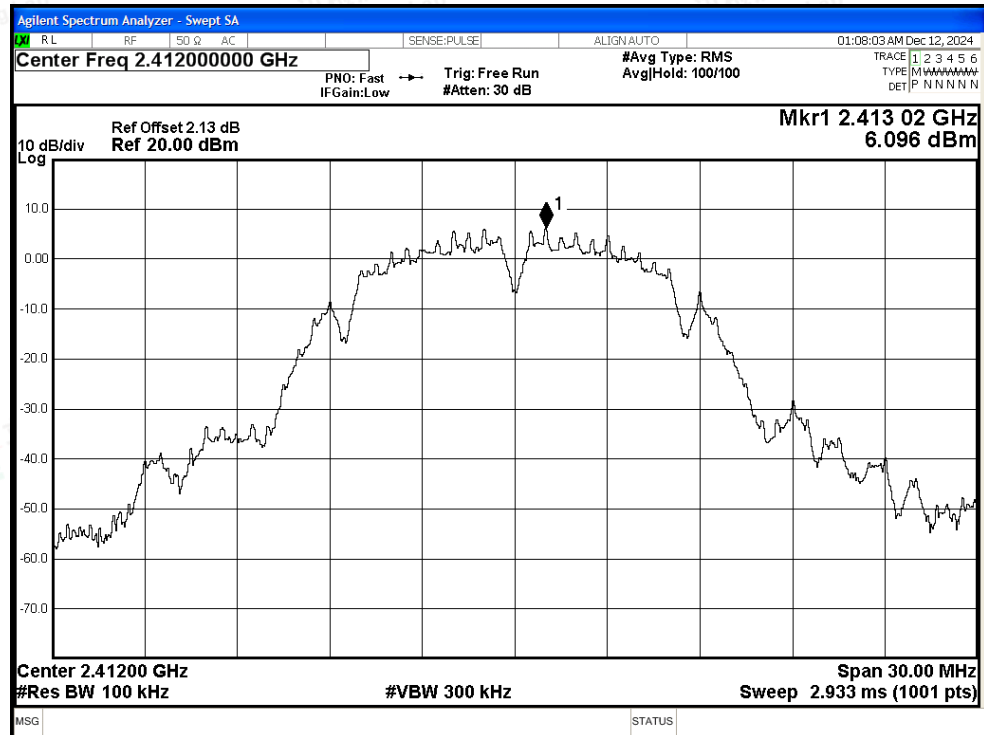

Band Edge NVNT b 2412MHz Ant1 Emission

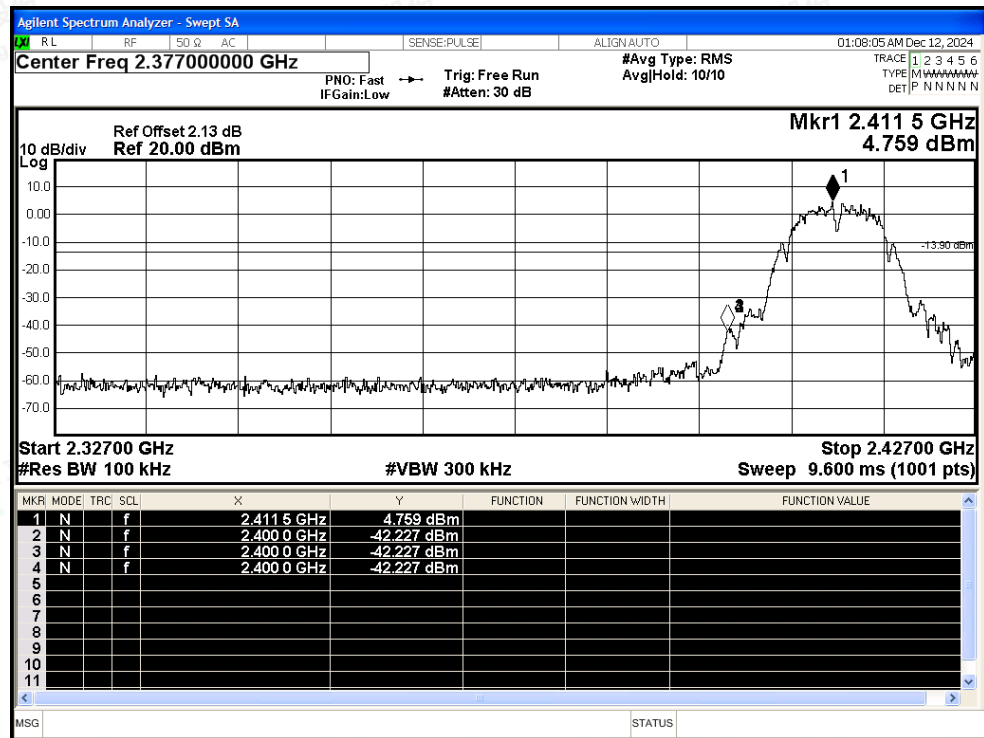




Band Edge NVNT b 2462MHz Ant1 Ref




Band Edge NVNT b 2462MHz Ant1 Emission

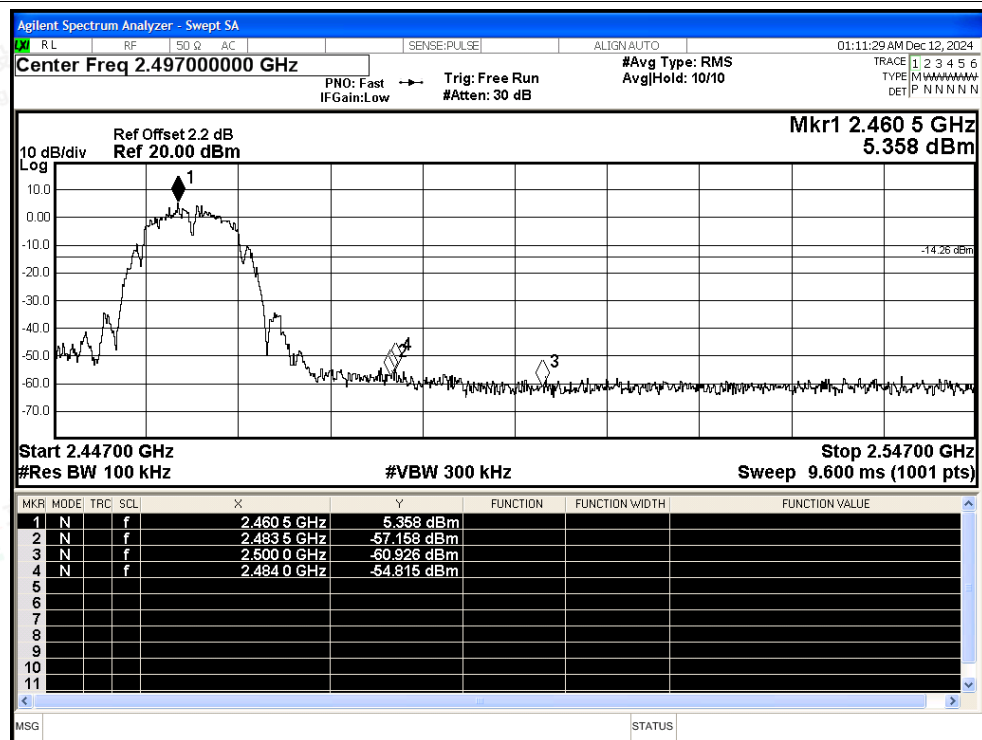




Band Edge NVNT g 2412MHz Ant1 Ref

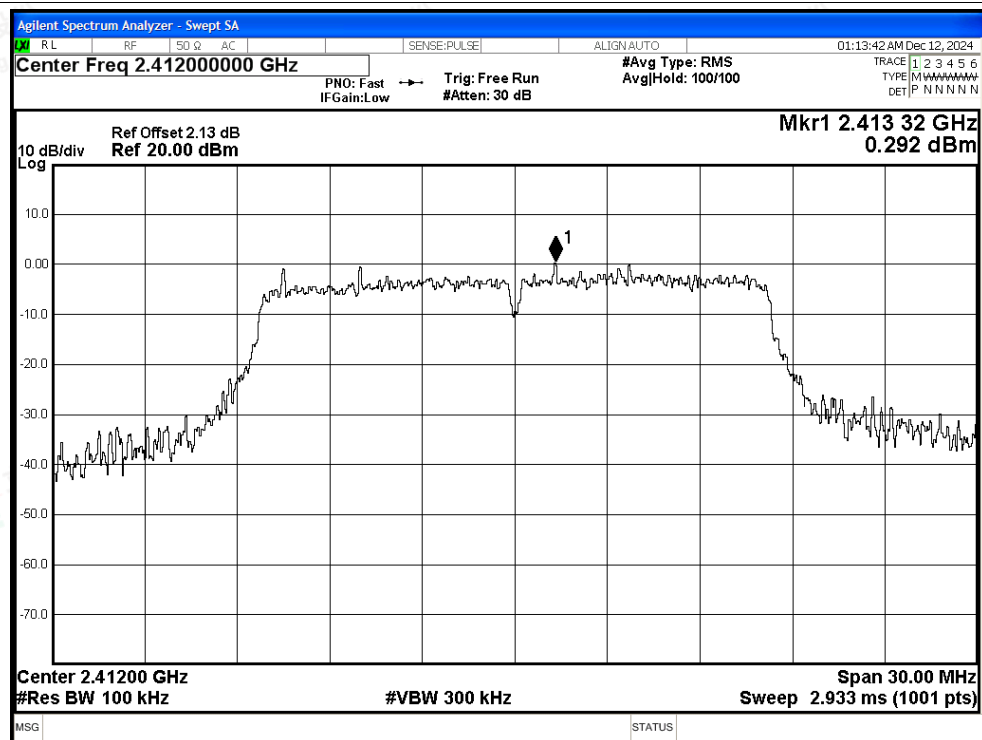


Band Edge NVNT g 2412MHz Ant1 Emission

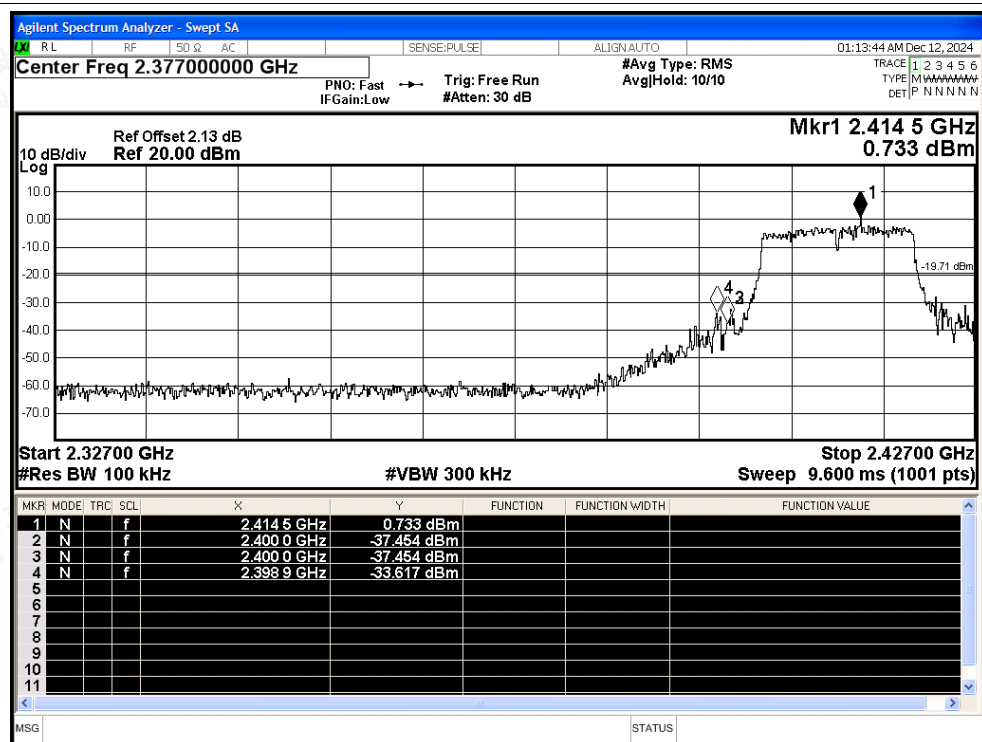




Band Edge NVNT g 2462MHz Ant1 Ref

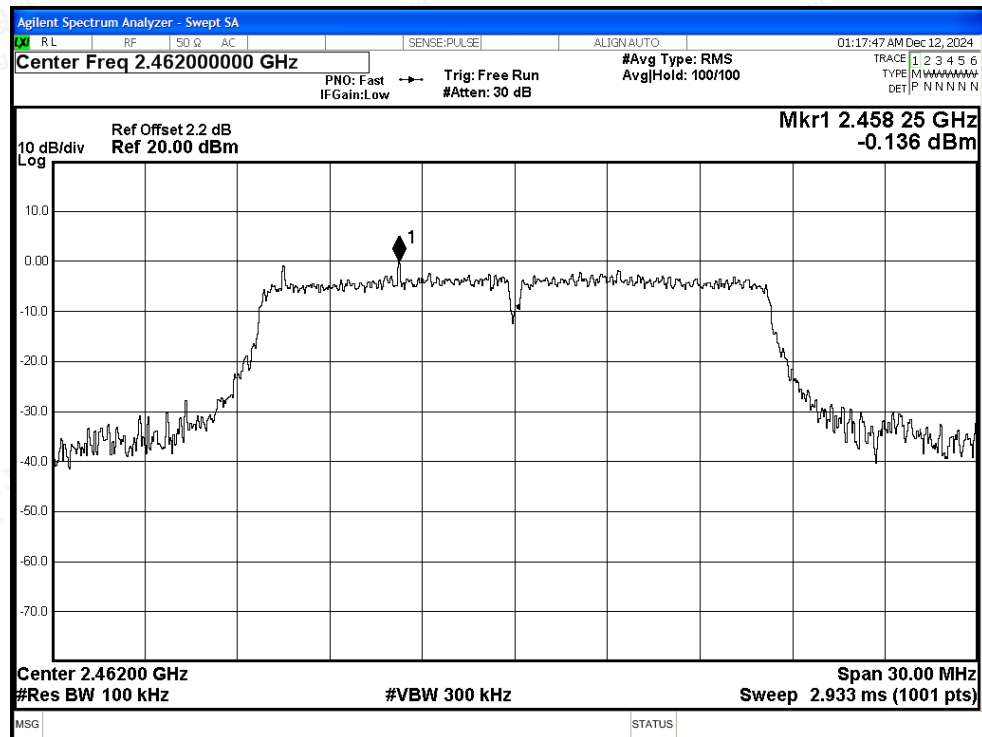

Band Edge NVNT g 2462MHz Ant1 Emission

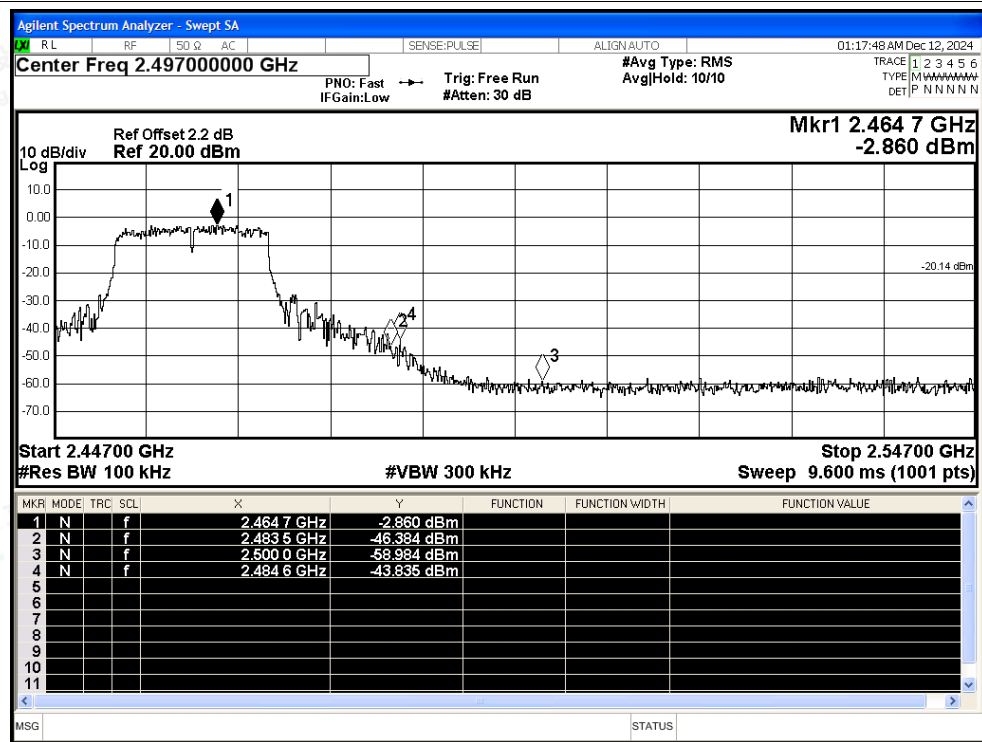

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT n20 2412MHz Ant1 Ref

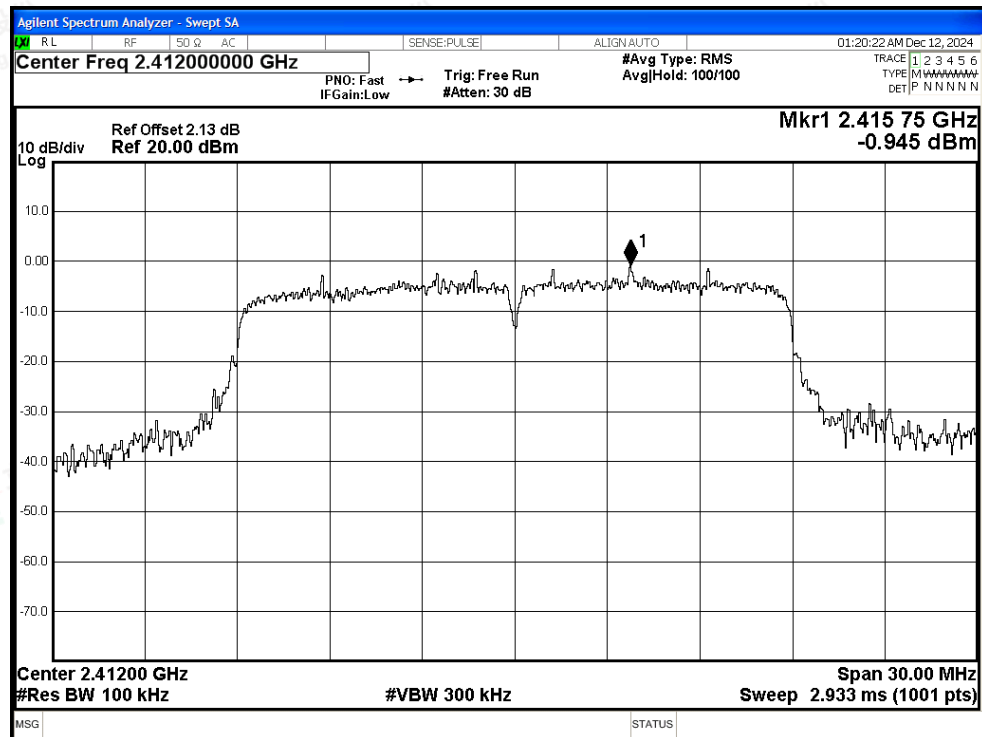


Band Edge NVNT n20 2412MHz Ant1 Emission

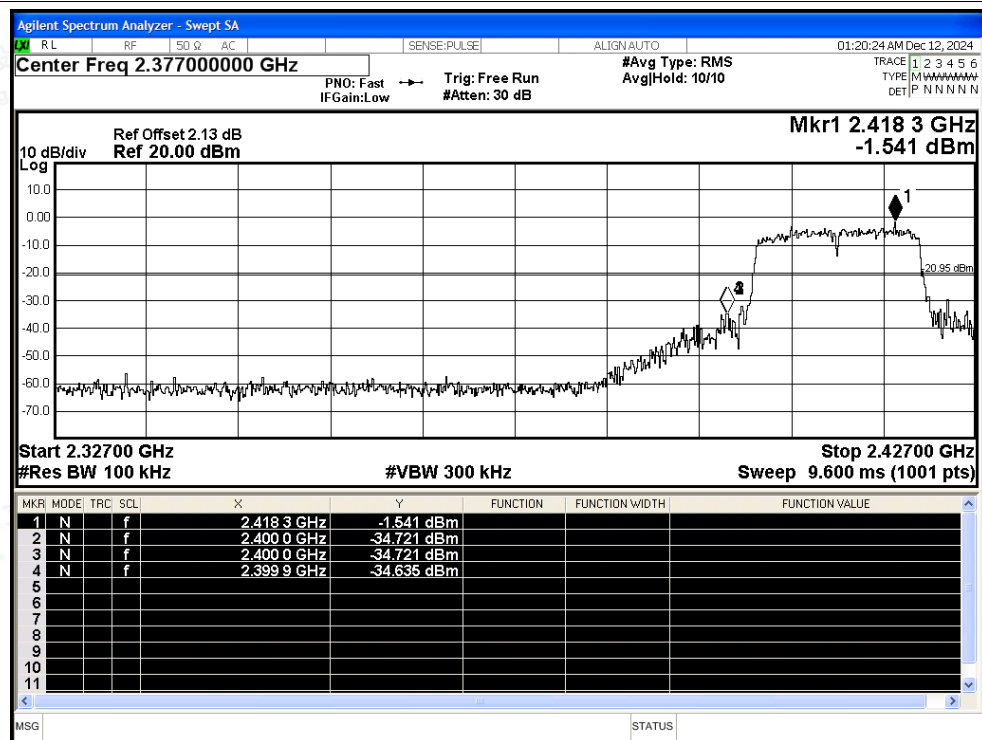




Band Edge NVNT n20 2462MHz Ant1 Ref

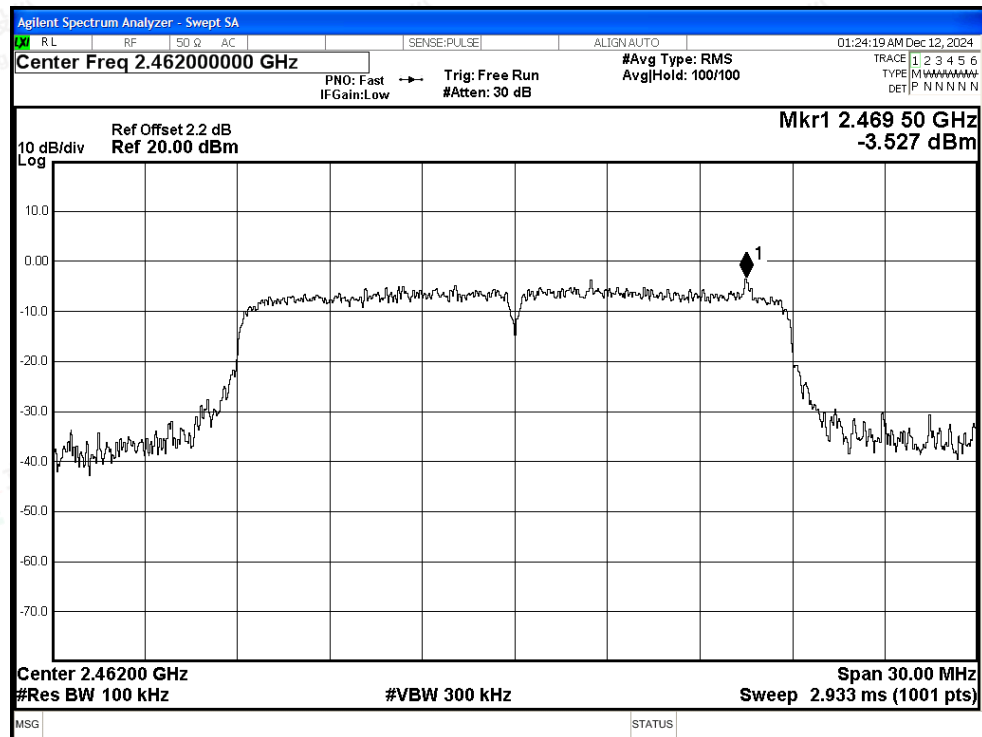


Band Edge NVNT n20 2462MHz Ant1 Emission

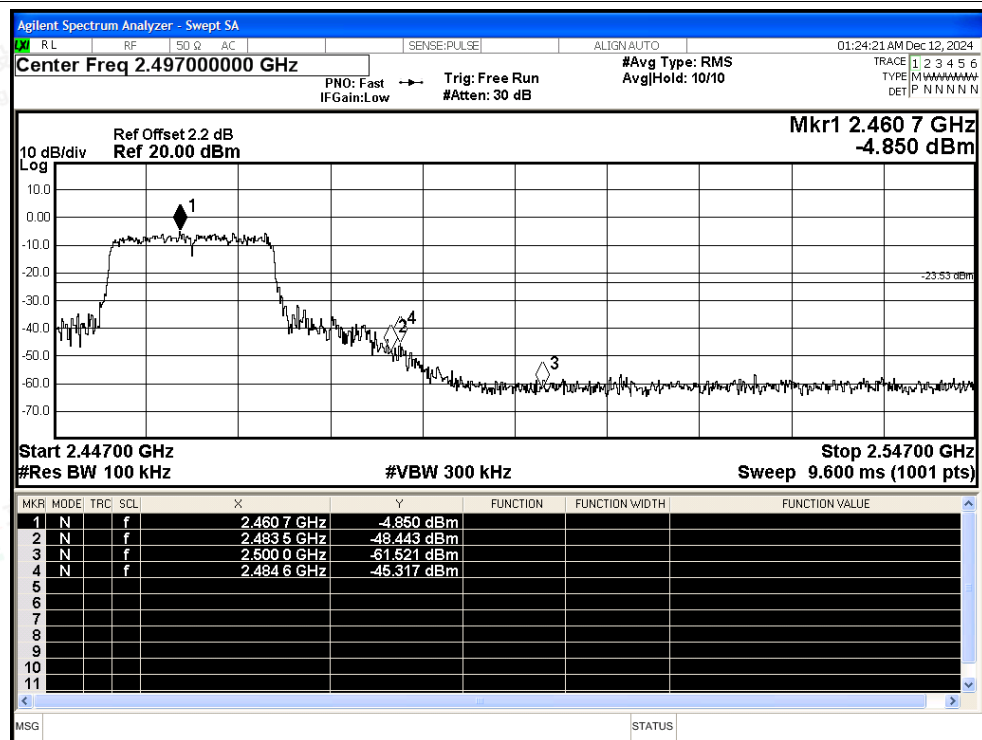




Band Edge NVNT n40 2422MHz Ant1 Ref

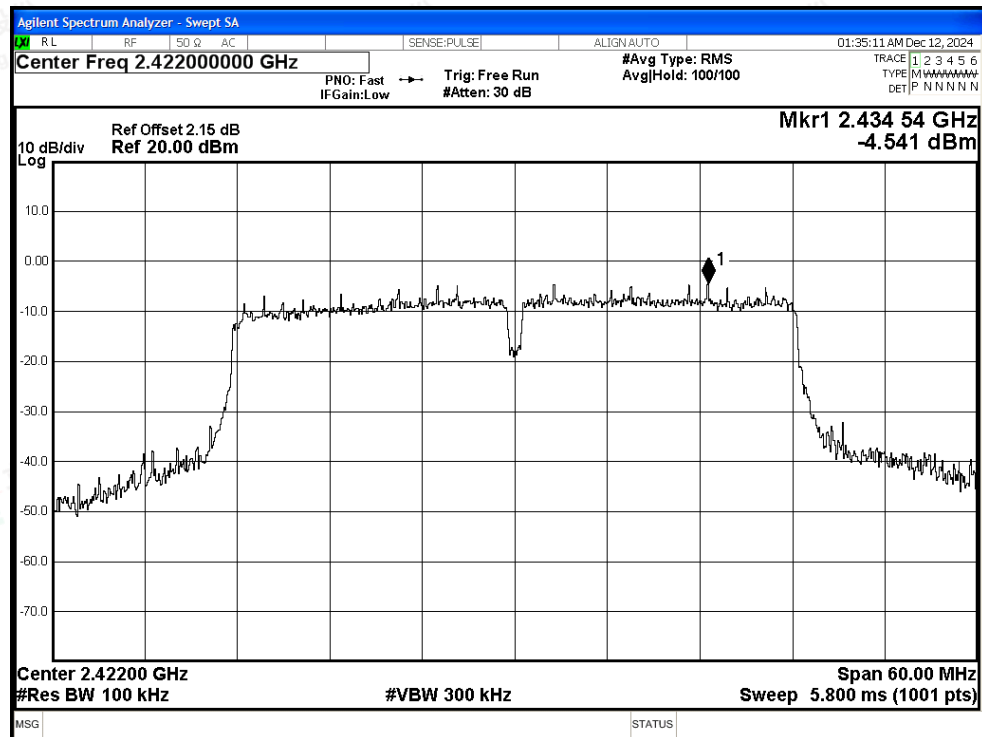


Band Edge NVNT n40 2422MHz Ant1 Emission

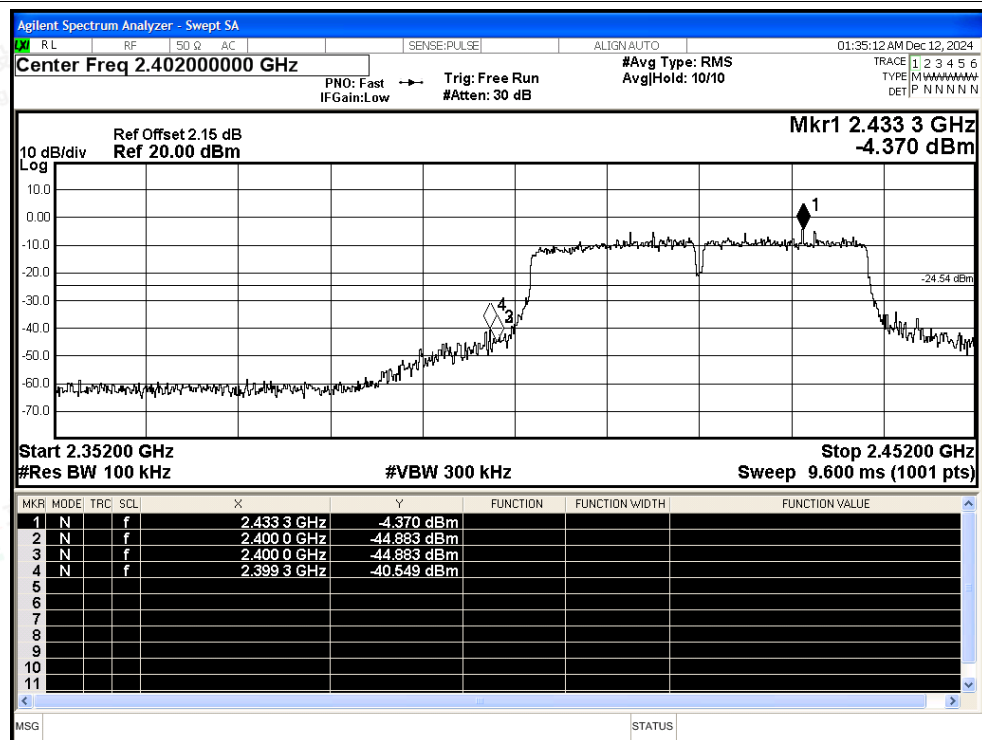




Band Edge NVNT n40 2452MHz Ant1 Ref

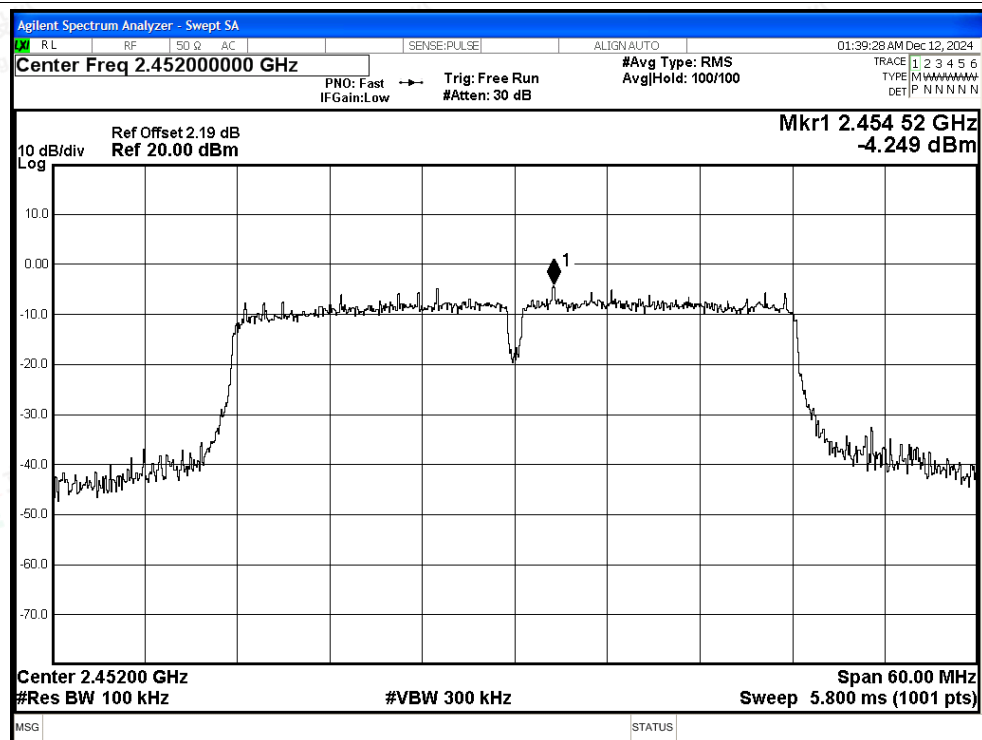


Band Edge NVNT n40 2452MHz Ant1 Emission

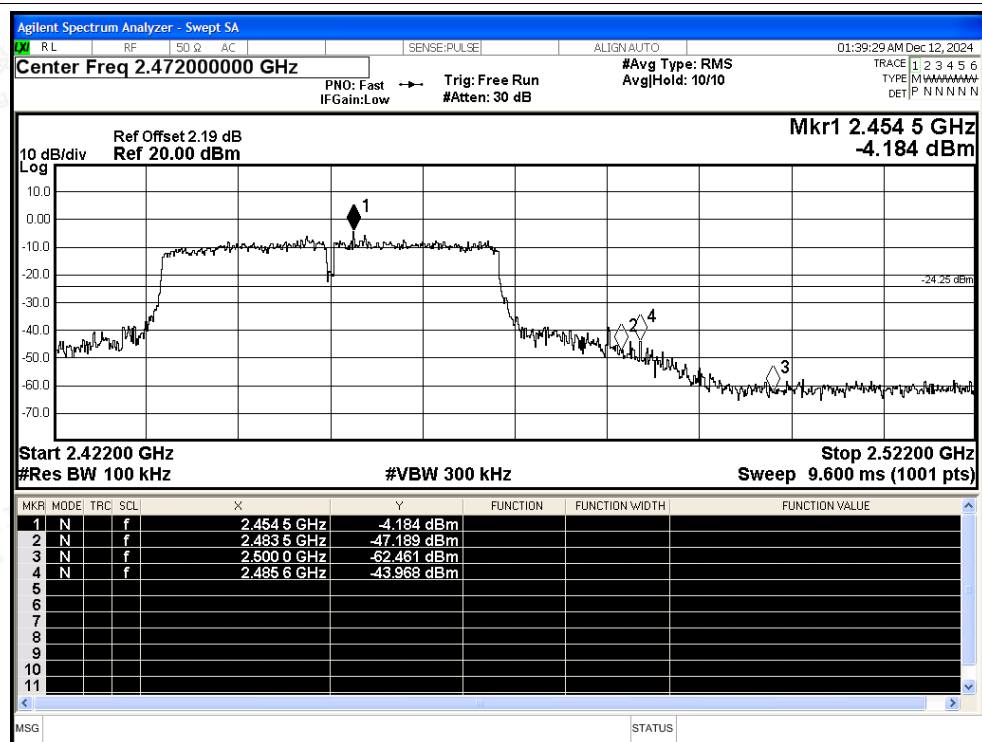




Band Edge NVNT ax20 2412MHz Ant1 Ref

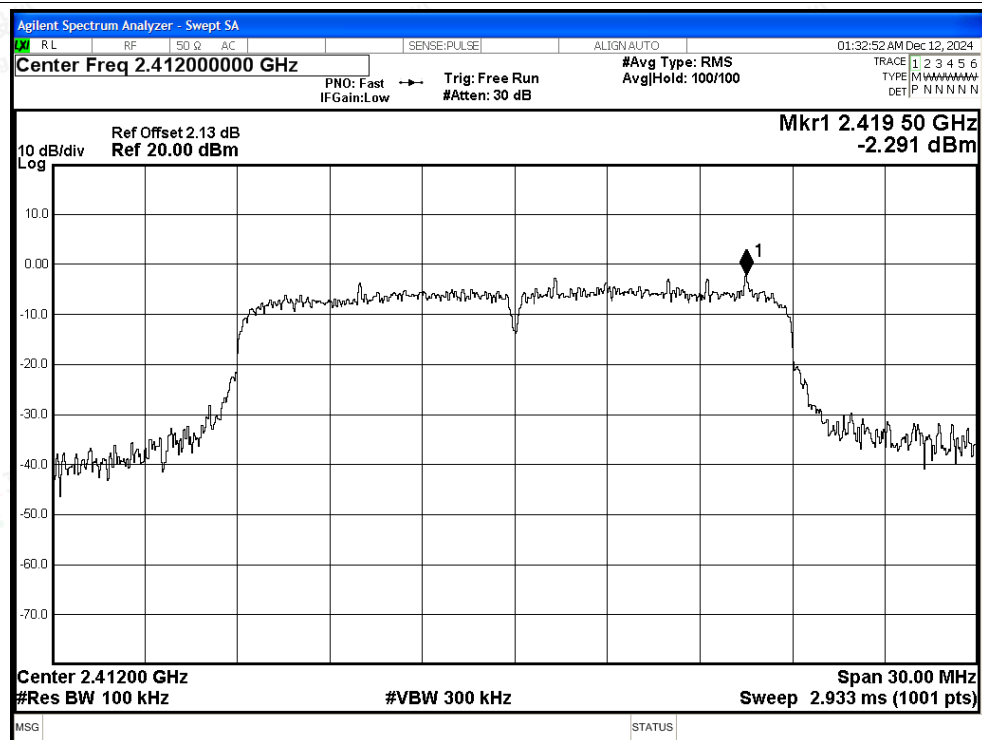


Band Edge NVNT ax20 2412MHz Ant1 Emission

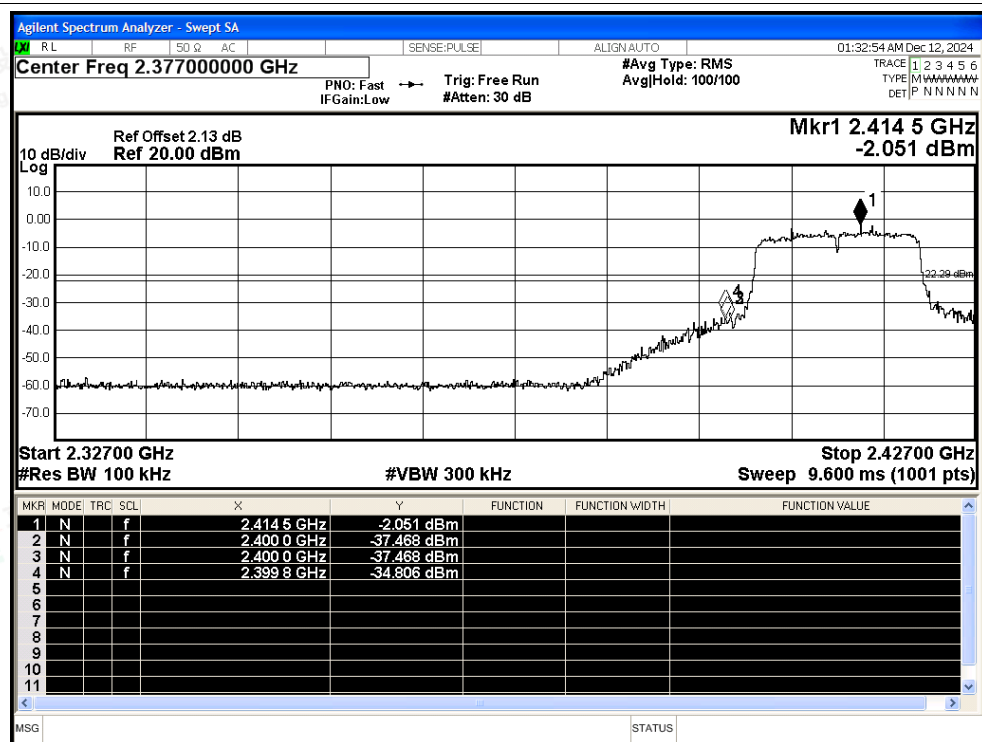




Band Edge NVNT ax20 2462MHz Ant1 Ref

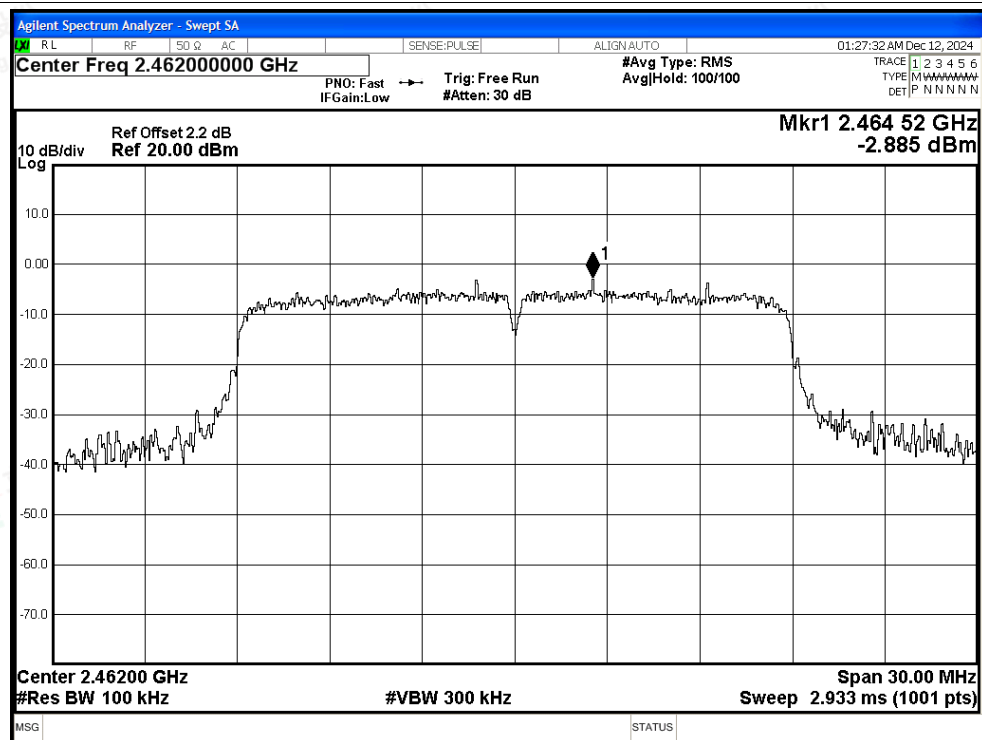


Band Edge NVNT ax20 2462MHz Ant1 Emission

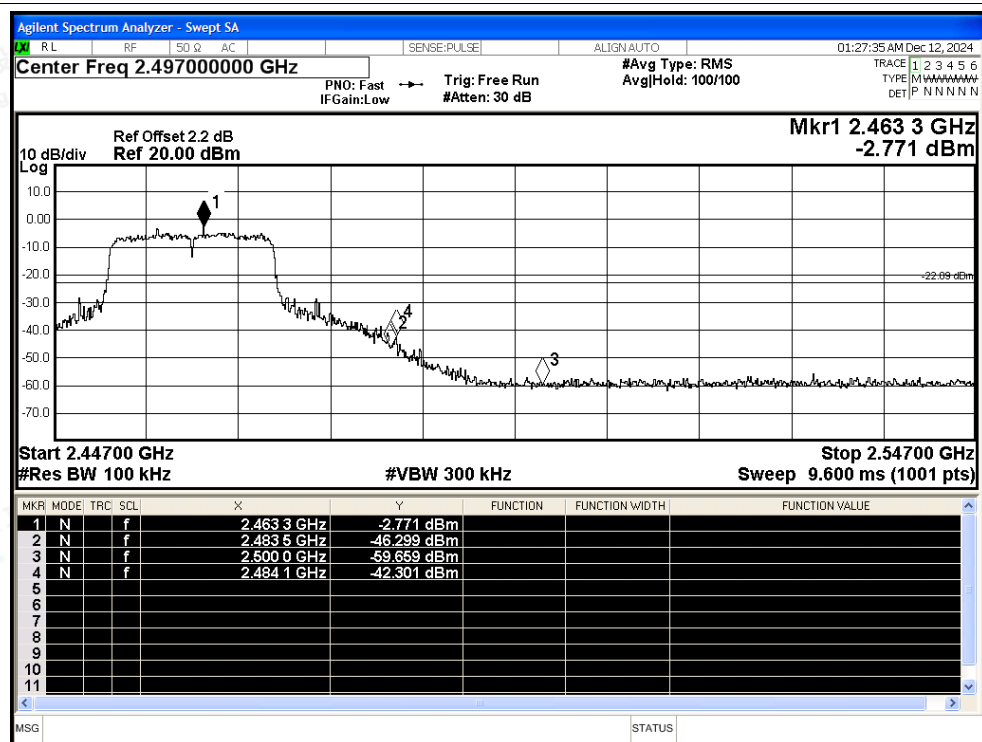




Band Edge NVNT ax40 2422MHz Ant1 Ref

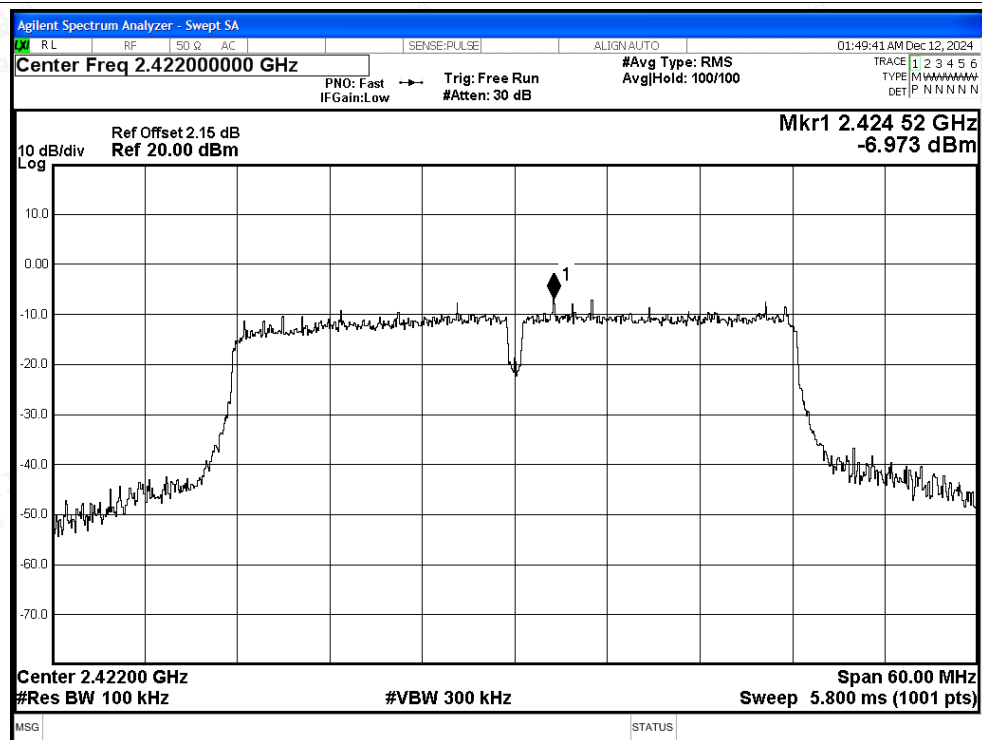


Band Edge NVNT ax40 2422MHz Ant1 Emission

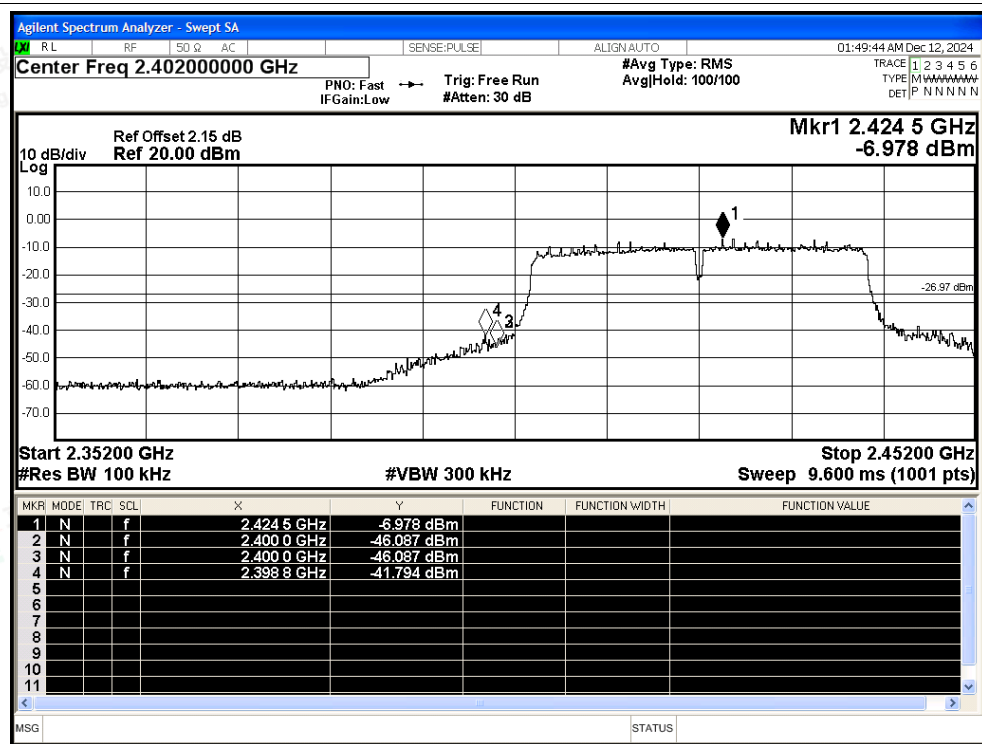




Band Edge NVNT ax40 2452MHz Ant1 Ref

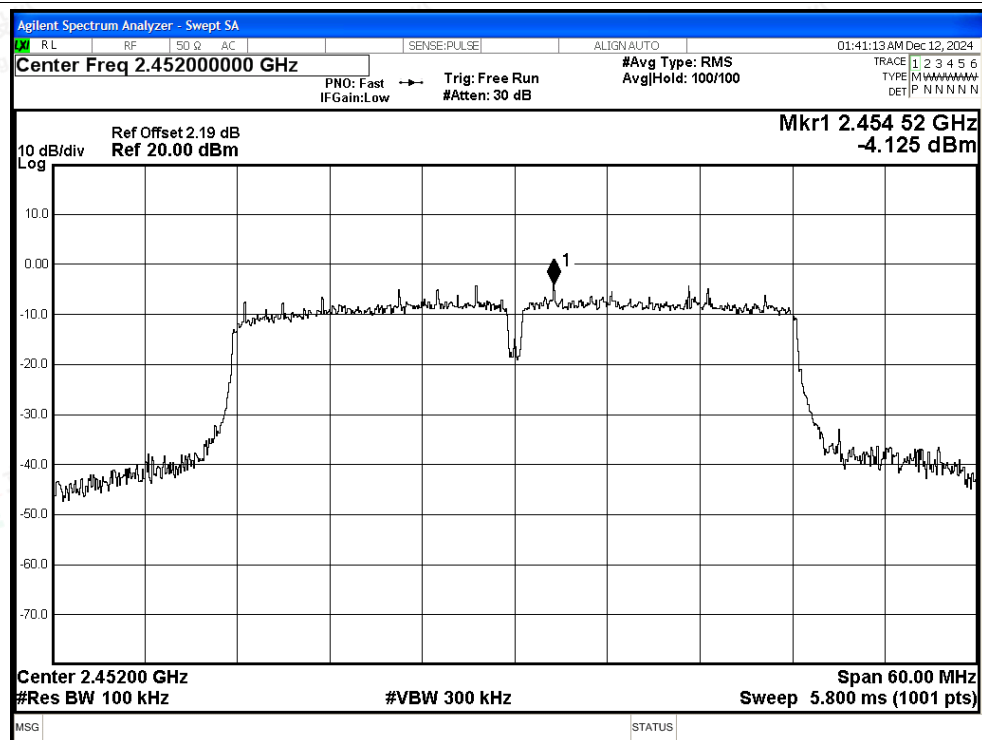

Band Edge NVNT ax40 2452MHz Ant1 Emission

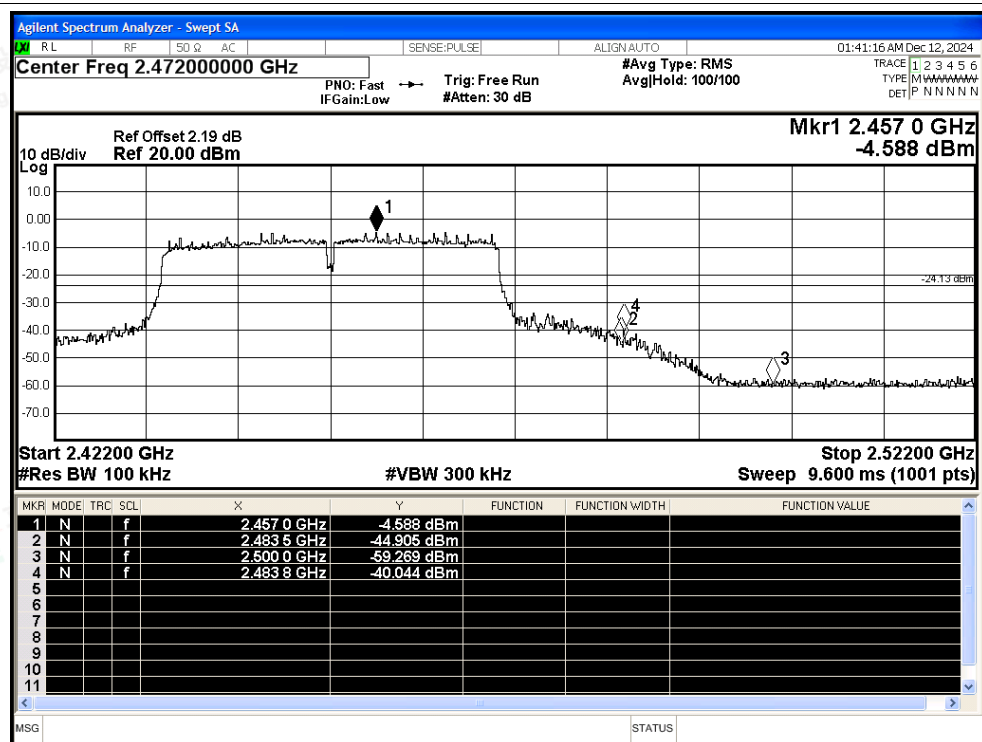



B.5 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-51	-20	Pass
NVNT	b	2437	Ant1	-51.84	-20	Pass
NVNT	b	2462	Ant1	-50.38	-20	Pass
NVNT	g	2412	Ant1	-46	-20	Pass
NVNT	g	2437	Ant1	-46.36	-20	Pass
NVNT	g	2462	Ant1	-44.57	-20	Pass
NVNT	n20	2412	Ant1	-43.95	-20	Pass
NVNT	n20	2437	Ant1	-42.39	-20	Pass
NVNT	n20	2462	Ant1	-42.36	-20	Pass
NVNT	n40	2422	Ant1	-40.55	-20	Pass
NVNT	n40	2437	Ant1	-40.31	-20	Pass
NVNT	n40	2452	Ant1	-41.23	-20	Pass
NVNT	ax20	2412	Ant1	-43.42	-20	Pass
NVNT	ax20	2437	Ant1	-41.4	-20	Pass
NVNT	ax20	2462	Ant1	-41.81	-20	Pass
NVNT	ax40	2422	Ant1	-37.8	-20	Pass
NVNT	ax40	2437	Ant1	-37.77	-20	Pass
NVNT	ax40	2452	Ant1	-40.26	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref

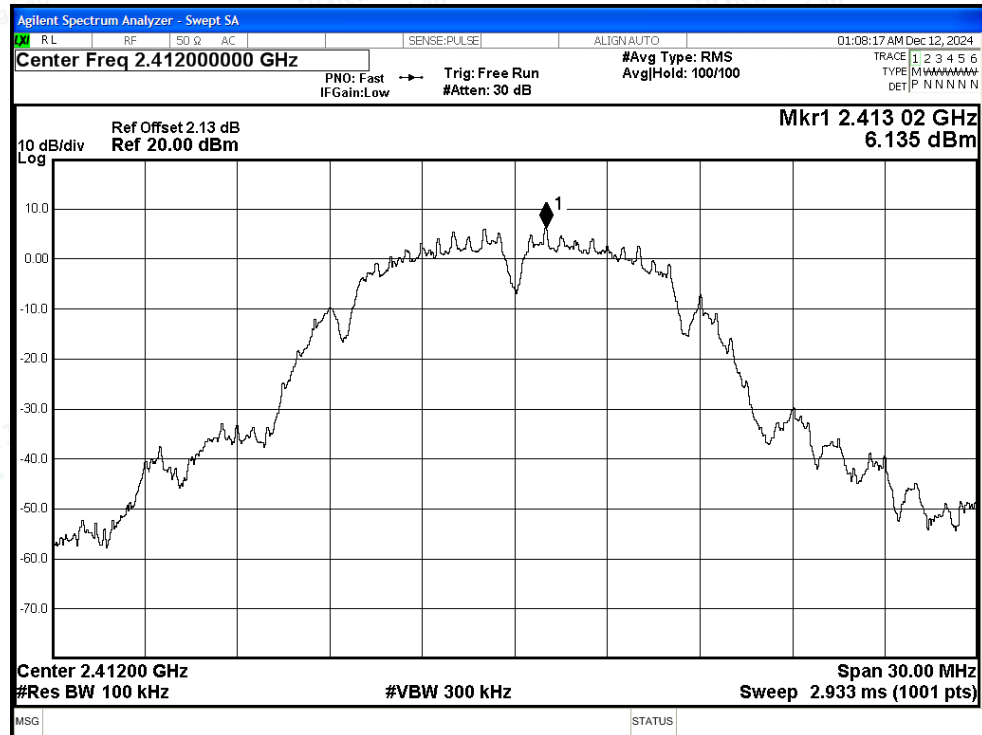


Tx. Spurious NVNT b 2412MHz Ant1 Emission

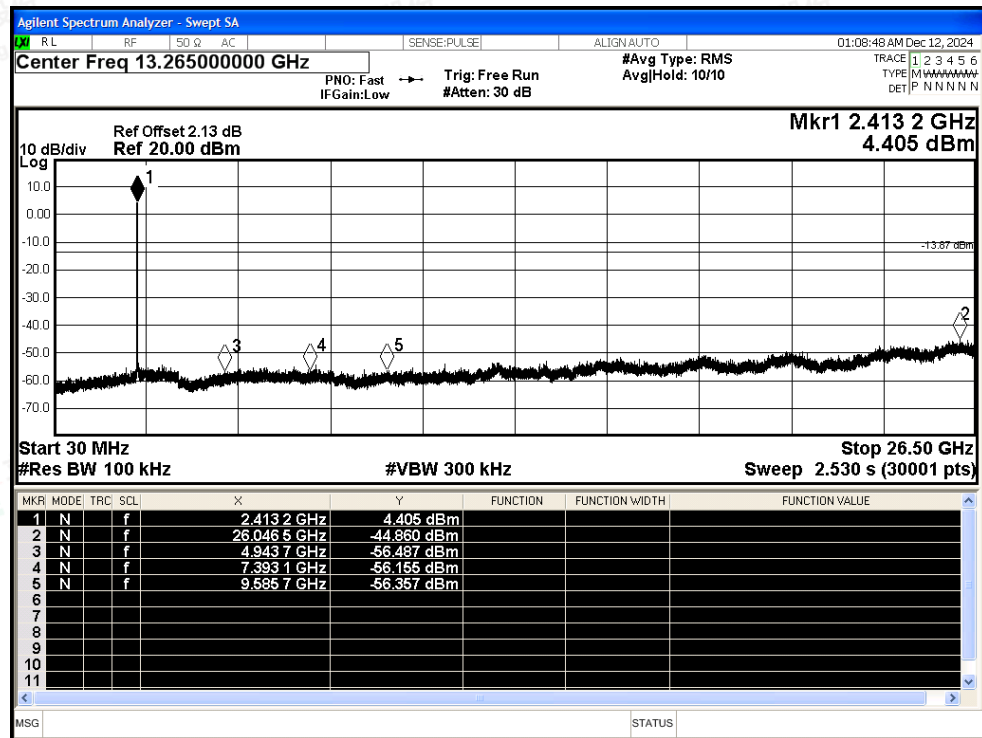




Tx. Spurious NVNT b 2437MHz Ant1 Ref

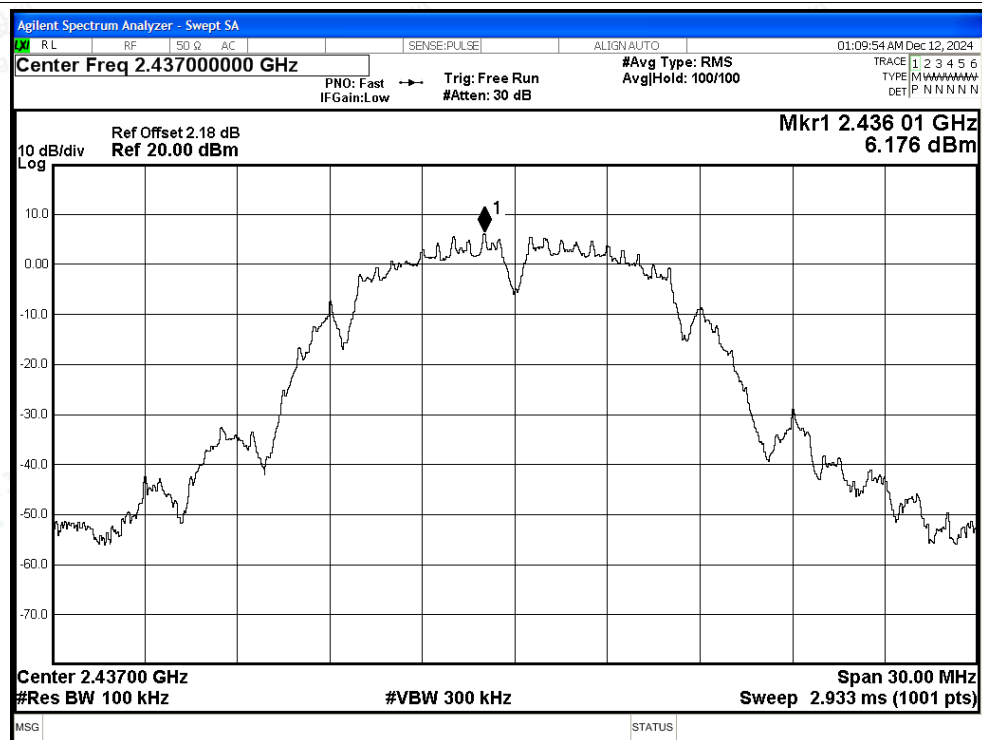


Tx. Spurious NVNT b 2437MHz Ant1 Emission

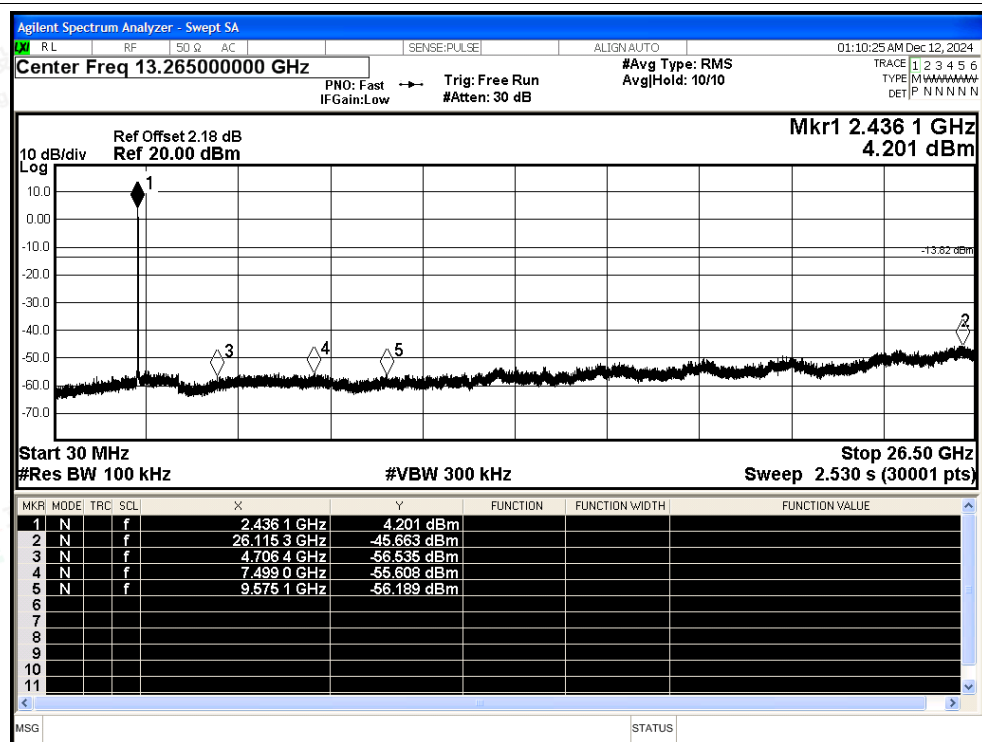




Tx. Spurious NVNT b 2462MHz Ant1 Ref

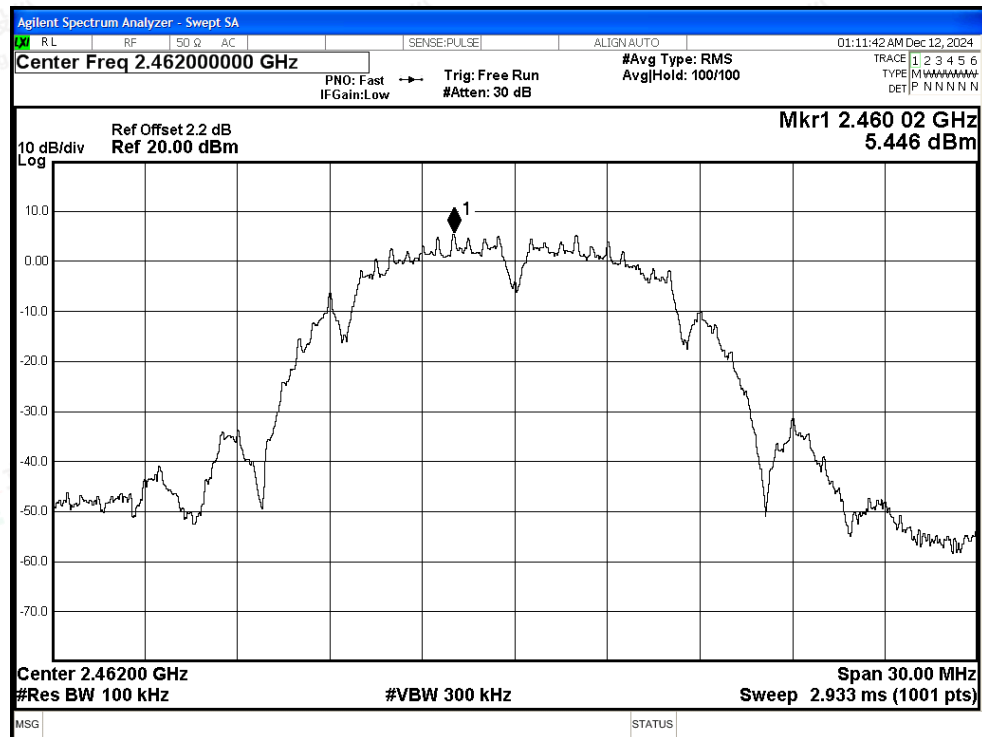


Tx. Spurious NVNT b 2462MHz Ant1 Emission

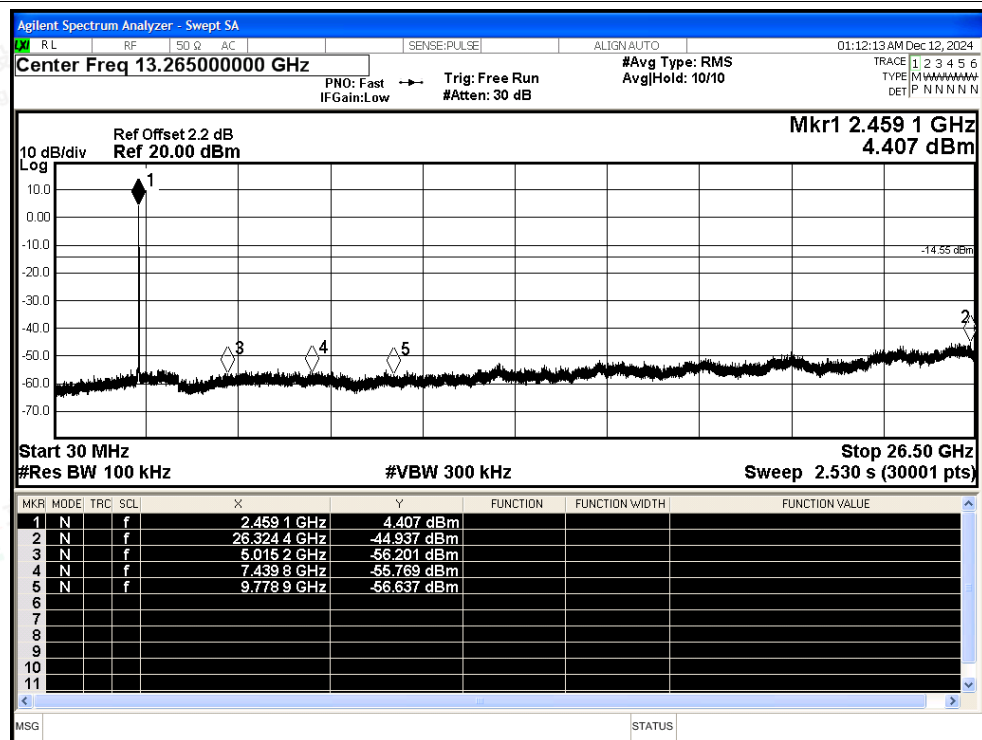




Tx. Spurious NVNT g 2412MHz Ant1 Ref

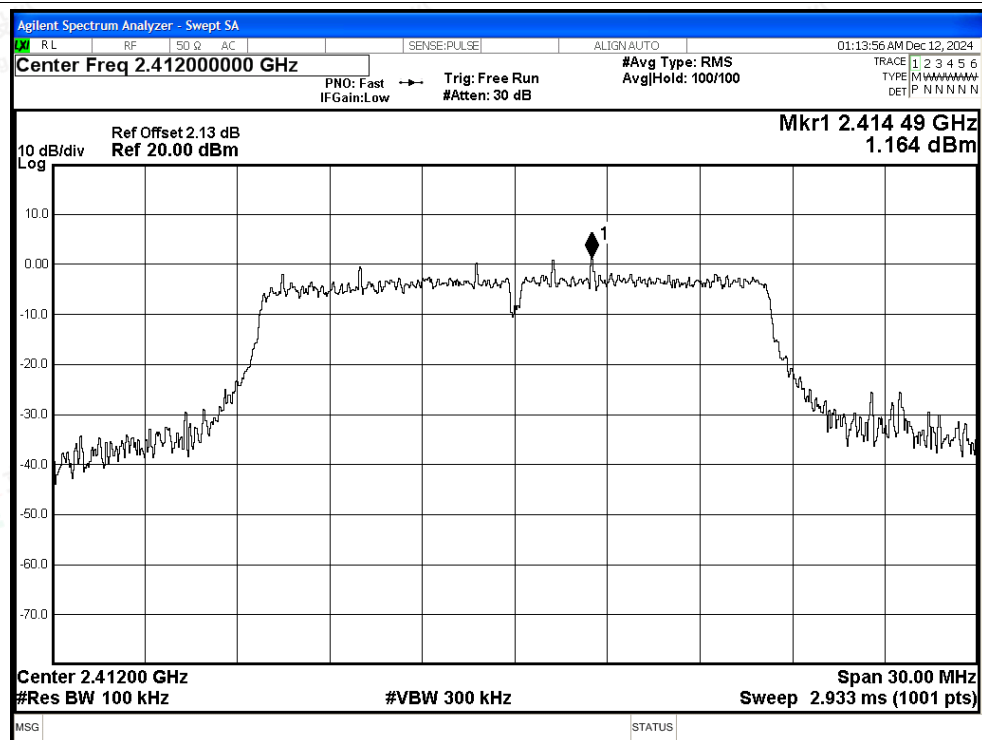


Tx. Spurious NVNT g 2412MHz Ant1 Emission

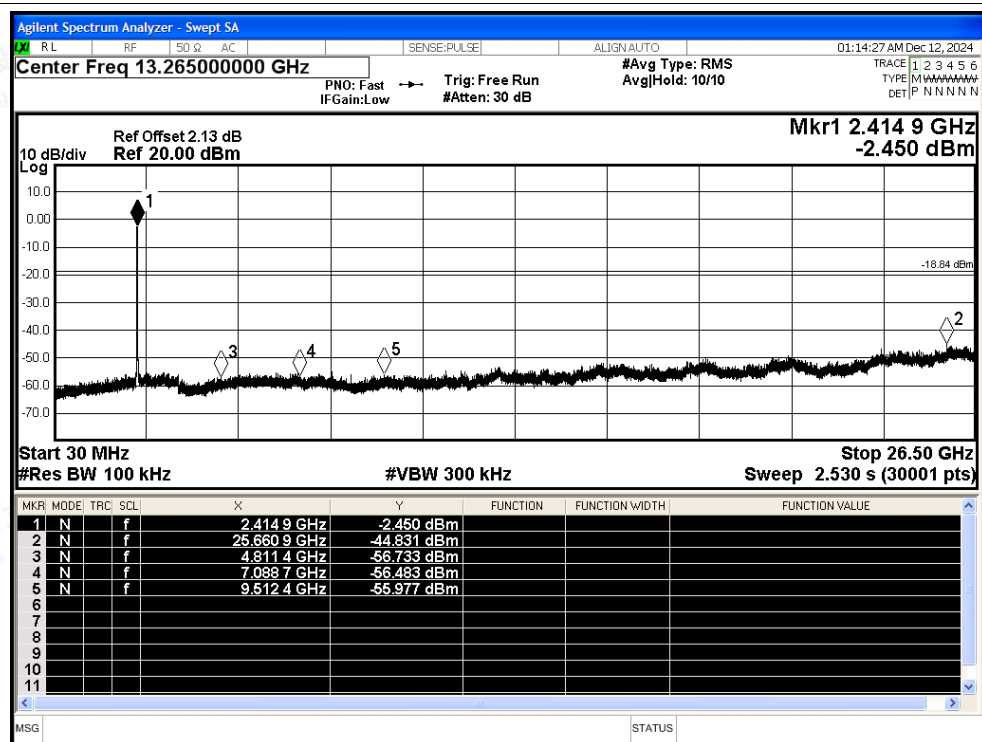




Tx. Spurious NVNT g 2437MHz Ant1 Ref

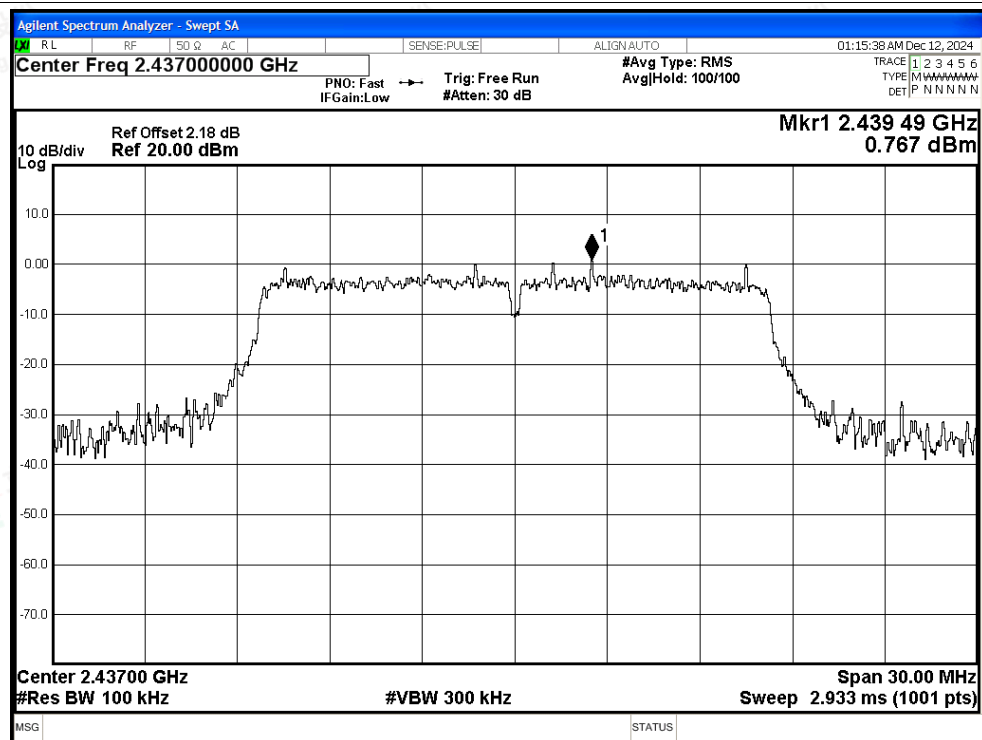


Tx. Spurious NVNT g 2437MHz Ant1 Emission

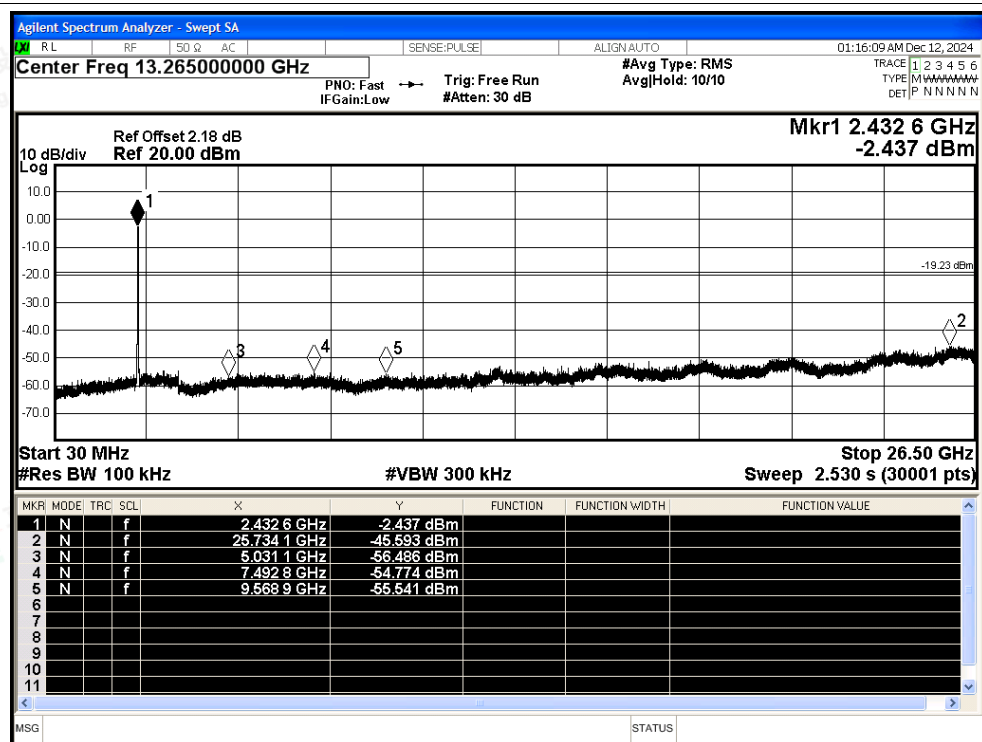




Tx. Spurious NVNT g 2462MHz Ant1 Ref

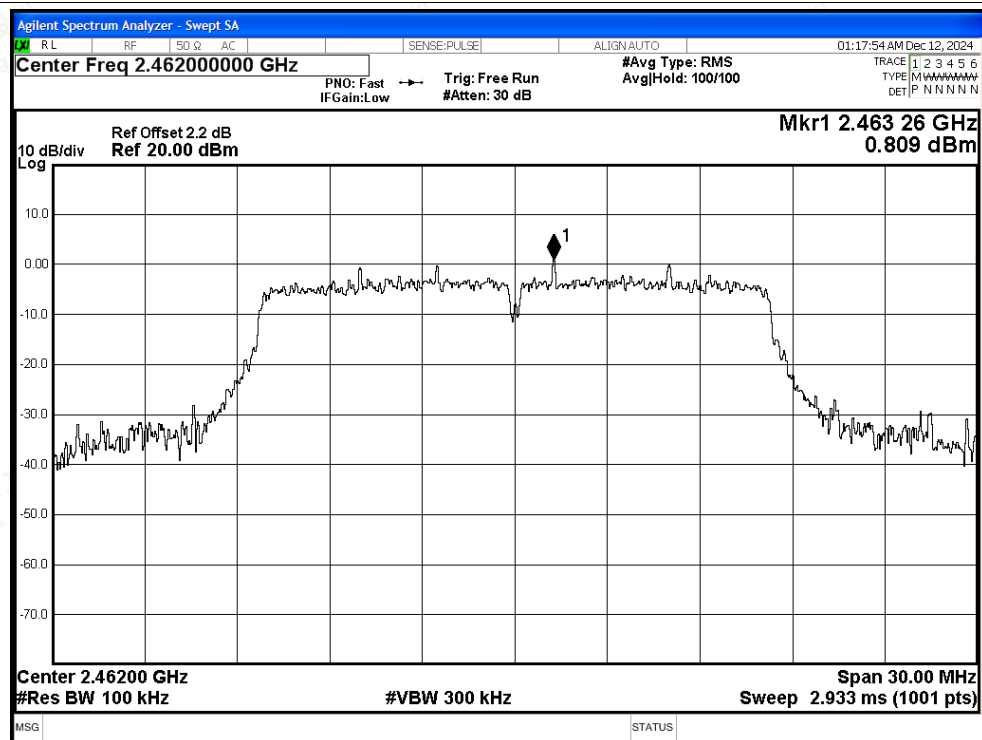


Tx. Spurious NVNT g 2462MHz Ant1 Emission

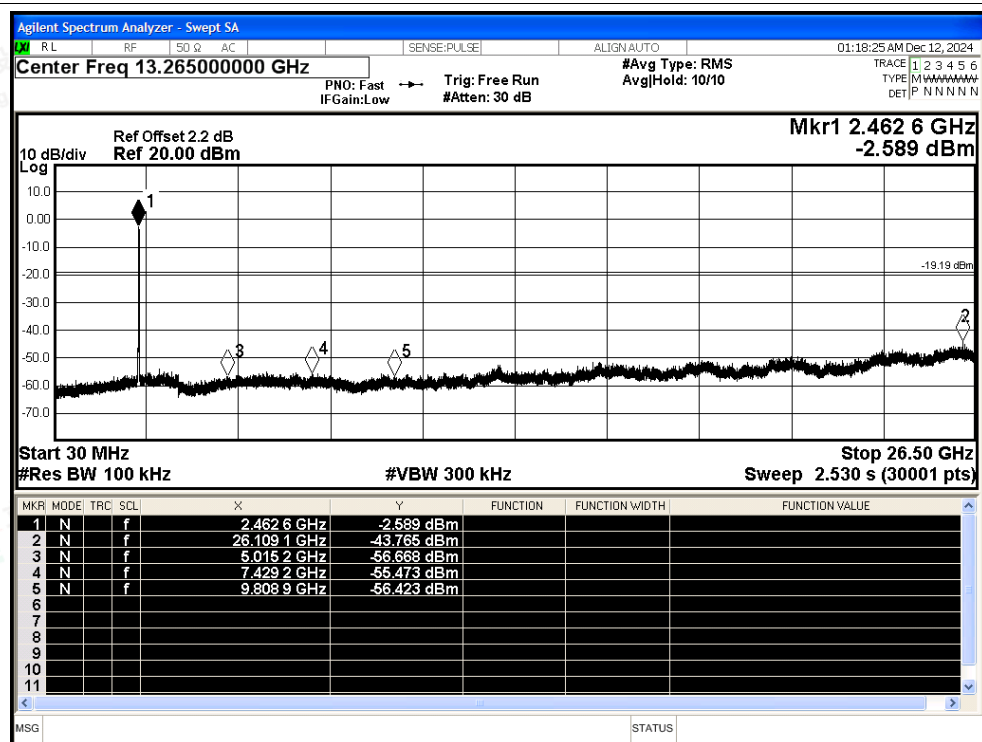




Tx. Spurious NVNT n20 2412MHz Ant1 Ref

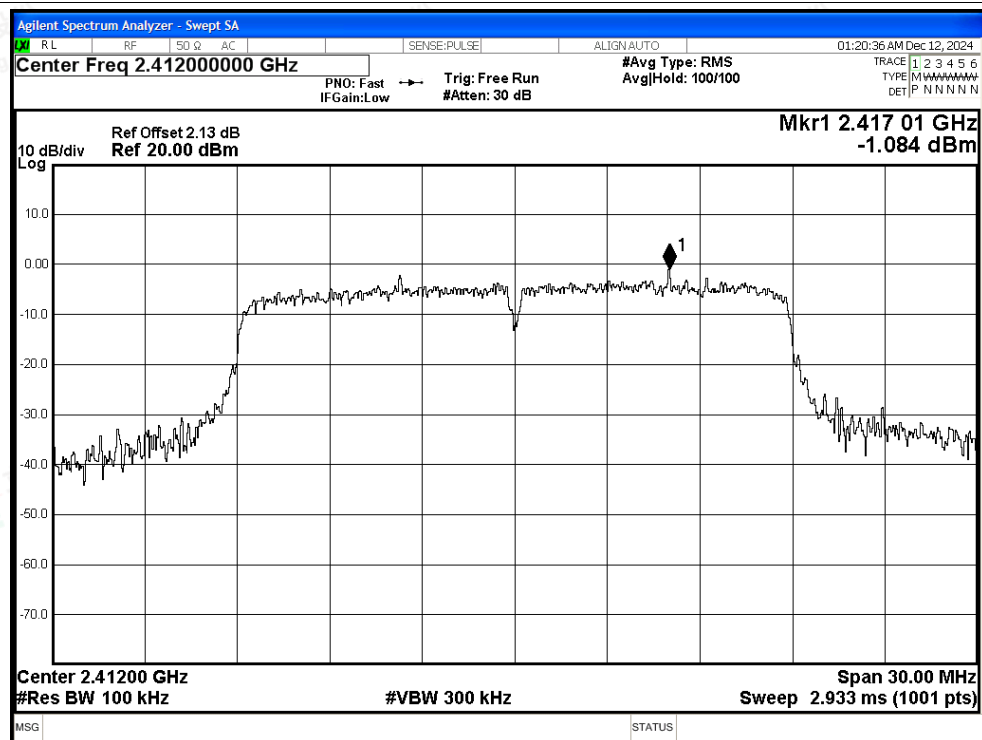


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

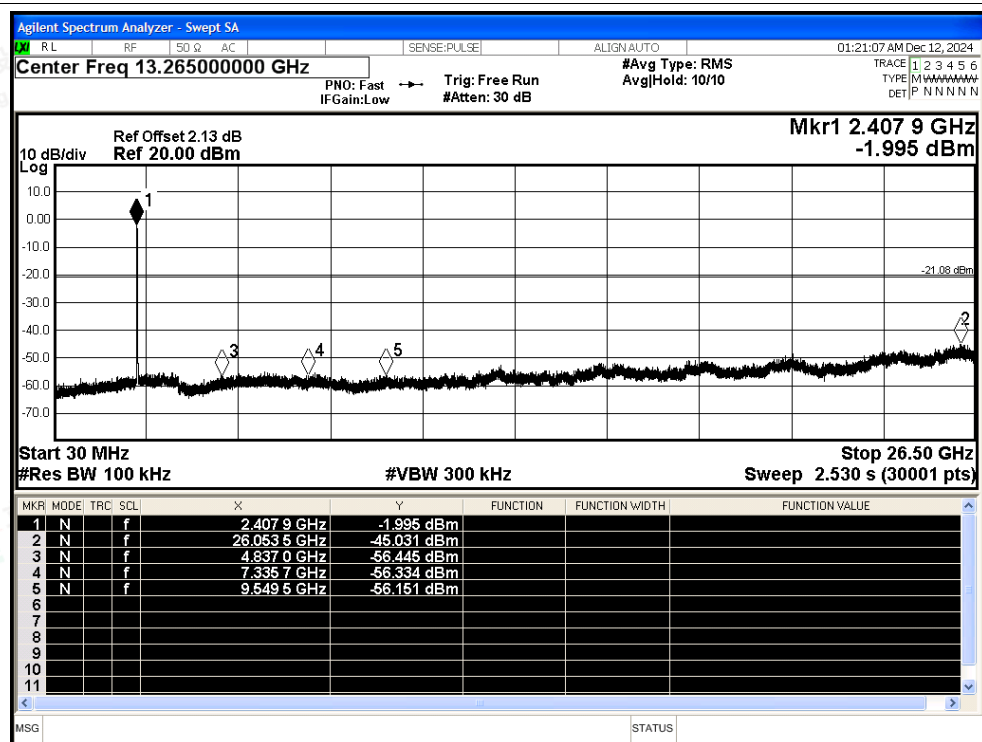




Tx. Spurious NVNT n20 2437MHz Ant1 Ref

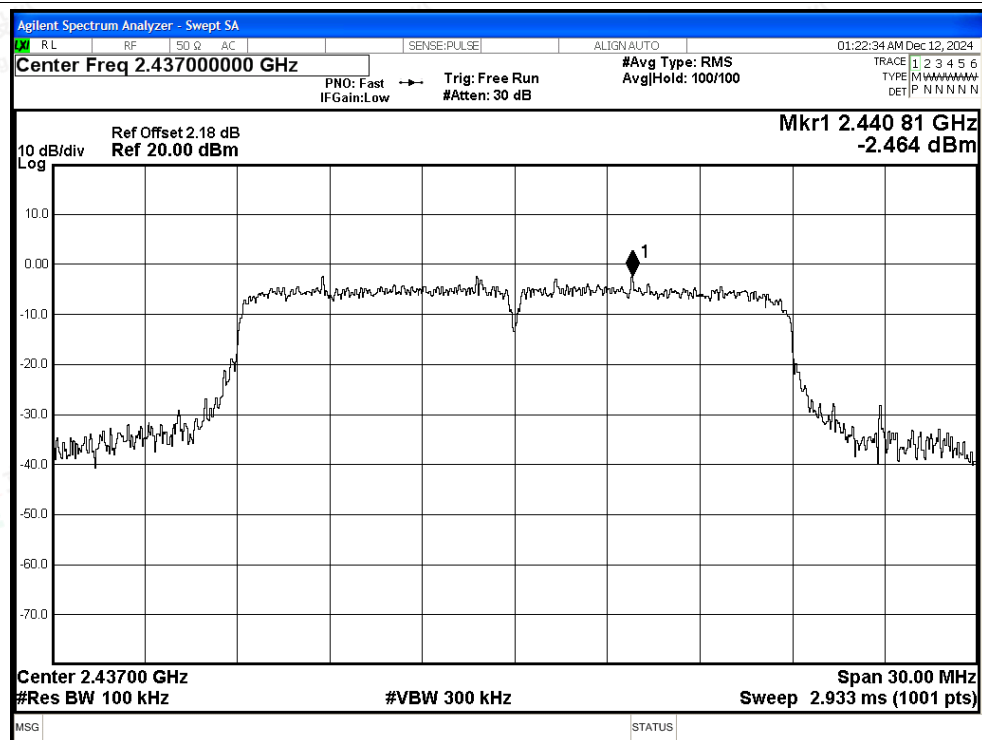


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

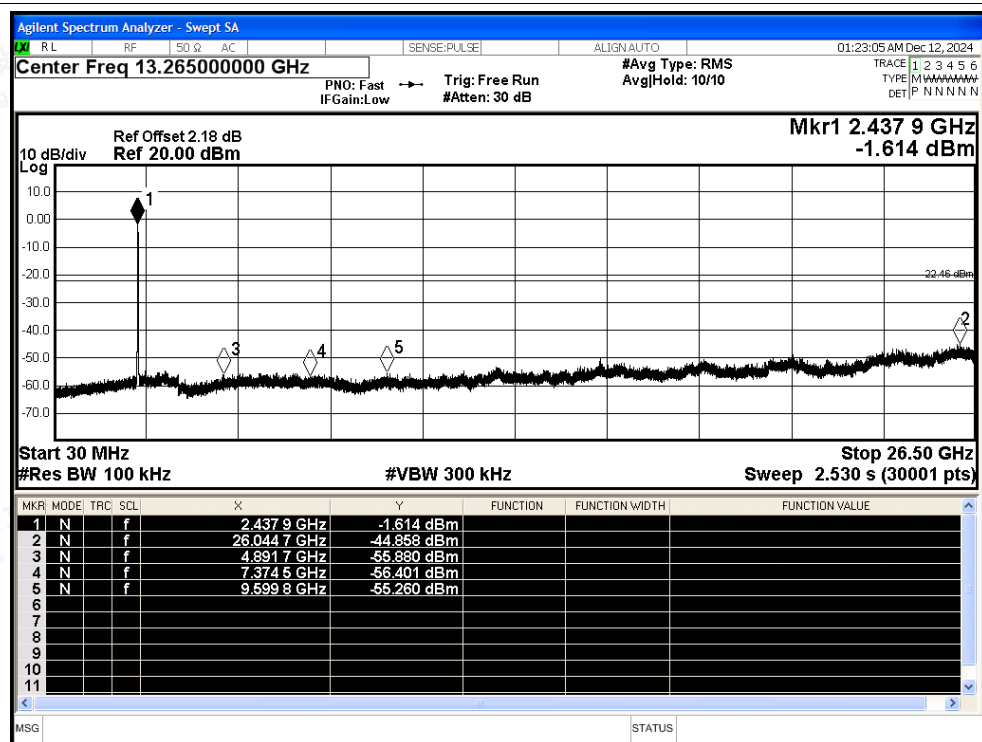




Tx. Spurious NVNT n20 2462MHz Ant1 Ref

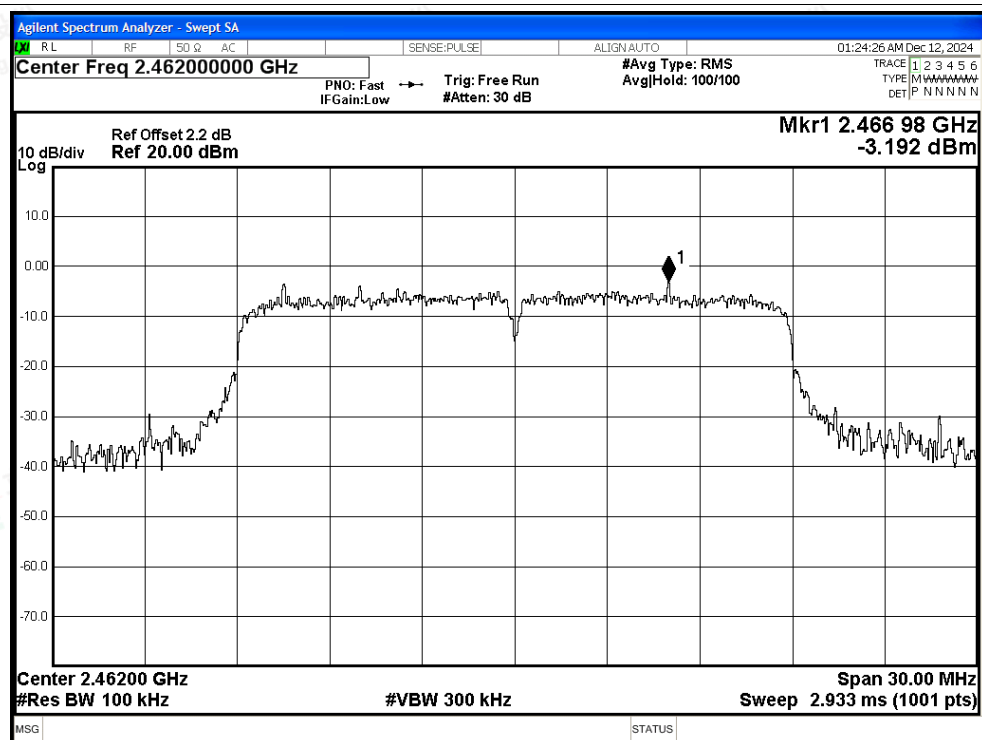


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

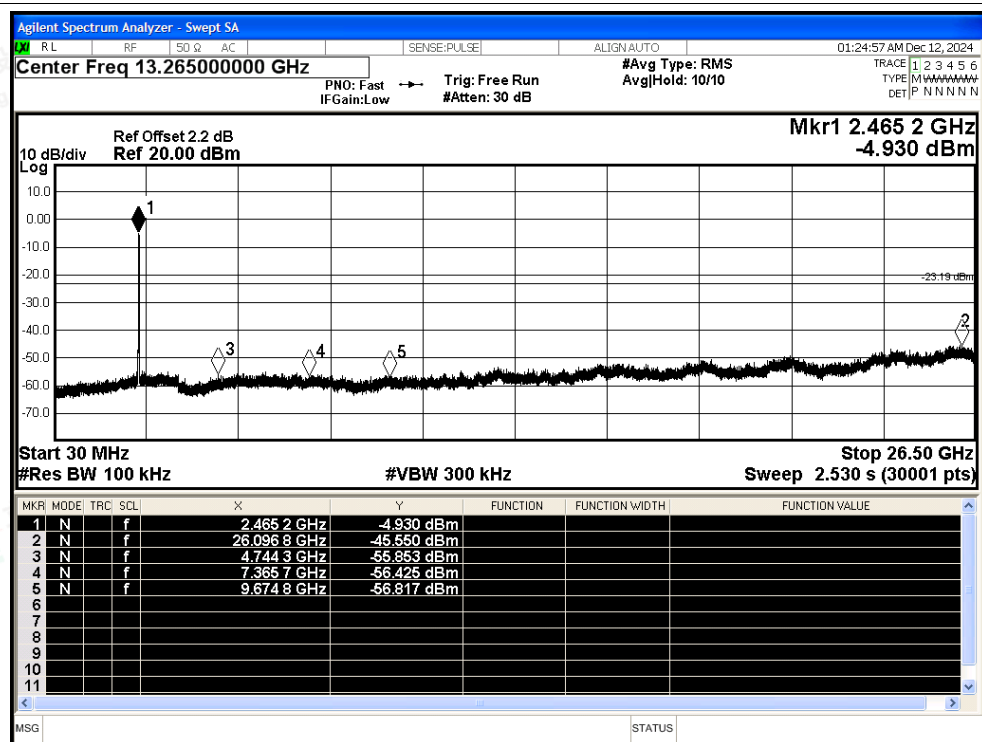




Tx. Spurious NVNT n40 2422MHz Ant1 Ref

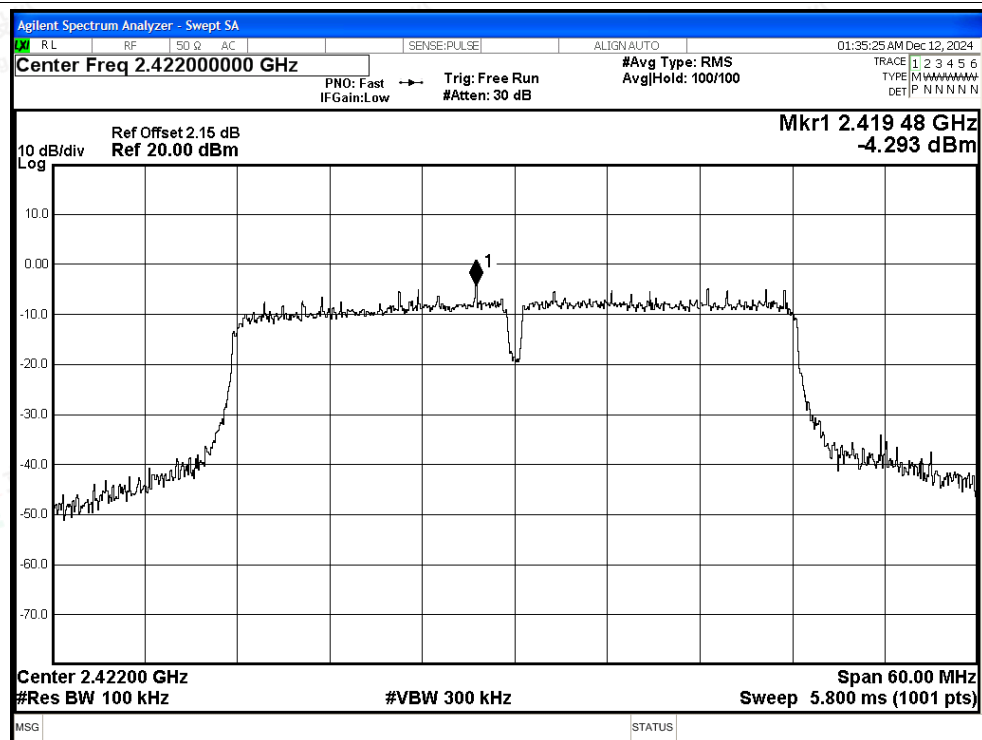


Tx. Spurious NVNT n40 2422MHz Ant1 Emission

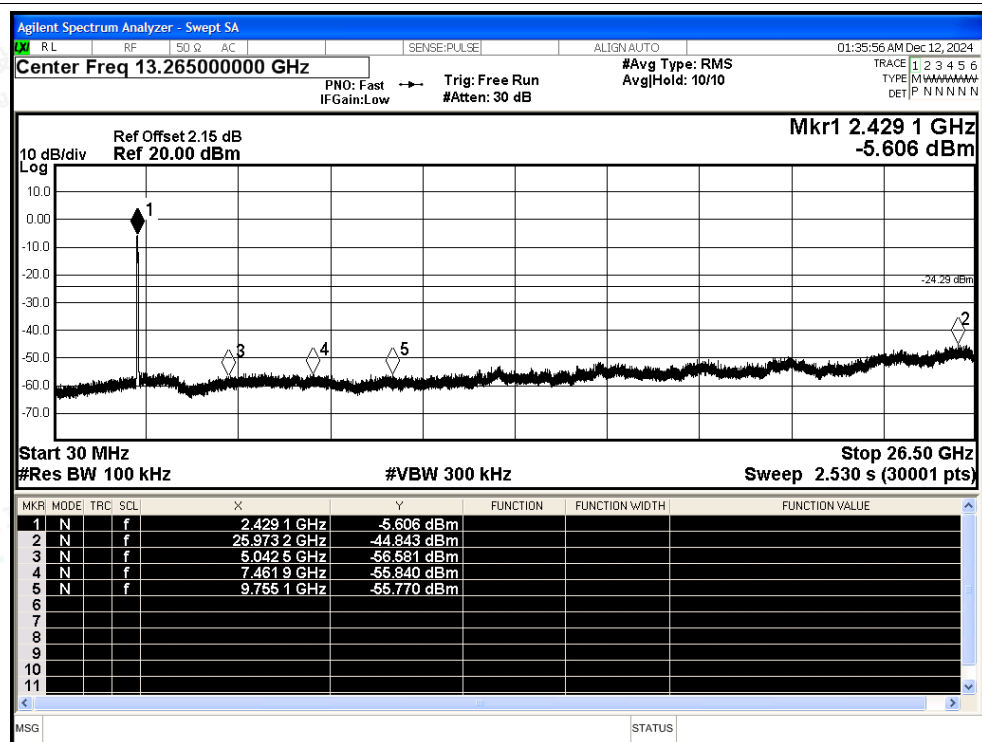




Tx. Spurious NVNT n40 2437MHz Ant1 Ref

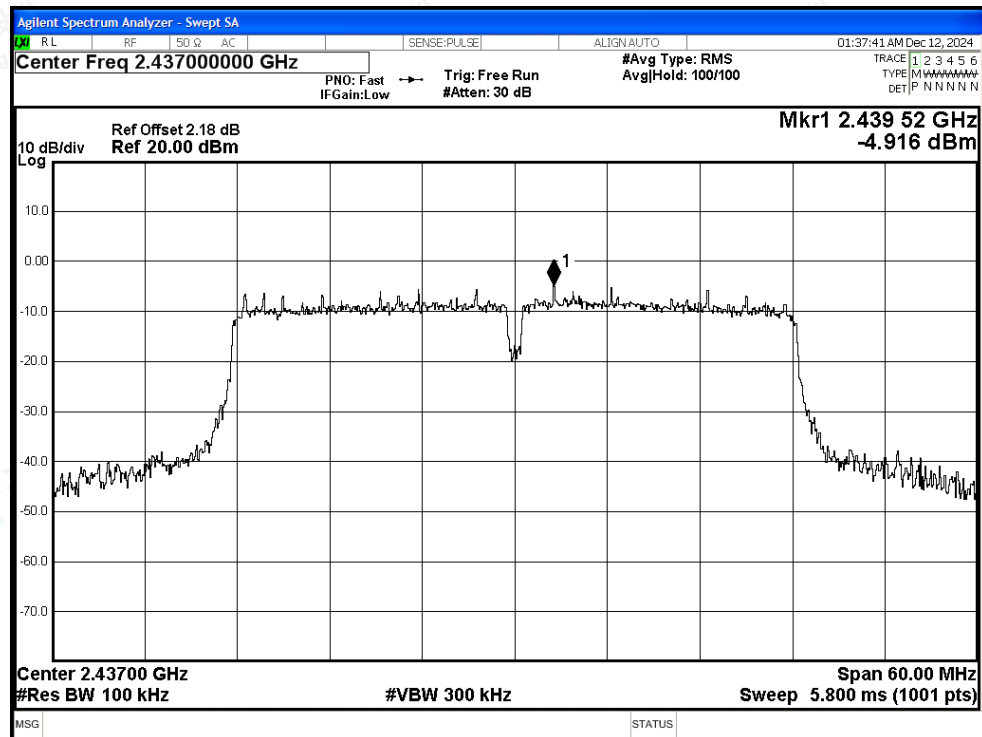


Tx. Spurious NVNT n40 2437MHz Ant1 Emission

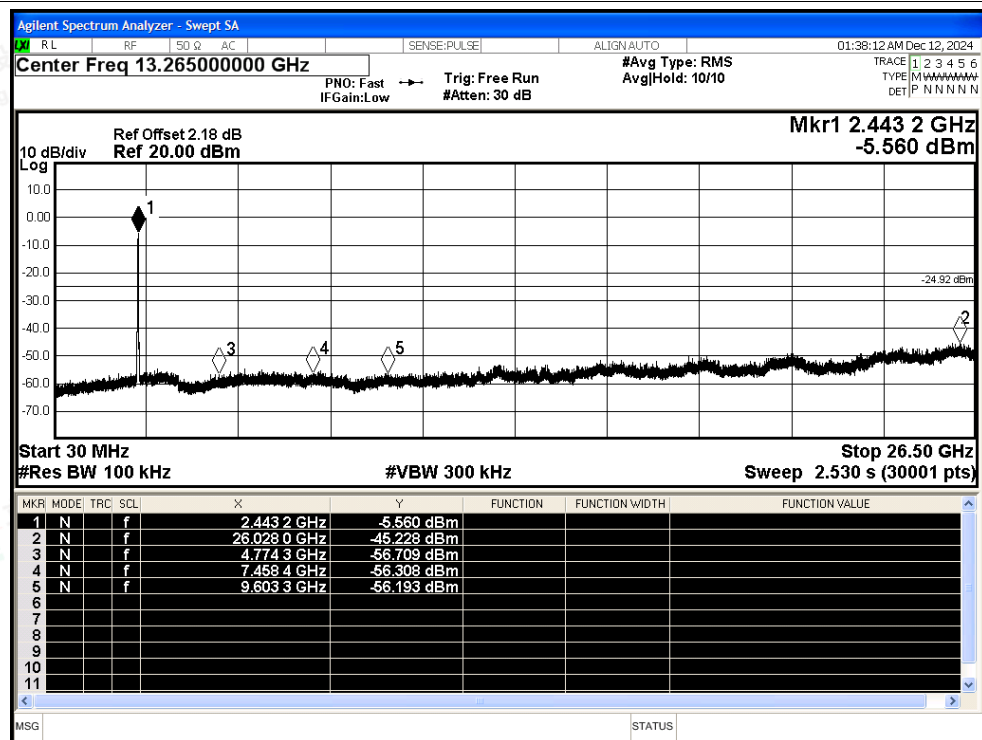




Tx. Spurious NVNT n40 2452MHz Ant1 Ref

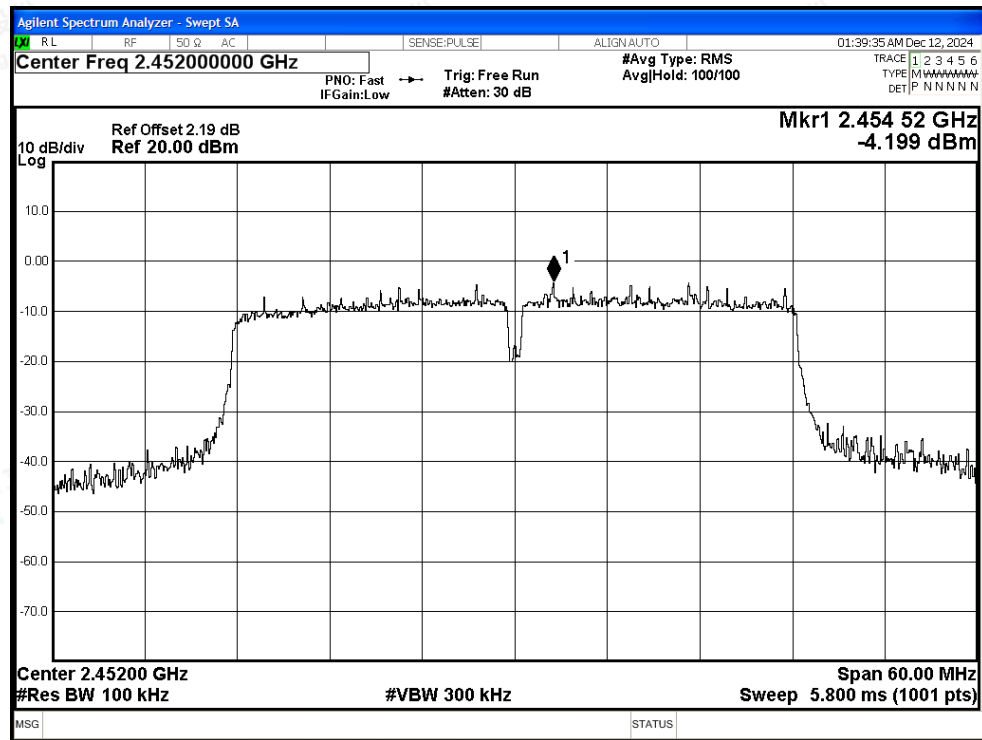


Tx. Spurious NVNT n40 2452MHz Ant1 Emission

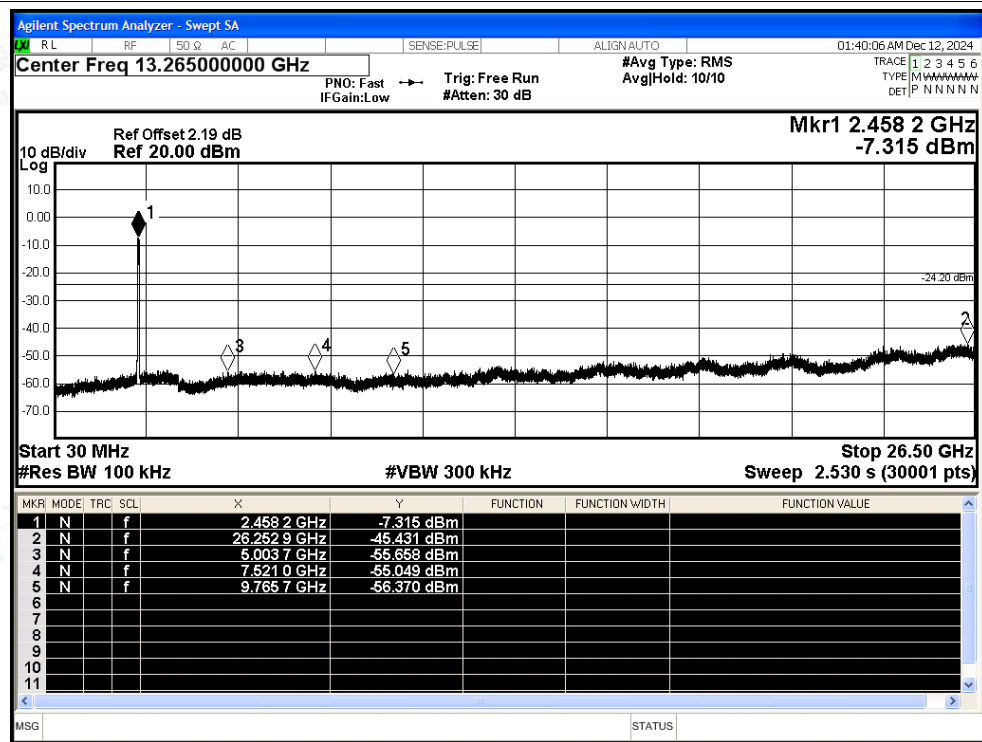




Tx. Spurious NVNT ax20 2412MHz Ant1 Ref

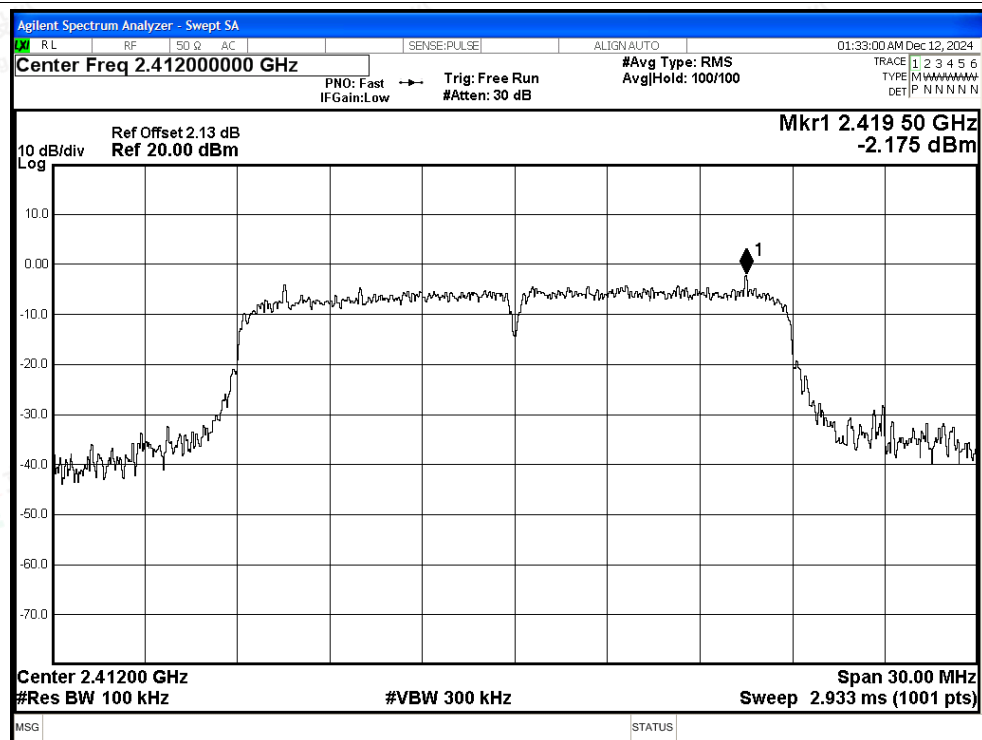


Tx. Spurious NVNT ax20 2412MHz Ant1 Emission

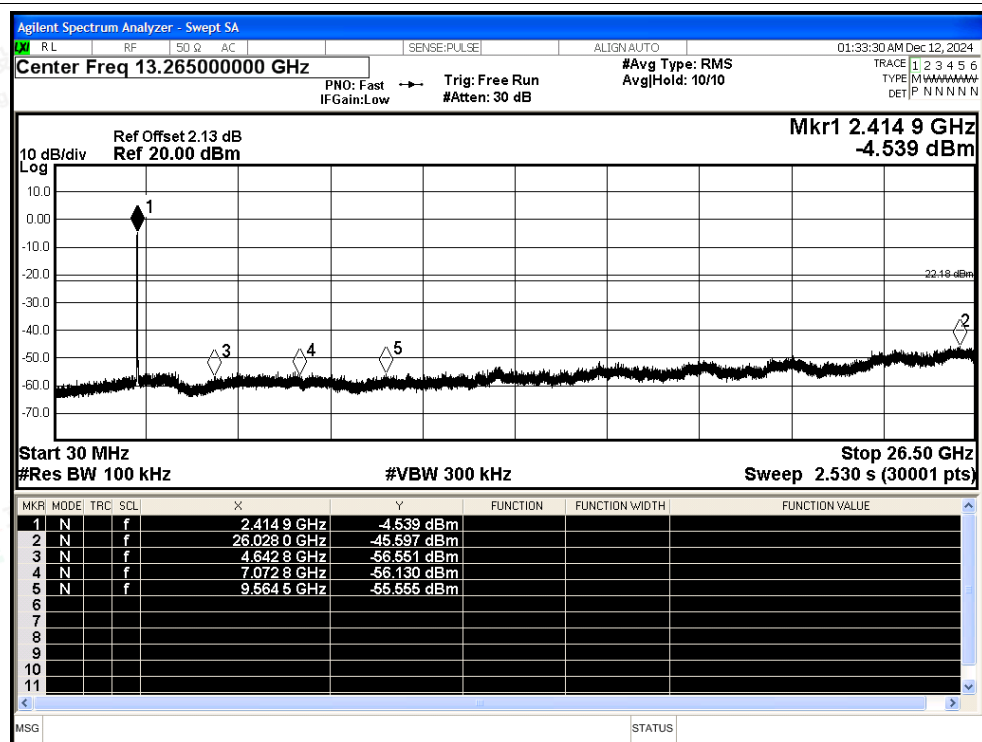




Tx. Spurious NVNT ax20 2437MHz Ant1 Ref

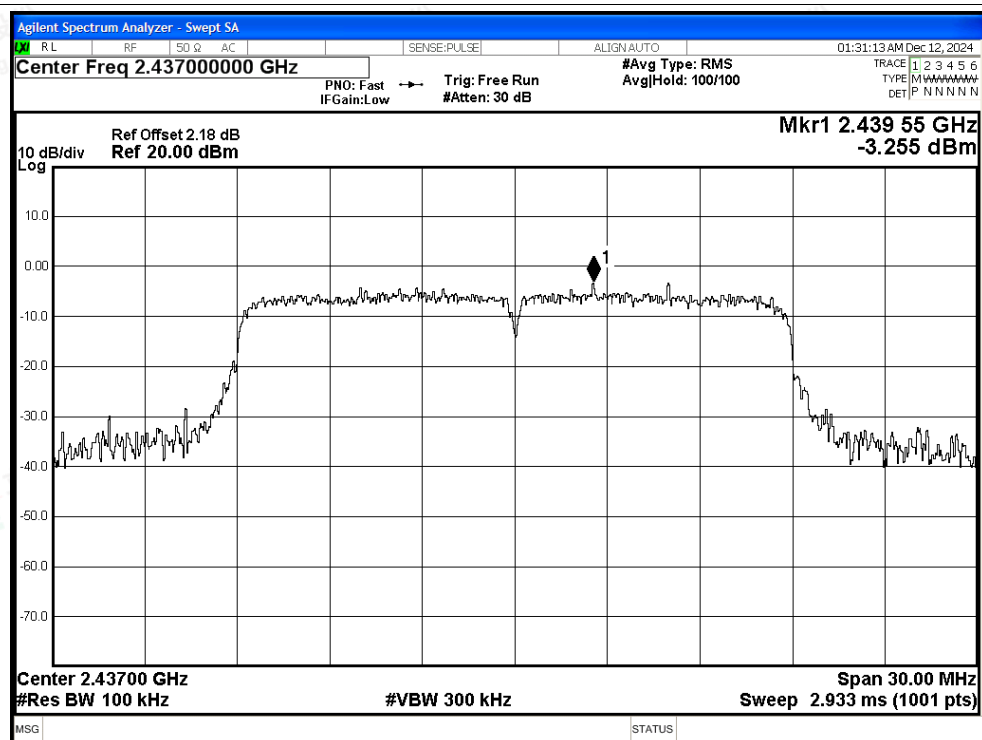


Tx. Spurious NVNT ax20 2437MHz Ant1 Emission

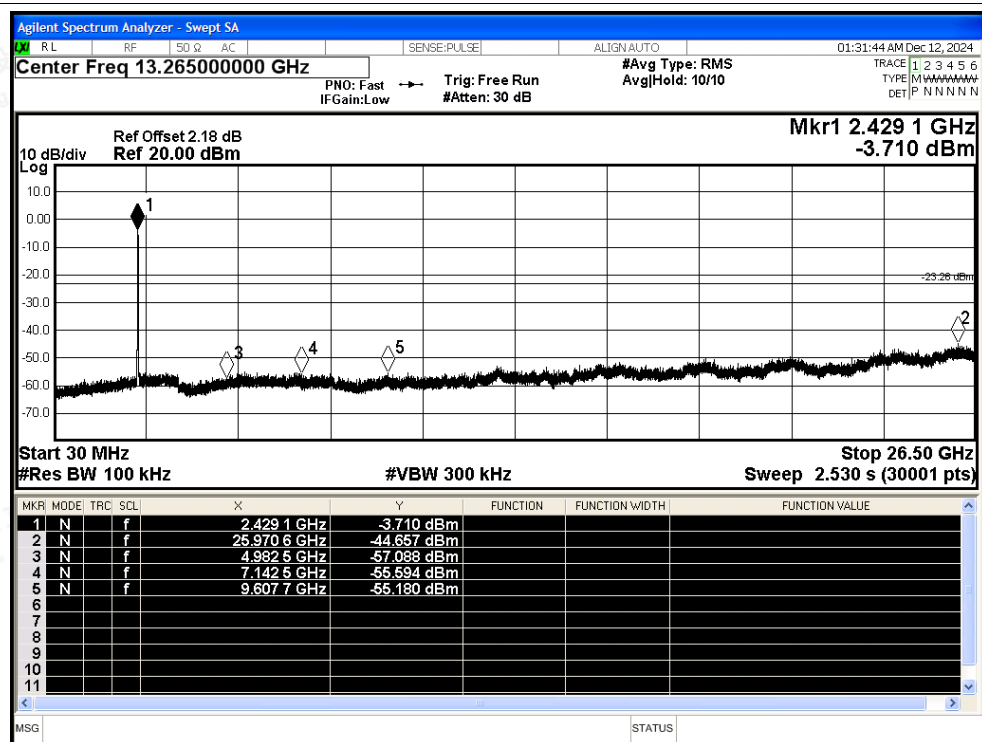




Tx. Spurious NVNT ax20 2462MHz Ant1 Ref

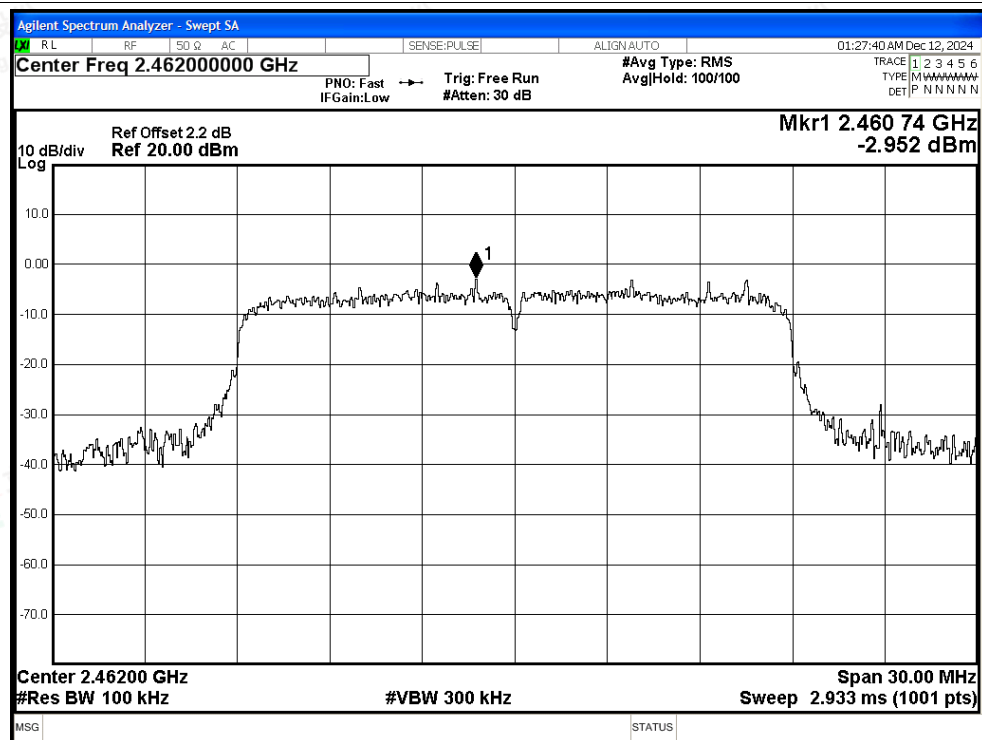


Tx. Spurious NVNT ax20 2462MHz Ant1 Emission

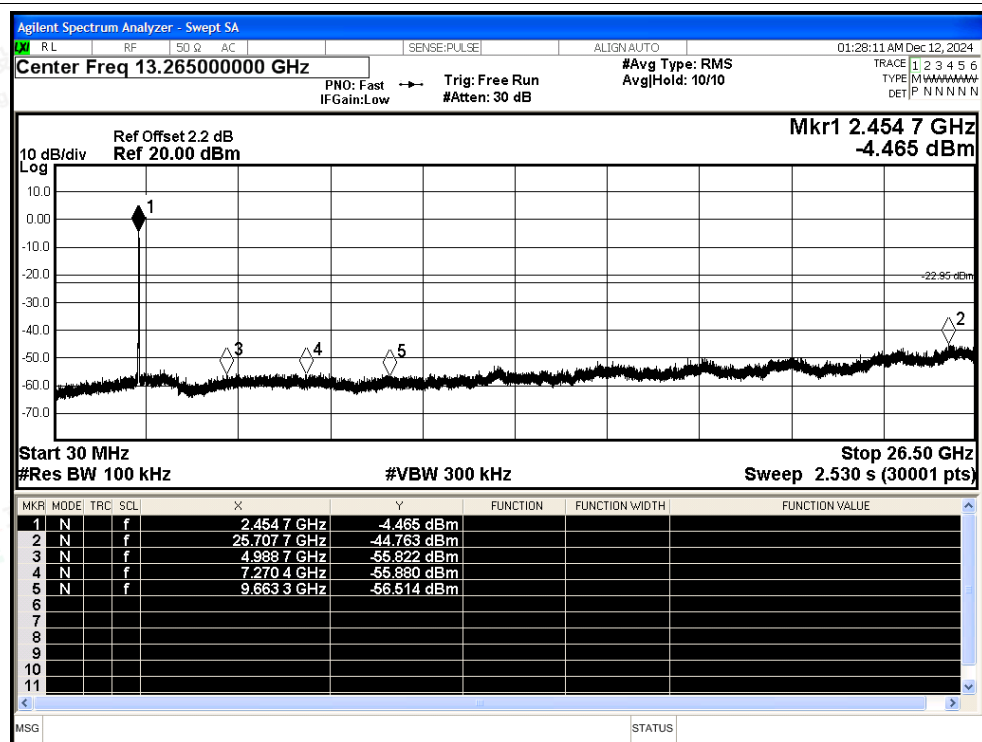




Tx. Spurious NVNT ax40 2422MHz Ant1 Ref

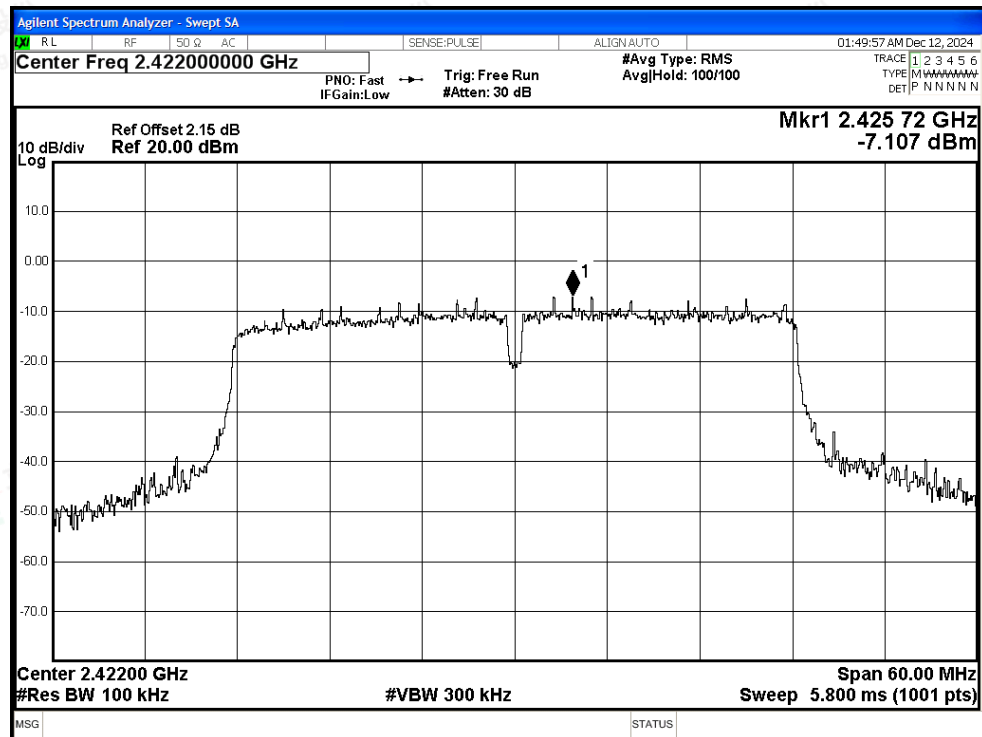


Tx. Spurious NVNT ax40 2422MHz Ant1 Emission

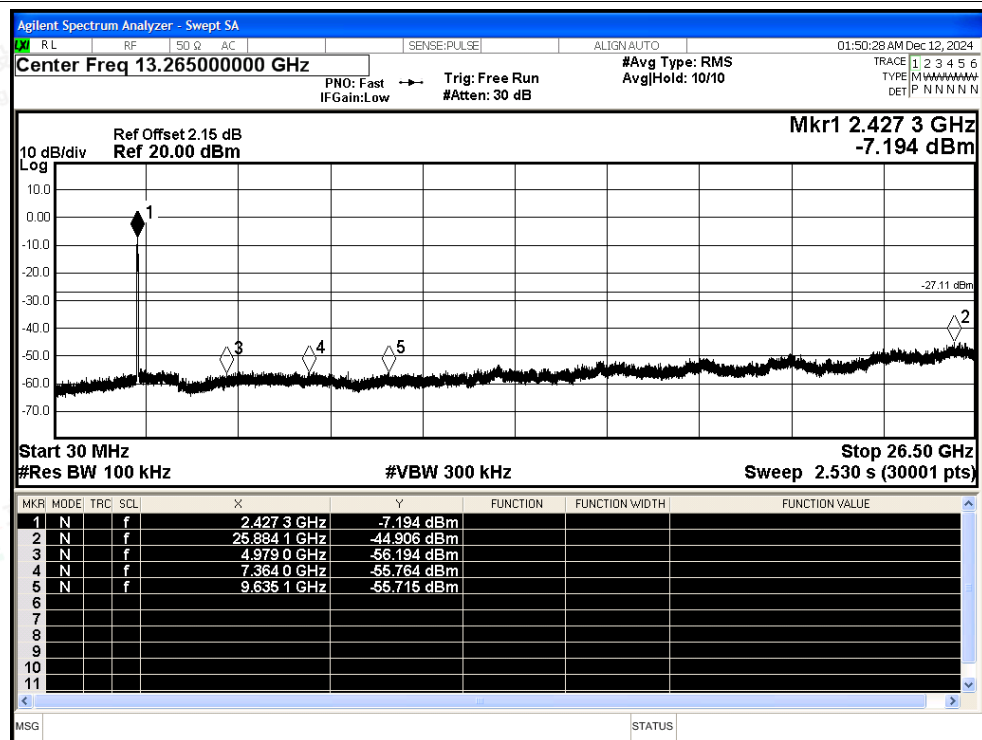




Tx. Spurious NVNT ax40 2437MHz Ant1 Ref

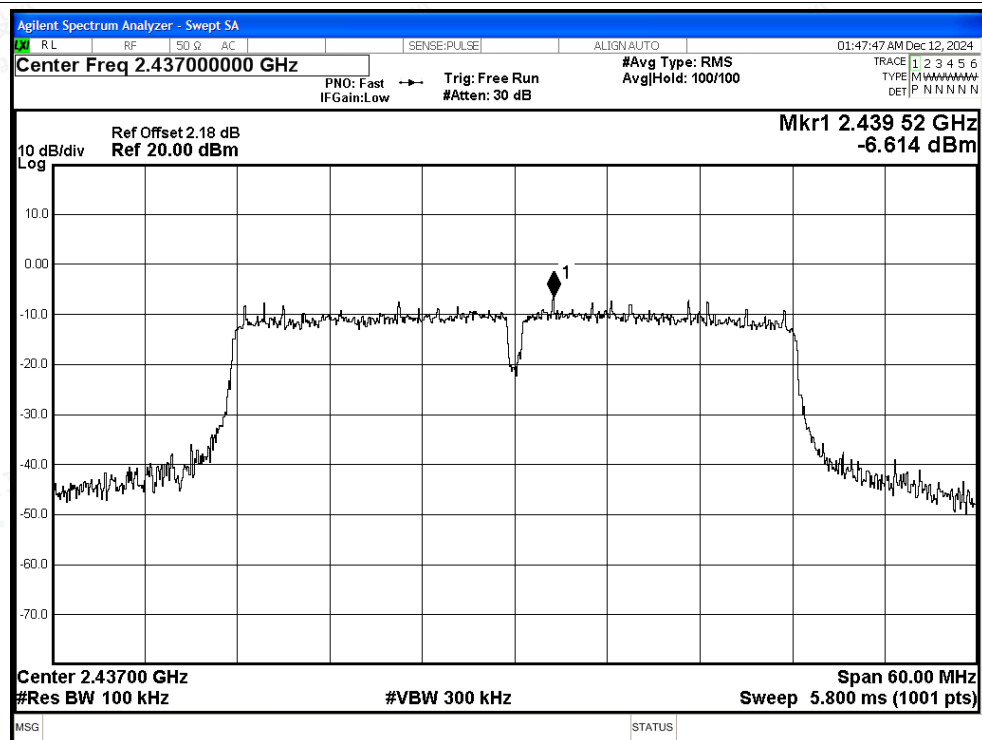


Tx. Spurious NVNT ax40 2437MHz Ant1 Emission

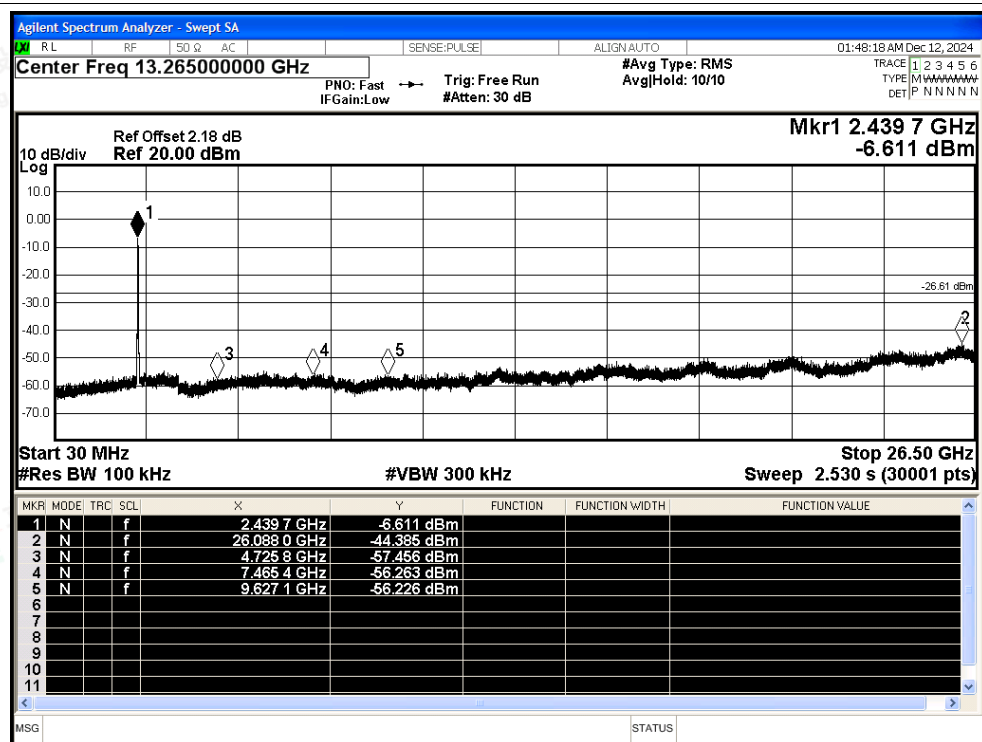




Tx. Spurious NVNT ax40 2452MHz Ant1 Ref

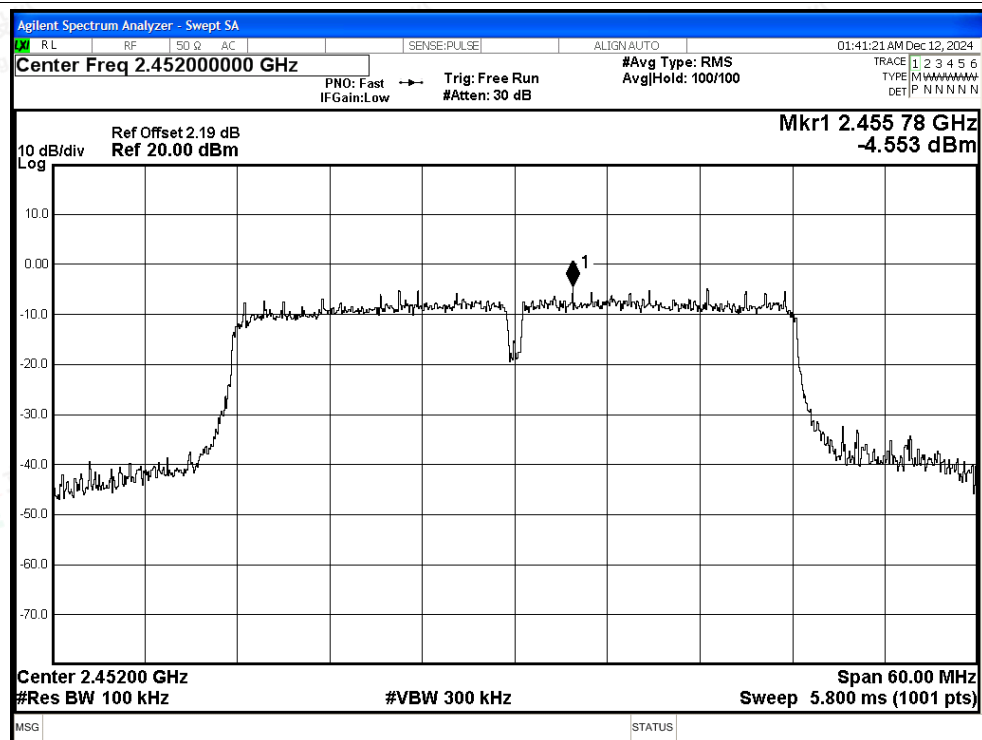

Tx. Spurious NVNT ax40 2452MHz Ant1 Emission

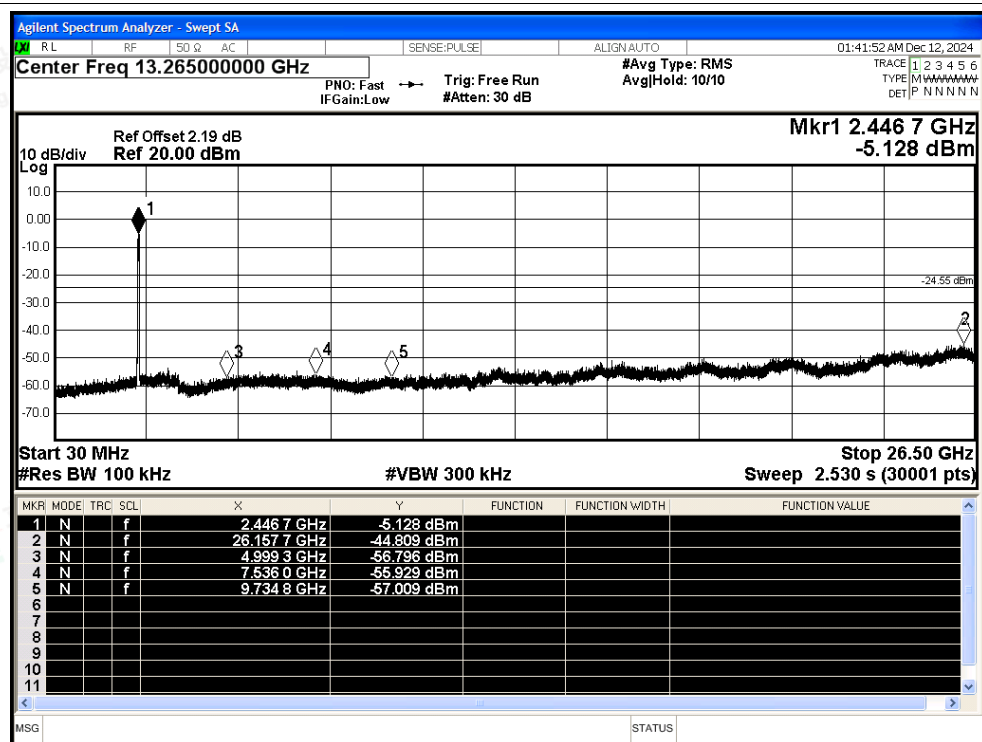



B.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.13	0	0.15
NVNT	b	2437	Ant1	99.13	0	0.15
NVNT	b	2462	Ant1	99.13	0	0.15
NVNT	g	2412	Ant1	97.75	0.1	0.37
NVNT	g	2437	Ant1	97.75	0.1	0.37
NVNT	g	2462	Ant1	97.75	0.1	0.37
NVNT	n20	2412	Ant1	97.25	0.12	0.44
NVNT	n20	2437	Ant1	97.25	0.12	0.44
NVNT	n20	2462	Ant1	97.33	0.12	0.44
NVNT	n40	2422	Ant1	94.71	0.24	0.9
NVNT	n40	2437	Ant1	94.7	0.24	0.9
NVNT	n40	2452	Ant1	94.71	0.24	0.9
NVNT	ax20	2412	Ant1	97.33	0.12	0.44
NVNT	ax20	2437	Ant1	97.25	0.12	0.44
NVNT	ax20	2462	Ant1	97.25	0.12	0.44
NVNT	ax40	2422	Ant1	94.71	0.24	0.9
NVNT	ax40	2437	Ant1	94.71	0.24	0.9
NVNT	ax40	2452	Ant1	94.71	0.24	0.9




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

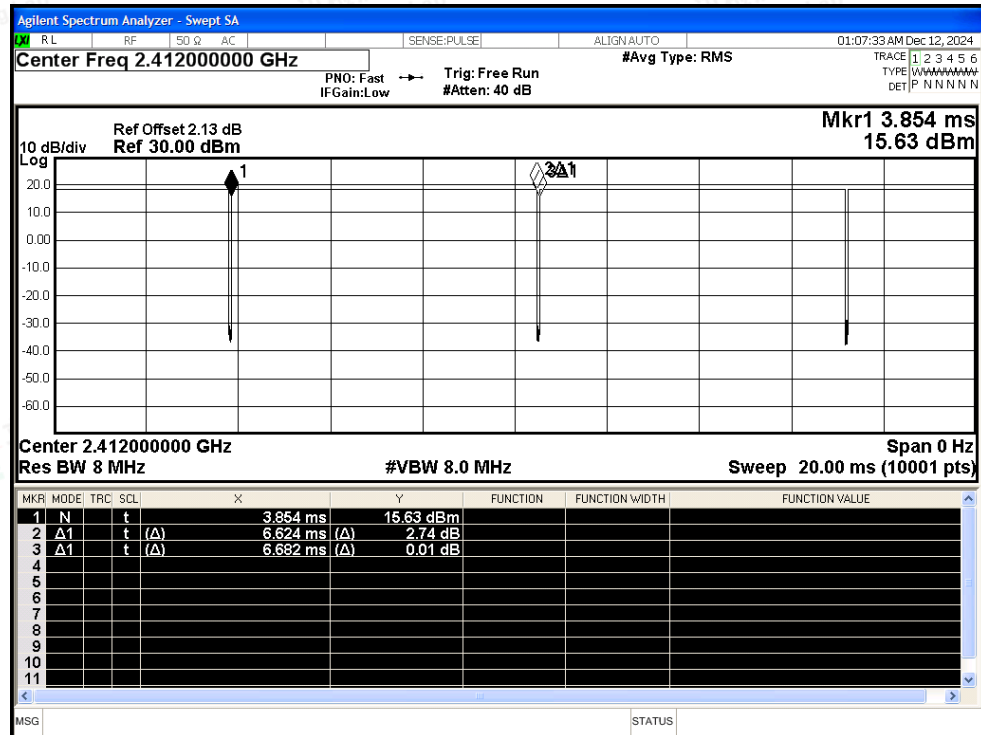


Duty Cycle NVNT b 2437MHz Ant1

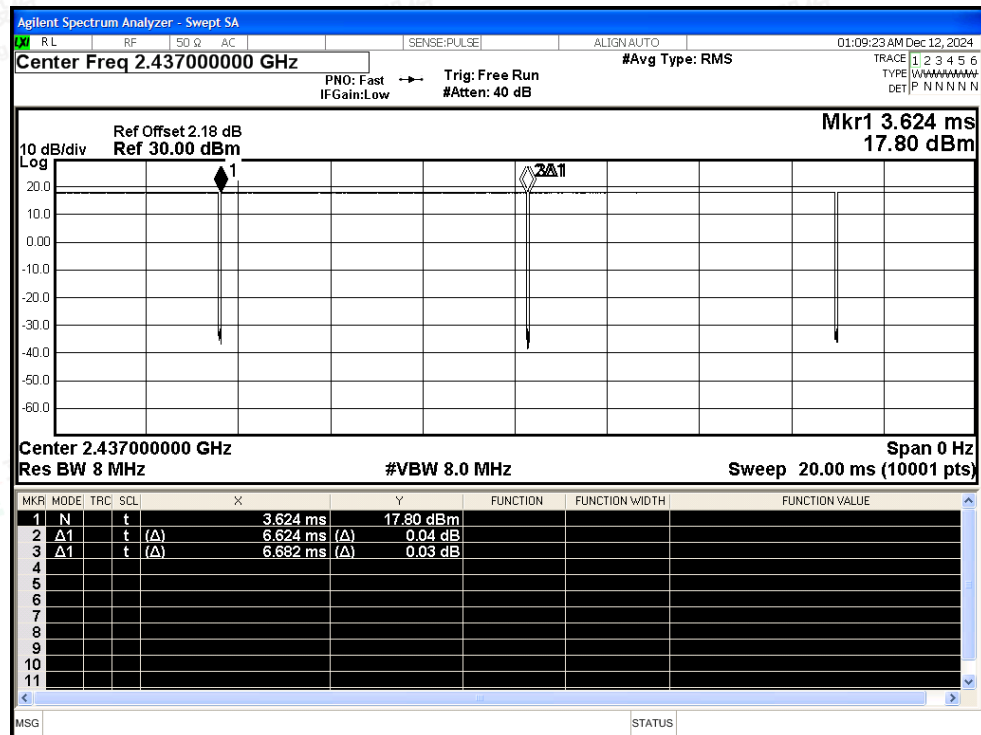




Duty Cycle NVNT b 2462MHz Ant1

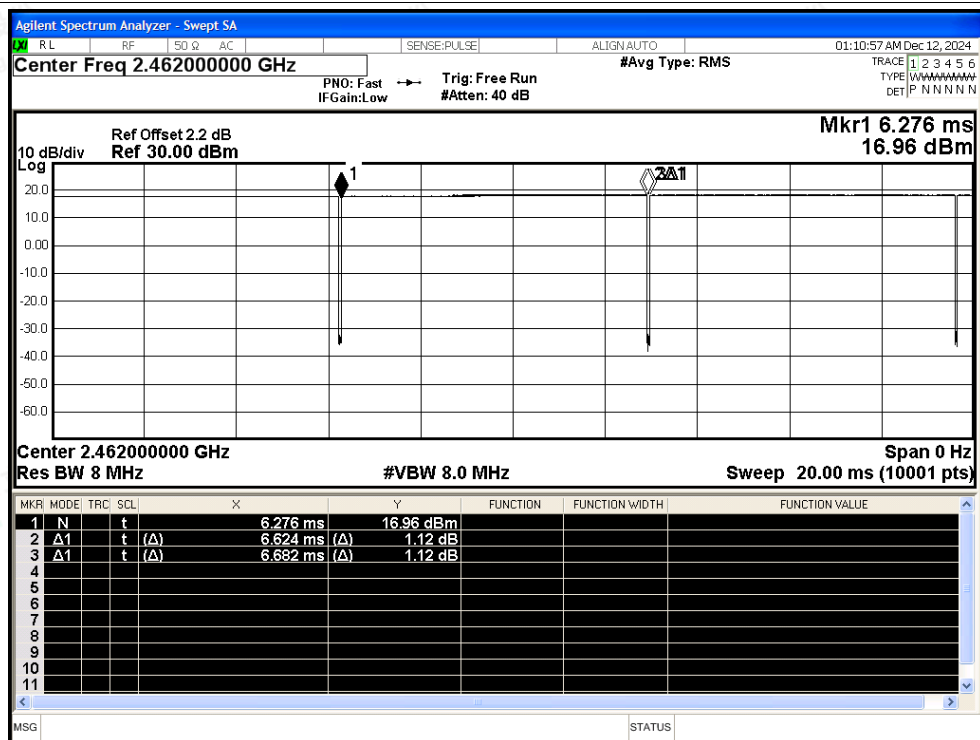


Duty Cycle NVNT g 2412MHz Ant1

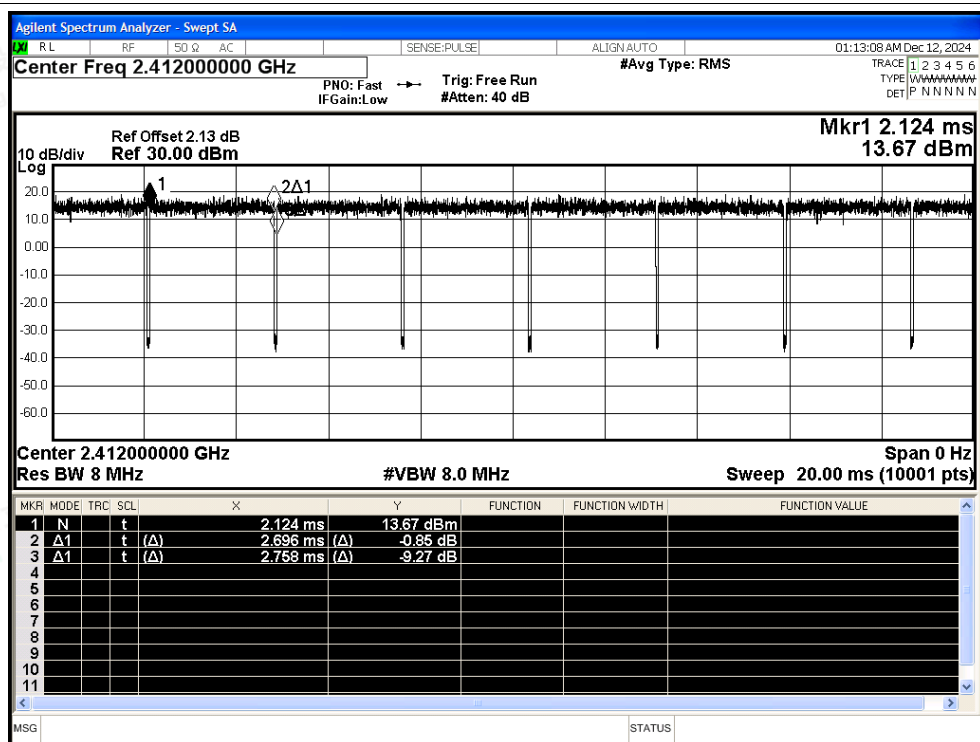




Duty Cycle NVNT g 2437MHz Ant1

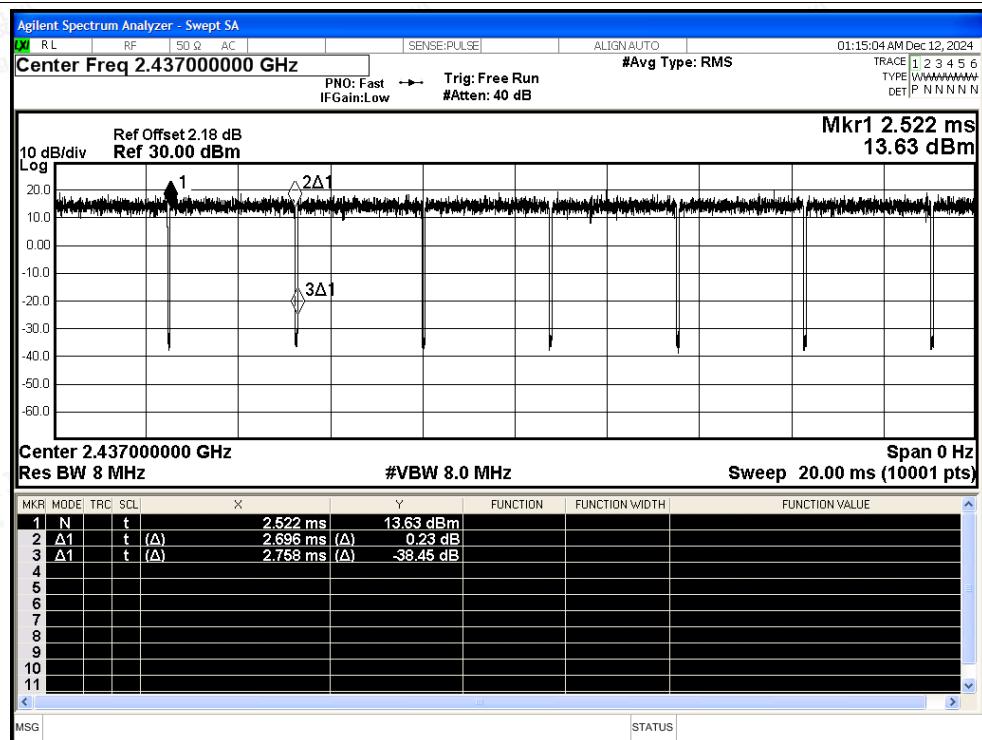


Duty Cycle NVNT g 2462MHz Ant1

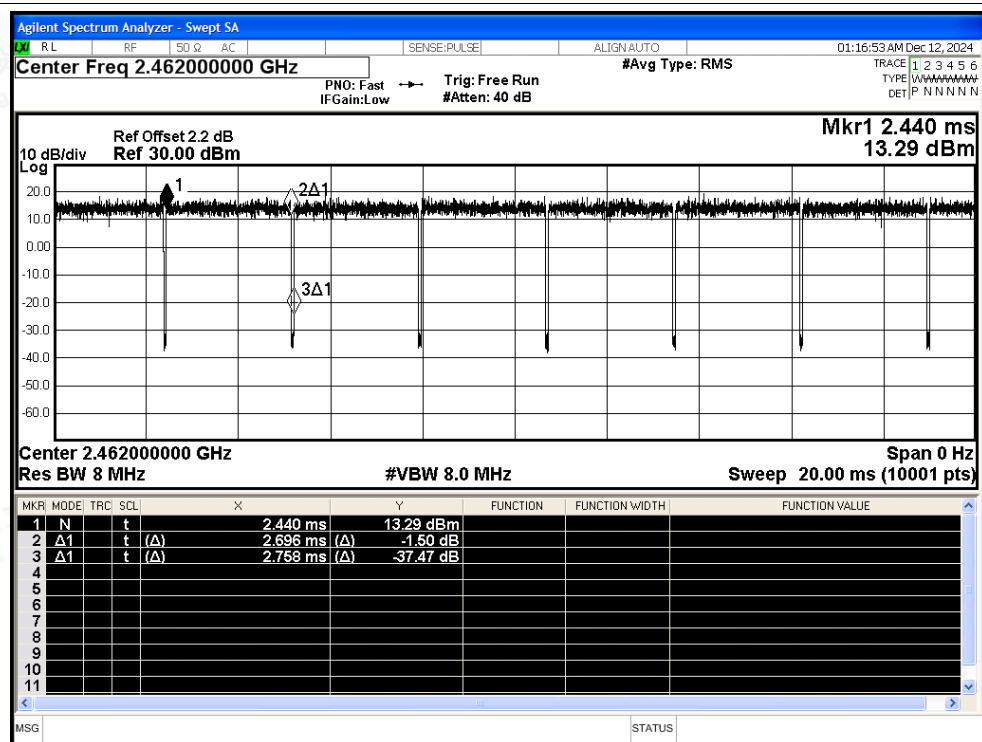




Duty Cycle NVNT n20 2412MHz Ant1

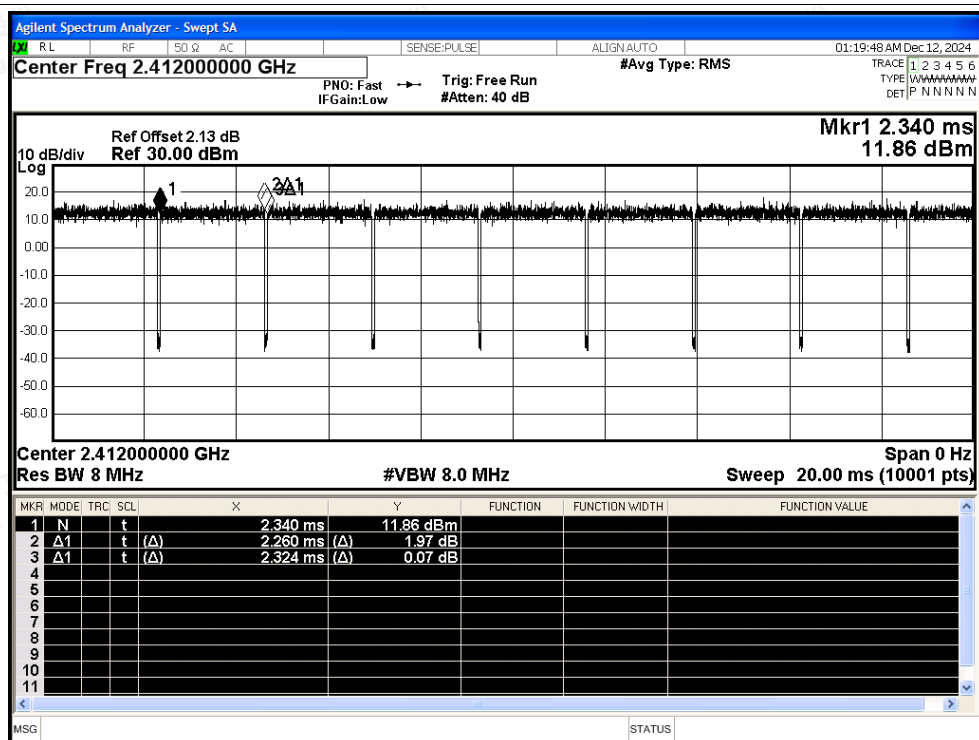


Duty Cycle NVNT n20 2437MHz Ant1

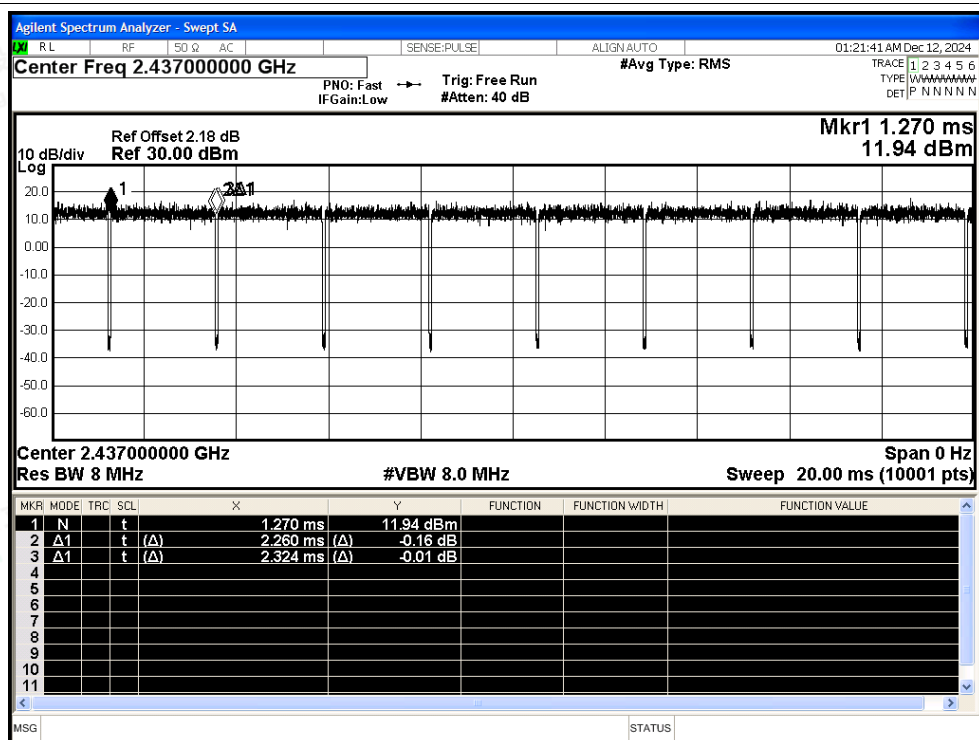




Duty Cycle NVNT n20 2462MHz Ant1

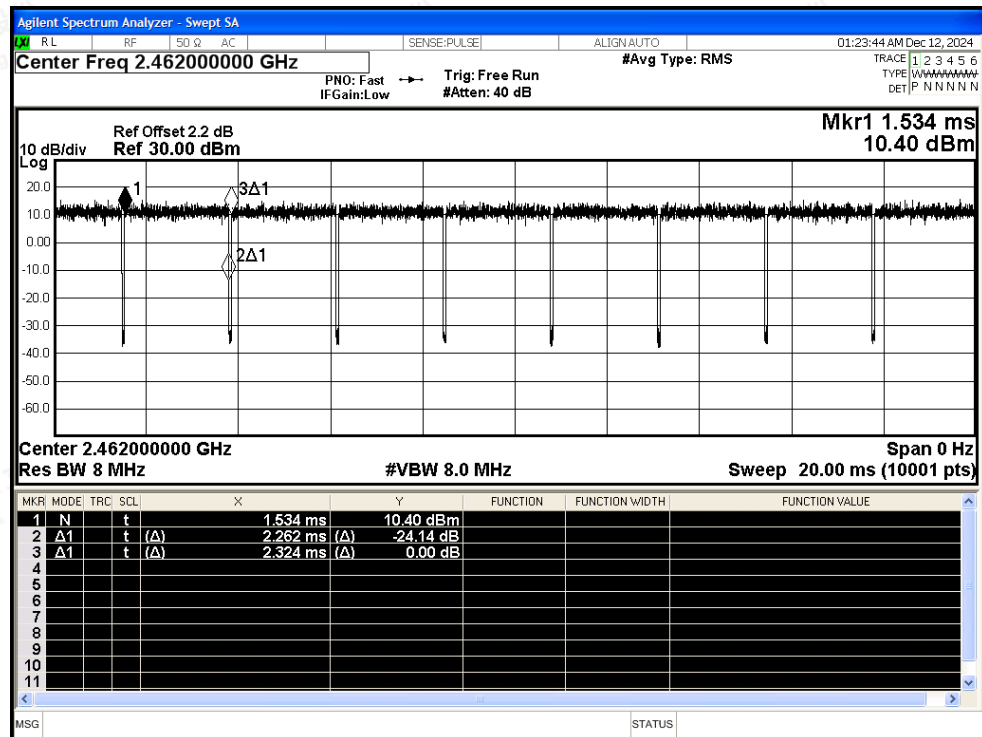


Duty Cycle NVNT n40 2422MHz Ant1

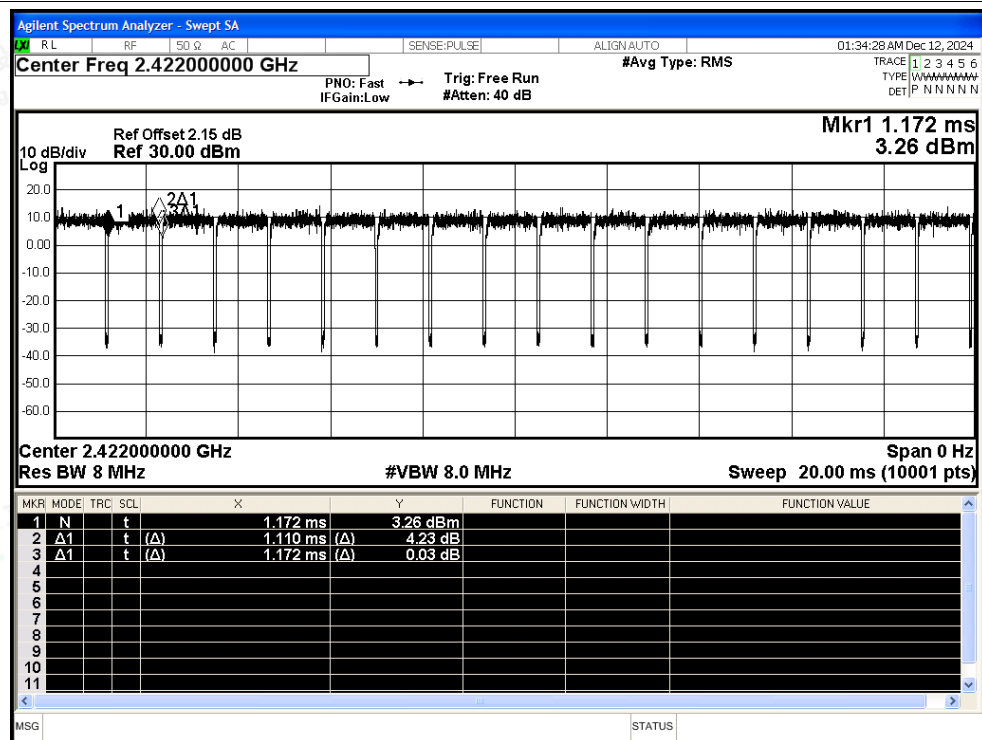




Duty Cycle NVNT n40 2437MHz Ant1

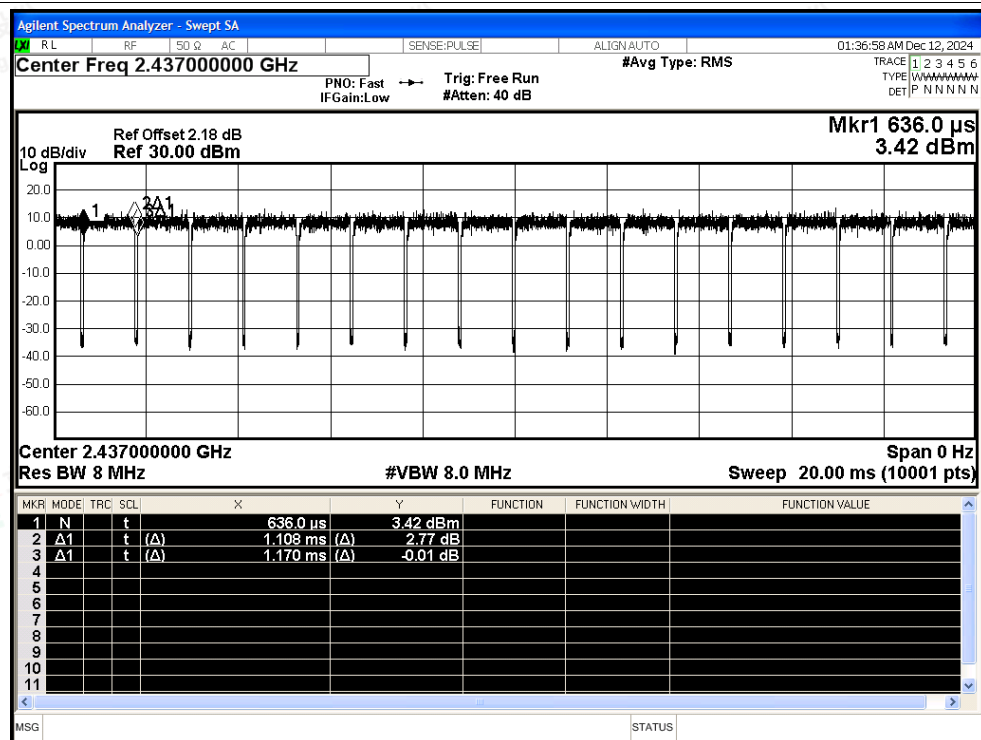


Duty Cycle NVNT n40 2452MHz Ant1

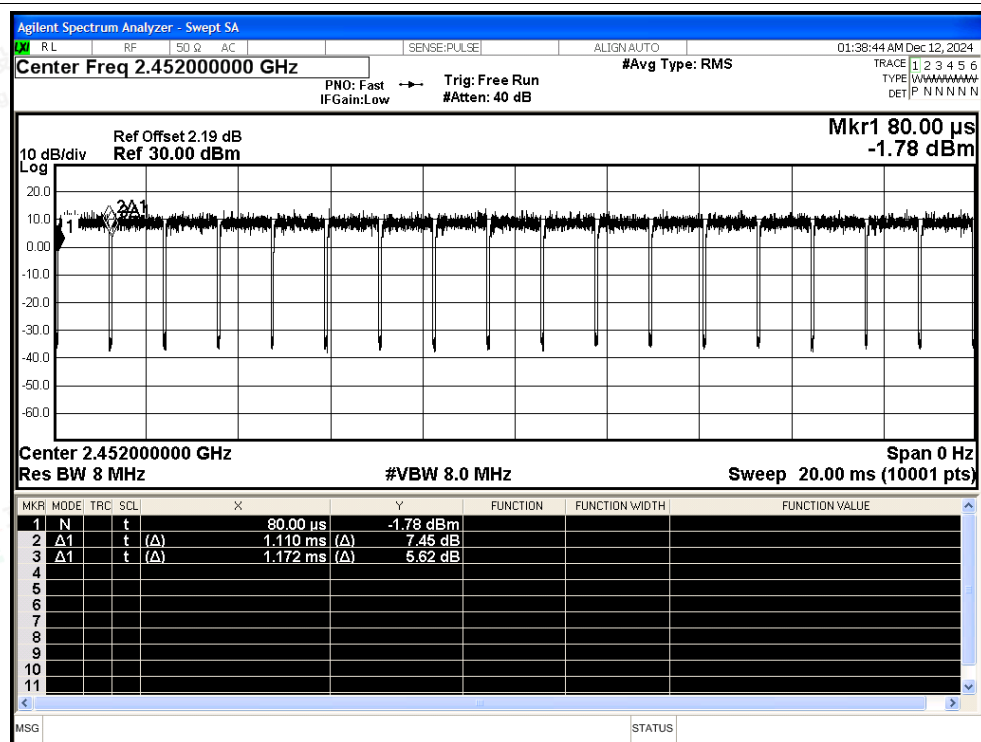




Duty Cycle NVNT ax20 2412MHz Ant1

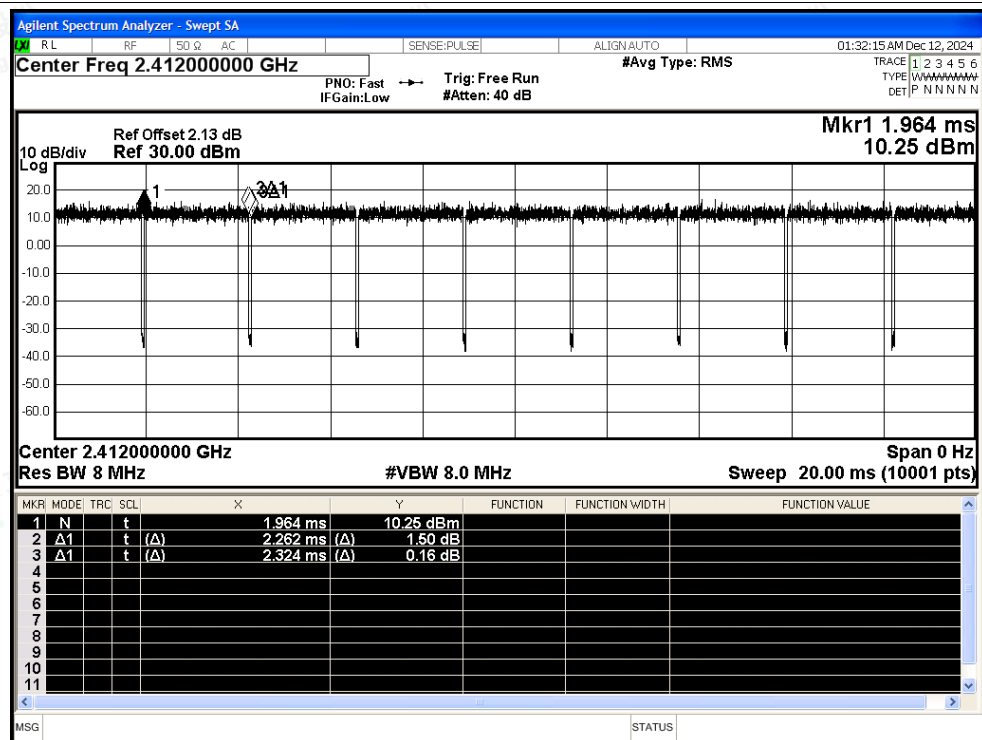


Duty Cycle NVNT ax20 2437MHz Ant1

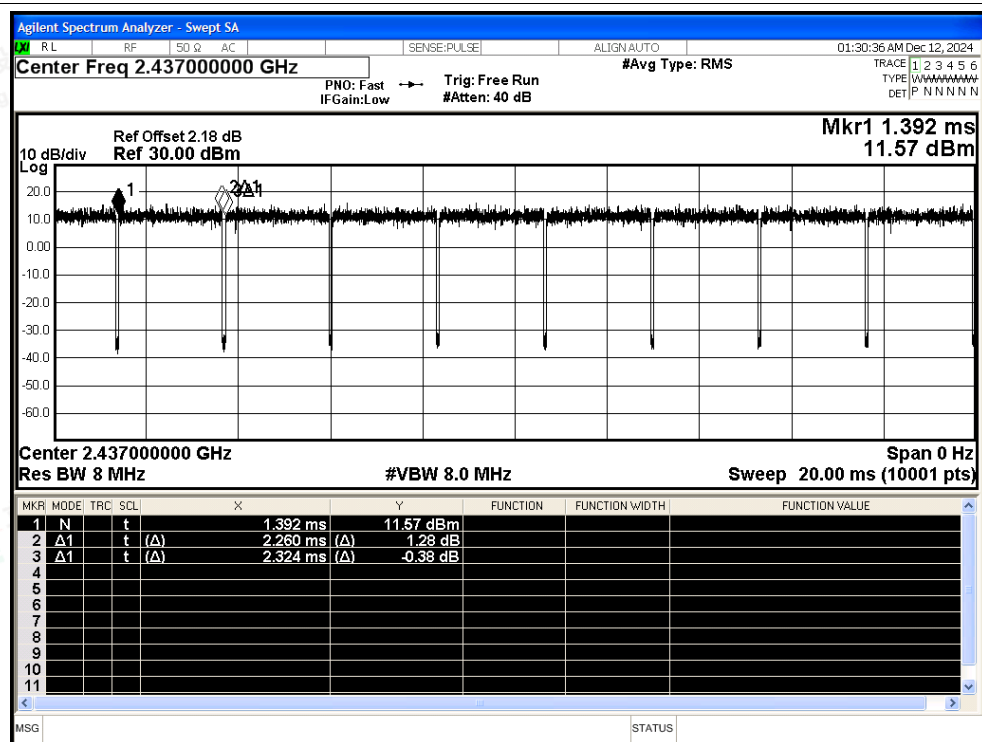




Duty Cycle NVNT ax20 2462MHz Ant1

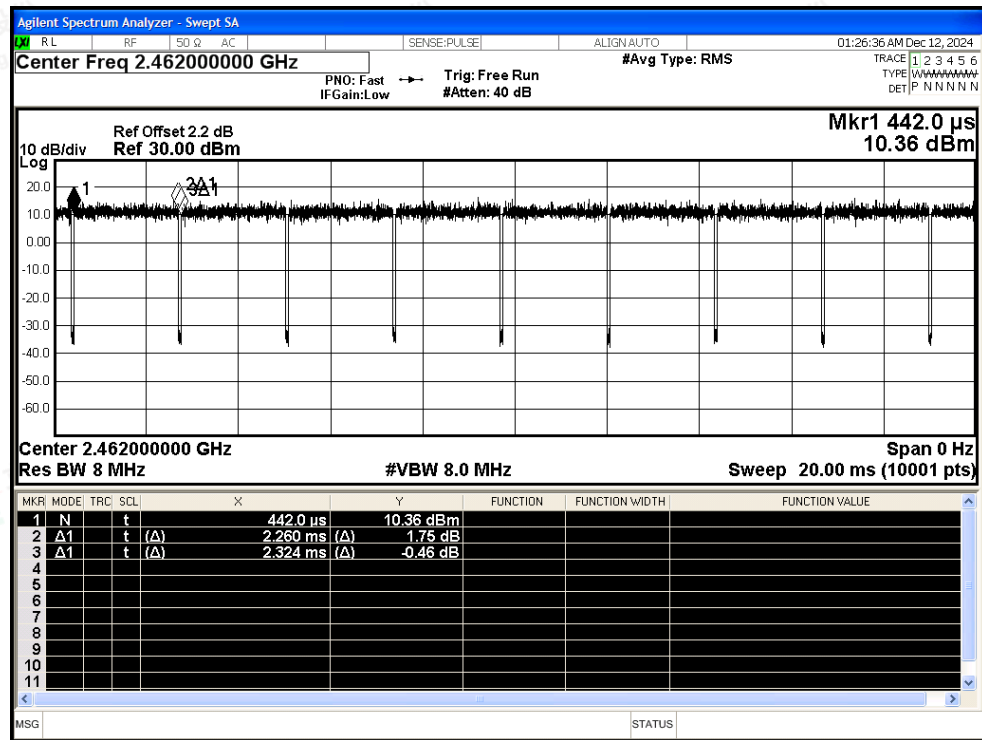


Duty Cycle NVNT ax40 2422MHz Ant1

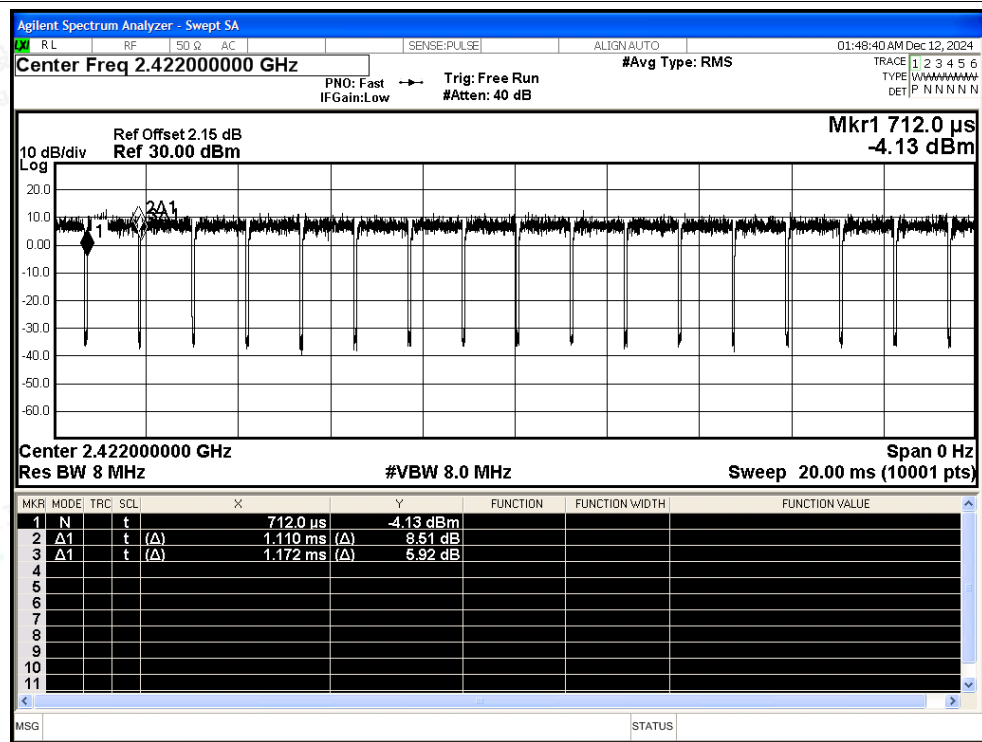




Duty Cycle NVNT ax40 2437MHz Ant1

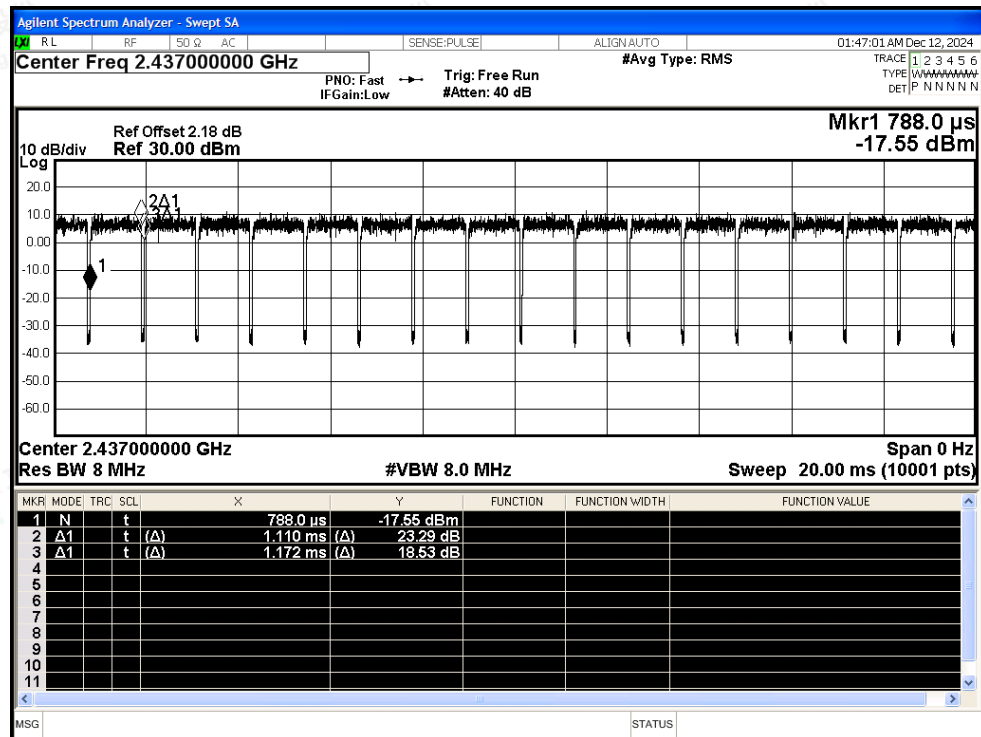

Duty Cycle NVNT ax40 2452MHz Ant1

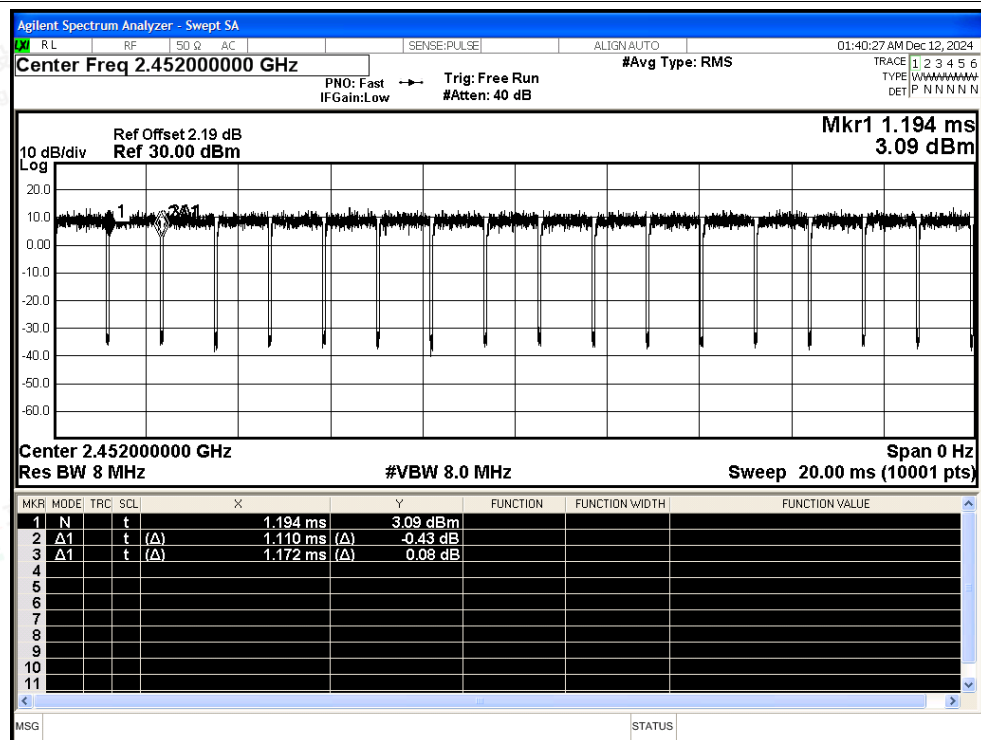



B.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	b	2412	Ant1	2310	-51.33	2.41	-	46.34	Peak	74	Pass
NVNT	b	2412	Ant1	2310	-58.62	2.41	0	39.05	Average	54	Pass
NVNT	b	2412	Ant1	2387.922	-46.99	2.41	-	50.68	Peak	74	Pass
NVNT	b	2412	Ant1	2389.911	-55.41	2.41	0	42.26	Average	54	Pass
NVNT	b	2412	Ant1	2390	-47.64	2.41	-	50.03	Peak	74	Pass
NVNT	b	2412	Ant1	2390	-55.34	2.41	0	42.33	Average	54	Pass
NVNT	b	2462	Ant1	2483.5	-46.42	2.41	-	51.25	Peak	74	Pass
NVNT	b	2462	Ant1	2483.5	-54.01	2.41	0	43.66	Average	54	Pass
NVNT	b	2462	Ant1	2483.994	-45.25	2.41	-	52.42	Peak	74	Pass
NVNT	b	2462	Ant1	2483.623	-53.15	2.41	0	44.52	Average	54	Pass
NVNT	b	2462	Ant1	2500	-50.35	2.41	-	47.32	Peak	74	Pass
NVNT	b	2462	Ant1	2500	-58.12	2.41	0	39.55	Average	54	Pass
NVNT	g	2412	Ant1	2310	-49.52	2.41	-	48.15	Peak	74	Pass
NVNT	g	2412	Ant1	2310	-58.56	2.41	0.1	39.21	Average	54	Pass
NVNT	g	2412	Ant1	2389.209	-37.05	2.41	-	60.62	Peak	74	Pass
NVNT	g	2412	Ant1	2389.911	-50.18	2.41	0.1	47.59	Average	54	Pass
NVNT	g	2412	Ant1	2390	-40.66	2.41	-	57.01	Peak	74	Pass
NVNT	g	2412	Ant1	2390	-50.84	2.41	0.1	46.93	Average	54	Pass
NVNT	g	2462	Ant1	2483.5	-38.68	2.41	-	58.99	Peak	74	Pass
NVNT	g	2462	Ant1	2483.5	-53.54	2.41	0.1	44.23	Average	54	Pass
NVNT	g	2462	Ant1	2483.994	-34.54	2.41	-	63.13	Peak	74	Pass
NVNT	g	2462	Ant1	2483.729	-51.74	2.41	0.1	46.03	Average	54	Pass
NVNT	g	2462	Ant1	2500	-49	2.41	-	48.67	Peak	74	Pass
NVNT	g	2462	Ant1	2500	-57.83	2.41	0.1	39.94	Average	54	Pass
NVNT	n20	2412	Ant1	2310	-49.99	2.41	-	47.68	Peak	74	Pass
NVNT	n20	2412	Ant1	2310	-58.96	2.41	0.12	38.83	Average	54	Pass
NVNT	n20	2412	Ant1	2388.858	-33.75	2.41	-	63.92	Peak	74	Pass
NVNT	n20	2412	Ant1	2389.794	-51.17	2.41	0.12	46.62	Average	54	Pass
NVNT	n20	2412	Ant1	2390	-37.48	2.41	-	60.19	Peak	74	Pass
NVNT	n20	2412	Ant1	2390	-50.01	2.41	0.12	47.78	Average	54	Pass
NVNT	n20	2462	Ant1	2483.5	-38.94	2.41	-	58.73	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.5	-51.45	2.41	0.12	46.34	Average	54	Pass
NVNT	n20	2462	Ant1	2483.782	-29.95	2.41	-	67.72	Peak	74	Pass
NVNT	n20	2462	Ant1	2483.517	-51.45	2.41	0.12	46.34	Average	54	Pass
NVNT	n20	2462	Ant1	2500	-51.68	2.41	-	45.99	Peak	74	Pass
NVNT	n20	2462	Ant1	2500	-58.04	2.41	0.12	39.75	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	n40	2422	Ant1	2310	-51.69	2.41	-	45.98	Peak	74	Pass
NVNT	n40	2422	Ant1	2310	-59.01	2.41	0.24	38.90	Average	54	Pass
NVNT	n40	2422	Ant1	2386.822	-39.3	2.41	-	58.37	Peak	74	Pass
NVNT	n40	2422	Ant1	2389.662	-50.95	2.41	0.24	46.96	Average	54	Pass
NVNT	n40	2422	Ant1	2390	-39.44	2.41	-	58.23	Peak	74	Pass
NVNT	n40	2422	Ant1	2390	-52.35	2.41	0.24	45.56	Average	54	Pass
NVNT	n40	2452	Ant1	2483.5	-37.07	2.41	-	60.60	Peak	74	Pass
NVNT	n40	2452	Ant1	2483.5	-51.88	2.41	0.24	46.03	Average	54	Pass
NVNT	n40	2452	Ant1	2483.62	-34.53	2.41	-	63.14	Peak	74	Pass
NVNT	n40	2452	Ant1	2484.088	-50.89	2.41	0.24	47.02	Average	54	Pass
NVNT	n40	2452	Ant1	2500	-49.94	2.41	-	47.73	Peak	74	Pass
NVNT	n40	2452	Ant1	2500	-57.89	2.41	0.24	40.02	Average	54	Pass
NVNT	ax20	2412	Ant1	2310	-50.7	2.41	-	46.97	Peak	74	Pass
NVNT	ax20	2412	Ant1	2310	-58.62	2.41	0.12	39.17	Average	54	Pass
NVNT	ax20	2412	Ant1	2387.805	-36.36	2.41	-	61.31	Peak	74	Pass
NVNT	ax20	2412	Ant1	2389.443	-52.15	2.41	0.12	45.64	Average	54	Pass
NVNT	ax20	2412	Ant1	2390	-40.1	2.41	-	57.57	Peak	74	Pass
NVNT	ax20	2412	Ant1	2390	-53.64	2.41	0.12	44.15	Average	54	Pass
NVNT	ax20	2462	Ant1	2483.5	-40	2.41	-	57.67	Peak	74	Pass
NVNT	ax20	2462	Ant1	2483.5	-53.16	2.41	0.12	44.63	Average	54	Pass
NVNT	ax20	2462	Ant1	2483.835	-35	2.41	-	62.67	Peak	74	Pass
NVNT	ax20	2462	Ant1	2483.676	-51.57	2.41	0.12	46.22	Average	54	Pass
NVNT	ax20	2462	Ant1	2500	-51.16	2.41	-	46.51	Peak	74	Pass
NVNT	ax20	2462	Ant1	2500	-57.91	2.41	0.12	39.88	Average	54	Pass
NVNT	ax40	2422	Ant1	2310	-50.78	2.41	-	46.89	Peak	74	Pass
NVNT	ax40	2422	Ant1	2310	-58.89	2.41	0.24	39.02	Average	54	Pass
NVNT	ax40	2422	Ant1	2389.662	-39.06	2.41	-	58.61	Peak	74	Pass
NVNT	ax40	2422	Ant1	2389.946	-54.15	2.41	0.24	43.76	Average	54	Pass
NVNT	ax40	2422	Ant1	2390	-41.21	2.41	-	56.46	Peak	74	Pass
NVNT	ax40	2422	Ant1	2390	-54.15	2.41	0.24	43.76	Average	54	Pass
NVNT	ax40	2452	Ant1	2483.5	-36.57	2.41	-	61.10	Peak	74	Pass
NVNT	ax40	2452	Ant1	2483.5	-51.69	2.41	0.24	46.22	Average	54	Pass
NVNT	ax40	2452	Ant1	2484.634	-34.64	2.41	-	63.03	Peak	74	Pass
NVNT	ax40	2452	Ant1	2484.634	-51.02	2.41	0.24	46.89	Average	54	Pass
NVNT	ax40	2452	Ant1	2500	-49.13	2.41	-	48.54	Peak	74	Pass
NVNT	ax40	2452	Ant1	2500	-57.58	2.41	0.24	40.33	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Restrict Band NVNT b 2412MHz Ant1 Peak

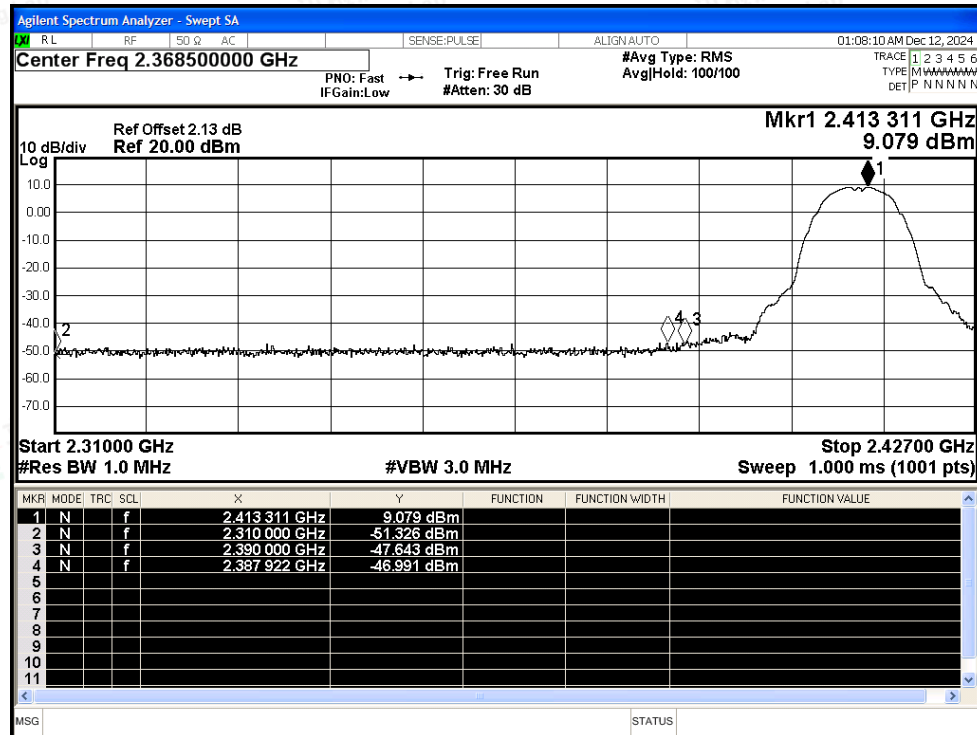


Restrict Band NVNT b 2412MHz Ant1 Average

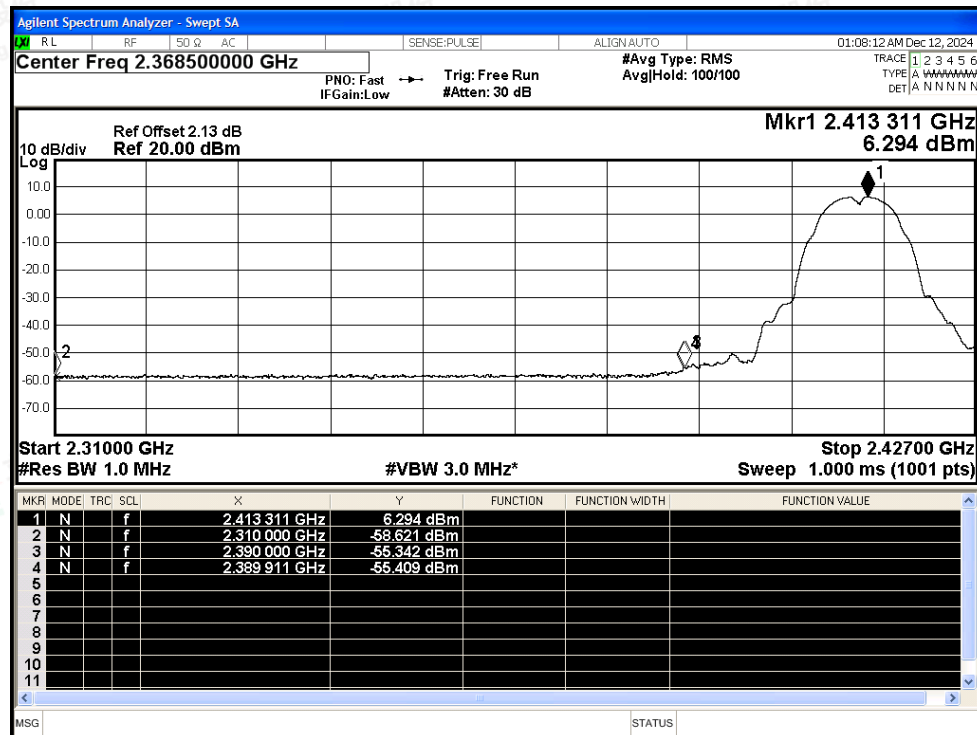




Restrict Band NVNT b 2462MHz Ant1 Peak

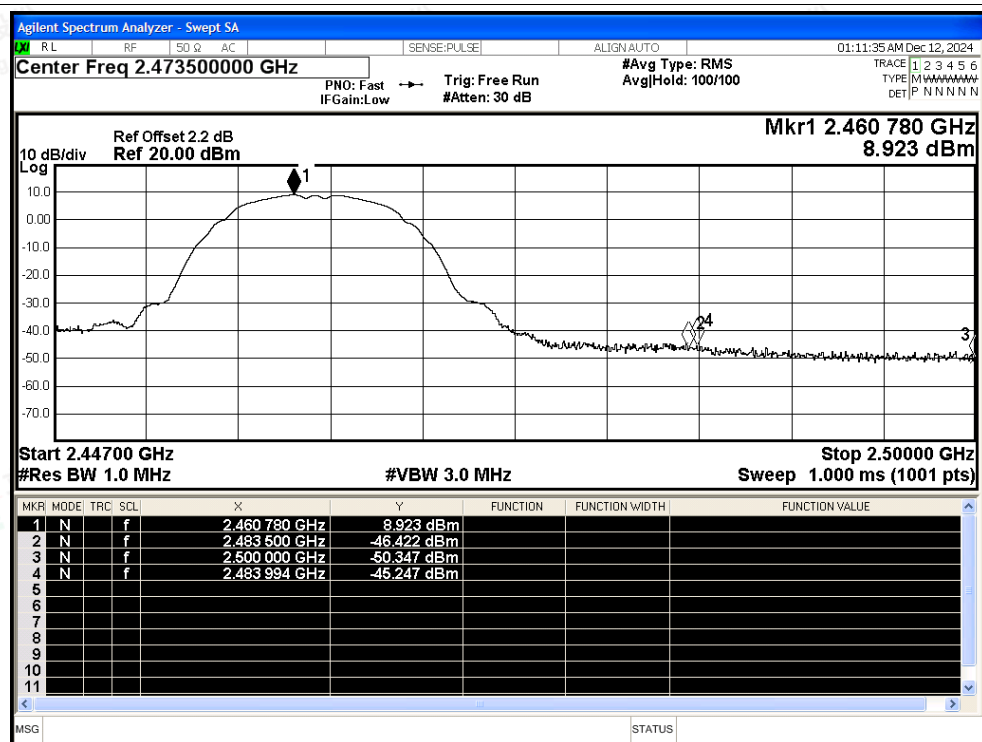


Restrict Band NVNT b 2462MHz Ant1 Average

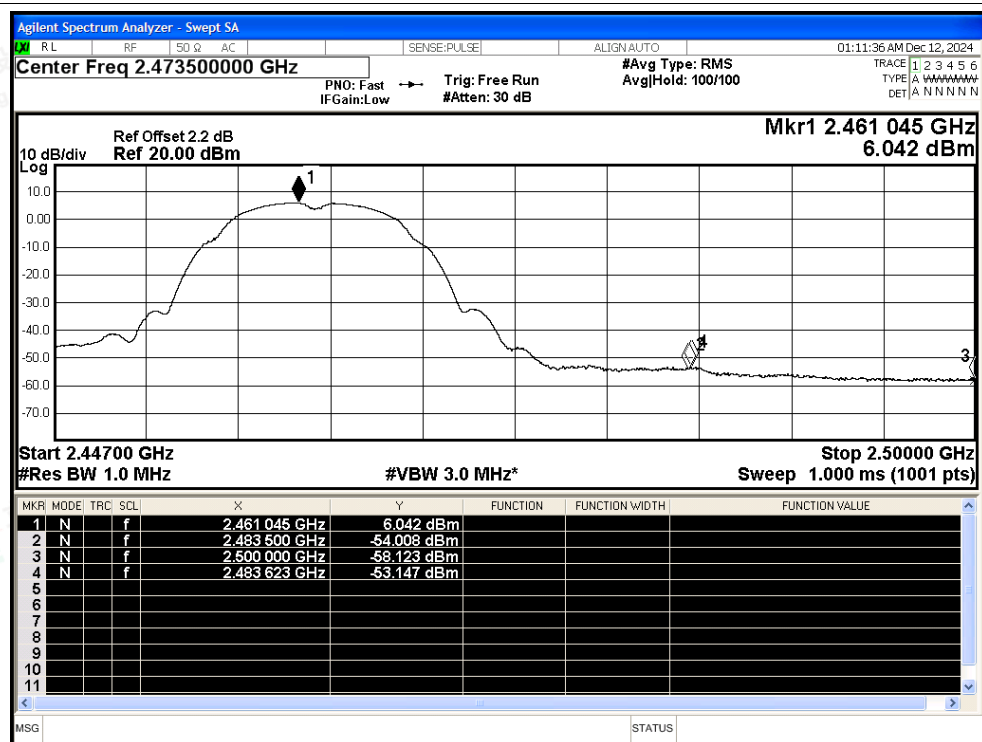




Restrict Band NVNT g 2412MHz Ant1 Peak

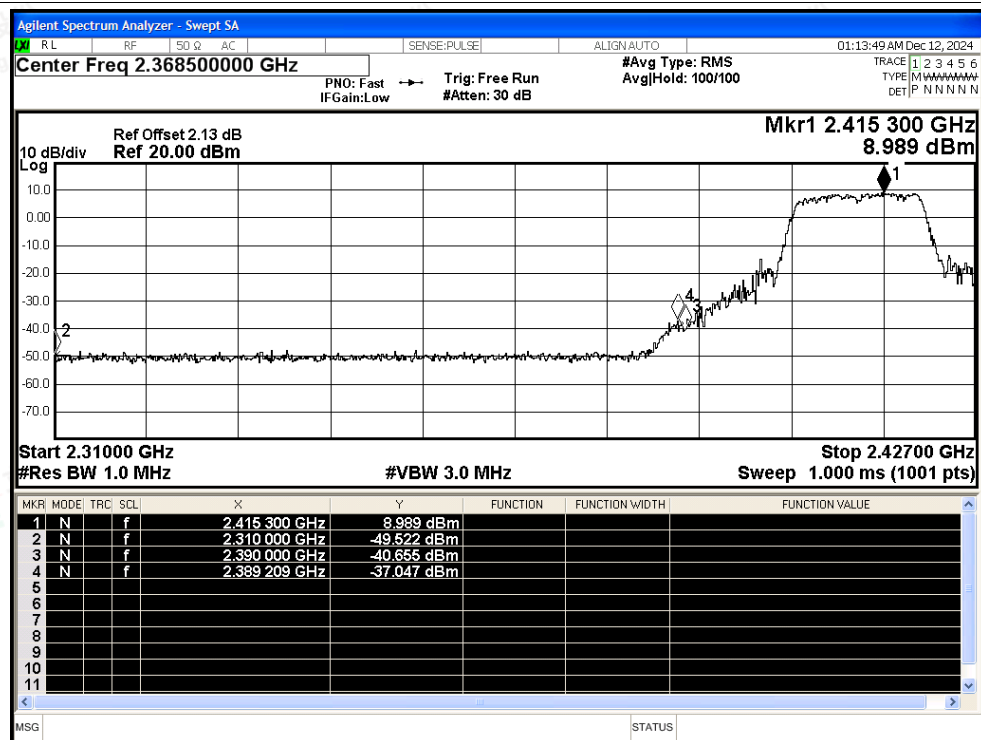


Restrict Band NVNT g 2412MHz Ant1 Average

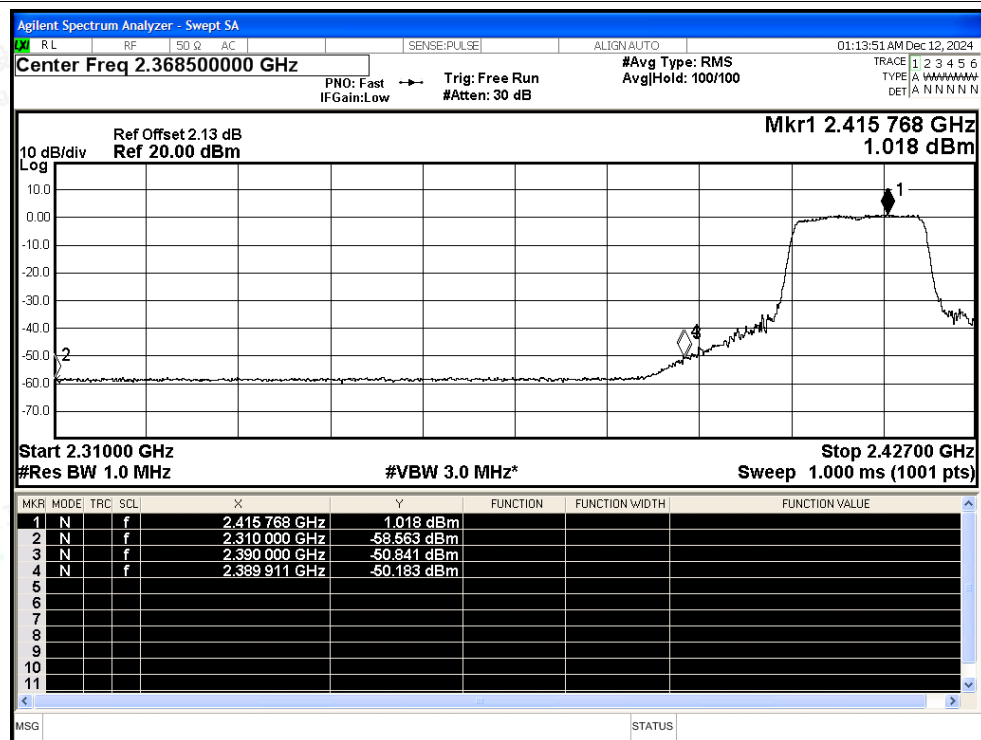




Restrict Band NVNT g 2462MHz Ant1 Peak

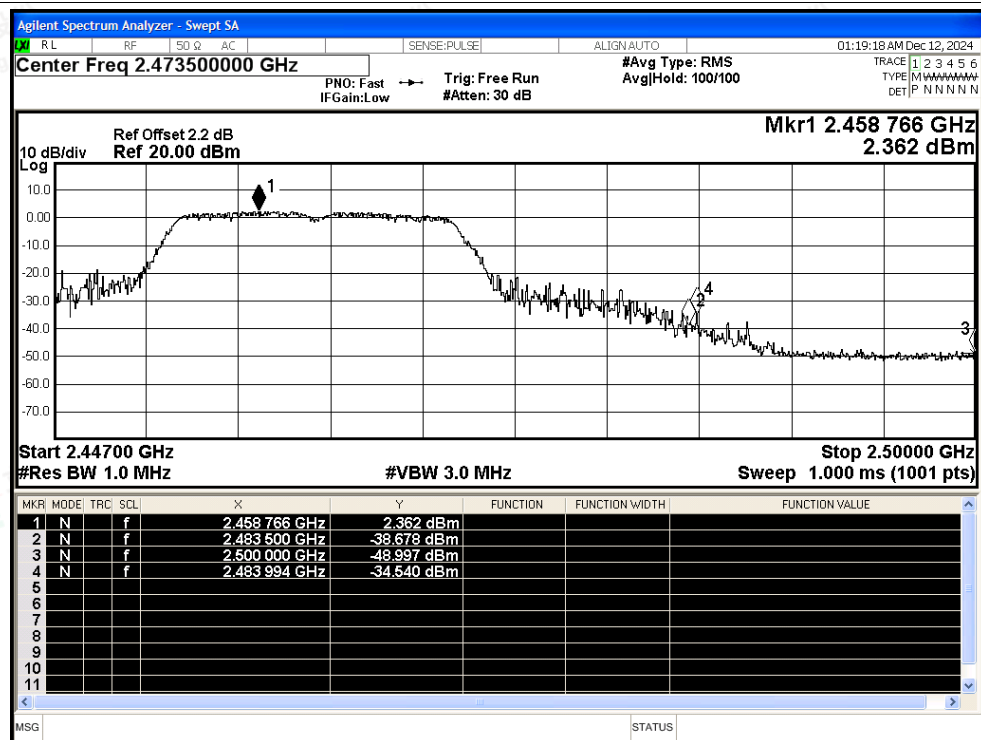


Restrict Band NVNT g 2462MHz Ant1 Average

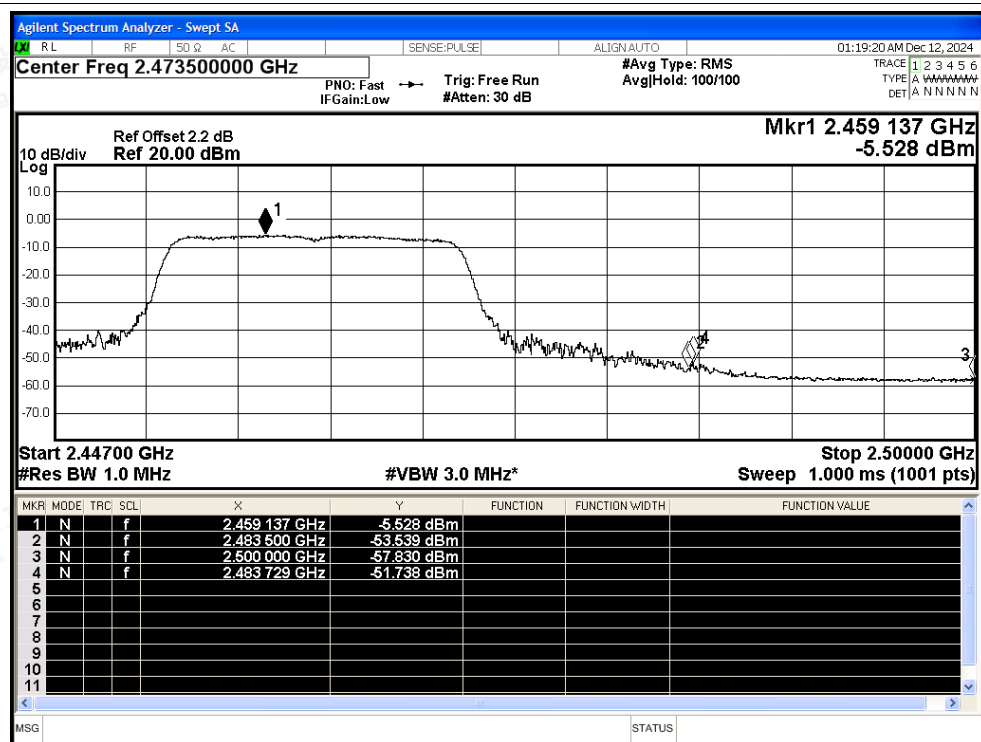




Restrict Band NVNT n20 2412MHz Ant1 Peak

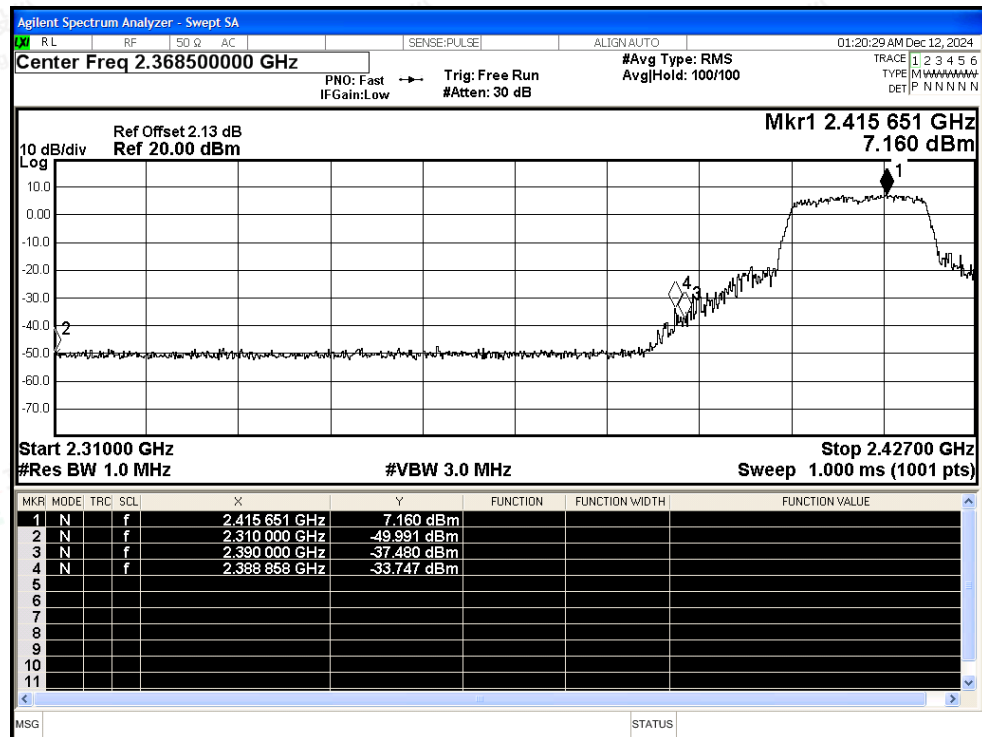


Restrict Band NVNT n20 2412MHz Ant1 Average

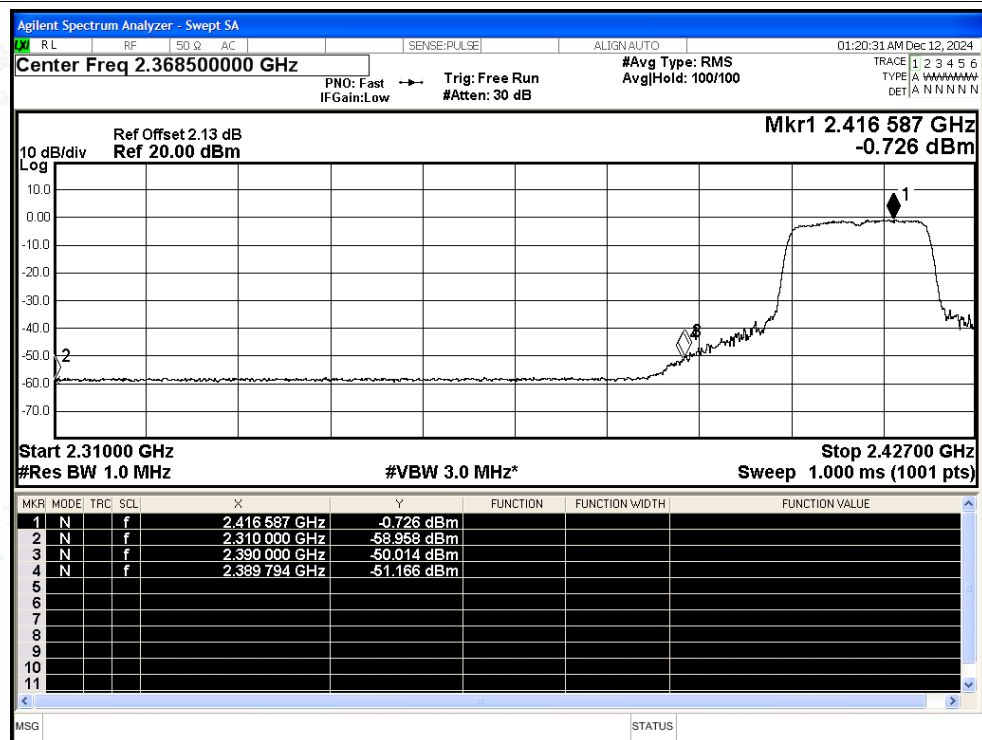




Restrict Band NVNT n20 2462MHz Ant1 Peak

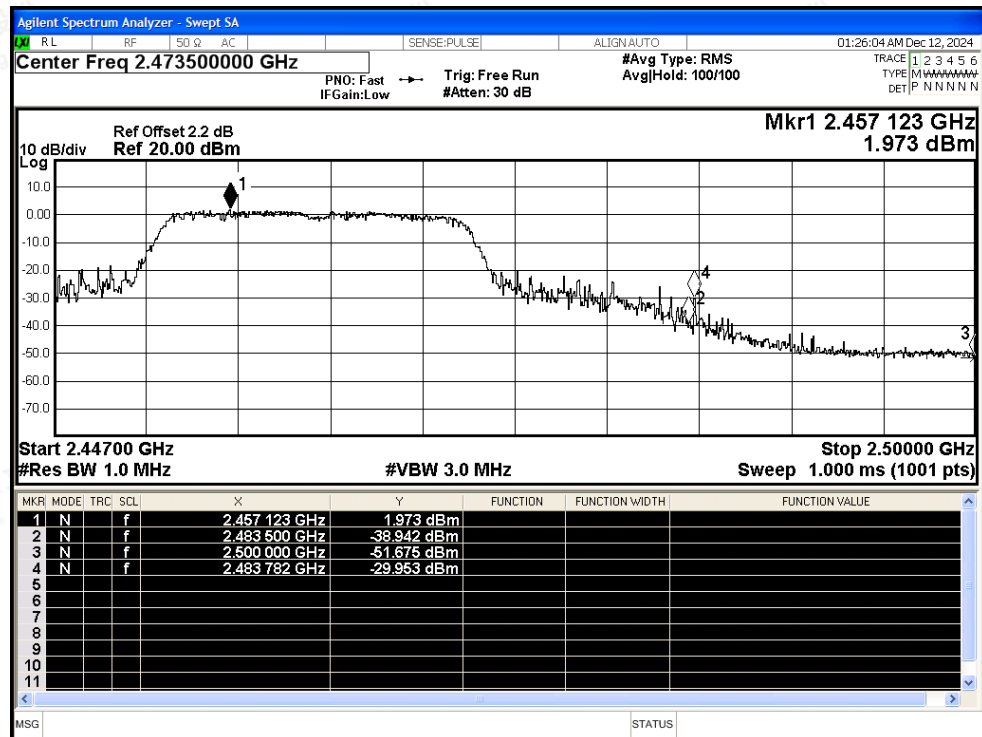


Restrict Band NVNT n20 2462MHz Ant1 Average

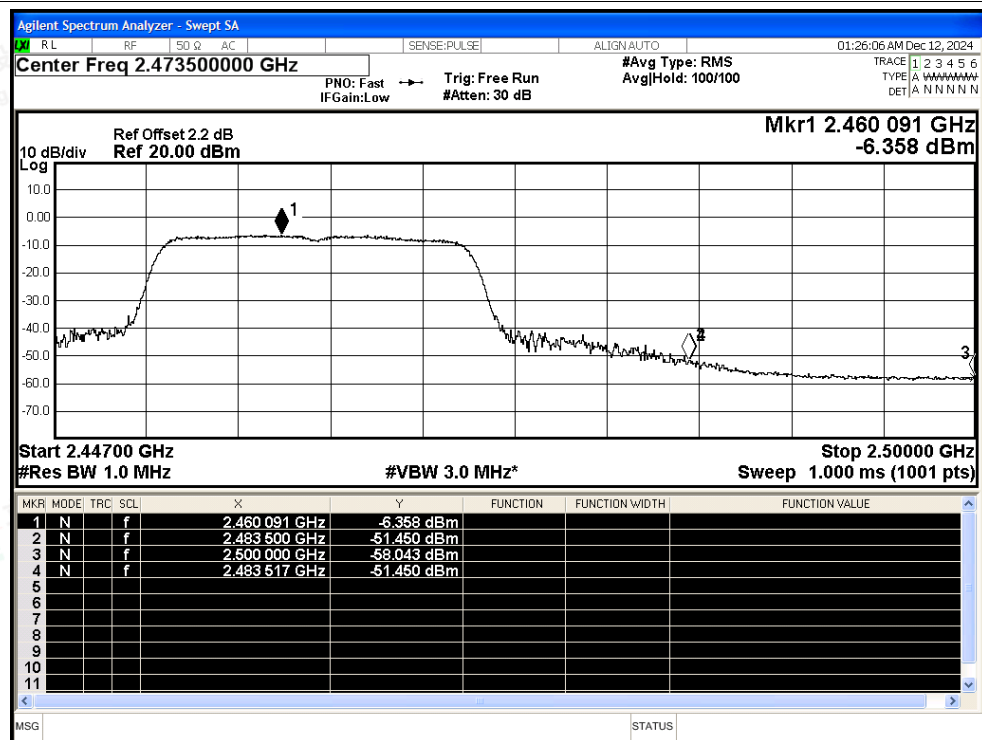




Restrict Band NVNT n40 2422MHz Ant1 Peak

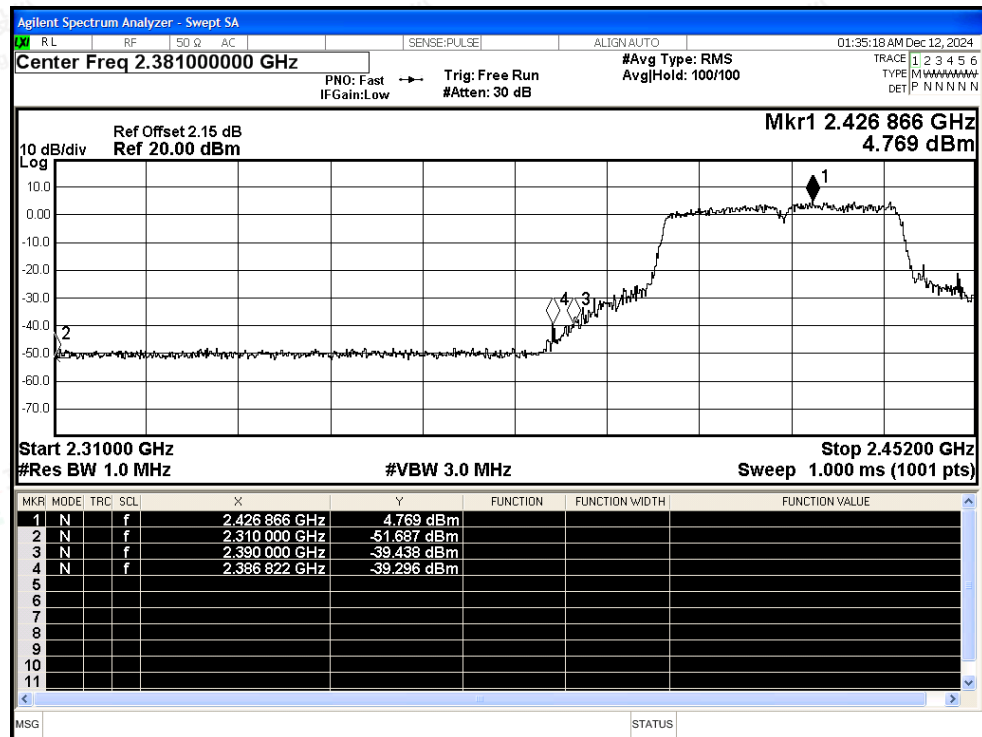


Restrict Band NVNT n40 2422MHz Ant1 Average

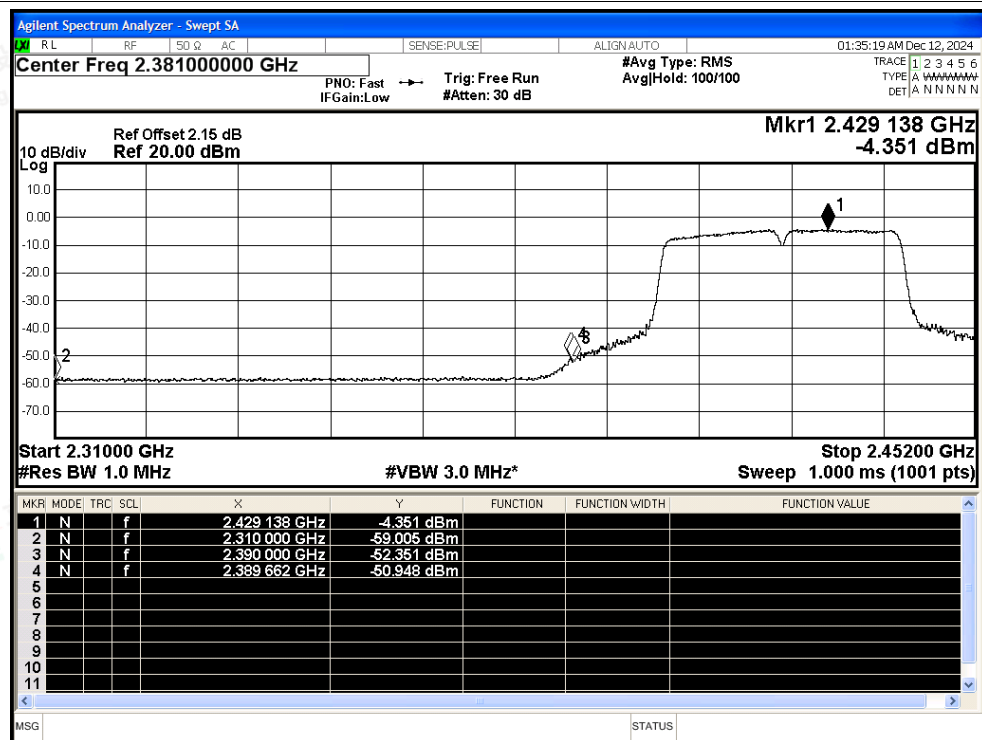




Restrict Band NVNT n40 2452MHz Ant1 Peak

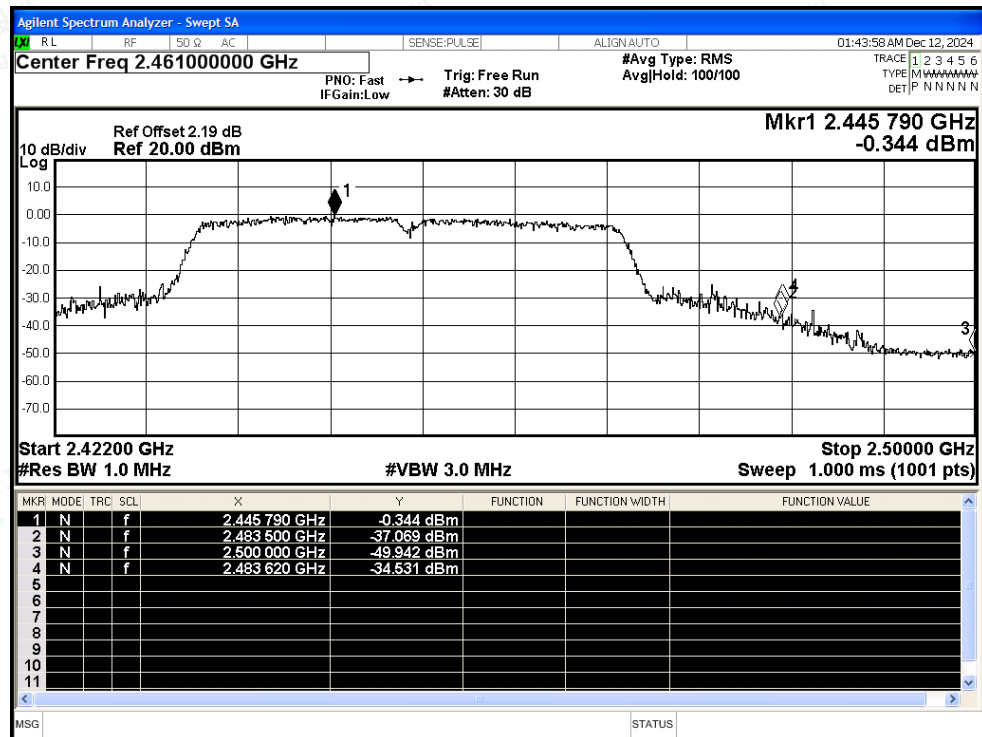


Restrict Band NVNT n40 2452MHz Ant1 Average

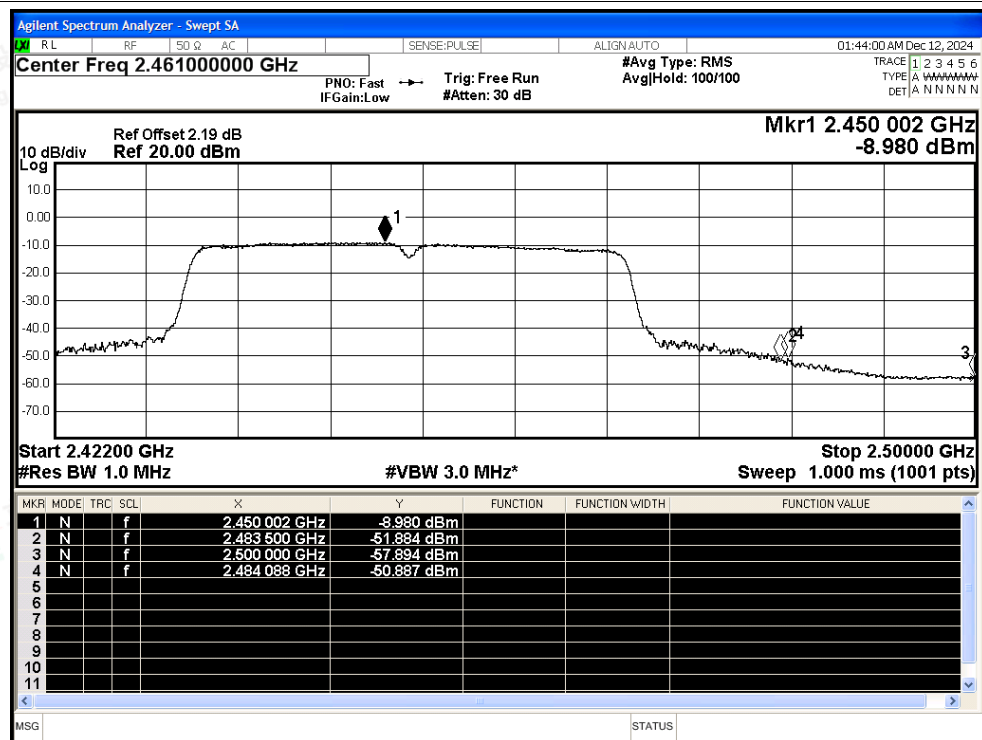




Restrict Band NVNT ax20 2412MHz Ant1 Peak

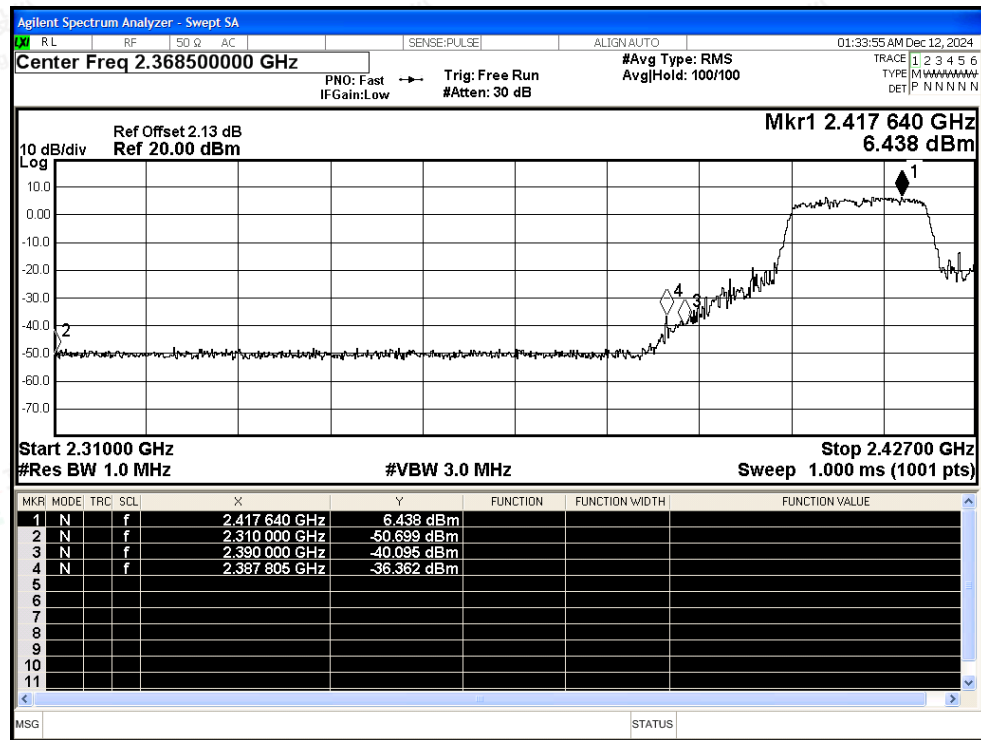


Restrict Band NVNT ax20 2412MHz Ant1 Average

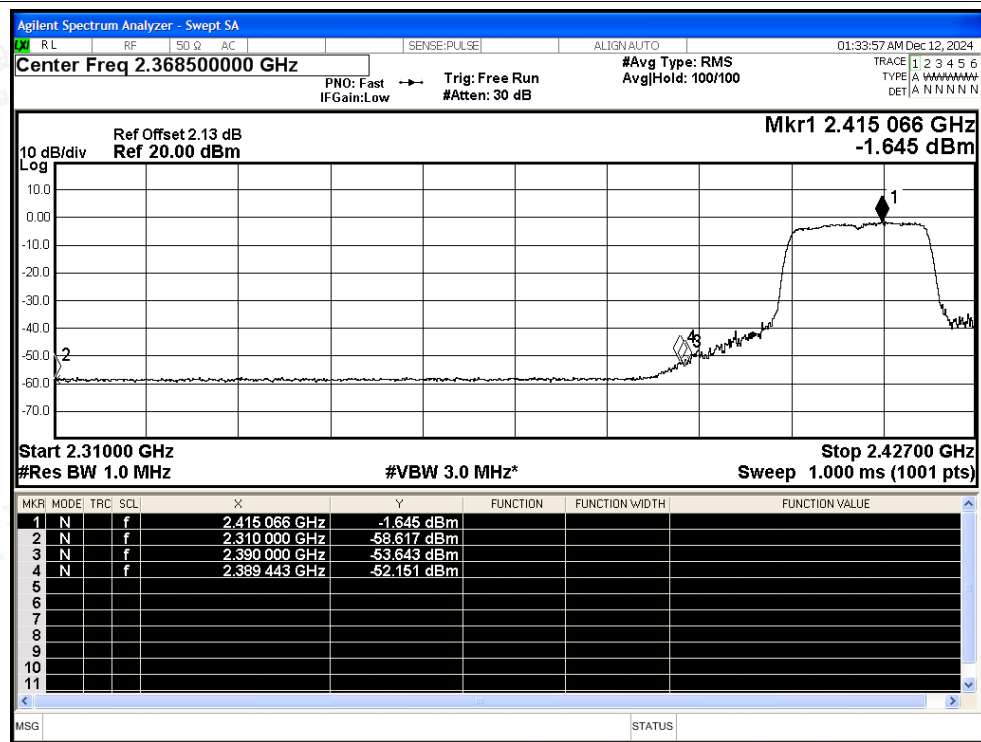




Restrict Band NVNT ax20 2462MHz Ant1 Peak

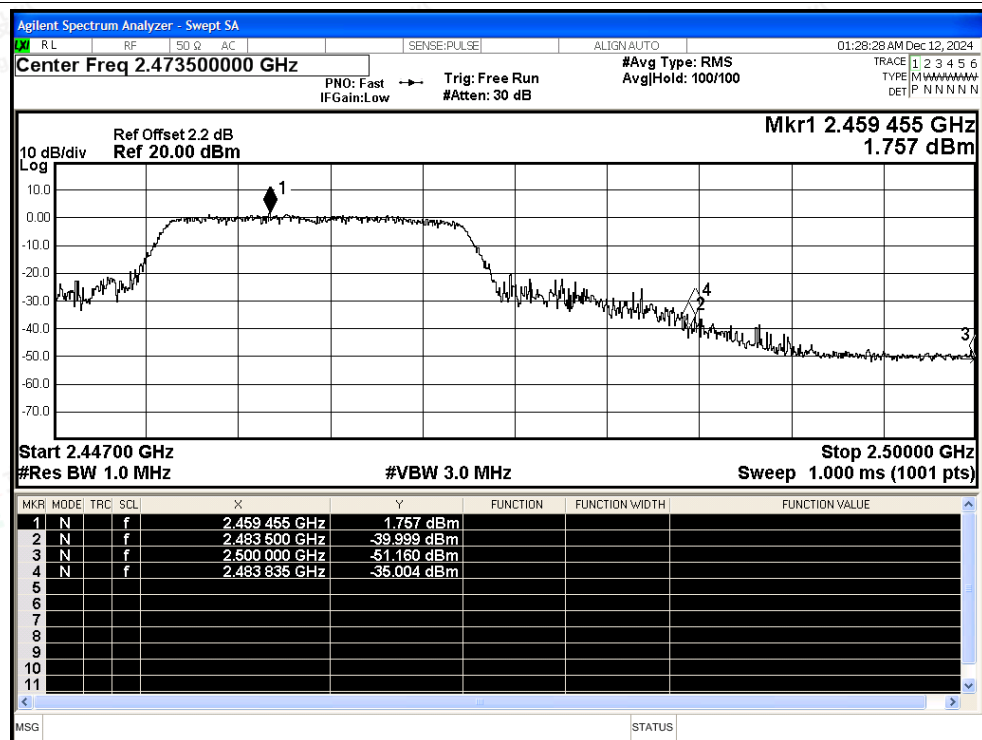


Restrict Band NVNT ax20 2462MHz Ant1 Average

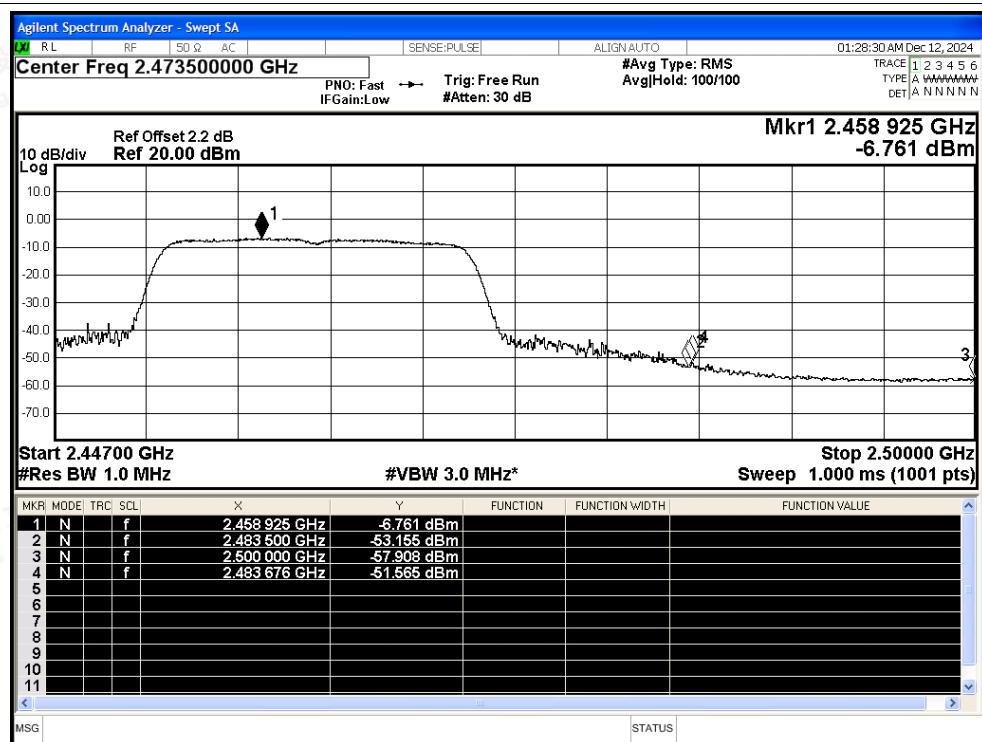




Restrict Band NVNT ax40 2422MHz Ant1 Peak

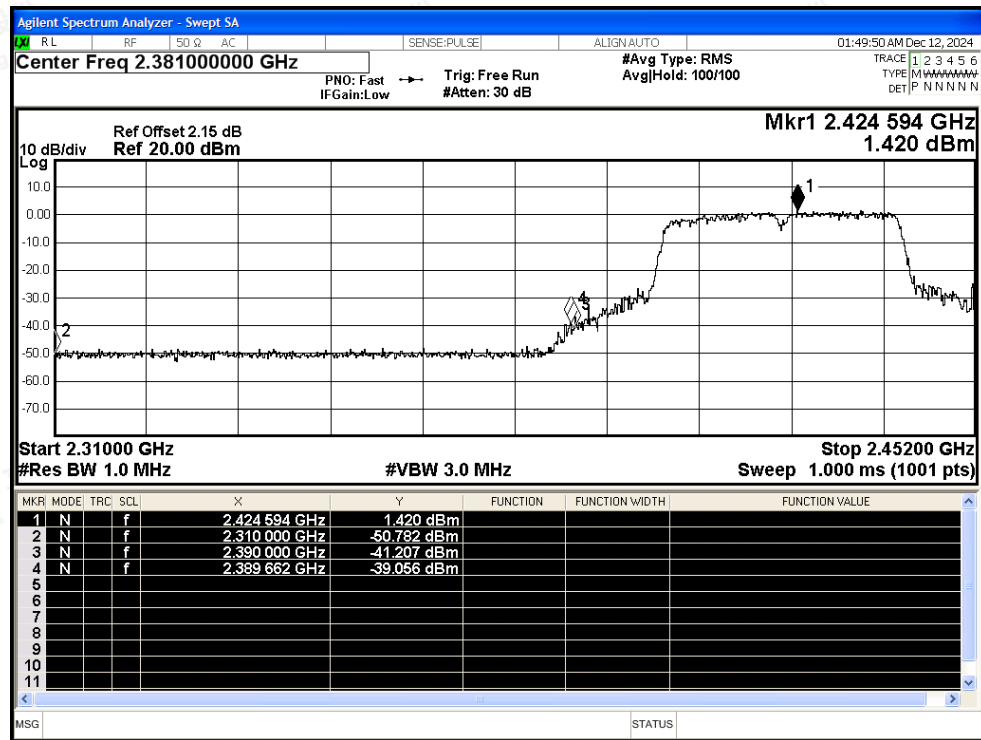


Restrict Band NVNT ax40 2422MHz Ant1 Average

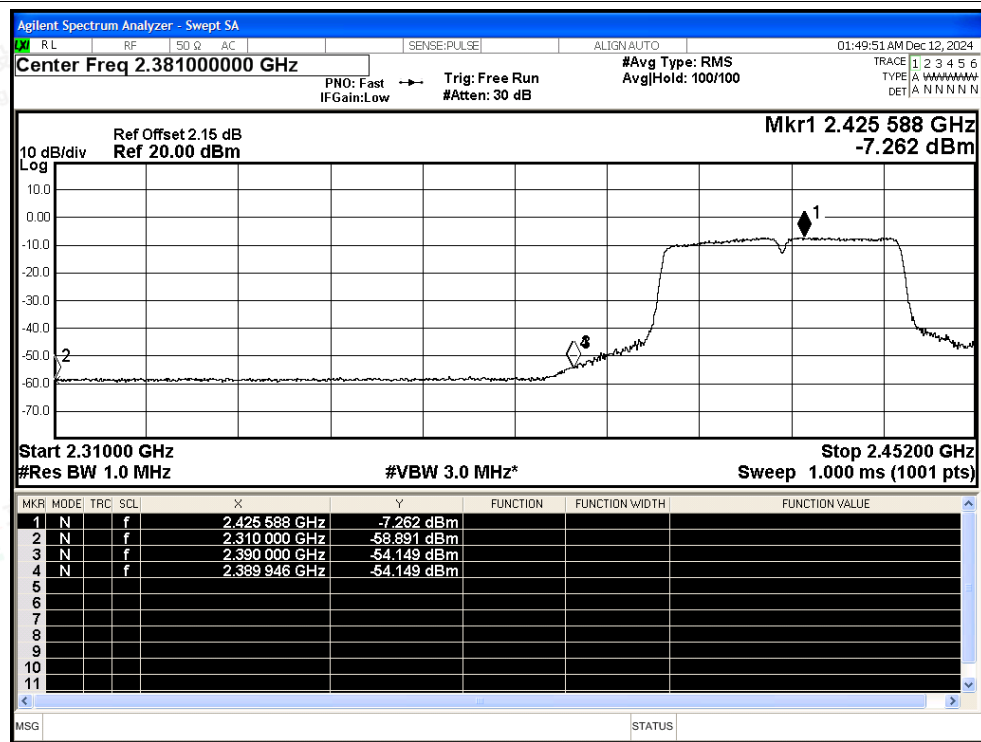



Restrict Band NVNT ax40 2452MHz Ant1 Peak

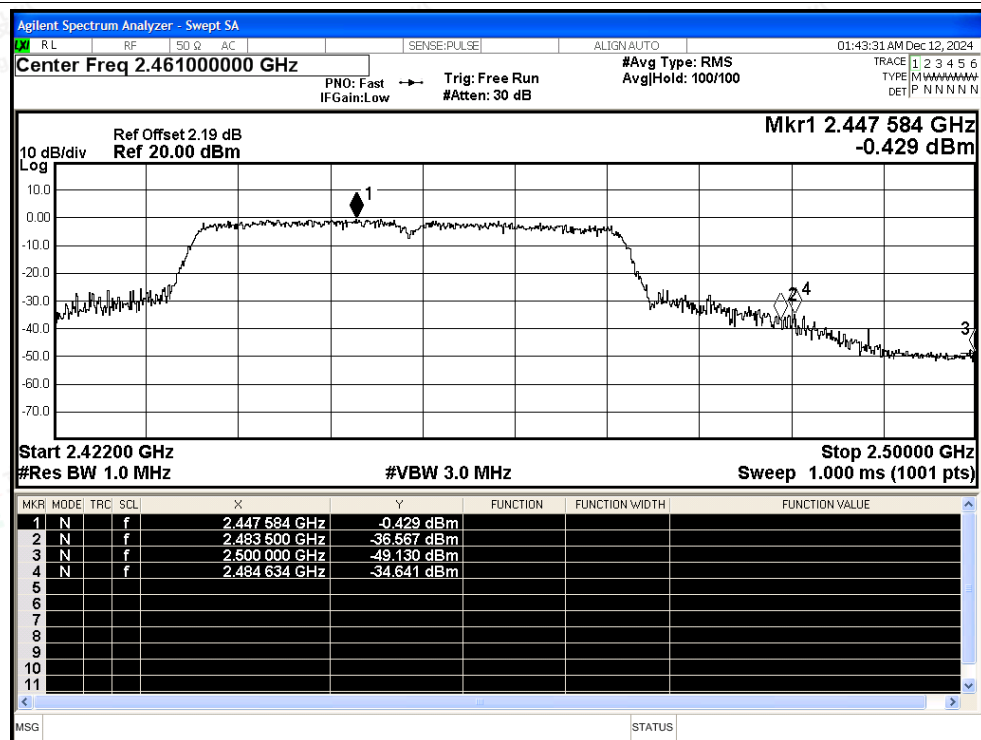

Restrict Band NVNT ax40 2452MHz Ant1 Average

