



TEST REPORT

Product Name: Bluetooth headset
FCC ID: 2BMPZ-P200
Trademark: N/A
Model Number: P200
Prepared For: Shenzhen PuJianda Electronics Co., Ltd.
Address: Building 501, No. 1, No. 4, Yigong Wu Road, Xinhui Jie Dao Lou Cun Community Building, Guangming District, Shenzhen City
Manufacturer: Shenzhen PuJianda Electronics Co., Ltd.
Address: Building 501, No. 1, No. 4, Yigong Wu Road, Xinhui Jie Dao Lou Cun Community Building, Guangming District, Shenzhen City
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhui Road, Xinhui, Xinhui Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Dec. 13, 2024
Sample tested Date: Dec. 13, 2024 to Jan. 10, 2025
Issue Date: Jan. 10, 2025
Report No.: CTB24121306401RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration.....	7
4.3 Support Equipment.....	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup.....	12
6.2 Limit.....	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup.....	16
7.2 Limit.....	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF COUNDUCTED SPURIOUS EMISSIONS	36
8.1 Block Diagram Of Test Setup.....	36
8.2 Limit.....	36
8.3 Test procedure	36
8.4 Test Result	37
9. COUDUCTED PEAK OUTPUT POWER.....	51
9.1 Block Diagram Of Test Setup.....	51
9.2 Limit.....	51
9.3 Test procedure	51
9.4 Test Result	51
10. 20DB OCCUPIED BANDWIDTH.....	58
10.1 Block Diagram Of Test Setup.....	58
10.2 Limit.....	58
10.3 Test procedure	58
10.4 Test Result	58
11. CARRIERFREQUENCIES SEPARATION	65
11.1 Block Diagram Of Test Setup.....	65
11.2 Limit.....	65
11.3 Test procedure	65
11.4 Test Result	65
12. HOPPING CHANNEL NUMBER	73
12.1 Block Diagram Of Test Setup.....	73
12.2 Limit.....	73
12.3 Test procedure	73
12.4 Test Result	73
13. DWELL TIME.....	76
13.1 Block Diagram Of Test Setup.....	76
13.2 Limit.....	76
13.3 Test procedure	76
13.4 Test Result	76

14. PSEUDORANDOM FREQUENCY	84
14.1 Limit.....	84
14.2 Test procedure	84
14.3 Test Result	84
15. ANTENNA REQUIREMENT	85
16. EUT TEST SETUP PHOTOGRAPHS.....	86

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB24121306401RF01	Jan. 10, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63℃
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	P200
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.4
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 2.828dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Chip antenna
Antenna Gain:	Bluetooth: 2.7dBi
Ratings:	DC 5V charging from adapter DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}\text{C}$)	23
Low Temperature($^{\circ}\text{C}$)	0
High Temperature($^{\circ}\text{C}$)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/6/28


10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

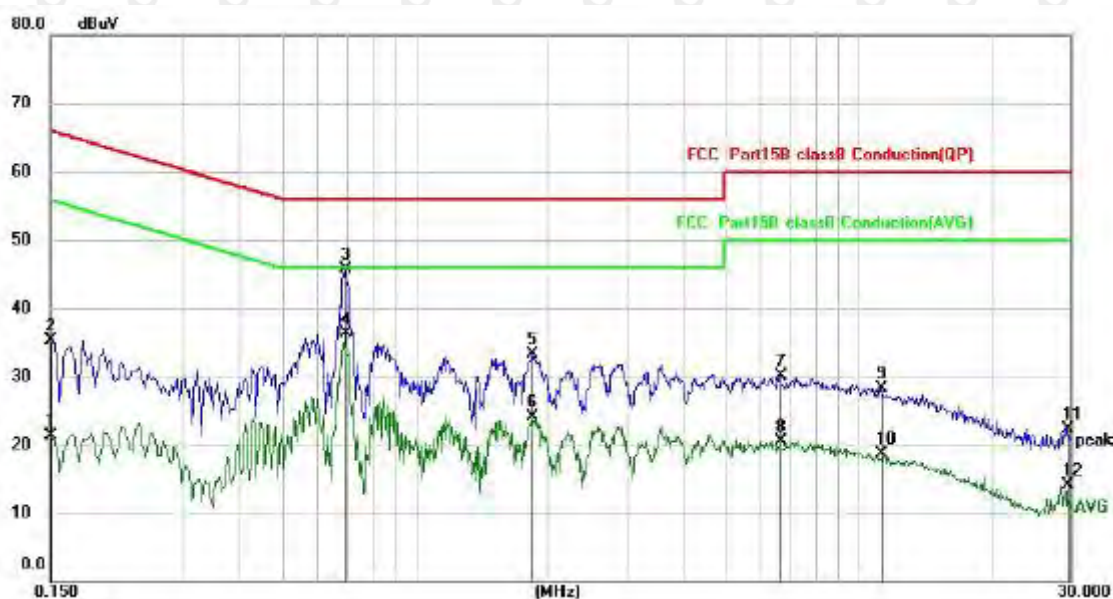


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	10.36	10.89	21.25	56.00	-34.75	AVG
2		0.1500	24.38	10.89	35.27	56.00	-20.73	AVG
3		0.6940	34.99	10.71	45.70	56.00	-10.30	QP
4	*	0.6940	25.54	10.71	36.25	46.00	-9.75	AVG
5		1.8300	21.77	11.47	33.24	56.00	-22.76	QP
6		1.8300	12.68	11.47	24.15	46.00	-21.85	AVG
7		6.6420	17.33	12.81	30.14	60.00	-29.86	QP
8		6.6420	7.69	12.81	20.50	50.00	-29.50	AVG
9		11.2140	15.09	13.26	28.35	60.00	-31.65	QP
10		11.2140	5.47	13.26	18.73	50.00	-31.27	AVG
11		29.6780	7.90	14.46	22.36	60.00	-37.64	QP
12		29.6780	-0.28	14.46	14.18	50.00	-35.82	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

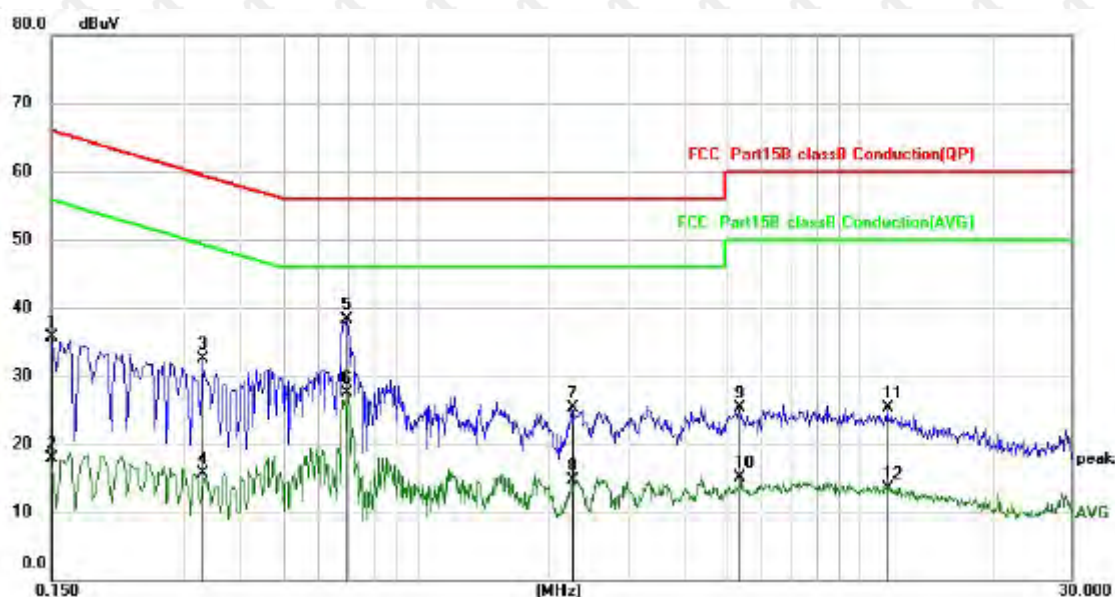

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	24.84	10.89	35.73	66.00	-30.27	QP
2		0.1500	7.02	10.89	17.91	56.00	-38.09	AVG
3		0.3300	21.80	10.62	32.42	59.45	-27.03	QP
4		0.3300	5.15	10.62	15.77	49.45	-33.68	AVG
5	*	0.6940	27.68	10.71	38.39	56.00	-17.61	QP
6		0.6940	16.75	10.71	27.46	46.00	-18.54	AVG
7		2.2460	13.75	11.63	25.38	56.00	-30.62	QP
8		2.2460	3.08	11.63	14.71	46.00	-31.29	AVG
9		5.3380	12.92	12.36	25.28	60.00	-34.72	QP
10		5.3380	2.74	12.36	15.10	50.00	-34.90	AVG
11		11.5620	12.10	13.27	25.37	60.00	-34.63	QP
12		11.5620	0.15	13.27	13.42	50.00	-36.58	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

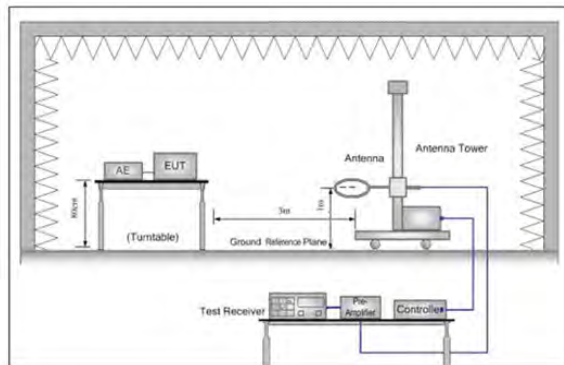


Figure 1. Below 30MHz

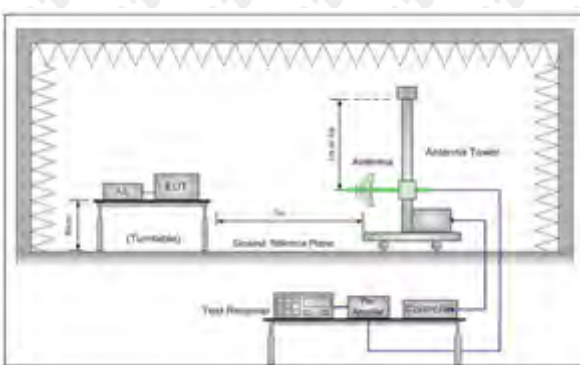


Figure 2. 30MHz to 1GHz

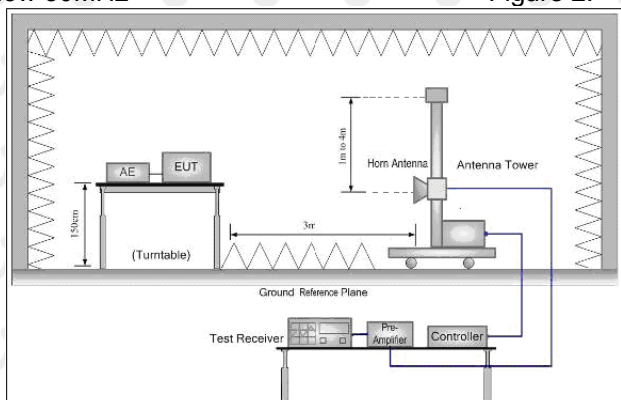


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Left ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		32.7486	26.03	-6.39	19.64	40.00	-20.36	QP
2		50.3206	26.32	-6.64	19.68	40.00	-20.32	QP
3		157.2829	25.51	-1.38	24.13	43.50	-19.37	QP
4		285.4768	26.39	-3.16	23.23	46.00	-22.77	QP
5		698.0796	26.19	5.36	31.55	46.00	-14.45	QP
6	*	948.7610	26.09	8.60	34.69	46.00	-11.31	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

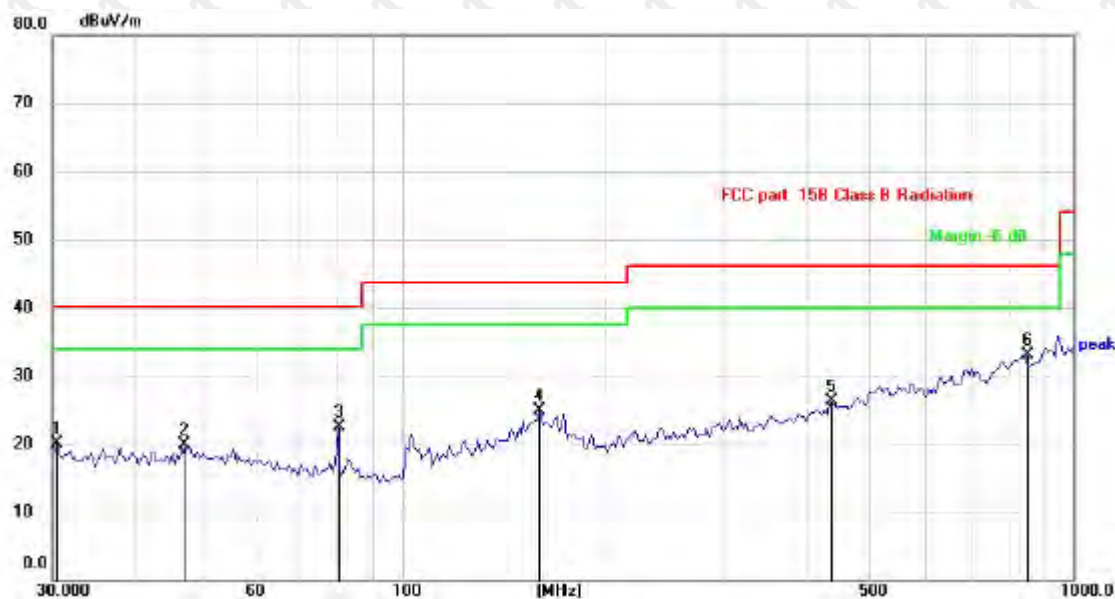

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dB/m	dB	Detector
1		30.5306	26.36	-6.20	20.16	40.00	-19.84	QP
2		46.9125	26.65	-6.71	19.94	40.00	-20.06	QP
3		80.0806	31.25	-8.69	22.56	40.00	-17.44	QP
4		160.0648	25.69	-0.84	24.85	43.50	-18.65	QP
5		434.8268	26.02	0.28	26.30	46.00	-19.70	QP
6	*	846.5708	25.37	7.80	33.17	46.00	-12.83	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Right ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

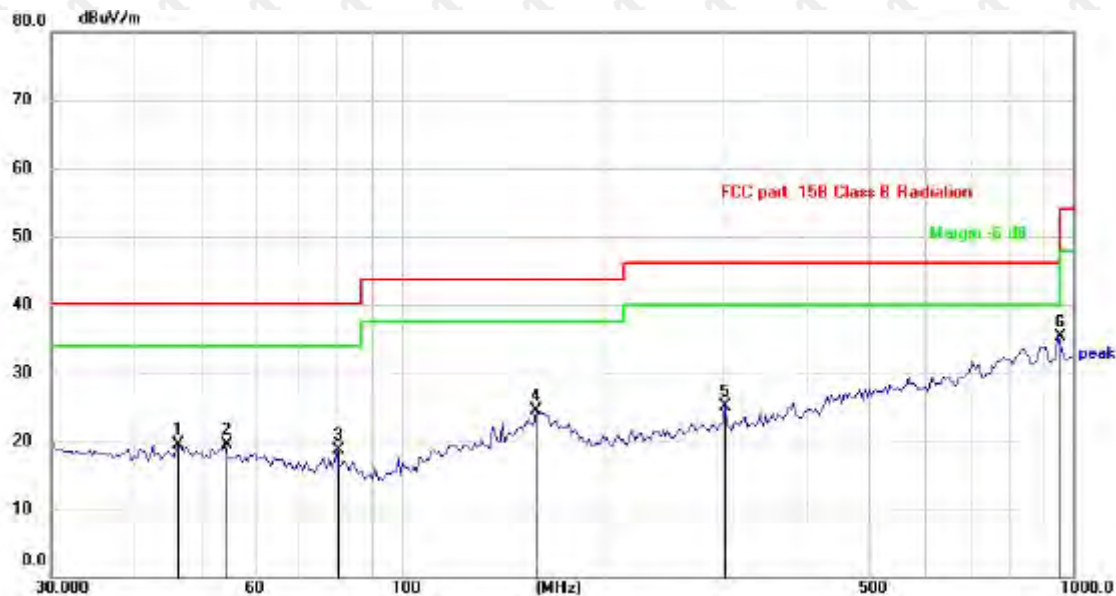

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		46.5030	26.23	-6.72	19.51	40.00	-20.49	QP
2		54.4516	26.42	-6.94	19.48	40.00	-20.52	QP
3		80.0806	27.41	-8.69	18.72	40.00	-21.28	QP
4		158.6677	25.53	-1.10	24.43	43.50	-19.07	QP
5		303.5437	27.86	-2.82	25.04	46.00	-20.96	QP
6	*	948.7610	26.78	8.60	35.38	46.00	-10.62	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

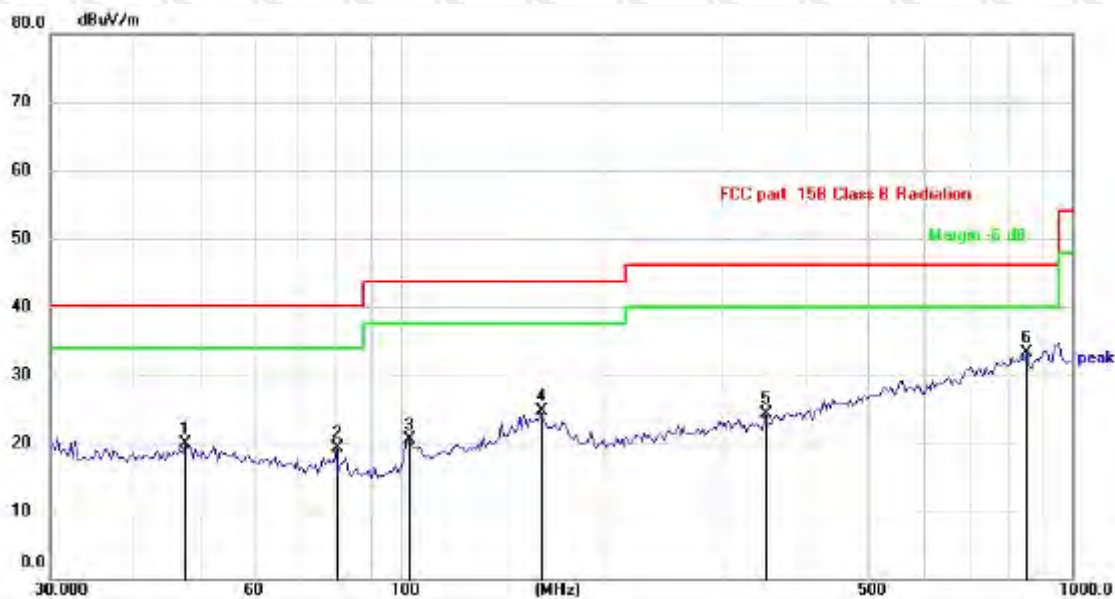

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.7422	26.66	-6.68	19.98	40.00	-20.02	QP
2		80.0806	27.97	-8.69	19.28	40.00	-20.72	QP
3		102.3597	29.53	-9.01	20.52	43.50	-22.98	QP
4		161.4742	25.75	-1.01	24.74	43.50	-18.76	QP
5		349.2500	26.15	-1.83	24.32	46.00	-21.68	QP
6	*	854.0247	25.52	7.86	33.38	46.00	-12.62	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Left ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	59.11	-3.65	55.46	74.00	-18.54	peak
4804	50.52	-3.65	46.87	54.00	-7.13	AVG
7206	58.65	-0.95	57.70	74.00	-16.30	peak
7206	41.80	-0.95	40.85	54.00	-13.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.51	-3.65	52.86	74.00	-21.14	peak
4804	49.57	-3.65	45.92	54.00	-8.08	AVG
7206	60.96	-0.95	60.01	74.00	-13.99	peak
7206	40.62	-0.95	39.67	54.00	-14.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	60.29	-3.54	56.75	74.00	-17.25	peak
4882.00	46.83	-3.54	43.29	54.00	-10.71	AVG
7323.00	58.11	-0.81	57.30	74.00	-16.70	peak
7323.00	42.09	-0.81	41.28	54.00	-12.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	56.56	-3.54	53.02	74.00	-20.98	peak
4882.00	48.35	-3.54	44.81	54.00	-9.19	AVG
7323.00	57.99	-0.81	57.18	74.00	-16.82	peak
7323.00	41.24	-0.81	40.43	54.00	-13.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.11	-3.43	54.68	74.00	-19.32	peak
4960	48.88	-3.44	45.44	54.00	-8.56	AVG
7440	58.70	-0.77	57.93	74.00	-16.07	peak
7440	41.92	-0.77	41.15	54.00	-12.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.53	-3.43	53.10	74.00	-20.90	peak
4960	49.84	-3.44	46.40	54.00	-7.60	AVG
7440	60.55	-0.77	59.78	74.00	-14.22	peak
7440	39.92	-0.77	39.15	54.00	-14.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.56	-5.81	51.75	74.00	-22.25	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.44	-5.84	50.60	74.00	-23.40	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.08	-5.81	51.27	74.00	-22.73	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.46	-5.84	50.62	74.00	-23.38	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.19	-5.81	49.38	74.00	-24.62	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.26	-6.06	48.20	74.00	-25.80	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	57.69	-5.81	51.88	74.00	-22.12	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.68	-6.06	48.62	74.00	-25.38	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.08	-5.81	50.27	74.00	-23.73	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.85	-5.84	49.01	74.00	-24.99	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.03	-5.81	48.22	74.00	-25.78	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.86	-5.84	49.02	74.00	-24.98	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	57.87	-5.81	52.06	74.00	-21.94	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.16	-6.06	49.10	74.00	-24.90	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.90	-5.81	50.09	74.00	-23.91	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.49	-6.06	47.43	74.00	-26.57	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Right ear:
Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.82	-3.65	53.17	74.00	-20.83	peak
4804	48.48	-3.65	44.83	54.00	-9.17	AVG
7206	58.77	-0.95	57.82	74.00	-16.18	peak
7206	42.50	-0.95	41.55	54.00	-12.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.24	-3.65	53.59	74.00	-20.41	peak
4804	50.10	-3.65	46.45	54.00	-7.55	AVG
7206	58.86	-0.95	57.91	74.00	-16.09	peak
7206	40.92	-0.95	39.97	54.00	-14.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	59.31	-3.54	55.77	74.00	-18.23	peak
4882.00	46.74	-3.54	43.20	54.00	-10.80	AVG
7323.00	56.05	-0.81	55.24	74.00	-18.76	peak
7323.00	42.90	-0.81	42.09	54.00	-11.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.91	-3.54	54.37	74.00	-19.63	peak
4882.00	50.19	-3.54	46.65	54.00	-7.35	AVG
7323.00	57.56	-0.81	56.75	74.00	-17.25	peak
7323.00	42.74	-0.81	41.93	54.00	-12.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.36	-3.43	54.93	74.00	-19.07	peak
4960	48.69	-3.44	45.25	54.00	-8.75	AVG
7440	60.64	-0.77	59.87	74.00	-14.13	peak
7440	41.40	-0.77	40.63	54.00	-13.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.92	-3.43	53.49	74.00	-20.51	peak
4960	49.06	-3.44	45.62	54.00	-8.38	AVG
7440	58.91	-0.77	58.14	74.00	-15.86	peak
7440	40.57	-0.77	39.80	54.00	-14.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	57.64	-5.81	51.83	74.00	-22.17	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.88	-5.84	49.04	74.00	-24.96	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.48	-5.81	50.67	74.00	-23.33	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.46	-5.84	49.62	74.00	-24.38	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	54.83	-5.81	49.02	74.00	-24.98	
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.48	-6.06	48.42	74.00	-25.58	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	57.11	-5.81	51.30	74.00	-22.70	
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.16	-6.06	49.10	74.00	-24.90	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.39	-5.81	48.58	74.00	-25.42	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.25	-5.84	49.41	74.00	-24.59	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.54	-5.81	48.73	74.00	-25.27	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.90	-5.84	48.06	74.00	-25.94	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	57.80	-5.81	51.99	74.00	-22.01	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.21	-6.06	50.15	74.00	-23.85	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.50	56.87	-5.81	51.06	74.00	-22.94	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.13	-6.06	49.07	74.00	-24.93	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

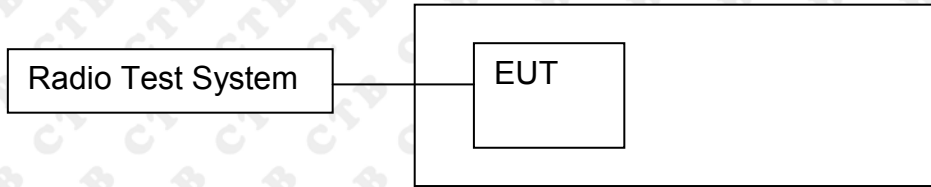

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

8.4 Test Result


Left ear:

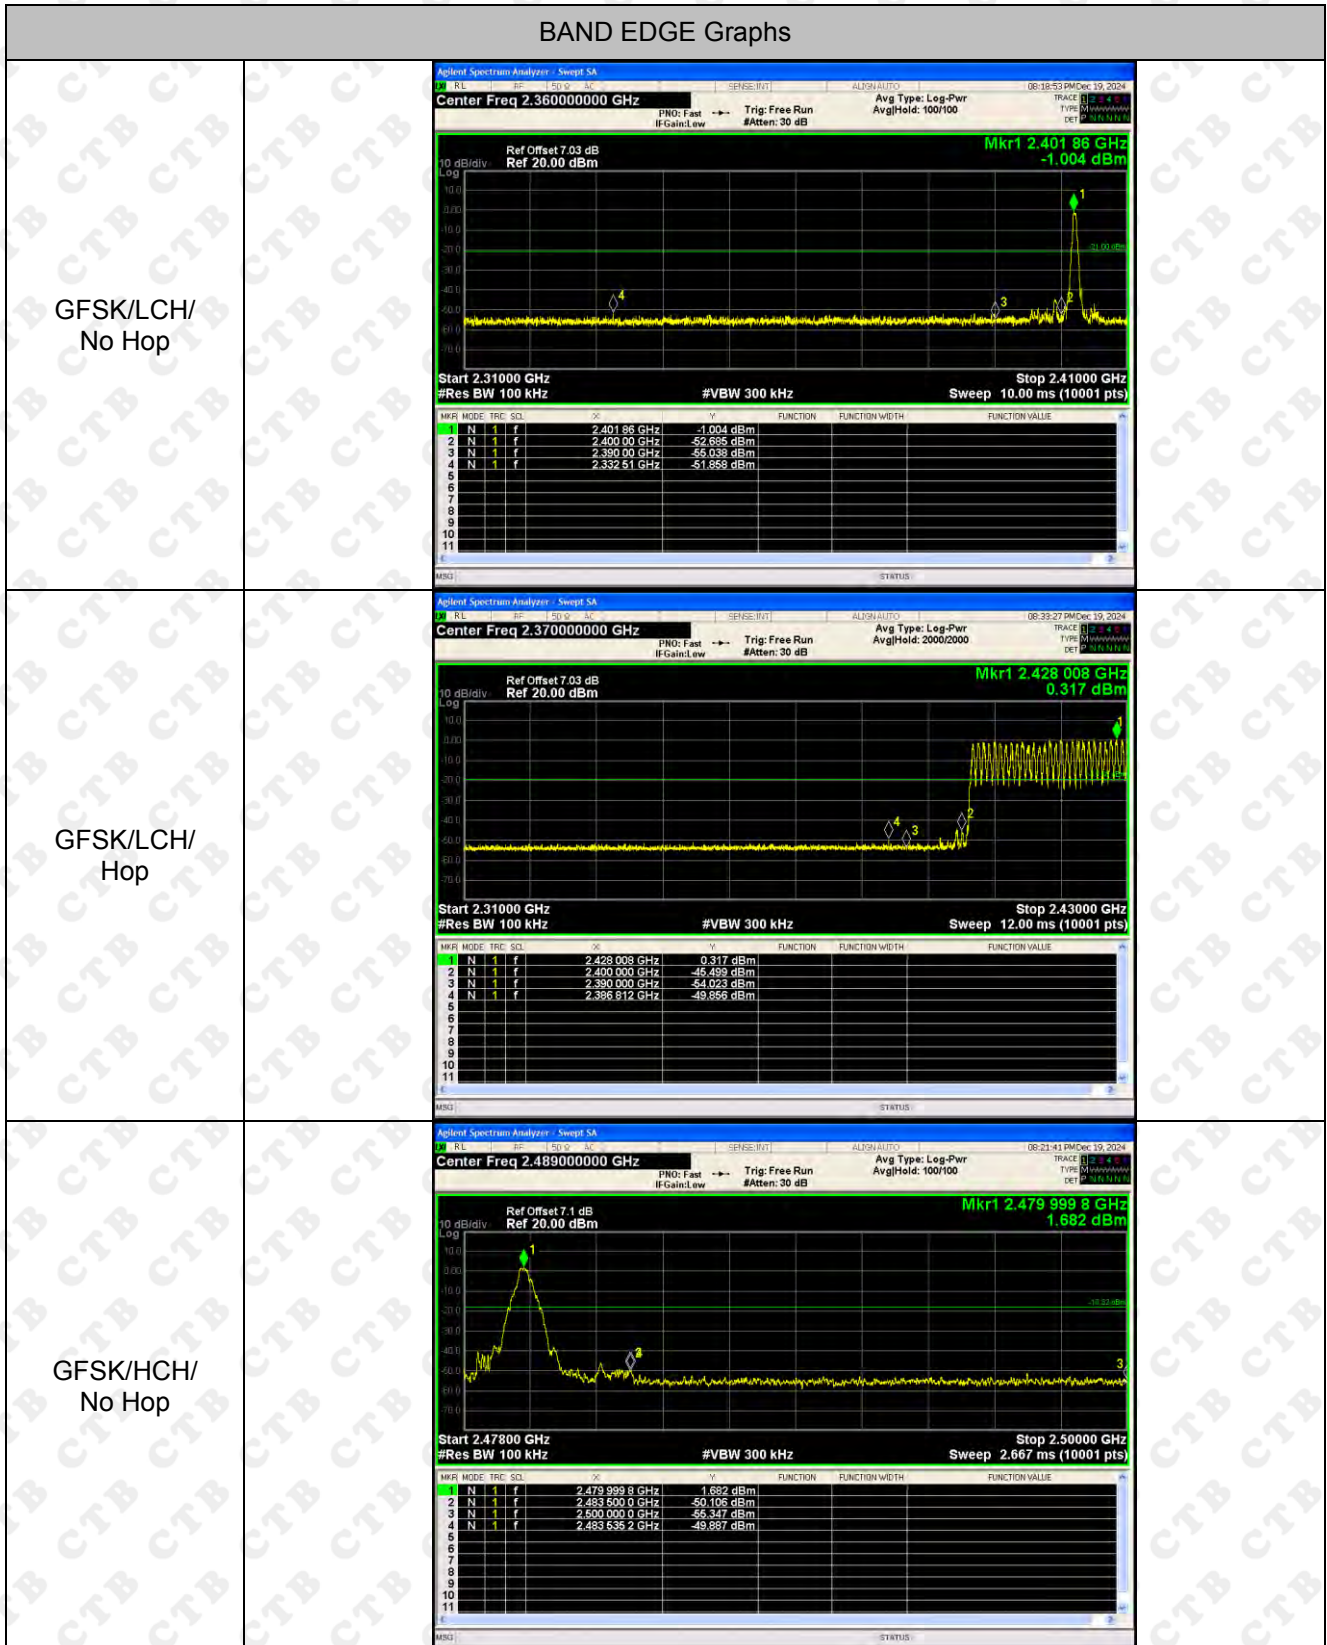


GFSK/HCH/
Hop



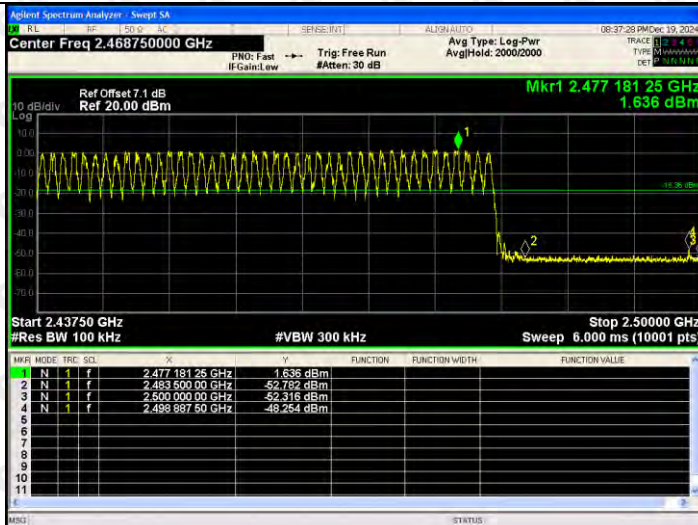


$\pi/4$ DQPSK/LCH/
No Hop

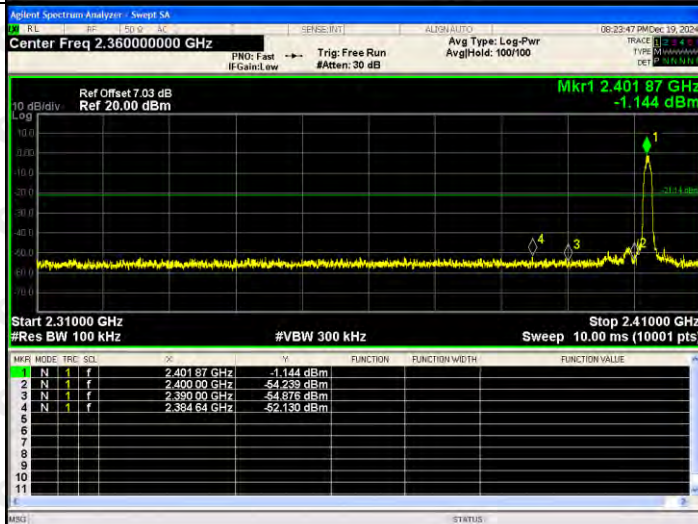


$\pi/4$ DQPSK/LCH/
Hop

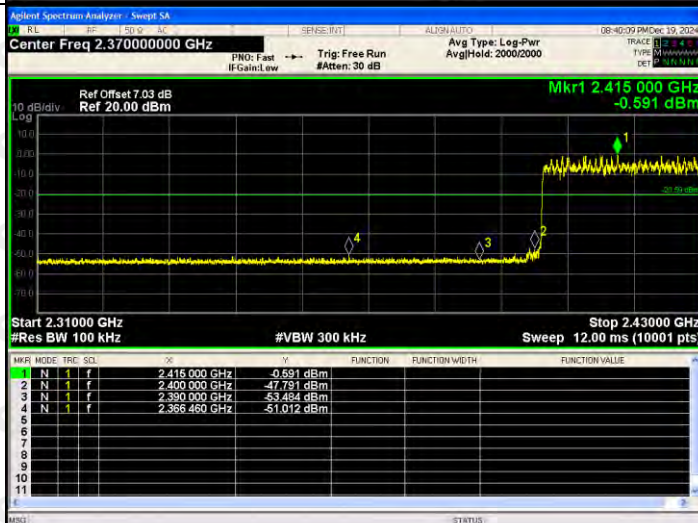


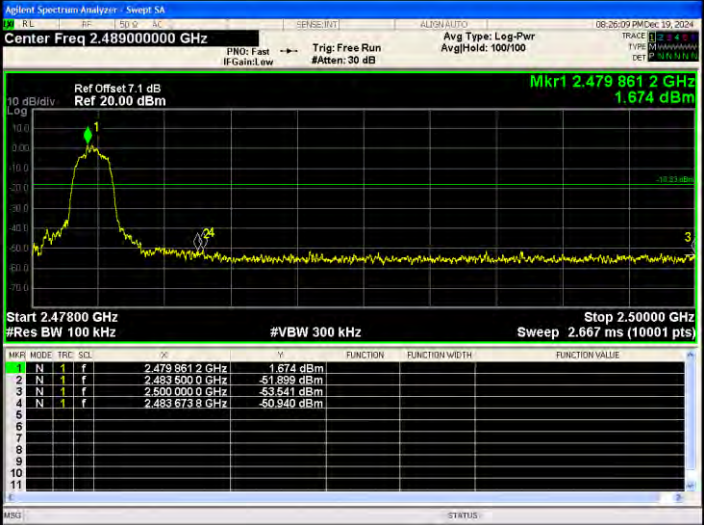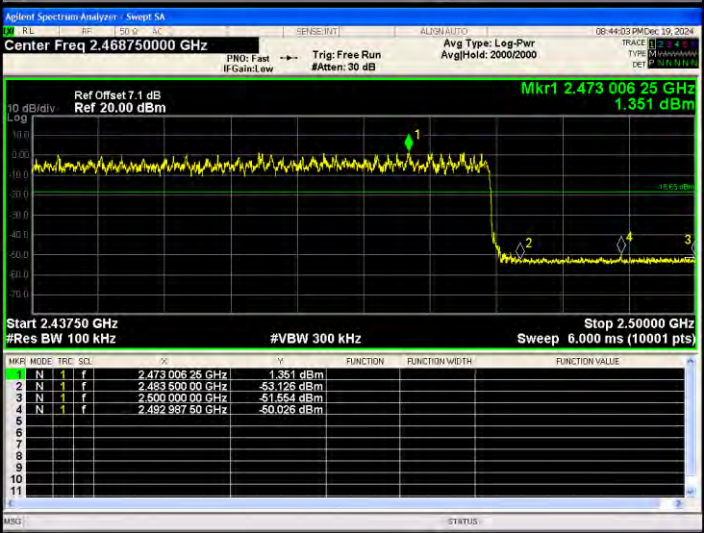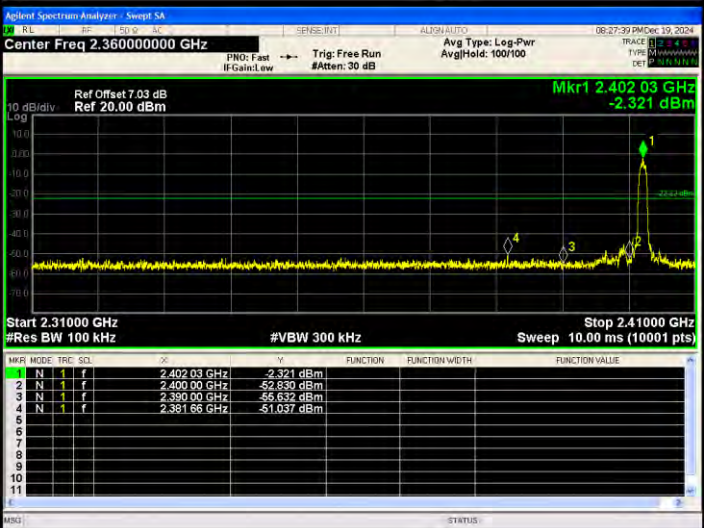$\pi/4$DQPSK/HCH/ No Hop		
$\pi/4$DQPSK/HCH/ Hop		
8DPSK/LCH/No Hop		


8DPSK
/LCH/Hop

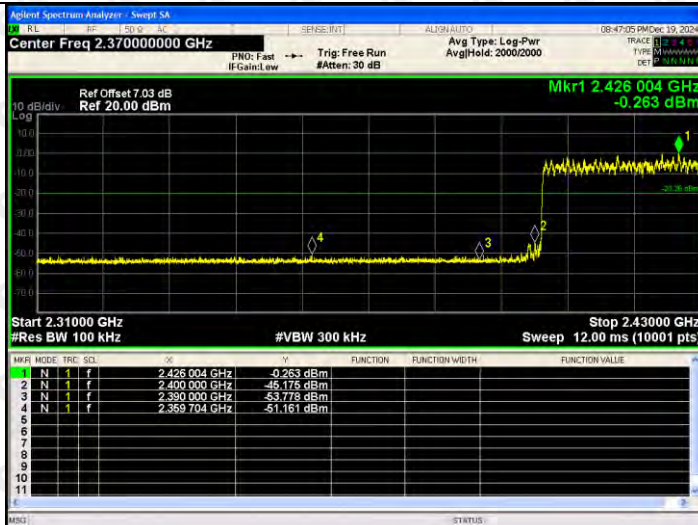

8DPSK /HCH/No
Hop

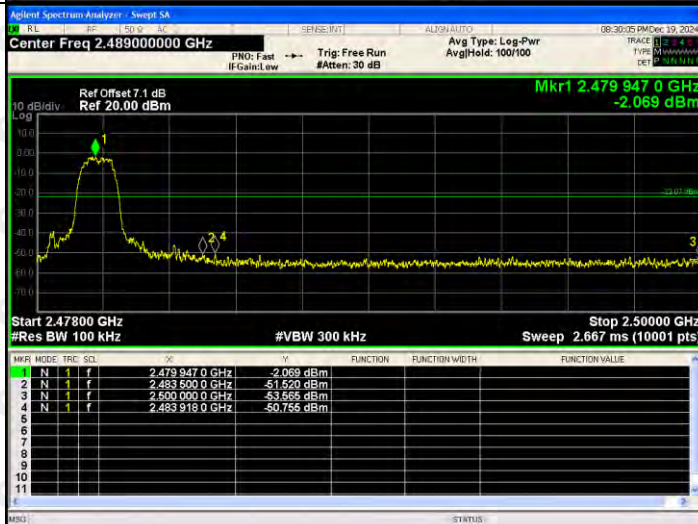


8DPSK
/HCH/Hop

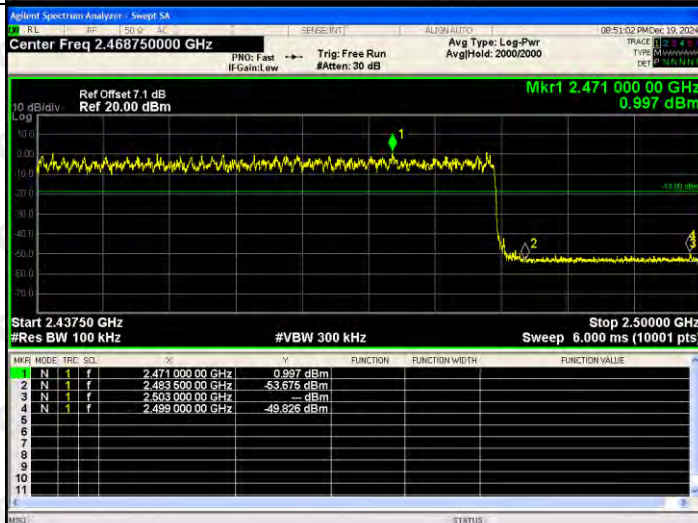


RF Conducted Spurious Emissions Graphs


GFSK/LCH



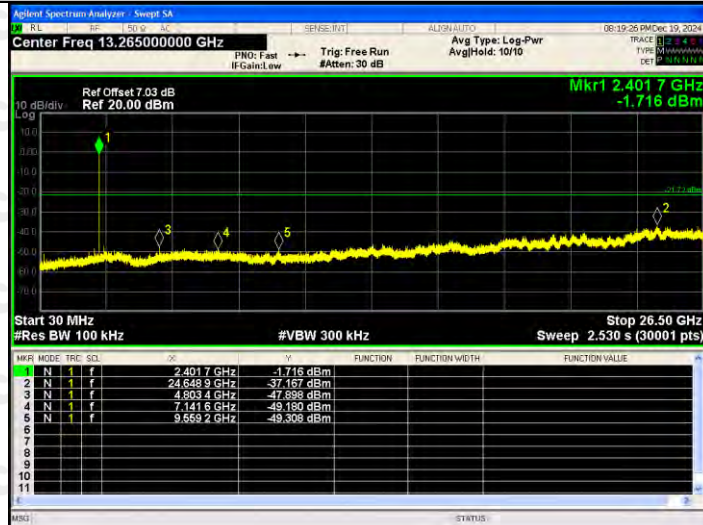


GFSK/MCH

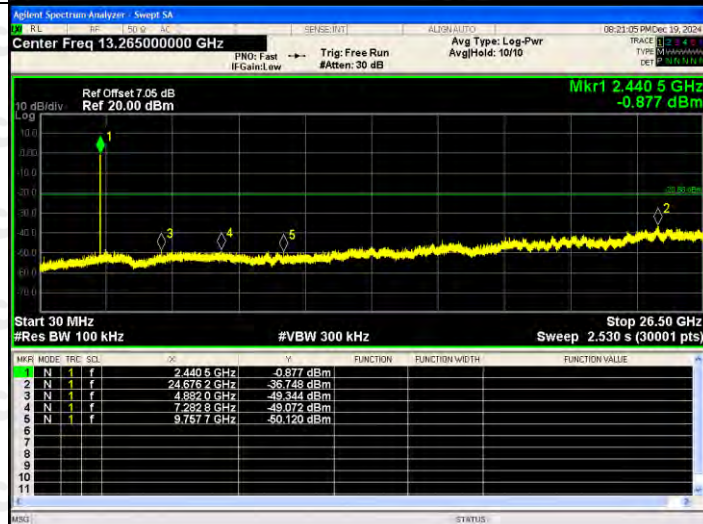


GFSK/HCH

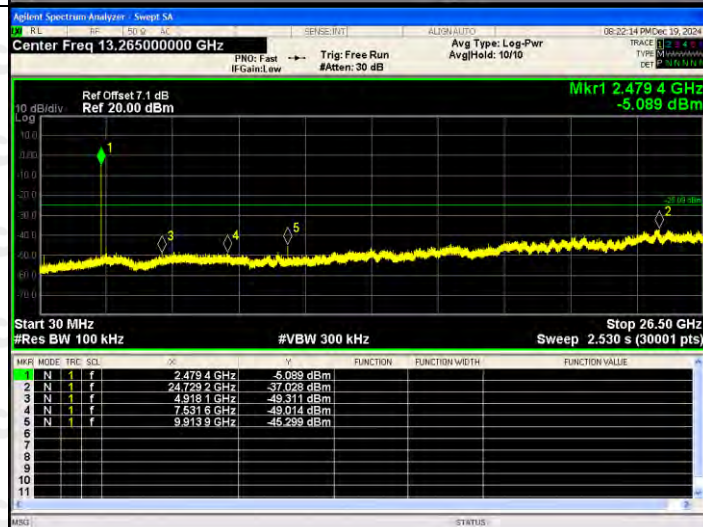


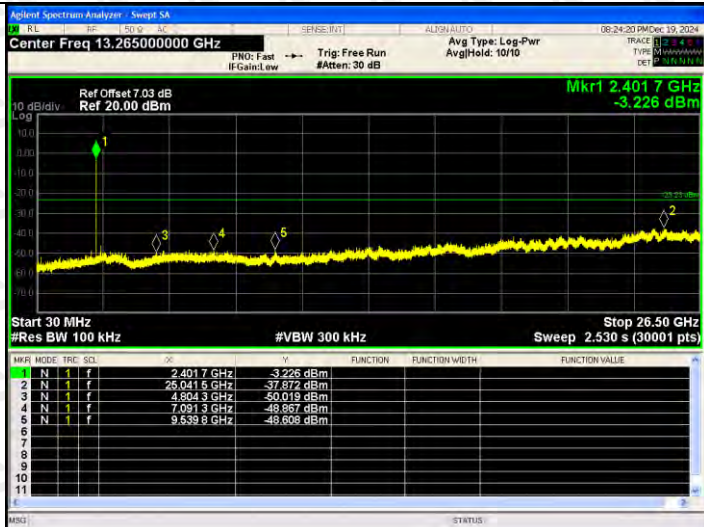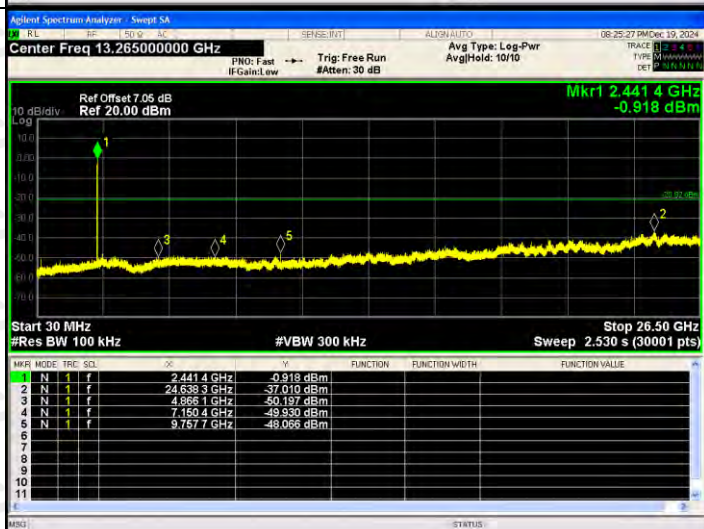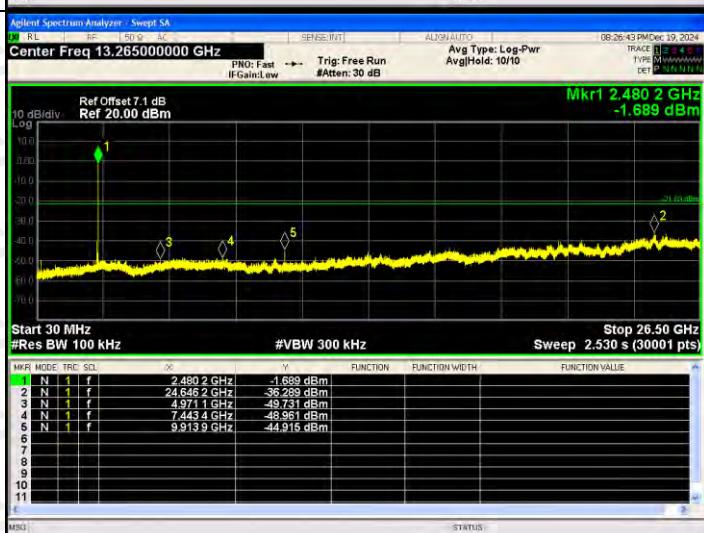$\pi/4$ DQPSK /LCH	 <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SQL</th><th>Offset</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.4017 GHz</td><td>-3.226 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>26.0415 GHz</td><td>-37.672 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>4.6043 GHz</td><td>-50.019 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.0913 GHz</td><td>-48.867 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.5398 GHz</td><td>-48.698 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRC	SQL	Offset	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.4017 GHz	-3.226 dBm				2	N	1	f		26.0415 GHz	-37.672 dBm				3	N	1	f		4.6043 GHz	-50.019 dBm				4	N	1	f		7.0913 GHz	-48.867 dBm				5	N	1	f		9.5398 GHz	-48.698 dBm			
Mkr	MODE	TRC	SQL	Offset	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f		2.4017 GHz	-3.226 dBm																																																							
2	N	1	f		26.0415 GHz	-37.672 dBm																																																							
3	N	1	f		4.6043 GHz	-50.019 dBm																																																							
4	N	1	f		7.0913 GHz	-48.867 dBm																																																							
5	N	1	f		9.5398 GHz	-48.698 dBm																																																							
$\pi/4$ DQPSK/MCH	 <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SQL</th><th>Offset</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.4414 GHz</td><td>-0.918 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>24.6383 GHz</td><td>-37.010 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>4.8861 GHz</td><td>-50.197 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.1504 GHz</td><td>-49.930 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.7577 GHz</td><td>-48.066 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRC	SQL	Offset	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.4414 GHz	-0.918 dBm				2	N	1	f		24.6383 GHz	-37.010 dBm				3	N	1	f		4.8861 GHz	-50.197 dBm				4	N	1	f		7.1504 GHz	-49.930 dBm				5	N	1	f		9.7577 GHz	-48.066 dBm			
Mkr	MODE	TRC	SQL	Offset	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f		2.4414 GHz	-0.918 dBm																																																							
2	N	1	f		24.6383 GHz	-37.010 dBm																																																							
3	N	1	f		4.8861 GHz	-50.197 dBm																																																							
4	N	1	f		7.1504 GHz	-49.930 dBm																																																							
5	N	1	f		9.7577 GHz	-48.066 dBm																																																							
$\pi/4$ DQPSK/HCH	 <table><tr><th>Mkr</th><th>MODE</th><th>TRC</th><th>SQL</th><th>Offset</th><th>F</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.4802 GHz</td><td>-1.689 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>24.6482 GHz</td><td>-36.289 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>4.9711 GHz</td><td>-49.731 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.4434 GHz</td><td>-48.961 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.9139 GHz</td><td>-44.915 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	MODE	TRC	SQL	Offset	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.4802 GHz	-1.689 dBm				2	N	1	f		24.6482 GHz	-36.289 dBm				3	N	1	f		4.9711 GHz	-49.731 dBm				4	N	1	f		7.4434 GHz	-48.961 dBm				5	N	1	f		9.9139 GHz	-44.915 dBm			
Mkr	MODE	TRC	SQL	Offset	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																				
1	N	1	f		2.4802 GHz	-1.689 dBm																																																							
2	N	1	f		24.6482 GHz	-36.289 dBm																																																							
3	N	1	f		4.9711 GHz	-49.731 dBm																																																							
4	N	1	f		7.4434 GHz	-48.961 dBm																																																							
5	N	1	f		9.9139 GHz	-44.915 dBm																																																							


8DPSK /LCH

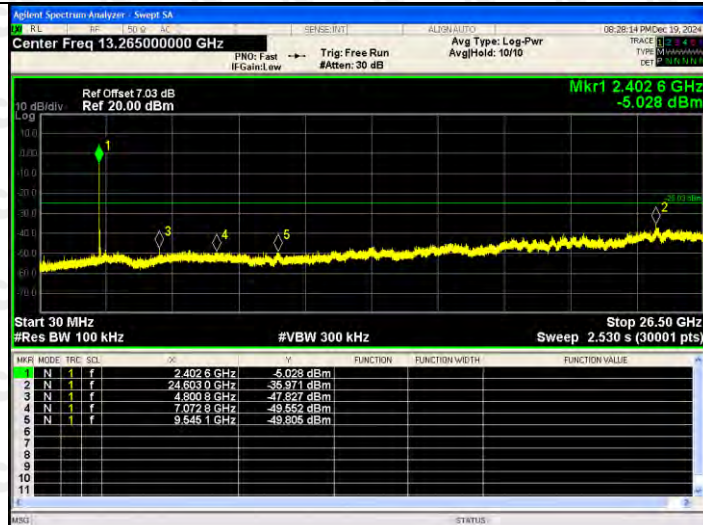

8DPSK /MCH



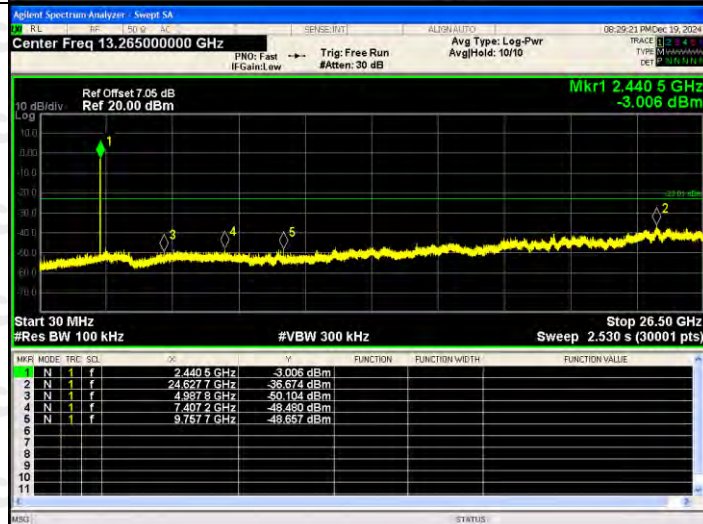


8DPSK /HCH

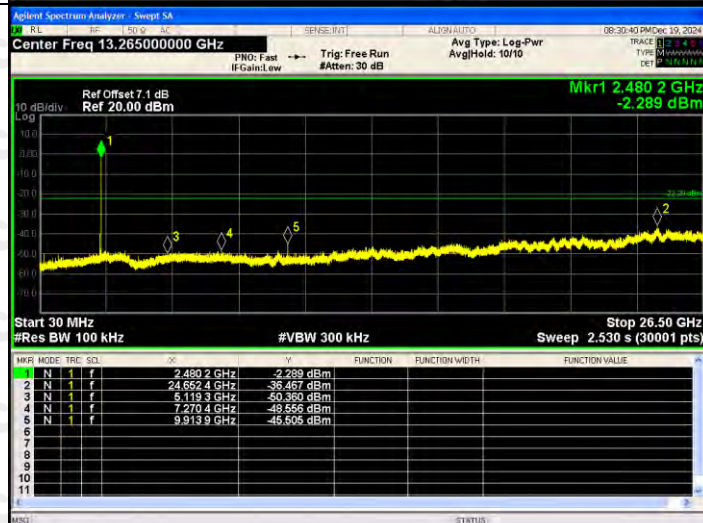


Right ear:


BAND EDGE Graphs

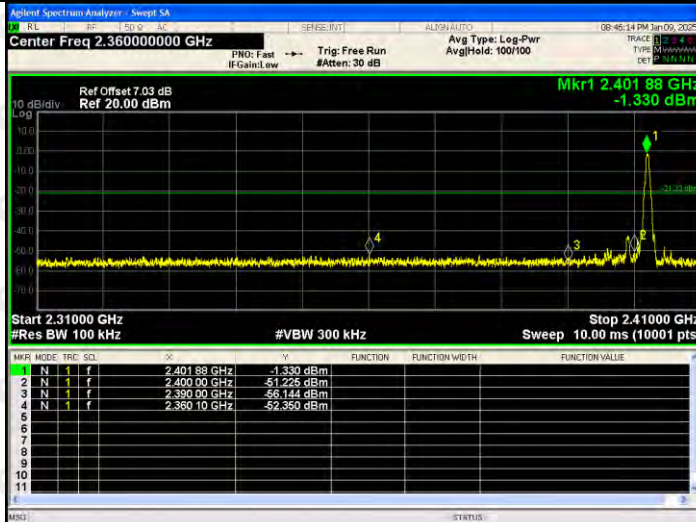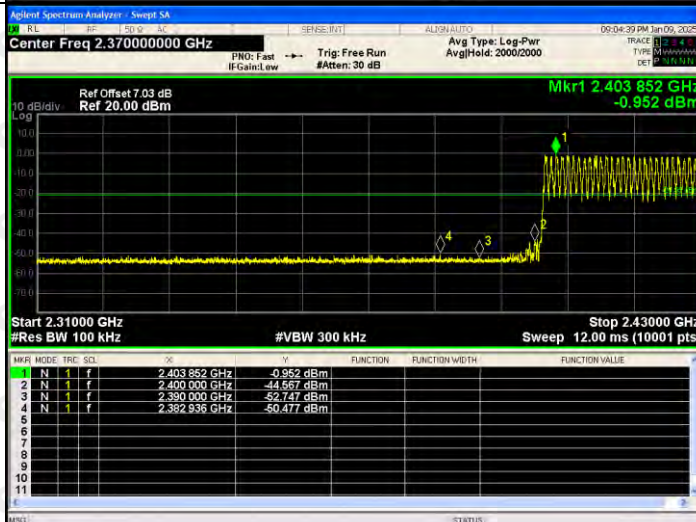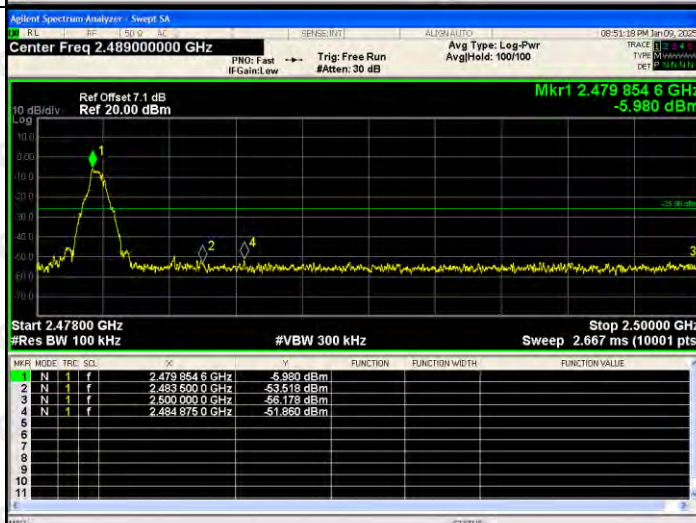GFSK/LCH/
No Hop

GFSK/LCH/
Hop

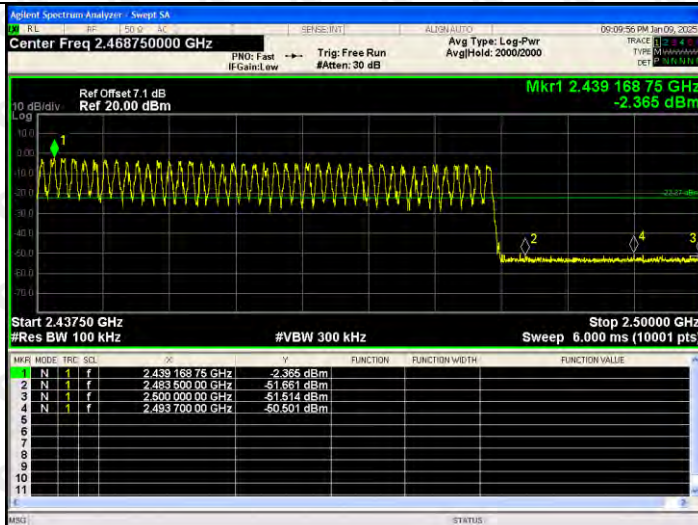GFSK/HCH/
No Hop


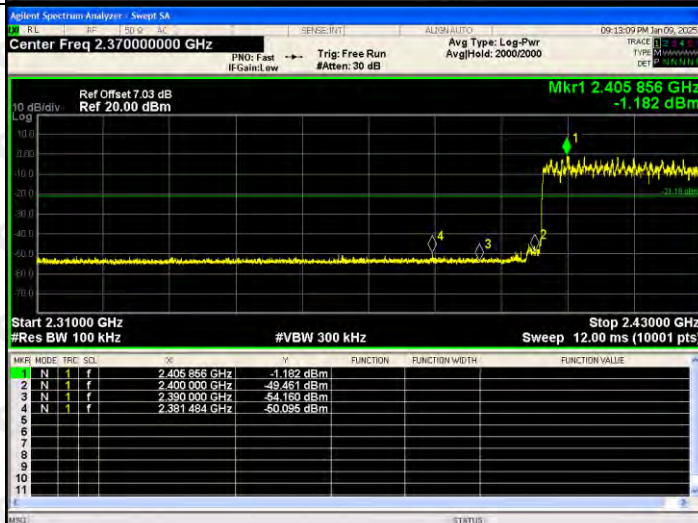
GFSK/HCH/
Hop



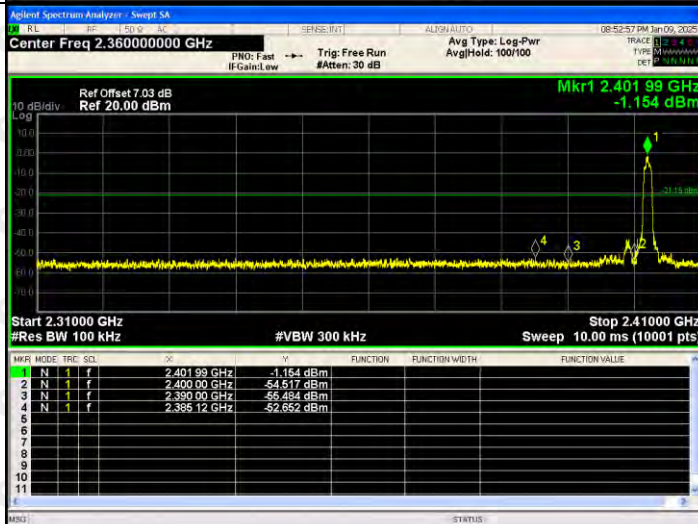





$\pi/4$ DQPSK/LCH/
No Hop



$\pi/4$ DQPSK/LCH/
Hop

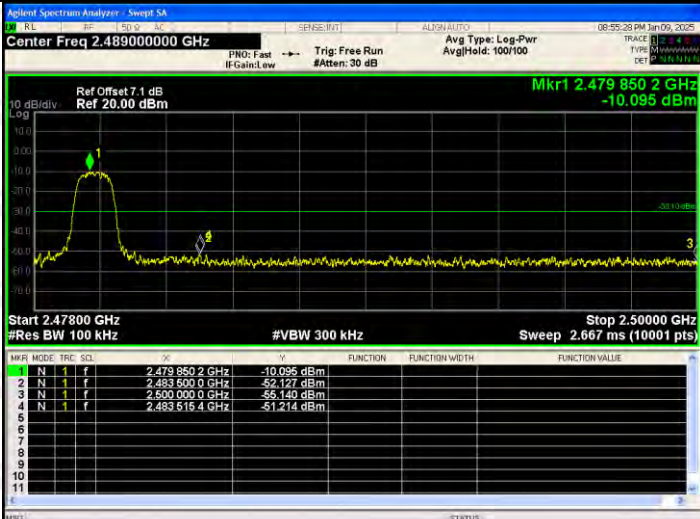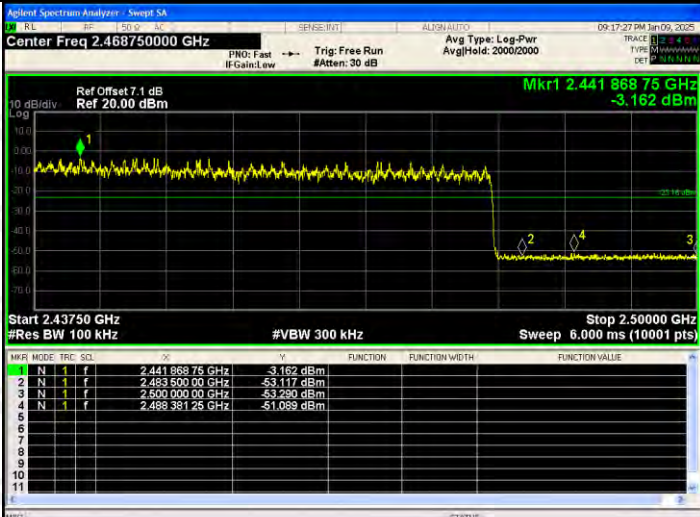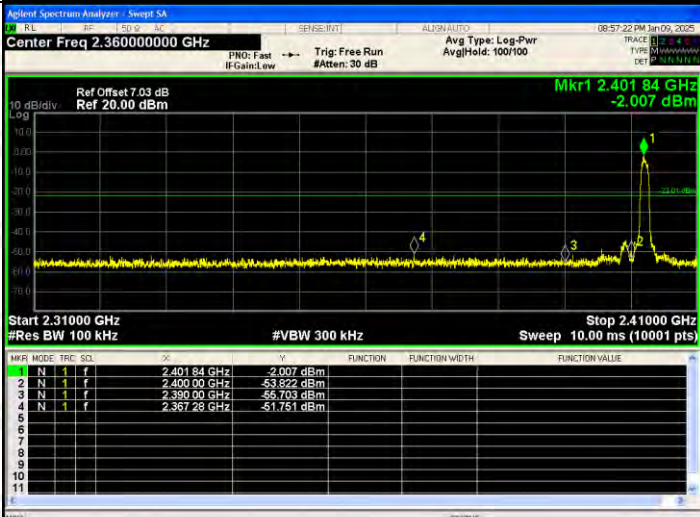


$\pi/4$ DQPSK/HCH/ No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.489000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.479 850 2 GHz -10.095 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (10001 pts) <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>dB</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.479 850 2 GHz</td><td>-10.095 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>2.483 500 0 GHz</td><td>-52.127 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>2.500 000 0 GHz</td><td>-55.149 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>2.483 516 4 GHz</td><td>-51.214 dBm</td><td></td><td></td><td></td><td></td></tr></table>	MKR	MODE	FREQ	SQL	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.479 850 2 GHz	-10.095 dBm					2	N	2.483 500 0 GHz	-52.127 dBm					3	N	2.500 000 0 GHz	-55.149 dBm					4	N	2.483 516 4 GHz	-51.214 dBm				
MKR	MODE	FREQ	SQL	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	2.479 850 2 GHz	-10.095 dBm																																						
2	N	2.483 500 0 GHz	-52.127 dBm																																						
3	N	2.500 000 0 GHz	-55.149 dBm																																						
4	N	2.483 516 4 GHz	-51.214 dBm																																						
$\pi/4$ DQPSK/HCH/ Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.468750000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.441 868 75 GHz -3.162 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.000 ms (10001 pts) <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>dB</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.441 868 75 GHz</td><td>-3.162 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>2.483 500 00 GHz</td><td>-53.117 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>2.500 000 00 GHz</td><td>-53.230 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>2.488 381 25 GHz</td><td>-51.059 dBm</td><td></td><td></td><td></td><td></td></tr></table>	MKR	MODE	FREQ	SQL	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.441 868 75 GHz	-3.162 dBm					2	N	2.483 500 00 GHz	-53.117 dBm					3	N	2.500 000 00 GHz	-53.230 dBm					4	N	2.488 381 25 GHz	-51.059 dBm				
MKR	MODE	FREQ	SQL	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	2.441 868 75 GHz	-3.162 dBm																																						
2	N	2.483 500 00 GHz	-53.117 dBm																																						
3	N	2.500 000 00 GHz	-53.230 dBm																																						
4	N	2.488 381 25 GHz	-51.059 dBm																																						
8DPSK/LCH/No Hop	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.360000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.401 84 GHz -2.007 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.00 ms (10001 pts) <table><tr><th>MKR</th><th>MODE</th><th>FREQ</th><th>SQL</th><th>dB</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.401 84 GHz</td><td>-2.007 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>2.400 00 GHz</td><td>-53.822 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>2.390 00 GHz</td><td>-55.703 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>2.387 28 GHz</td><td>-51.751 dBm</td><td></td><td></td><td></td><td></td></tr></table>	MKR	MODE	FREQ	SQL	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.401 84 GHz	-2.007 dBm					2	N	2.400 00 GHz	-53.822 dBm					3	N	2.390 00 GHz	-55.703 dBm					4	N	2.387 28 GHz	-51.751 dBm				
MKR	MODE	FREQ	SQL	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	2.401 84 GHz	-2.007 dBm																																						
2	N	2.400 00 GHz	-53.822 dBm																																						
3	N	2.390 00 GHz	-55.703 dBm																																						
4	N	2.387 28 GHz	-51.751 dBm																																						

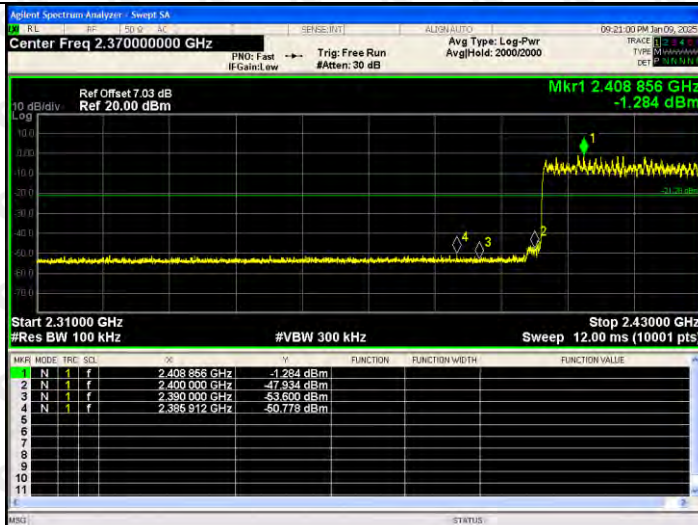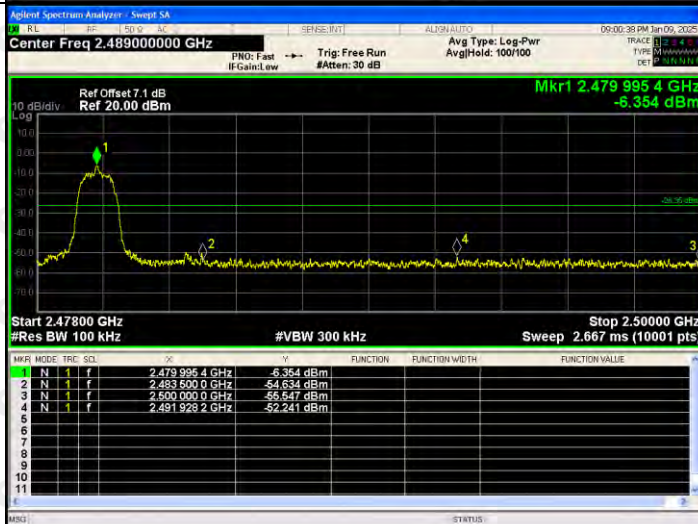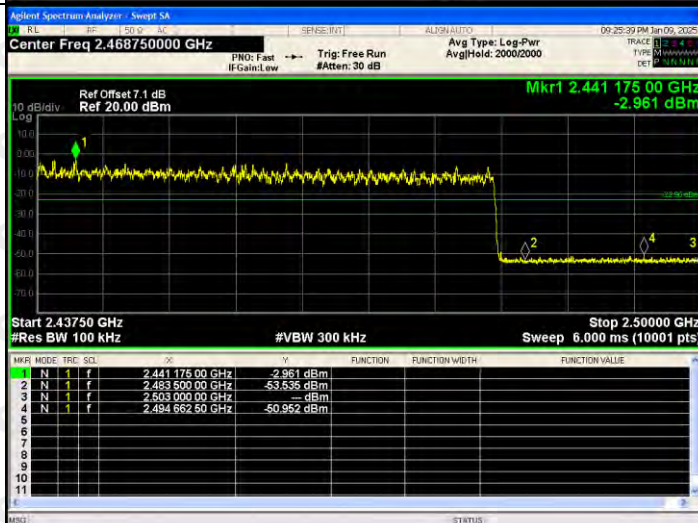
8DPSK
/LCH/Hop

8DPSK /HCH/No
Hop

8DPSK
/HCH/Hop

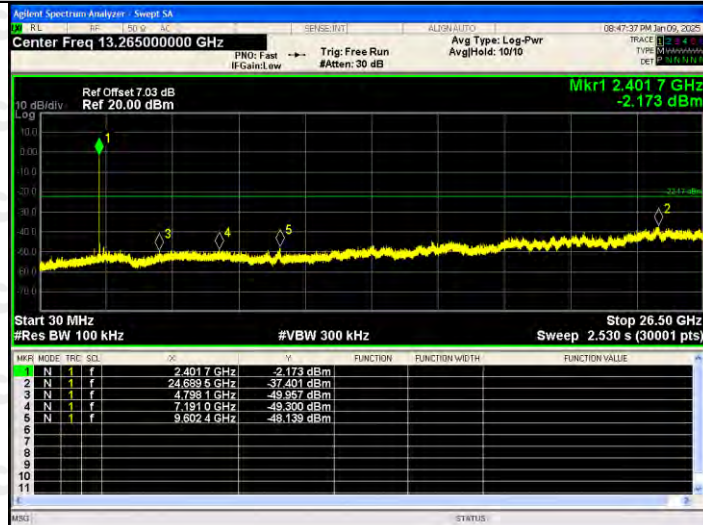
RF Conducted Spurious Emissions Graphs


GFSK/LCH



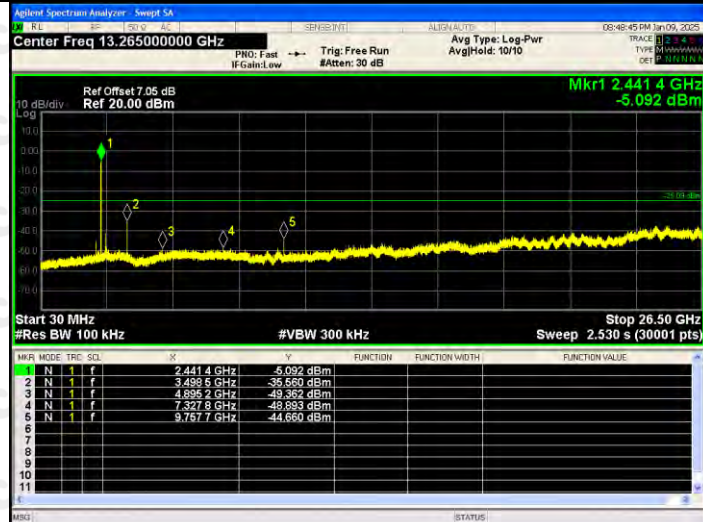


GFSK/MCH




GFSK/HCH

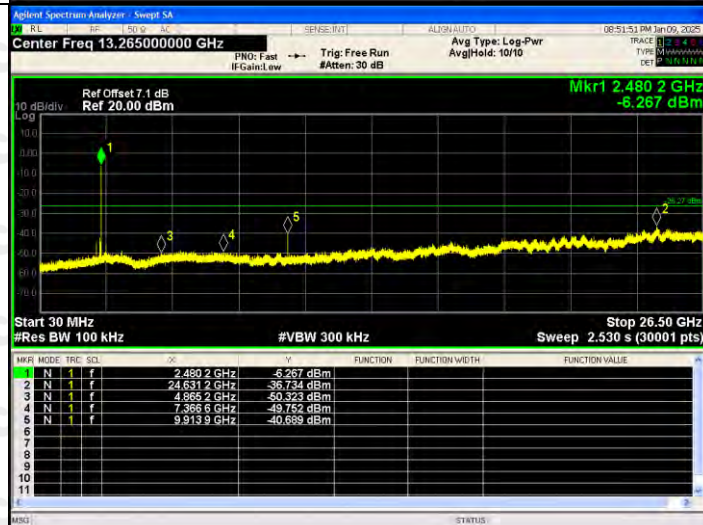


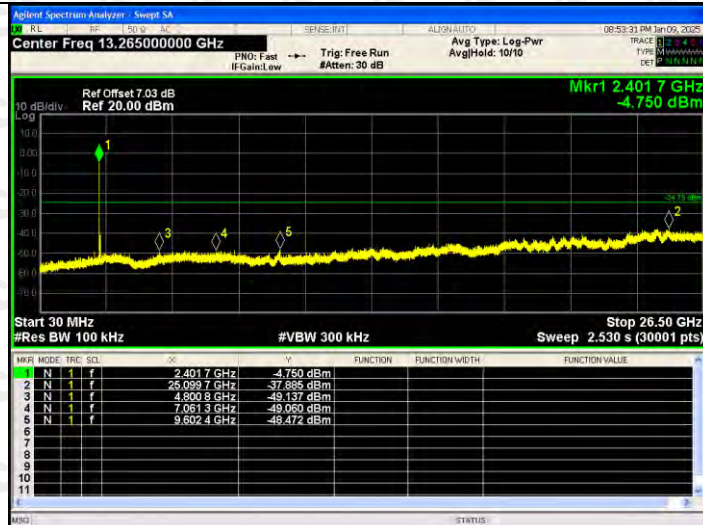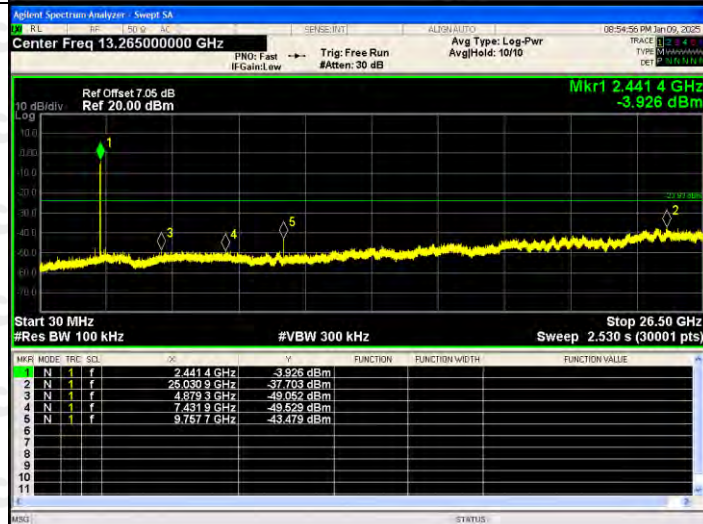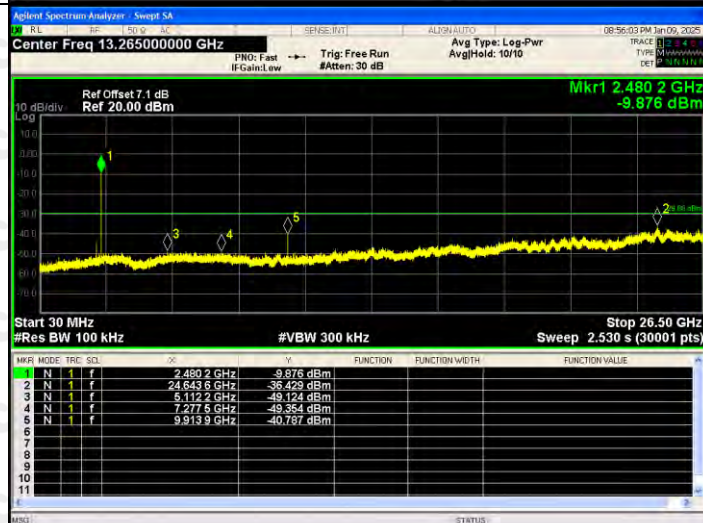$\pi/4$ DQPSK /LCH

 $\pi/4$ DQPSK/MCH

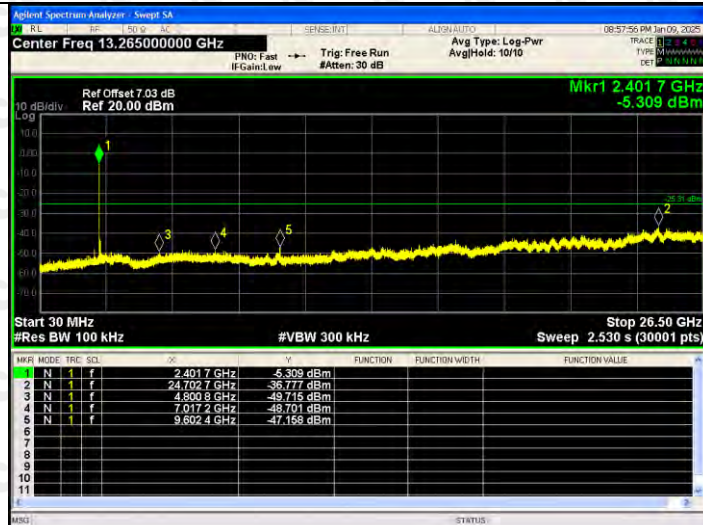 $\pi/4$ DQPSK/HCH


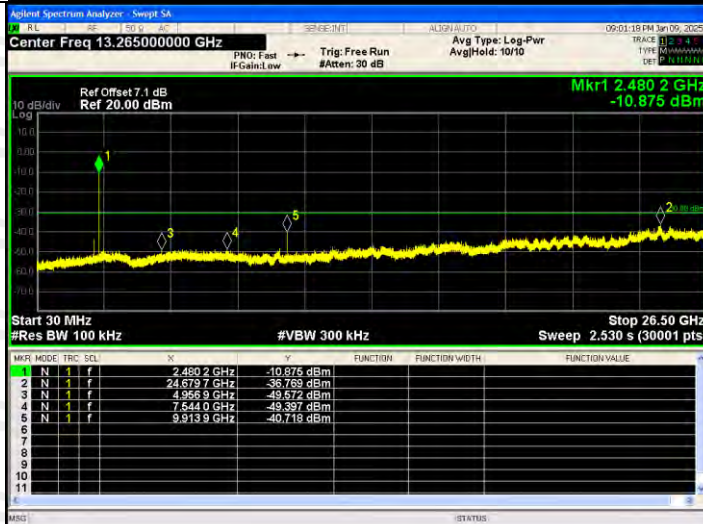
8DPSK /LCH

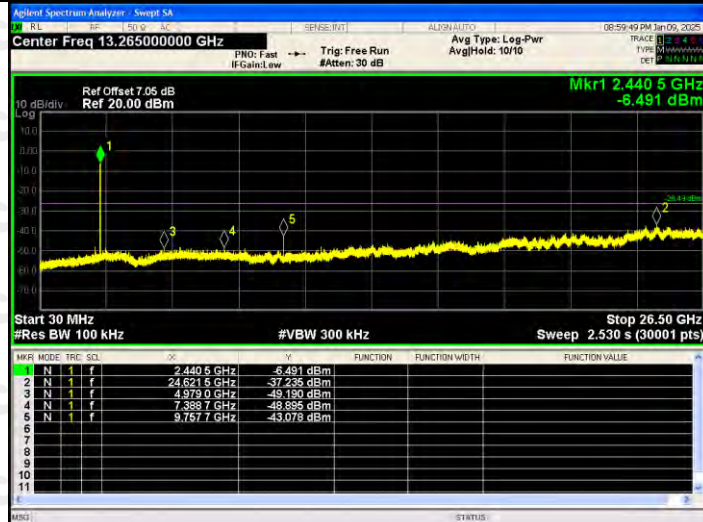

8DPSK /MCH




8DPSK /HCH



9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

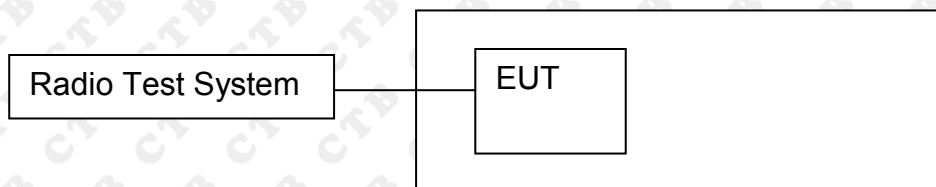

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result


Left ear:


Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	-0.968	20.97	PASS
	MCH	0.689	20.97	PASS
	HCH	1.791	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	-0.104	20.97	PASS
	MCH	1.488	20.97	PASS
	HCH	2.513	20.97	PASS
EDR mode (8DPSK)	LCH	0.26	20.97	PASS
	MCH	1.887	20.97	PASS
	HCH	2.828	20.97	PASS

Right ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	-0.932	20.97	PASS
	MCH	-2.658	20.97	PASS
	HCH	-5.848	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	-0.164	20.97	PASS
	MCH	-1.903	20.97	PASS
	HCH	-5.126	20.97	PASS
EDR mode (8DPSK)	LCH	0.21	20.97	PASS
	MCH	-1.433	20.97	PASS
	HCH	-4.775	20.97	PASS


Left ear:
Test Graph:

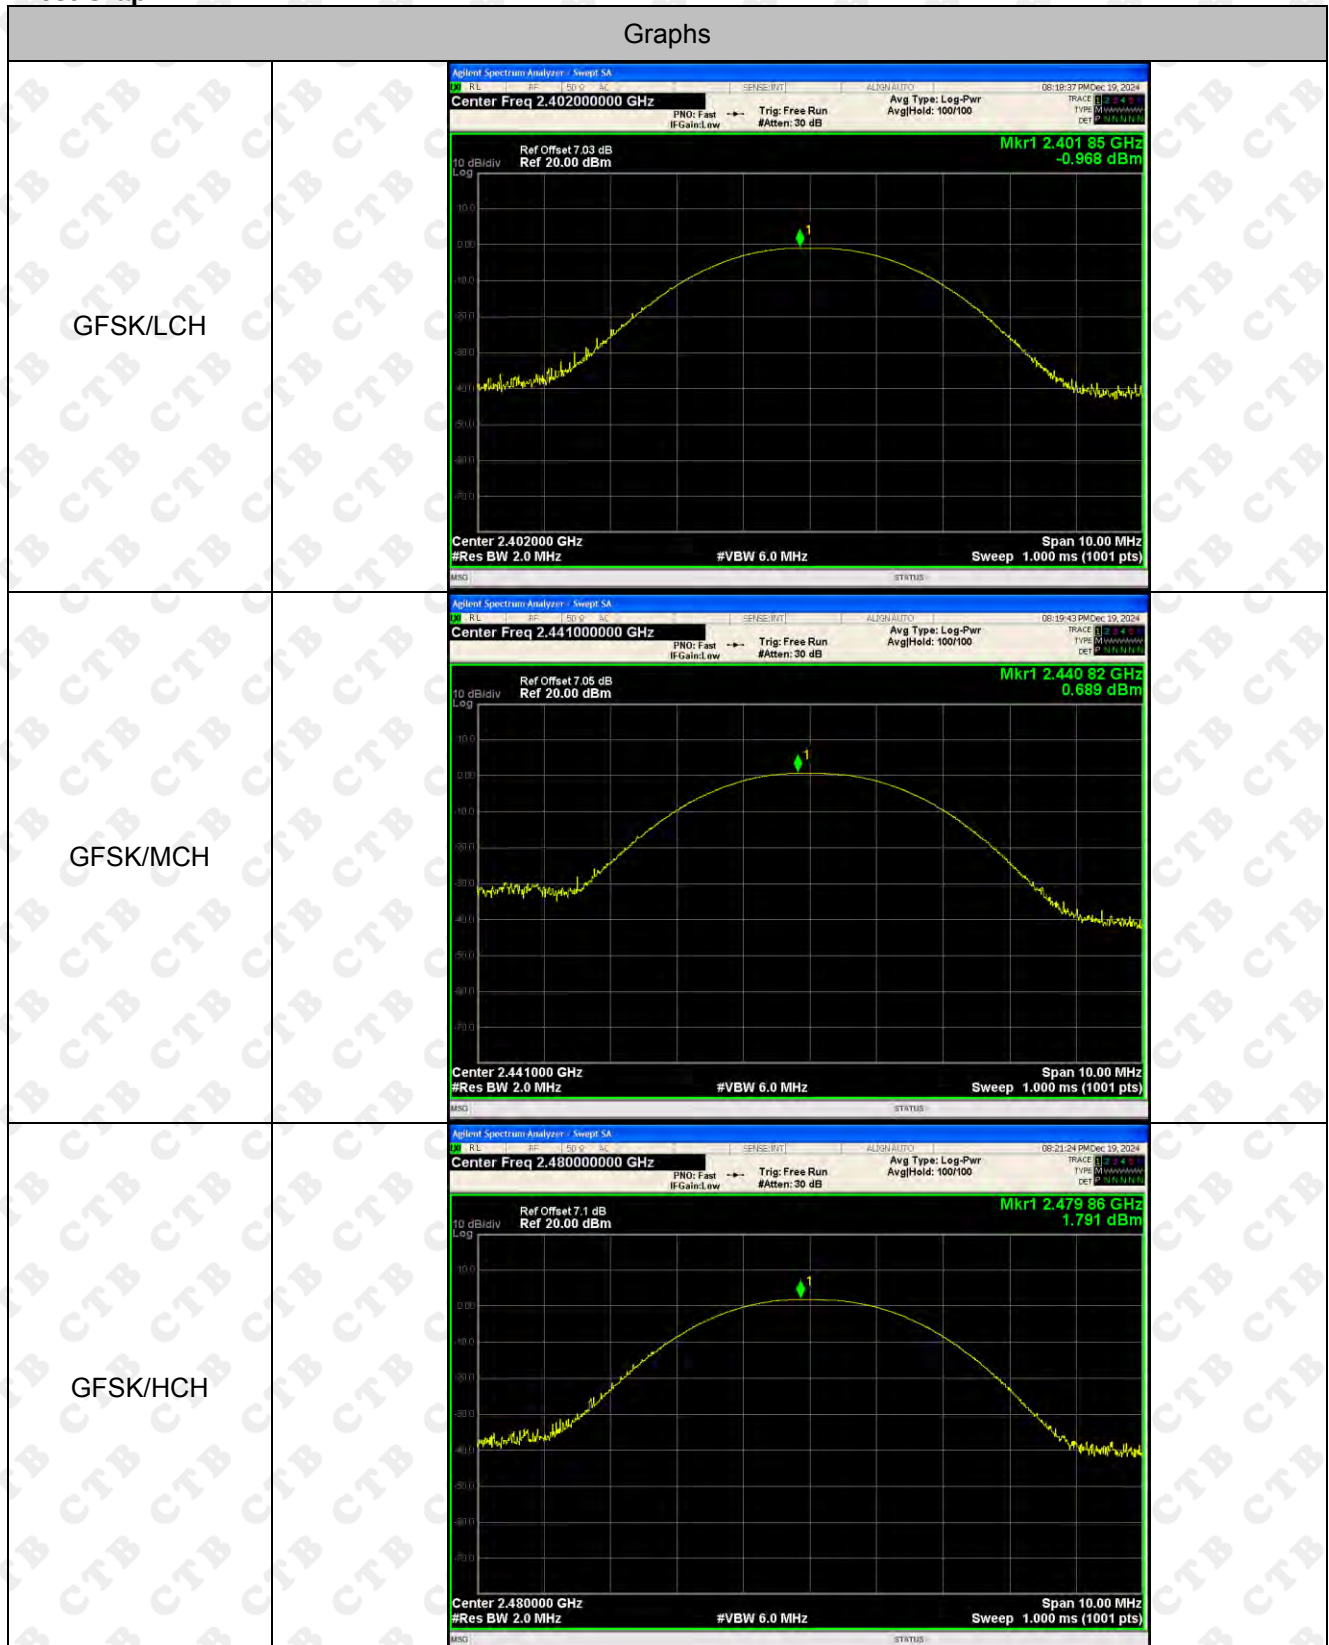

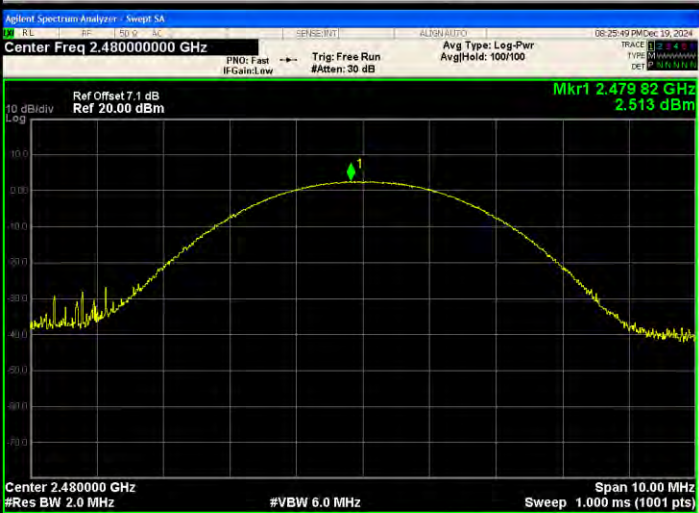$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40187 GHz -0.104 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.44085 GHz 1.488 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.47982 GHz 2.513 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.40200000 GHz Ref Offset: 7.03 dB Ref: 20.00 dBm Mkr1 2.40198 GHz 0.260 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.44100000 GHz Ref Offset: 7.05 dB Ref: 20.00 dBm Mkr1 2.44089 GHz 1.887 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.48000000 GHz Ref Offset: 7.1 dB Ref: 20.00 dBm Mkr1 2.47991 GHz 2.828 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

Right ear:
Test Graph:

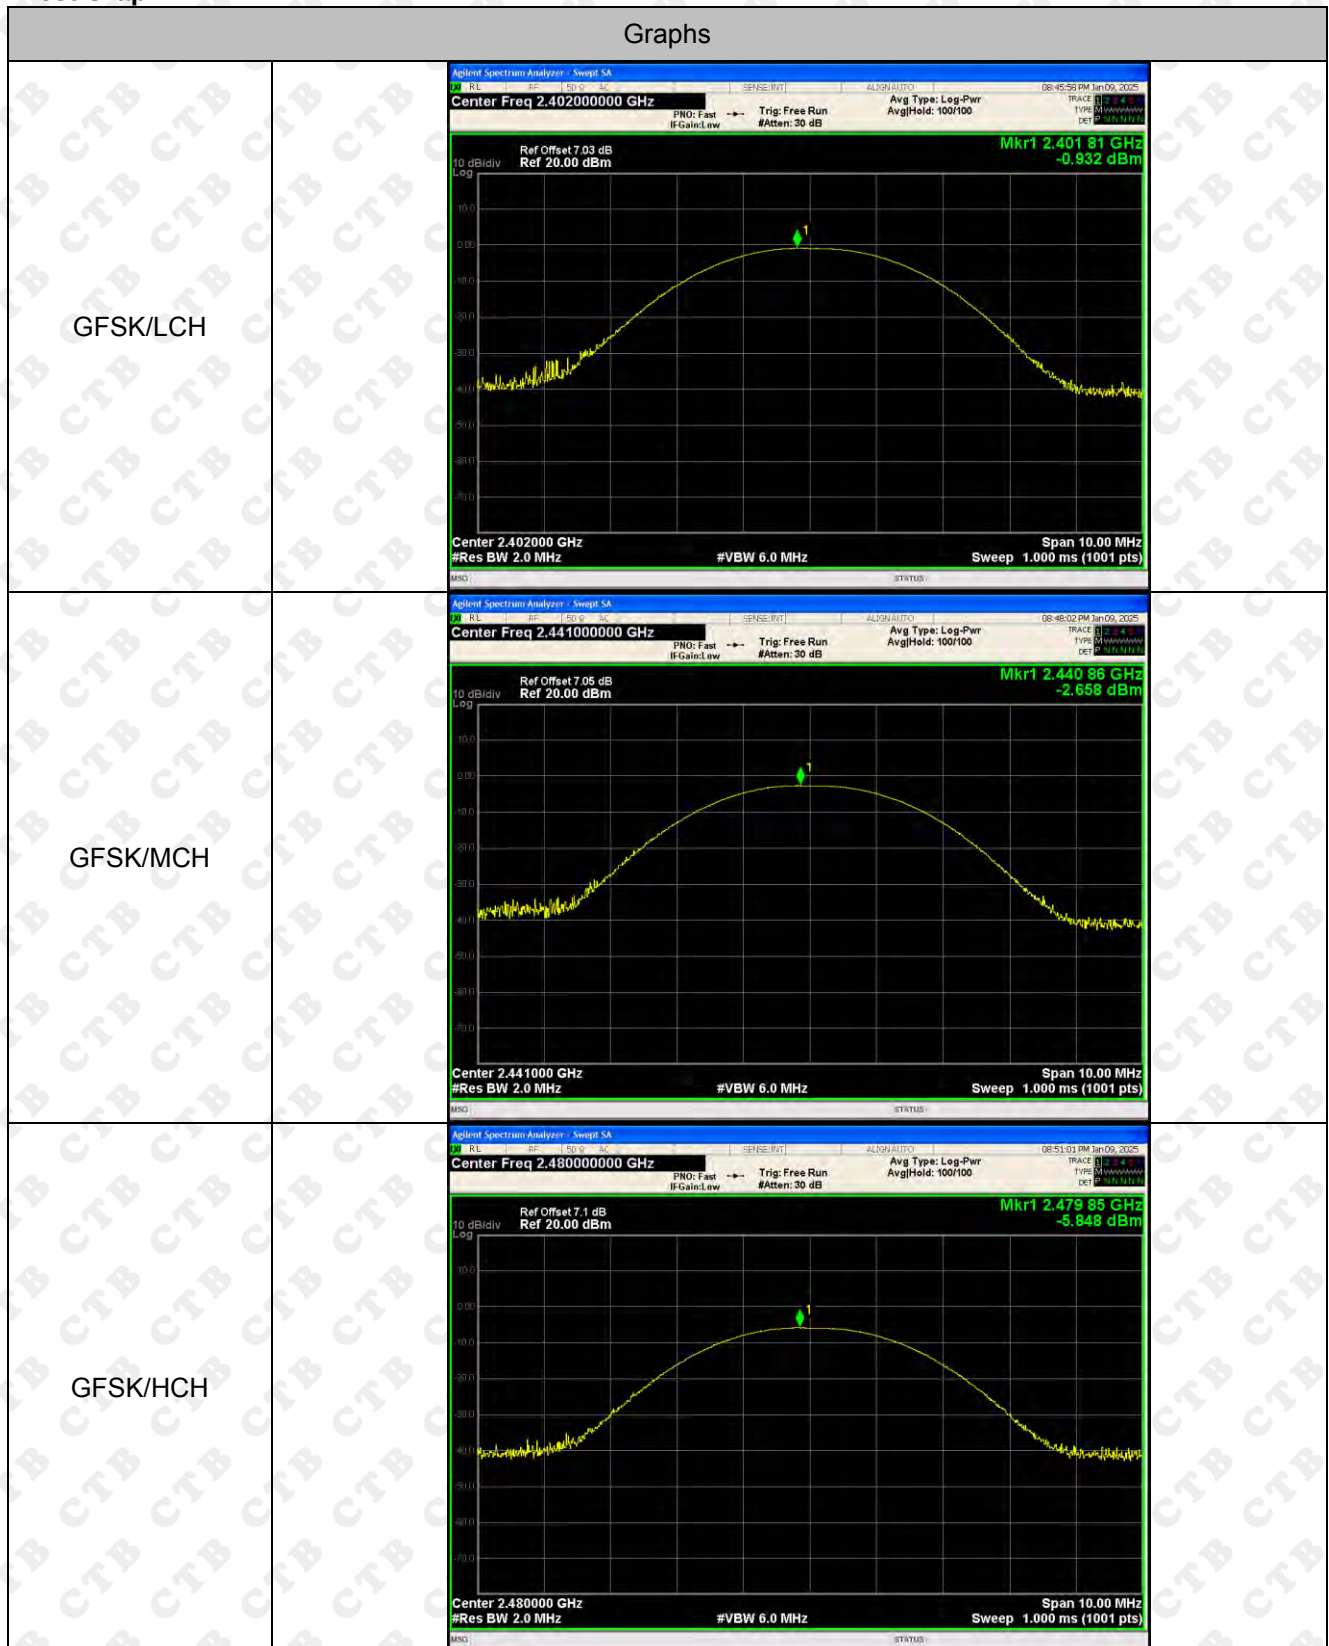


$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.401 96 GHz -0.164 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.440 73 GHz -1.903 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.479 85 GHz -5.126 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40194 GHz 0.210 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.44086 GHz -1.433 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.48000 GHz -4.775 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

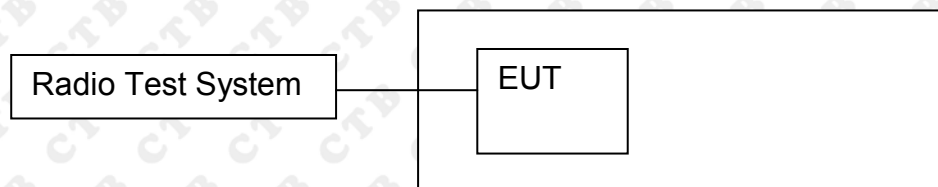

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Left ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.86	PASS
	Mid channel	0.882	PASS
	High channel	0.88	PASS
$\pi/4$ DQPSK	Low channel	1.282	PASS
	Mid channel	1.286	PASS
	High channel	1.26	PASS
8DPSK	Low channel	1.292	PASS
	Mid channel	1.313	PASS
	High channel	1.28	PASS

Right ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.866	PASS
	Mid channel	0.863	PASS
	High channel	0.843	PASS
$\pi/4$ DQPSK	Low channel	1.275	PASS
	Mid channel	1.281	PASS
	High channel	1.33	PASS
8DPSK	Low channel	1.307	PASS
	Mid channel	1.318	PASS
	High channel	1.303	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Left ear:
Test Graph:


GFSK Low channel	
GFSK Mid channel	
GFSK High channel	


$\pi/4$-DQPSK Low channel	
$\pi/4$-DQPSK Mid channel	
$\pi/4$-DQPSK High channel	

8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

Right ear:
Test Graph:


GFSK Low channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Ref Offset 7.63 dB Ref 27.03 dBm Occupied Bandwidth 813.73 kHz Total Power 5.61 dBm Transmit Freq Error 4.140 kHz OBW Power 99.00 % x dB Bandwidth 865.6 kHz x dB -20.00 dB Mkr3 2.402437 GHz -24.096 dBm
GFSK Mid channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Occupied Bandwidth 825.29 kHz Total Power 3.59 dBm Transmit Freq Error -1.677 kHz OBW Power 99.00 % x dB Bandwidth 863.2 kHz x dB -20.00 dB Mkr3 2.44143 GHz -25.733 dBm
GFSK High channel	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 27.10 dBm Occupied Bandwidth 811.92 kHz Total Power 0.43 dBm Transmit Freq Error 5.980 kHz OBW Power 99.00 % x dB Bandwidth 842.6 kHz x dB -20.00 dB Mkr3 2.480427 GHz -28.661 dBm

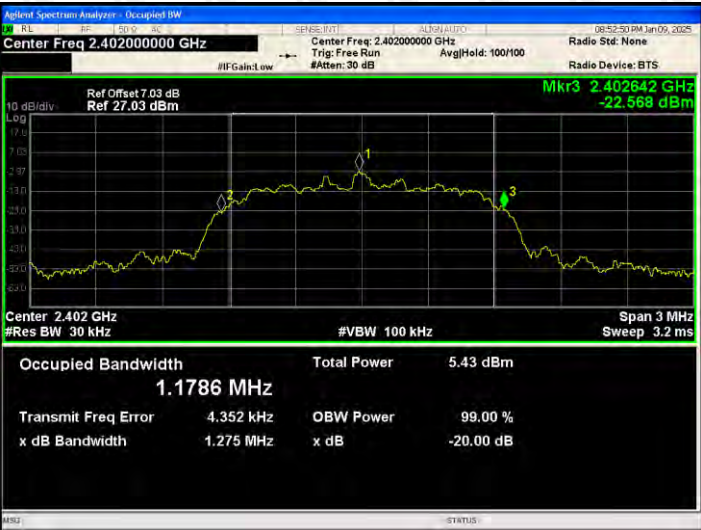$\pi/4$-DQPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.402642 GHz -22.568 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1786 MHz Total Power 5.43 dBm Transmit Freq Error 4.352 kHz OBW Power 99.00 % x dB Bandwidth 1.275 MHz x dB -20.00 dB
$\pi/4$-DQPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Mkr3 2.441645 GHz -23.416 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1827 MHz Total Power 3.36 dBm Transmit Freq Error 4.763 kHz OBW Power 99.00 % x dB Bandwidth 1.281 MHz x dB -20.00 dB
$\pi/4$-DQPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 7.1 dB Ref 27.10 dBm Mkr3 2.480667 GHz -30.204 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1895 MHz Total Power -0.27 dBm Transmit Freq Error 1.373 kHz OBW Power 99.00 % x dB Bandwidth 1.330 MHz x dB -20.00 dB

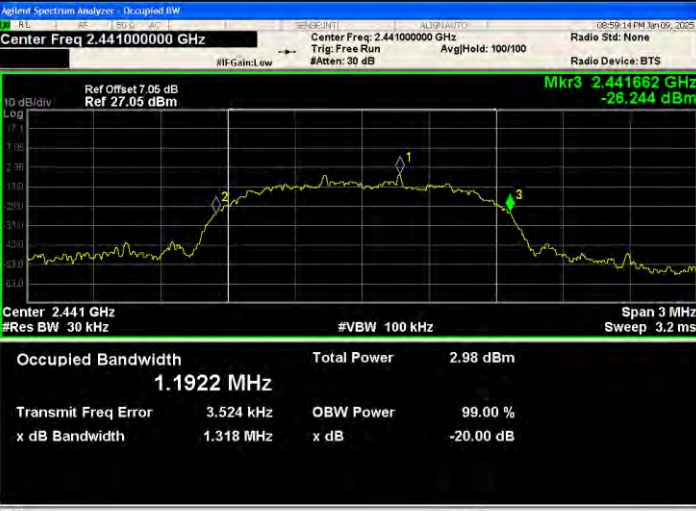8DPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.402653 GHz -23.525 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1935 MHz Total Power 5.13 dBm Transmit Freq Error -699 Hz OBW Power 99.00 % x dB Bandwidth 1.307 MHz x dB -20.00 dB
8DPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Mkr3 2.441662 GHz -26.244 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1922 MHz Total Power 2.98 dBm Transmit Freq Error 3.524 kHz OBW Power 99.00 % x dB Bandwidth 1.318 MHz x dB -20.00 dB
8DPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 7.1 dB Ref 27.10 dBm Mkr3 2.480653 GHz -28.768 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 1.1880 MHz Total Power 0.48 dBm Transmit Freq Error 1.501 kHz OBW Power 99.00 % x dB Bandwidth 1.303 MHz x dB -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

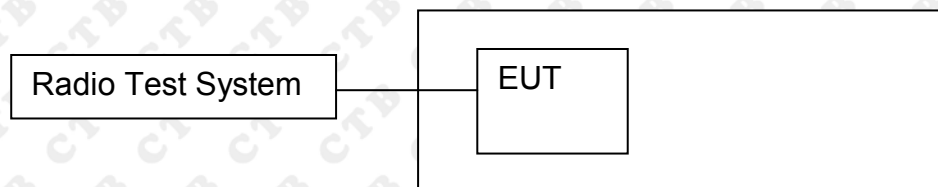

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Left ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.004	0.577	PASS
GFSK	MCH	1.000	0.575	PASS
GFSK	HCH	1.000	0.562	PASS
$\pi/4$ DQPSK	LCH	1.000	0.850	PASS
$\pi/4$ DQPSK	MCH	1.002	0.854	PASS
$\pi/4$ DQPSK	HCH	0.998	0.887	PASS
8DPSK	LCH	0.998	0.871	PASS
8DPSK	MCH	0.998	0.879	PASS
8DPSK	HCH	1.000	0.869	PASS

Right ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.000	0.573	PASS
GFSK	MCH	1.004	0.588	PASS
GFSK	HCH	0.998	0.587	PASS
$\pi/4$ DQPSK	LCH	0.998	0.855	PASS
$\pi/4$ DQPSK	MCH	1.002	0.857	PASS
$\pi/4$ DQPSK	HCH	1.002	0.840	PASS
8DPSK	LCH	1.004	0.861	PASS
8DPSK	MCH	0.998	0.875	PASS
8DPSK	HCH	0.998	0.853	PASS

Left ear:
Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH



$\pi/4$ DQPSK/LCH


 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH


8DPSK/LCH



8DPSK /MCH

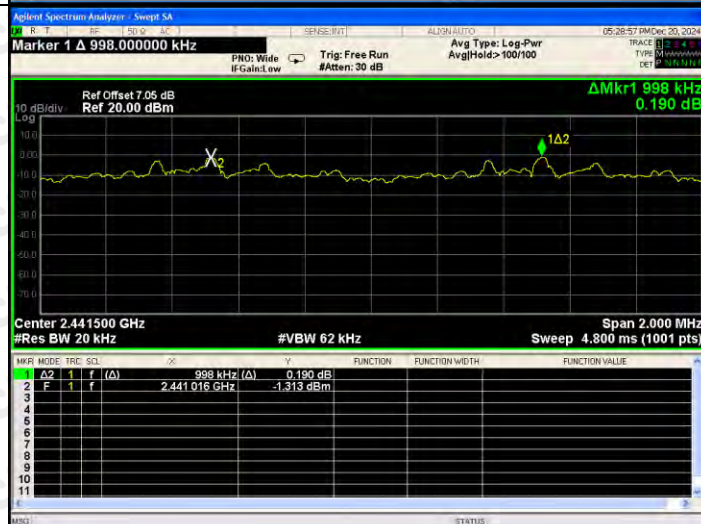

8DPSK /HCH



Right ear: Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH




$\pi/4$ DQPSK/LCH


 $\pi/4$ DQPSK/MCH

 $\pi/4$ DQPSK/HCH


8DPSK/LCH

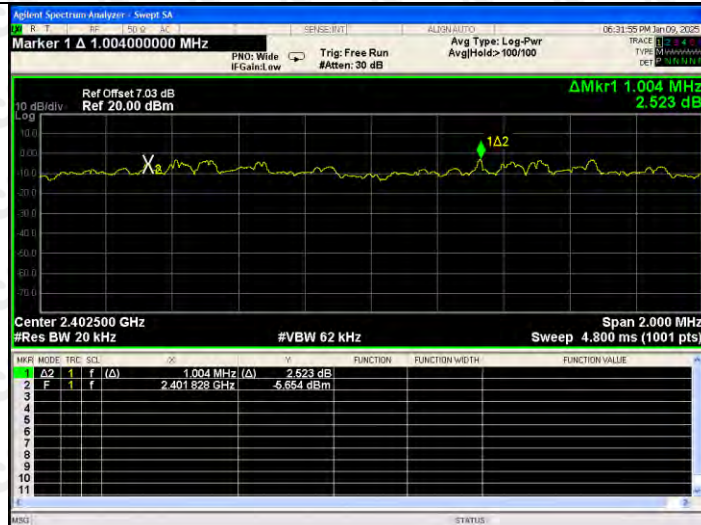

8DPSK /MCH

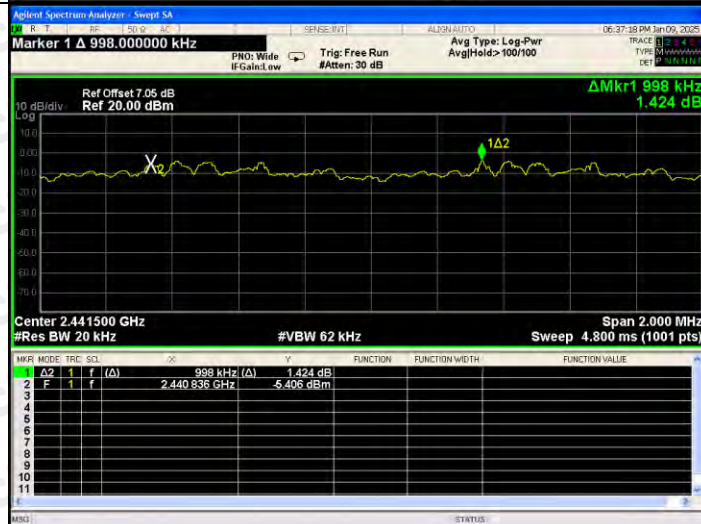


8DPSK /HCH



12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

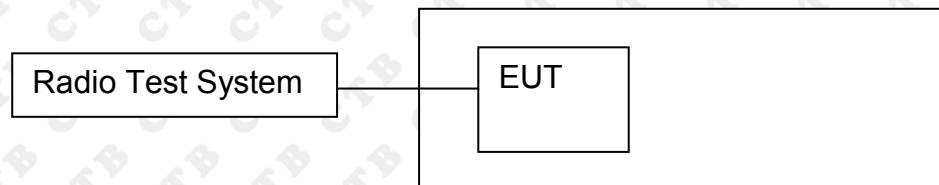

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result

Left ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Right ear:


Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Left ear:
Test Graph



Right ear: Test Graph

Graphs


GFSK/Hop

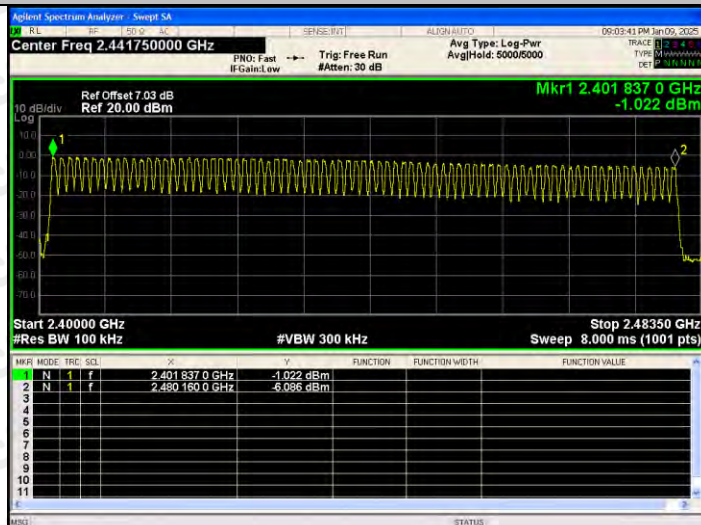

$\pi/4$ DQPSK/Hop

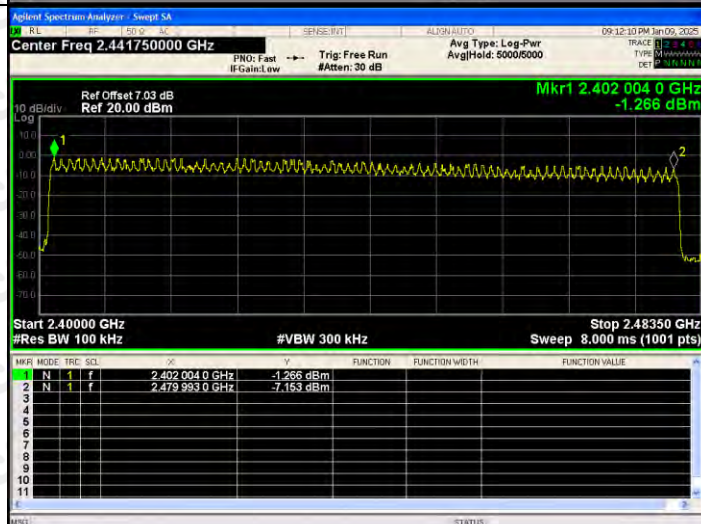


8DPSK/Hop

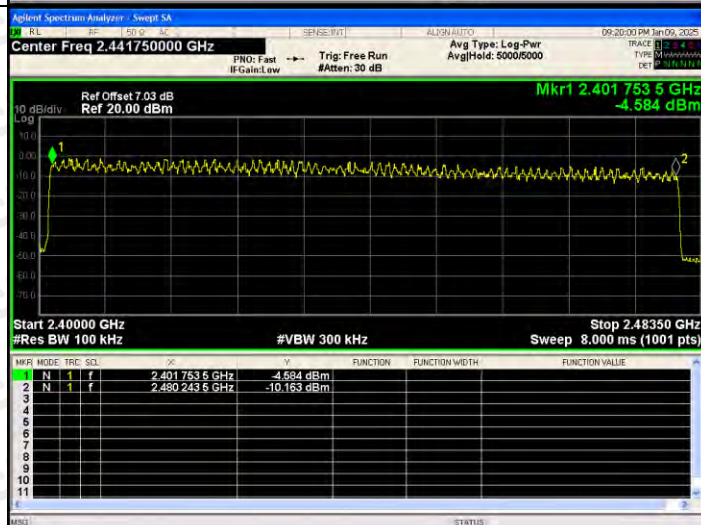

13. DWELL TIME

13.1 Block Diagram Of Test Setup

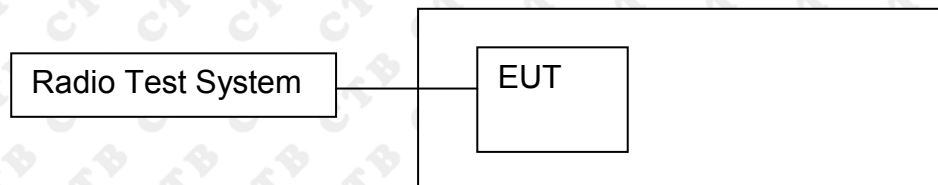

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Left ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.384	122.88	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.637	261.92	400	PASS
	DH3	HCH	1.643	262.88	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.893	308.587	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Right ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.382	122.24	400	PASS
	DH1	MCH	0.382	122.24	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.643	262.88	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.895	308.8	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.


Left ear:
Test Graph

Graphs


GFSK_DH1/LCH

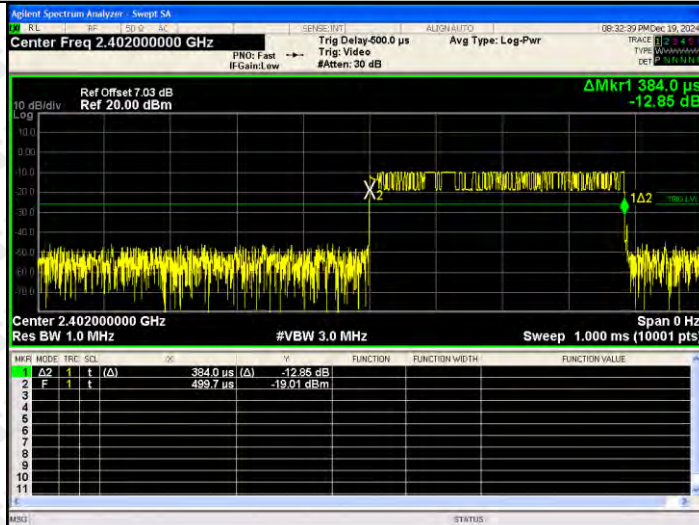


GFSK_DH1/MCH

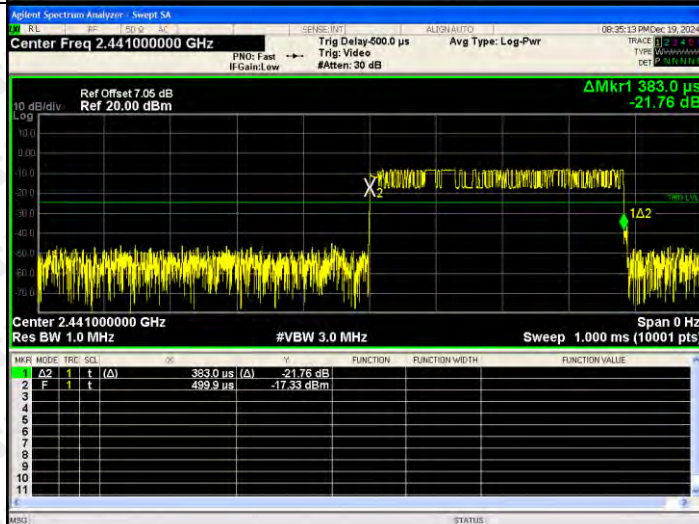

GFSK_DH1/HCH

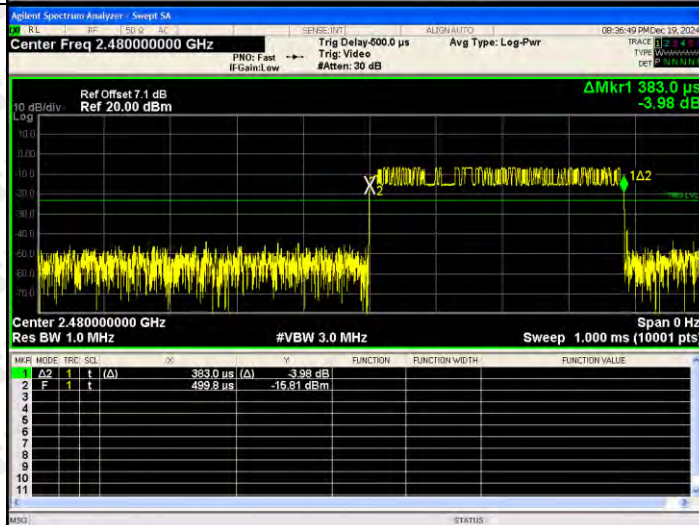


GFSK_DH3/LCH

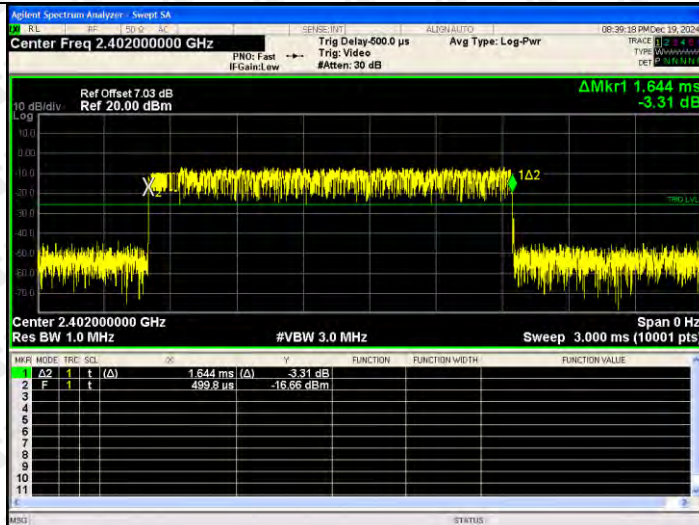


GFSK_DH3/MCH




GFSK_DH3/HCH

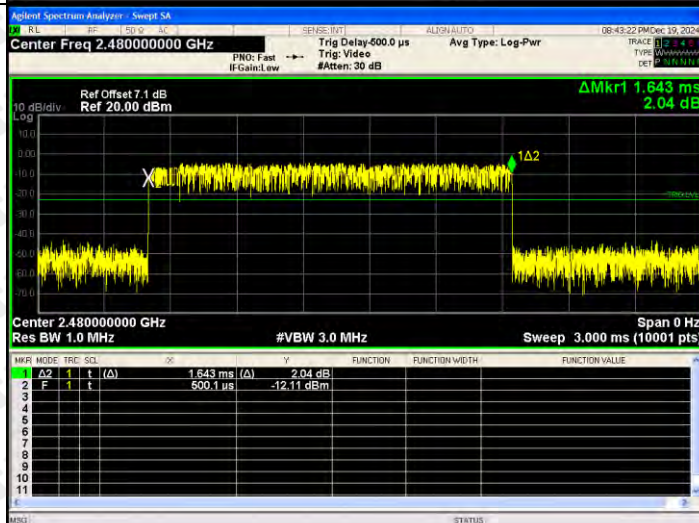


GFSK_DH5/LCH

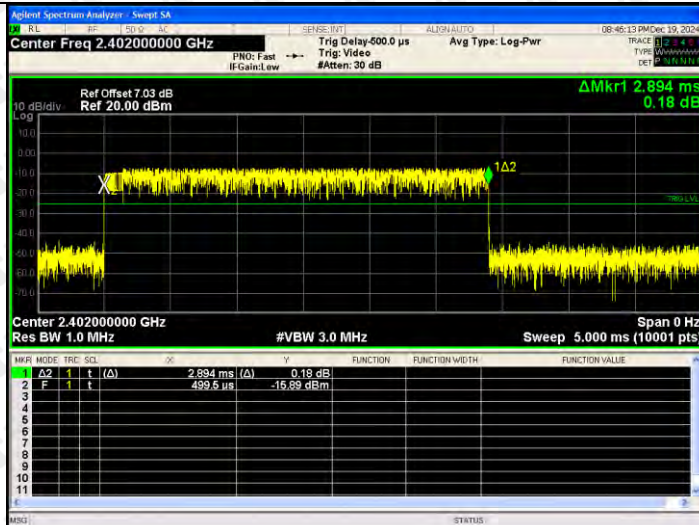

GFSK_DH5/MCH

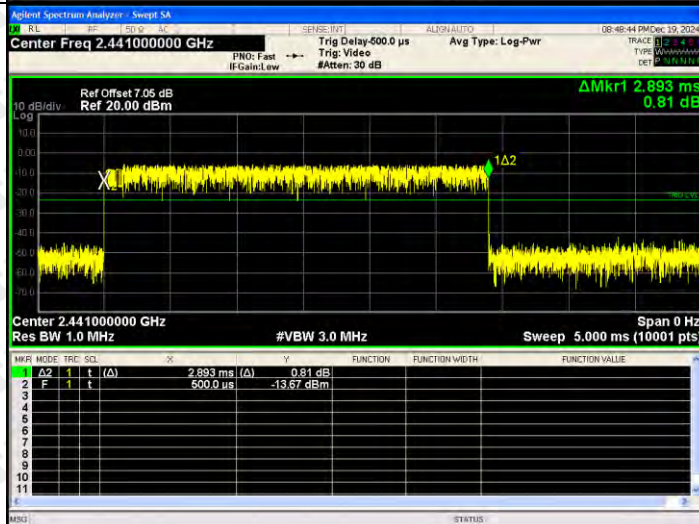


GFSK_DH5/HCH

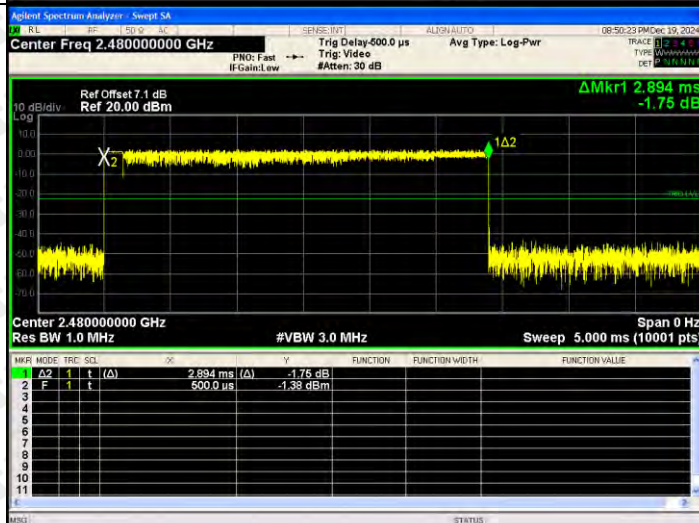


Right ear:
Test Graph

Graphs


GFSK_DH1/LCH

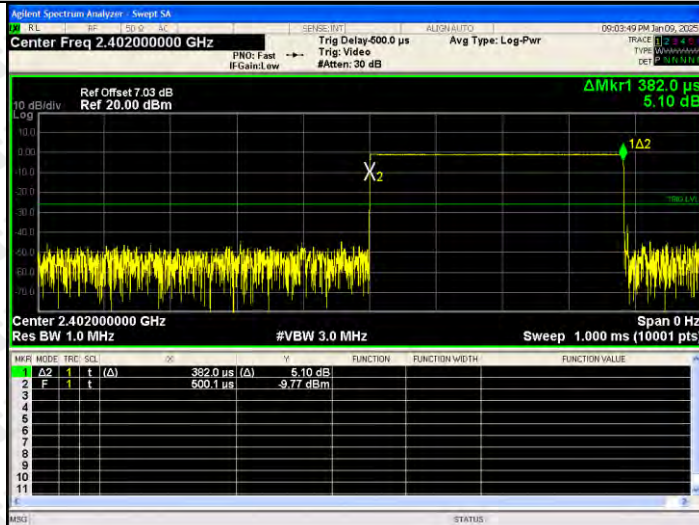


GFSK_DH1/MCH

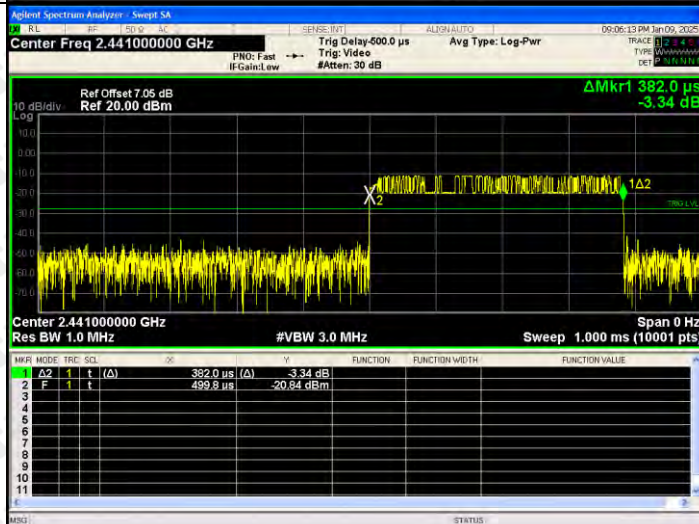


GFSK_DH1/HCH

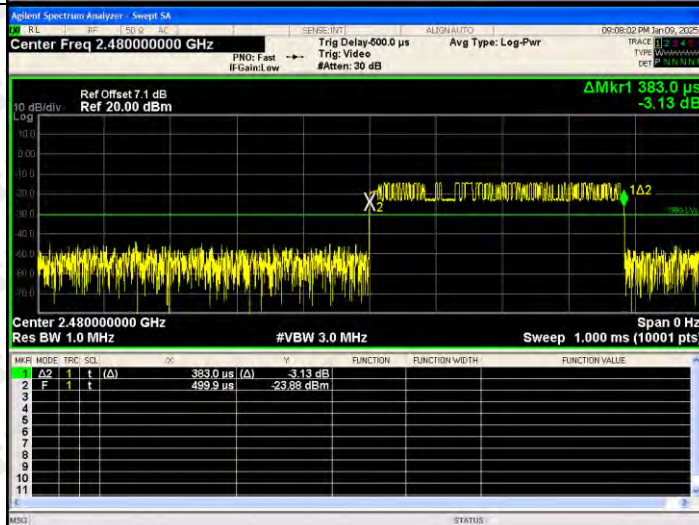


GFSK_DH3/LCH

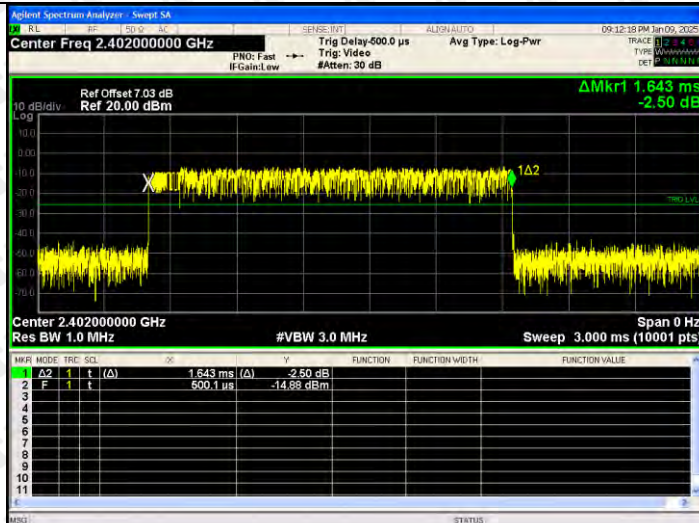


GFSK_DH3/MCH

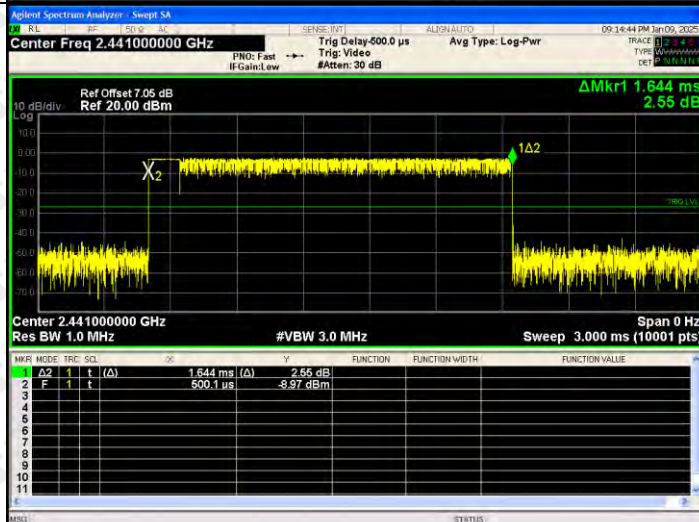


GFSK_DH3/HCH

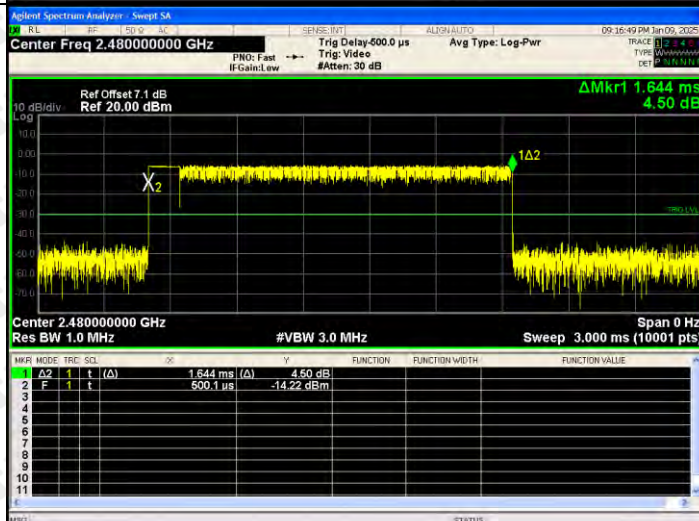


GFSK_DH5/LCH

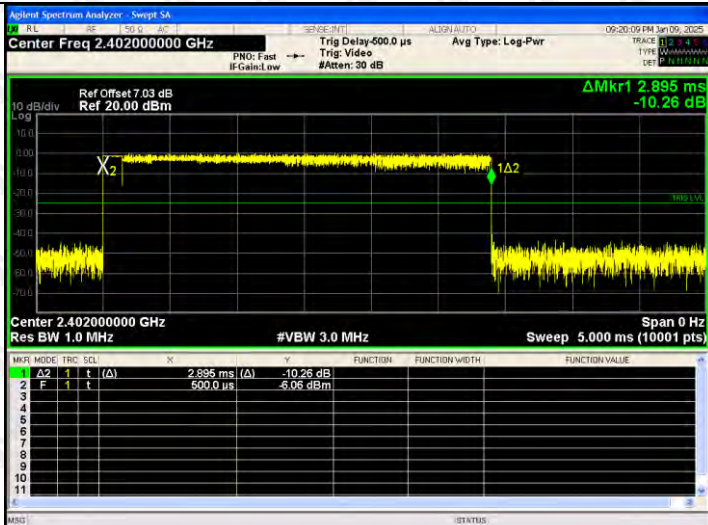

GFSK_DH5/MCH

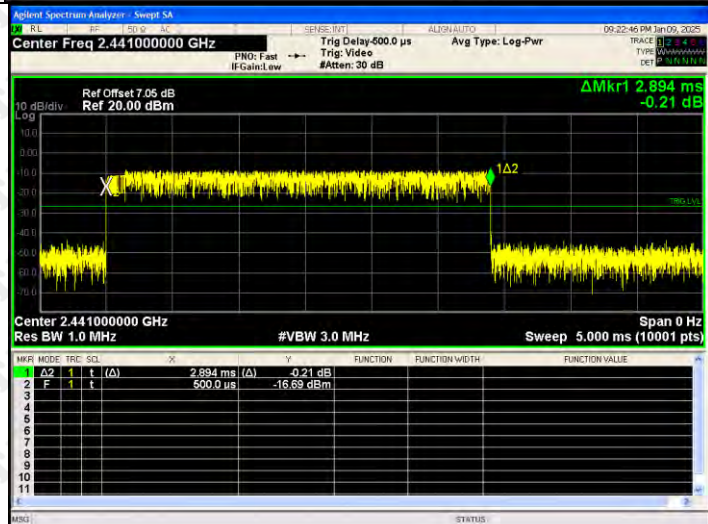

GFSK_DH5/HCH

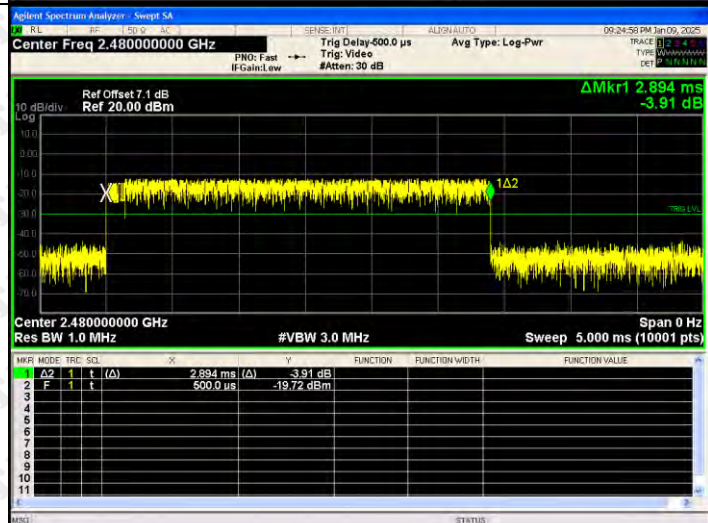

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

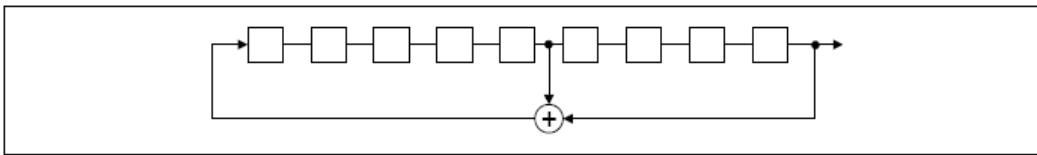

An example of Pseudorandom Frequency Hopping Sequence as follow:

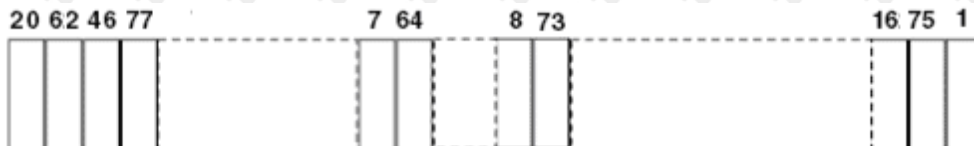

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is chip antenna. The best case gain of the antenna is 2.7dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G



Conducted emissions

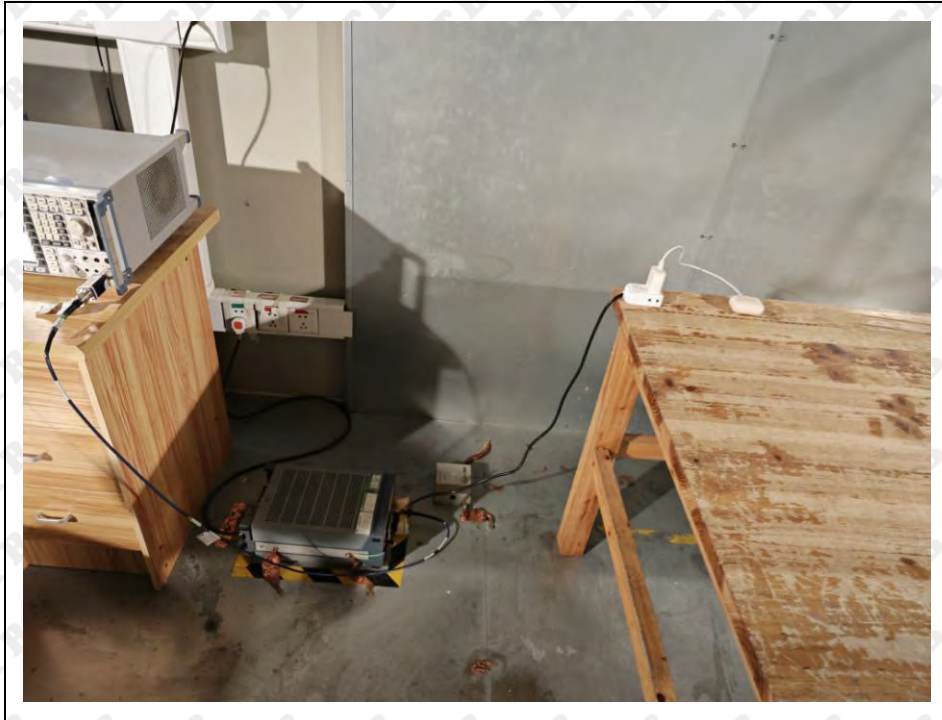

***** END OF REPORT *****