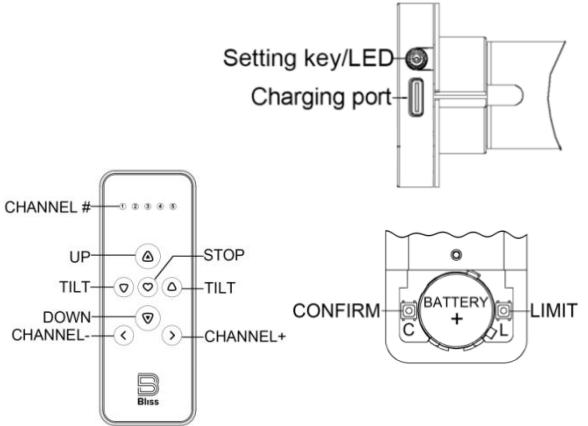
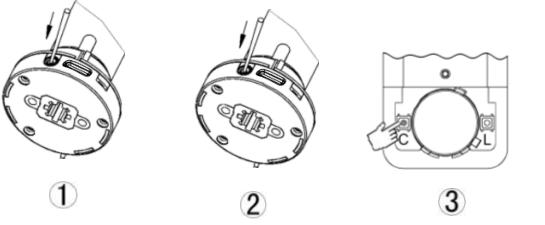
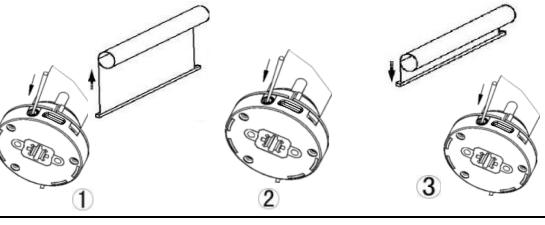

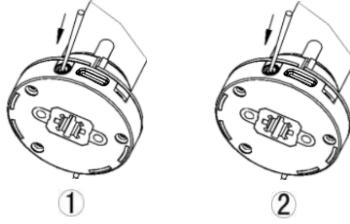
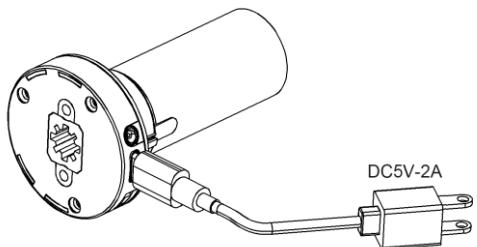


M25T-G2 Motor Instructions

Setting	Item	Operation	Result	Illustration
Technical data & Fixing Motors	Product name :DC Motor Motor Item: M25T-G2 Torque/Speed: 1.1Nm/28rpm Built-in Li-ion Battery Specification: 2000mAH, 7.4V Note: •The side of motor head with SETTING button should toward outside. •Please change a new battery for the remote when the controlling distance by the remote closer obviously. •When the motor continuously rotates only by long pressing the up or down button of the remote, it means it's in the current limit setting state. Please complete the limit setting operation according to the steps.			
Program the First remote with motor	1	Long pressing the SETTING button 3s or so.	Release when green LED light slow flashing.	
	2	Long pressing the SETTING button 3s or so again.	Release the button when Motor jogsx2 and red LED light slow flashing.	
	3	Press the C button of the remote.	Motor jogsx2 and green LED light quick flashing.The program has been done.	
<p>● After setting both top and bottom limit, the motor can be also manual controlled to up, down, or stop by the setting button on the motor head.</p>				
Manual Control by Setting button on the motor head	1	Press Setting button once	Motor goes up	
	2	Press Setting button again	Motor stops	
	3	Press Setting button once more	Motor goes down	
Delete remote itself from motor	2	Fast Press C button 3 times	Motor jogsx2 and green LED light quick flashes 3 times, the remote has been deleted from the motor.	
Bluetooth restored to be discoverable state	1	Long pressing the SETTING button 3s or so.	Release when Green LED light slow flashing.	
	2	Fast Press SETTING button 3 times.	Green LED light quick flashing.The bluetooth already restored to be discoverable as the name of HD0500/HD0400.Then App can find it accordingly.	
Charging Instructions	<ul style="list-style-type: none"> Charger Specification:DC5V-2A Please charge the motor when it alarms or works faltering. Please charge the motor in time when red LED light flashes 3 times and the motor can only goes down. Charging for 4-5 hours or so. Red LED light while charging,green LED light while full charged. Charging fault instructions: <p>A.Red LED NOT lighting while plugging the charger,please change a charger and the charging cable.</p> <p>B.After plugging the charger,if green and red led lights flash alternately,please check the built-in Li-ion battery and the open circuit.</p>			

FCC warning:

This device complies with Part 15 of the FCC rules. Operation is subjected to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.

For DC Motor, This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

The distance between user and products should be no less than 20cm.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

IC warning:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development (ISED) Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

For DC Motor, The device has been evaluated to meet general RF exposure requirement.

The distance between user and products should be no less than 20cm.

Cet appareil contient des émetteurs/récepteurs exemptés de licence qui sont conformes aux flux RSS exempts de licence du Canada pour l'innovation, la Science et le développement économique (ISDE). Le fonctionnement est soumis aux deux conditions suivantes: (1) ce dispositif ne peut pas causer d'interférence, et (2) ce dispositif doit accepter toute interférence, y compris les interférences pouvant causer un fonctionnement indésirable du dispositif.

Pour le moteur DC, L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF.

La distance entre l'utilisateur et les produits devraient être au moins 20 cm.