



TEST REPORT

Product Name: Pet feeder
FCC ID: 2BMQV-XLYM1
Trademark: N/A
Model Number: XLY-M1, XLY-M2, XLY-M3, XLY-M4, XLY-M5, XLY-M6, XLY-M7, XLY-M8, XLY-M9, XLY-M10, CW01, CW02, CW03, CW04, CW05, CW06, CW07, CW08, CW09, CW010
Prepared For: Shenzhen Xuliyun Electronic Technology Co., Ltd.
Address: 107, Building C, No. 6373, Baoan Avenue, Tangwei Community, Fuhai Street, Baoan District, Shenzhen, China
Manufacturer: Shenzhen Xuliyun Electronic Technology Co., Ltd.
Address: 107, Building C, No. 6373, Baoan Avenue, Tangwei Community, Fuhai Street, Baoan District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinxhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Nov. 07, 2024
Sample tested Date: Nov. 07, 2024 to Nov. 20, 2024
Issue Date: Nov. 20, 2024
Report No.: CTB24110700201RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	18
7.1 Block Diagram Of Test Setup	18
7.2 Limit	18
7.3 Test procedure	19
7.4 Test Result	20
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	64
8.1 Block Diagram Of Test Setup	64
8.2 Limit	64
8.3 Test procedure	64
8.4 Test Result	65
9. CONDUCTED OUTPUT POWER	73
9.1 Block Diagram Of Test Setup	73
9.2 Limit	73
9.3 Test procedure	73
9.4 Test Result	73
10. 6DB OCCUPIED BANDWIDTH	74
10.1 Block Diagram Of Test Setup	74
10.2 Limit	74
10.3 Test procedure	74
10.4 Test Result	75
11. POWER SPECTRAL DENSITY	80
11.1 Block Diagram Of Test Setup	80
11.2 Limit	80

11.3	Test procedure	80
11.4	Test Result	81
12.	ANTENNA REQUIREMENT	86
13.	EUT TEST SETUP PHOTOGRAPHS	87

(NOTE: N/A MEANS NOT APPLICABLE)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB24110700201RF02	Nov. 20, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m camber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m camber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	XLY-M1, XLY-M2, XLY-M3, XLY-M4, XLY-M5, XLY-M6, XLY-M7, XLY-M8, XLY-M9, XLY-M10, CW01, CW02, CW03, CW04, CW05, CW06, CW07, CW08, CW09, CW010
Model Description:	All the model are the same circuit and RF module, only the name is different. Test sample model: XLY-M1
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	1V3
Software Version:	V2.3.01
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 26.839dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G): 3.7dBi
Ratings:	INPUT: 100-240V~50-60Hz 0.7A OUTPUT: 12.0V === 2.0A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28


Radiated emission(No.2 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2024/11/27
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2024/11/27
10	Coaxial cable	Times	2m	/	/	2024/11/27
11	Coaxial cable	Times	2m	/	/	2024/11/27



12	Coaxial cable	Times	1m	/	/	2024/11/27
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

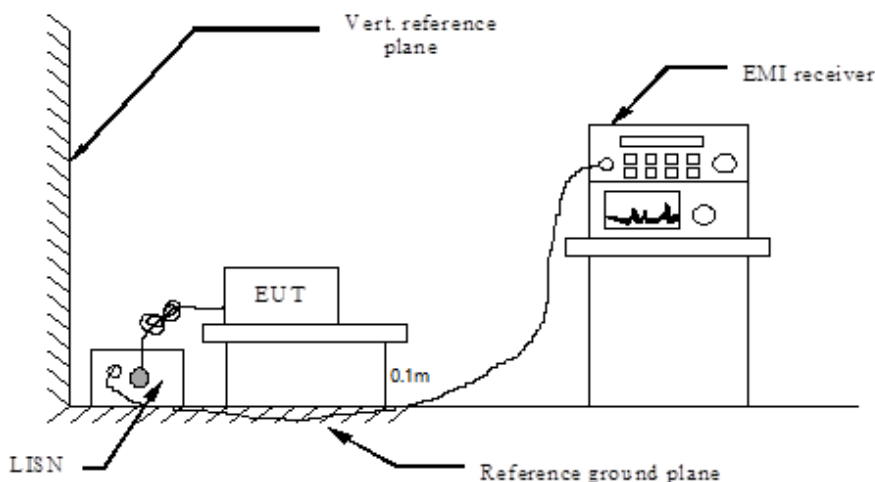

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.1m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.


6.4 Test Result

XLY-M1

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

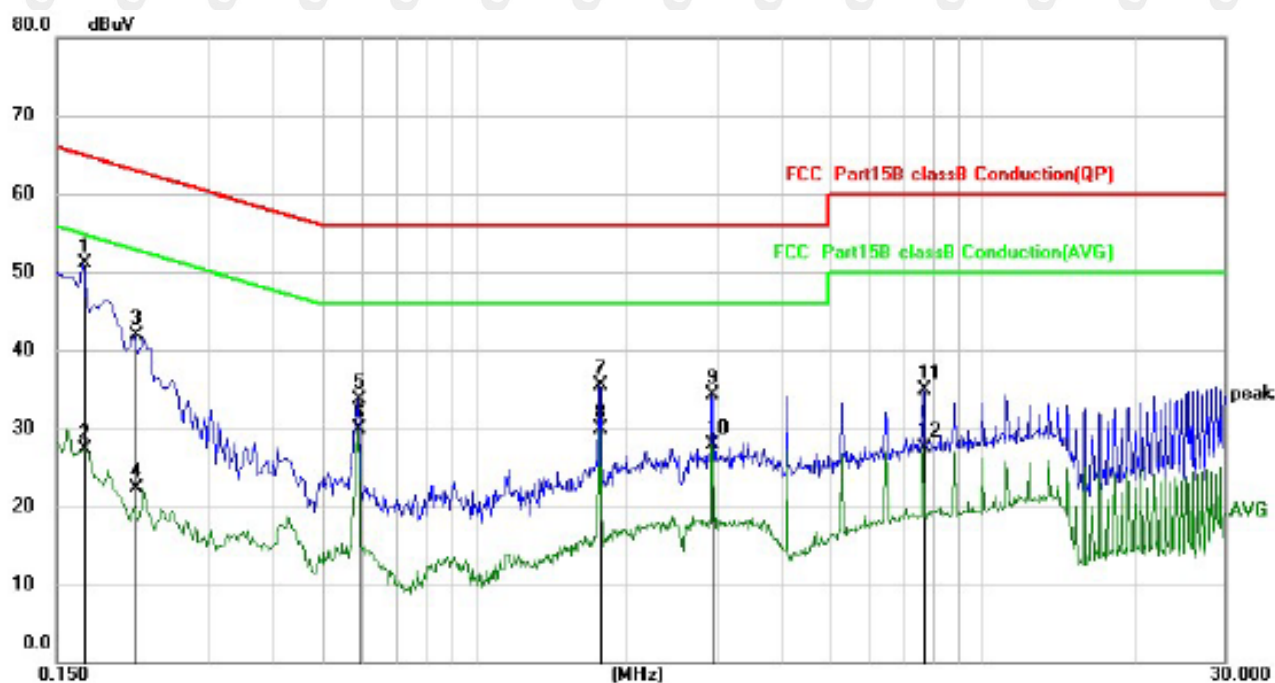

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector
		MHz	dBuV	Factor	ment	dBuV	dB	
1	*	0.1700	40.28	10.82	51.10	64.96	-13.86	QP
2		0.1700	16.43	10.82	27.25	54.96	-27.71	AVG
3		0.2140	31.15	10.70	41.85	63.05	-21.20	QP
4		0.2140	11.56	10.70	22.26	53.05	-30.79	AVG
5		0.5899	23.02	10.60	33.62	56.00	-22.38	QP
6		0.5899	19.25	10.60	29.85	46.00	-16.15	AVG
7		1.7660	24.14	11.43	35.57	56.00	-20.43	QP
8		1.7660	18.51	11.43	29.94	46.00	-16.06	AVG
9		2.9420	22.57	11.79	34.36	56.00	-21.64	QP
10		2.9420	16.16	11.79	27.95	46.00	-18.05	AVG
11		7.6500	21.83	13.00	34.83	60.00	-25.17	QP
12		7.6500	14.59	13.00	27.59	50.00	-22.41	AVG

Remark:


Factor = Cable loss + LISN factor, Margin = Measurement – Limit

XLY-M1

Test Specification: Neutral

AC 120V 60Hz

the worst: 802.11b (low channel)

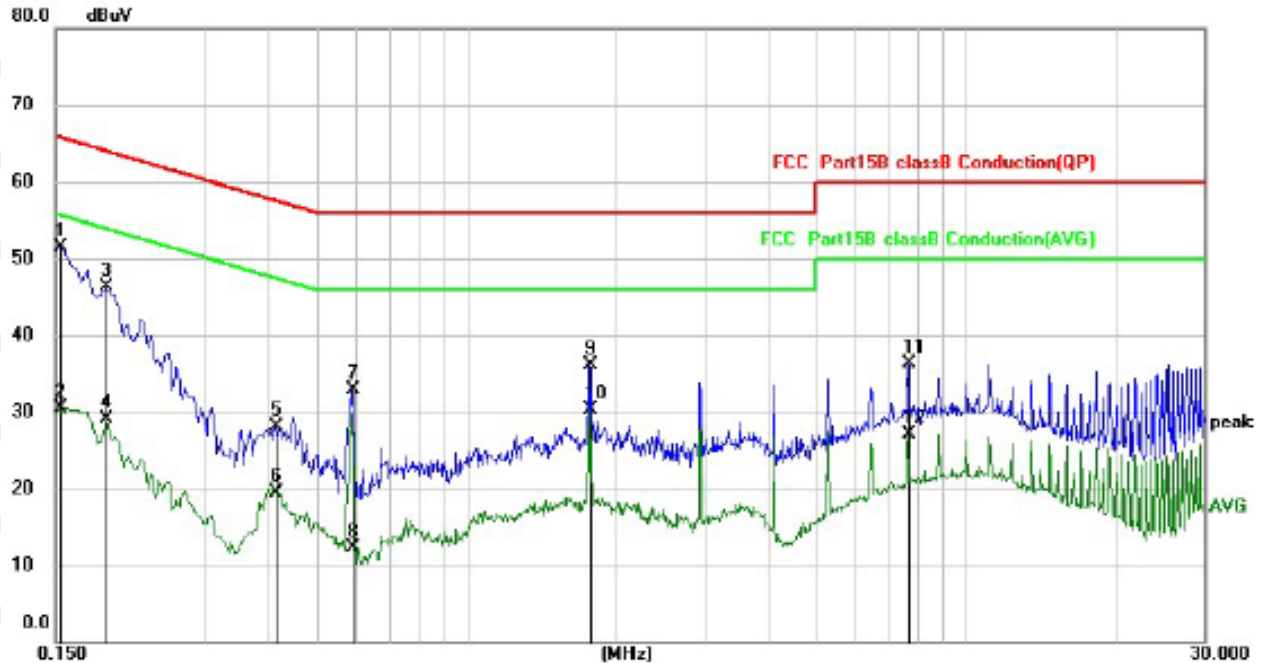

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	40.61	10.88	51.49	65.79	-14.30	QP
2		0.1539	19.62	10.88	30.50	55.79	-25.29	AVG
3		0.1900	35.49	10.75	46.24	64.04	-17.80	QP
4		0.1900	18.45	10.75	29.20	54.04	-24.84	AVG
5		0.4140	17.57	10.56	28.13	57.57	-29.44	QP
6		0.4140	8.91	10.56	19.47	47.57	-28.10	AVG
7		0.5899	22.34	10.60	32.94	56.00	-23.06	QP
8		0.5899	1.65	10.60	12.25	46.00	-33.75	AVG
9		1.7660	24.64	11.43	36.07	56.00	-19.93	QP
10		1.7660	18.95	11.43	30.38	46.00	-15.62	AVG
11		7.6500	23.21	13.00	36.21	60.00	-23.79	QP
12		7.6500	14.14	13.00	27.14	50.00	-22.86	AVG

Remark:


Factor = Cable loss + LISN factor, Margin = Measurement – Limit

XLY-M2

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

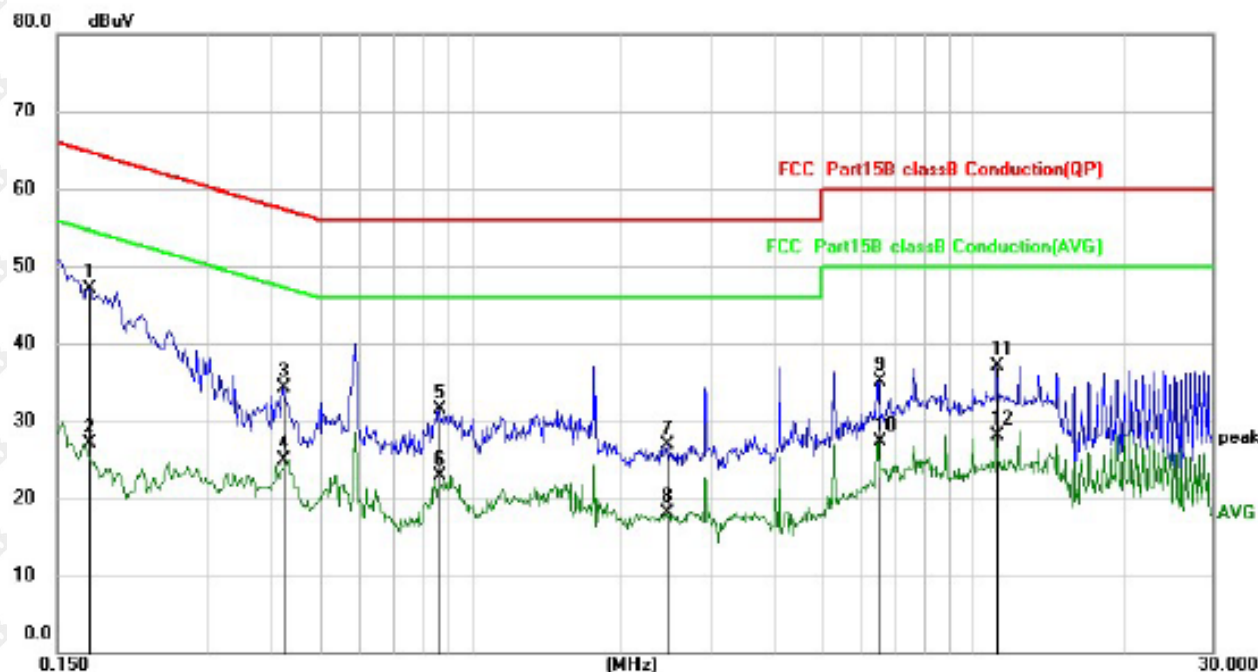

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1748	36.37	10.80	47.17	64.73	-17.56	QP
2		0.1748	16.24	10.80	27.04	54.73	-27.69	AVG
3		0.4218	23.82	10.55	34.37	57.41	-23.04	QP
4		0.4218	14.37	10.55	24.92	47.41	-22.49	AVG
5		0.8659	20.60	10.85	31.45	56.00	-24.55	QP
6		0.8659	12.03	10.85	22.88	46.00	-23.12	AVG
7		2.4620	15.22	11.68	26.90	56.00	-29.10	QP
8		2.4620	6.46	11.68	18.14	46.00	-27.86	AVG
9		6.4899	22.34	12.76	35.10	60.00	-24.90	QP
10		6.4899	14.54	12.76	27.30	50.00	-22.70	AVG
11		11.1777	23.79	13.26	37.05	60.00	-22.95	QP
12		11.1777	14.80	13.26	28.06	50.00	-21.94	AVG

Remark:


Factor = Cable loss + LISN factor, Margin = Measurement – Limit

XLY-M2

Test Specification: Neutral

AC 120V 60Hz

the worst: 802.11b (low channel)

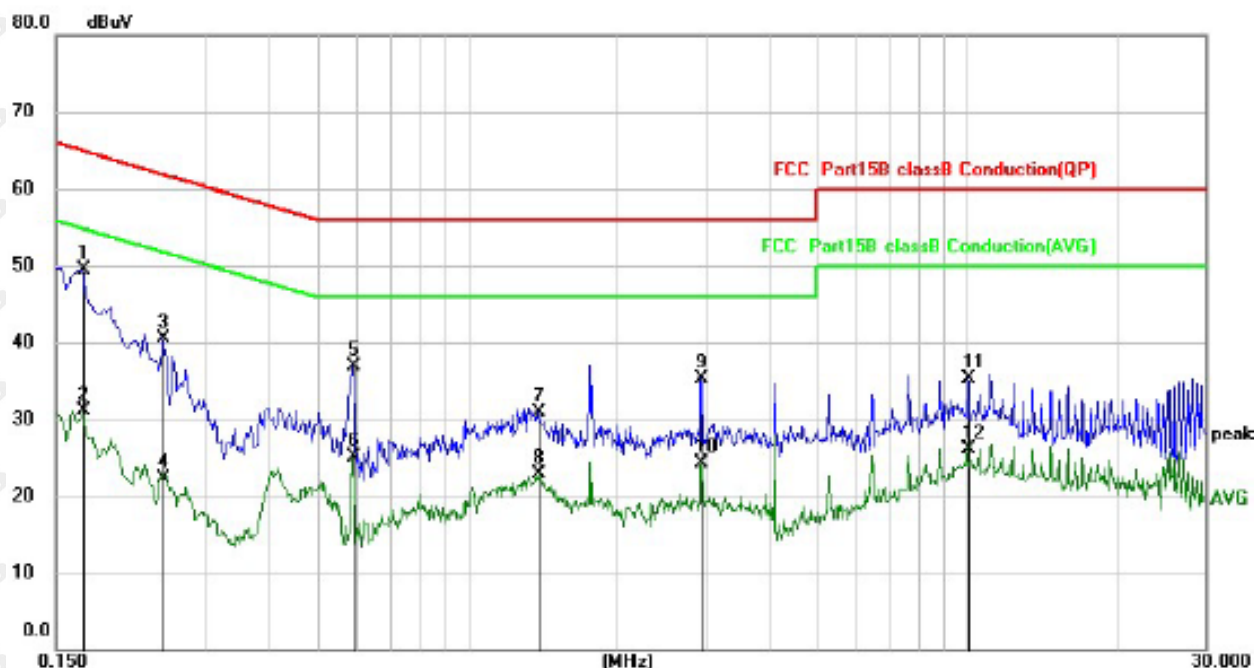

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1700	38.76	10.82	49.58	64.96	-15.38	QP
2		0.1700	20.21	10.82	31.03	54.96	-23.93	AVG
3		0.2459	29.75	10.68	40.43	61.89	-21.46	QP
4		0.2459	11.68	10.68	22.36	51.89	-29.53	AVG
5		0.5899	26.31	10.60	36.91	56.00	-19.09	QP
6		0.5899	14.49	10.60	25.09	46.00	-20.91	AVG
7		1.3857	19.67	11.19	30.86	56.00	-25.14	QP
8		1.3857	11.81	11.19	23.00	46.00	-23.00	AVG
9		2.9420	23.55	11.79	35.34	56.00	-20.66	QP
10		2.9420	12.52	11.79	24.31	46.00	-21.69	AVG
11		10.0300	21.99	13.24	35.23	60.00	-24.77	QP
12		10.0300	12.84	13.24	26.08	50.00	-23.92	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

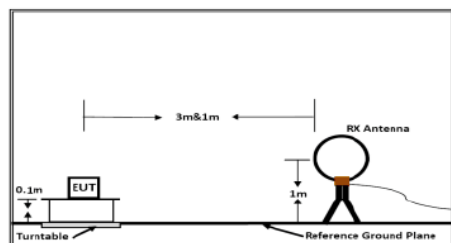


Figure 1. Below 30MHz

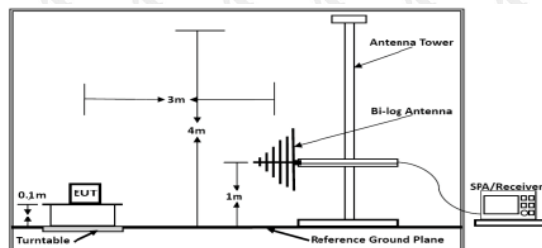


Figure 2. 30MHz to 1GHz

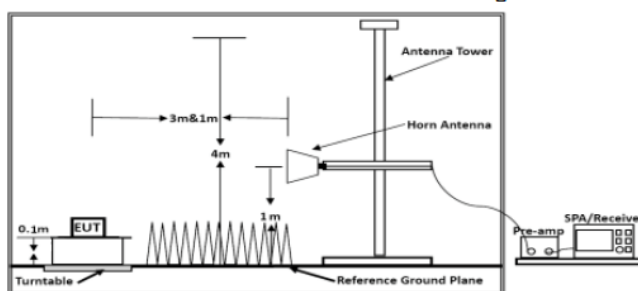


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.1 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i. Repeat above procedures until all frequencies measured was complete.

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

XLY-M1

Below 1GHz Test Results:


Antenna polarity: H

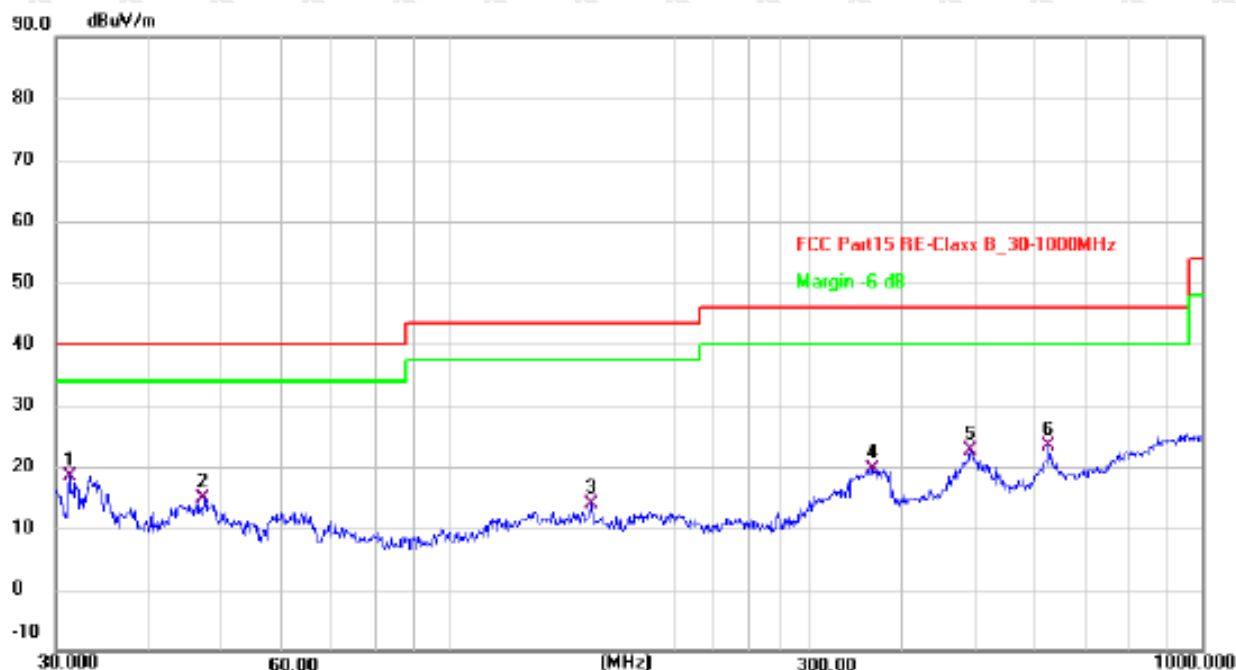

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	31.2892	31.43	-13.00	18.43	40.00	-21.57	QP
2	47.3253	28.87	-14.05	14.82	40.00	-25.18	QP
3	154.2785	27.12	-13.20	13.92	43.50	-29.58	QP
4	364.2595	32.45	-12.90	19.55	46.00	-26.45	QP
5	492.4685	32.11	-9.50	22.61	46.00	-23.39	QP
6	625.0780	29.61	-6.20	23.41	46.00	-22.59	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

XLY-M1
Antenna polarity: V

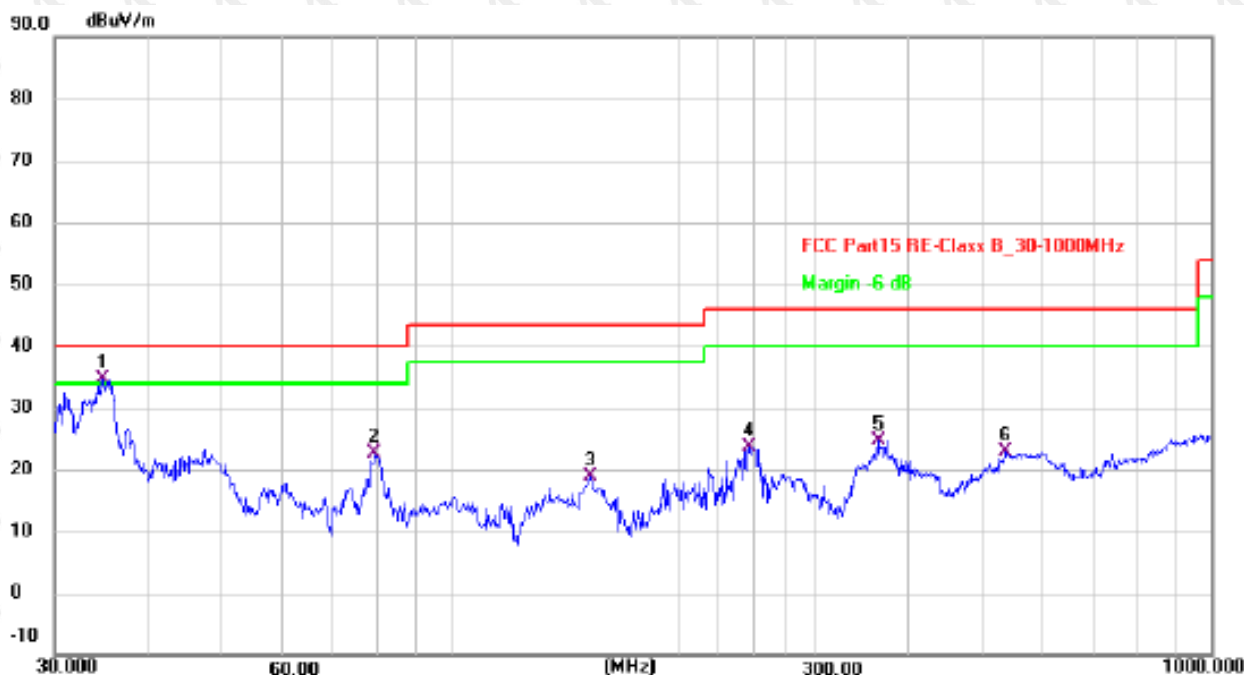

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	34.7601	47.84	-13.18	34.66	40.00	-5.34	QP
2	79.2425	40.85	-18.34	22.51	40.00	-17.49	QP
3	152.1297	31.98	-13.16	18.82	43.50	-24.68	QP
4	245.9510	40.12	-16.45	23.67	46.00	-22.33	QP
5	364.2595	37.54	-12.90	24.64	46.00	-21.36	QP
6	535.7073	31.11	-8.27	22.84	46.00	-23.16	QP


Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

XLY-M2

Below 1GHz Test Results:

Antenna polarity: H

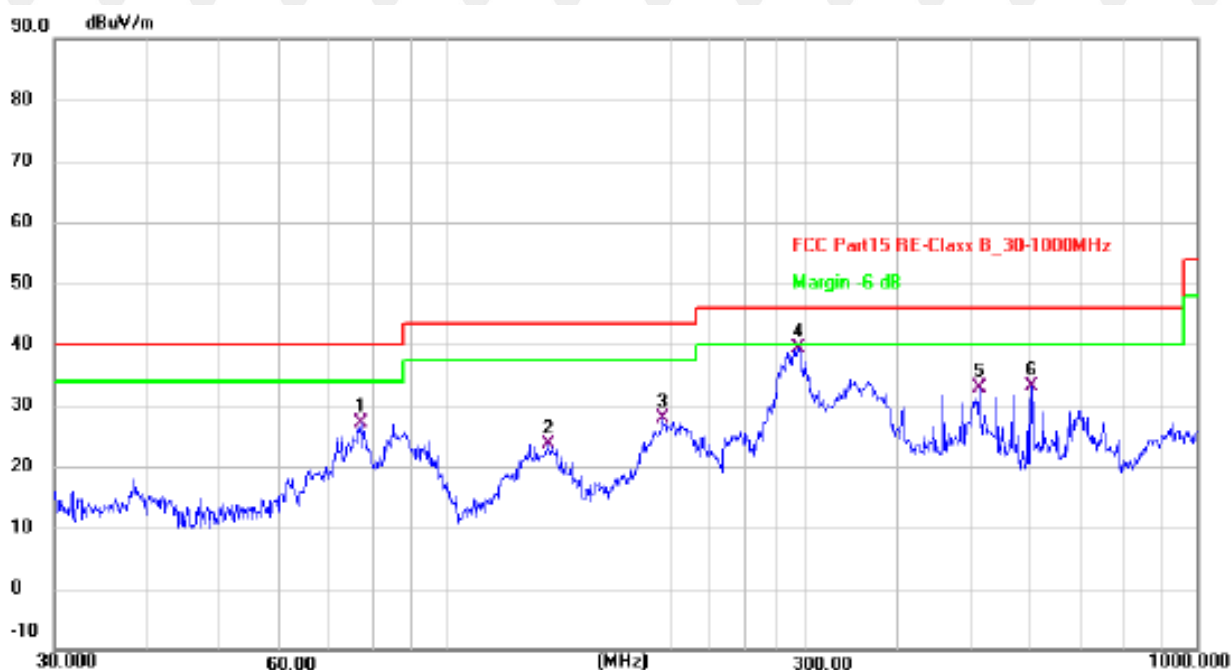


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	77.3210	45.45	-18.23	27.22	40.00	-12.78	QP
2	136.9390	38.15	-14.58	23.57	43.50	-19.93	QP
3	193.7726	44.82	-17.00	27.82	43.50	-15.68	QP
4 *	294.1136	53.40	-14.08	39.32	46.00	-6.68	QP
5	513.6331	41.74	-8.88	32.86	46.00	-13.14	QP
6	601.4265	39.71	-6.46	33.25	46.00	-12.75	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

XLY-M2

Antenna polarity: V

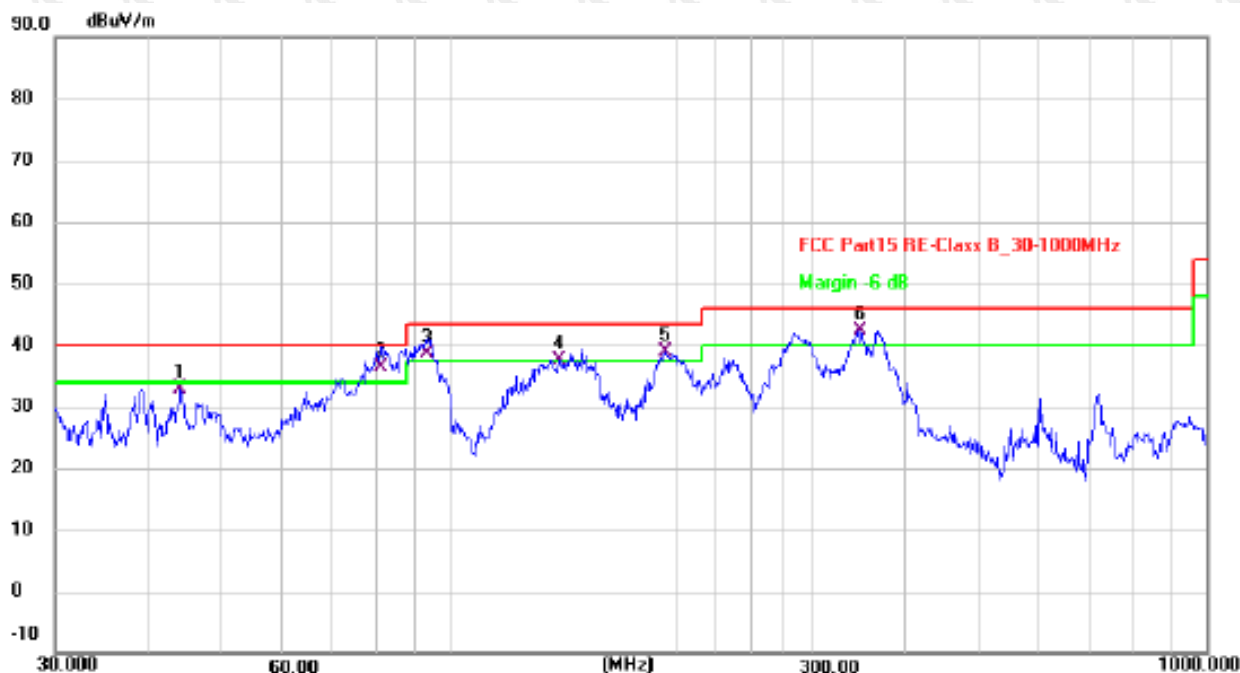

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.9658	46.22	-13.38	32.84	40.00	-7.16	QP
2 *	80.9274	54.80	-18.39	36.41	40.00	-3.59	QP
3 !	93.1131	56.98	-18.32	38.66	43.50	-4.84	QP
4 !	139.3610	52.12	-14.39	37.73	43.50	-5.77	QP
5 !	192.4183	55.74	-16.98	38.76	43.50	-4.74	QP
6 !	348.0274	55.44	-13.13	42.31	46.00	-3.69	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

XLY-M1

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.90	-3.64	61.26	74	-12.74	peak
4824	49.94	-3.64	46.30	54	-7.70	AVG
7236	57.63	-0.95	56.68	74	-17.32	peak
7236	44.06	-0.95	43.11	54	-10.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.34	-3.64	62.70	74	-11.30	peak
4824	48.79	-3.64	45.15	54	-8.85	AVG
7236	57.92	-0.95	56.97	74	-17.03	peak
7236	45.82	-0.95	44.87	54	-9.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.58	-3.51	62.07	74	-11.93	peak
4874	49.01	-3.51	45.50	54	-8.50	AVG
7311	59.35	-0.82	58.53	74	-15.47	peak
7311	44.40	-0.82	43.58	54	-10.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.45	-3.51	60.94	74	-13.06	peak
4874	48.97	-3.51	45.46	54	-8.54	AVG
7311	57.52	-0.82	56.70	74	-17.30	peak
7311	44.51	-0.82	43.69	54	-10.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.70	-3.43	59.27	74	-14.73	peak
4924	47.33	-3.43	43.90	54	-10.10	AVG
7386	57.60	-0.75	56.85	74	-17.15	peak
7386	45.10	-0.75	44.35	54	-9.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.19	-3.43	59.76	74	-14.24	peak
4924	47.35	-3.43	43.92	54	-10.08	AVG
7386	58.25	-0.75	57.50	74	-16.50	peak
7386	43.82	-0.75	43.07	54	-10.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.35	-3.64	60.71	74	-13.29	peak
4824	48.26	-3.64	44.62	54	-9.38	AVG
7236	59.47	-0.95	58.52	74	-15.48	peak
7236	44.19	-0.95	43.24	54	-10.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.92	-3.64	59.28	74	-14.72	peak
4824	49.04	-3.64	45.40	54	-8.60	AVG
7236	58.96	-0.95	58.01	74	-15.99	peak
7236	44.86	-0.95	43.91	54	-10.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.33	-3.51	60.82	74	-13.18	peak
4874	48.41	-3.51	44.90	54	-9.10	AVG
7311	57.94	-0.82	57.12	74	-16.88	peak
7311	45.29	-0.82	44.47	54	-9.53	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.39	-3.51	59.88	74	-14.12	peak
4874	48.37	-3.51	44.86	54	-9.14	AVG
7311	56.89	-0.82	56.07	74	-17.93	peak
7311	42.82	-0.82	42.00	54	-12.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.86	-3.43	60.43	74	-13.57	peak
4924	48.21	-3.43	44.78	54	-9.22	AVG
7386	56.80	-0.75	56.05	74	-17.95	peak
7386	42.30	-0.75	41.55	54	-12.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.94	-3.43	58.51	74	-15.49	peak
4924	47.78	-3.43	44.35	54	-9.65	AVG
7386	57.00	-0.75	56.25	74	-17.75	peak
7386	42.53	-0.75	41.78	54	-12.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.04	-3.64	60.40	74	-13.60	peak
4824	46.43	-3.64	42.79	54	-11.21	AVG
7236	59.51	-0.95	58.56	74	-15.44	peak
7236	43.07	-0.95	42.12	54	-11.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.76	-3.64	63.12	74	-10.88	peak
4824	49.28	-3.64	45.64	54	-8.36	AVG
7236	58.52	-0.95	57.57	74	-16.43	peak
7236	44.70	-0.95	43.75	54	-10.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.58	-3.51	59.07	74.00	-14.93	peak
4874.00	49.72	-3.51	46.21	54.00	-7.79	AVG
7311.00	57.08	-0.82	56.26	74.00	-17.74	peak
7311.00	43.80	-0.82	42.98	54.00	-11.02	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.64	-3.51	60.13	74.00	-13.87	peak
4874.00	46.48	-3.51	42.97	54.00	-11.03	AVG
7311.00	59.06	-0.82	58.24	74.00	-15.76	peak
7311.00	44.25	-0.82	43.43	54.00	-10.57	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.09	-3.43	60.66	74	-13.34	peak
4924	45.81	-3.43	42.38	54	-11.62	AVG
7386	59.23	-0.75	58.48	74	-15.52	peak
7386	42.74	-0.75	41.99	54	-12.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.01	-3.43	61.58	74	-12.42	peak
4924	46.10	-3.43	42.67	54	-11.33	AVG
7386	56.62	-0.75	55.87	74	-18.13	peak
7386	42.46	-0.75	41.71	54	-12.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.63	-3.63	61.00	74	-13.00	peak
4844	48.80	-3.63	45.17	54	-8.83	AVG
7266	58.20	-0.94	57.26	74	-16.74	peak
7266	45.73	-0.94	44.79	54	-9.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.55	-3.63	61.92	74	-12.08	peak
4844	49.58	-3.63	45.95	54	-8.05	AVG
7266	59.22	-0.94	58.28	74	-15.72	peak
7266	43.99	-0.94	43.05	54	-10.95	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.12	-3.51	61.61	74	-12.39	peak
4874	49.31	-3.51	45.80	54	-8.20	AVG
7311	58.33	-0.82	57.51	74	-16.49	peak
7311	43.79	-0.82	42.97	54	-11.03	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.29	-3.51	58.78	74	-15.22	peak
4874	46.43	-3.51	42.92	54	-11.08	AVG
7311	56.62	-0.82	55.80	74	-18.20	peak
7311	43.30	-0.82	42.48	54	-11.52	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.74	-3.43	59.31	74	-14.69	peak
4904	48.59	-3.43	45.16	54	-8.84	AVG
7356	55.53	-0.75	54.78	74	-19.22	peak
7356	41.14	-0.75	40.39	54	-13.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.18	-3.43	59.75	74	-14.25	peak
4904	46.51	-3.43	43.08	54	-10.92	AVG
7356	59.14	-0.75	58.39	74	-15.61	peak
7356	42.79	-0.75	42.04	54	-11.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	58.17	-5.81	52.36	74	-21.64	
2390	/	-5.81	/	54	/	AVG
2399	63.99	-5.84	58.15	74	-15.85	peak
2399	48.78	-5.84	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.02	-5.81	51.21	74	-22.79	
2390	/	-5.81	/	54	/	AVG
2399	63.53	-5.84	57.69	74	-16.31	peak
2399	47.04	-5.84	41.20	54	-12.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.33	-5.65	51.68	74	-22.32	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.91	-5.65	51.26	74	-22.74	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.38	-5.81	53.57	74	-20.43	peak
2390	/	-5.81	/	54	/	AVG
2399	63.25	-5.84	57.41	74	-16.59	peak
2399	46.52	-5.84	40.68	54	-13.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.41	-5.81	50.60	74	-23.40	peak
2390	/	-5.81	/	54	/	AVG
2399	61.57	-5.84	55.73	74	-18.27	peak
2399	46.57	-5.84	40.73	54	-13.27	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.12	-5.65	50.47	74	-23.53	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.03	-5.65	52.38	74	-21.62	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.80	-5.81	51.99	74	-22.01	peak
2390	/	-5.81	/	54	/	AVG
2399	63.34	-5.84	57.50	74	-16.50	peak
2399	48.69	-5.84	42.85	54	-11.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.73	-5.81	49.92	74	-24.08	peak
2390	/	-5.81	/	54	/	AVG
2399	59.90	-5.84	54.06	74	-19.94	peak
2399	47.23	-5.84	41.39	54	-12.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.67	-5.65	50.02	74	-23.98	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.38	-5.65	49.73	74	-24.27	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.84	-5.81	53.03	74	-20.97	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.29	-5.81	51.48	74	-22.52	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.50	-5.65	50.85	74	-23.15	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.26	-5.65	50.61	74	-23.39	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

XLY-M2

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.79	-3.64	61.15	74	-12.85	peak
4824	50.93	-3.64	47.29	54	-6.71	AVG
7236	57.12	-0.95	56.17	74	-17.83	peak
7236	44.76	-0.95	43.81	54	-10.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.03	-3.64	62.39	74	-11.61	peak
4824	49.34	-3.64	45.70	54	-8.30	AVG
7236	58.66	-0.95	57.71	74	-16.29	peak
7236	43.47	-0.95	42.52	54	-11.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.34	-3.51	61.83	74	-12.17	peak
4874	50.02	-3.51	46.51	54	-7.49	AVG
7311	59.80	-0.82	58.98	74	-15.02	peak
7311	45.71	-0.82	44.89	54	-9.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.08	-3.51	61.57	74	-12.43	peak
4874	49.06	-3.51	45.55	54	-8.45	AVG
7311	57.93	-0.82	57.11	74	-16.89	peak
7311	43.05	-0.82	42.23	54	-11.77	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.33	-3.43	60.90	74	-13.10	peak
4924	47.06	-3.43	43.63	54	-10.37	AVG
7386	57.68	-0.75	56.93	74	-17.07	peak
7386	44.08	-0.75	43.33	54	-10.67	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.98	-3.43	59.55	74	-14.45	peak
4924	47.99	-3.43	44.56	54	-9.44	AVG
7386	57.97	-0.75	57.22	74	-16.78	peak
7386	42.70	-0.75	41.95	54	-12.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.95	-3.64	60.31	74	-13.69	peak
4824	50.27	-3.64	46.63	54	-7.37	AVG
7236	57.75	-0.95	56.80	74	-17.20	peak
7236	44.86	-0.95	43.91	54	-10.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.26	-3.64	60.62	74	-13.38	peak
4824	47.77	-3.64	44.13	54	-9.87	AVG
7236	59.20	-0.95	58.25	74	-15.75	peak
7236	42.75	-0.95	41.80	54	-12.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.51	-3.51	61.00	74	-13.00	peak
4874	48.25	-3.51	44.74	54	-9.26	AVG
7311	59.41	-0.82	58.59	74	-15.41	peak
7311	45.73	-0.82	44.91	54	-9.09	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.85	-3.51	60.34	74	-13.66	peak
4874	46.98	-3.51	43.47	54	-10.53	AVG
7311	56.92	-0.82	56.10	74	-17.90	peak
7311	42.42	-0.82	41.60	54	-12.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.18	-3.43	61.75	74	-12.25	peak
4924	47.47	-3.43	44.04	54	-9.96	AVG
7386	56.63	-0.75	55.88	74	-18.12	peak
7386	42.00	-0.75	41.25	54	-12.75	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.77	-3.43	59.34	74	-14.66	peak
4924	48.03	-3.43	44.60	54	-9.40	AVG
7386	56.67	-0.75	55.92	74	-18.08	peak
7386	42.17	-0.75	41.42	54	-12.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.59	-3.64	60.95	74	-13.05	peak
4824	47.71	-3.64	44.07	54	-9.93	AVG
7236	57.82	-0.95	56.87	74	-17.13	peak
7236	43.73	-0.95	42.78	54	-11.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.75	-3.64	62.11	74	-11.89	peak
4824	48.38	-3.64	44.74	54	-9.26	AVG
7236	60.84	-0.95	59.89	74	-14.11	peak
7236	43.54	-0.95	42.59	54	-11.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.89	-3.51	60.38	74.00	-13.62	peak
4874.00	49.48	-3.51	45.97	54.00	-8.03	AVG
7311.00	57.23	-0.82	56.41	74.00	-17.59	peak
7311.00	43.72	-0.82	42.90	54.00	-11.10	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	64.71	-3.51	61.20	74.00	-12.80	peak
4874.00	48.50	-3.51	44.99	54.00	-9.01	AVG
7311.00	56.55	-0.82	55.73	74.00	-18.27	peak
7311.00	41.84	-0.82	41.02	54.00	-12.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.89	-3.43	59.46	74	-14.54	peak
4924	48.42	-3.43	44.99	54	-9.01	AVG
7386	58.28	-0.75	57.53	74	-16.47	peak
7386	43.40	-0.75	42.65	54	-11.35	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.86	-3.43	61.43	74	-12.57	peak
4924	47.54	-3.43	44.11	54	-9.89	AVG
7386	58.19	-0.75	57.44	74	-16.56	peak
7386	41.29	-0.75	40.54	54	-13.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.88	-3.63	62.25	74	-11.75	peak
4844	49.12	-3.63	45.49	54	-8.51	AVG
7266	57.99	-0.94	57.05	74	-16.95	peak
7266	45.03	-0.94	44.09	54	-9.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.43	-3.63	60.80	74	-13.20	peak
4844	47.79	-3.63	44.16	54	-9.84	AVG
7266	59.52	-0.94	58.58	74	-15.42	peak
7266	45.56	-0.94	44.62	54	-9.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.65	-3.51	61.14	74	-12.86	peak
4874	48.49	-3.51	44.98	54	-9.02	AVG
7311	60.49	-0.82	59.67	74	-14.33	peak
7311	44.33	-0.82	43.51	54	-10.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.39	-3.43	58.96	74	-15.04	peak
4904	49.37	-3.43	45.94	54	-8.06	AVG
7356	55.58	-0.75	54.83	74	-19.17	peak
7356	42.94	-0.75	42.19	54	-11.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.35	-3.43	60.92	74	-13.08	peak
4904	46.78	-3.43	43.35	54	-10.65	AVG
7356	58.98	-0.75	58.23	74	-15.77	peak
7356	44.77	-0.75	44.02	54	-9.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5) Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.10	-5.81	51.29	74	-22.71	
2390	/	-5.81	/	54	/	AVG
2399	64.28	-5.84	58.44	74	-15.56	peak
2399	49.33	-5.84	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.02	-5.81	50.21	74	-23.79	
2390	/	-5.81	/	54	/	AVG
2399	62.61	-5.84	56.77	74	-17.23	peak
2399	45.91	-5.84	40.07	54	-13.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.90	-5.65	51.25	74	-22.75	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.98	-5.65	51.33	74	-22.67	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.17	-5.81	53.36	74	-20.64	peak
2390	/	-5.81	/	54	/	AVG
2399	62.73	-5.84	56.89	74	-17.11	peak
2399	47.34	-5.84	41.50	54	-12.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.75	-5.81	50.94	74	-23.06	peak
2390	/	-5.81	/	54	/	AVG
2399	63.38	-5.84	57.54	74	-16.46	peak
2399	45.99	-5.84	40.15	54	-13.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.17	-5.65	51.52	74	-22.48	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.66	-5.65	51.01	74	-22.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.99	-5.81	50.18	74	-23.82	peak
2390	/	-5.81	/	54	/	AVG
2399	63.58	-5.84	57.74	74	-16.26	peak
2399	48.69	-5.84	42.85	54	-11.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.79	-5.81	49.98	74	-24.02	peak
2390	/	-5.81	/	54	/	AVG
2399	60.67	-5.84	54.83	74	-19.17	peak
2399	48.26	-5.84	42.42	54	-11.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.91	-5.65	50.26	74	-23.74	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.62	-5.65	50.97	74	-23.03	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.19	-5.81	52.38	74	-21.62	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.69	-5.81	51.88	74	-22.12	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.85	-5.65	52.20	74	-21.80	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.82	-5.65	52.17	74	-21.83	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

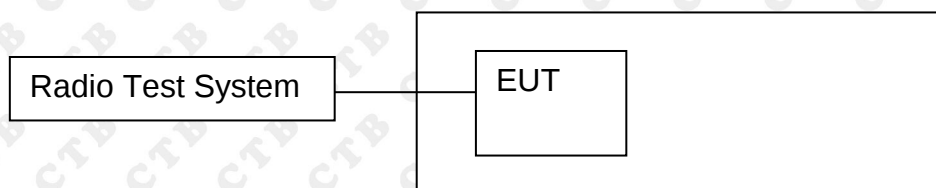


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result

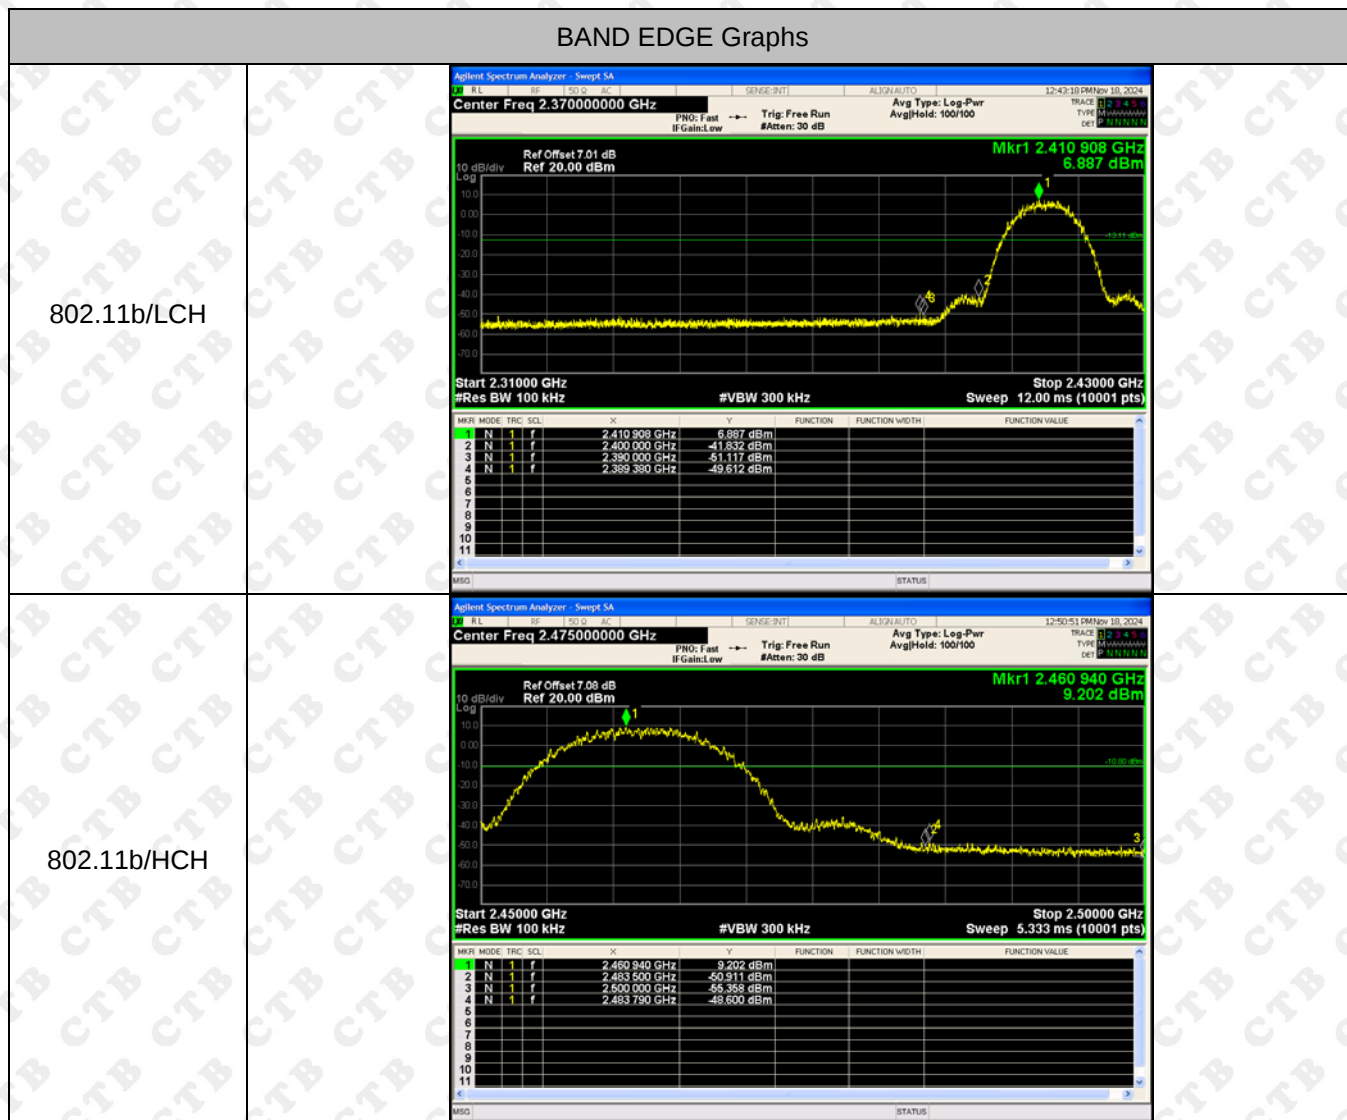



BAND EDGE Graphs


802.11g/LCH

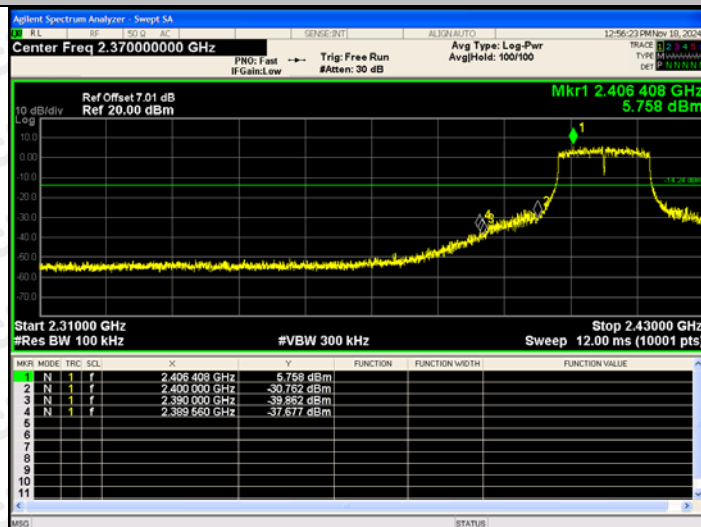

802.11g/HCH

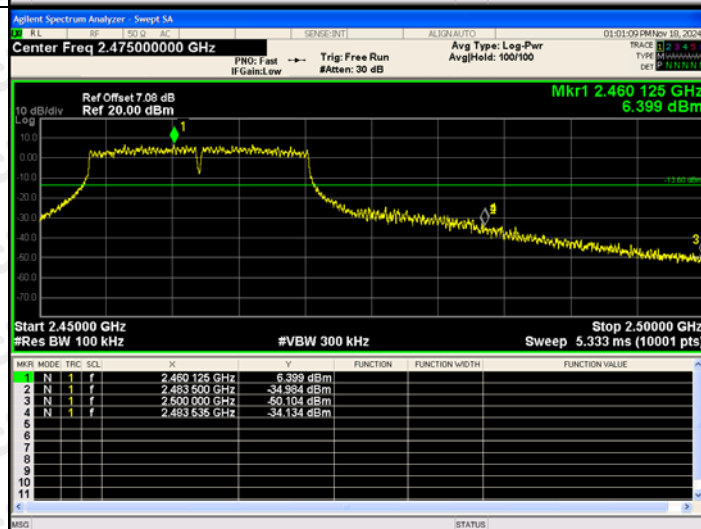


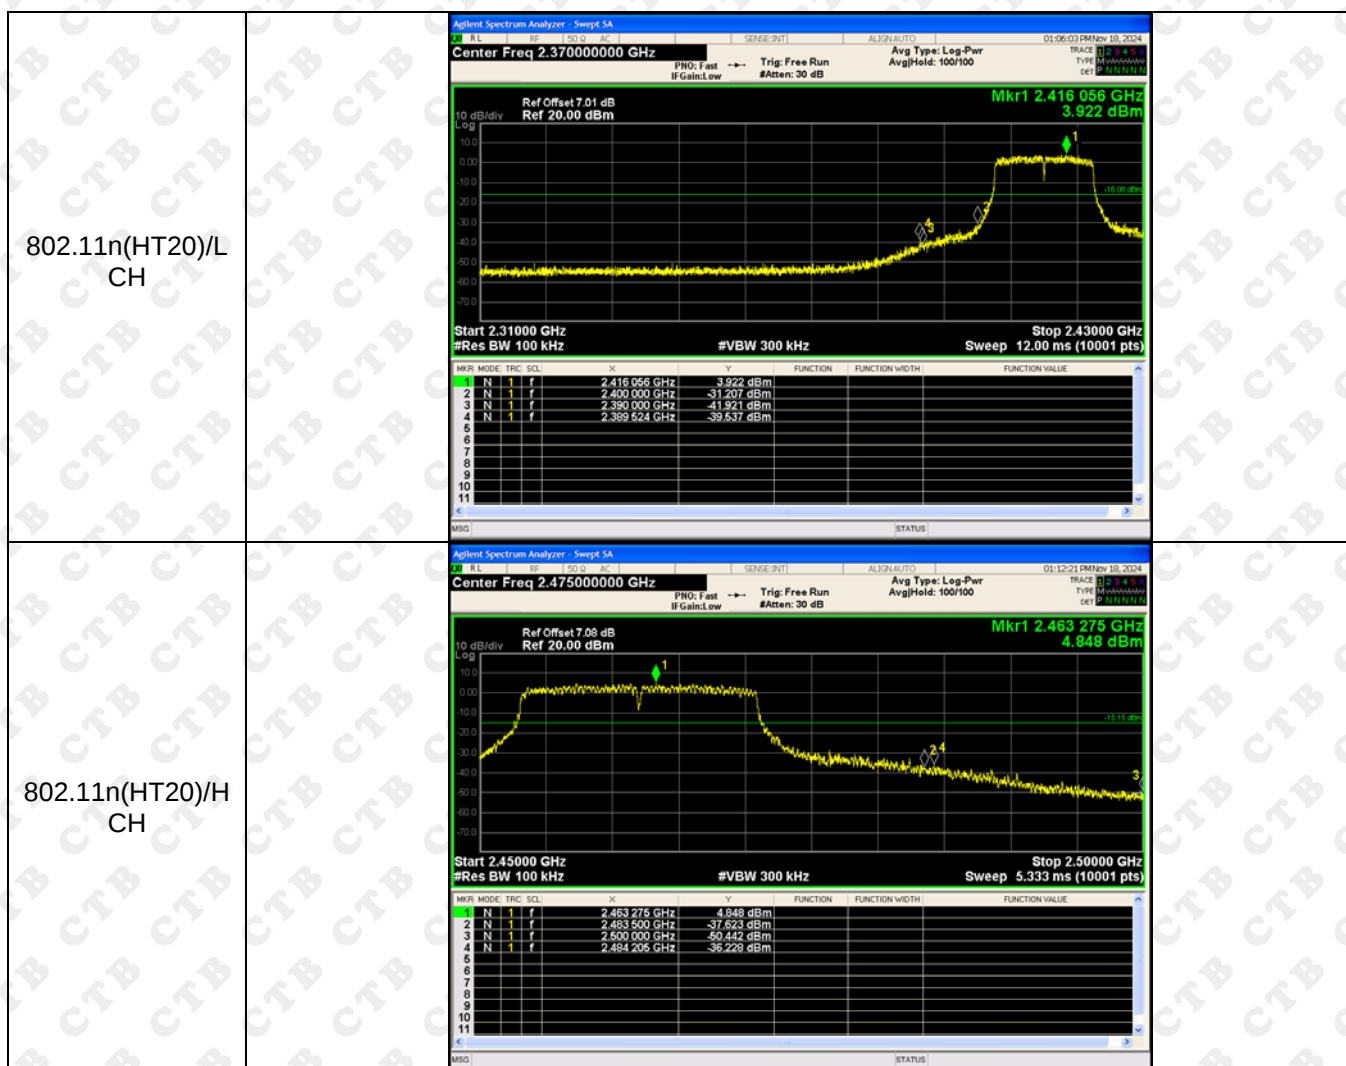

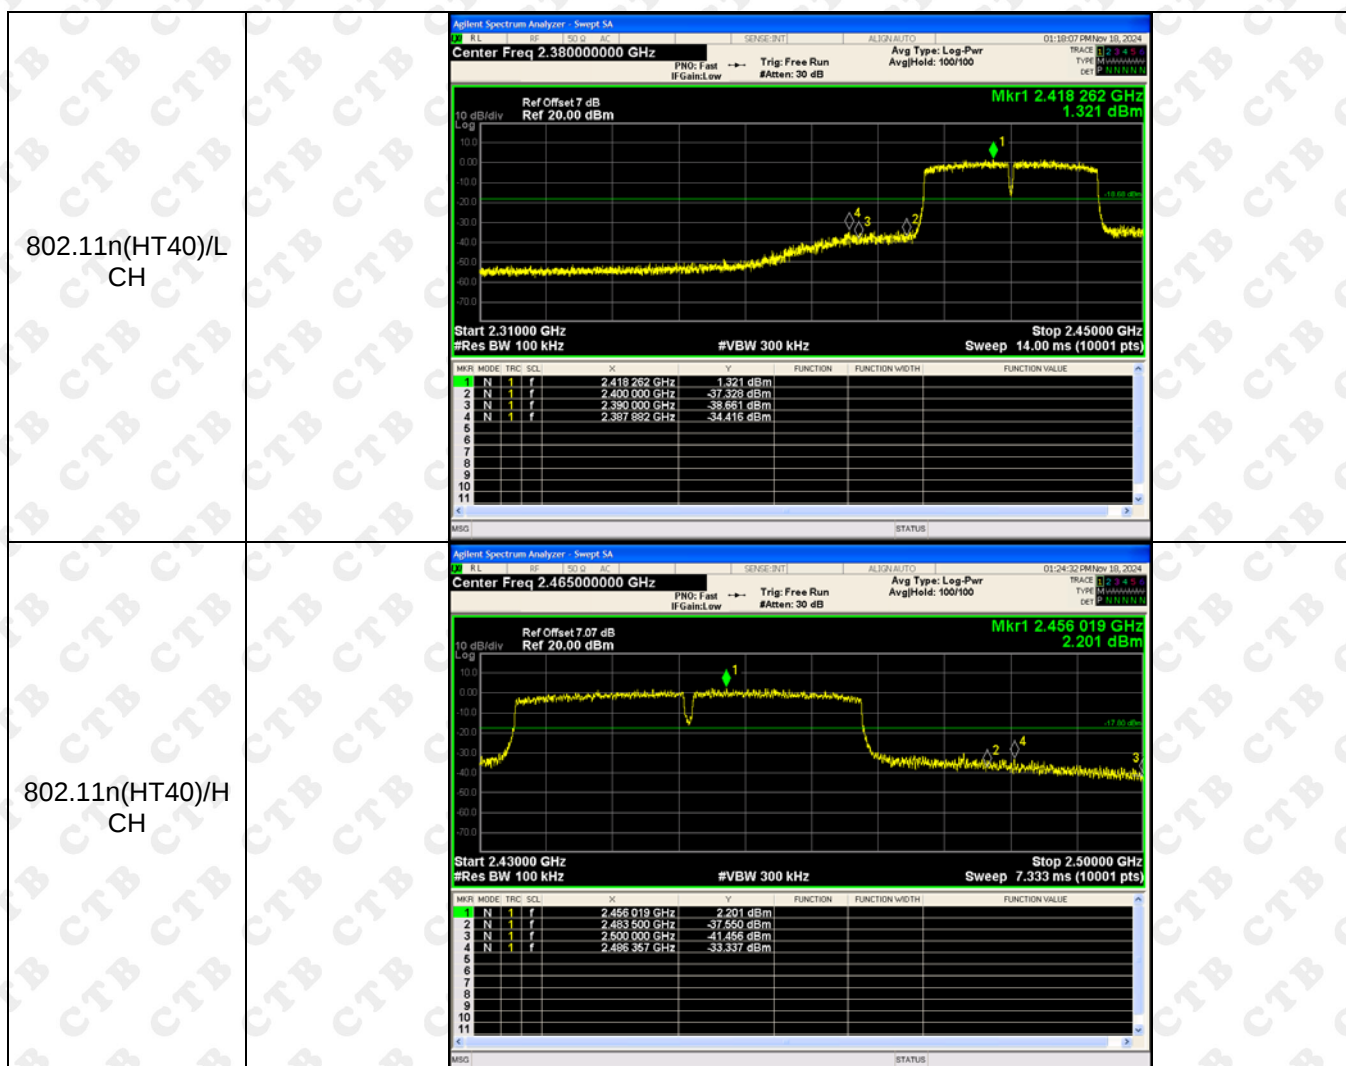


RF Conducted Spurious Emissions Graphs


802.11b/LCH

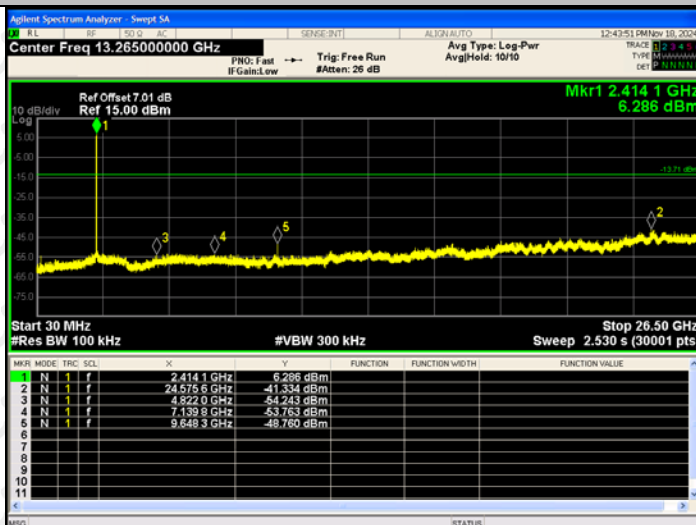

802.11b/MCH

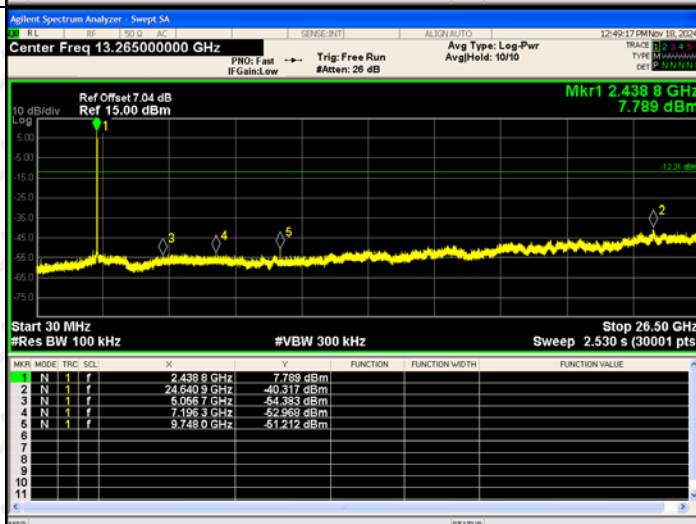


802.11b/HCH

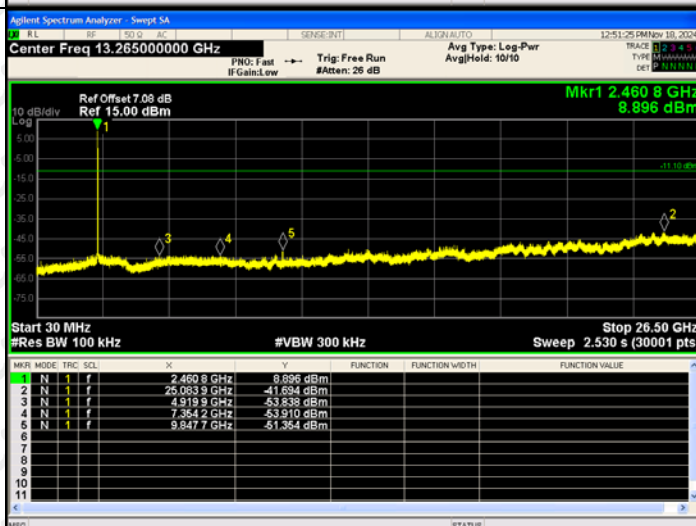


RF Conducted Spurious Emissions Graphs


802.11g/LCH

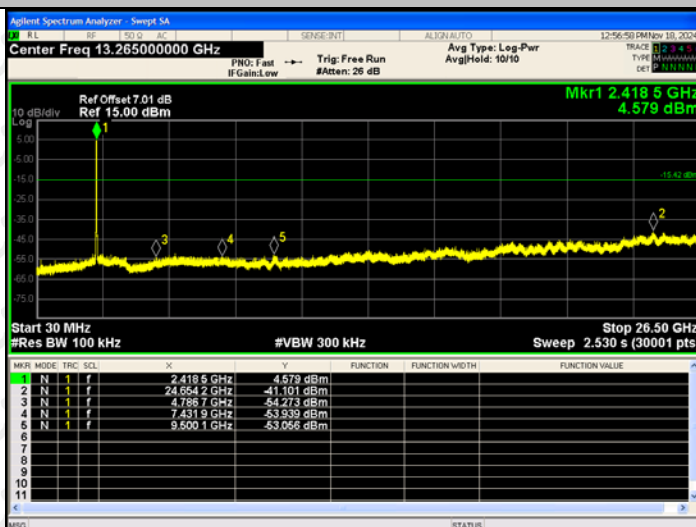

802.11g/MCH

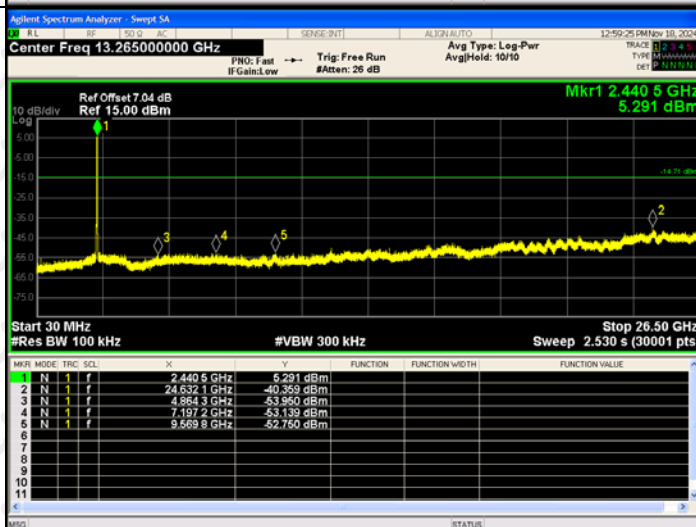


802.11g/HCH

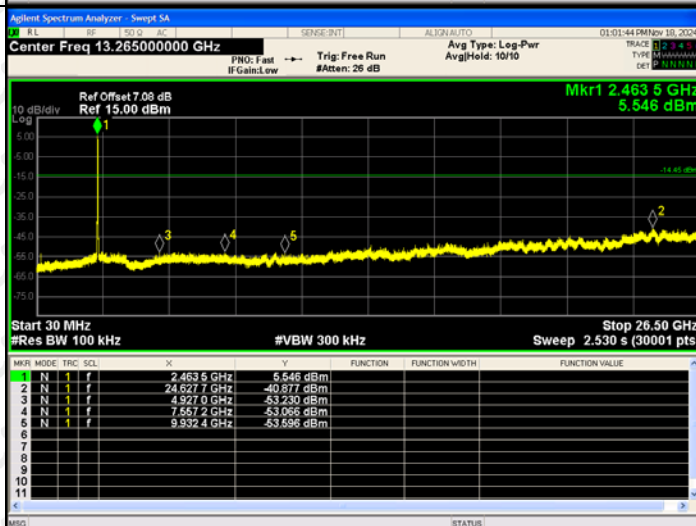


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

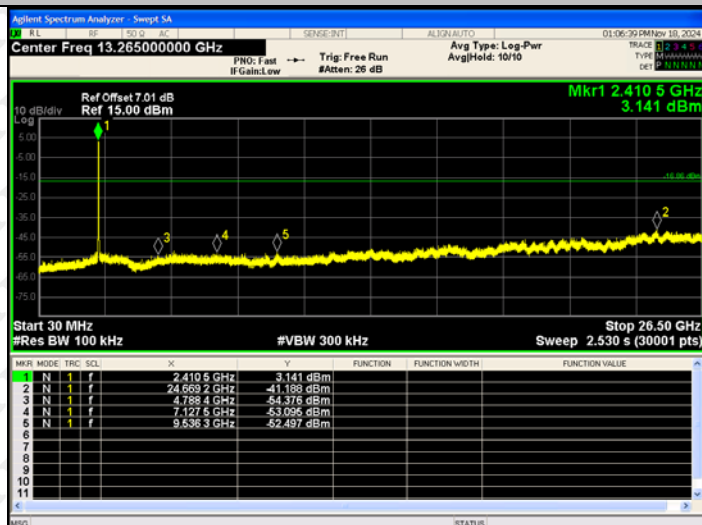

802.11 n(HT20)/MCH

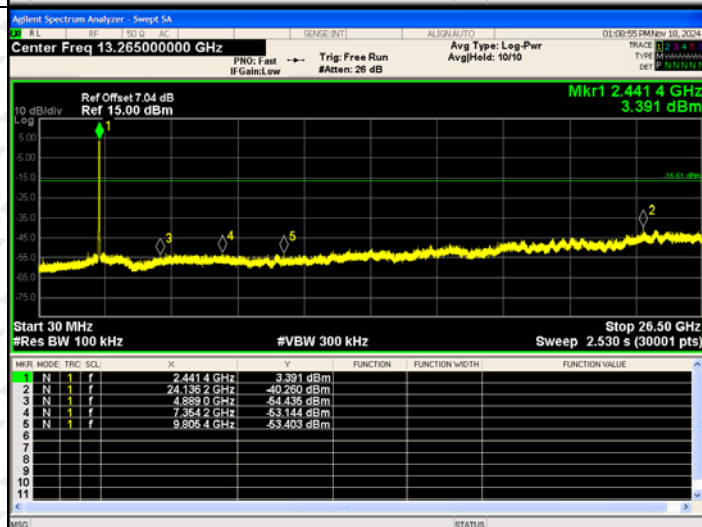

802.11 n(HT20)/HCH

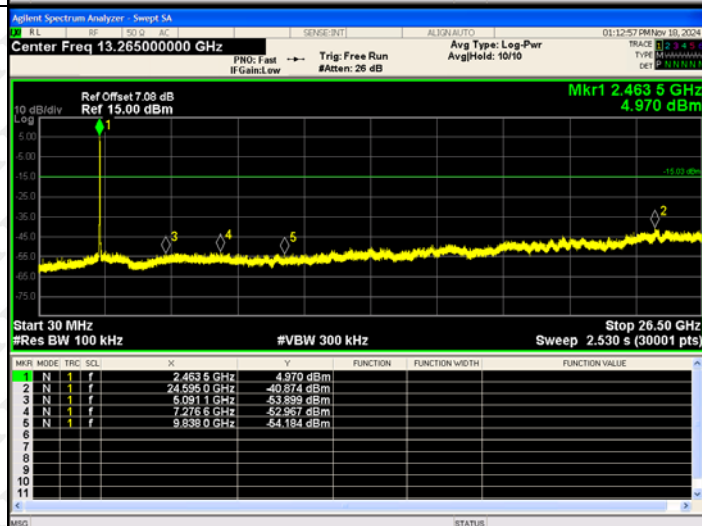

802.11n(HT40)/LCH	<table><thead><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.4247 GHz</td><td>0.890 dBm</td></tr><tr><td>2</td><td>N</td><td>24.1653 GHz</td><td>-40.650 dBm</td></tr><tr><td>3</td><td>N</td><td>4.9814 GHz</td><td>-52.130 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1645 GHz</td><td>-51.117 dBm</td></tr><tr><td>5</td><td>N</td><td>9.5451 GHz</td><td>-53.286 dBm</td></tr></tbody></table>	Mkr	Mode	Freq	Power	1	N	2.4247 GHz	0.890 dBm	2	N	24.1653 GHz	-40.650 dBm	3	N	4.9814 GHz	-52.130 dBm	4	N	7.1645 GHz	-51.117 dBm	5	N	9.5451 GHz	-53.286 dBm
Mkr	Mode	Freq	Power																						
1	N	2.4247 GHz	0.890 dBm																						
2	N	24.1653 GHz	-40.650 dBm																						
3	N	4.9814 GHz	-52.130 dBm																						
4	N	7.1645 GHz	-51.117 dBm																						
5	N	9.5451 GHz	-53.286 dBm																						
802.11 n(HT40)/MCH	<table><thead><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.4397 GHz</td><td>1.630 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6630 GHz</td><td>-40.163 dBm</td></tr><tr><td>3</td><td>N</td><td>4.8440 GHz</td><td>-53.204 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1390 GHz</td><td>-53.232 dBm</td></tr><tr><td>5</td><td>N</td><td>9.5777 GHz</td><td>-51.791 dBm</td></tr></tbody></table>	Mkr	Mode	Freq	Power	1	N	2.4397 GHz	1.630 dBm	2	N	24.6630 GHz	-40.163 dBm	3	N	4.8440 GHz	-53.204 dBm	4	N	7.1390 GHz	-53.232 dBm	5	N	9.5777 GHz	-51.791 dBm
Mkr	Mode	Freq	Power																						
1	N	2.4397 GHz	1.630 dBm																						
2	N	24.6630 GHz	-40.163 dBm																						
3	N	4.8440 GHz	-53.204 dBm																						
4	N	7.1390 GHz	-53.232 dBm																						
5	N	9.5777 GHz	-51.791 dBm																						
802.11 n(HT40)/HCH	<table><thead><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>2.4608 GHz</td><td>1.930 dBm</td></tr><tr><td>2</td><td>N</td><td>2.5005 GHz</td><td>-40.398 dBm</td></tr><tr><td>3</td><td>N</td><td>6.0846 GHz</td><td>-53.585 dBm</td></tr><tr><td>4</td><td>N</td><td>7.4999 GHz</td><td>-53.389 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6721 GHz</td><td>-53.971 dBm</td></tr></tbody></table>	Mkr	Mode	Freq	Power	1	N	2.4608 GHz	1.930 dBm	2	N	2.5005 GHz	-40.398 dBm	3	N	6.0846 GHz	-53.585 dBm	4	N	7.4999 GHz	-53.389 dBm	5	N	9.6721 GHz	-53.971 dBm
Mkr	Mode	Freq	Power																						
1	N	2.4608 GHz	1.930 dBm																						
2	N	2.5005 GHz	-40.398 dBm																						
3	N	6.0846 GHz	-53.585 dBm																						
4	N	7.4999 GHz	-53.389 dBm																						
5	N	9.6721 GHz	-53.971 dBm																						

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	22.703	30	PASS
	MCH	24.247	30	PASS
	HCH	25.006	30	PASS
802.11g	LCH	25.968	30	PASS
	MCH	26.337	30	PASS
	HCH	26.839	30	PASS
802.11n(HT20)	LCH	24.678	30	PASS
	MCH	24.813	30	PASS
	HCH	25.16	30	PASS
802.11n(HT40)	LCH	24.621	30	PASS
	MCH	25.079	30	PASS
	HCH	25.14	30	PASS

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

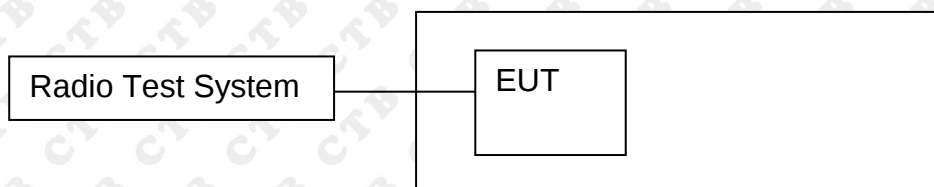

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS




10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.744	500	PASS
	MCH	9.687	500	PASS
	HCH	9.734	500	PASS
802.11g	LCH	16.47	500	PASS
	MCH	16.501	500	PASS
	HCH	16.463	500	PASS
802.11n(HT20)	LCH	17.742	500	PASS
	MCH	17.73	500	PASS
	HCH	17.707	500	PASS
802.11n(HT40)	LCH	36.364	500	PASS
	MCH	36.367	500	PASS
	HCH	35.961	500	PASS

Test Graph:

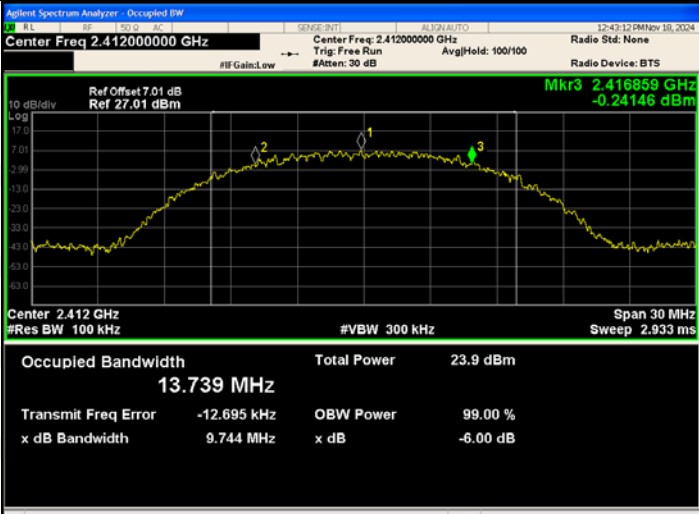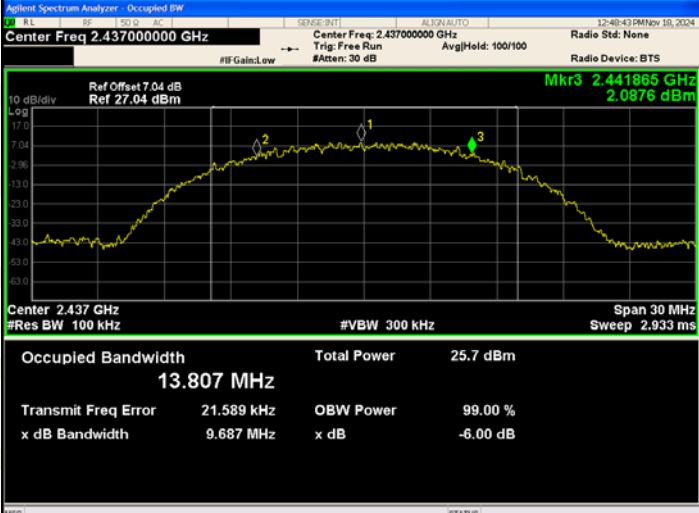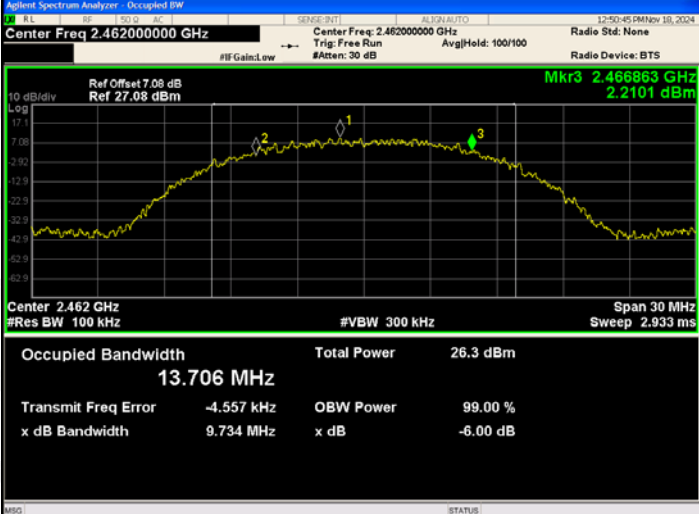
Graphs	
802.11b /LCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.416859 GHz -0.24146 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 13.739 MHz Total Power 23.9 dBm Transmit Freq Error -12.695 kHz OBW Power 99.00 % x dB Bandwidth 9.744 MHz x dB -6.00 dB
802.11b /MCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.441865 GHz 2.0876 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 13.807 MHz Total Power 25.7 dBm Transmit Freq Error 21.589 kHz OBW Power 99.00 % x dB Bandwidth 9.687 MHz x dB -6.00 dB
802.11b/HCH	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.466863 GHz 2.2101 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 13.706 MHz Total Power 26.3 dBm Transmit Freq Error -4.557 kHz OBW Power 99.00 % x dB Bandwidth 9.734 MHz x dB -6.00 dB

802.11n(HT20)/LC H	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.412000000 GHz Ref Offset: 7.01 dB Ref: 27.01 dBm Mkr3: 2.420865 GHz -2.0379 dBm Center: 2.412 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.614 MHz Total Power: 23.8 dBm Transmit Freq Error: -5.885 kHz OBW Power: 99.00 % x dB Bandwidth: 17.74 MHz x dB: -6.00 dB
802.11n(HT20)/MC H	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz Ref Offset: 7.04 dB Ref: 27.04 dBm Mkr3: 2.445867 GHz -2.3412 dBm Center: 2.437 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.588 MHz Total Power: 24.2 dBm Transmit Freq Error: 1.535 kHz OBW Power: 99.00 % x dB Bandwidth: 17.73 MHz x dB: -6.00 dB
802.11n(HT20)/HC H	Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz Ref Offset: 7.06 dB Ref: 27.06 dBm Mkr3: 2.470849 GHz -0.98676 dBm Center: 2.462 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 30 MHz Sweep: 2.933 ms Occupied Bandwidth: 17.589 MHz Total Power: 24.4 dBm Transmit Freq Error: -4.616 kHz OBW Power: 99.00 % x dB Bandwidth: 17.71 MHz x dB: -6.00 dB

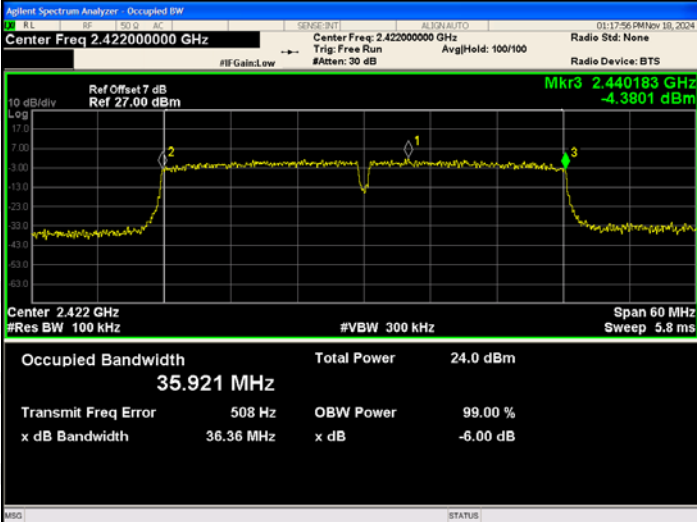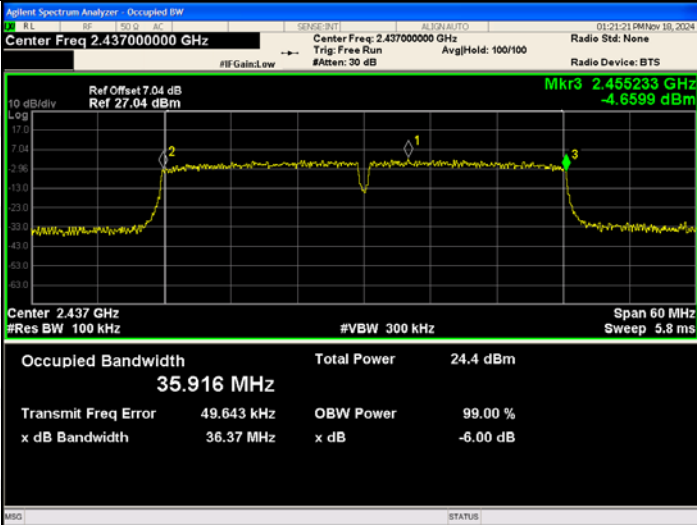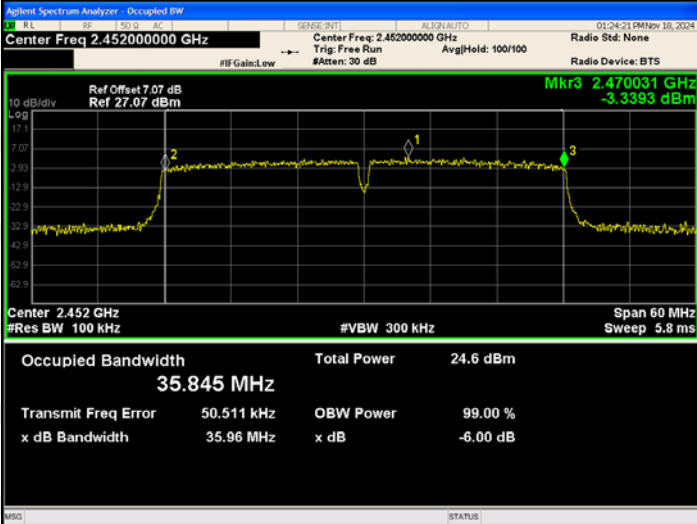802.11n(HT40)/LC H		
802.11n(HT40)/MC H		
802.11n(HT40)/HC H		

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

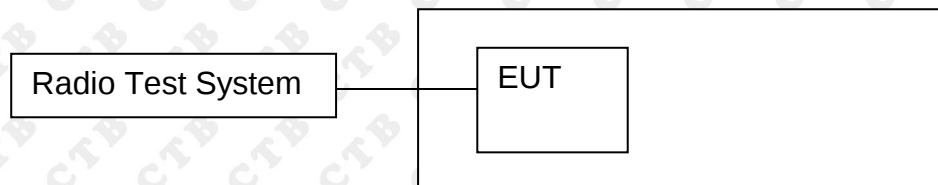

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-5.932	8	PASS
	MCH	-4.181	8	PASS
	HCH	-3.371	8	PASS
802.11g	LCH	-7.447	8	PASS
	MCH	-7.201	8	PASS
	HCH	-6.715	8	PASS
802.11n(H T20)	LCH	-8.964	8	PASS
	MCH	-9.225	8	PASS
	HCH	-8.501	8	PASS
802.11n(H T40)	LCH	-10.868	8	PASS
	MCH	-10.595	8	PASS
	HCH	-10.397	8	PASS


Test Graph

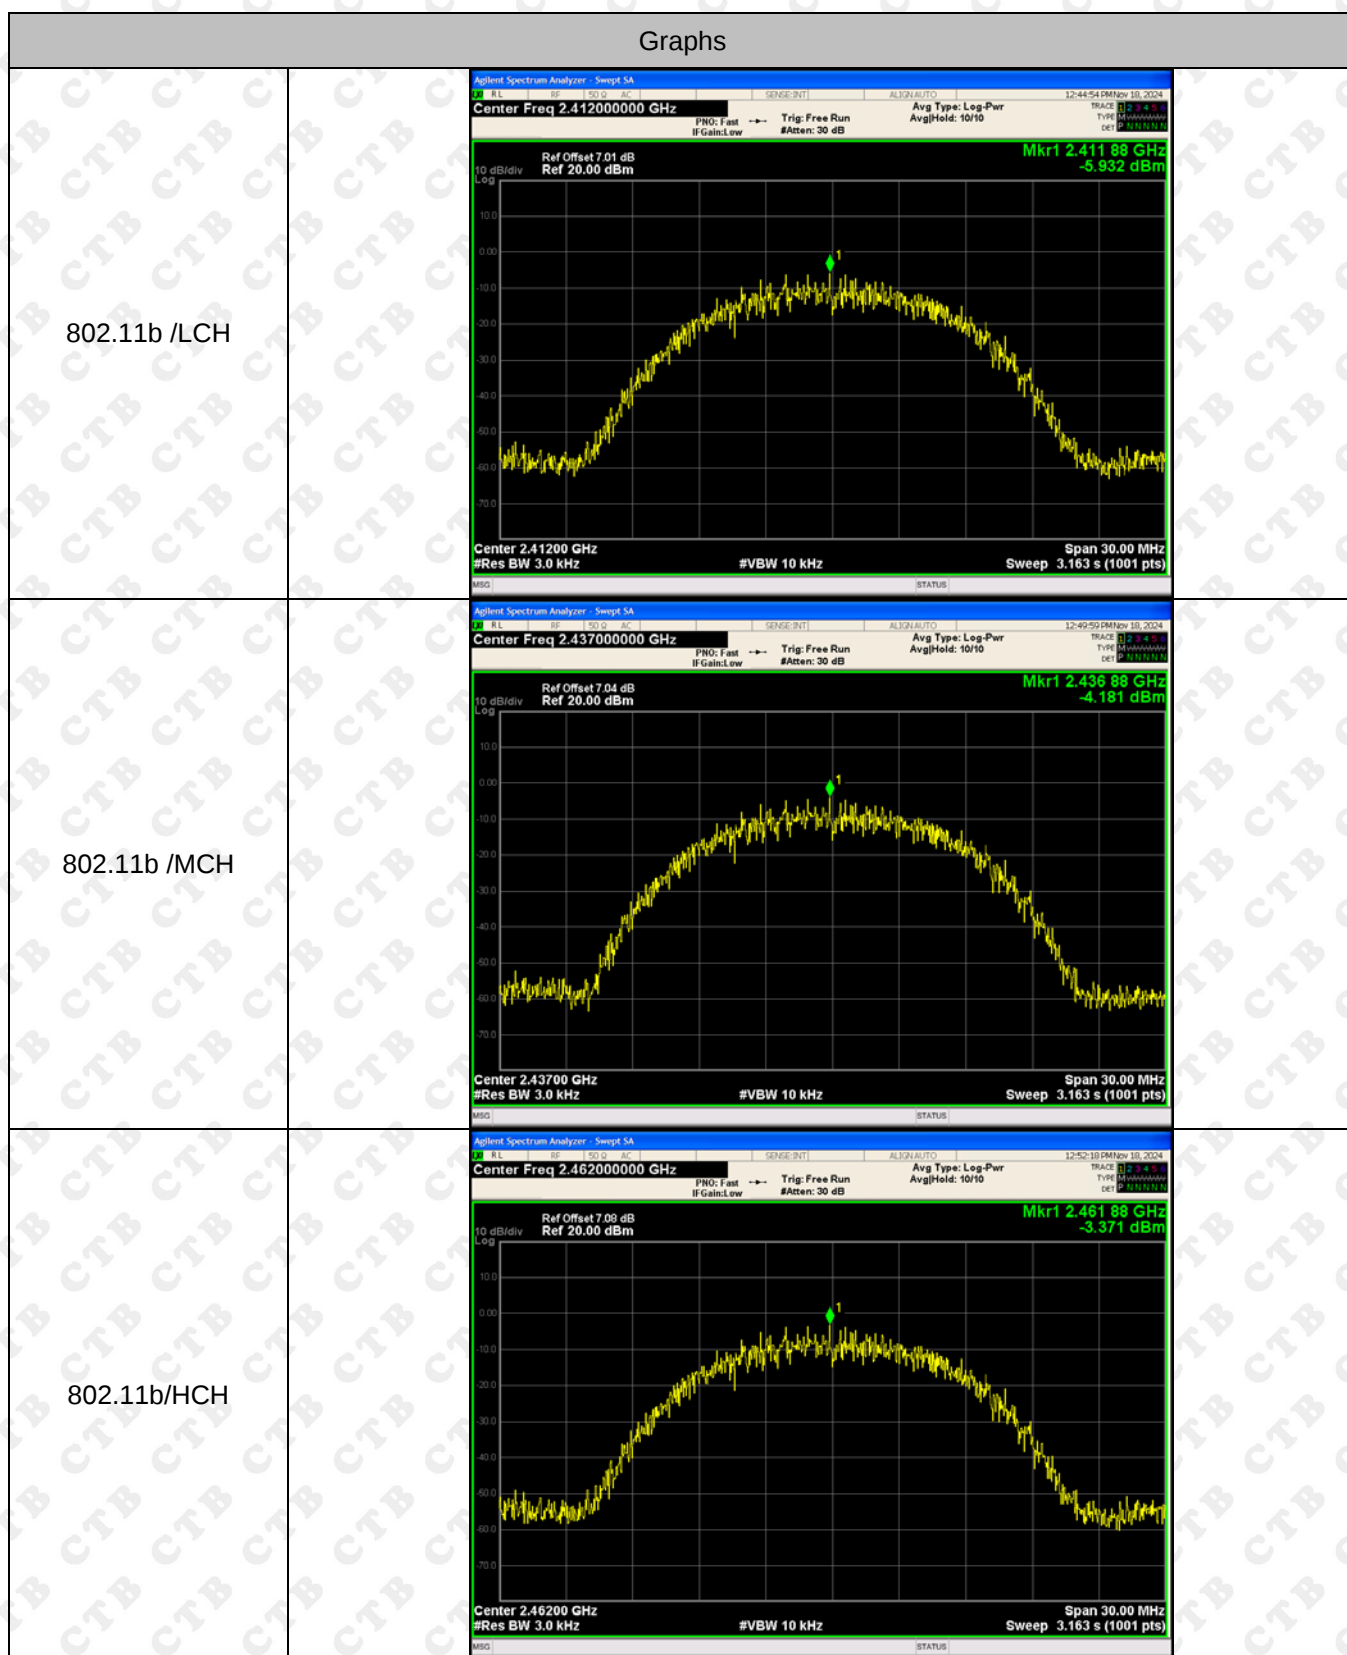


802.11g/LCH



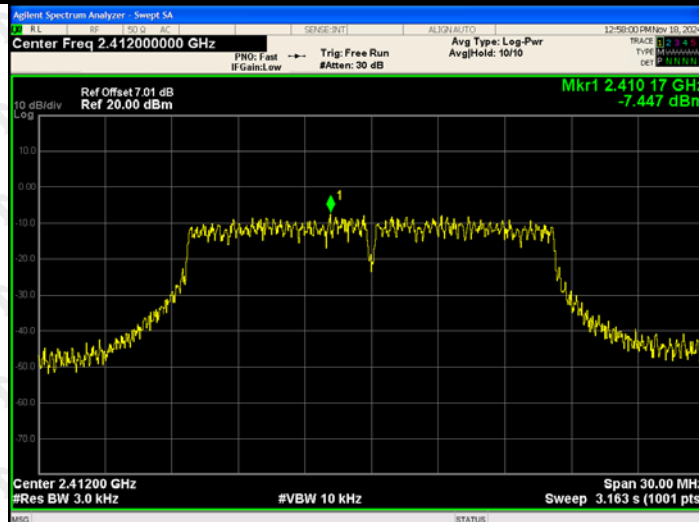





802.11g/MCH

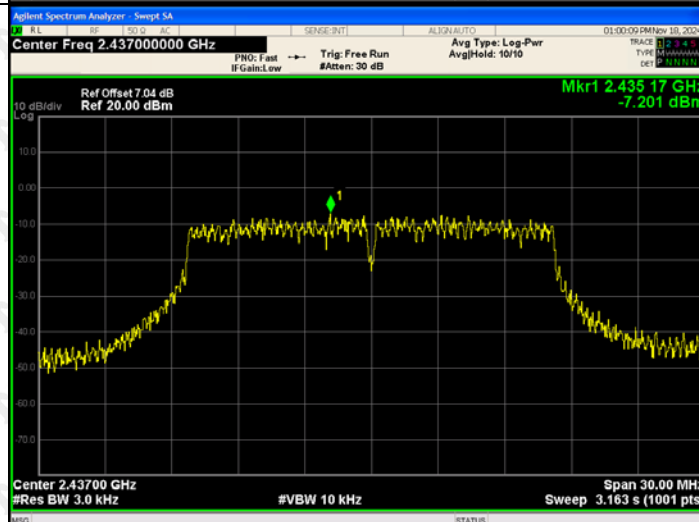

802.11g/HCH

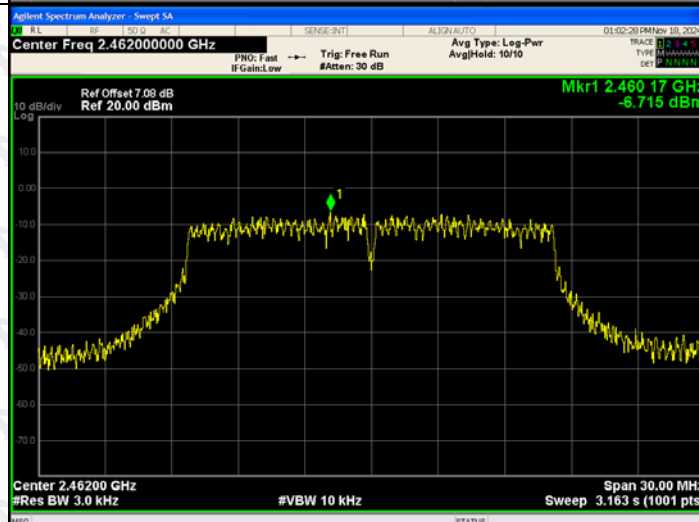

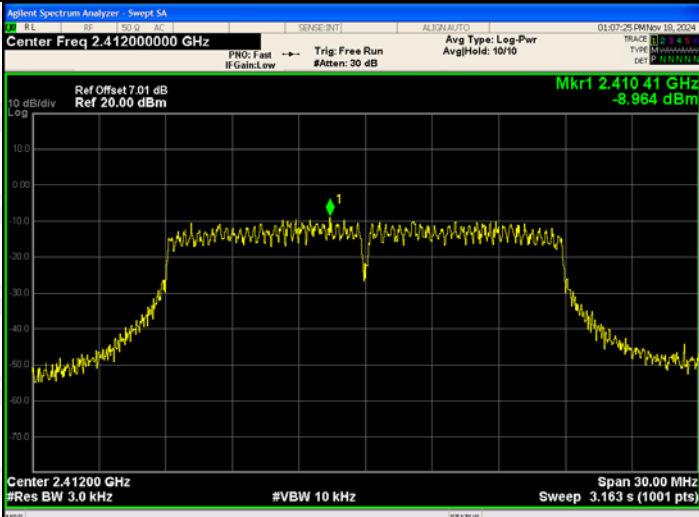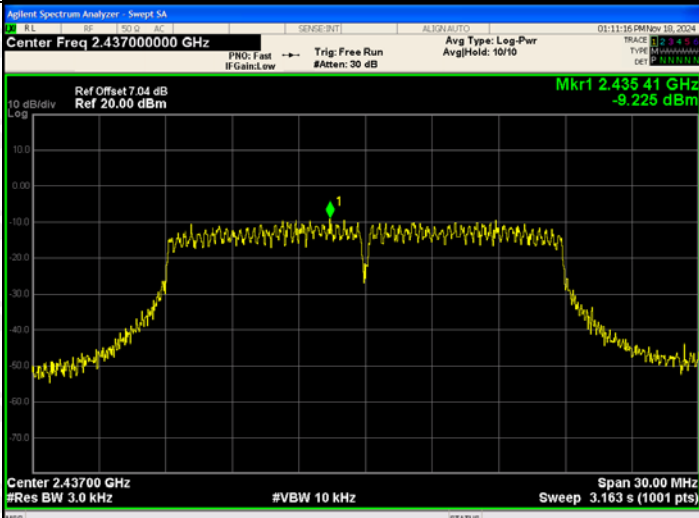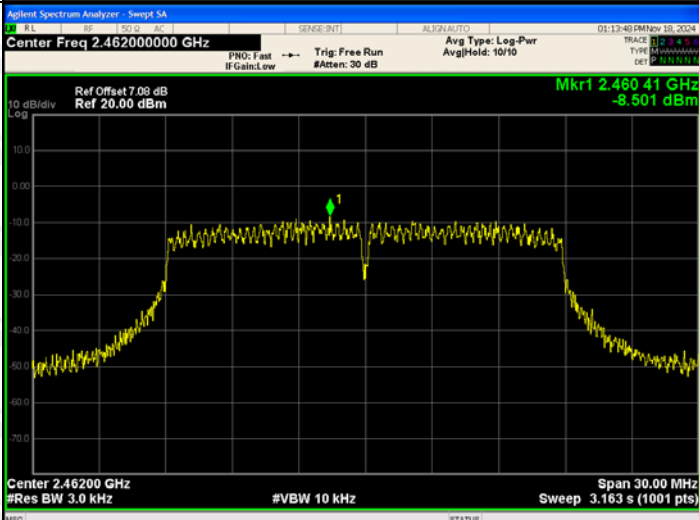802.11n(HT20)/LCH	
802.11n(HT20)/MCH	
802.11n(HT20)/HCH	

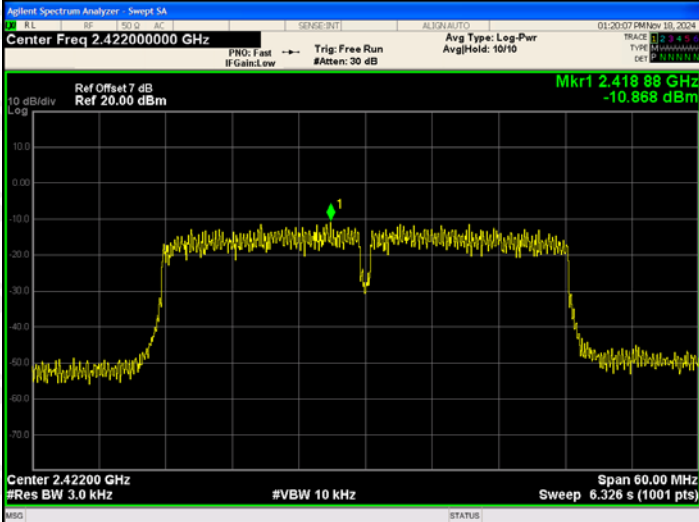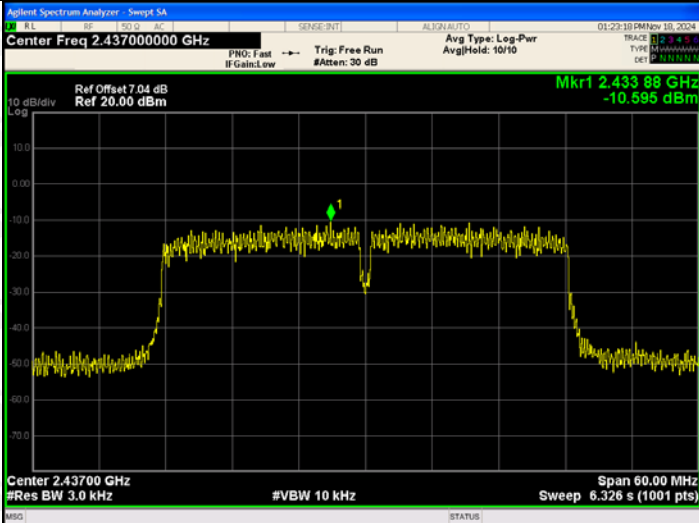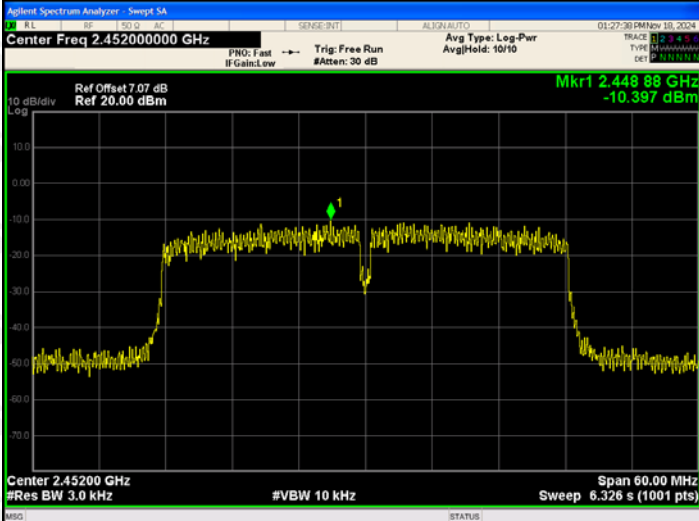802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.41888 GHz -10.868 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.43388 GHz -10.595 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.44888 GHz -10.397 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:


The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is 3.7dBi.

13. EUT TEST SETUP PHOTOGRAPHS


XLY-M1

Radiated Emissions

Below 1G

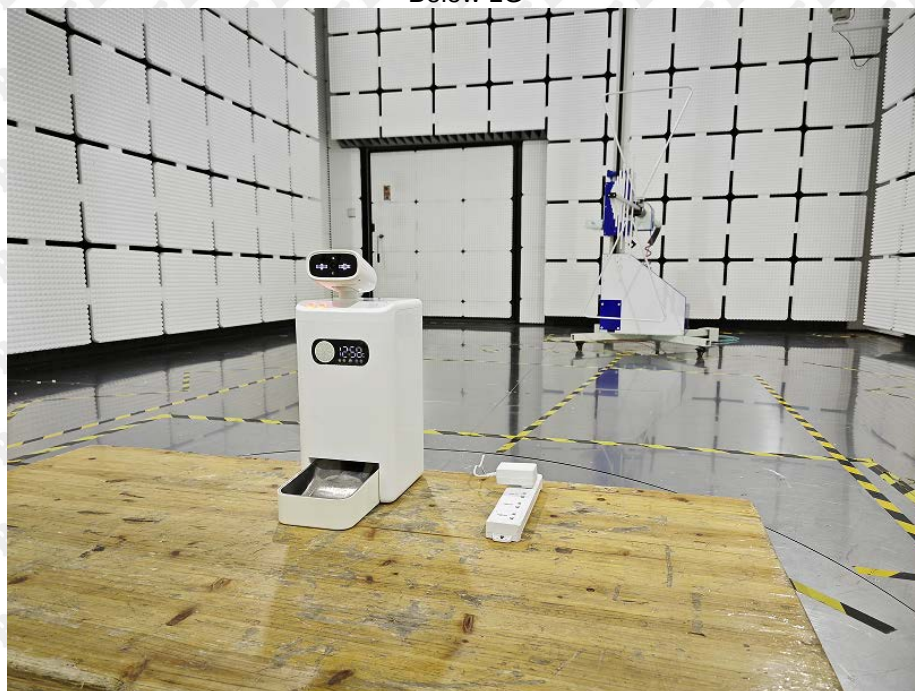

Above 1G

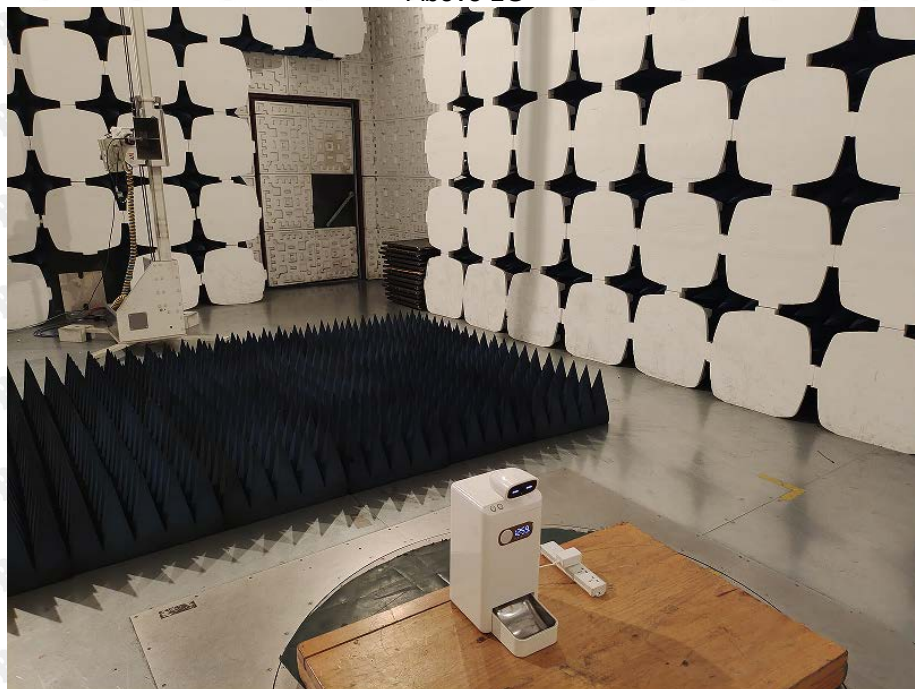


Conducted emission




XLY-M2

Radiated Emissions

Below 1G

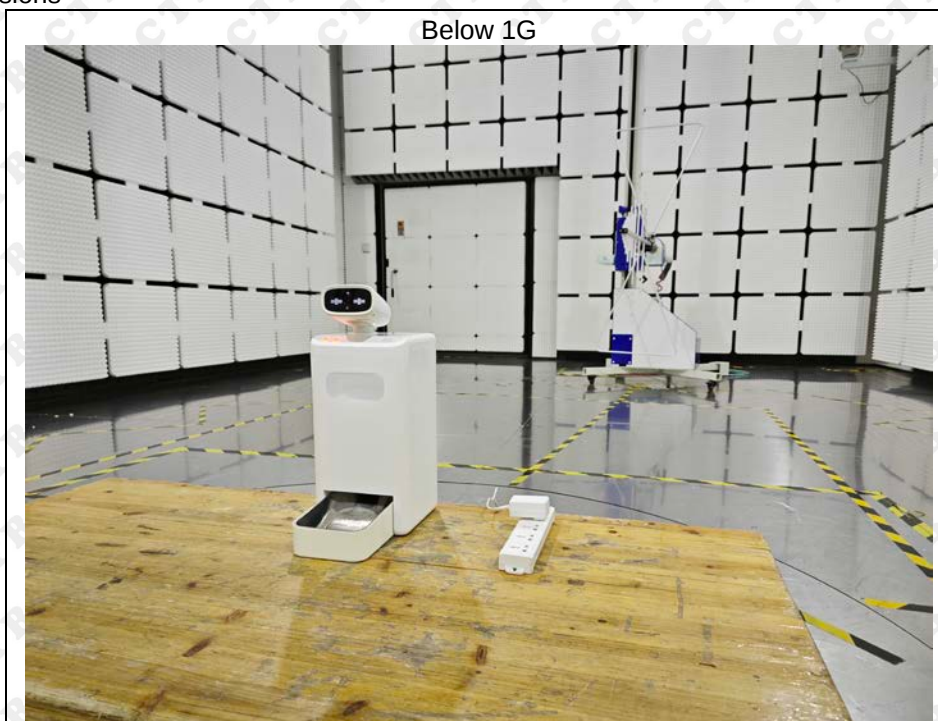

Above 1G

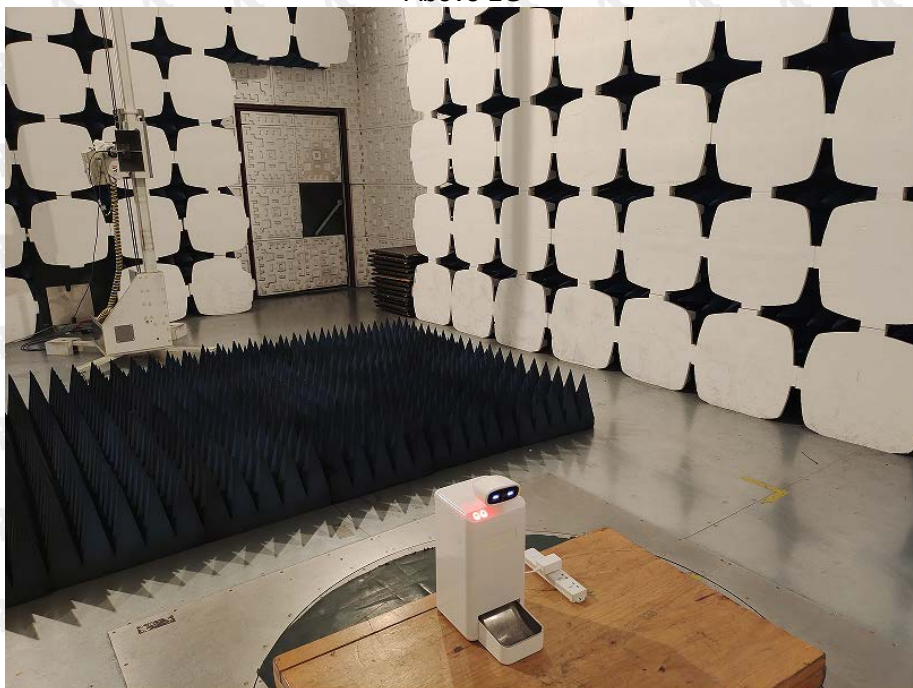

Conducted emission



***** END OF REPORT *****