



FCC ID:2A4OE-B-28

Product Name:	Creative Swan Style 3 in 1 Wireless Charger
Product Model No.:	B-28
Model Difference:	/
Transmitting mode:	Keep the EUT in continuously Creative Swan Style 3 in 1 Wireless Charger mode
Power supply:	Input: 9 V  3 A, 12 V  3 A Mobile Phone Output: 15W(Max) Earphone Output: 5W Watch Output: 0.5W-3W



Test Modes:	
Mode 1	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Phone: 15W)
Mode 2	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Phone: 10W)
Mode 3	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Phone: 7.5W)
Mode 4	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Phone: 5W)
Mode 5	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Earphone: Battery Status:≤1%)
Mode 6	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Earphone: Battery Status:50%)
Mode 7	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Earphone: Battery Status:≥98)
Mode 8	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Watch: Battery Status:≤1%)
Mode 9	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Watch: Battery Status:≤50%)
Mode 10	AC Adapter+Creative Swan Style 3 in 1 Wireless Charger mode (Watch: Battery Status:≤98%)
Mode 11	AC Adapter+ Phone (15W) + Earphone (Battery Status:≤1%)
Mode 12	AC Adapter+ Phone (15W) + Watch (Watch: Battery Status:≤1%)
Mode 13	AC Adapter+ Phone (15W) + Earphone (Battery Status:≤1%) + Watch (Watch: Battery Status:≤1%)
Note: All modes and coil were tested, only the worst-case was recorded in the report. Mode 13 is the worst mode.	

Item	Equipment	Mfr/Brand	Model/Type No.	Creative Swan Style 3 in 1 Wireless Charger power parameters	Note
E-1	Adapter	HUAWEI	HW-059200CHQ	N/A	AE
E-2	Wireless charger load	YBZ	EESON	5 W/ 7.5 W/ 10 W/ 15W	AE
E-3	Earphone	Apple Inc.	A2031	5W	AE
E-4	Apple watch	Apple Inc.	ultra 2	3W	AE



1 Measuring Standard

KDB 680106 D01 Wireless Power Transfer v04

2 Requirements

Requirements of section 3 of KDB 680106 D01	Yes/ No	Description
Mobile Device and Portable Device Configurations	Yes	Mobile Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range Mobile phone: 111-205KHz Earphone: 111-205KHz Watch: 300-350KHz
RF Exposure compliance may be ensured only for a minimum conditions at smaller distances can still be considered unlikely.separation distance that is greater than 20 cm, while use	Yes	The aggregate H-field and E-field strengths anywhere at or beyond 20 cm surrounding the device, and 20 cm away from the top surface.

Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
* =Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).



3 Test Setup

For mobile exposure conditions:

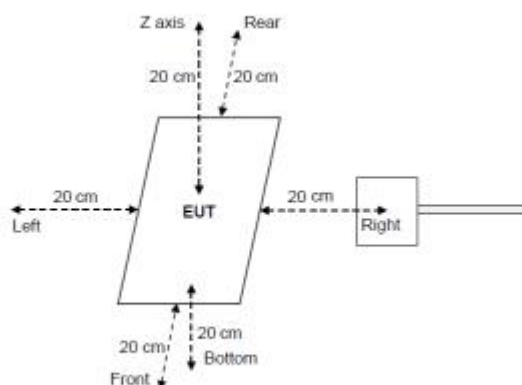

4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm from all sides and 20 cm from the top) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v04.

Remark: The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.

5 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	H-field	$\pm 0.7\text{dB}$
2	E-field	$\pm 1.06\text{dB}$

Decision Rule

☒ Uncertainty is not included

☐ Uncertainty is included



6 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	N-0231	Sep. 29, 2024	Sep. 28, 2025
Magnetic field probe 100cm2	Narda	ELT probe 100cm2	M0675	Sep. 29, 2024	Sep. 28, 2025
Isotropic Electric field probe	Narda	EP-601	611WX70332	Sep. 29, 2024	Sep. 28, 2025

7 Test Result

H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Frequency Range (MHz)	Unit	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	50%Limits (A/m)	Limits (A/m)	test result
0.115-0.205	A (uT)	0.26	0.23	0.35	0.28	0.33	0.25	0.815	1.63	PASS
	(A/m)	0.21	0.18	0.28	0.22	0.26	0.20			
0.115-0.205	A (uT)	0.25	0.20	0.29	0.31	0.20	0.26			
	(A/m)	0.20	0.16	0.23	0.25	0.16	0.21			
0.300-0.350	A (uT)	0.20	0.19	0.26	0.25	0.21	0.16			
	(A/m)	0.16	0.15	0.21	0.20	0.17	0.13			

The device could support transmission with ANT1, ANT2, ANT3 simultaneously.

$MPE1/LIMIT + MPE2/LIMIT + MPE3/LIMIT = 0.28/0.815 + 0.25/0.815 + 0.21/0.815 = 0.963 \leq 1$

Note: Calculation: $A/m = uT/1.25$



8 Test Set-up Photo

