




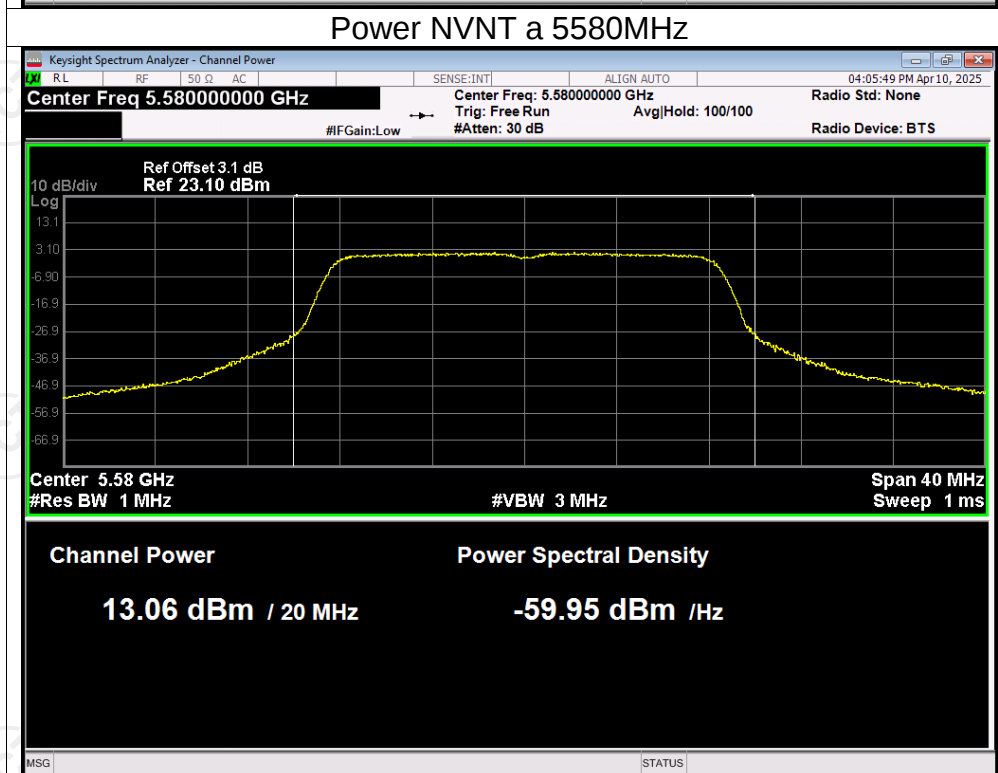
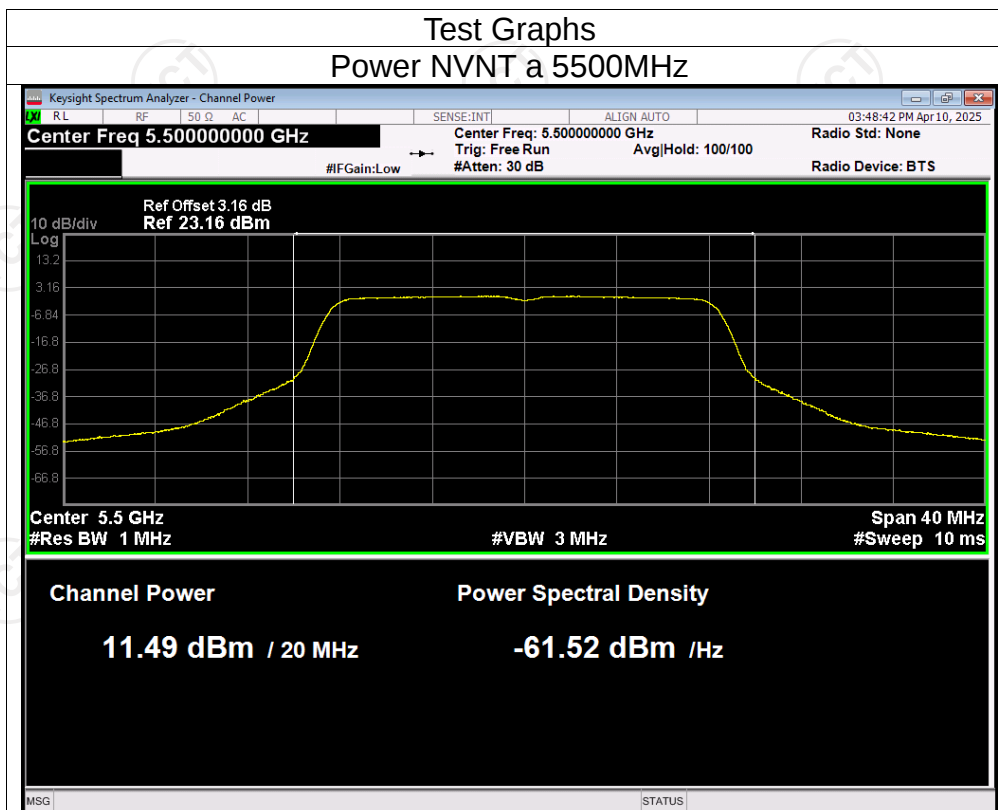
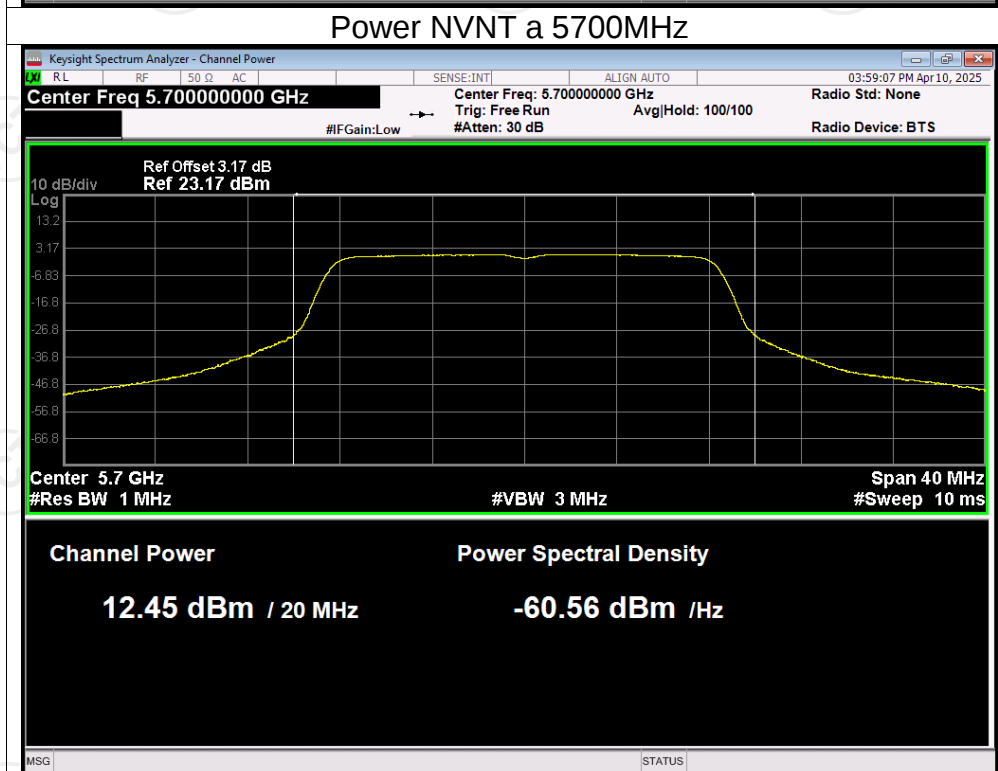
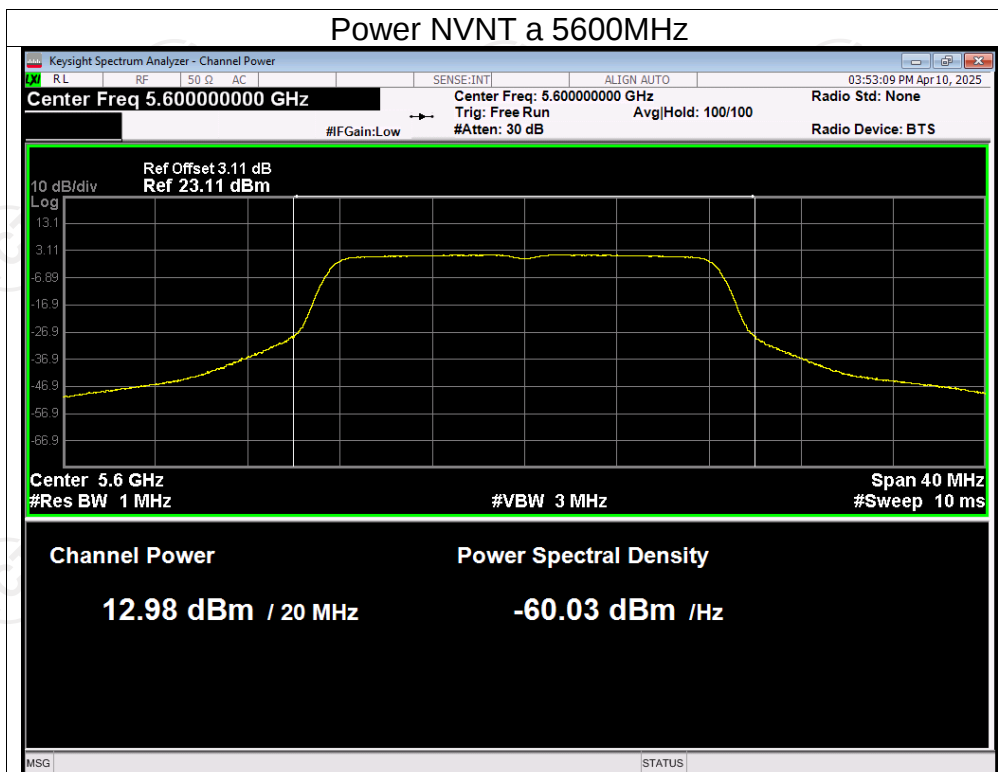
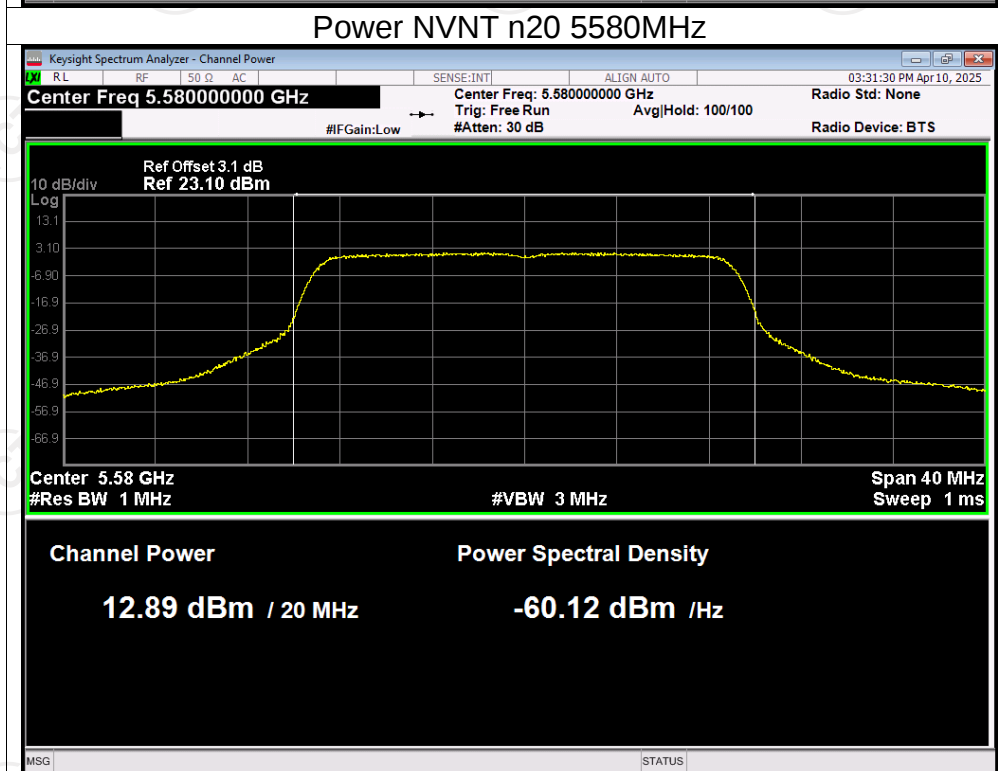


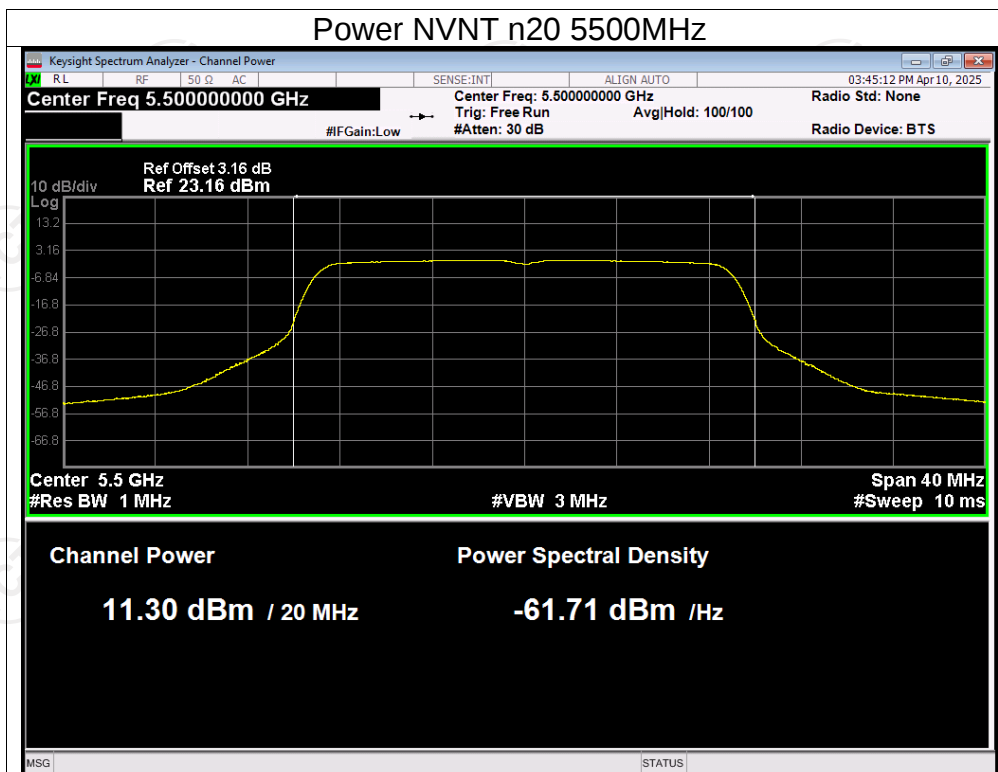


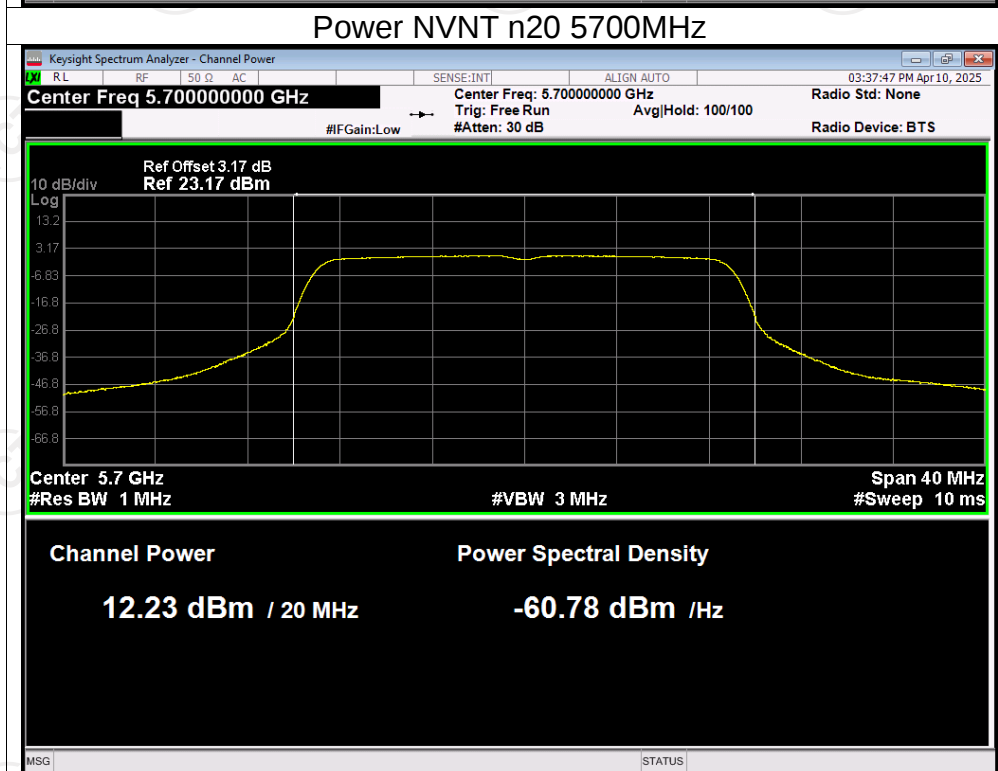

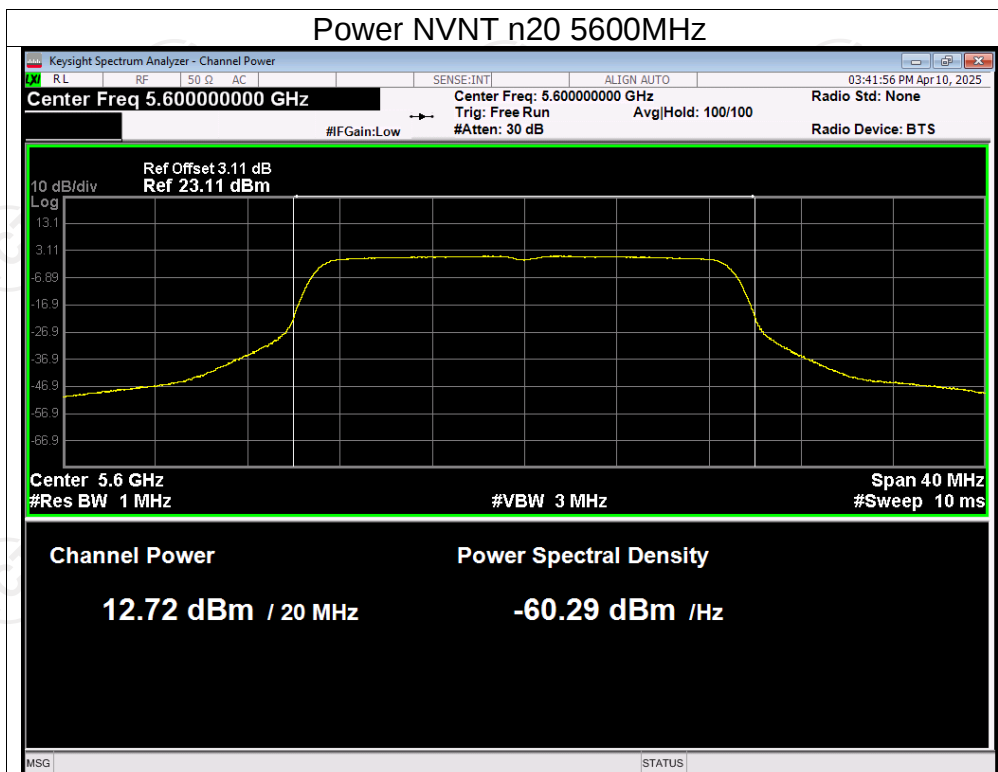



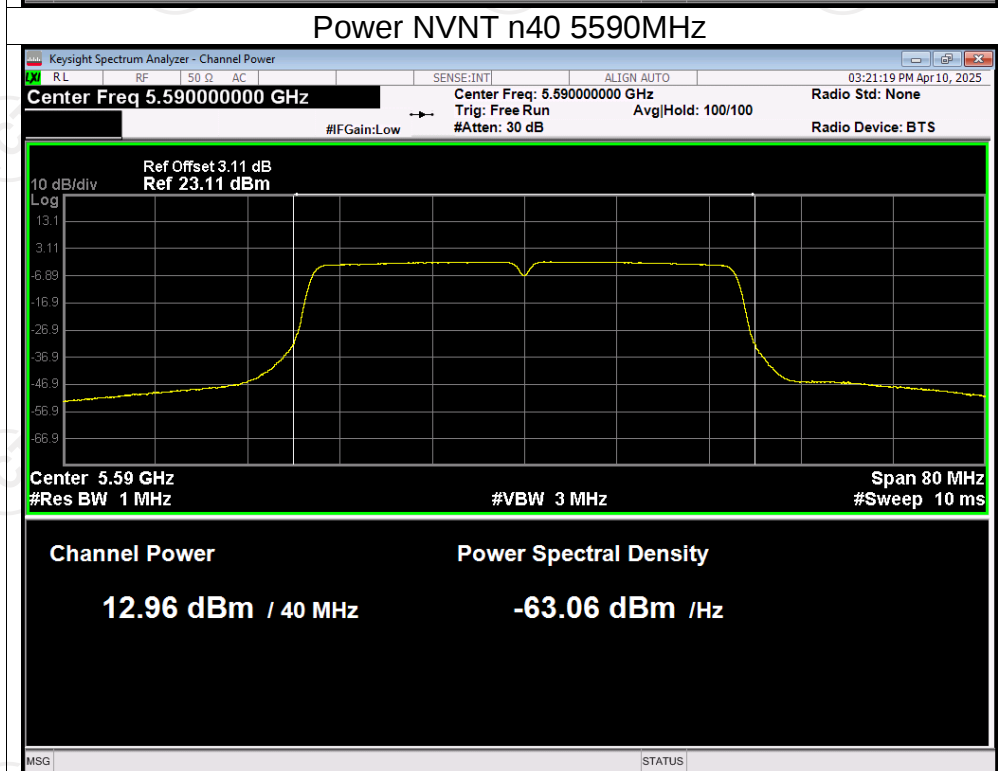



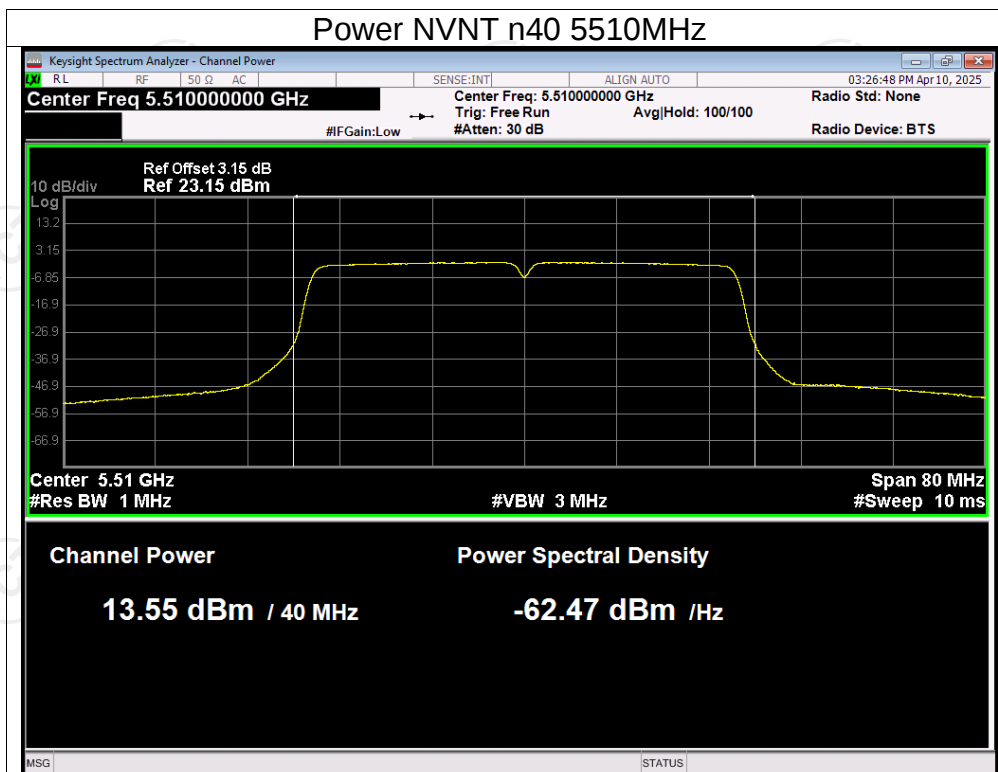



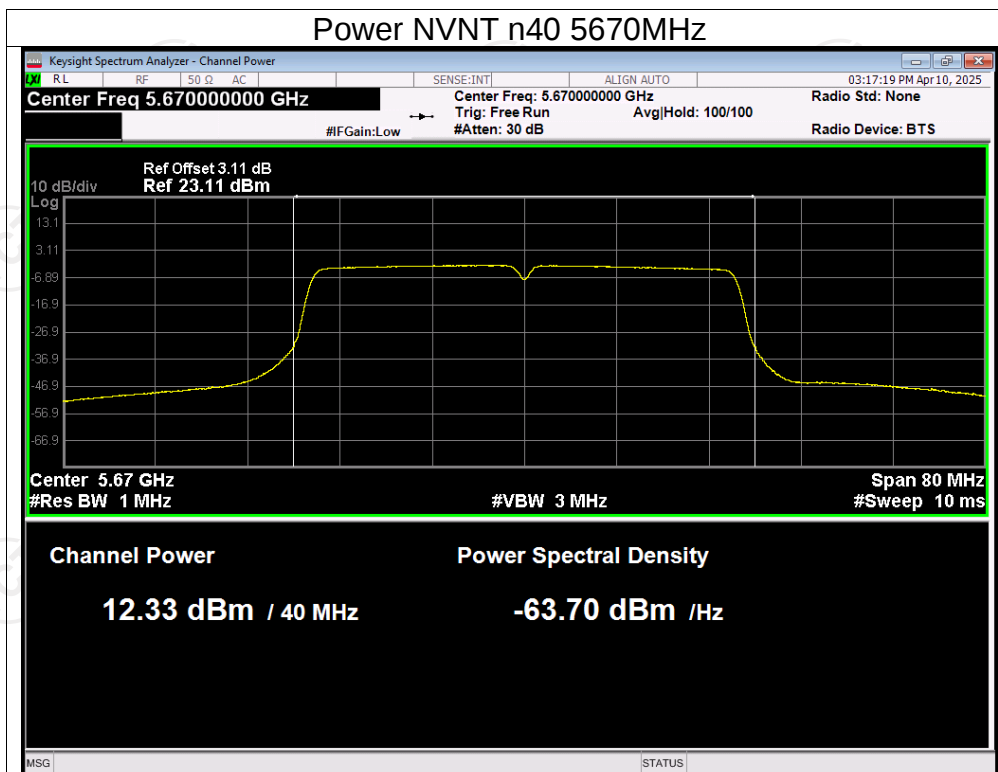



Test Graphs

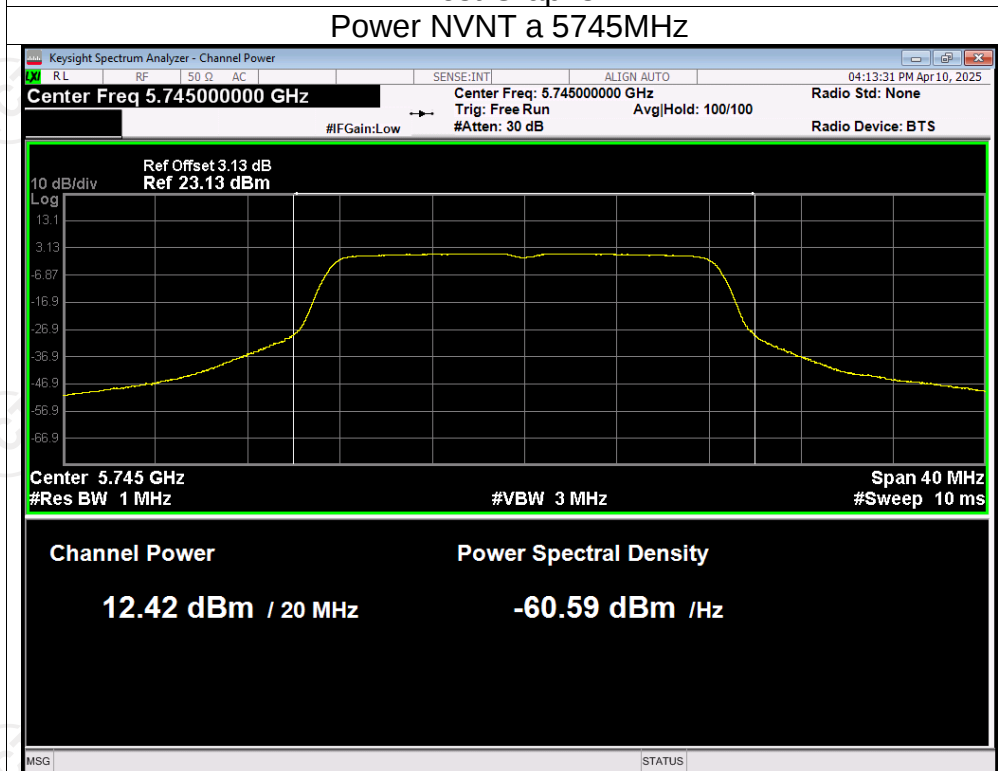

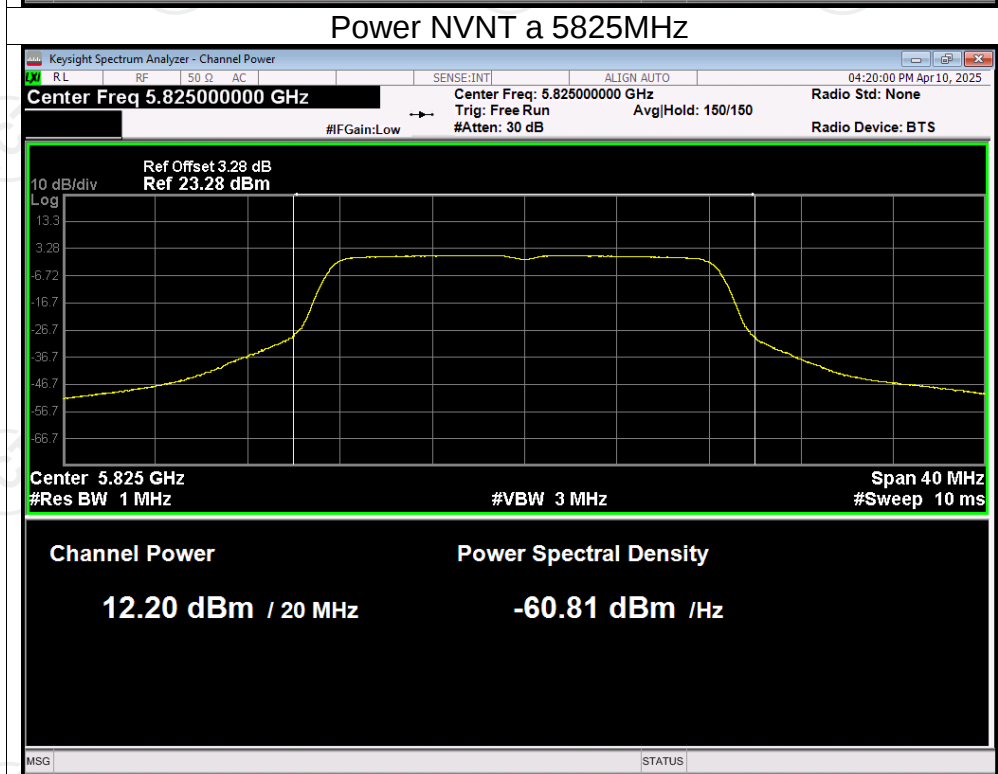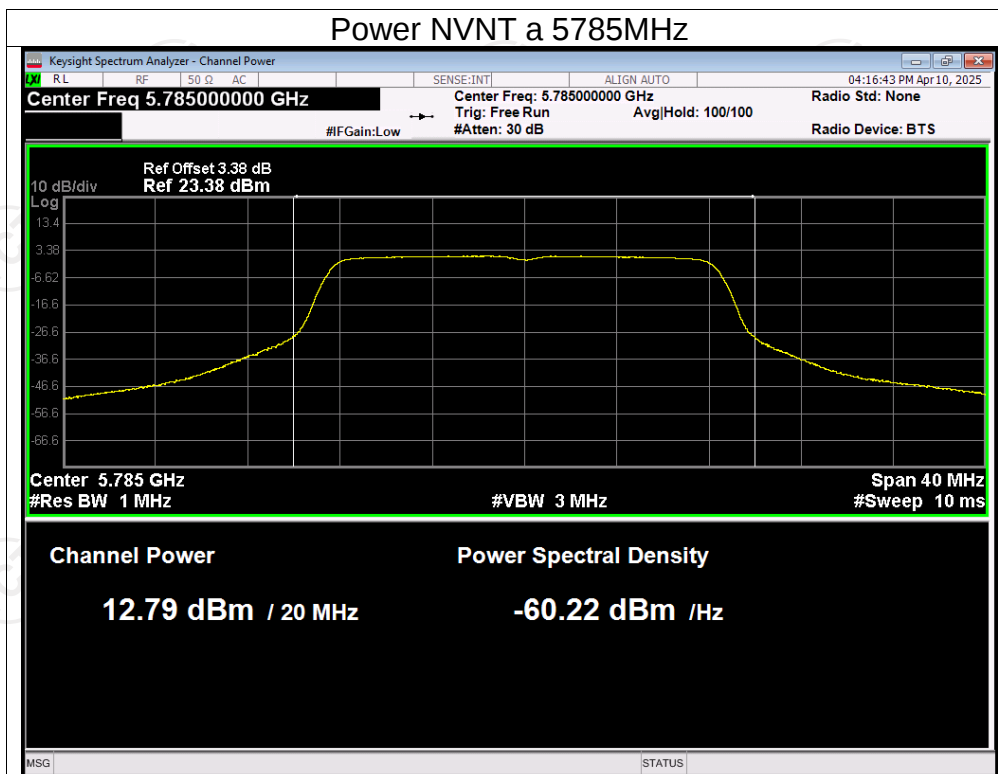

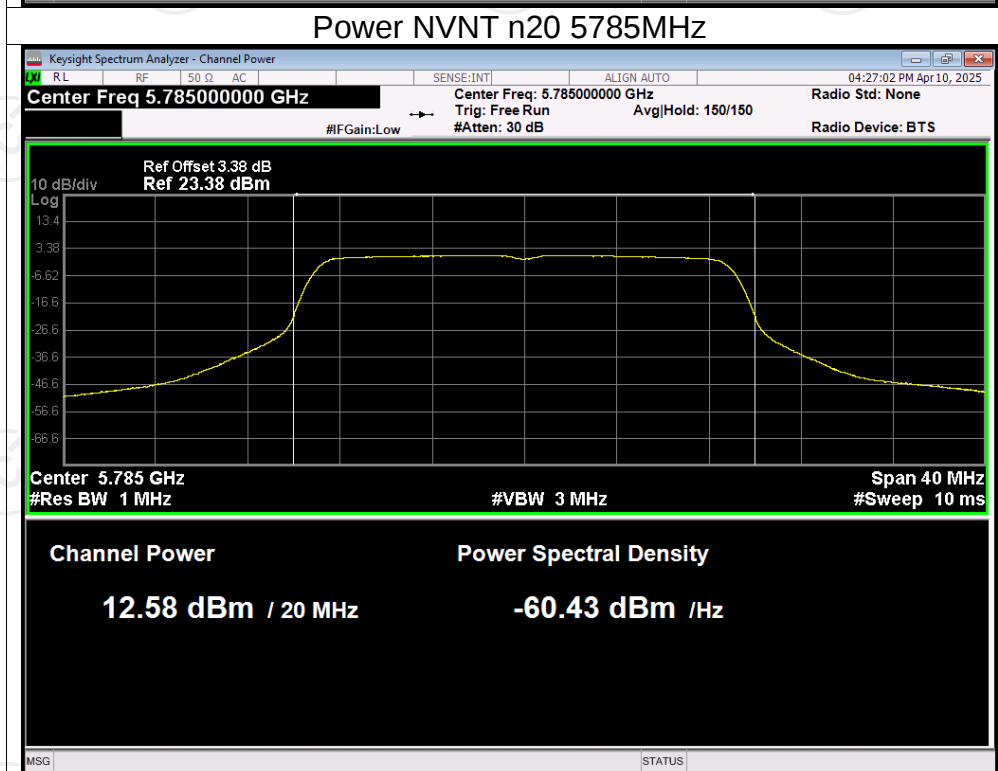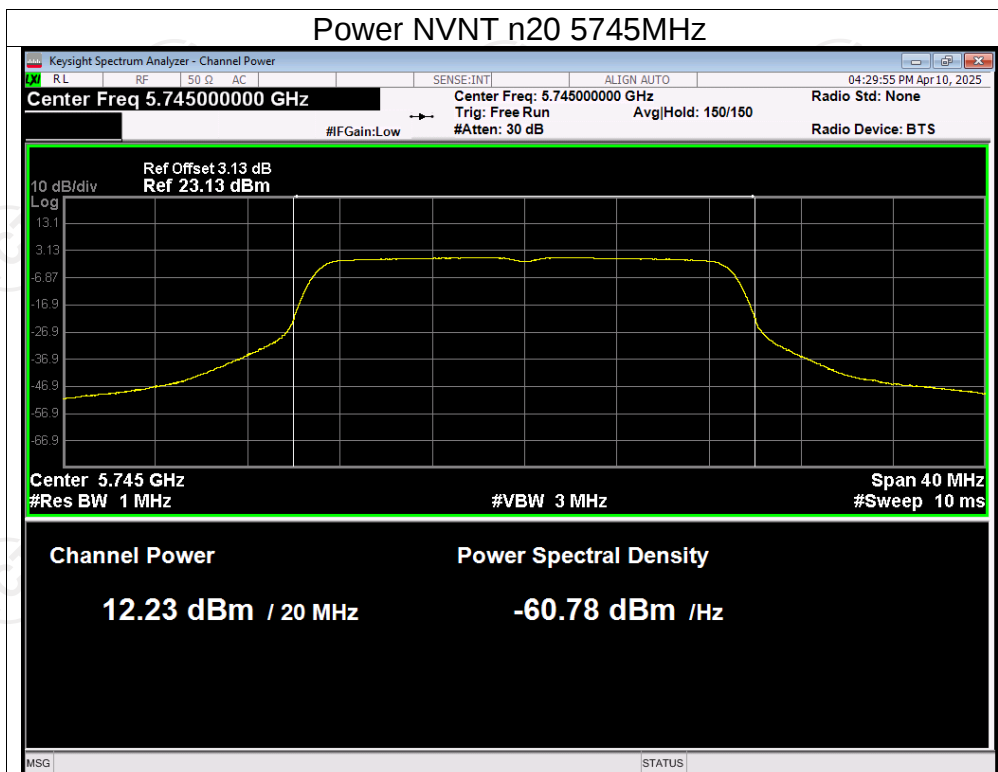

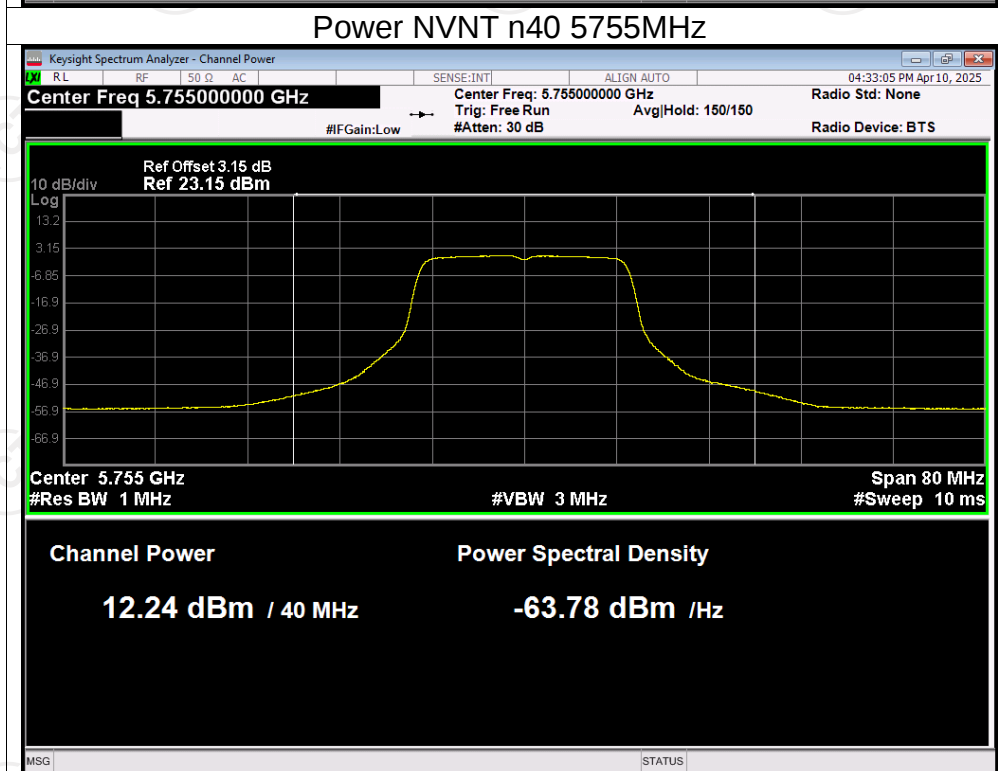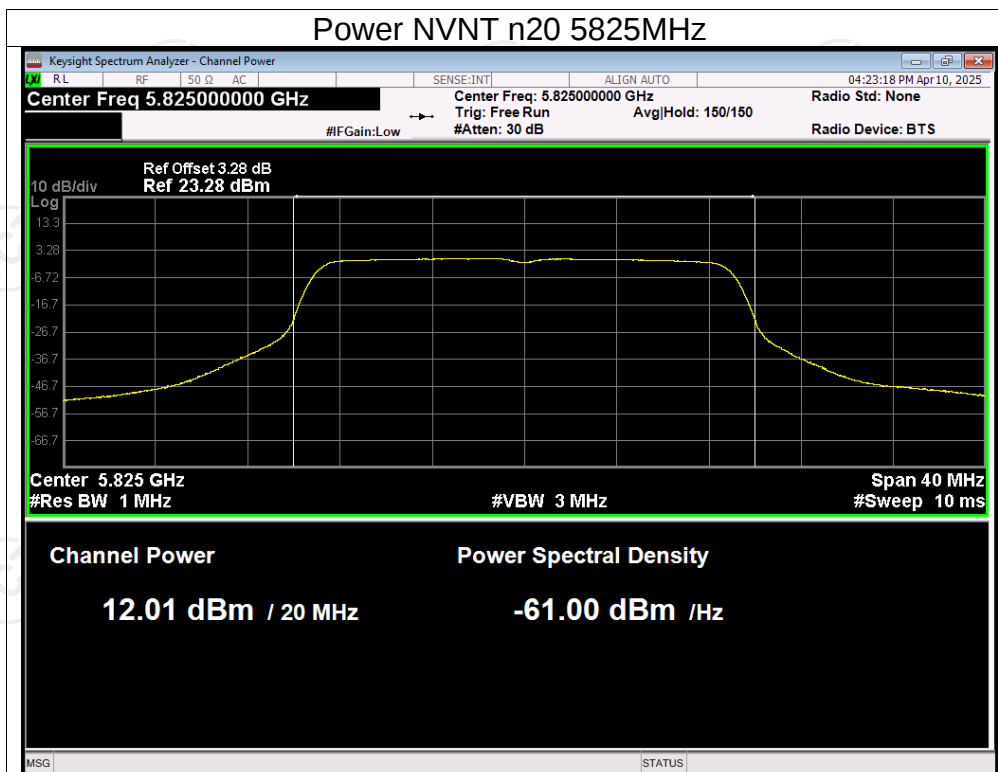

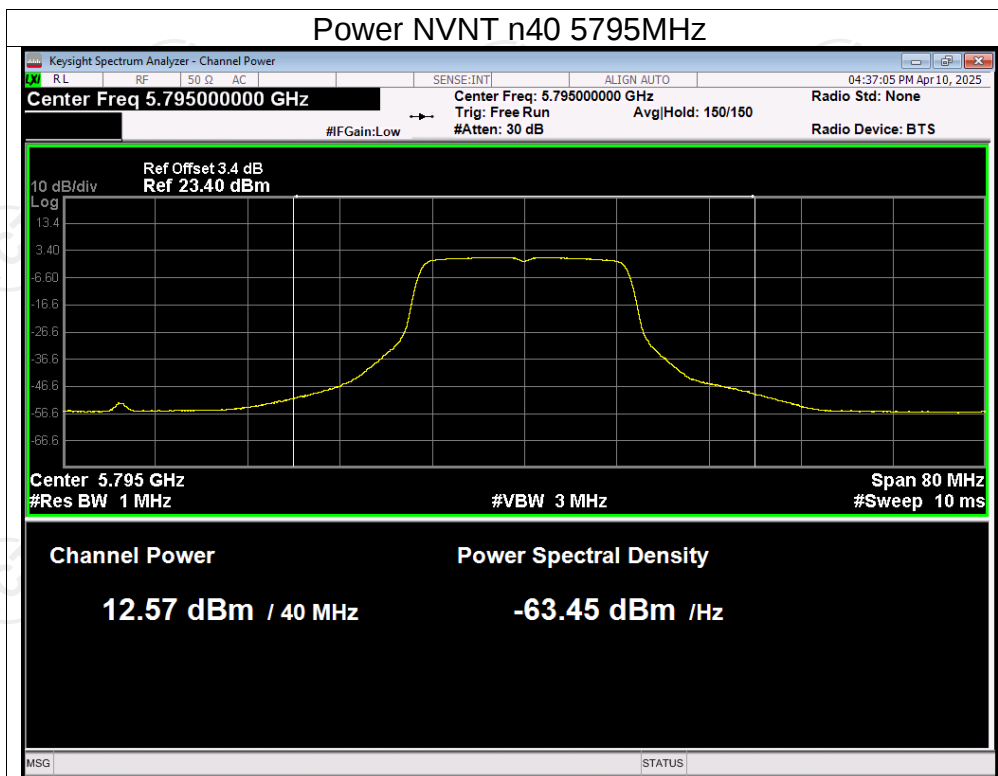


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	19.446	Pass
NVNT	a	5200	19.703	Pass
NVNT	a	5240	19.43	Pass
NVNT	n20	5180	20.397	Pass
NVNT	n20	5200	20.476	Pass
NVNT	n20	5240	20.611	Pass
NVNT	n40	5190	39.972	Pass
NVNT	n40	5230	40.201	Pass
NVNT	a	5260	19.513	Pass
NVNT	a	5300	19.442	Pass
NVNT	a	5320	19.605	Pass
NVNT	n20	5260	20.463	Pass
NVNT	n20	5300	20.749	Pass
NVNT	n20	5320	20.606	Pass
NVNT	n40	5270	40.123	Pass
NVNT	n40	5310	40.099	Pass
NVNT	a	5500	19.51	Pass
NVNT	a	5580	18.791	Pass
NVNT	a	5600	19.54	Pass
NVNT	a	5700	19.532	Pass
NVNT	n20	5500	20.657	Pass
NVNT	n20	5580	20.352	Pass
NVNT	n20	5600	20.536	Pass
NVNT	n20	5700	20.509	Pass
NVNT	n40	5510	40.141	Pass
NVNT	n40	5590	40.005	Pass
NVNT	n40	5670	40.193	Pass
NVNT	a	5745	16.334	Pass
NVNT	a	5785	16.34	Pass
NVNT	a	5825	16.343	Pass
NVNT	n20	5745	17.191	Pass
NVNT	n20	5785	16.928	Pass
NVNT	n20	5825	17.583	Pass
NVNT	n40	5755	17.565	Pass
NVNT	n40	5795	17.554	Pass



Test Graphs



-26dB Bandwidth NVNT a 5180MHz


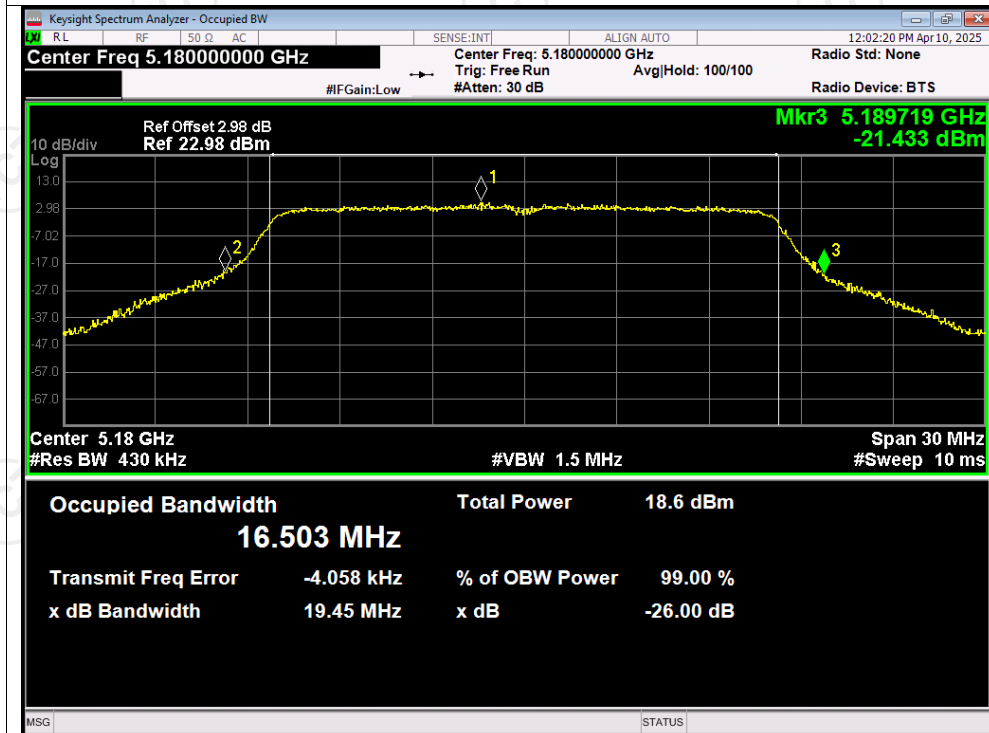


-26dB Bandwidth NVNT a 5200MHz

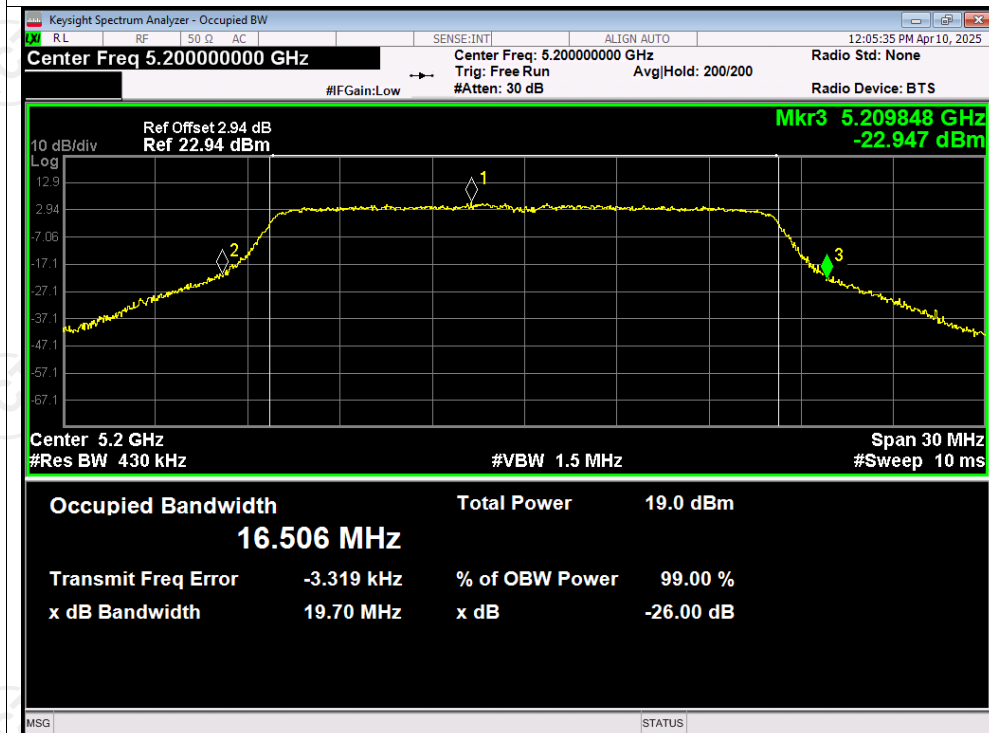

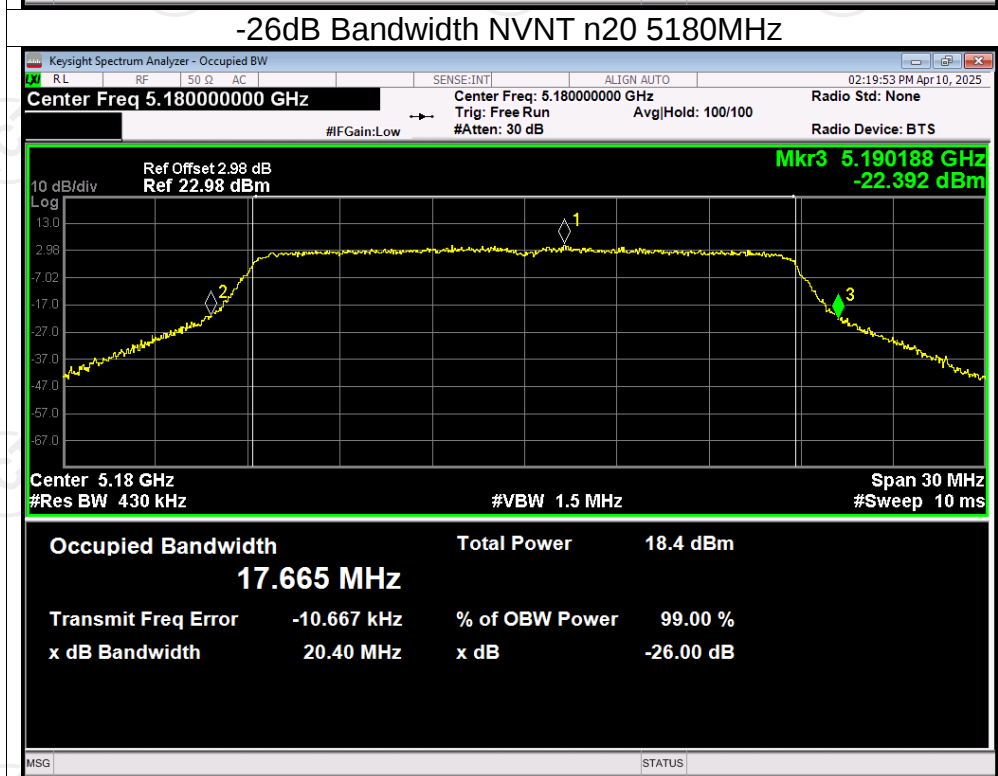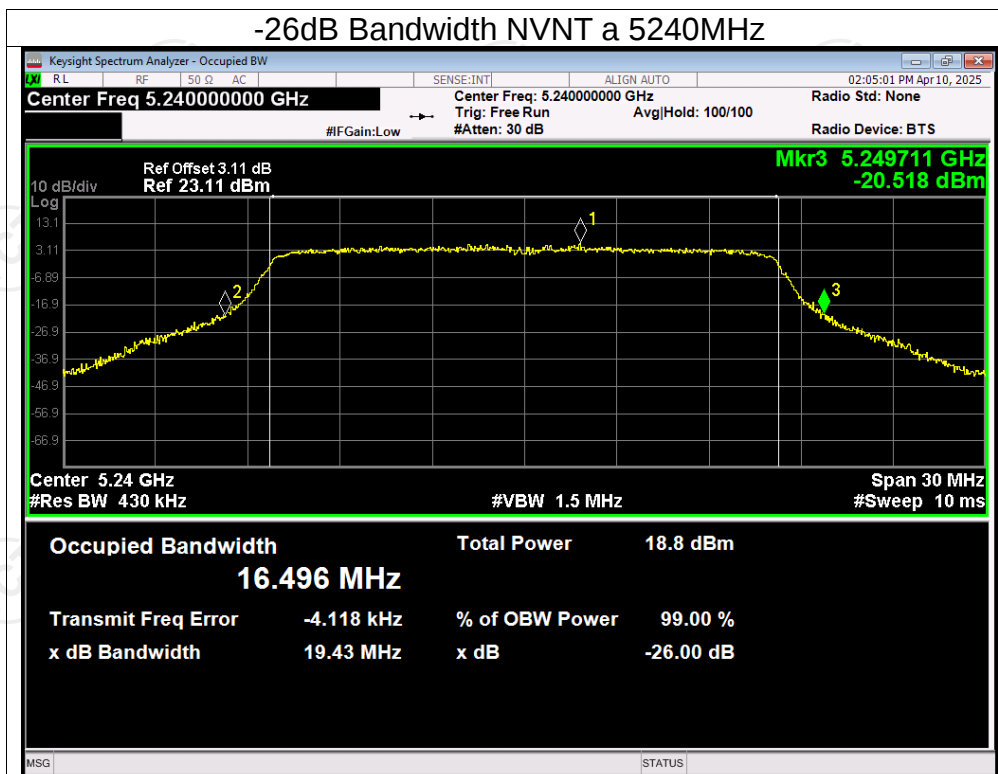


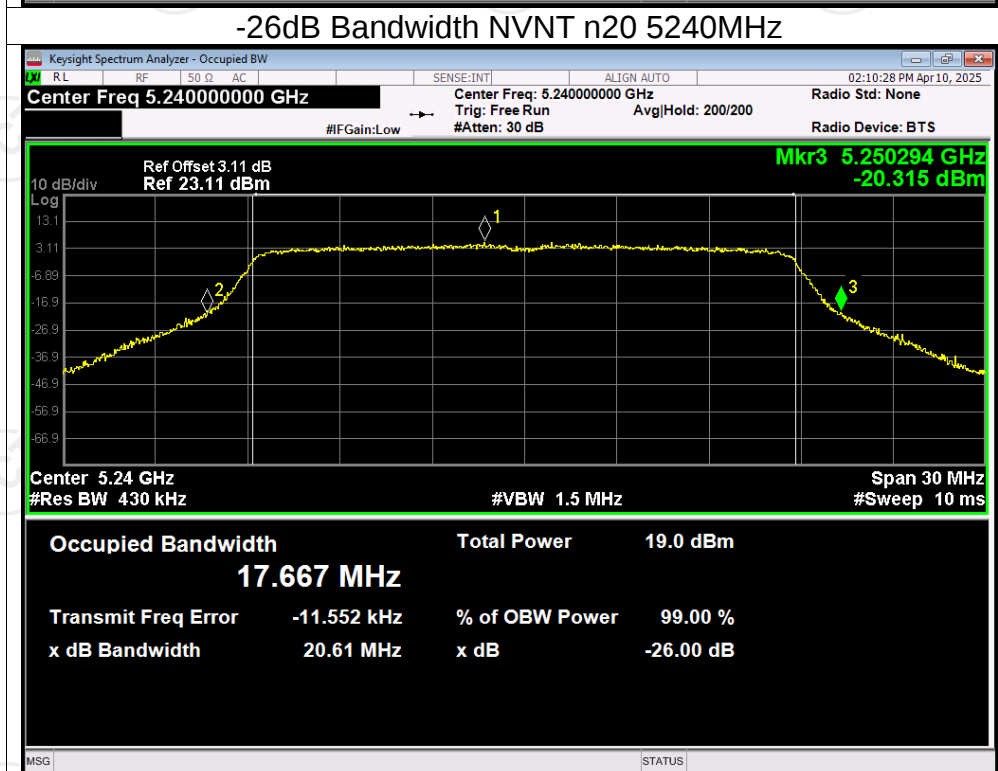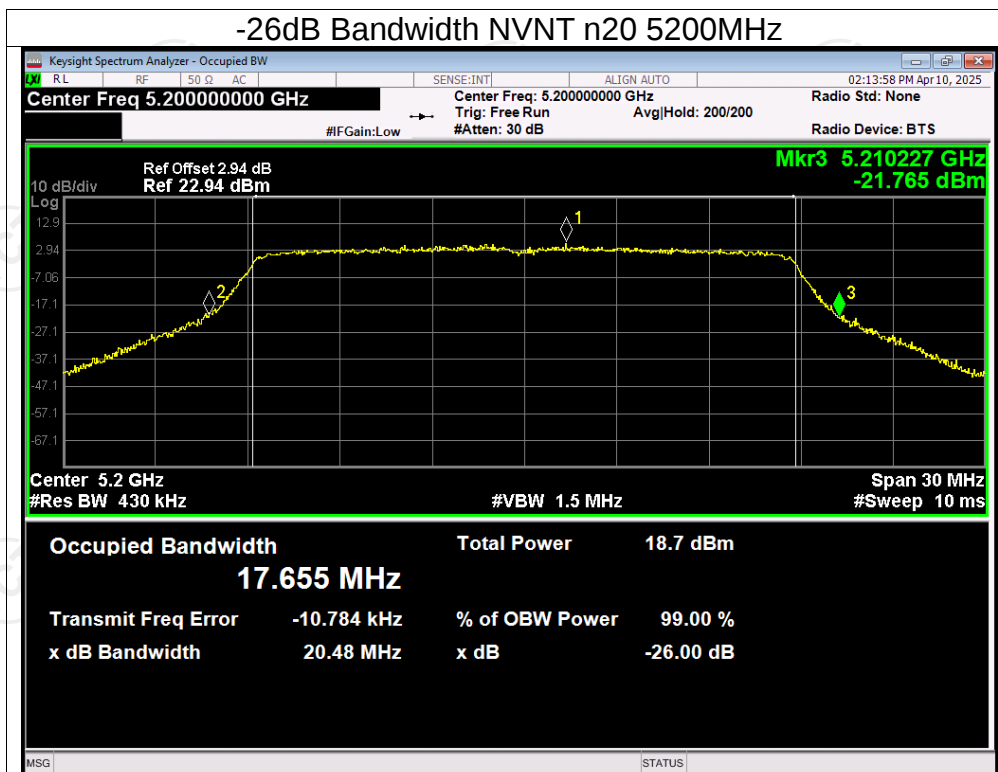

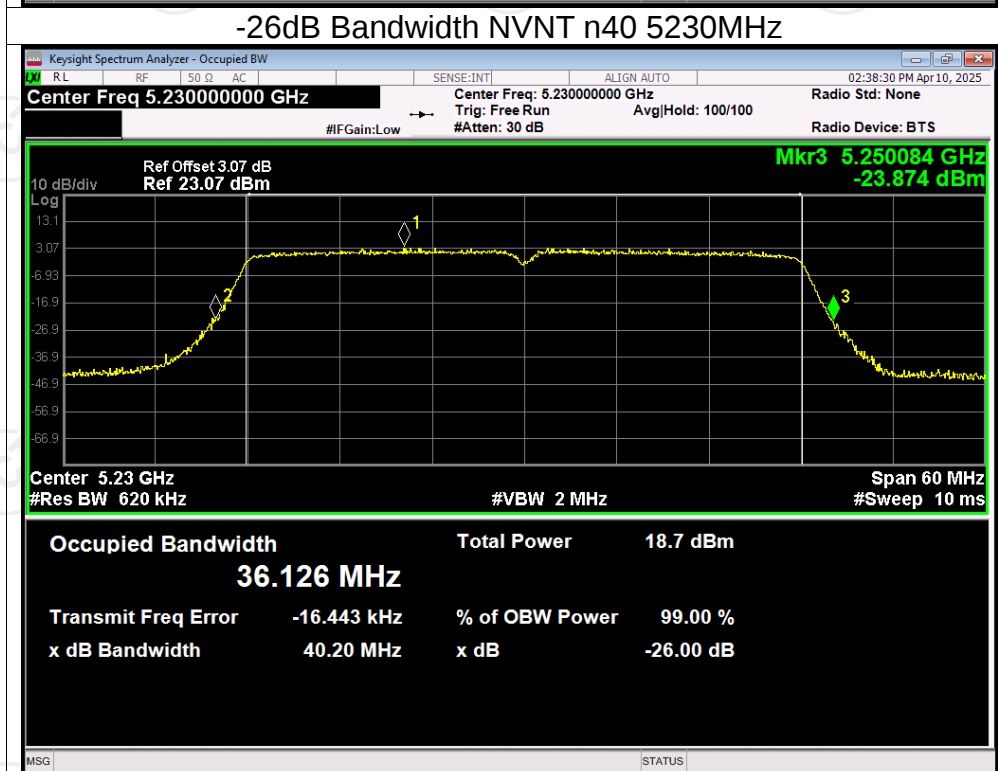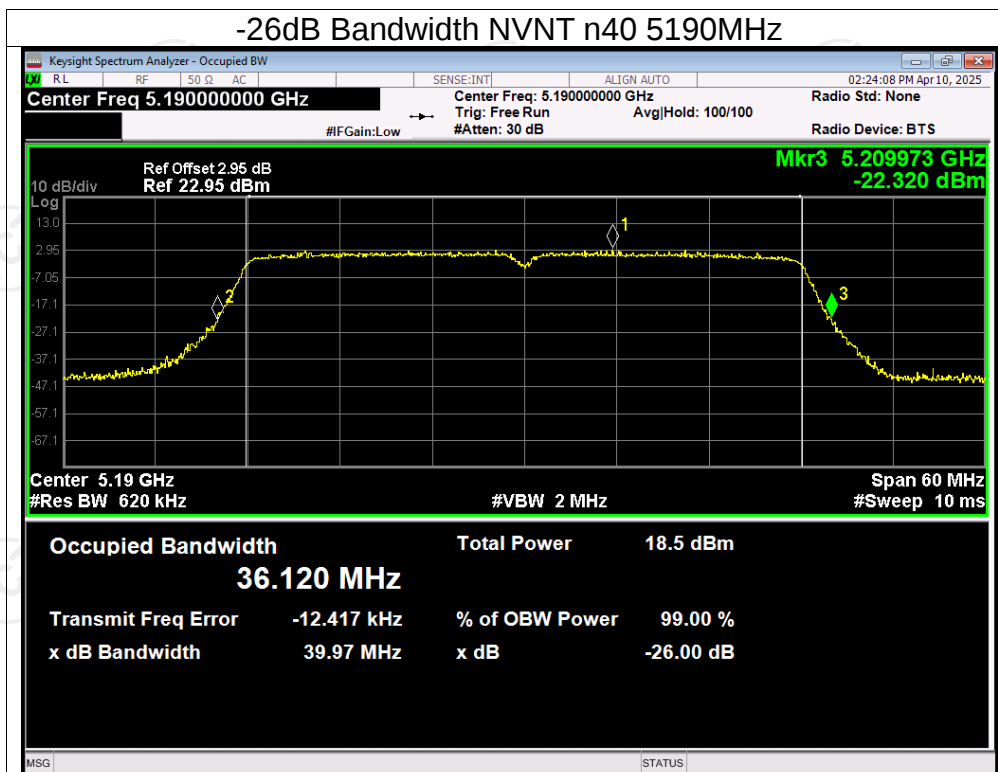




Test Graphs



-26dB Bandwidth NVNT a 5260MHz


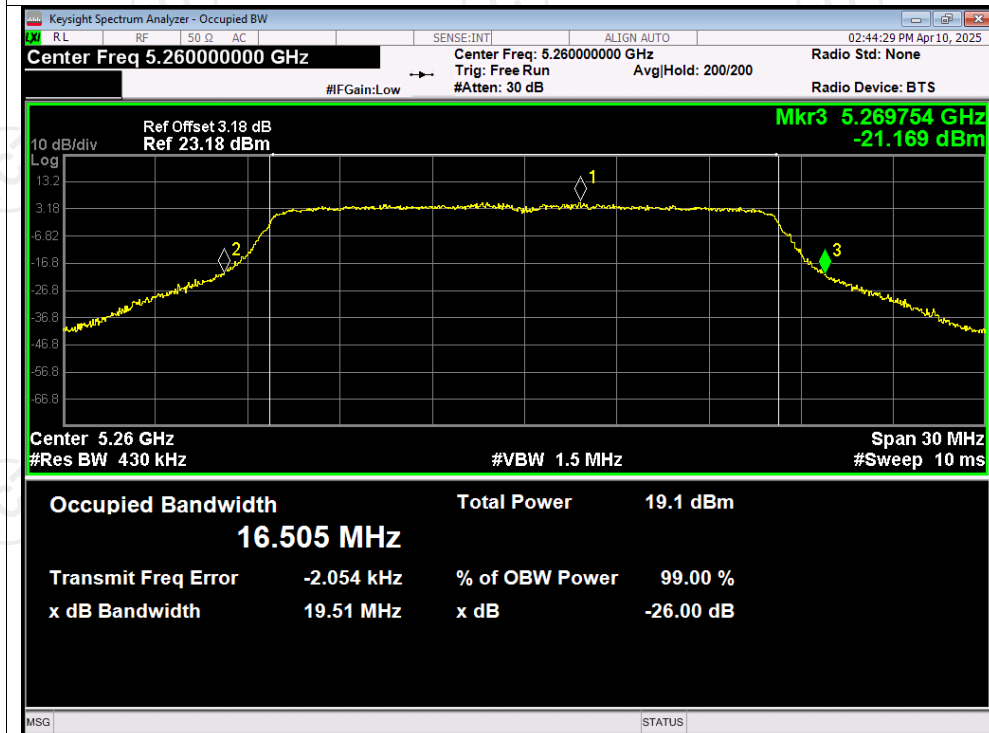


-26dB Bandwidth NVNT a 5300MHz

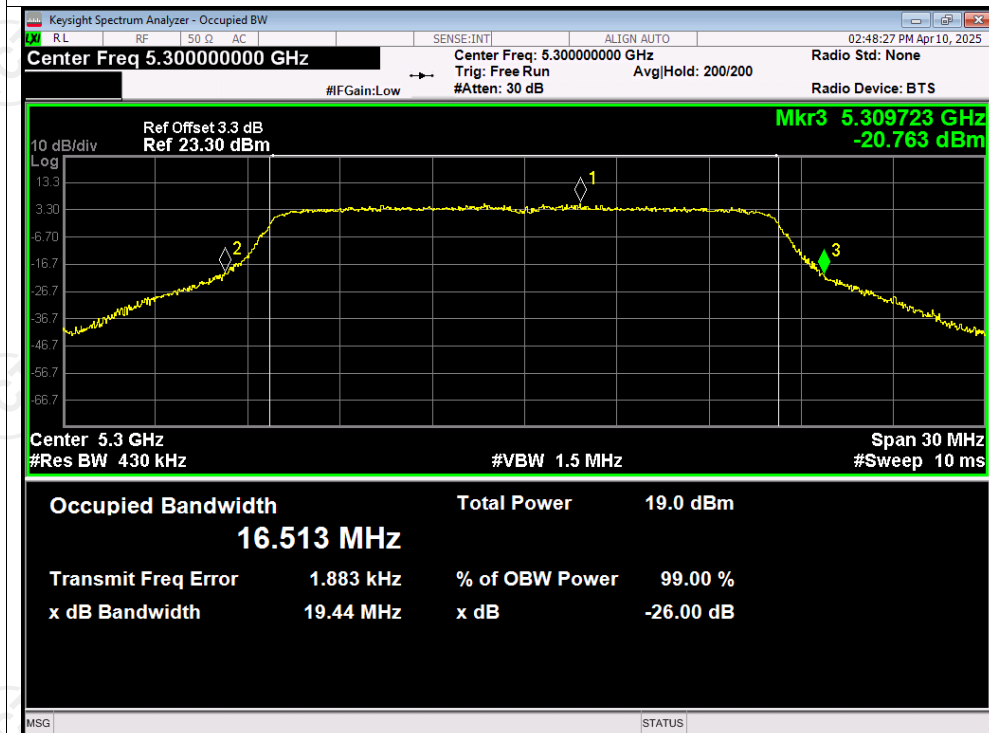

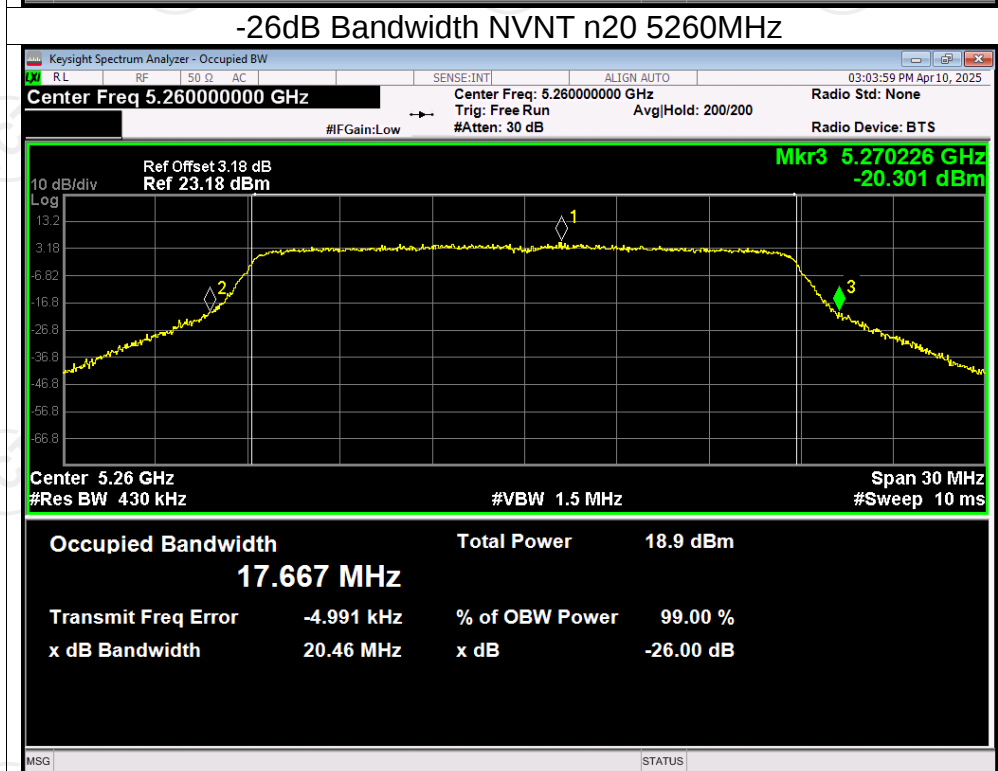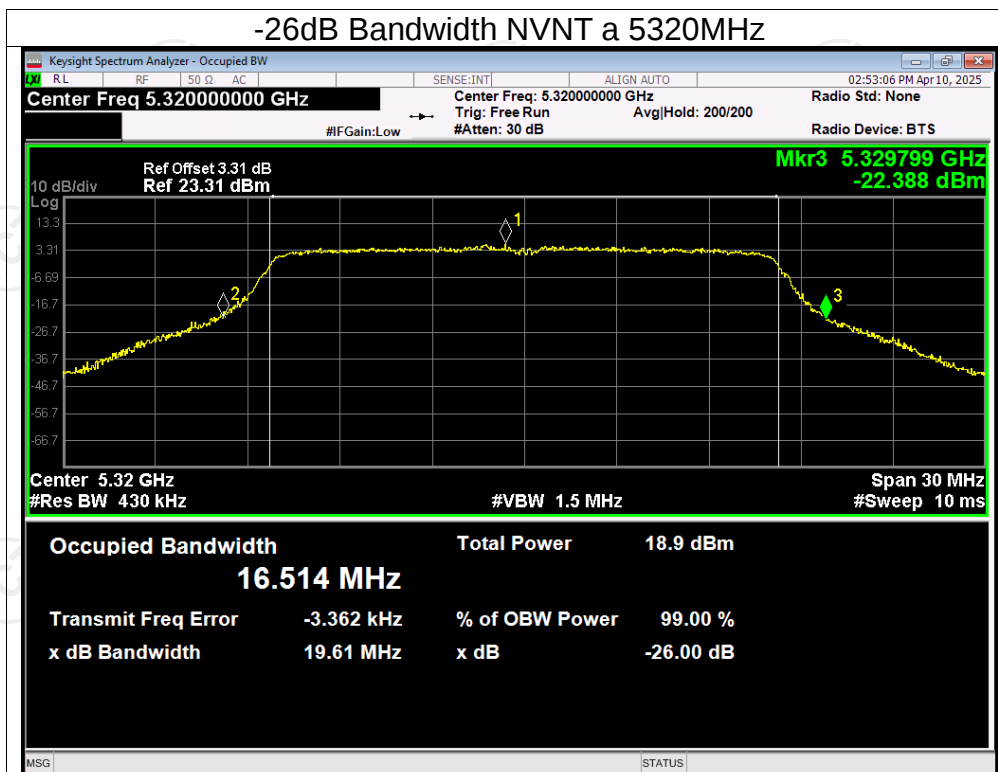


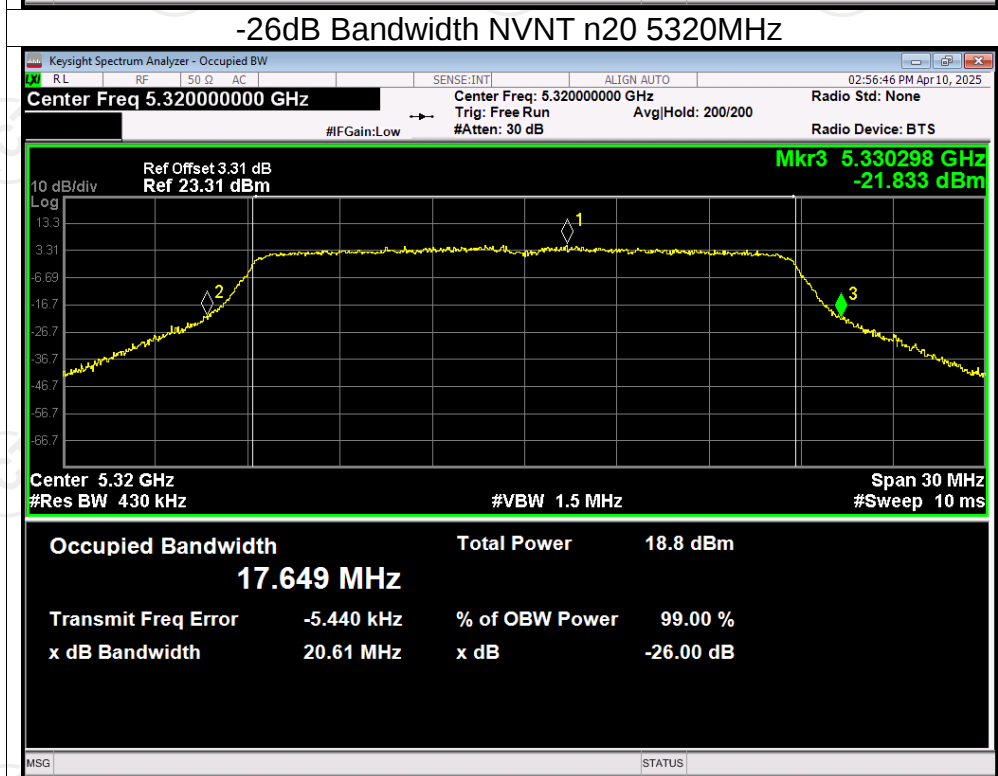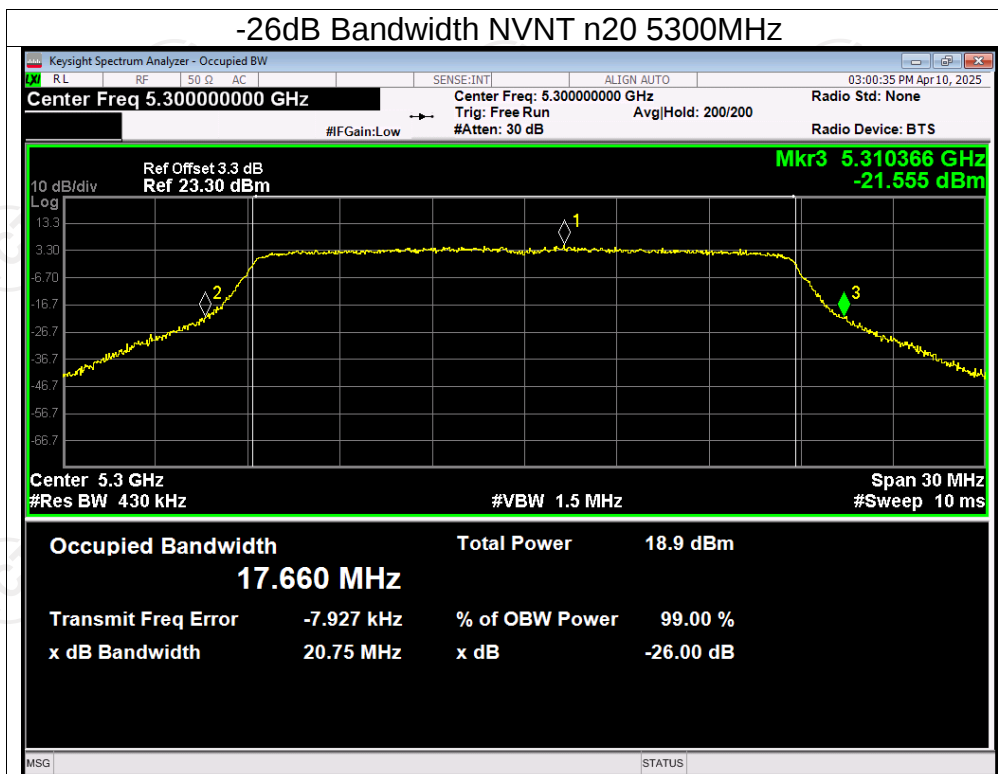

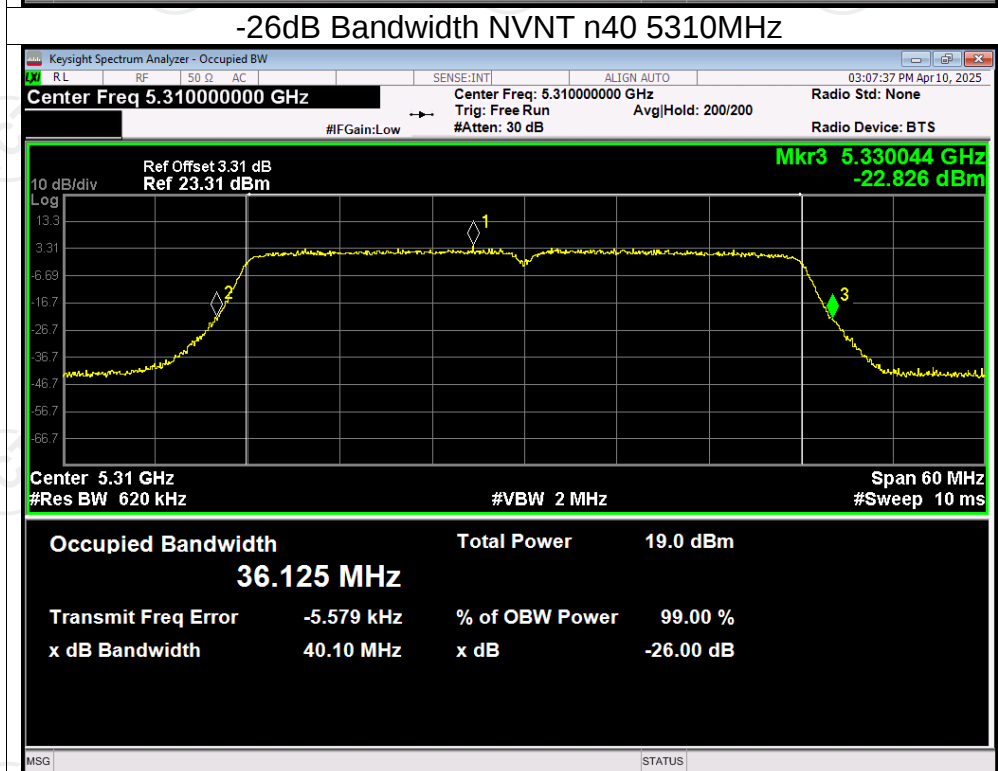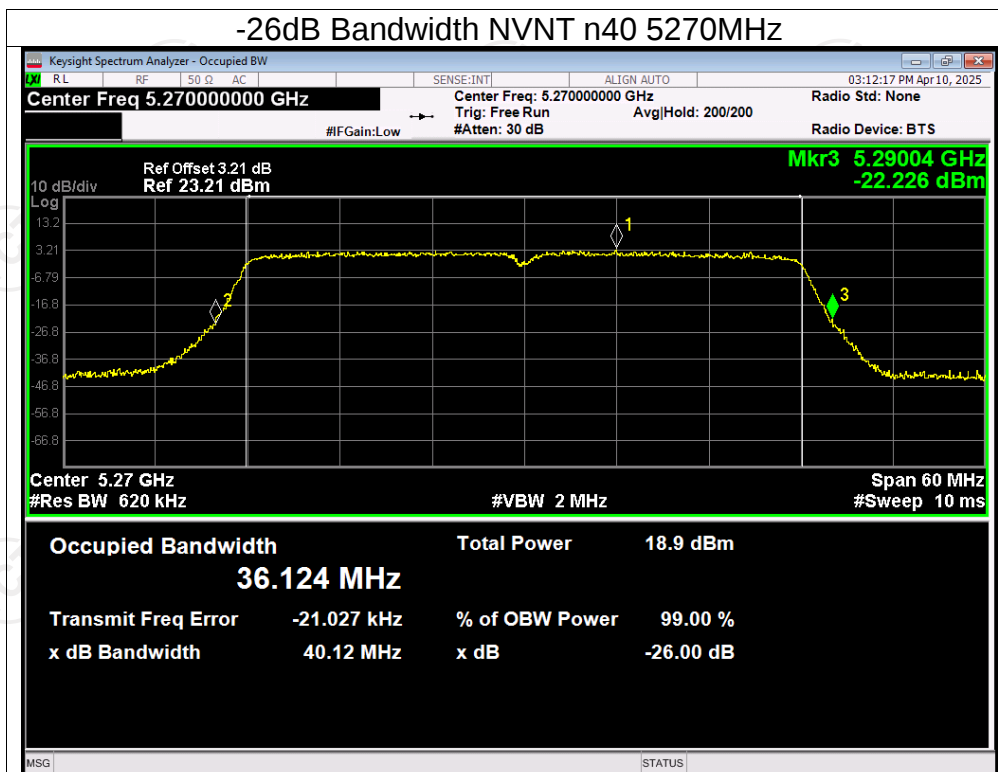




Test Graphs



-26dB Bandwidth NVNT a 5500MHz


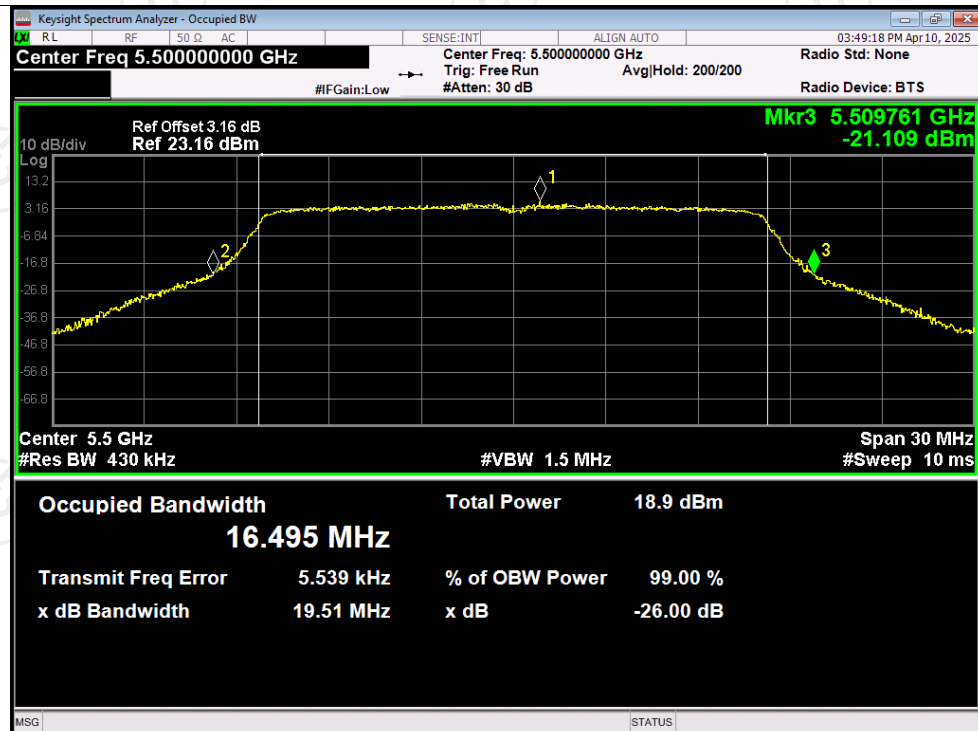




-26dB Bandwidth NVNT a 5580MHz

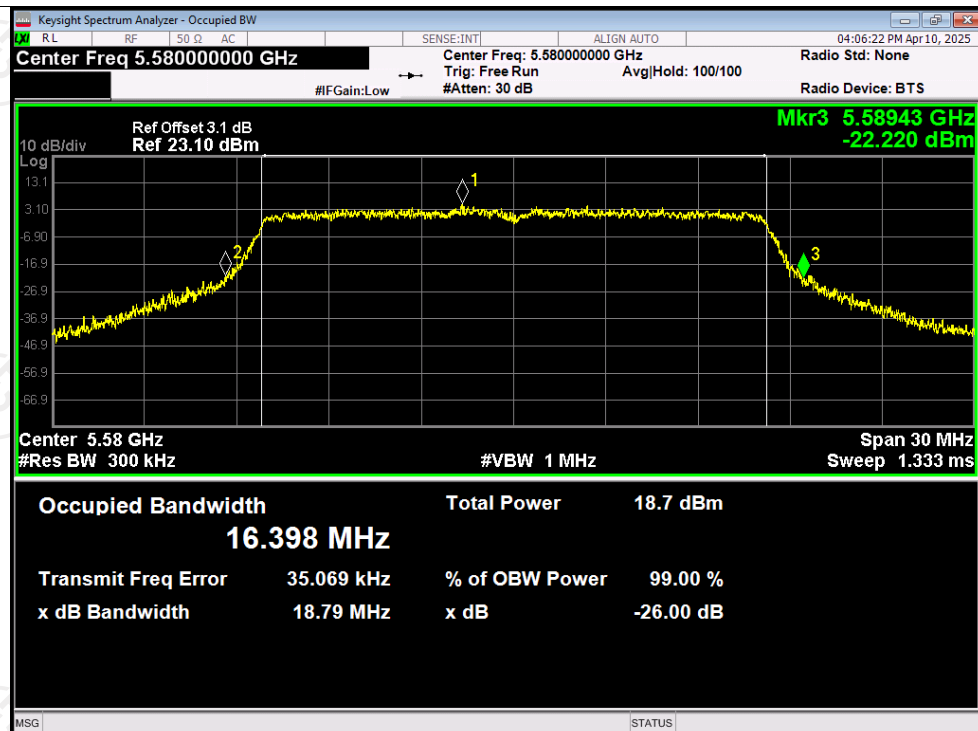


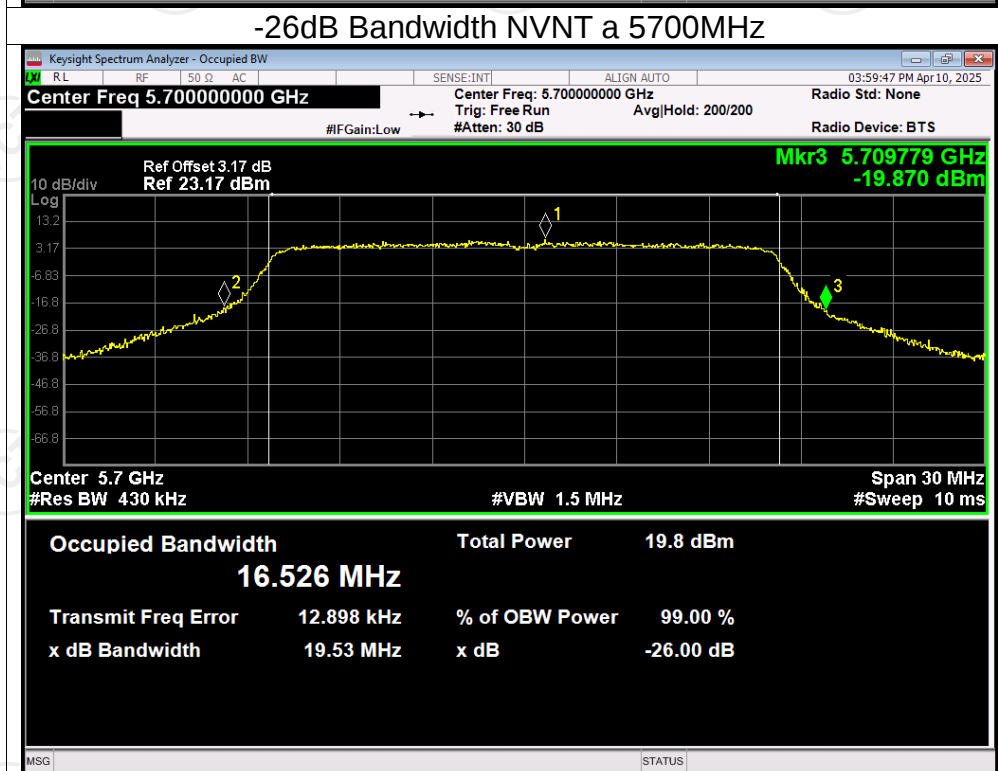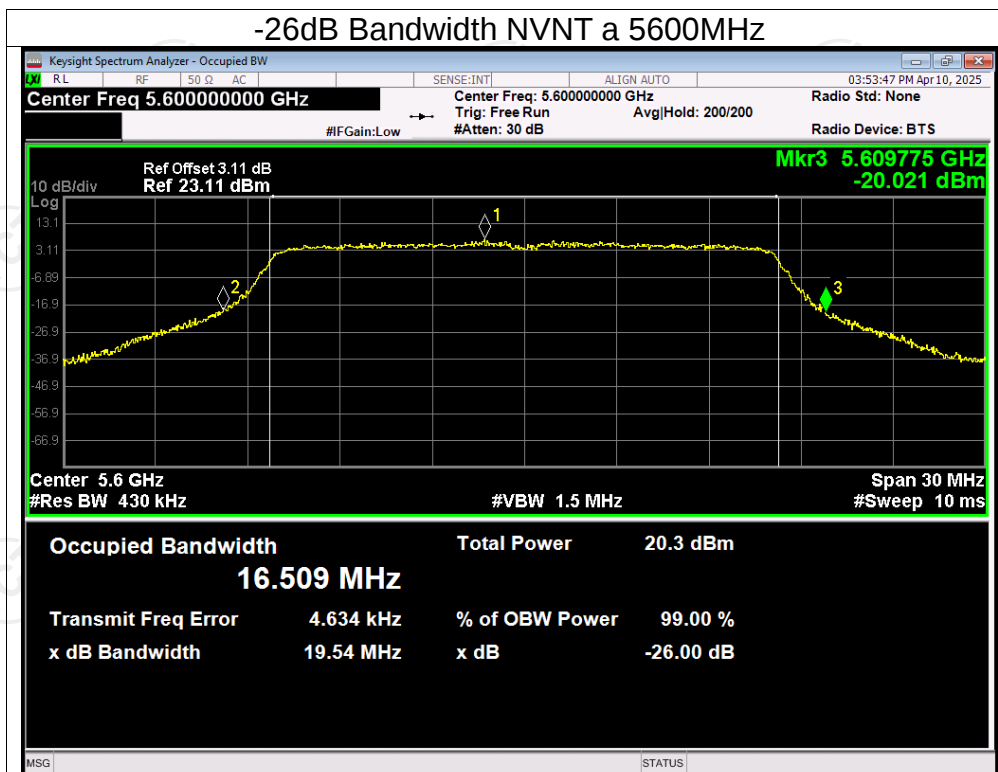

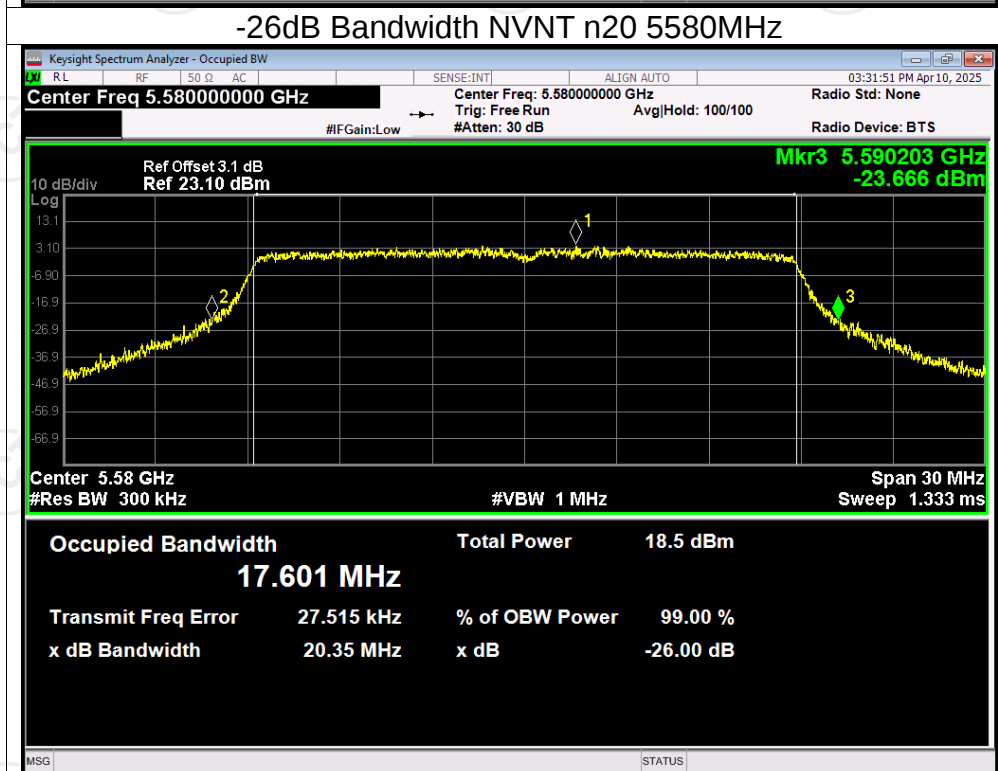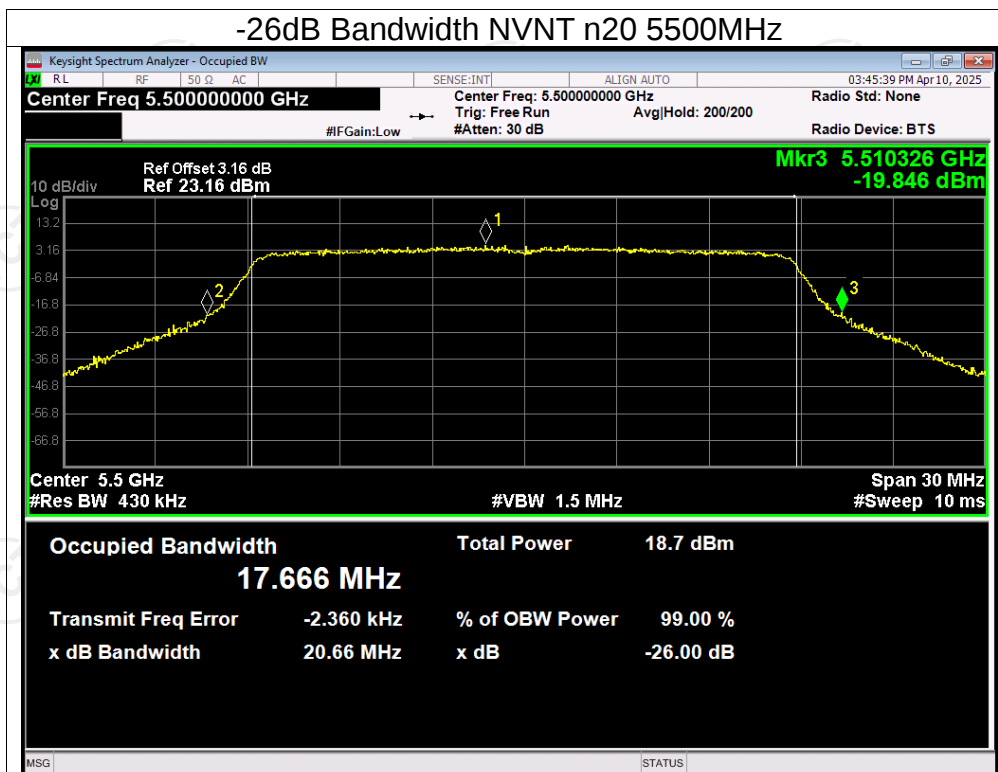

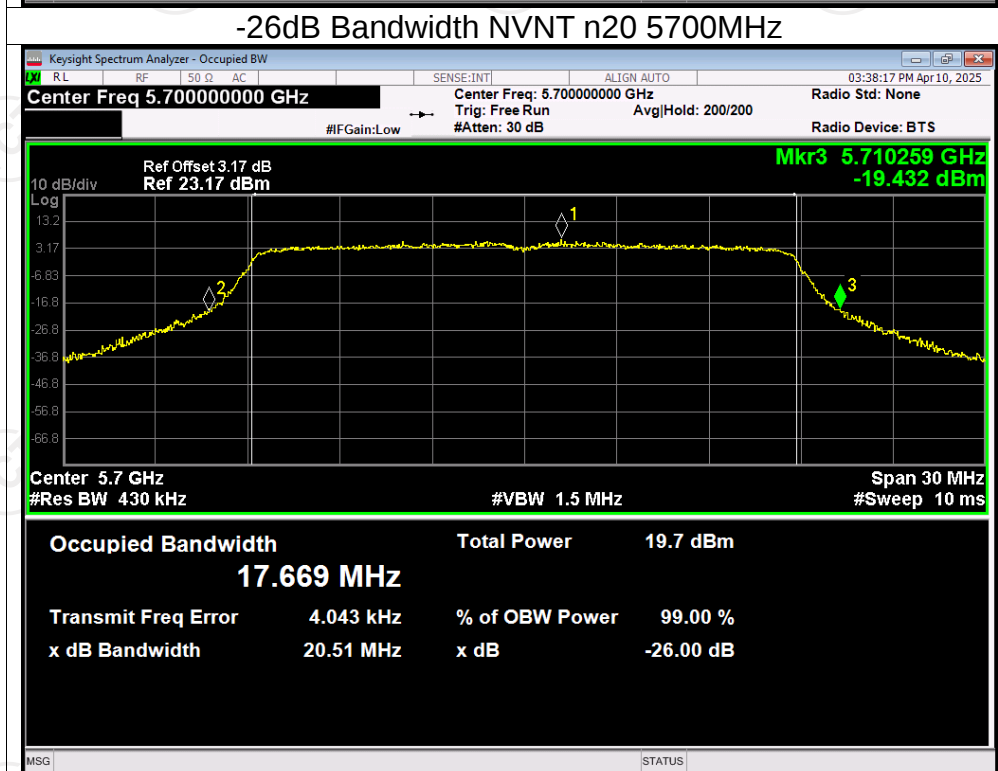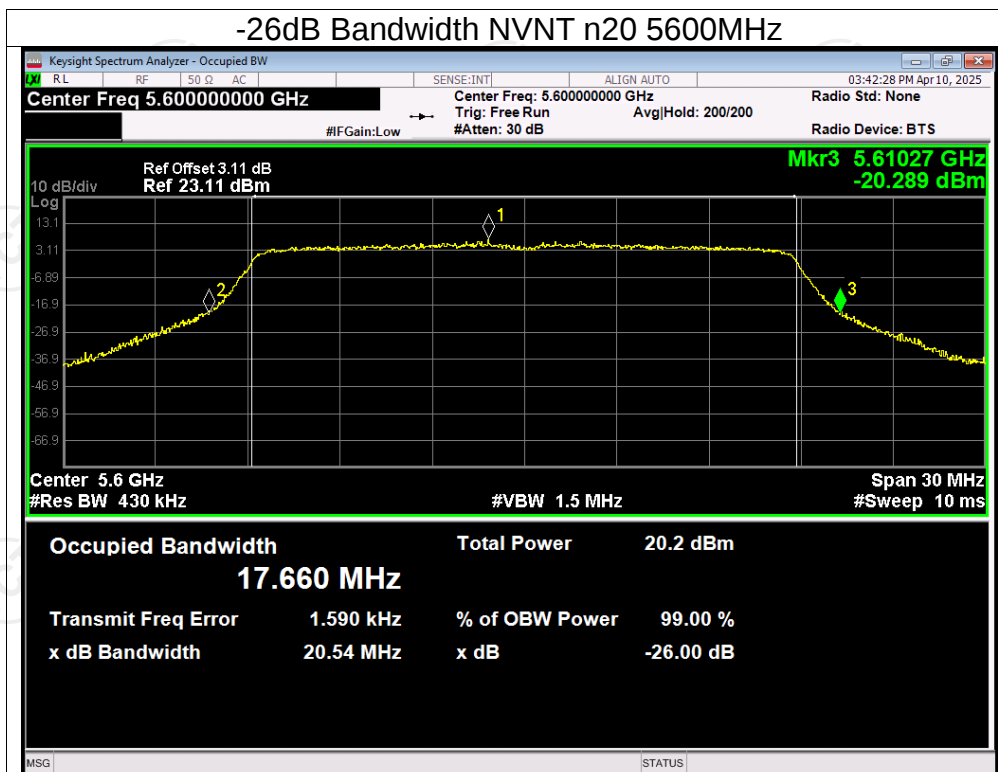

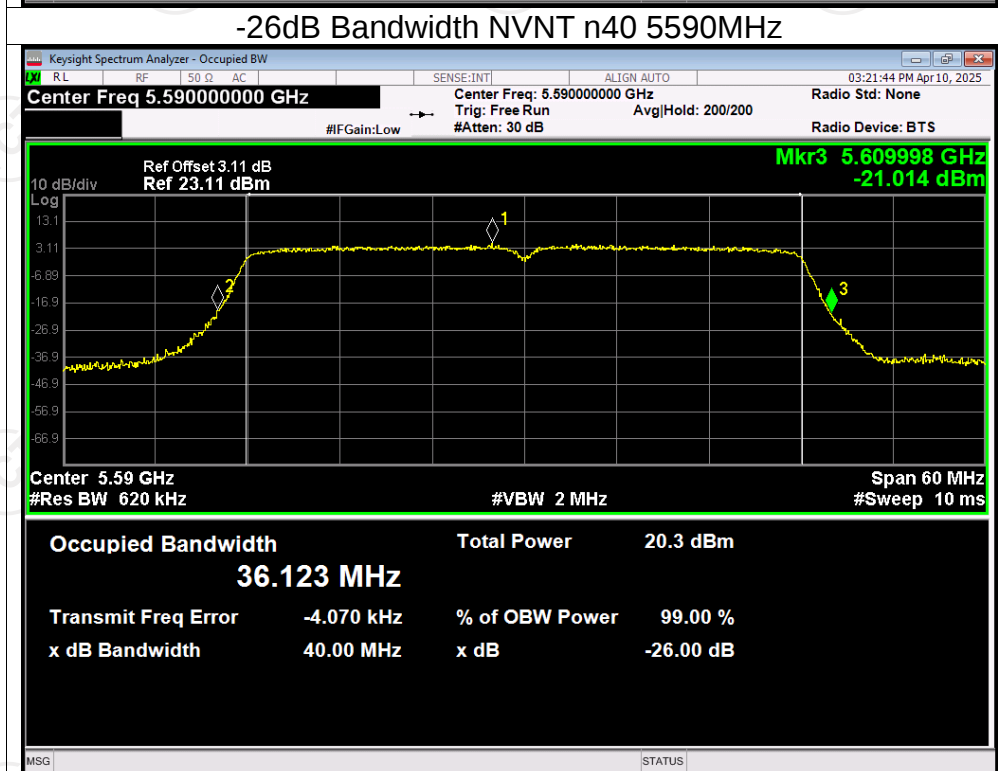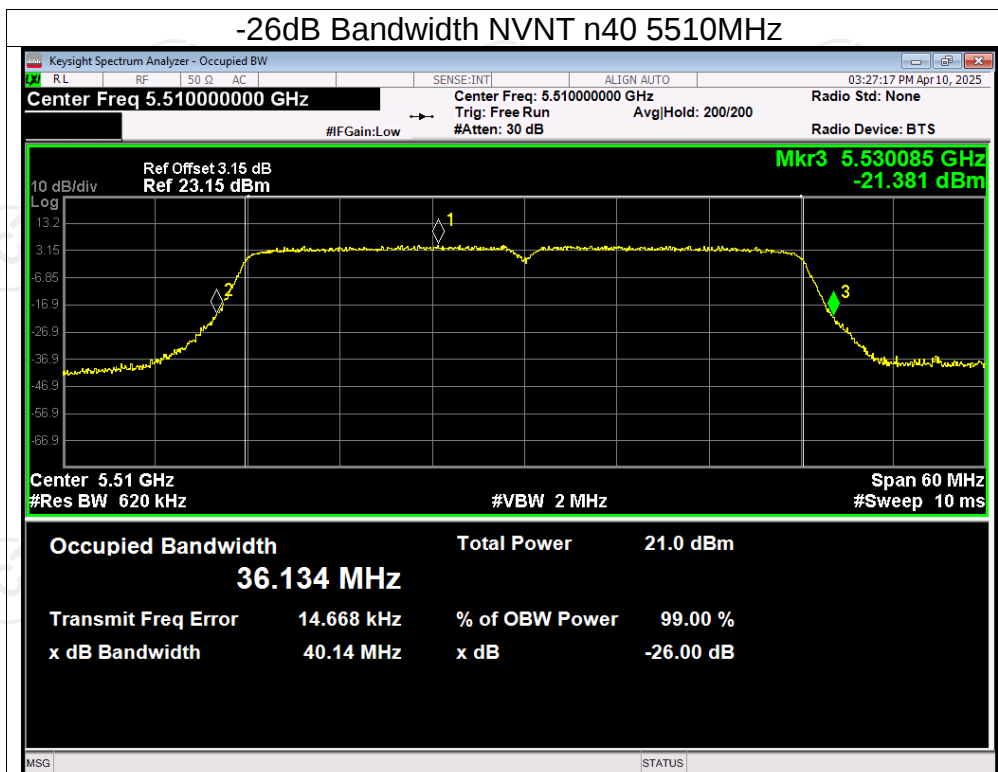

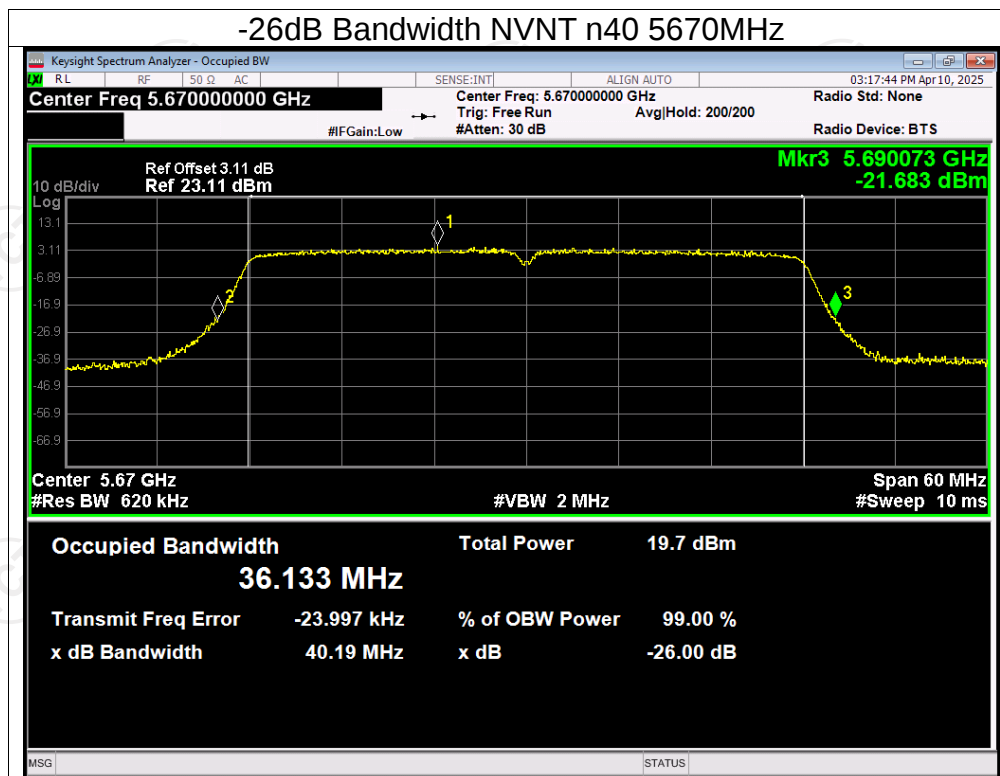


-6dB Bandwidth


Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	16.334	0.5	Pass
NVNT	a	5785	16.34	0.5	Pass
NVNT	a	5825	16.343	0.5	Pass
NVNT	n20	5745	17.191	0.5	Pass
NVNT	n20	5785	16.928	0.5	Pass
NVNT	n20	5825	17.583	0.5	Pass
NVNT	n40	5755	17.565	0.5	Pass
NVNT	n40	5795	17.554	0.5	Pass



Test Graphs



-6dB Bandwidth NVNT a 5745MHz


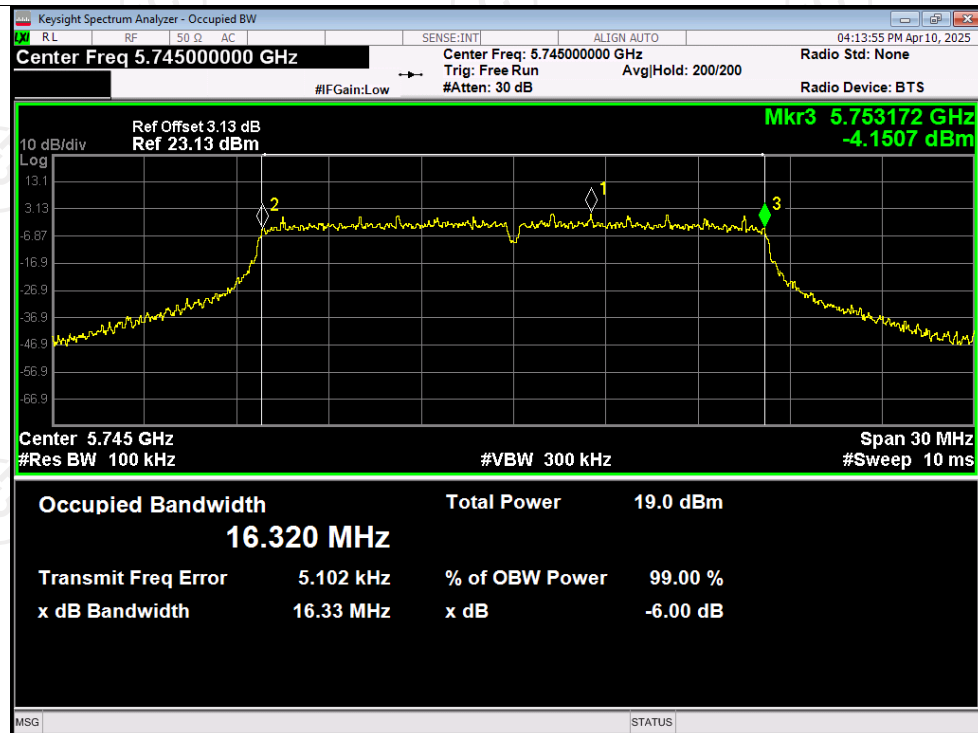


-6dB Bandwidth NVNT a 5785MHz

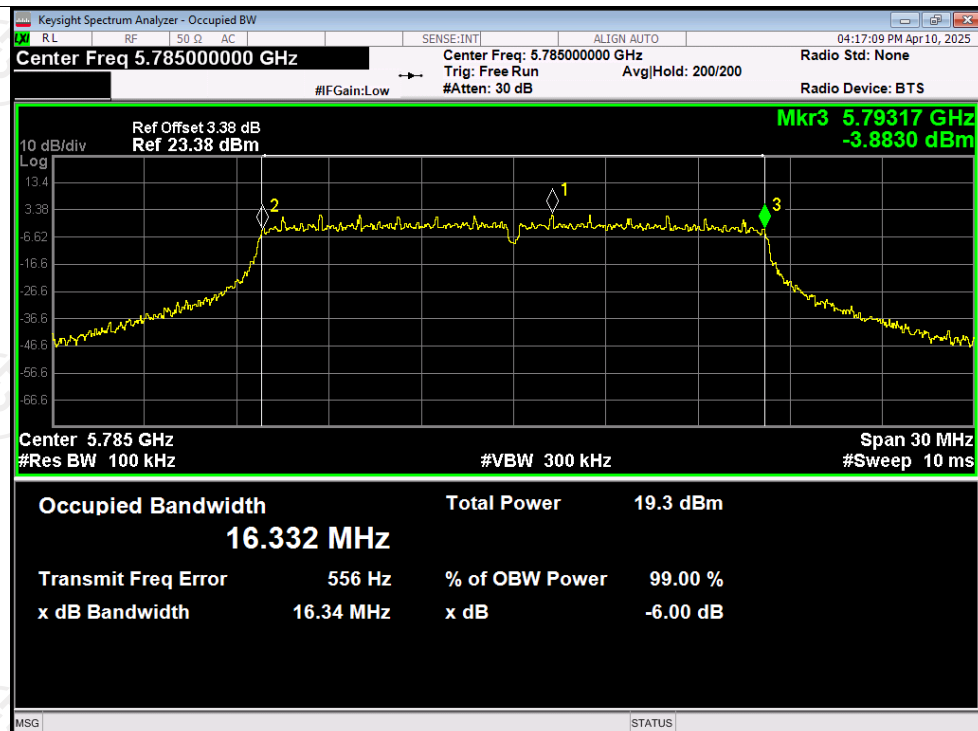

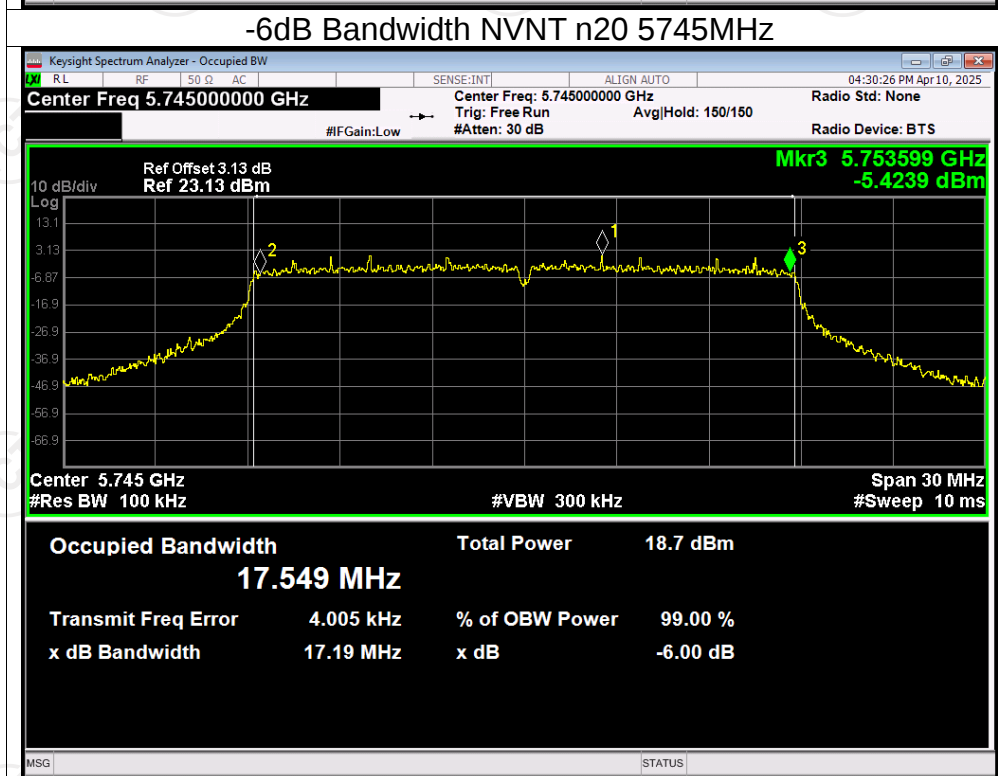
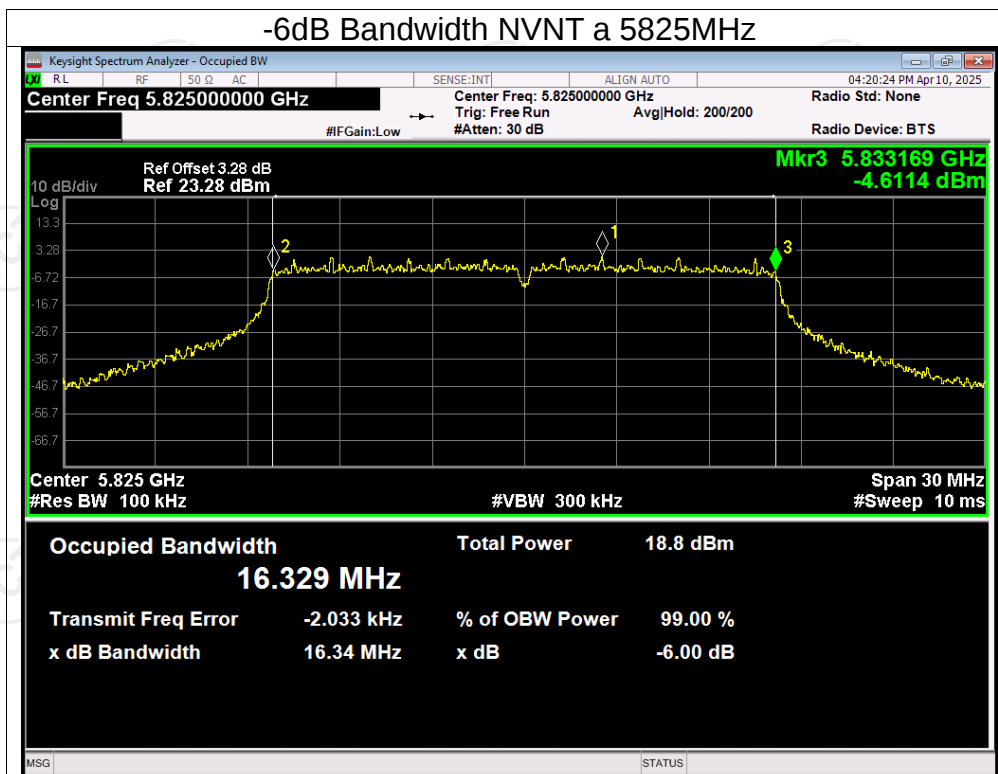


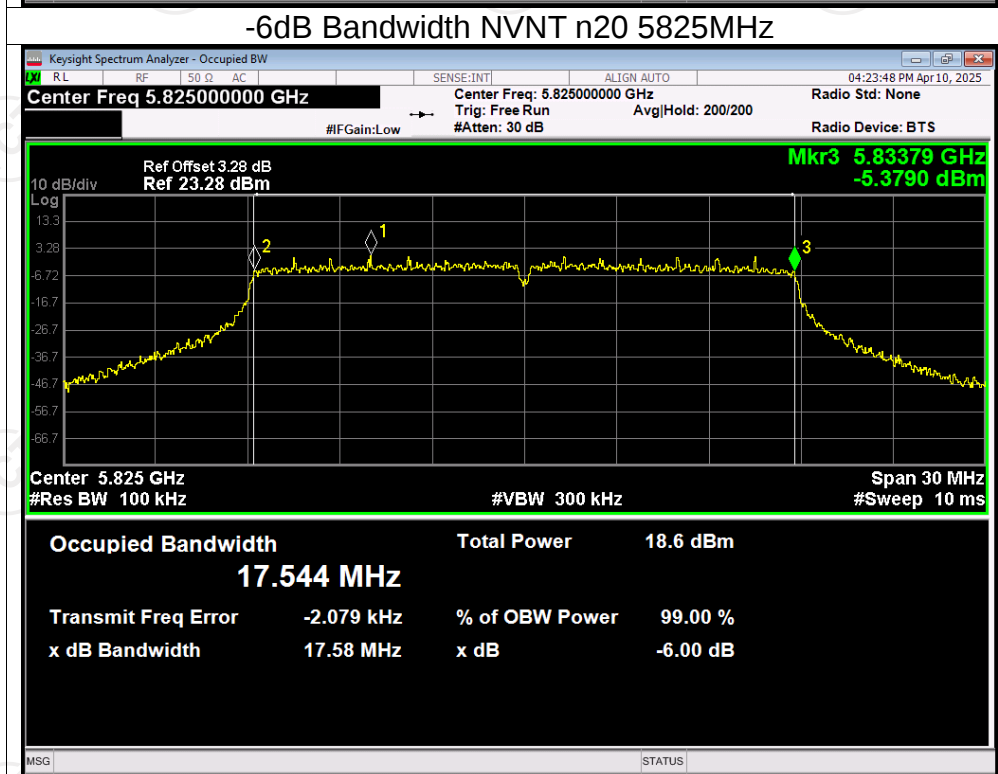
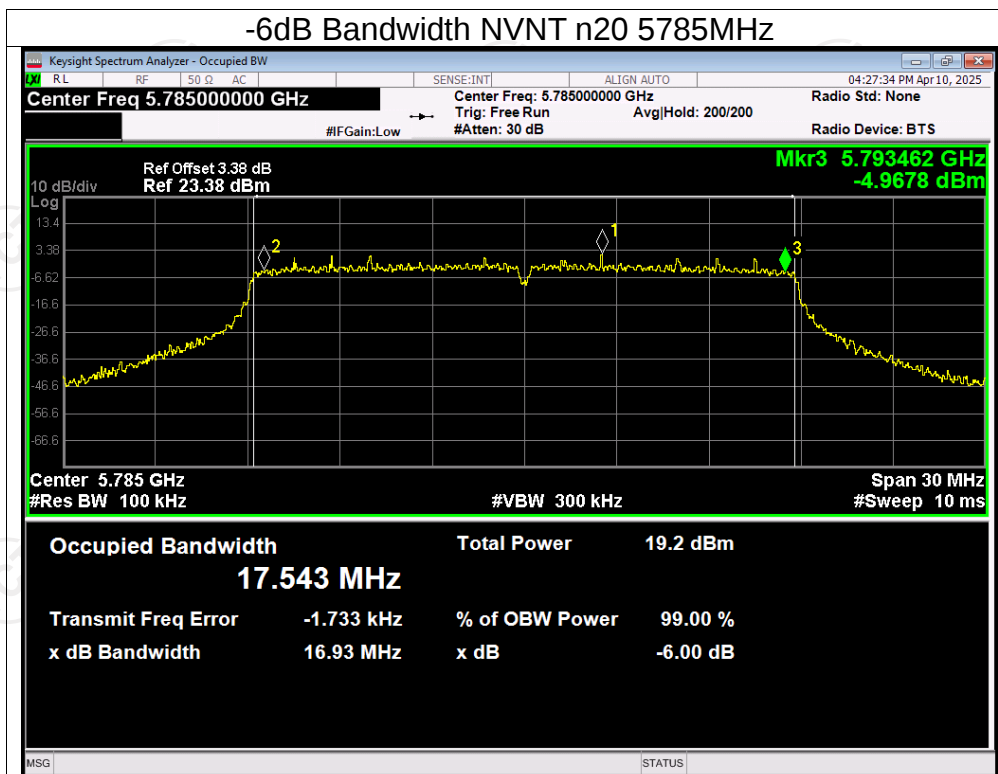


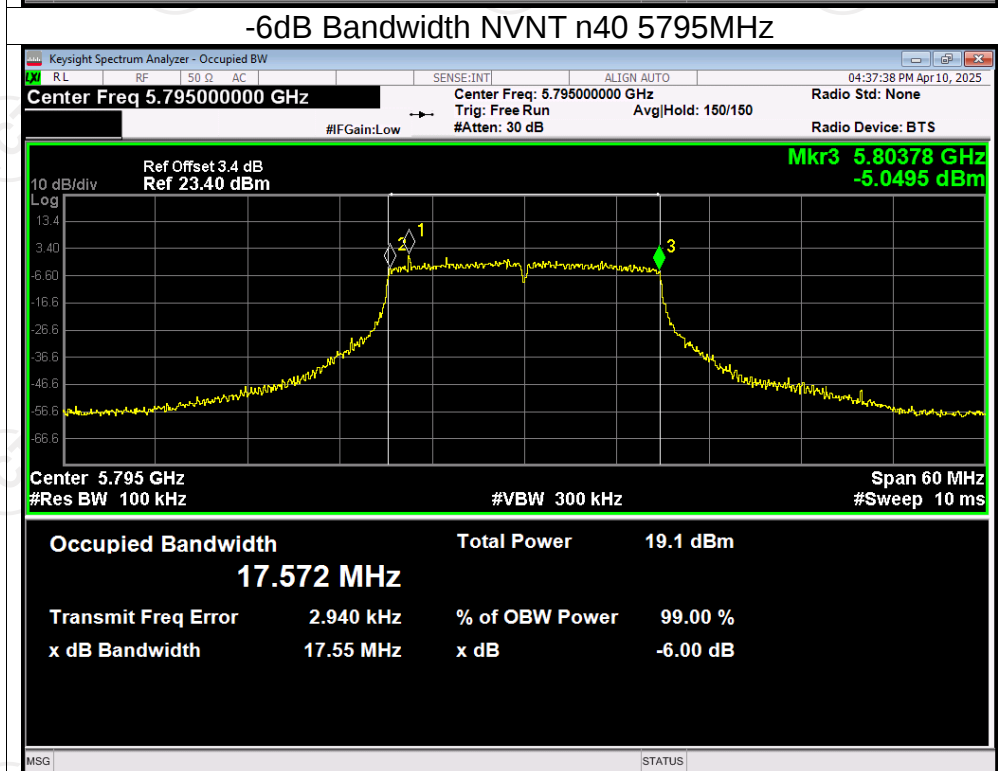
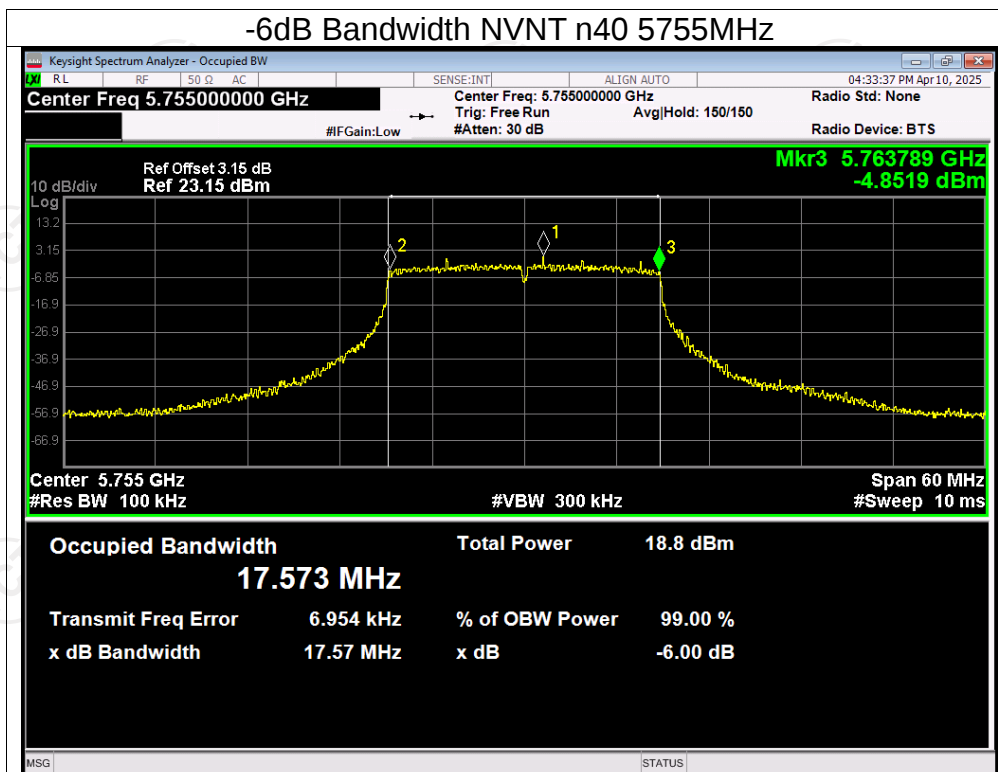




Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.328
NVNT	a	5200	16.324
NVNT	a	5240	16.329
NVNT	n20	5180	17.536
NVNT	n20	5200	17.517
NVNT	n20	5240	17.523
NVNT	n40	5190	36.026
NVNT	n40	5230	36.033
NVNT	a	5260	16.323
NVNT	a	5300	16.327
NVNT	a	5320	16.32
NVNT	n20	5260	17.522
NVNT	n20	5300	17.532
NVNT	n20	5320	17.522
NVNT	n40	5270	36.035
NVNT	n40	5310	36.022
NVNT	a	5500	16.323
NVNT	a	5580	16.35
NVNT	a	5600	16.326
NVNT	a	5700	16.341
NVNT	n20	5500	17.528
NVNT	n20	5580	17.548
NVNT	n20	5600	17.525
NVNT	n20	5700	17.528
NVNT	n40	5510	36.043
NVNT	n40	5590	36.039
NVNT	n40	5670	36.04
NVNT	a	5745	16.32
NVNT	a	5785	16.331
NVNT	a	5825	16.348
NVNT	n20	5745	17.519
NVNT	n20	5785	17.525
NVNT	n20	5825	17.527
NVNT	n40	5755	17.693
NVNT	n40	5795	17.664

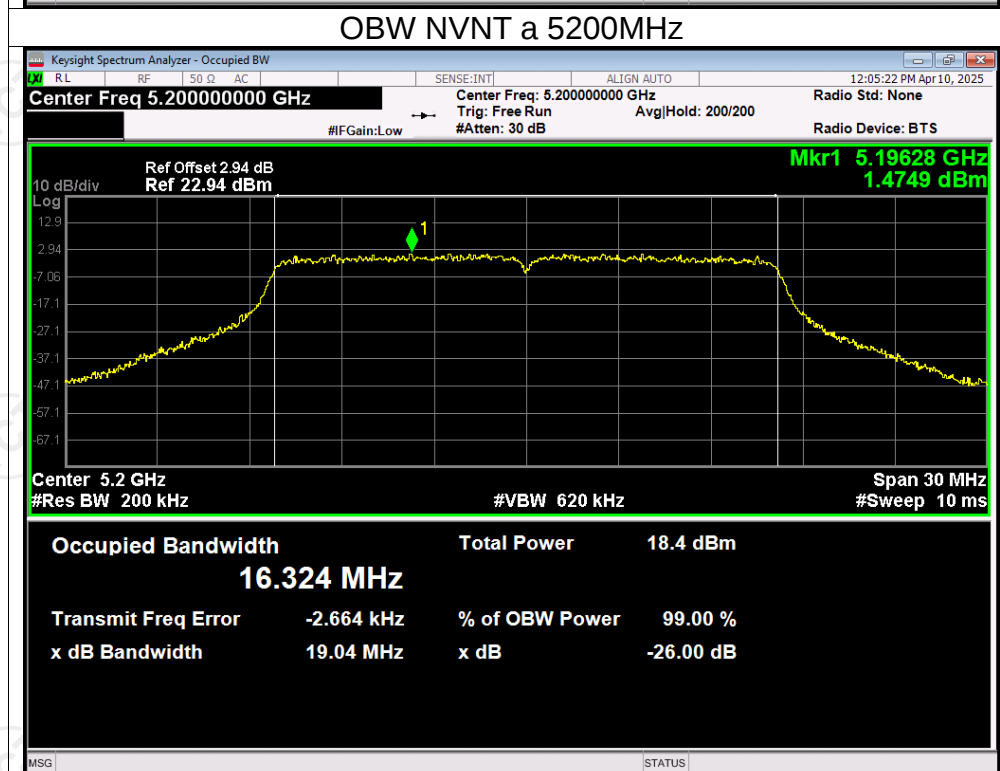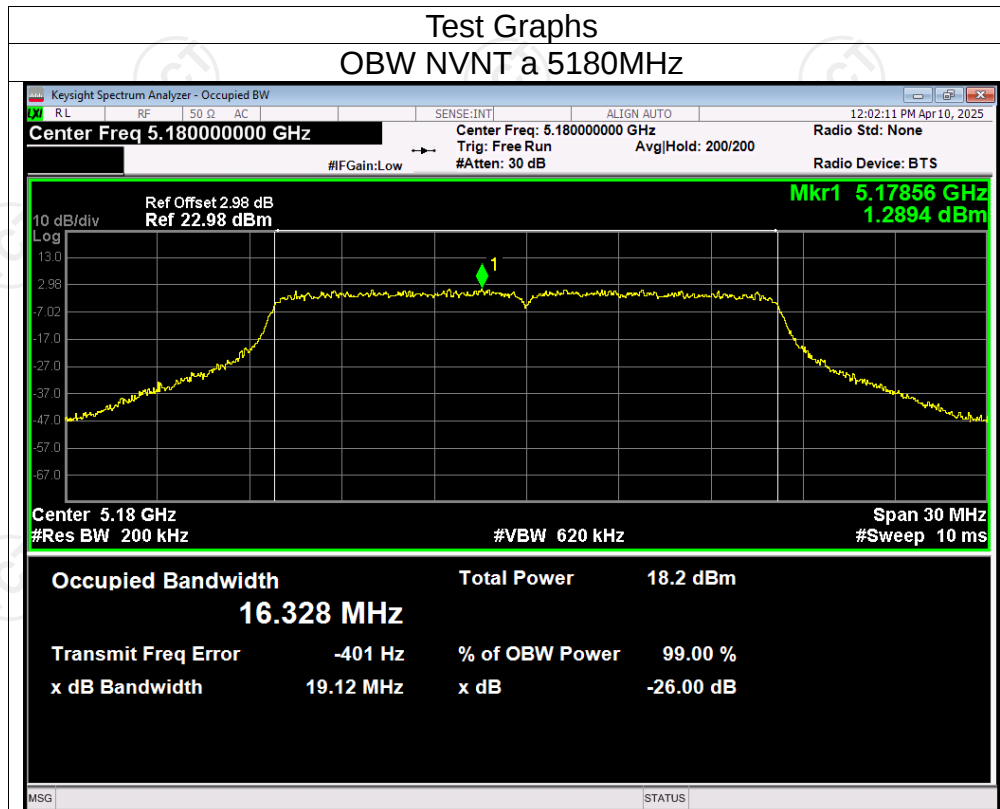

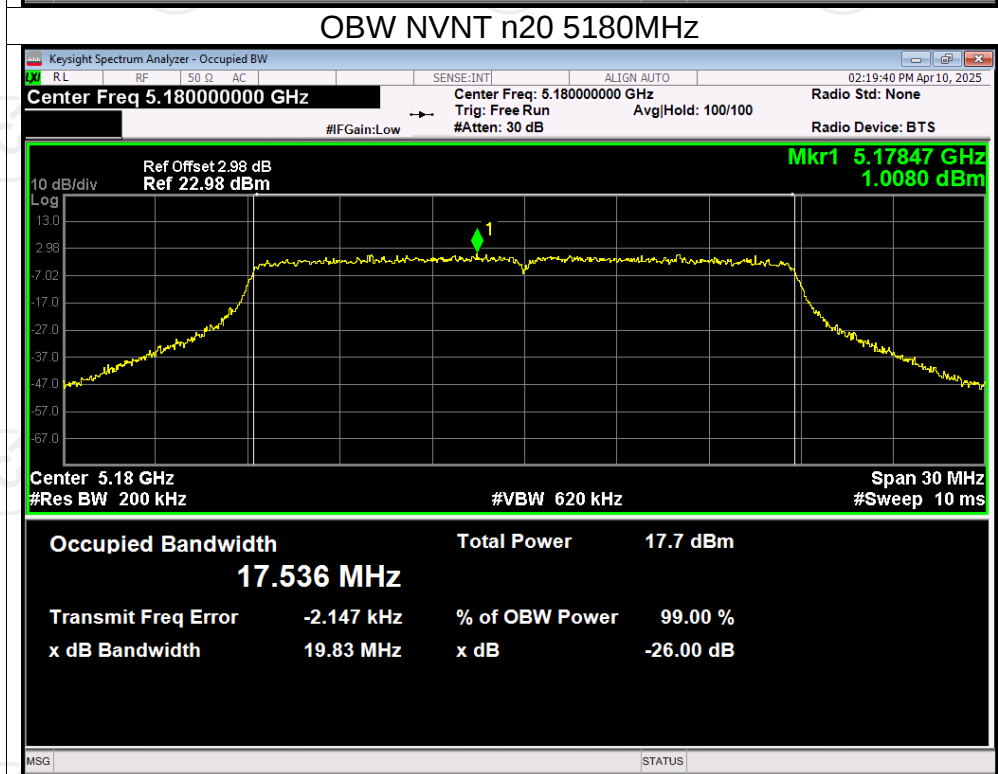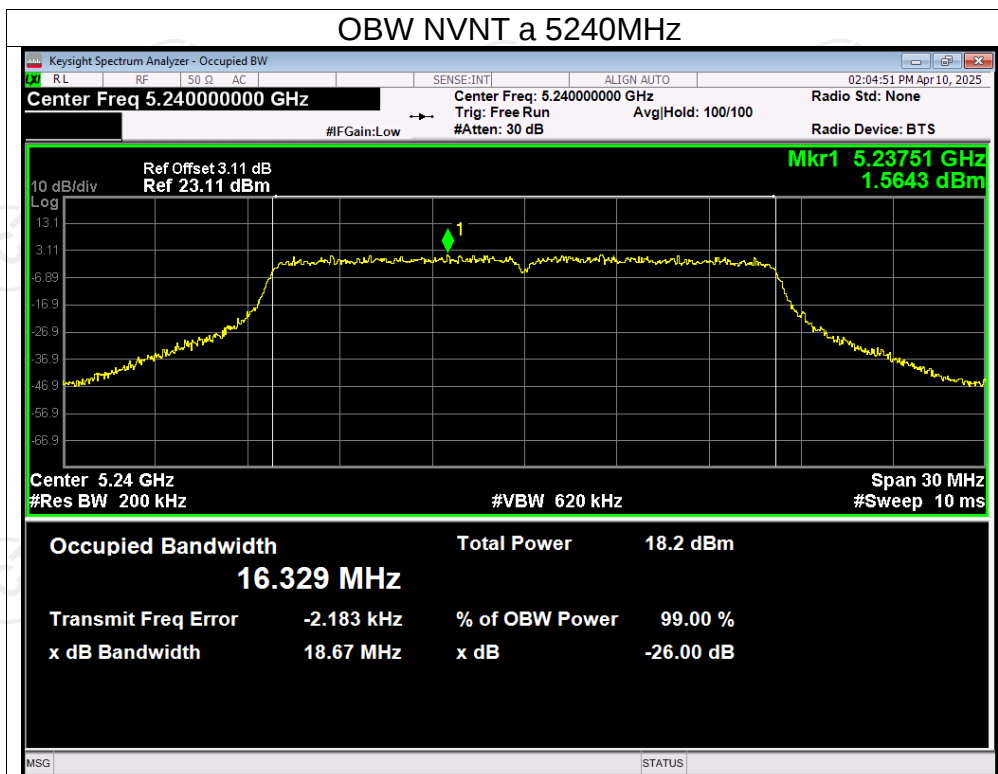


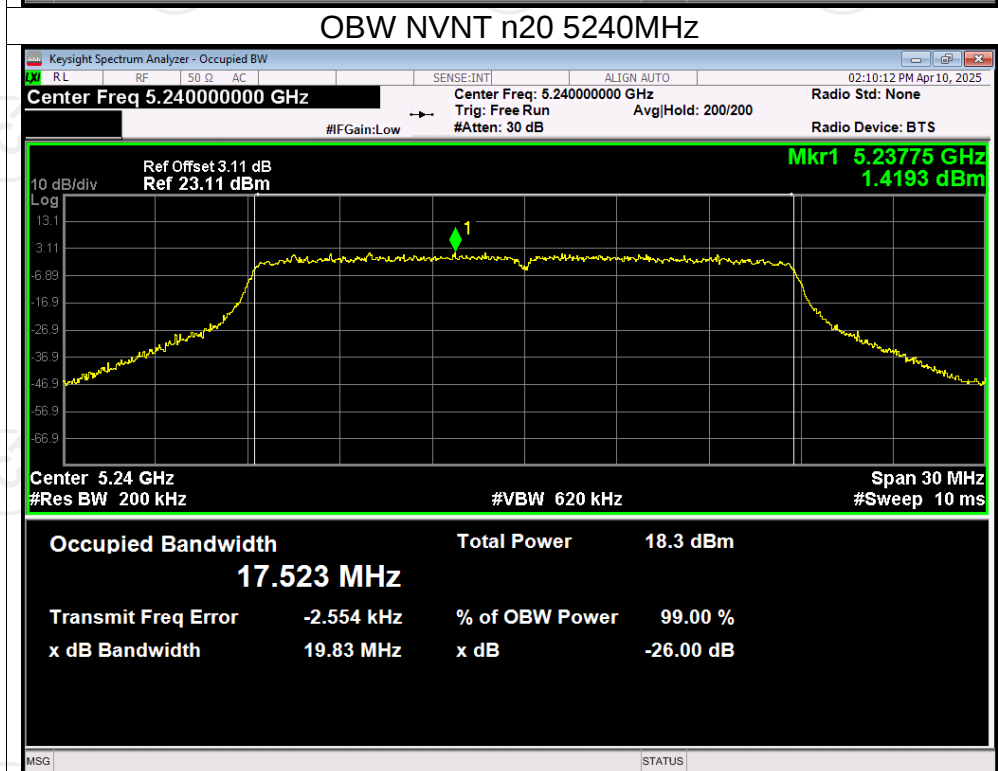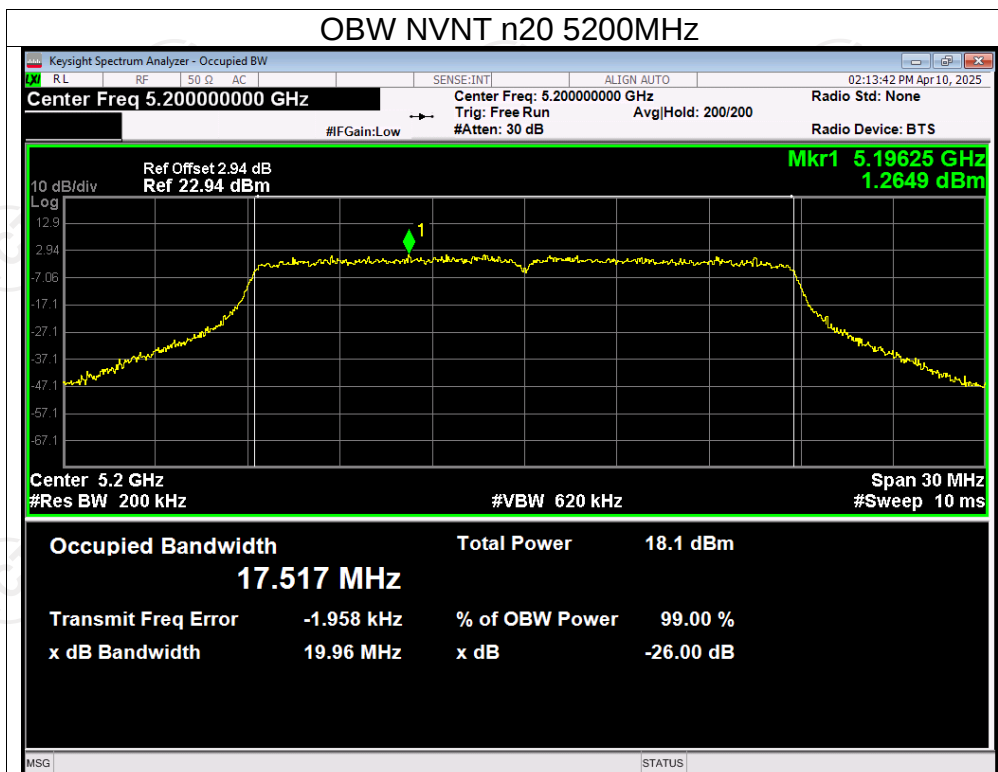

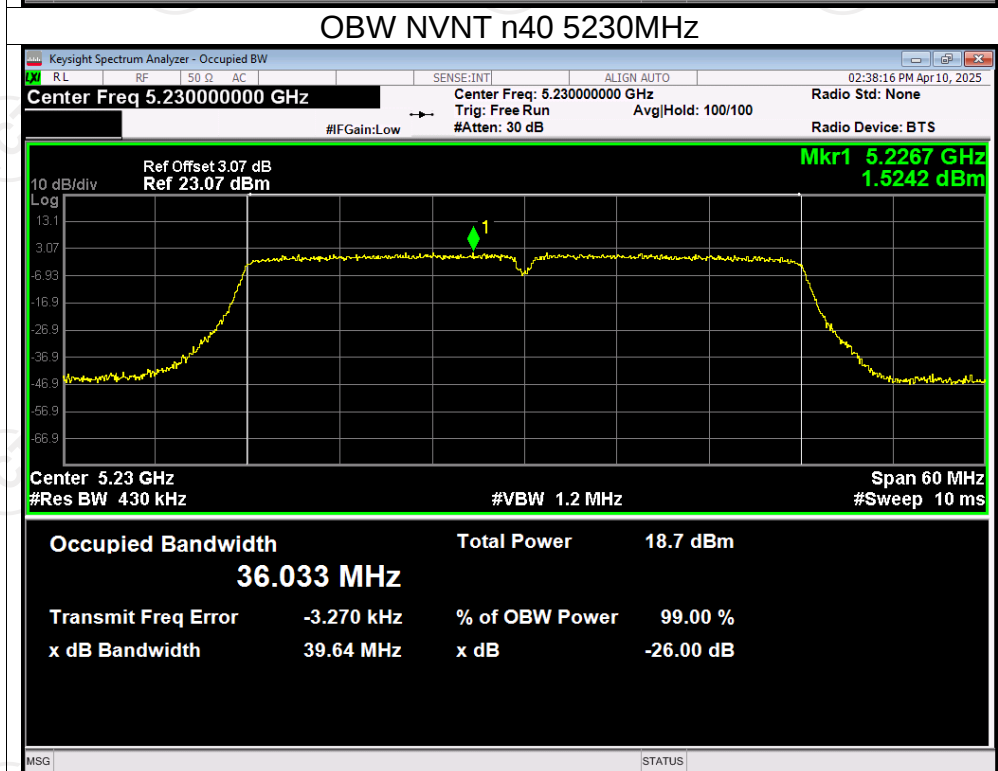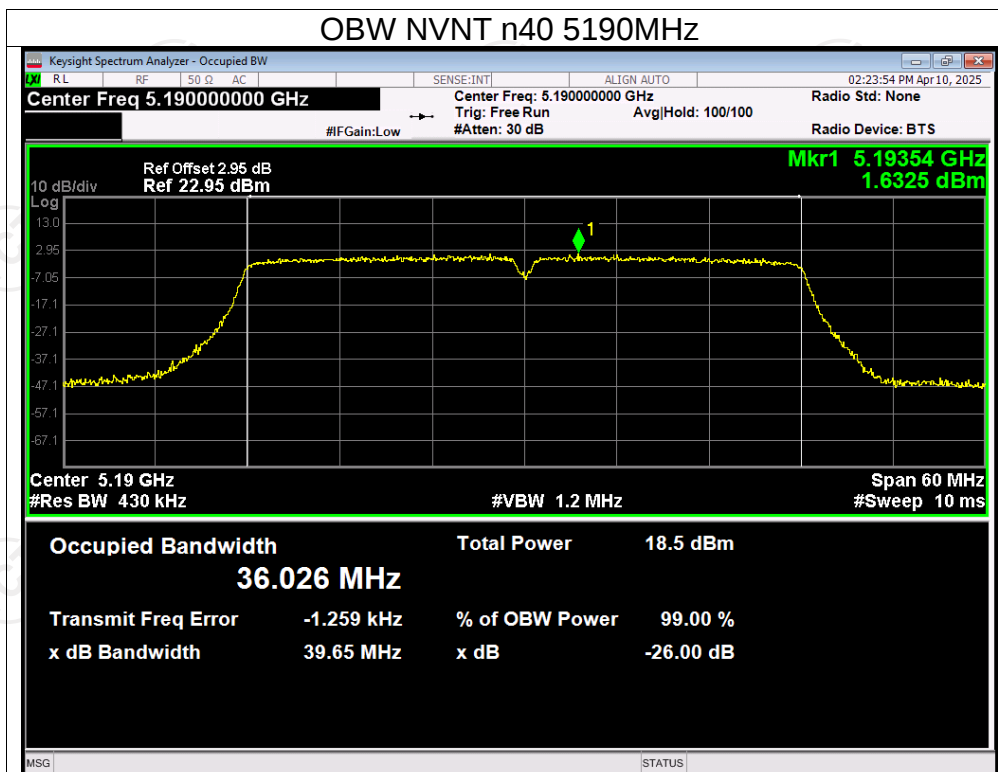


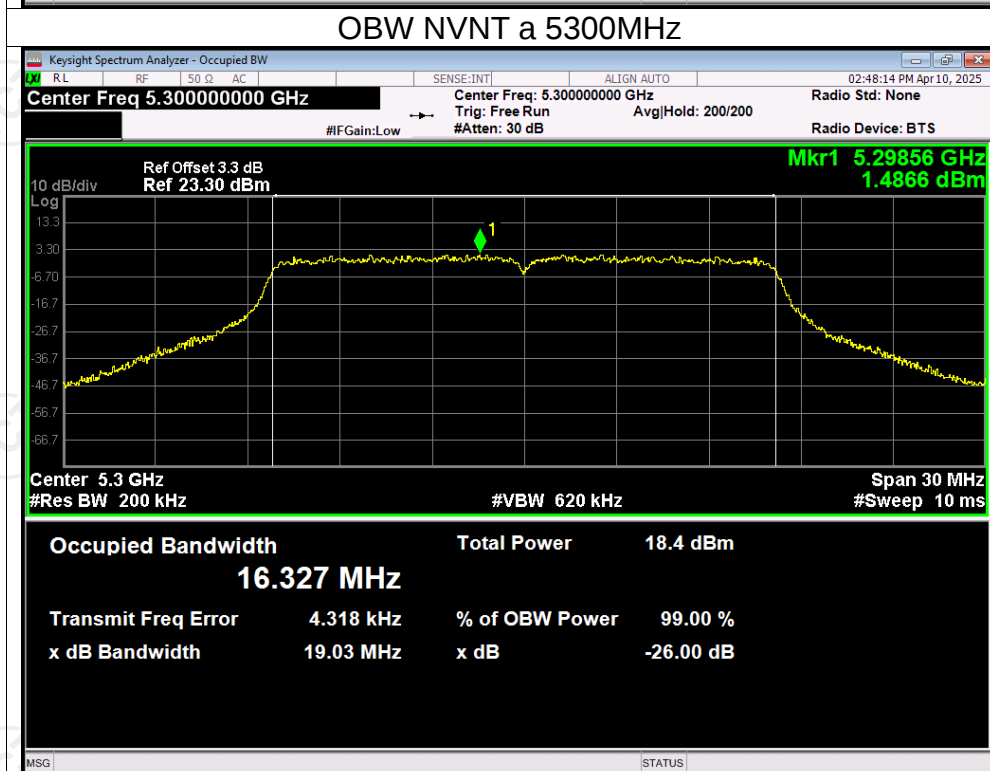
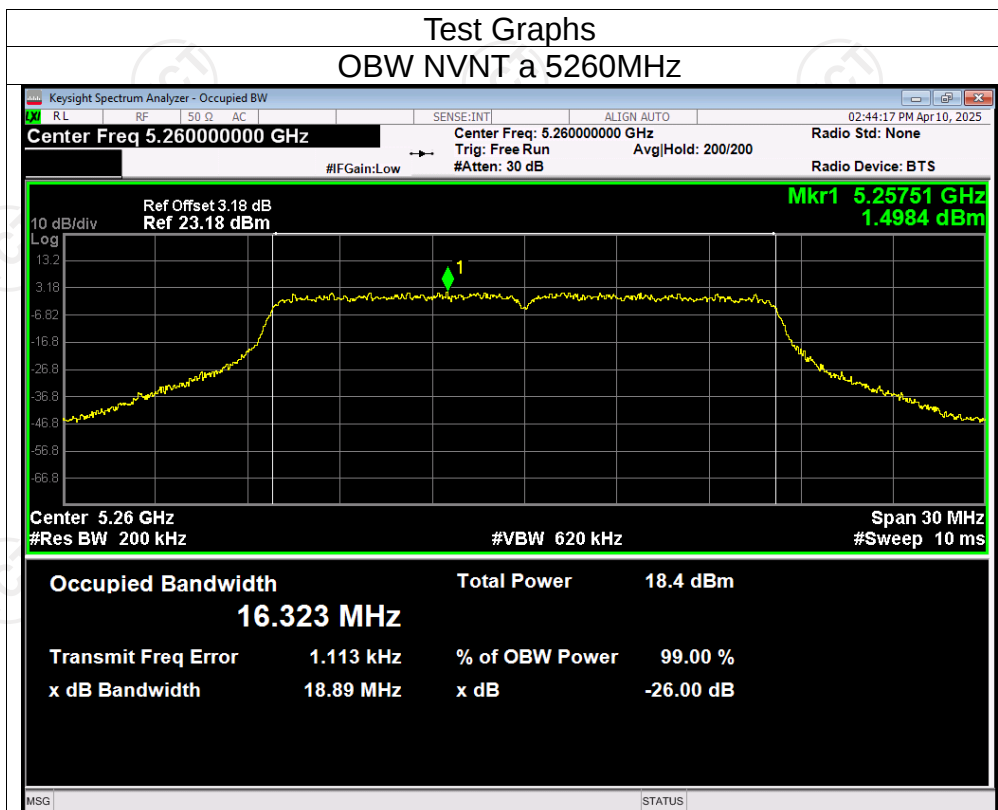




OBW NVNT a 5320MHz

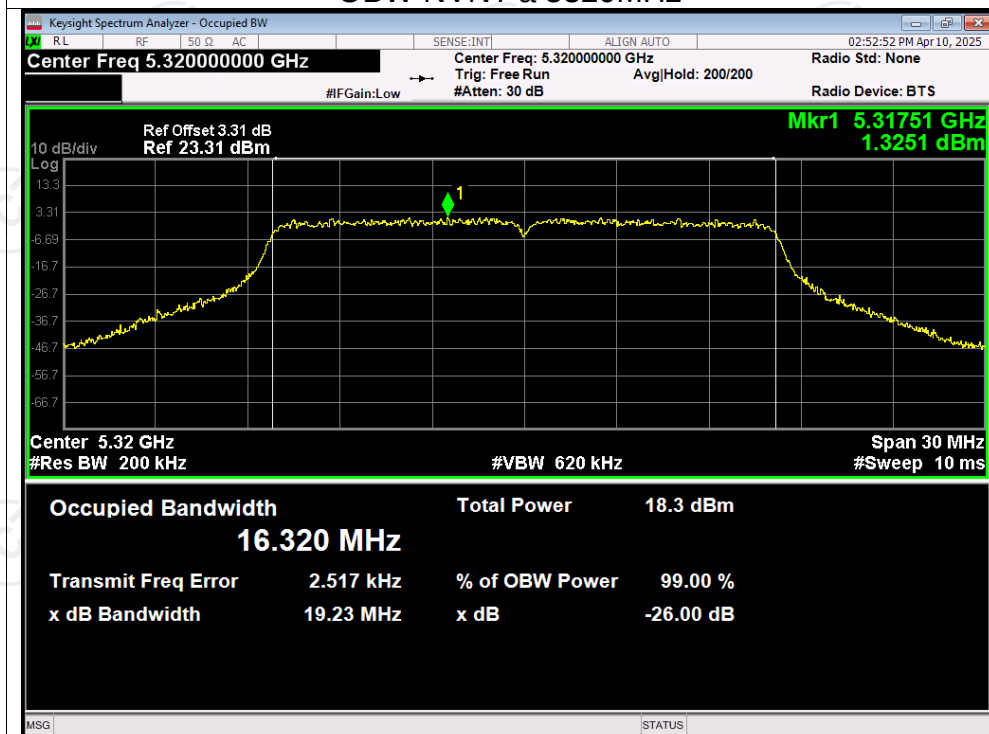

OBW NVNT n20 5260MHz

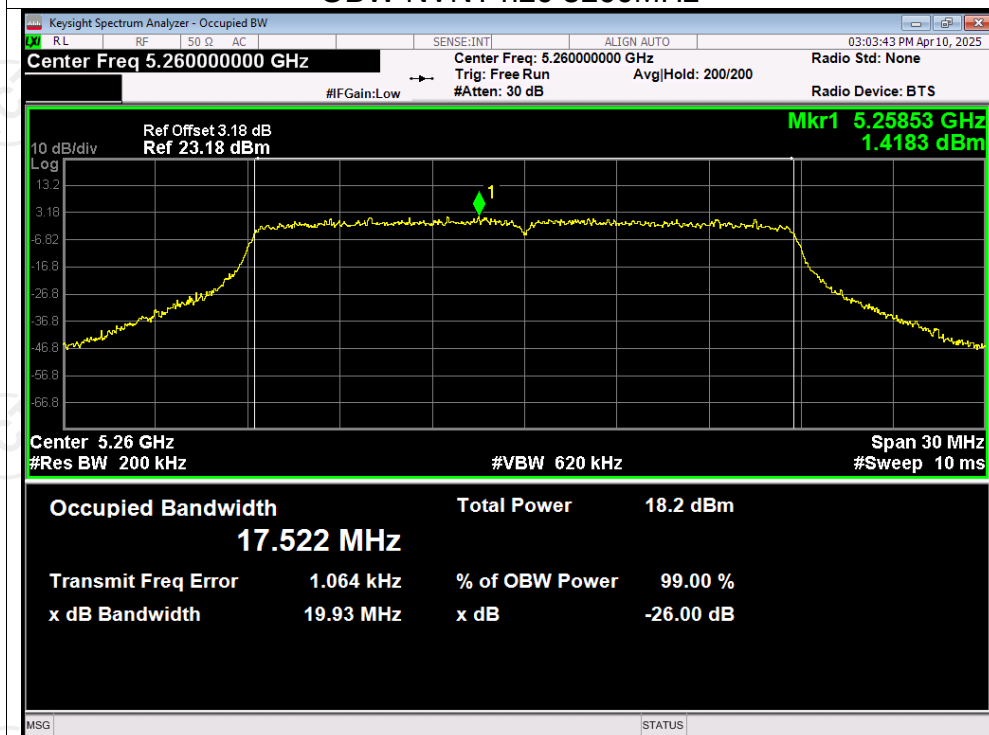


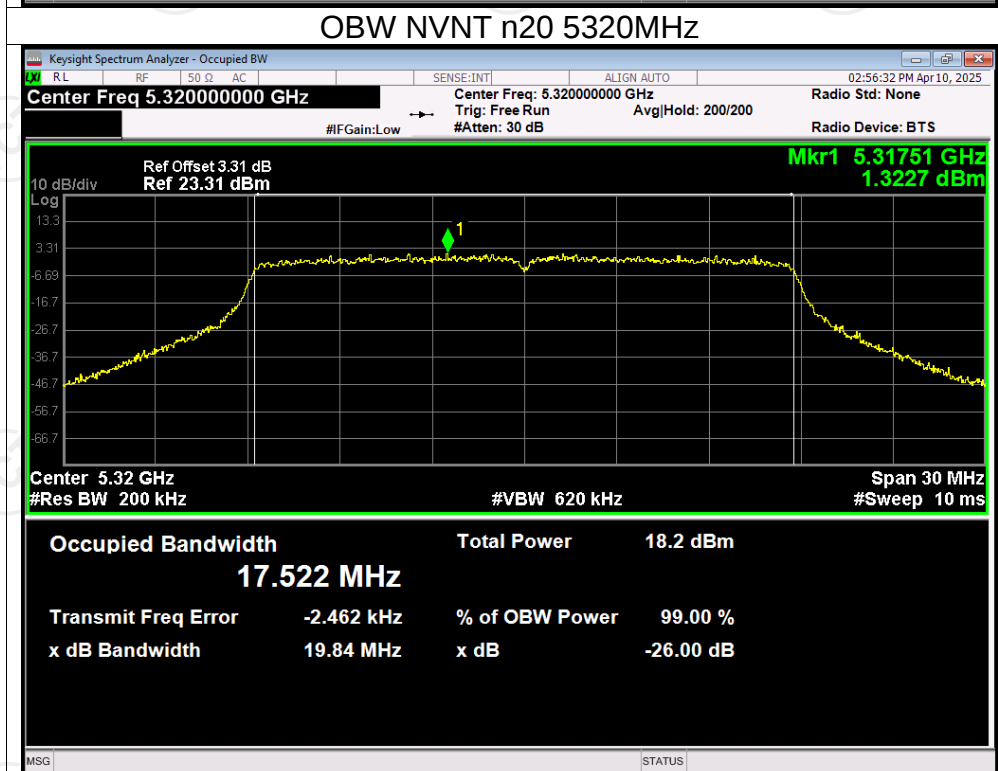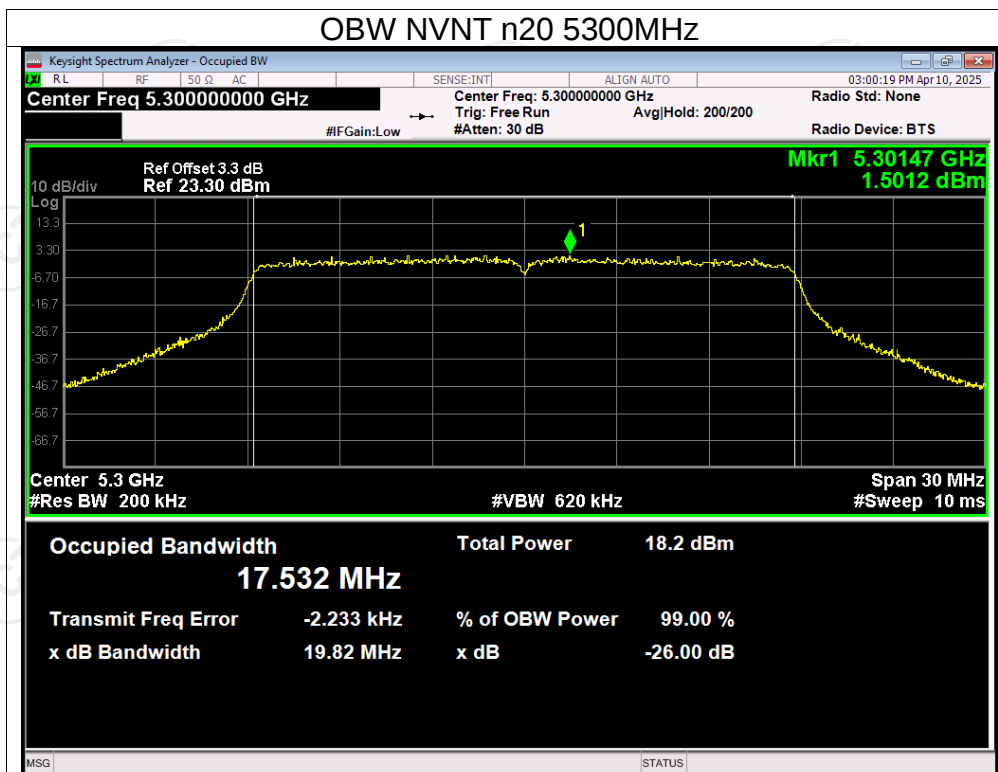

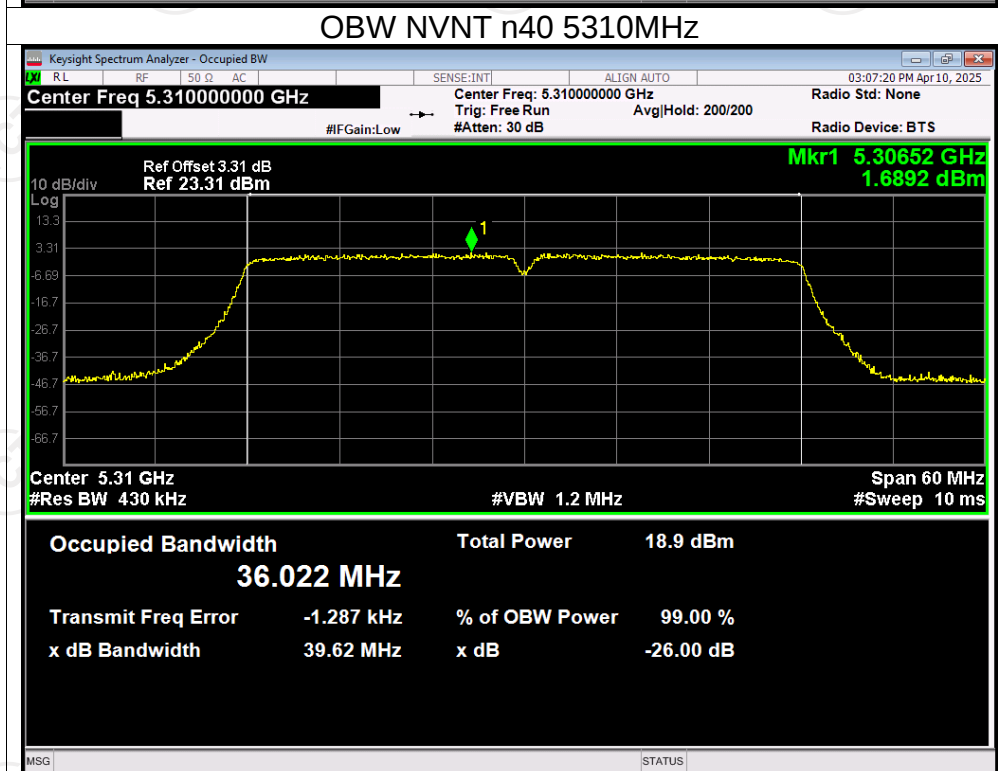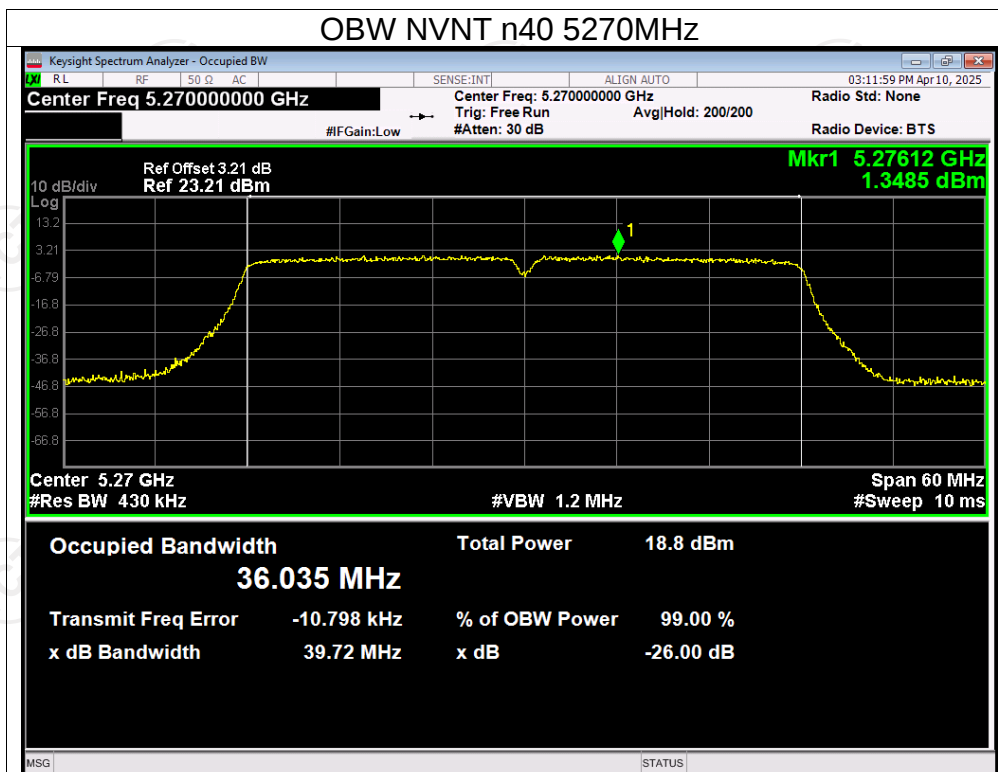




Test Graphs



OBW NVNT a 5500MHz


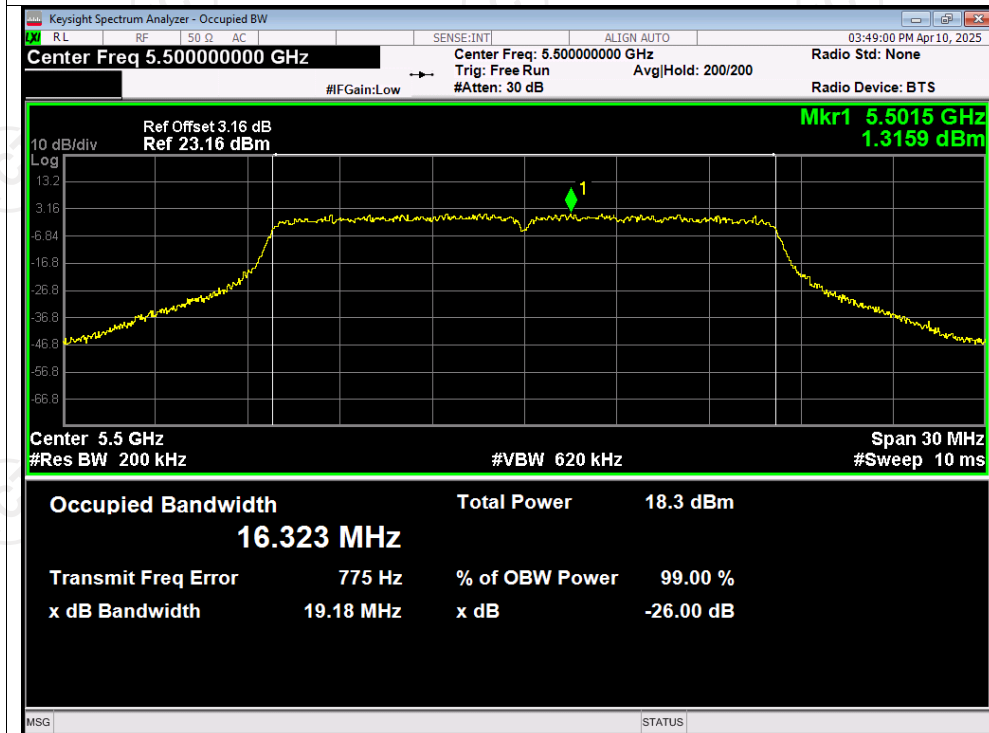




OBW NVNT a 5580MHz

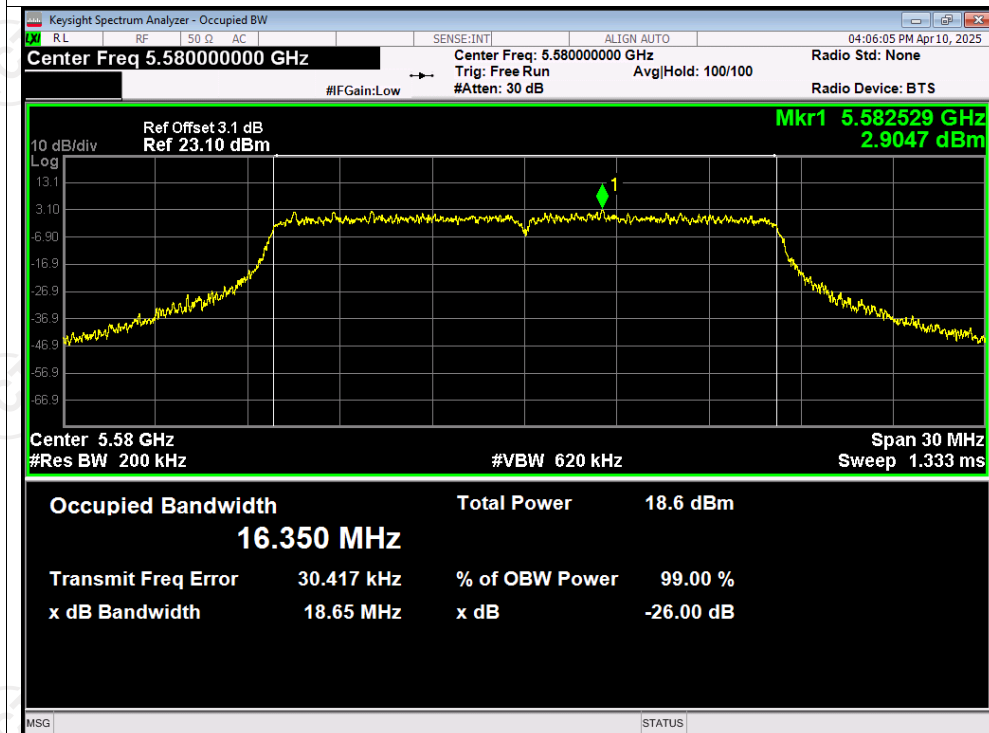


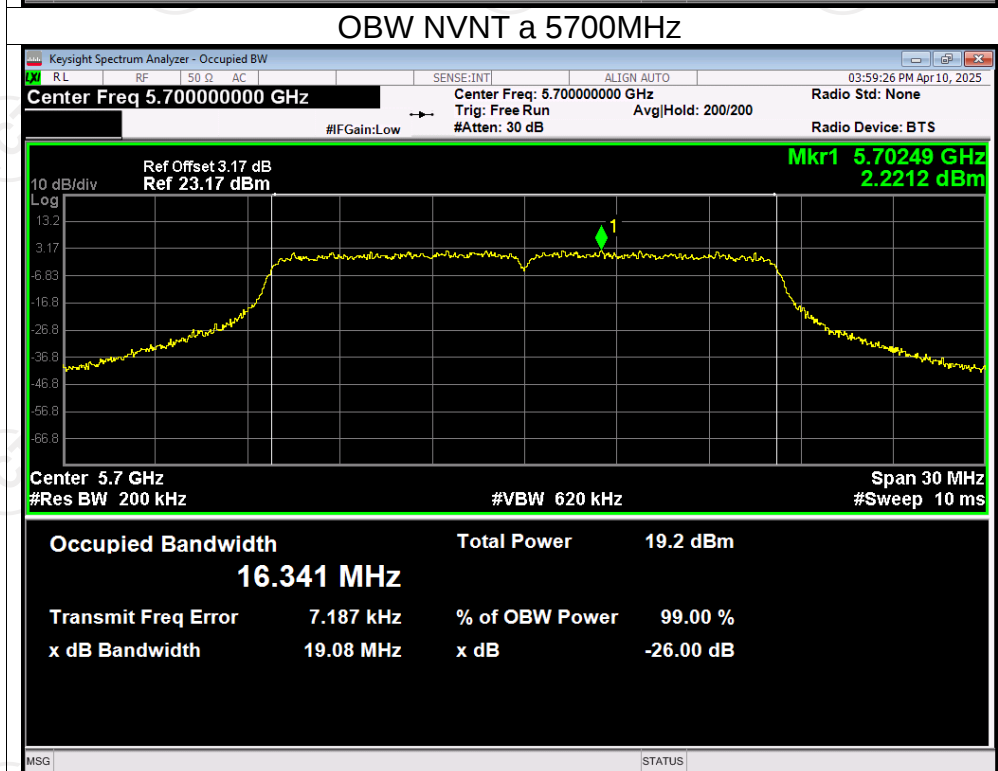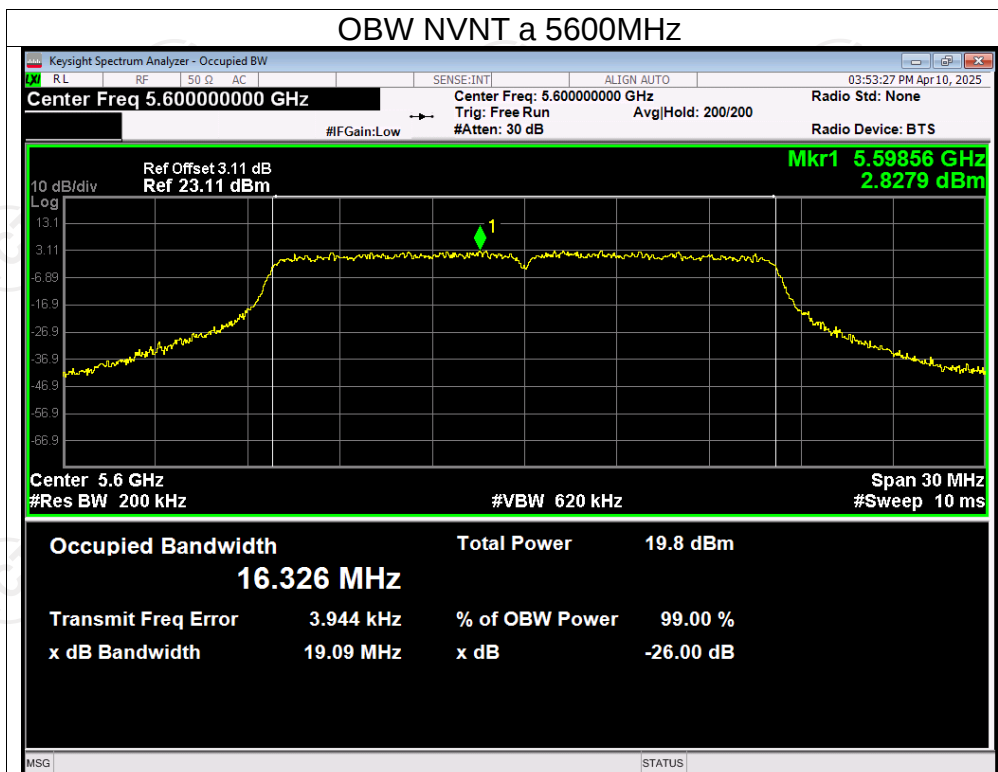

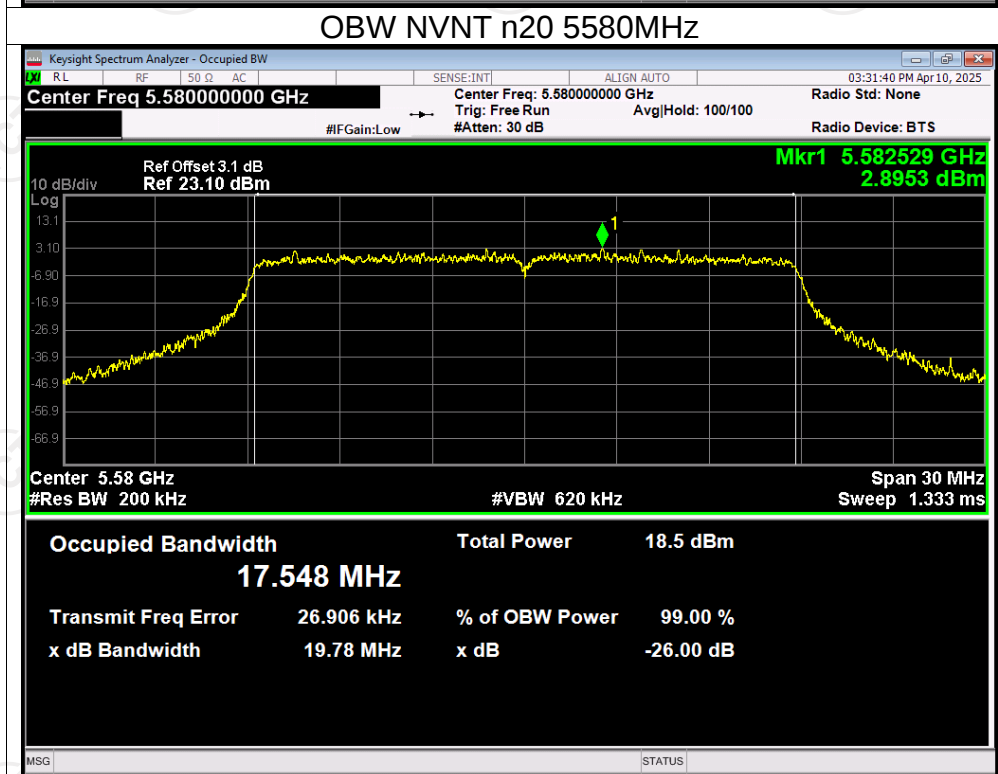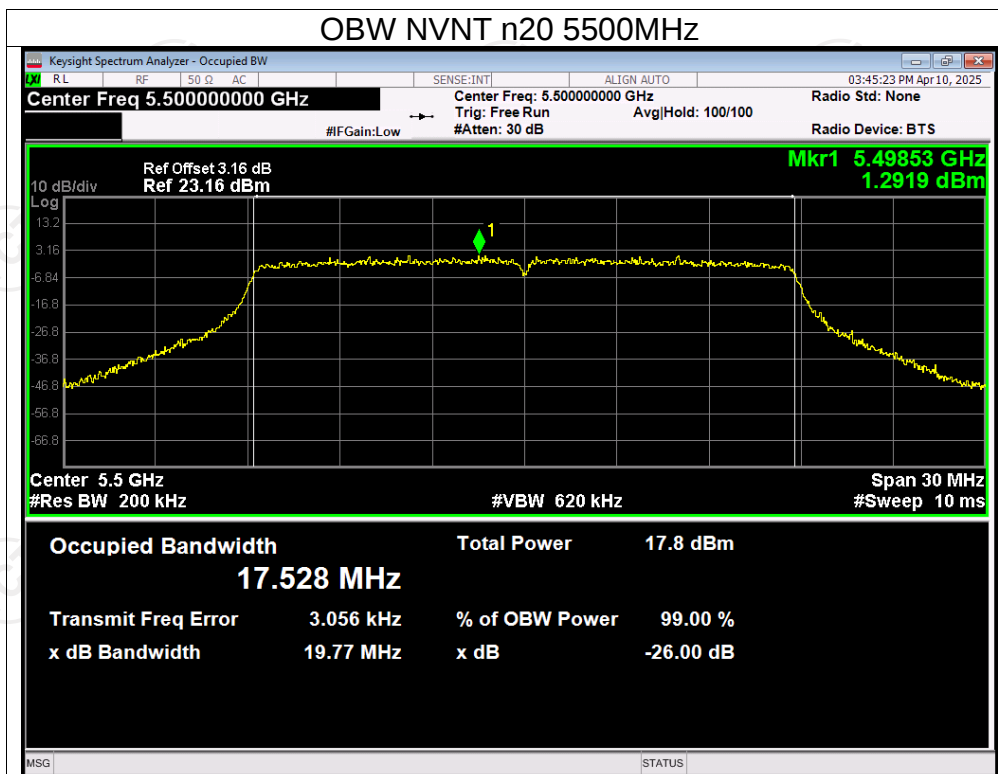

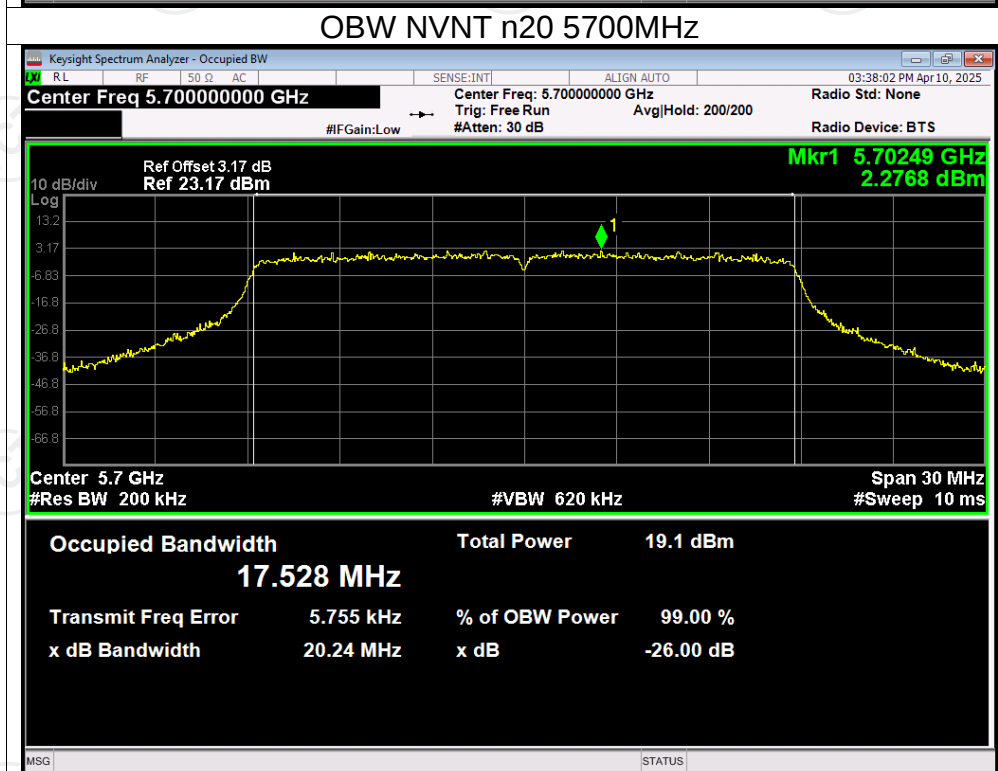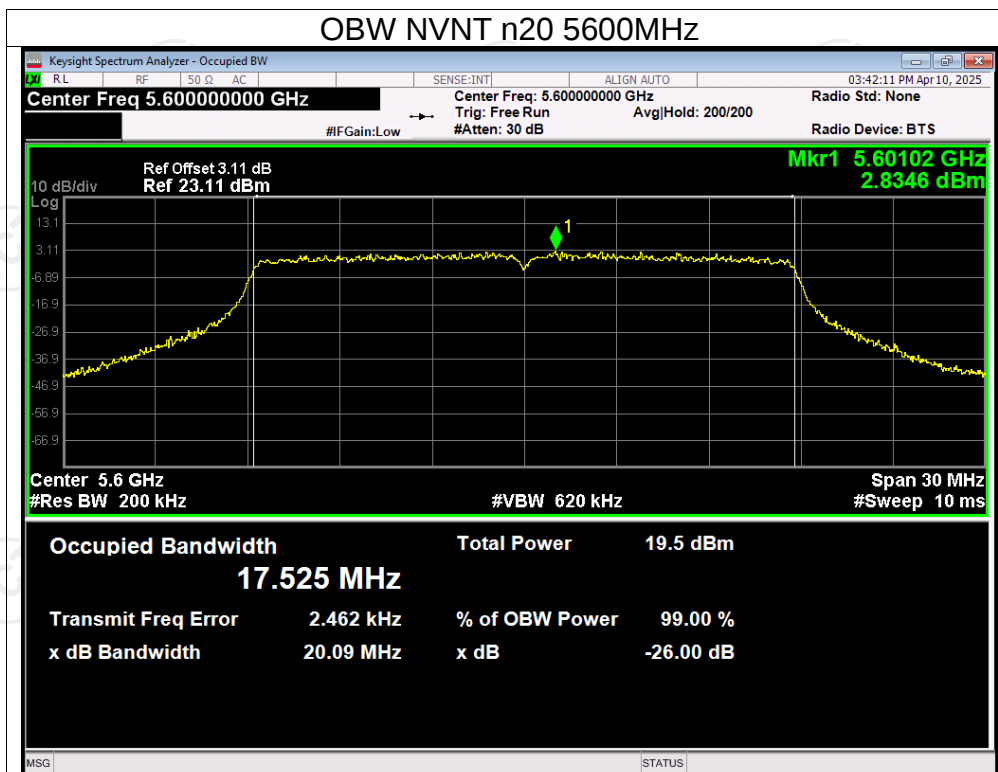


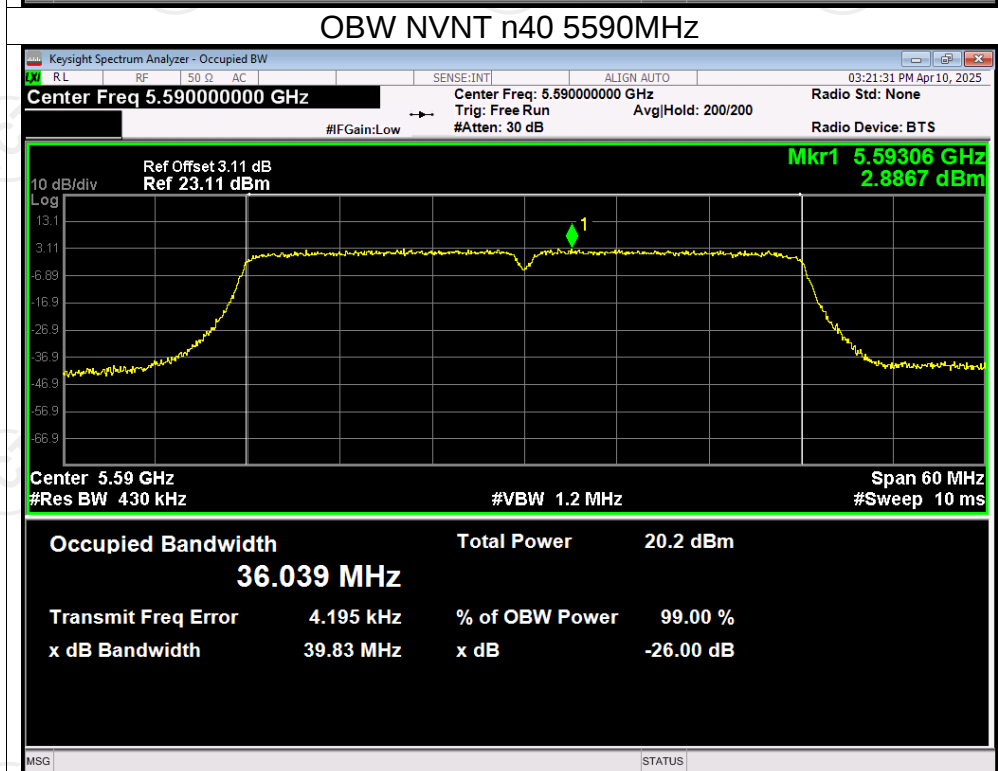
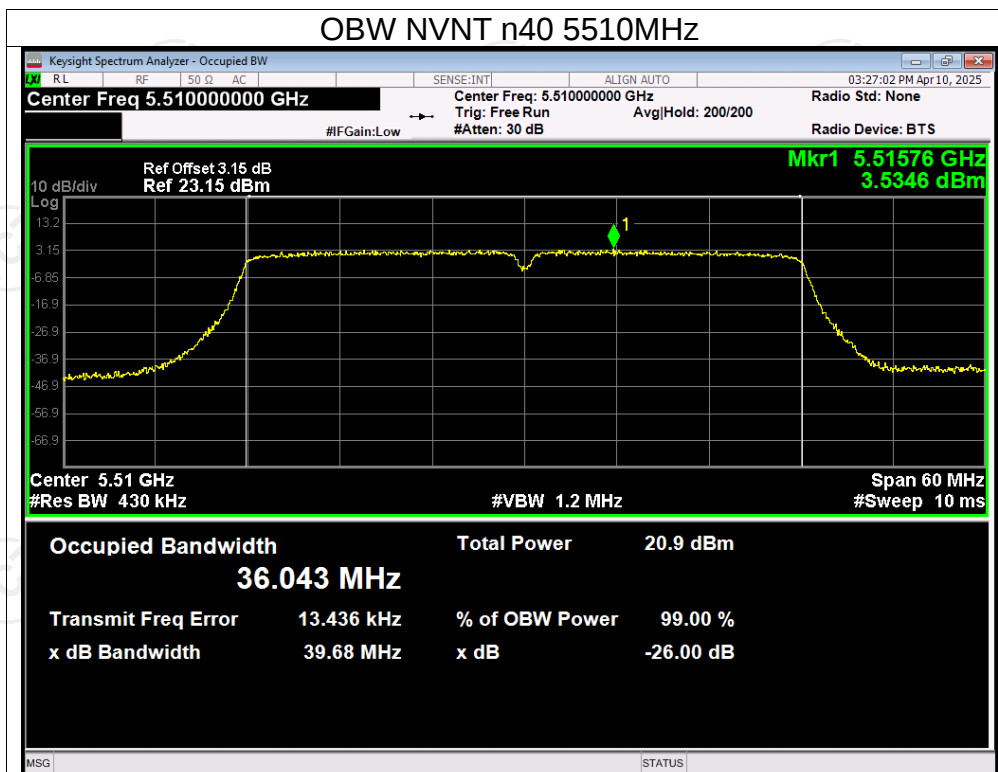



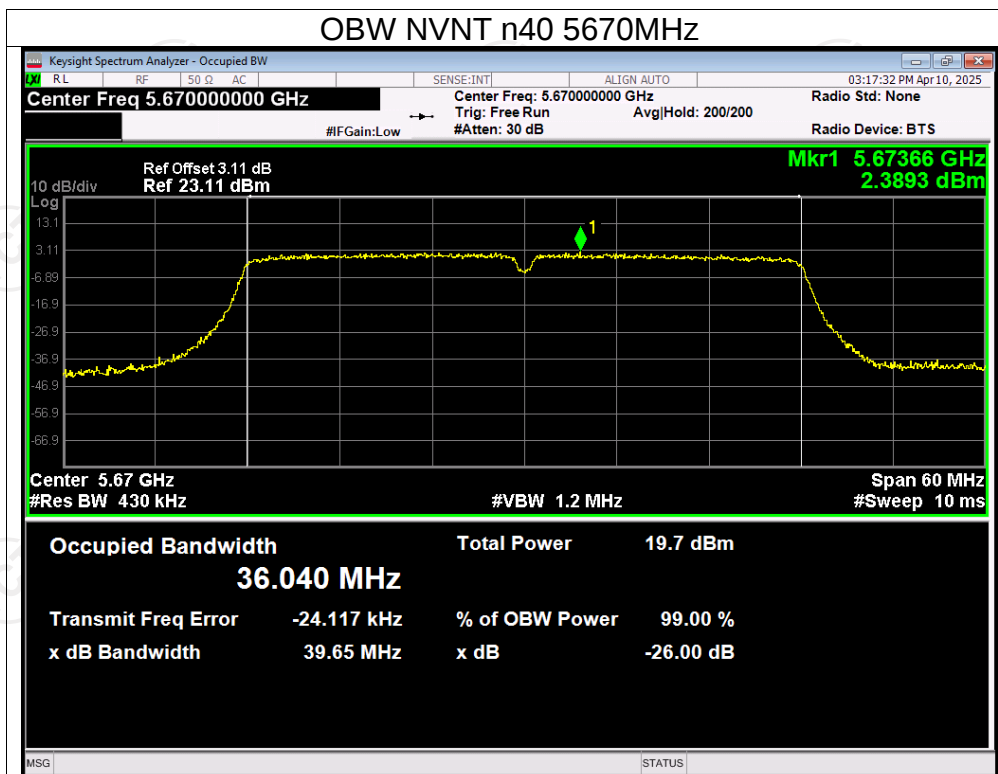




Test Graphs


OBW NVNT a 5745MHz

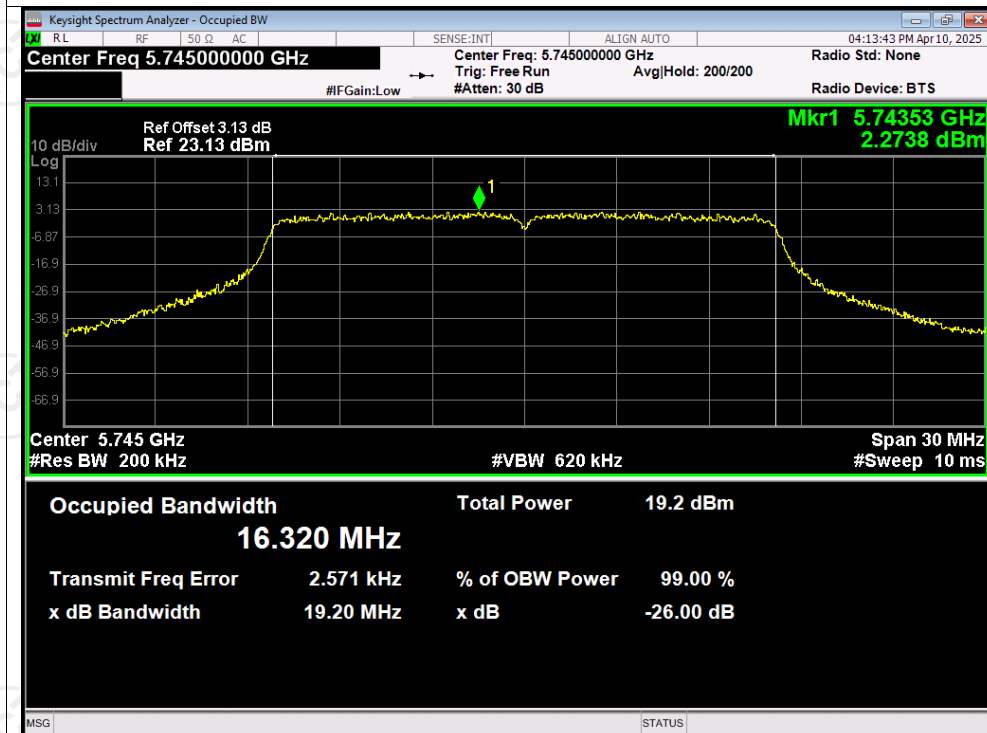

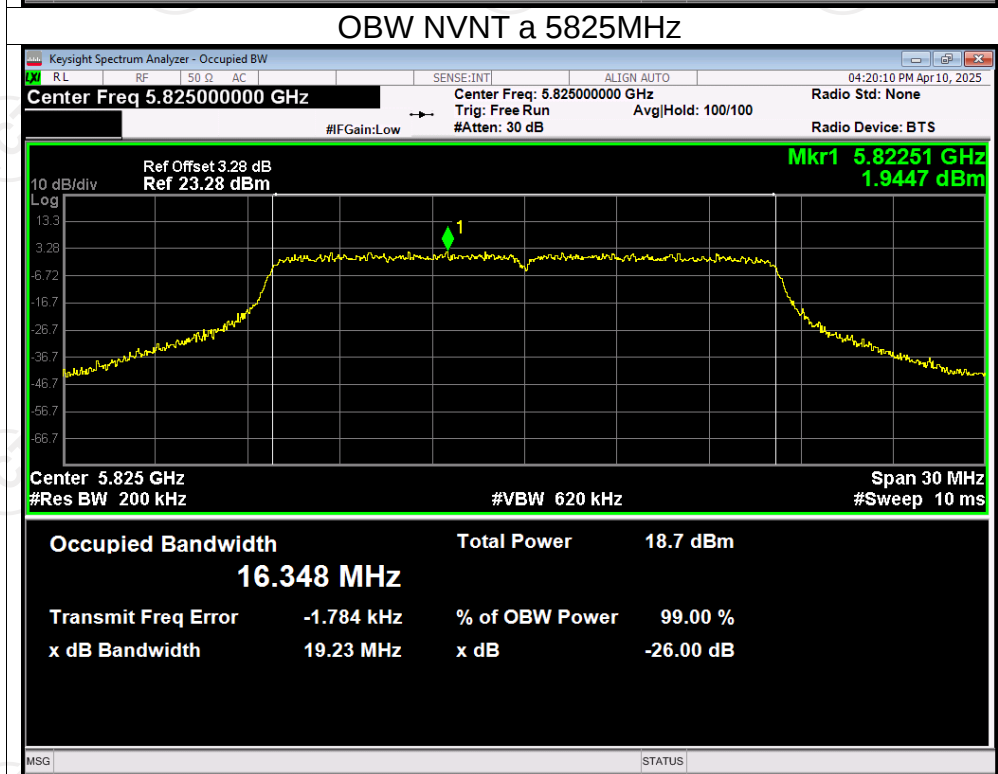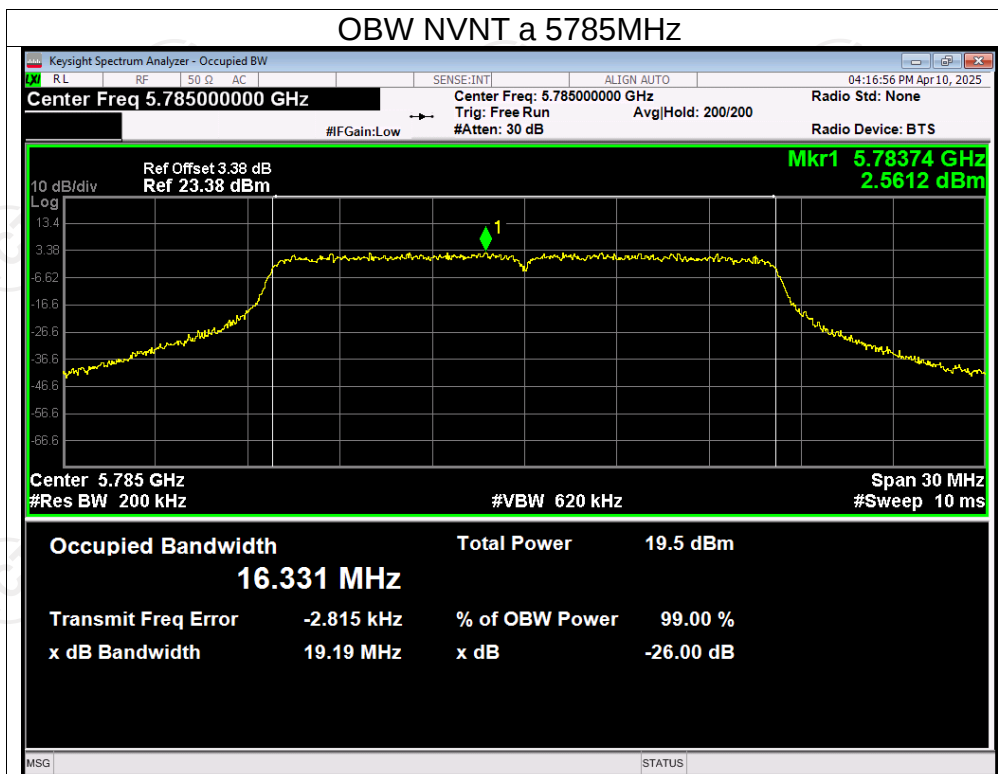

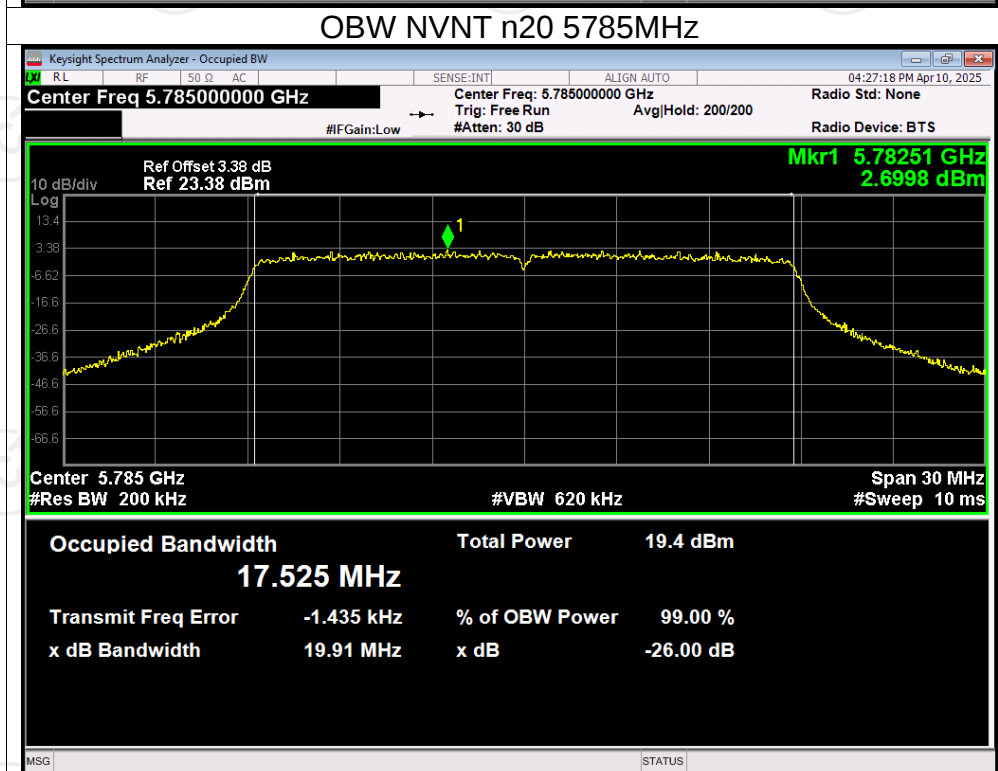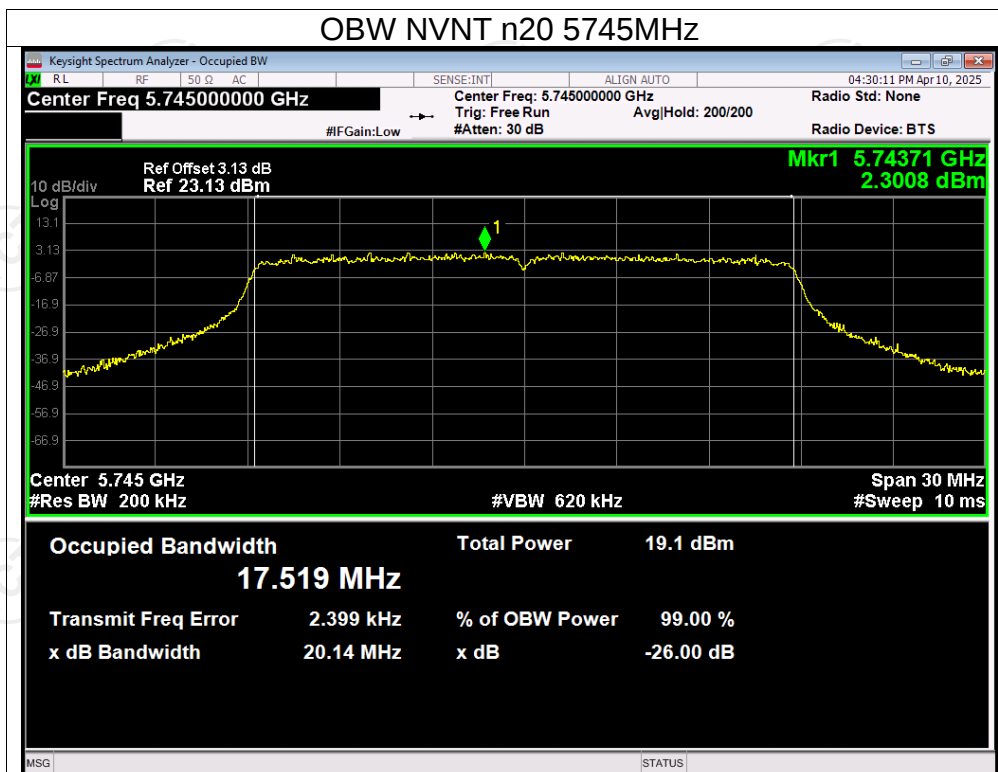

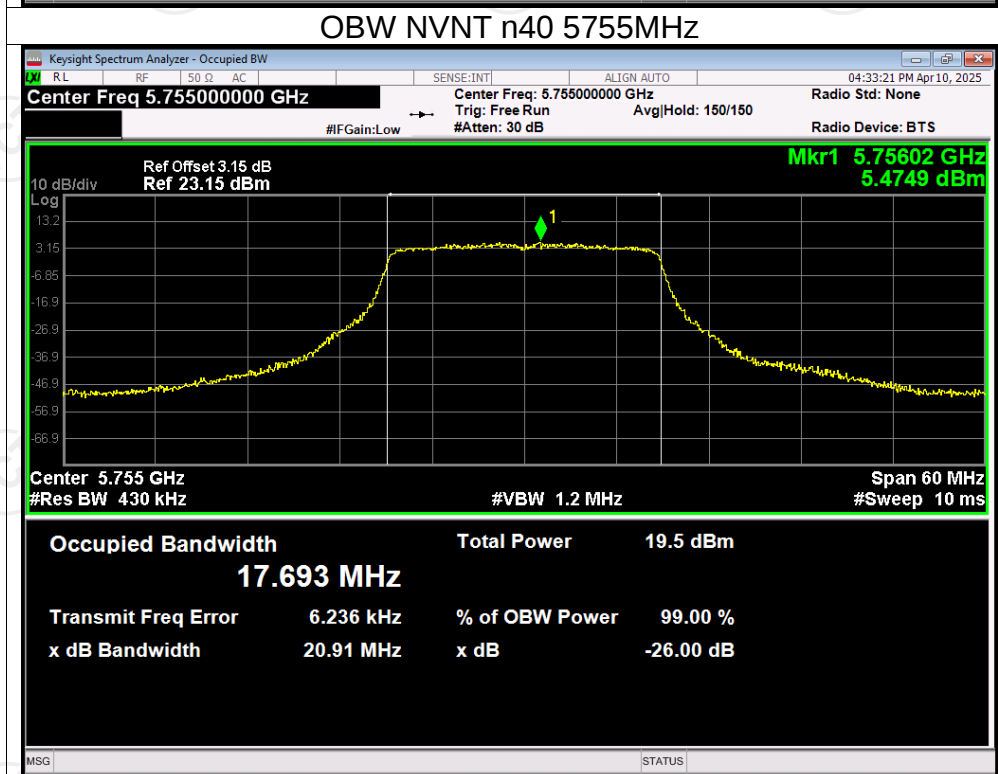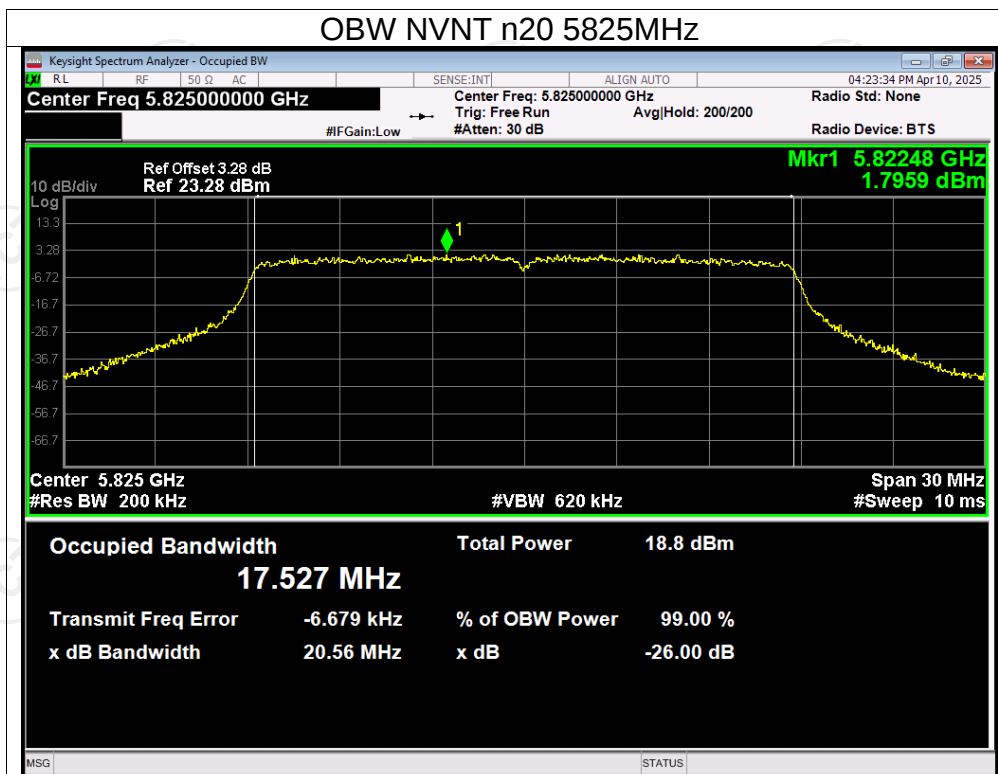

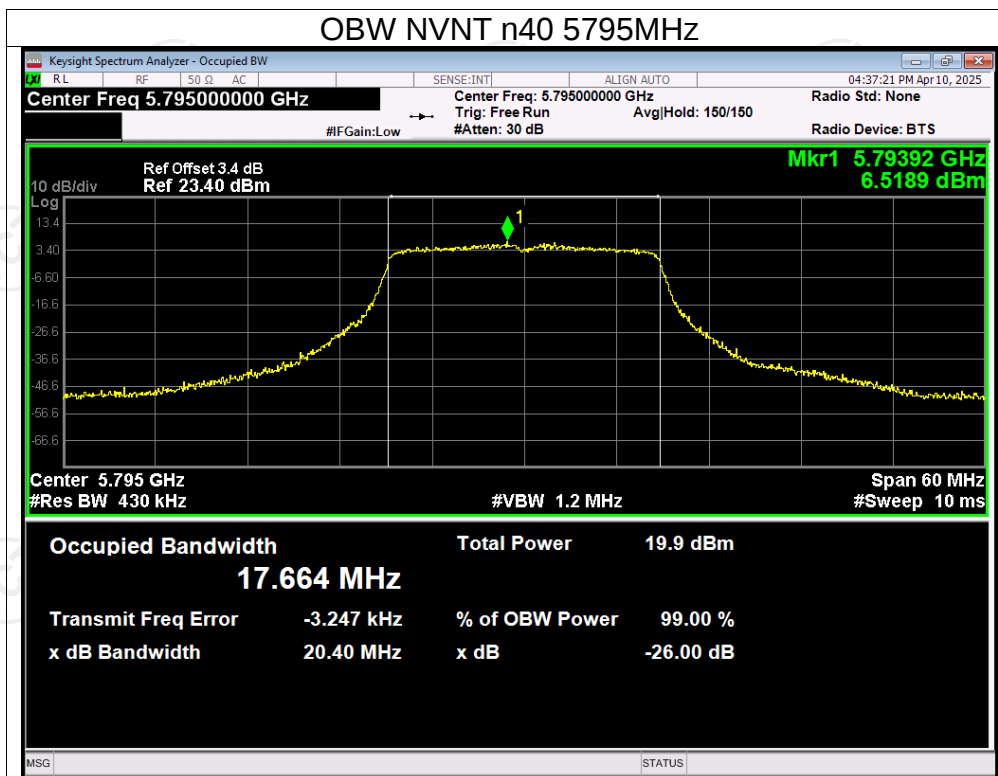


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	0	11	Pass
NVNT	a	5200	0.22	11	Pass
NVNT	a	5240	0.21	11	Pass
NVNT	n20	5180	-0.53	11	Pass
NVNT	n20	5200	-0.4	11	Pass
NVNT	n20	5240	-0.08	11	Pass
NVNT	n40	5190	-3.26	11	Pass
NVNT	n40	5230	-3.16	11	Pass
NVNT	a	5260	0.2	11	Pass
NVNT	a	5300	0.26	11	Pass
NVNT	a	5320	0.09	11	Pass
NVNT	n20	5260	-0.28	11	Pass
NVNT	n20	5300	-0.28	11	Pass
NVNT	n20	5320	-0.33	11	Pass
NVNT	n40	5270	-3.21	11	Pass
NVNT	n40	5310	-3.13	11	Pass
NVNT	a	5500	0.04	11	Pass
NVNT	a	5580	2.49	11	Pass
NVNT	a	5600	1.54	11	Pass
NVNT	a	5700	1.08	11	Pass
NVNT	n20	5500	-0.35	11	Pass
NVNT	n20	5580	2.03	11	Pass
NVNT	n20	5600	1.05	11	Pass
NVNT	n20	5700	0.5	11	Pass
NVNT	n40	5510	-1.22	11	Pass
NVNT	n40	5590	-1.81	11	Pass
NVNT	n40	5670	-2.39	11	Pass
NVNT	a	5745	-1.74	30	Pass
NVNT	a	5785	-1.49	30	Pass
NVNT	a	5825	-2.05	30	Pass
NVNT	n20	5745	-2.25	30	Pass
NVNT	n20	5785	-1.98	30	Pass
NVNT	n20	5825	-2.53	30	Pass
NVNT	n40	5755	-2.33	30	Pass
NVNT	n40	5795	-2.01	30	Pass



Test Graphs



PSD NVNT a 5180MHz


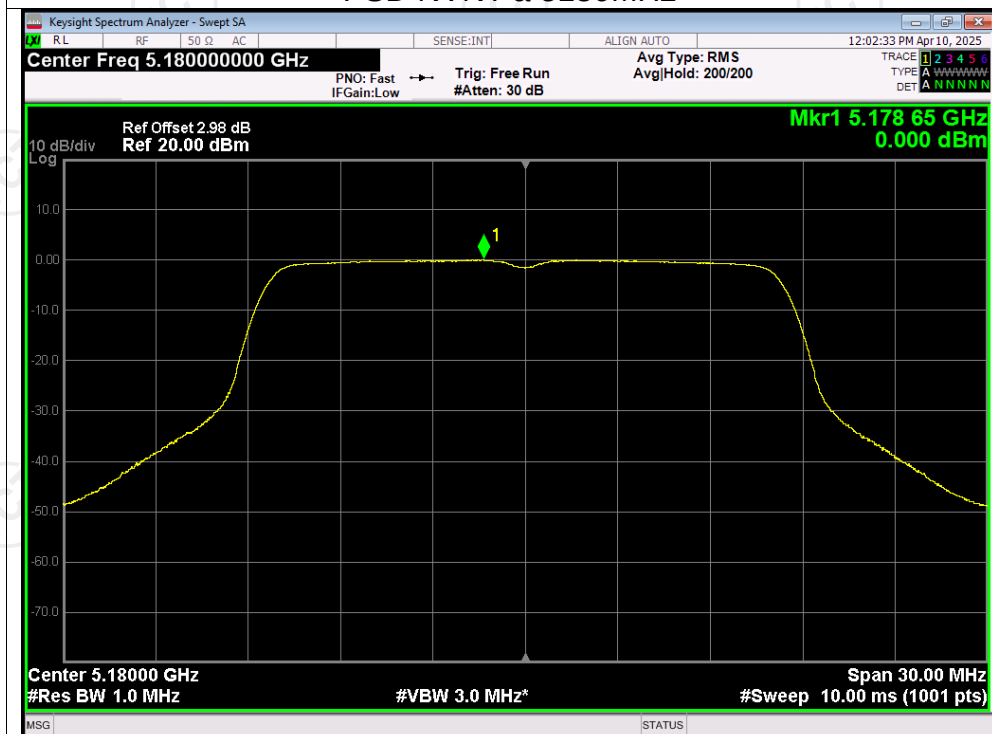


PSD NVNT a 5200MHz

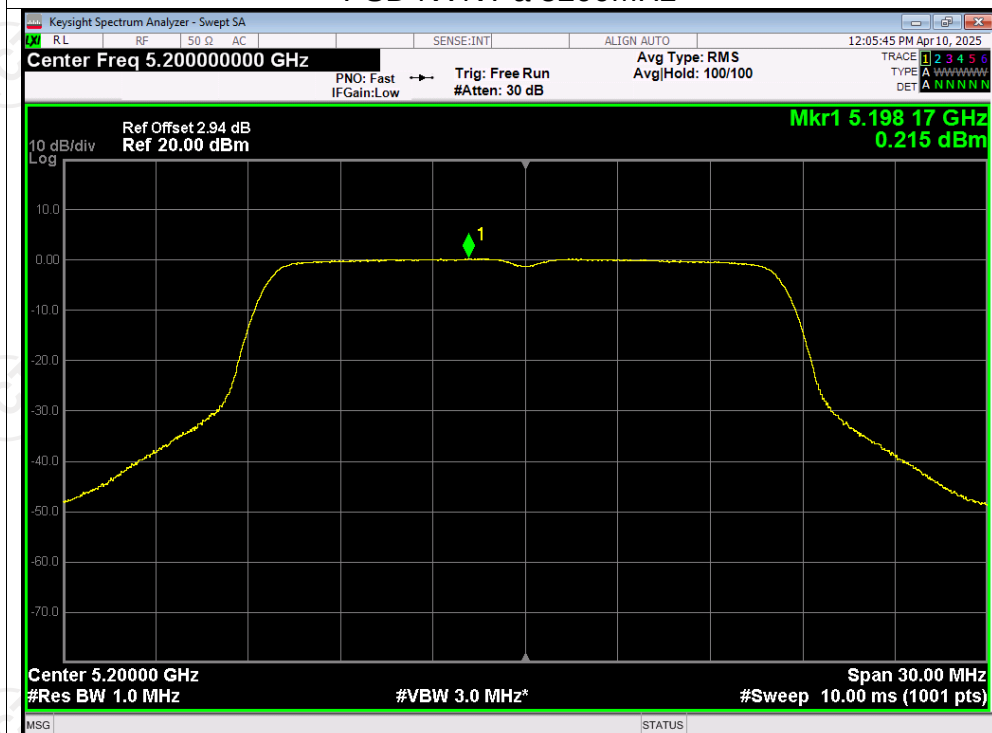

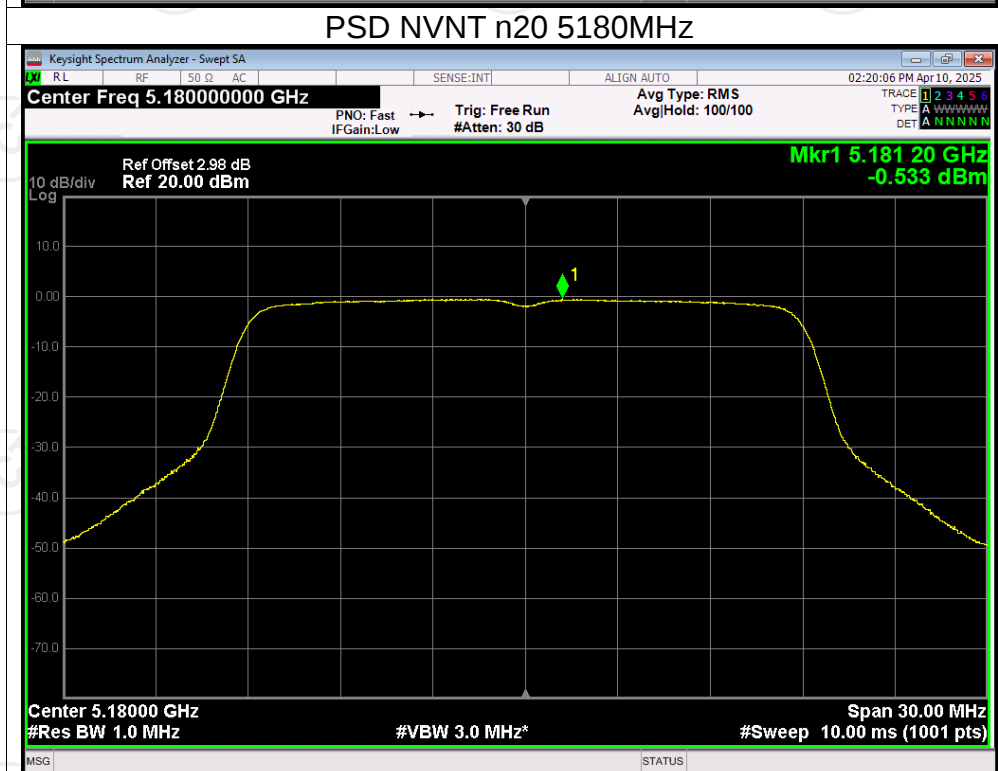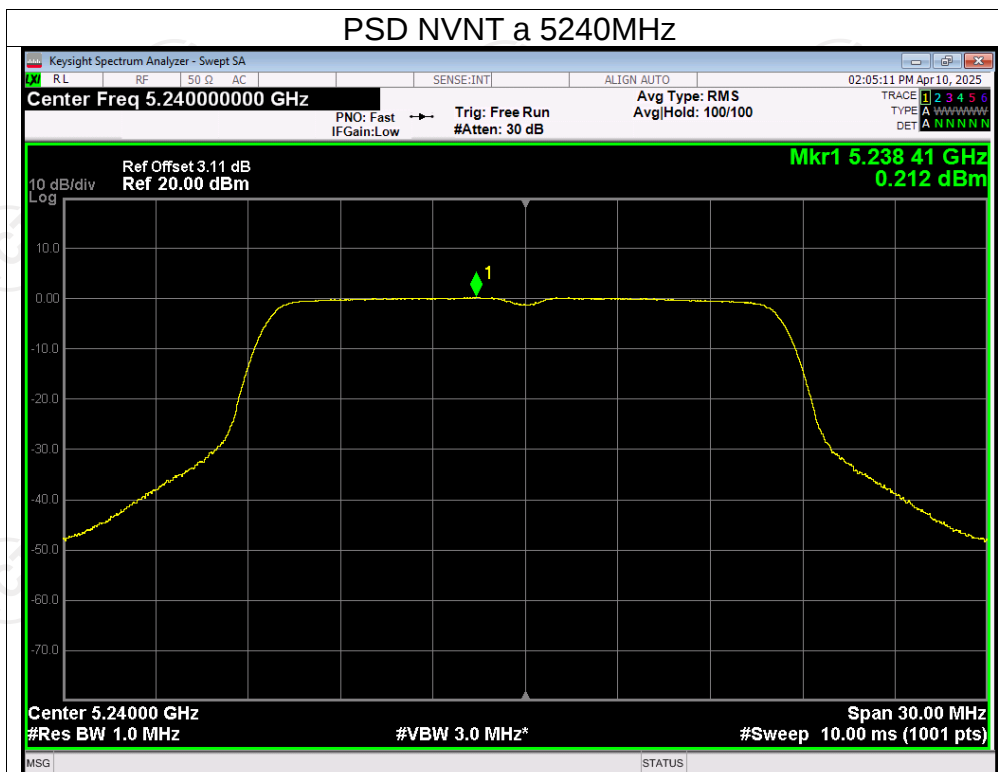


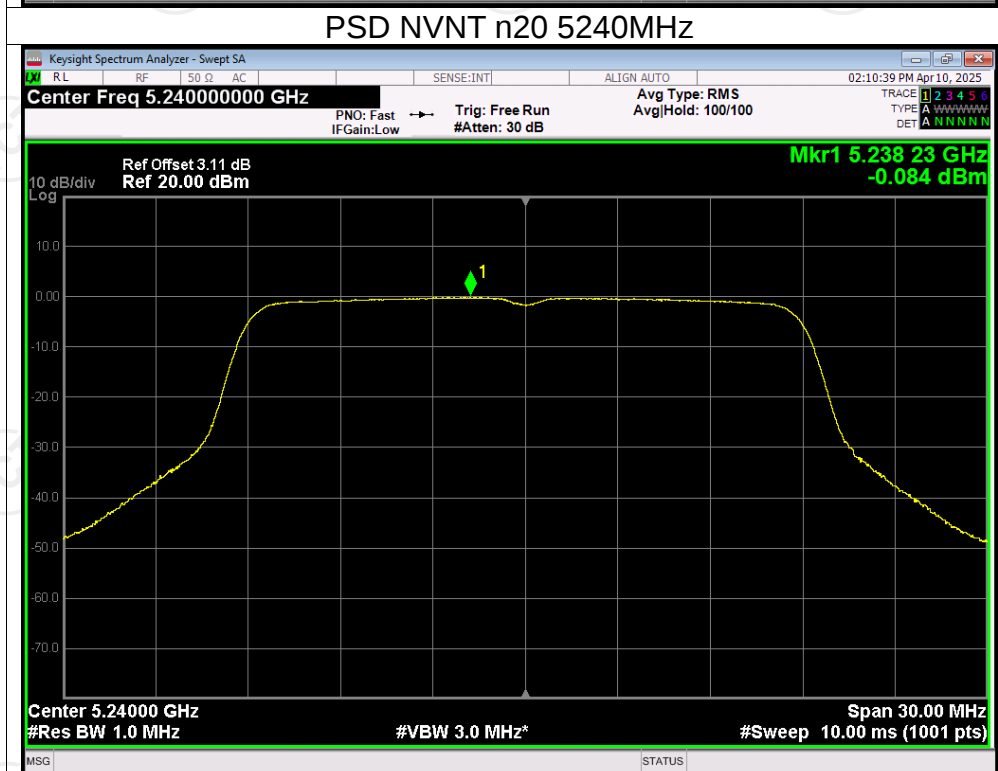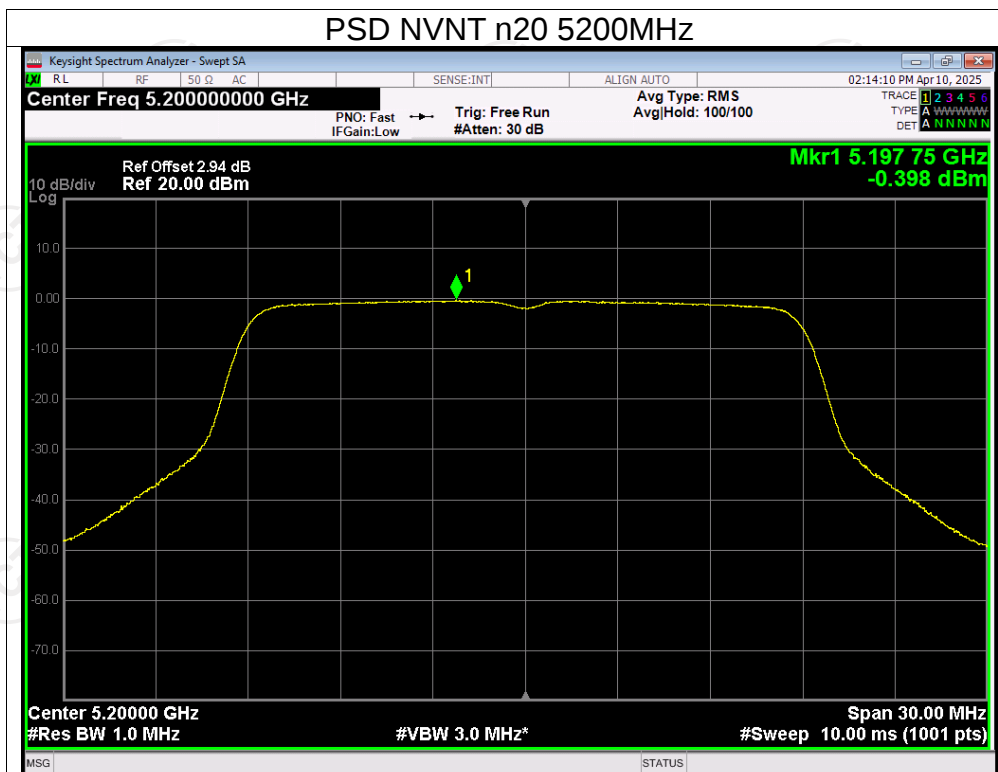

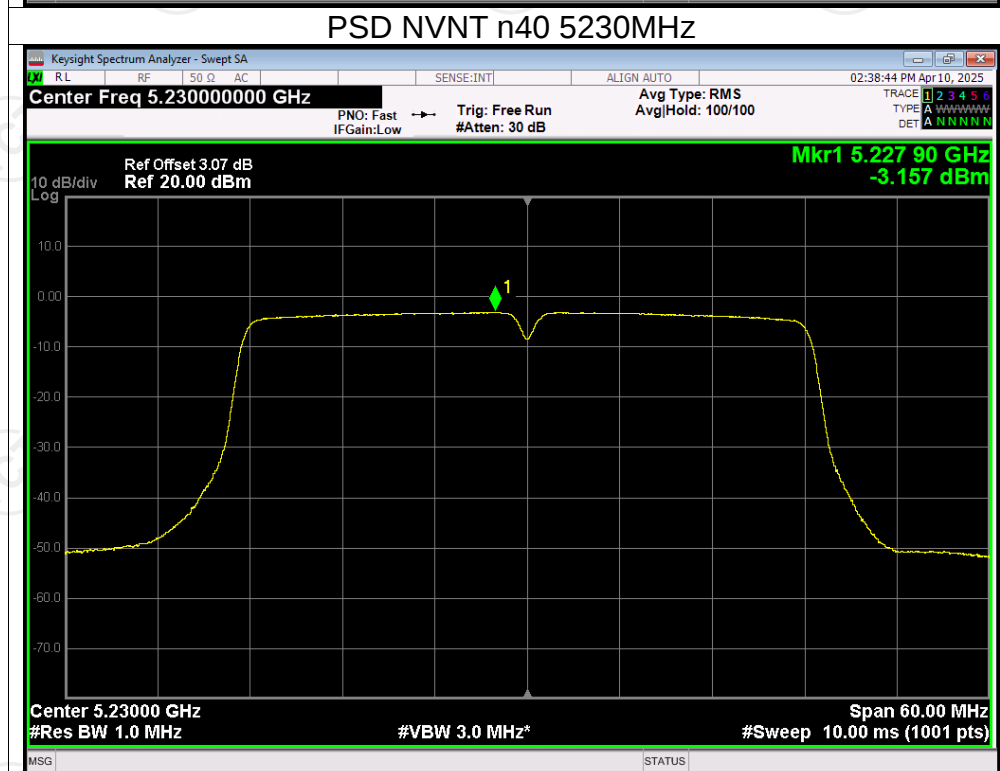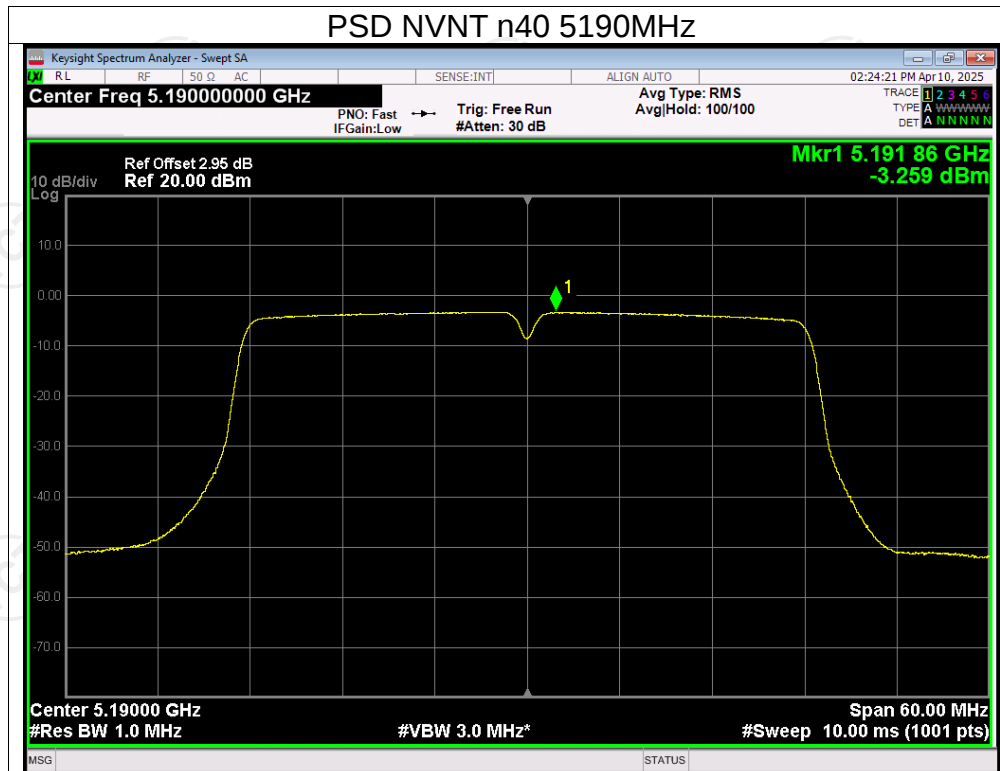




Test Graphs



PSD NVNT a 5260MHz


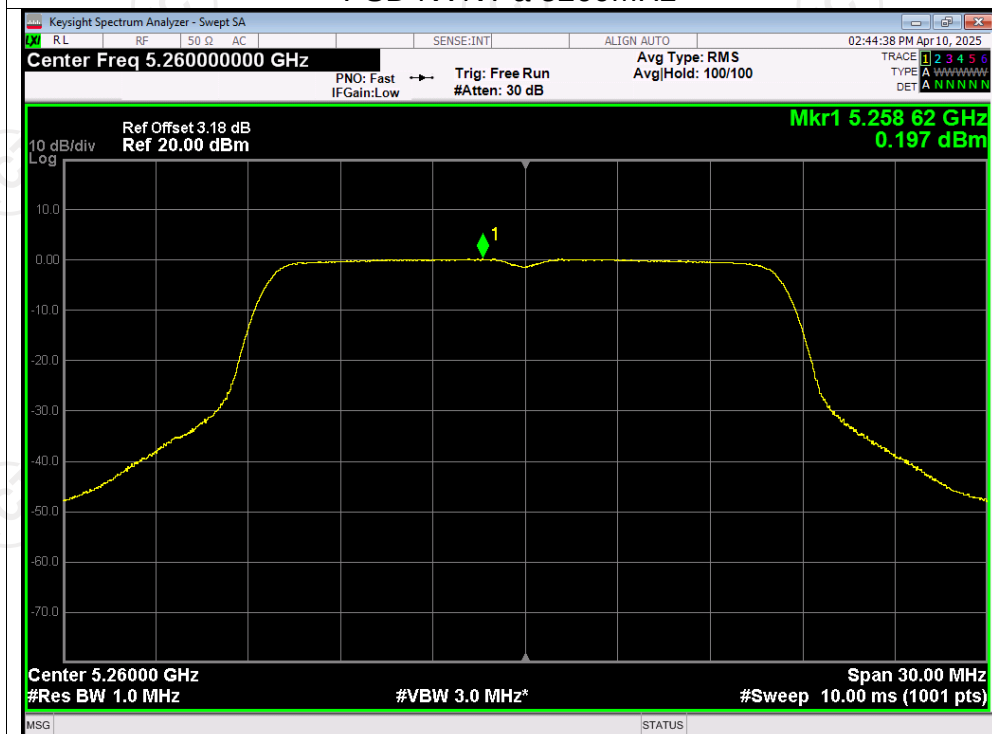


PSD NVNT a 5300MHz

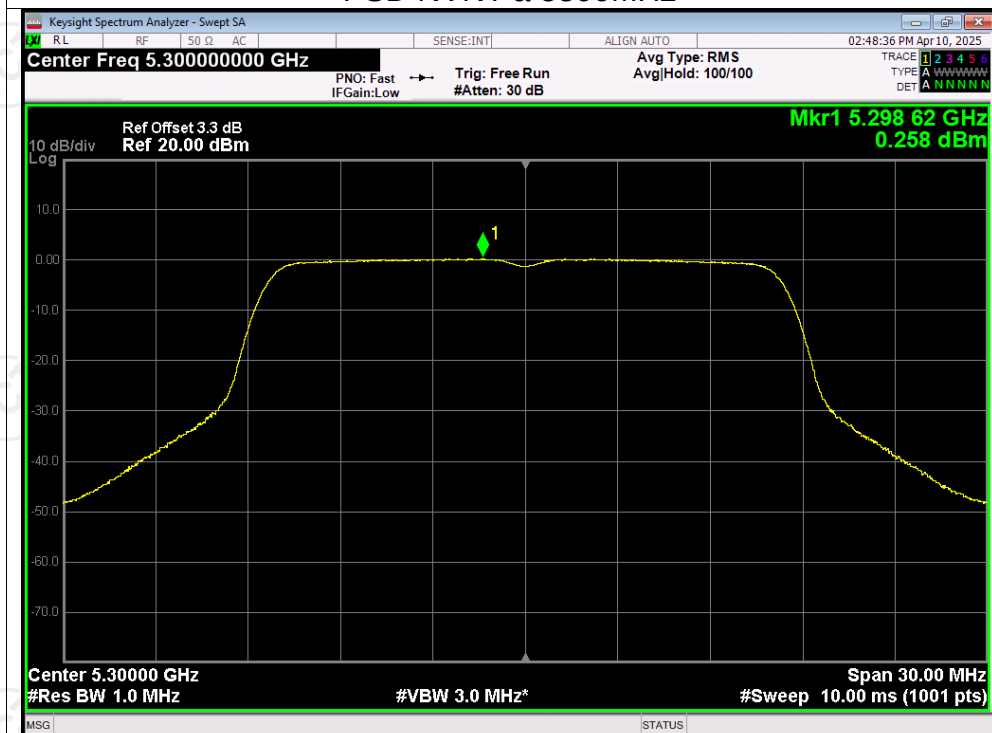

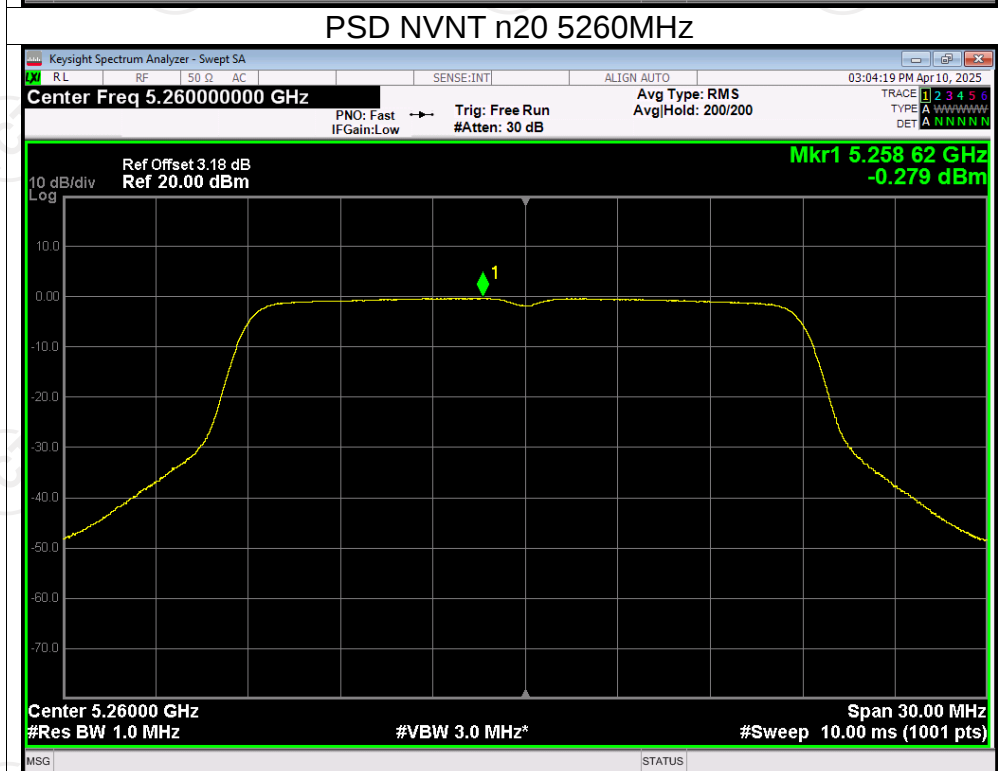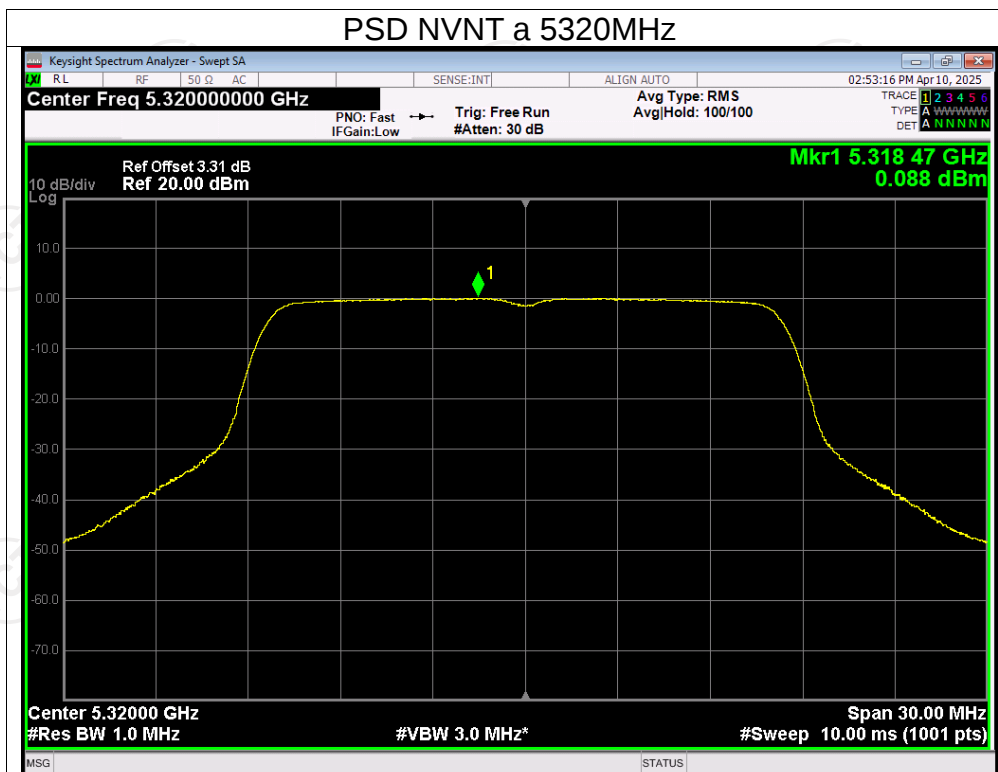


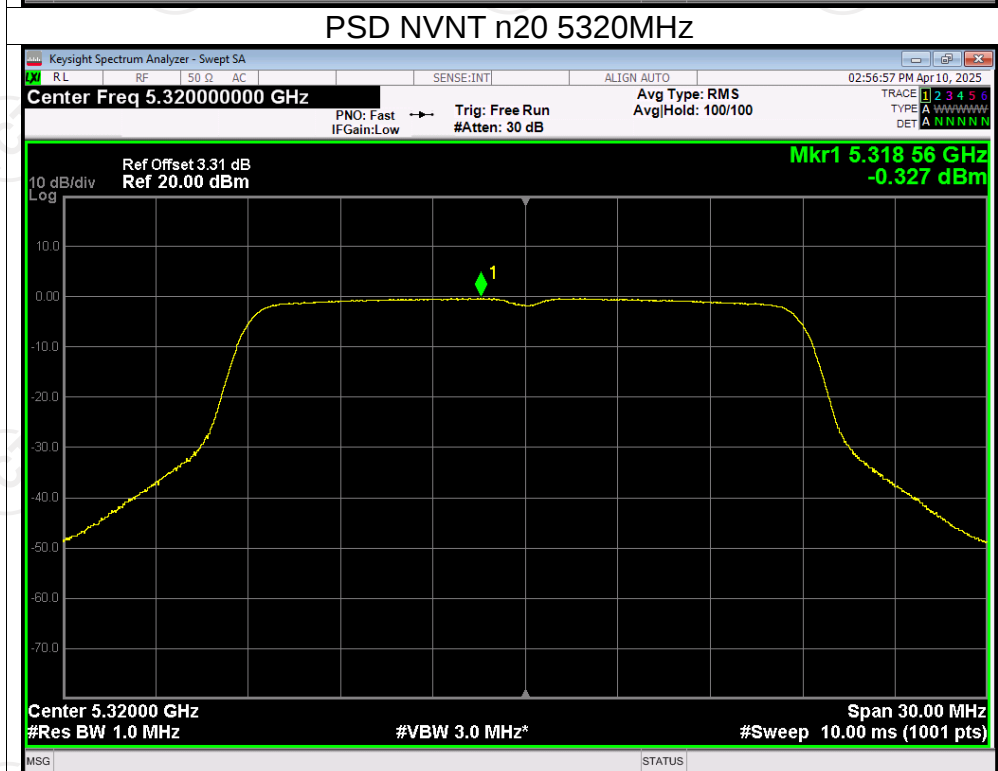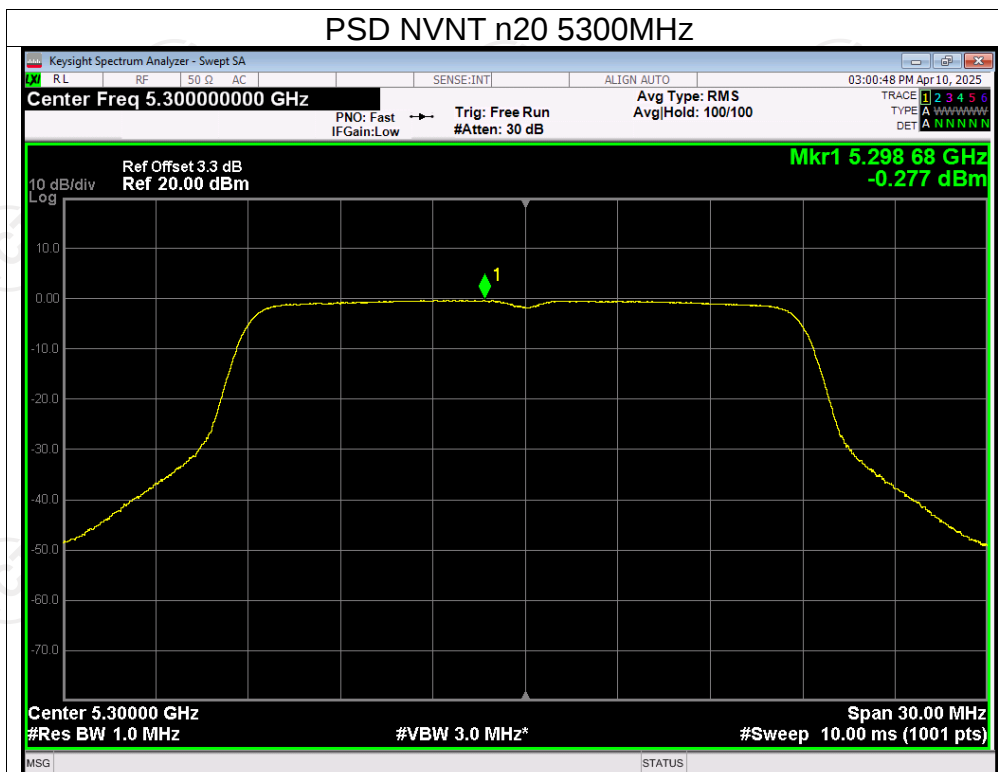

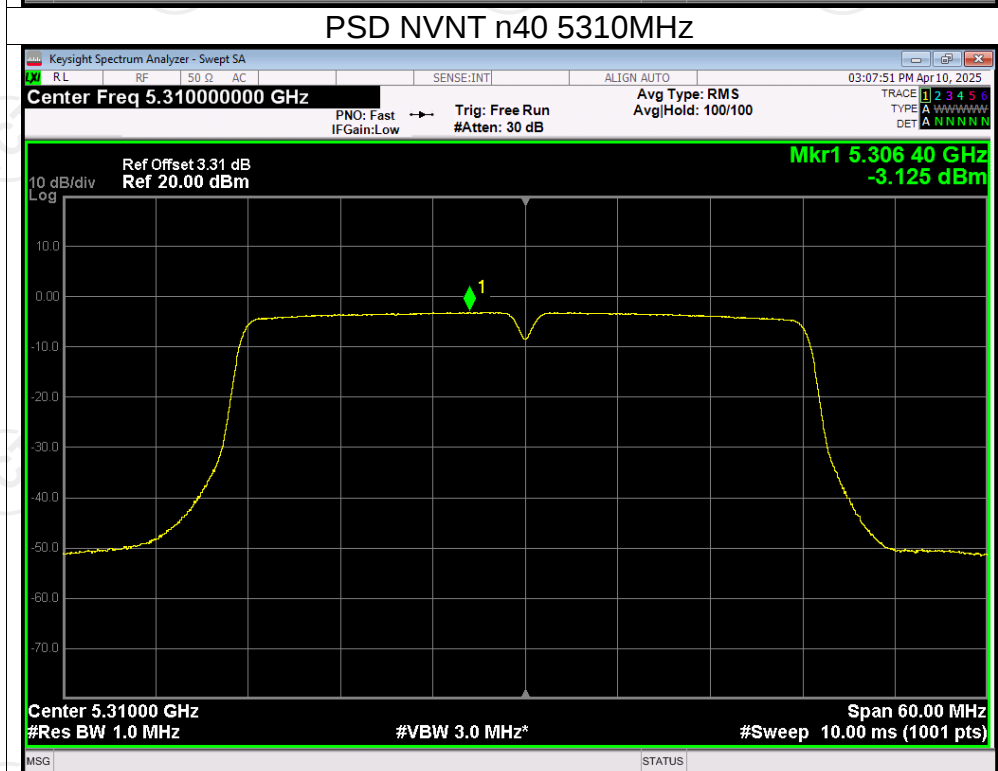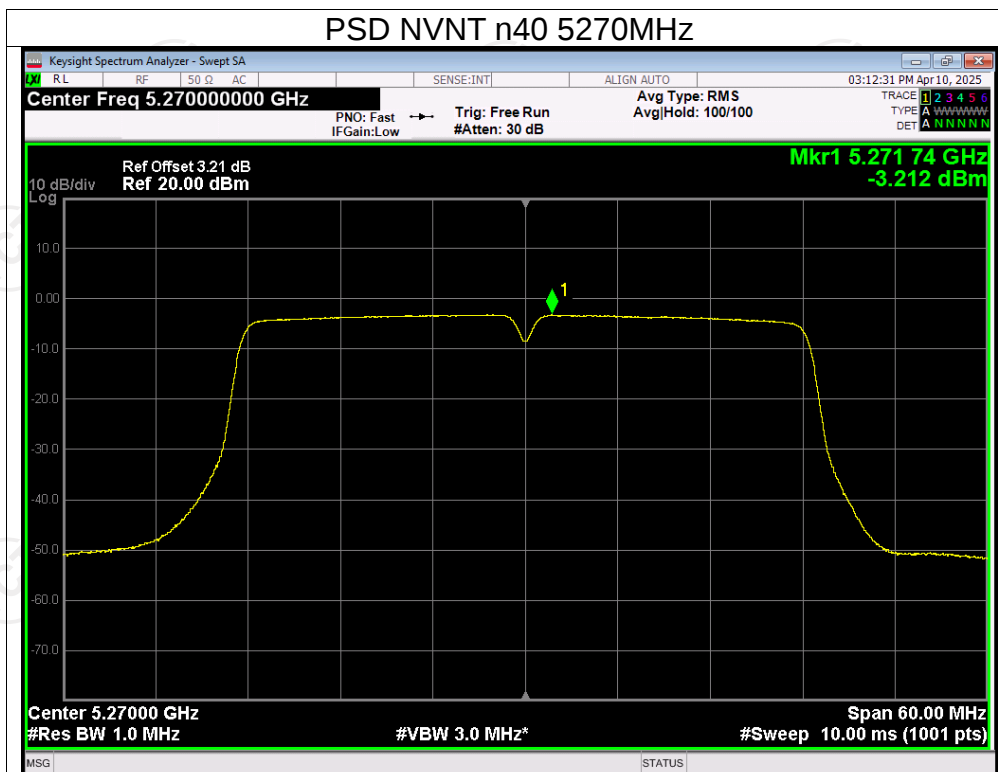




Test Graphs



PSD NVNT a 5500MHz


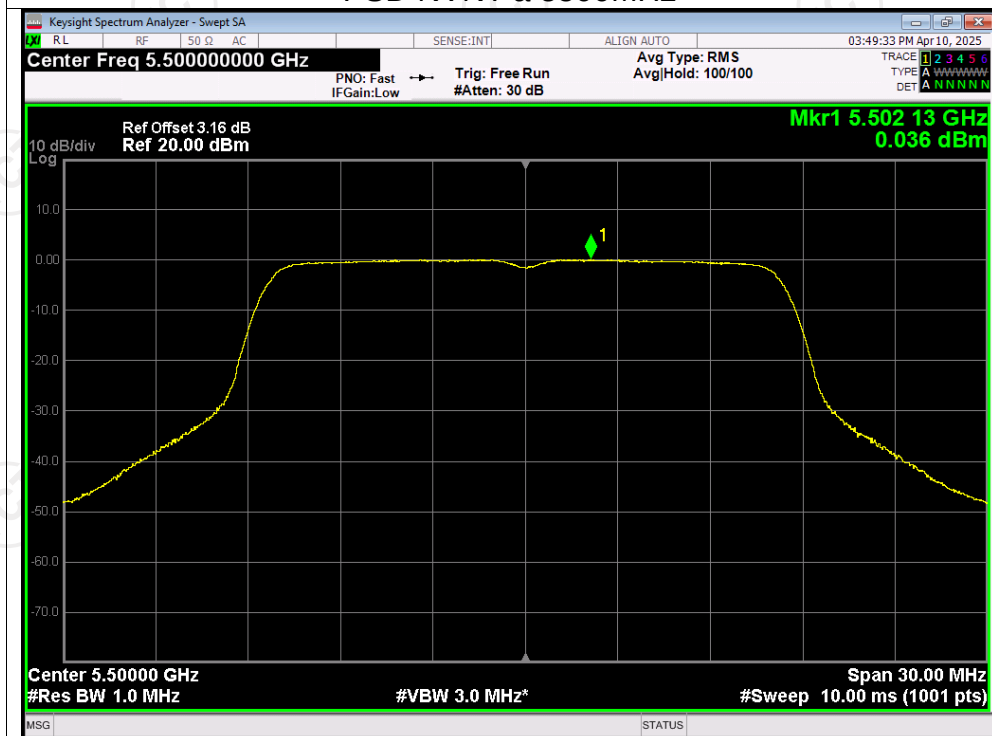




PSD NVNT a 5580MHz

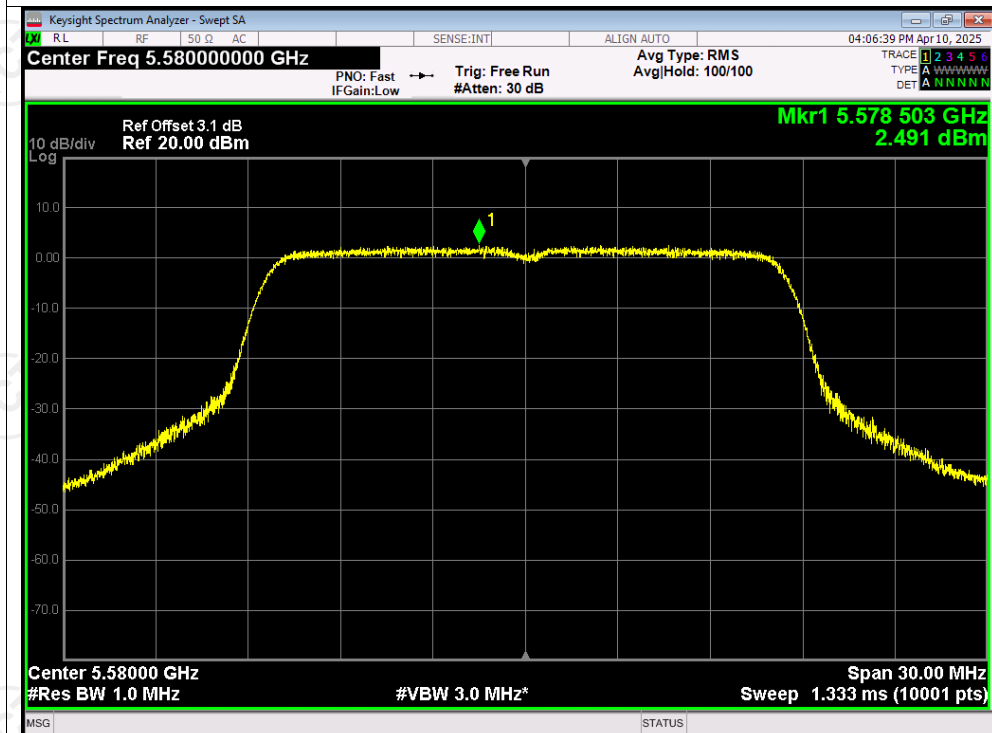


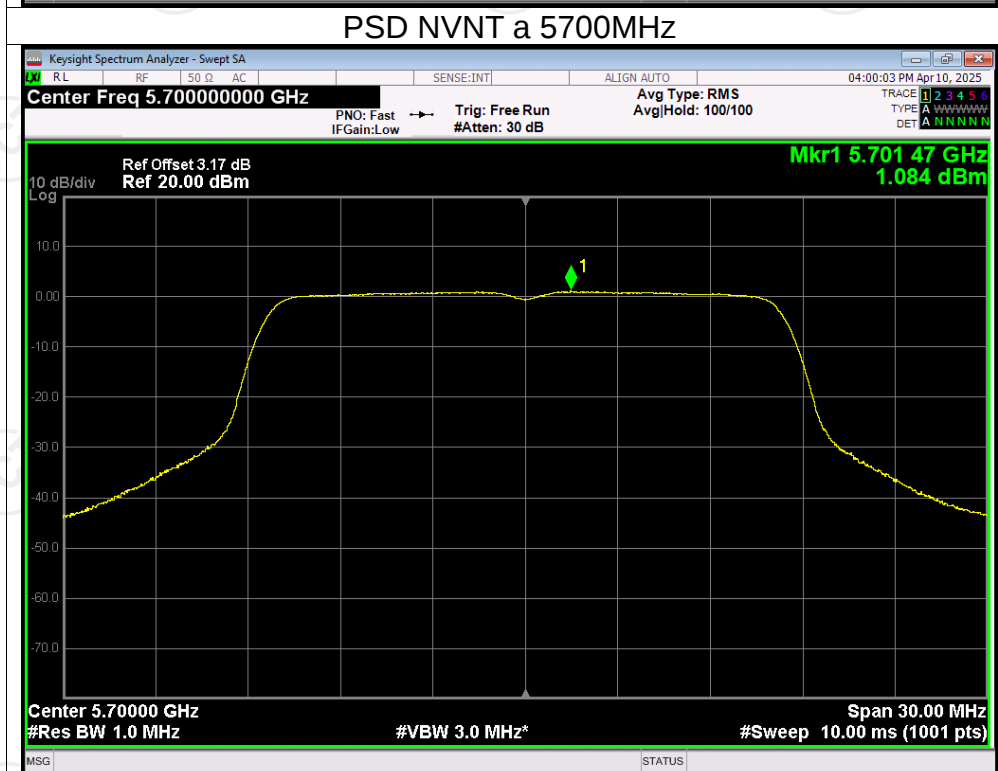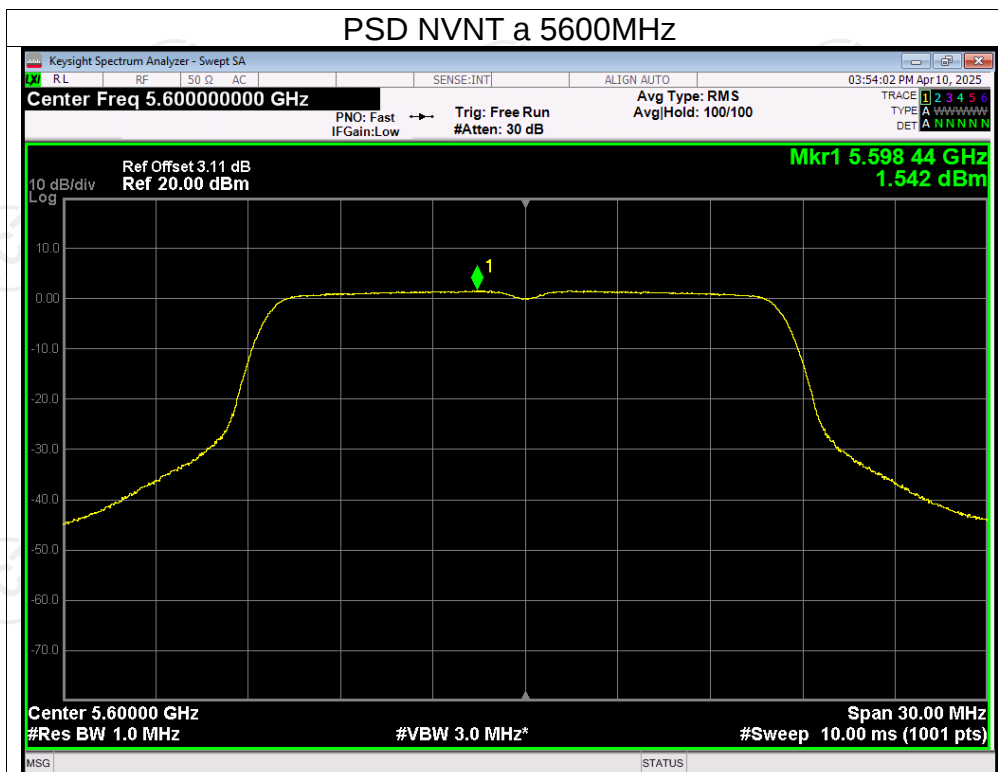

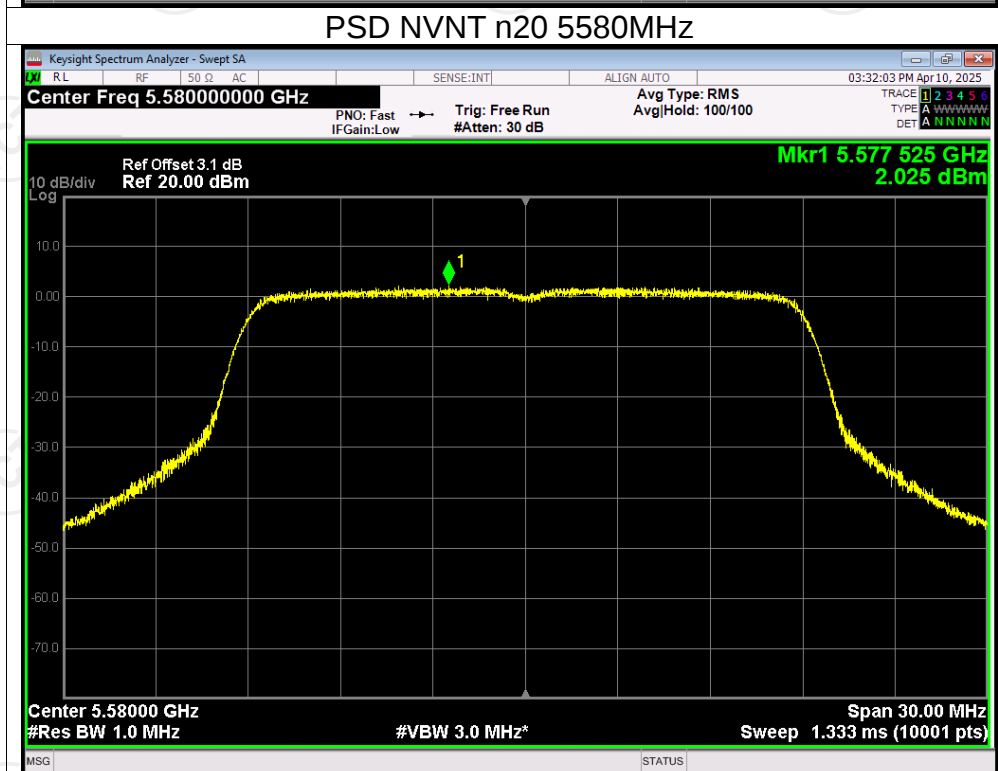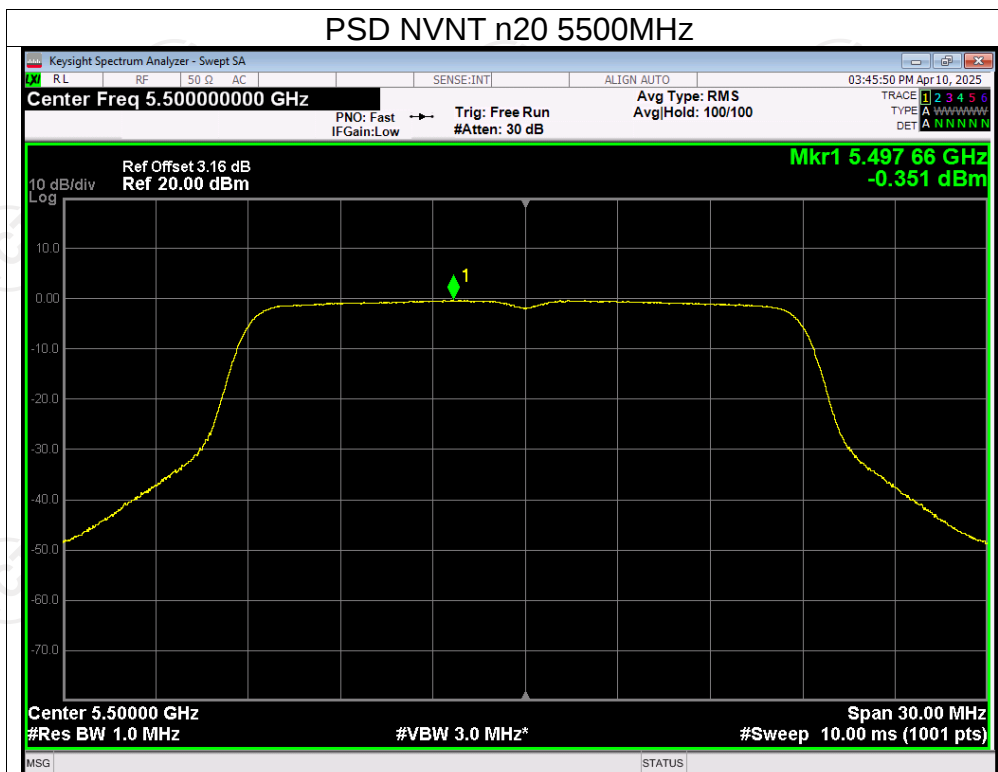

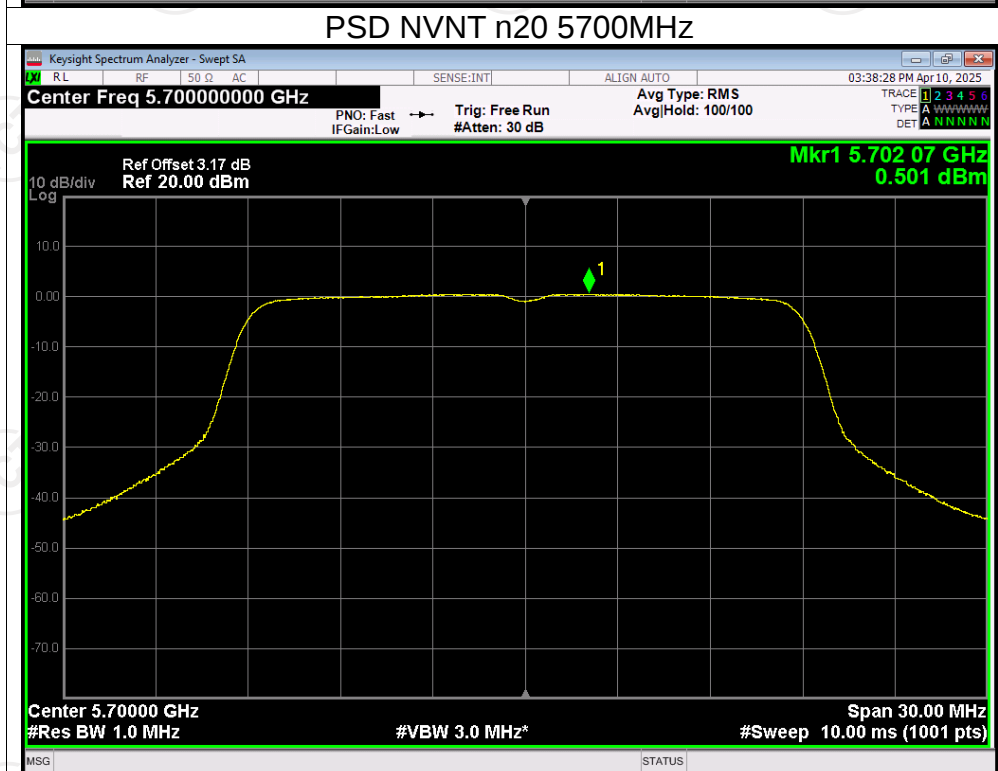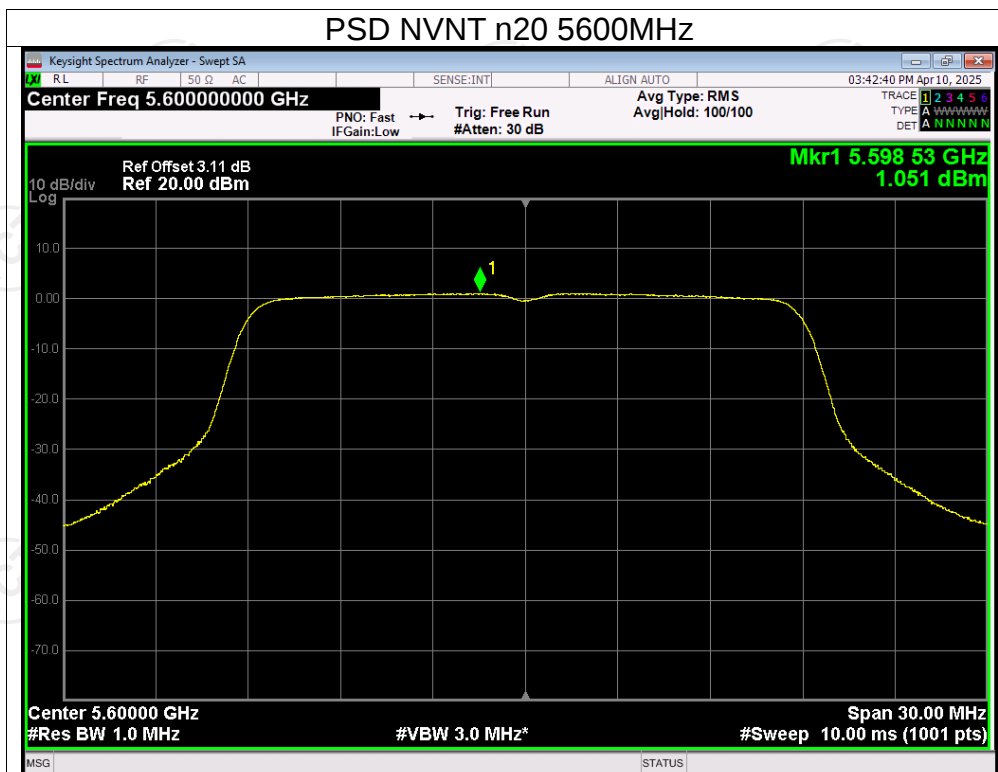


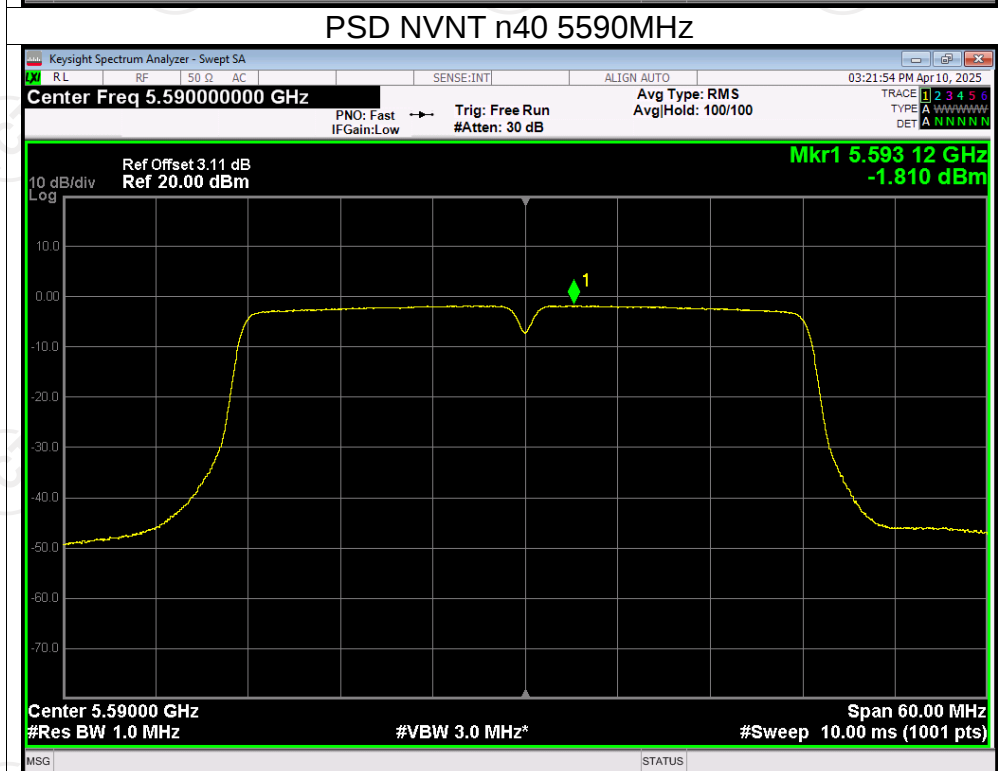
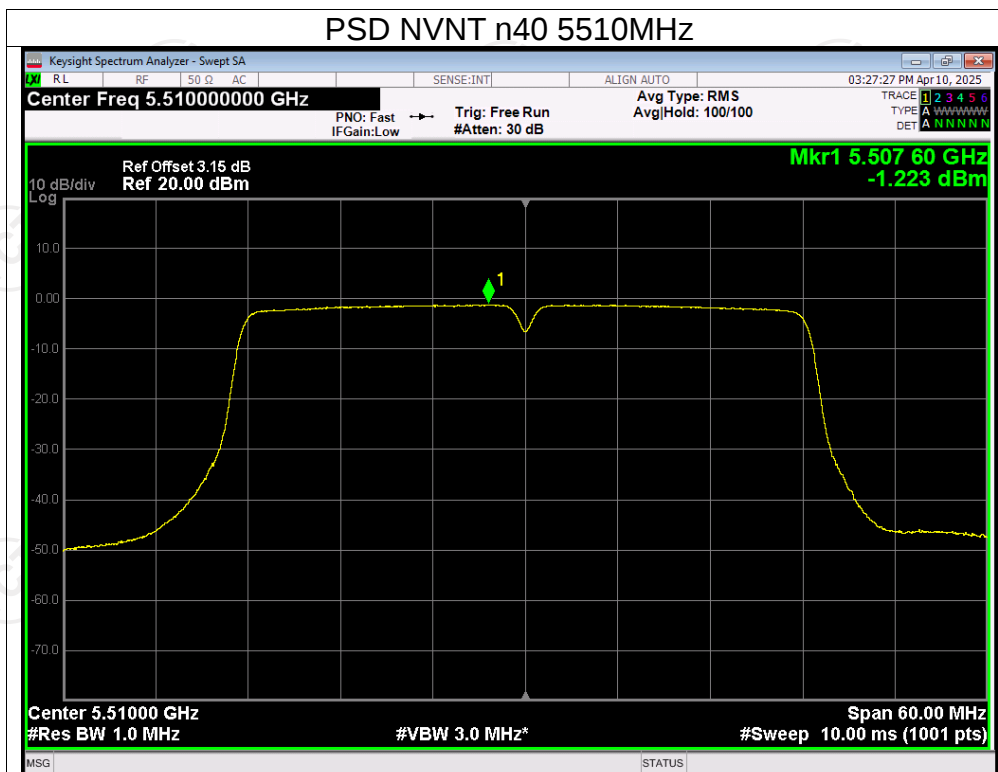



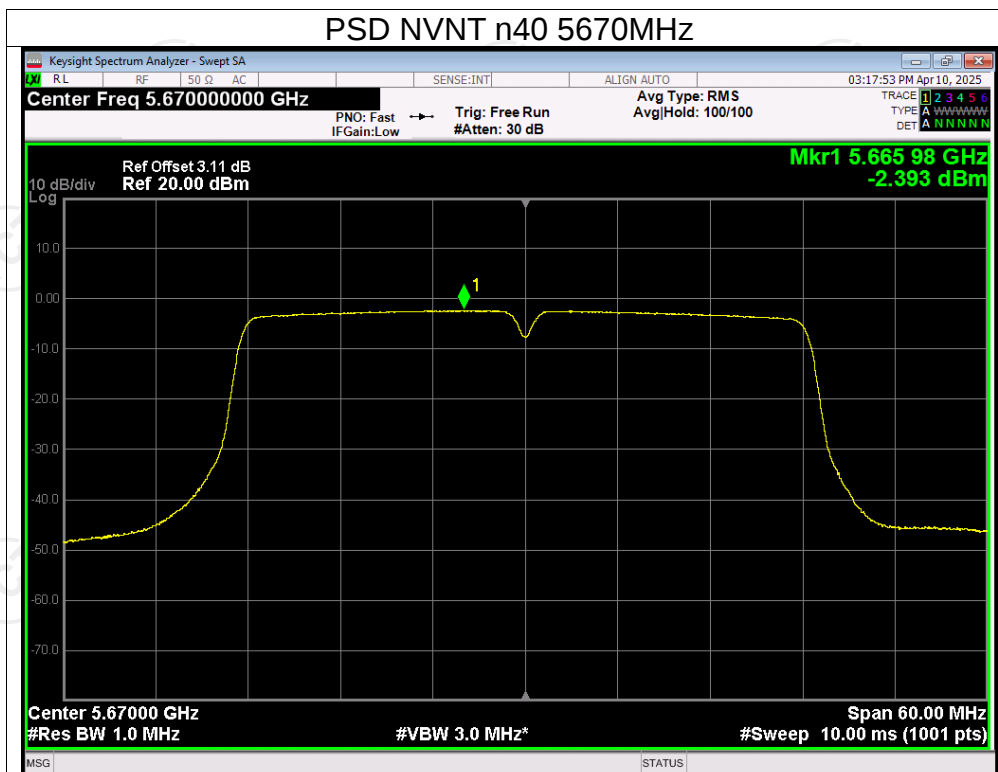




Test Graphs


PSD NVNT a 5745MHz

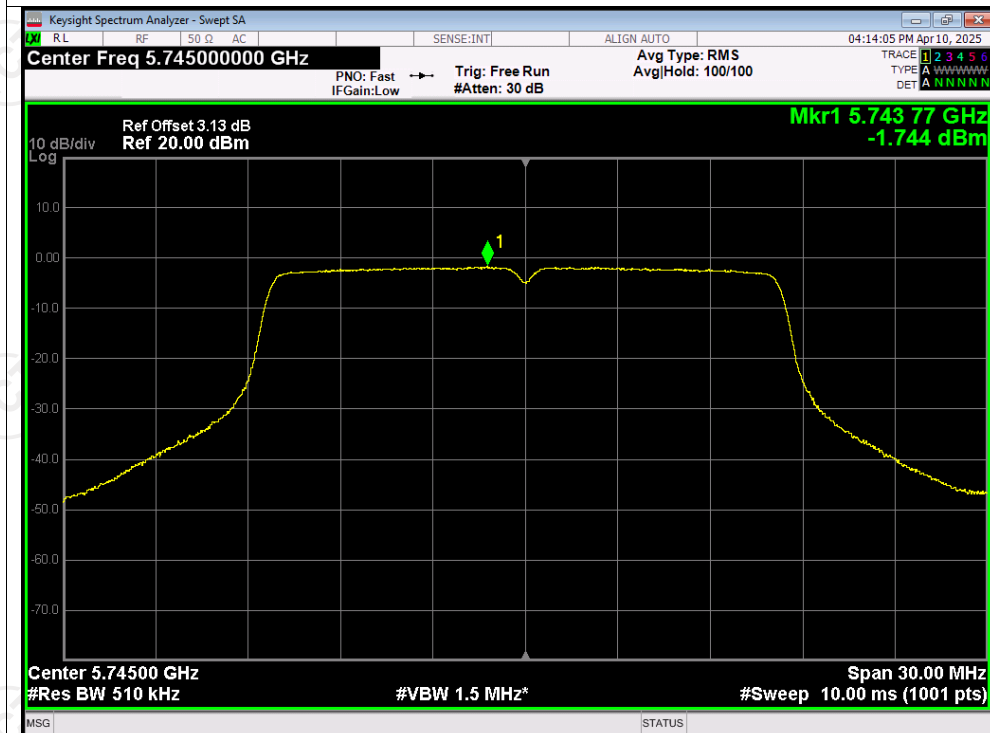

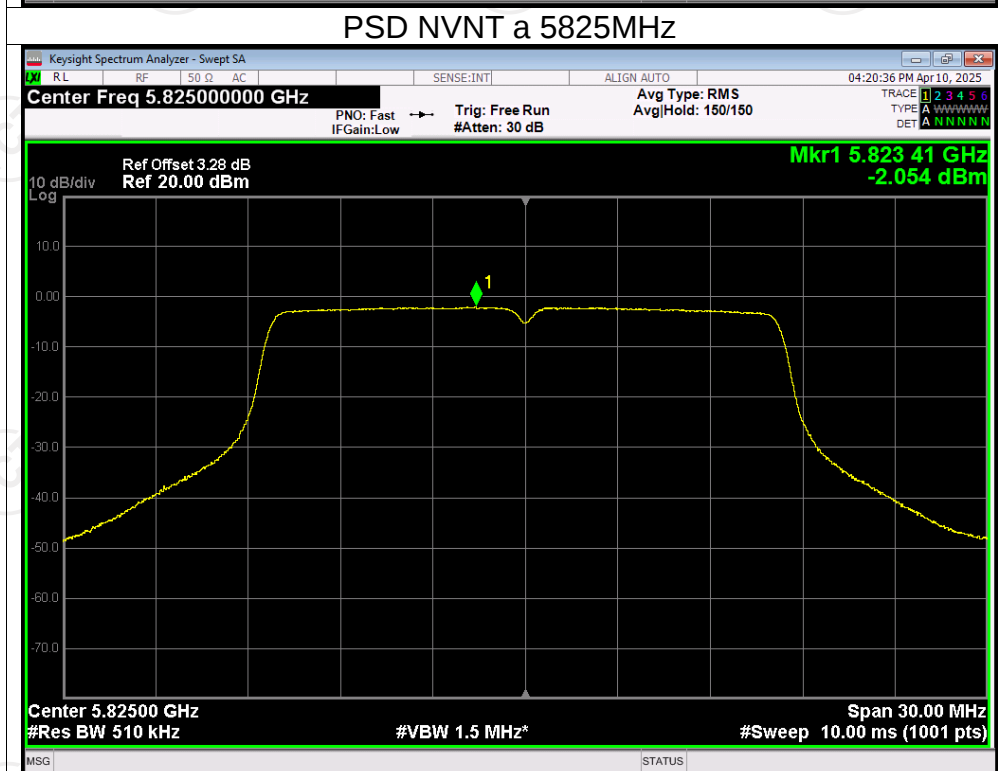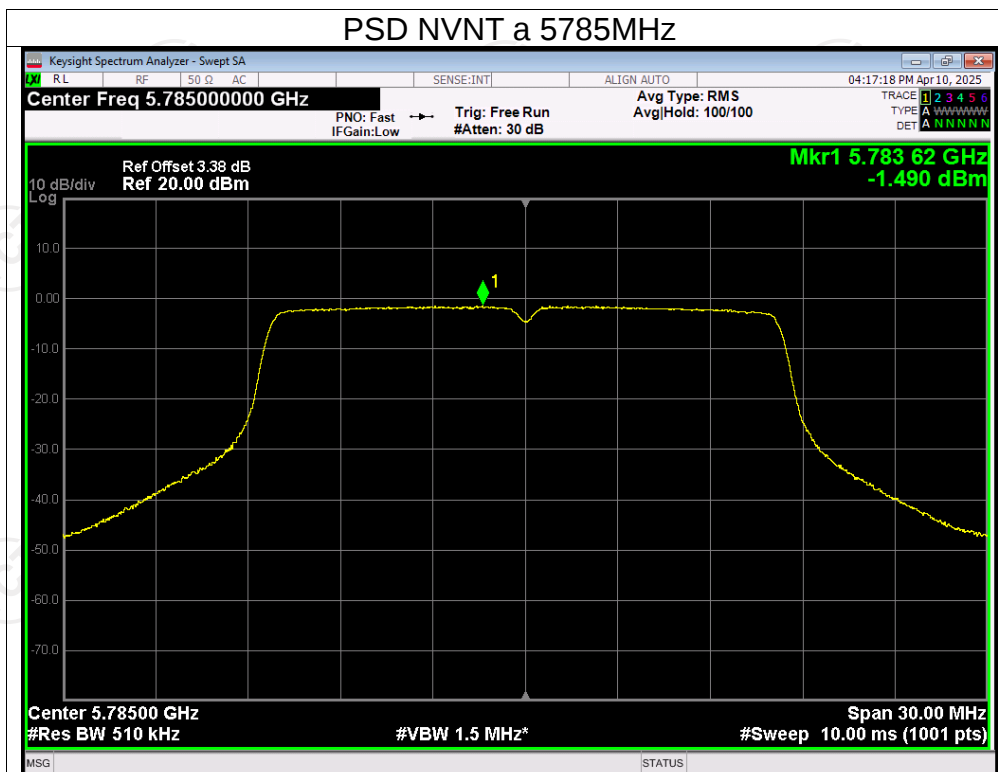

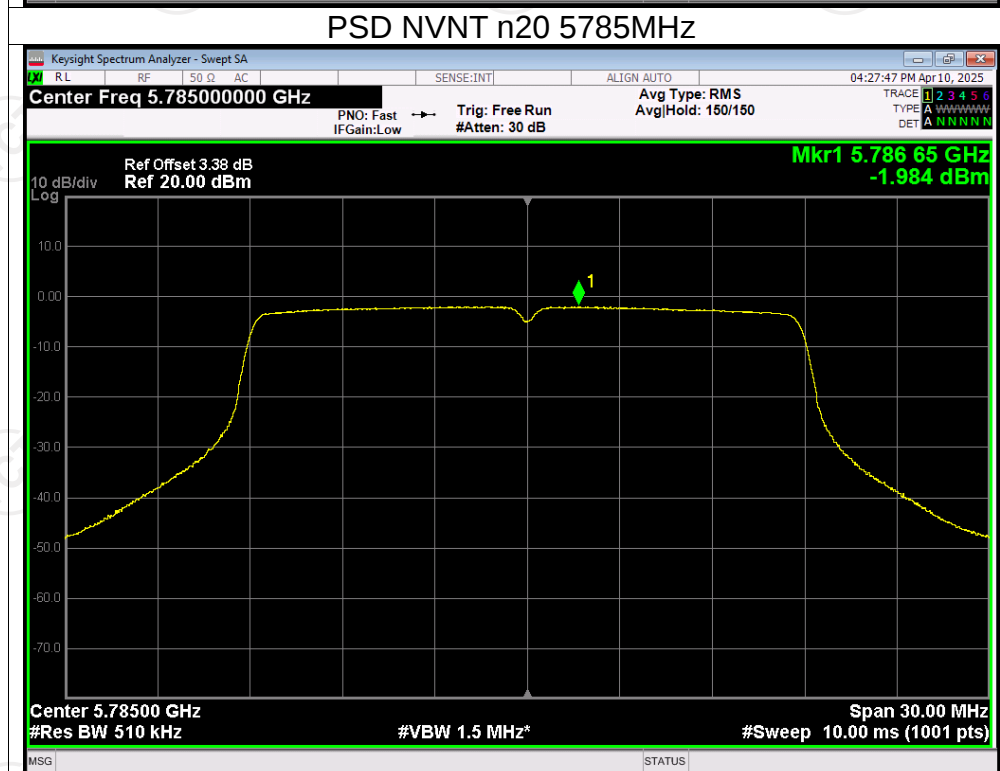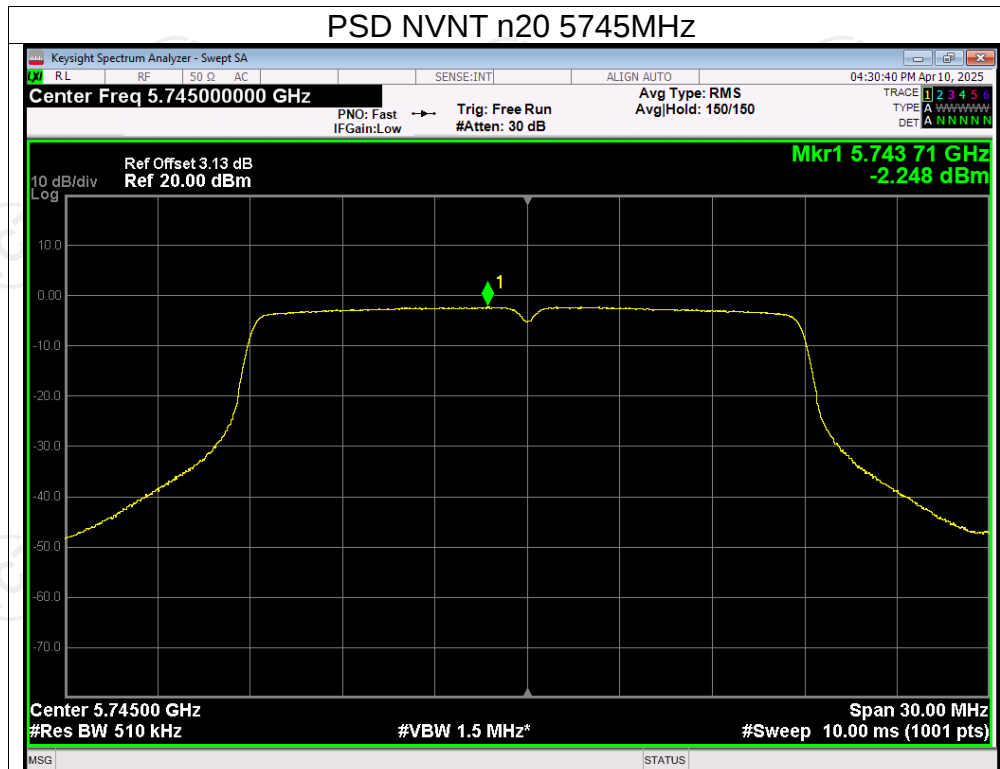

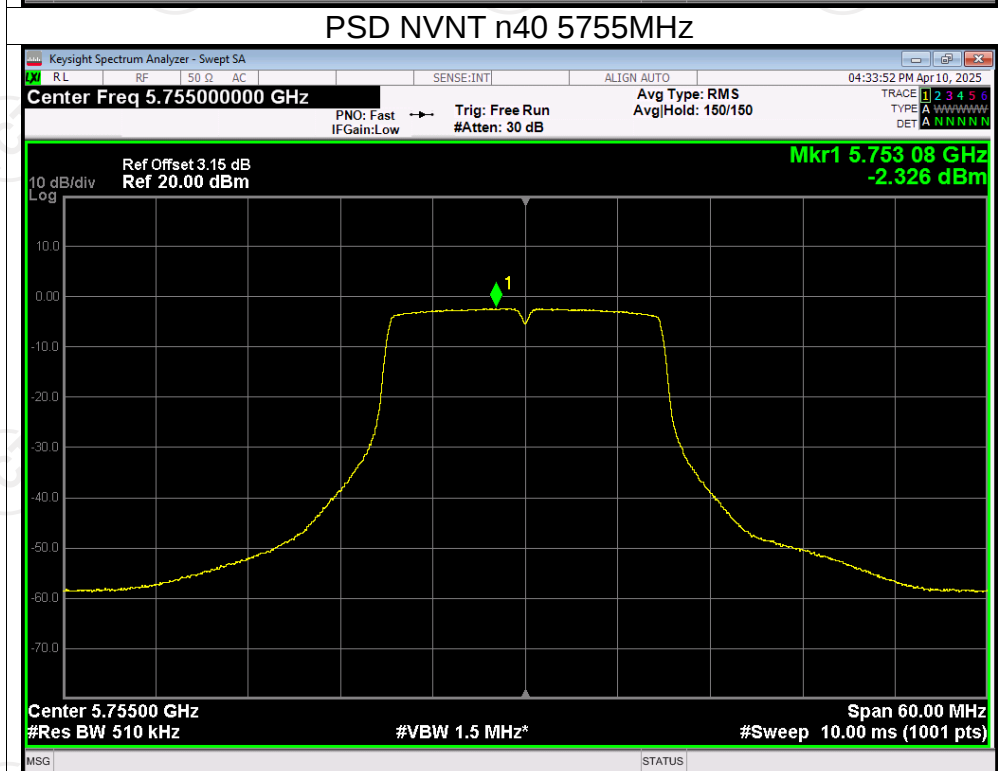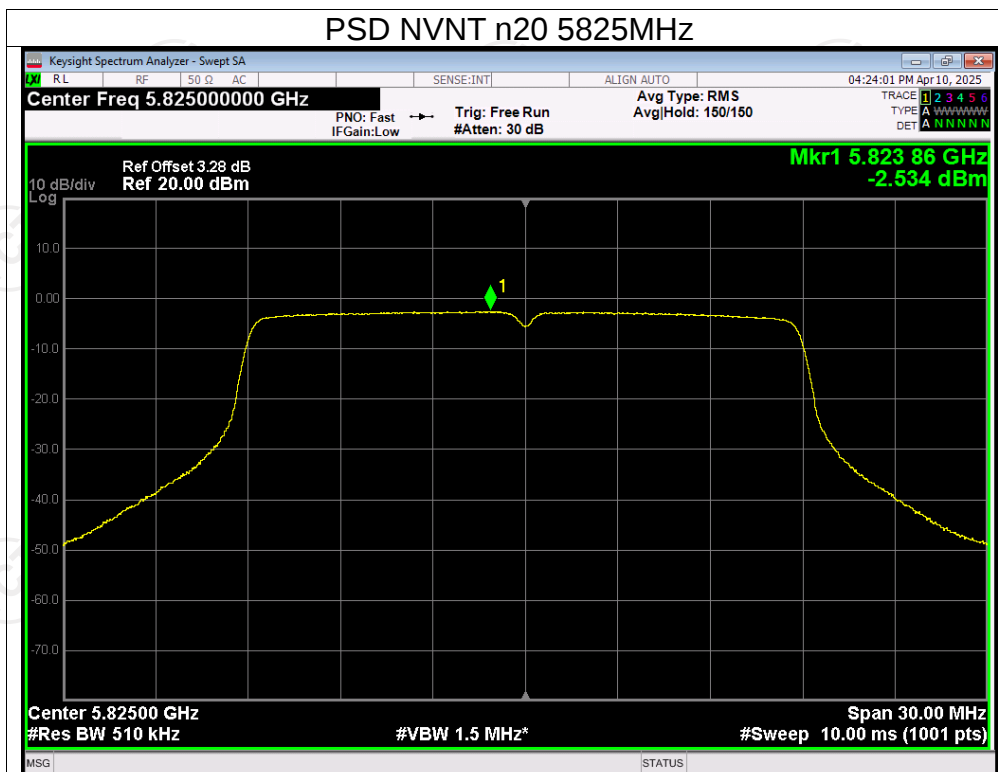

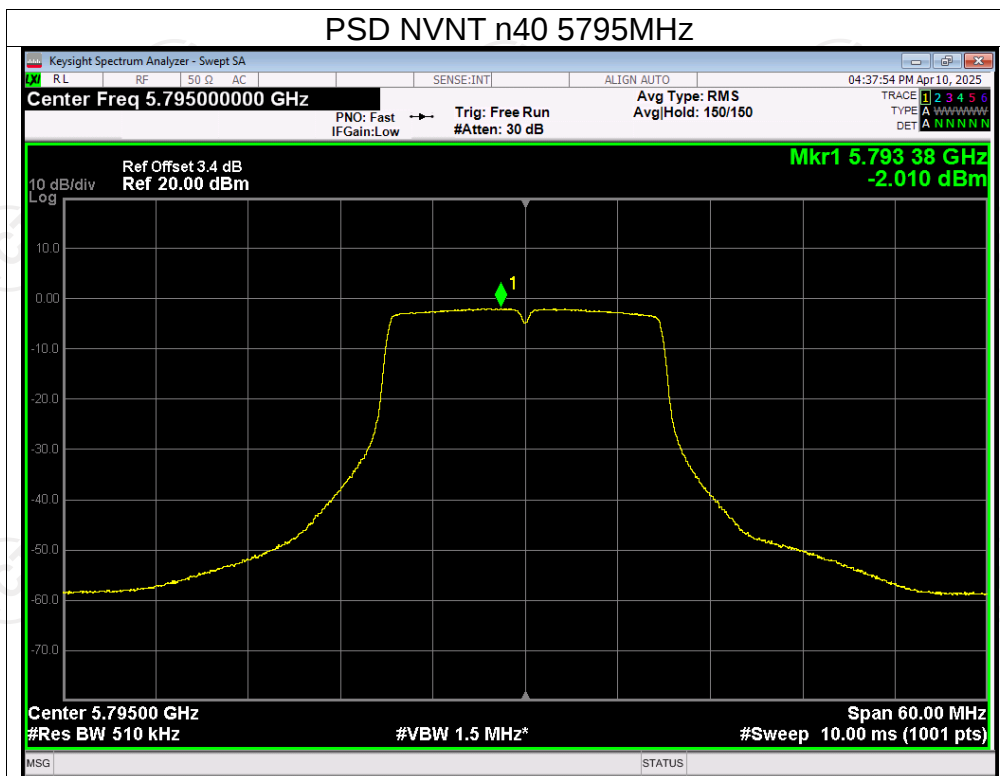

Appendix B: Photographs of Test Setup

Please refer to document Appendix No.: TCT250408E005-A

Appendix C: Photographs of EUT

Please refer to document Appendix No.: TCT250408E005-B & TCT250408E005-C

*******END OF REPORT*******