

---

# PRODUCT INSTRUCTIONS

Intelligent Flat Panel

Product Type: L65V6

Document version: V2024.1

Manufacturer' s Signatures			
Editor	Auditor	Final Reviewer	Approver

Customer need to send back this document after sign&stamp

Customer please fill this table		
Customer' s advice	Signaure	Stamp

## Directory

1. Product instructions -----	3
2. Product Appearance -----	3
3. Technical Parameters -----	4
4. Product Six Views -----	7
5. Precautions -----	7

## Revision History

(Date)	(Version)	(Description)	(Author)
2024.4.25	V2024.1	Created	Zengfanxin

## 1. Product instructions

- 1.1 Real 4K resolution display with high color gamut, which made of zero-fitting process.
- 1.2 Built-in intelligent CPU and operation system.
- 1.3 Optional OPS PC module.
- 1.4 With touch screen technology.
  - 1.4.1 Anti-light interference (working smooth under sun light) ;
  - 1.4.2 High-precision touch screen with rapid responses, smooth in writing and presentation;
- 1.5 Display, touch screen, intelligent CPU 3 in 1.
- 1.5.1 HD image GPU engine,
- 1.5.2 With intelligent display chips and Android system,
- 1.5.3 Writable and annotable at any interface.
- 1.6 Input HDMI signals will wake up the device on standby mode
- 1.7 Wireless screen share is supported
- 1.8 WIFI 6 bluetooch 5.0 is supported
- 1.9 HDMI 4K 60Hz is supported
- 1.10 The system will boot from your last settings, and all input channels are nameable.
- 1.11 Built-in AI HD camera and microphone array(total 8 microphone units),
- 1.12 Android 14 system, 4K UI display, 4K Whiteboard,
- 1.13 The front is with switchable USB/Type C interfaces.
- 1.14 Smart light sensor will adjust the display brightness automatically.
- 1.15 Picture-in-picture function: Under Android system, it supports picture/vedio opening, or other operations when a vedio is already in full-screen playing. So that you can quickly shift to other channels.

## 2. Product Appearance



### 3. Product Parameters

Parameters	
Size	65 inch
Response time	8ms
Aspect ratio	16:9
Active area	1429 (H) × 804 (V) mm
Resolution	3840 (H) × 2160 (V)
Pixel unit size	0.372×0.372mm
Scanning frequency	60Hz
Display color	1.07B (10bit)
Color gamut (NTSC), Typ	85%
Contrast ratio	1200:1
Viewing Angle	178° (H/V)
Backlight type	DLED
Brightness, Typ	350cd/m <sup>2</sup>
Service lifetime	≥50000 hours
Loud speaker parameters	
Speaker channel type	2.0
Speaker power	2×15W
Optional	2.1 channel: 2×15W+1×20W, or 2.2 channel: 2×15W+2×10W
Camera parameters	
Camera	48MP (8000*6000) images 4K 8MP (3840*2160) video
Qty	1
location	center of the top
Viewing angle	120° (MAX)
Microphone parameters	
Max pickup sound range	8m
Microphone qty	8
AI Functions	
Speaker face tracking, Speaker voice tracking Supports 4K 8Mega pixels video (3840*2160)	
Touch screen	

touch screen type	IR touch
Operation system supported	Windows11/Windows10/Windows8/Windows7/Windows XP/Android/Linux/Mac OS X/Chrome
touch point qty	20
Min diameter of stylus tip	2mm
Input method	Fingers, stylus, other opaque objects
Respons speed	<10ms
touch screen accuracy	±1mm (90%)
Maxium distance between stylus and touch screen when writing, Typ	2.5mm
Communication method with motherboard	USB
Tempered glass hardness	7H
Coordinate points	32767 (W) × 32767 (D)

#### Operation System

System version	Android 14
CPU	Quad-Core A73*4+A53*4 2.2GHz
GPU	Mali G52MP8
RAM	8GB
ROM	128GB

#### Wireless module

Wi-Fi	Version	IEEE 802.11 ac/b/g/n/a
	Working frequency	2.4GHz/5GHz
	Working distance	12 m


#### Input/ Output Interfaces

Side ports	TOUCH OUT 3.0	1
	HDMI IN	2
	HDMI OUT	1
	TYPE C	1
	RJ45 OUT	1
	RJ45 IN	1
	USB 3.0	2
Bottom ports	LINE_OUT & HEADPHONE_OUT	1
	VGA IN	1

	AUDIO IN	1
	DP IN	1
	USB 2.0	1
	TOUCH OUT 3.0	1
	RS232	1
	OPTICAL OUT	1
Front ports	HDMI	1
	USB	2
	TOUCH (USB2.0)	1
	Type-C (data file transfer, USB terminal function)	1
Optional port	NFC	1
<b>Power supply parameters</b>		
Power input type	100-240V~50/60Hz	
Maximum power	320W	
Standby power	$\leq 0.5\text{W}$	
<b>Windows computer system (Optional)</b>		
PC Type	Plugable computers module with Intel Cores	
Hardware	I5/I7/I9 (Optional)	
PC interface standard	80pin OPS-C	
<b>Dimensions/Weight</b>		
Device dimensions (L×W×H)	1483.6×921.7×89.6mm	
Carton dimensions (L×W×H)	1695×227×1070 (Tolerance $\pm 10\text{mm}$ )	
Flat panel+Wall mount total thickness(Please refer to the actual product)	$132.0 \pm 3\text{mm}$	
VESA Holes range (L×W)	600×400mm	
Screw type of wall mount	M8×25mm	
Net Weight ( without OPS)	$39.5 \pm 1\text{kg}$	
Gross weight	$52.5 \pm 2\text{kg}$ (The total weight may different due to different accessories, please refer to actual product.)	
<b>Accessories in pack (please refer to actual products due to different options)</b>		
Power cable	×1	
Wall mount	×1	
Stylus	×1	

Pointer	×1
Quality certificate	×1
Warranty card	×1
<b>Environmental requirements</b>	
Temperature condition	0°C~40°C
Humidity condition	≤ 80%RH
Storage temperature	-10°C~60°C
Storage humidity	10%~80%RH
Working altitude	<5000m

## 4. Product Six Views

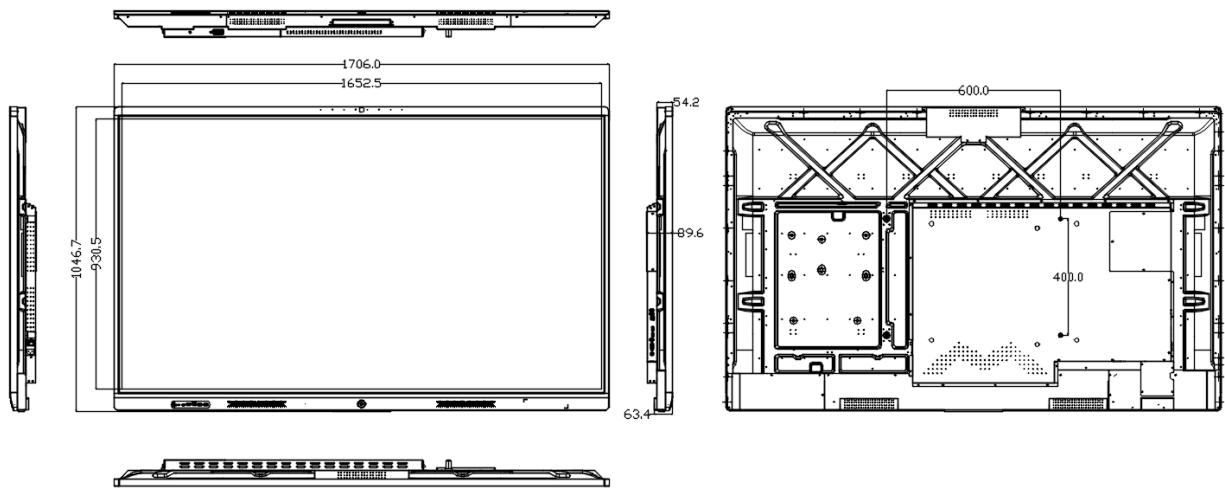

## 5. Precautions

- 5.1 Please read this precautions carefully before your first operation.
- 5.2 Please note and follow the warning signs on product/instructions.
- 5.3 If press the "standby" button on the front, the device will enter standby mode, it will not shut down. There is a rocker switch on the rear side, it's power switch of this device. The "I" indicates power on, "O" indicates power off. Please don't place anything near to the power switch, to make sure that you can shut down this device conveniently.
- 5.4 Please shut down the device and unplug the power cable if you won't use it for a long time. Please shut down and unplug the power cable in lightning weather.
- 5.5 This product need a threehole socket nearby, and it's ground wire shall

---

connect to the ground. Please don't step on the power cable and don't place anything on it.

5.6 Please use the right power supply which shows on name plate. If you are not sure about your power supplier type, please confirm with your supplier first.

5.7 Please shut down this device if there are unusual sounds or burning smells from it. Please contact your supplier to check and fix it.

5.8 All flammable and explosive items, heating items, such as candles, fireworks, electric stoves, electric lights shall keep away from this device.

5.9 Please don't place this device on any unstable platform, nor it may fall and cause damage.

5.10 There are some gap/holes on rear side for heat dissipation, please don't cover it. Please place the machine in a ventilated area to ensure good heat dissipation.

Please ensure at least 10cm ventilation space on the left& right& back , and at least 20cm ventilation space on the top.

5.11 Please don't put any liquids, metal objects into the case, if it happens accidentally, please contact your supplier in time.

5.12 Please don't use any chemical to wipe this device, it may corrode the metal structures and coatings. Please shut down and unplug power cable first, and use slightly damp rag to clean the dust on display& structure. Never use any detergents/ sprays.

5.13 Please keep this device away from water/ moisture, such as toilet, kitchen, pool.

5.14 Please do not splash or dump any water/liquids to the device, especially the holes on rear side.

5.15 Please don't insert any irrelevant objects into interfaces/socket, nor it may cause safety issues.

5.16 Do not try to repair this device by your own, please contact your supplier and follow their guideline.

---

5.17 Please follow our instruction when you install your device. And please use our accessories only.

5.18 The wall mount (if included) only can install on a solid wall which can withstand 500kg weight. If you need to lift the device up in installation, please let a professional to it and keep everything safe. Manufacturer does not undertake this task.

5.19 Please install this device in appropriate location, such as on the wall or a wheel stand. Please use our original wheel stand and follow your supplier's guidance.

5.20 Please read the text on nameplate carefully. Please use specified spare parts only, or ask it from your supplier if needed.

5.21 Please make sure that all ground wires in PCB / socket shall connect to ground correctly.

5.22 If you move this blackboard from a lower temperature area to a higher temperature area, in order to fully remove the condensed water droplets inside, please wait for some time before turning on the power.

5.23 All discarded batteries shall be disposed& recycled correctly.

Do not allow children to touch the batteries. Do not put any batteries in the fire, it may explode in fire and bring danger.

5.24 The total weight, dimensions, package details, colors, appearance may different due to your options, please refer to actual product.

5.25 When you combine the flat panel with blackboard, please leave at least 2cm space from blackboard frames. Please keep 1.5cm space between sliding blackboard panel and flat panel screen. Please leave at least 5cm space on below, left, right, and at least 9cm space on the top (between mounting slot and flat panel frame).

5.26 Please strict follow the transport instructions on outer cartons, place and sucure the devices. Please aviod any tipping and hitting (especially don't hit the front of display).

\*The hardware designs and software program of this product are protected by copyright. If this product and the contents of the instructions are copied without

---

authorization, we will retain the right to resort to legal claims.

The contents and pictures in this manual are for reference only and do not constitute any form into commitment. We reserves the right to improve and change the appearance design of products without prior notice.\*

#### FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

#### Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### FCC Radiation Exposure Statement

This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

End-users and installers must be provide with antenna installation instructions and transmitter operating conditions for satisfying RF exposure