




Appendix A



Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Final settingFor VBW (kHz)
NVNT	b	2412	Ant1	11.63	13.12	88.64	0.52	0.09	1
NVNT	b	2437	Ant1	11.63	13.51	86.08	0.65	0.09	1
NVNT	b	2462	Ant1	11.63	13.64	85.26	0.69	0.09	1
NVNT	g	2412	Ant1	1.93	2.88	67.01	1.74	0.52	1
NVNT	g	2437	Ant1	1.94	3.74	51.87	2.85	0.52	1
NVNT	g	2462	Ant1	1.93	3.77	51.19	2.91	0.52	1
NVNT	n20	2412	Ant1	1.8	3.69	48.78	3.12	0.56	1
NVNT	n20	2437	Ant1	1.8	3.75	48	3.19	0.56	1
NVNT	n20	2462	Ant1	1.8	3.71	48.52	3.14	0.56	1

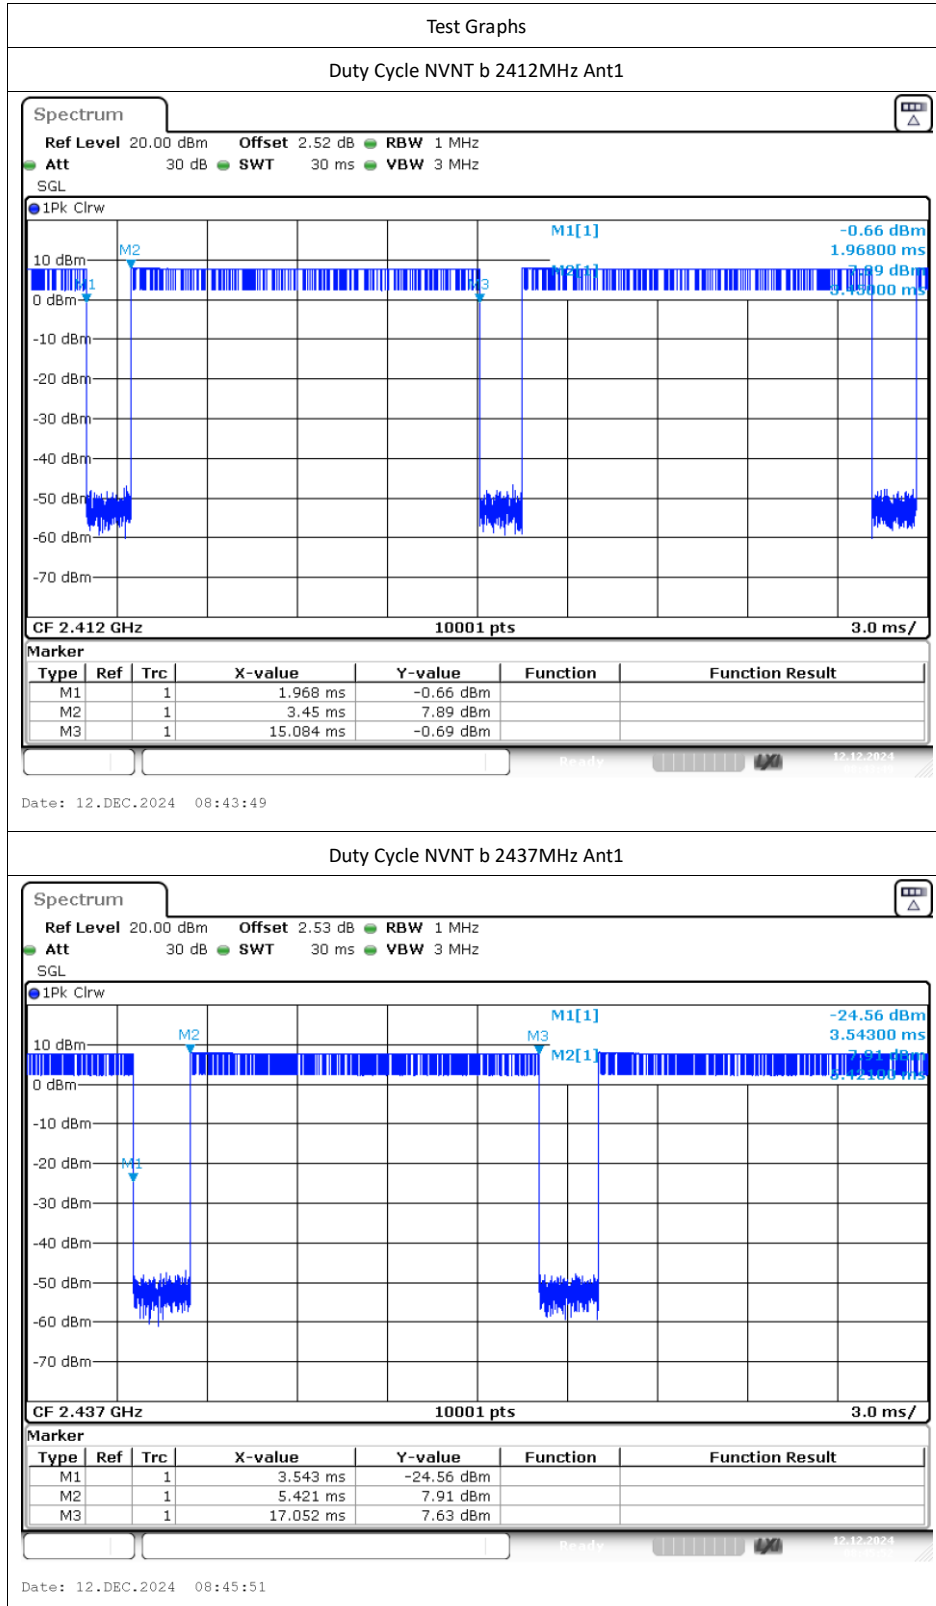

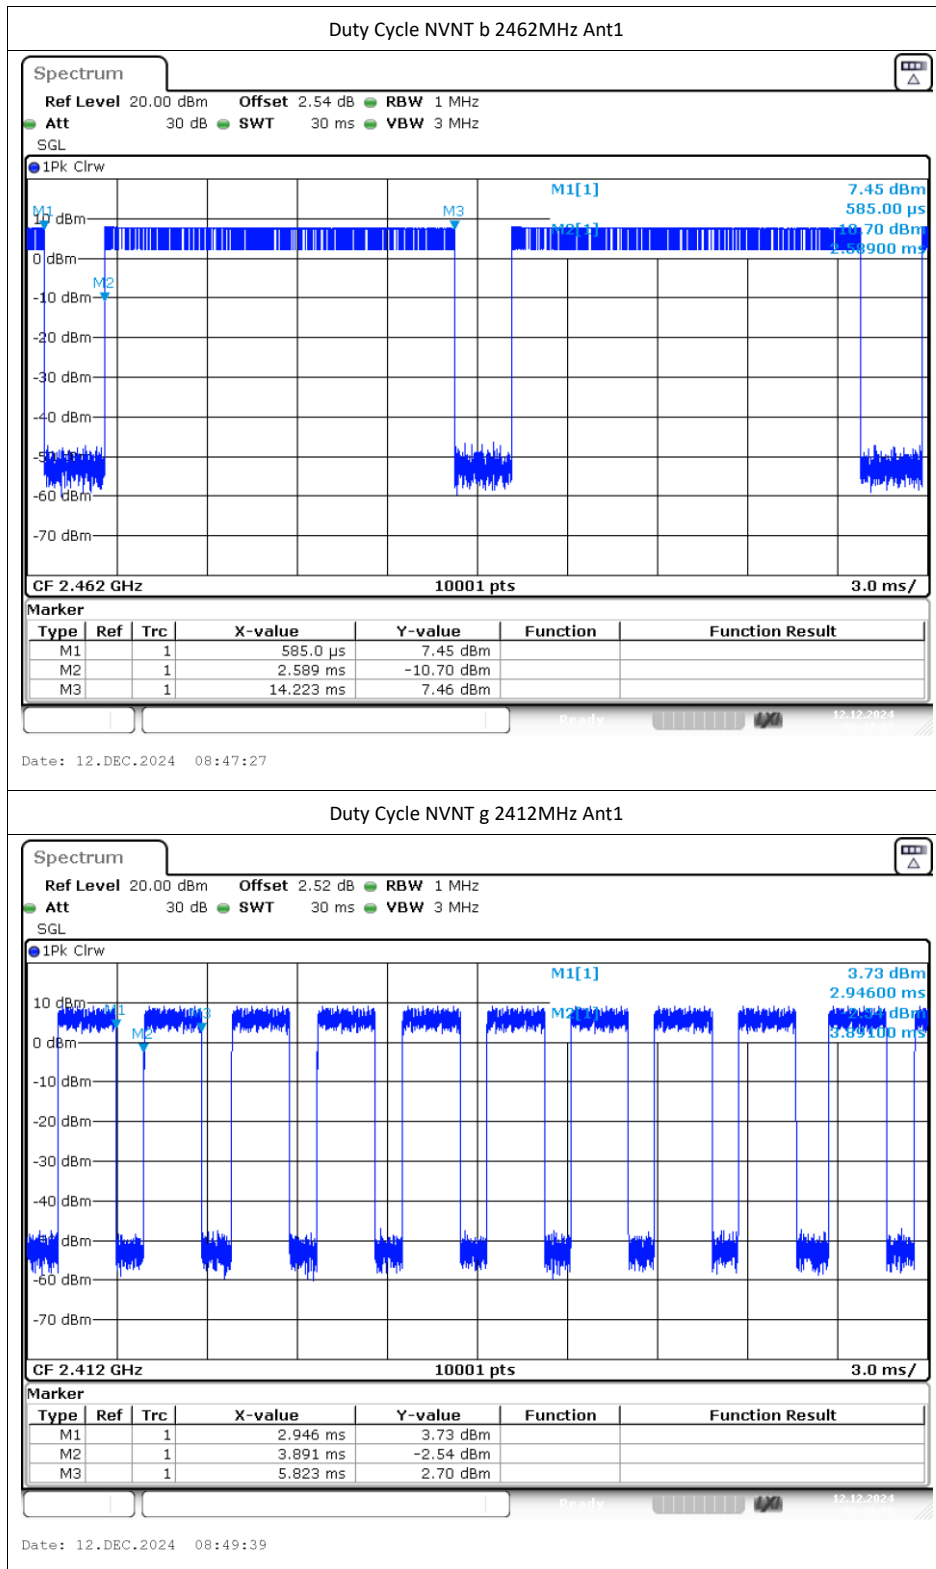

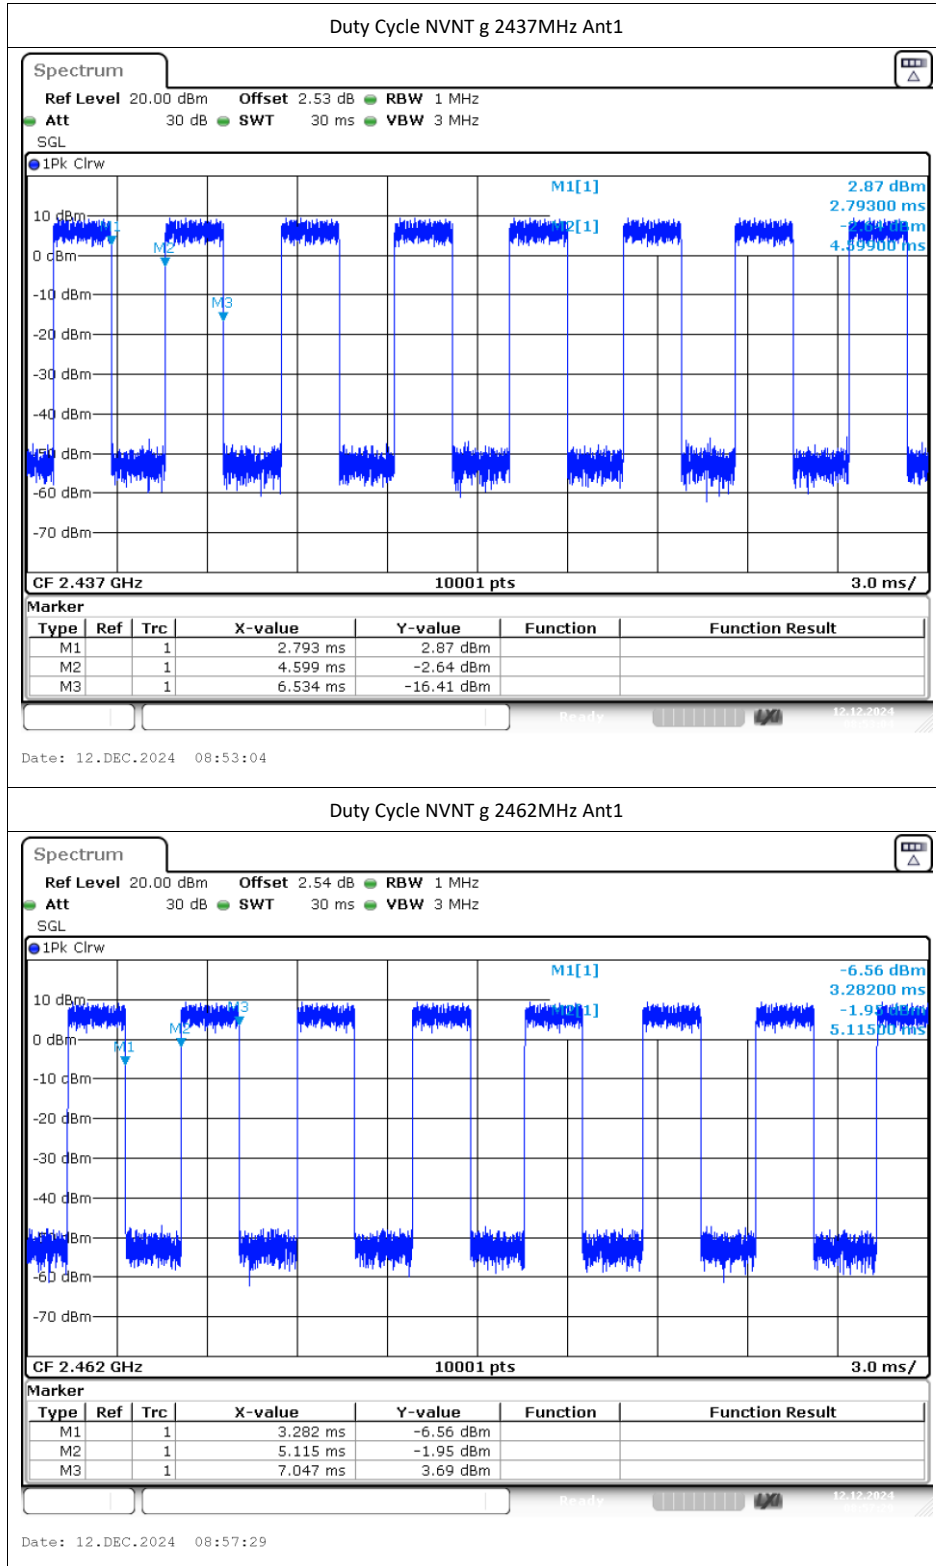

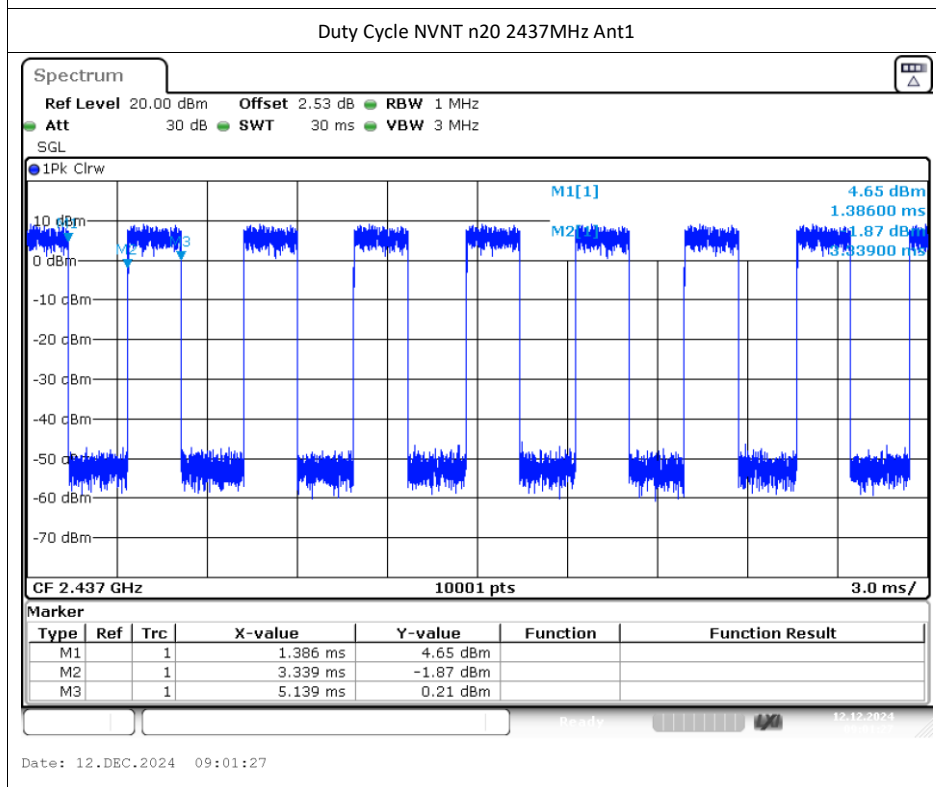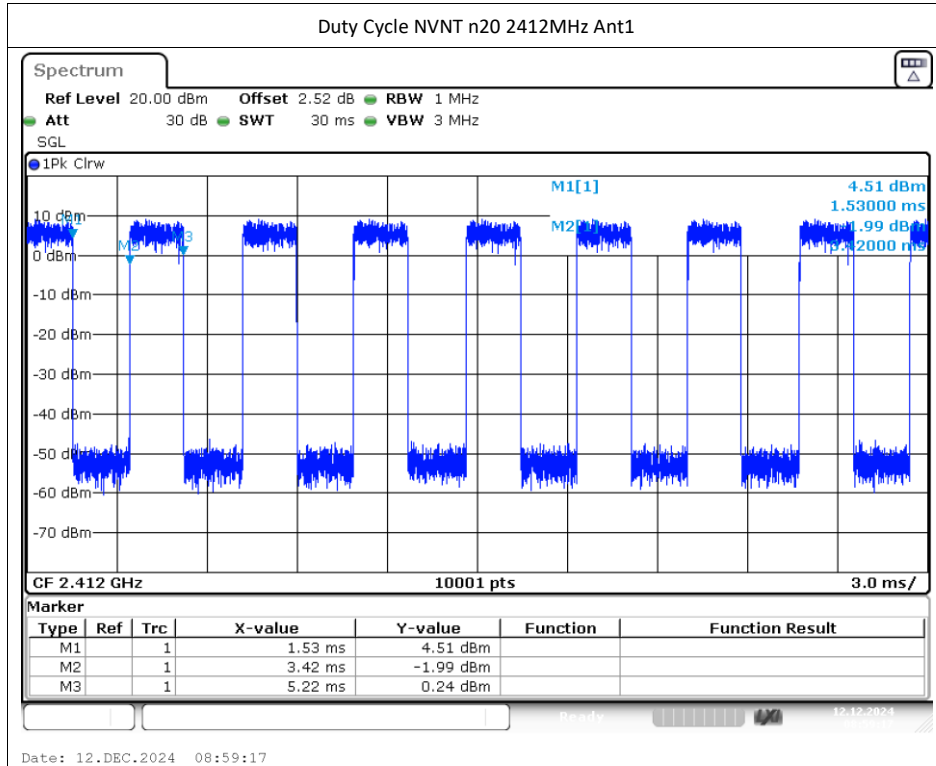

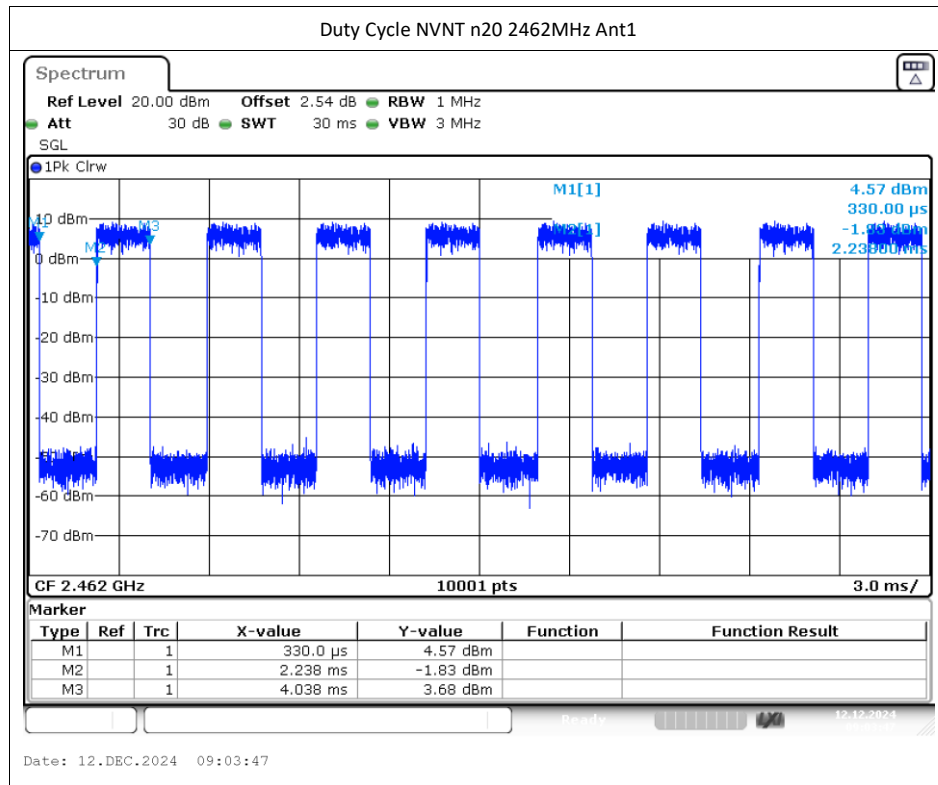



Maximum Conducted Output Power



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	18.19	30	Pass
NVNT	b	2437	Ant1	18.11	30	Pass
NVNT	b	2462	Ant1	17.9	30	Pass
NVNT	g	2412	Ant1	21.59	30	Pass
NVNT	g	2437	Ant1	21.53	30	Pass
NVNT	g	2462	Ant1	21.52	30	Pass
NVNT	n20	2412	Ant1	21.5	30	Pass
NVNT	n20	2437	Ant1	21.6	30	Pass
NVNT	n20	2462	Ant1	21.39	30	Pass


-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	10.08	0.5	Pass
NVNT	b	2437	Ant1	10.08	0.5	Pass
NVNT	b	2462	Ant1	10.05	0.5	Pass
NVNT	g	2412	Ant1	16.41	0.5	Pass
NVNT	g	2437	Ant1	16.41	0.5	Pass
NVNT	g	2462	Ant1	16.47	0.5	Pass
NVNT	n20	2412	Ant1	17.64	0.5	Pass
NVNT	n20	2437	Ant1	17.79	0.5	Pass
NVNT	n20	2462	Ant1	17.55	0.5	Pass

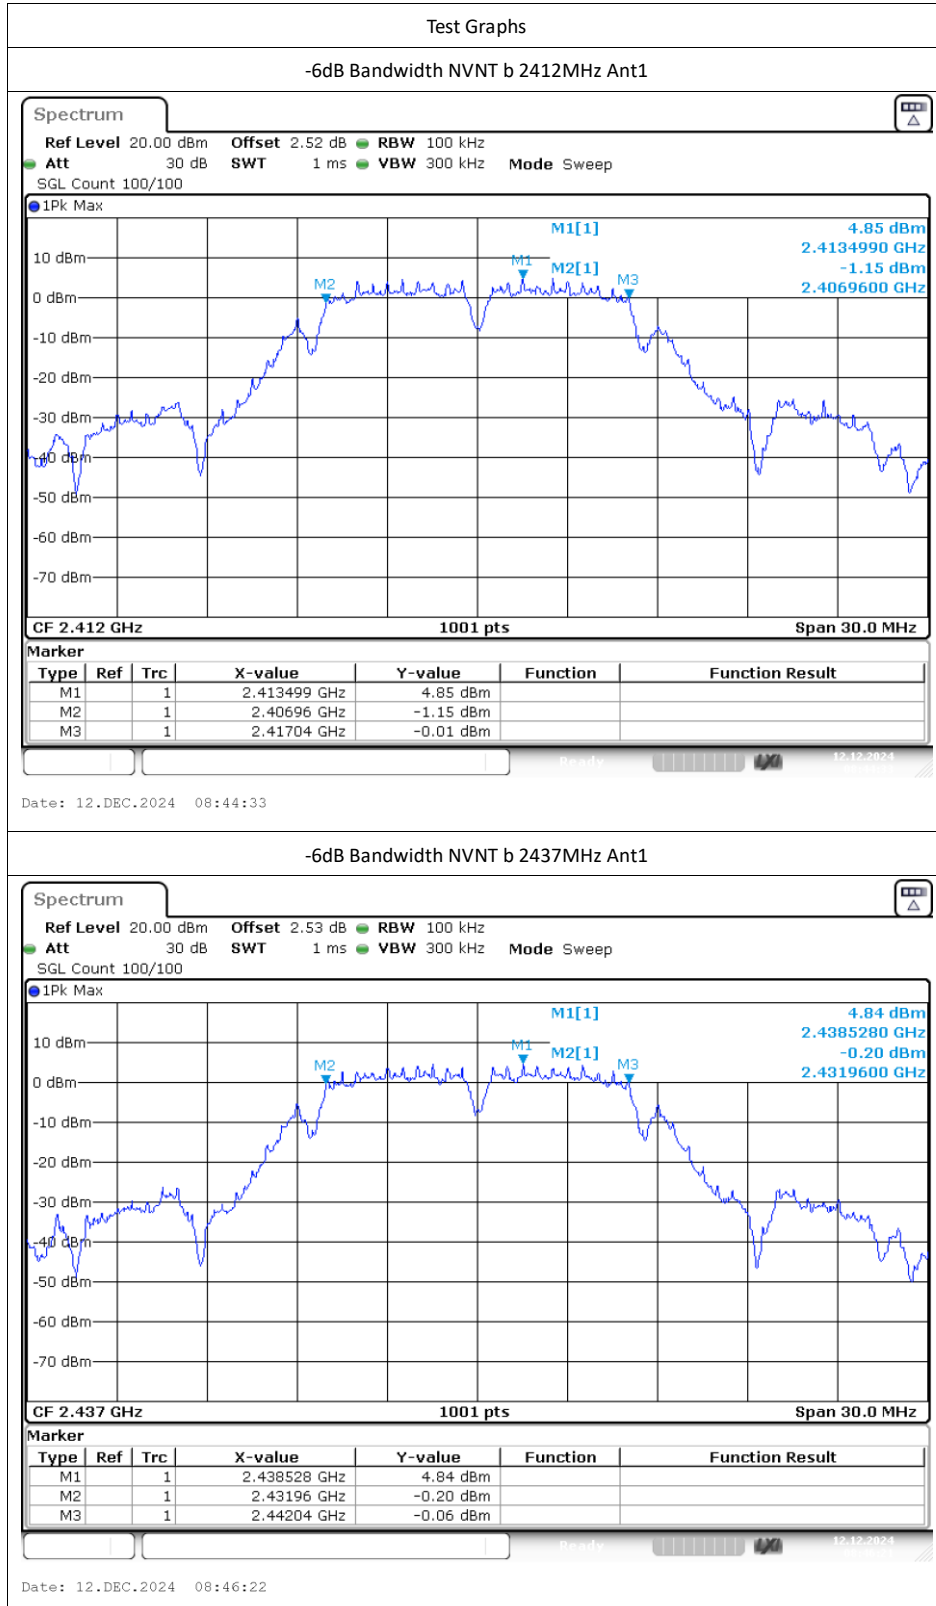

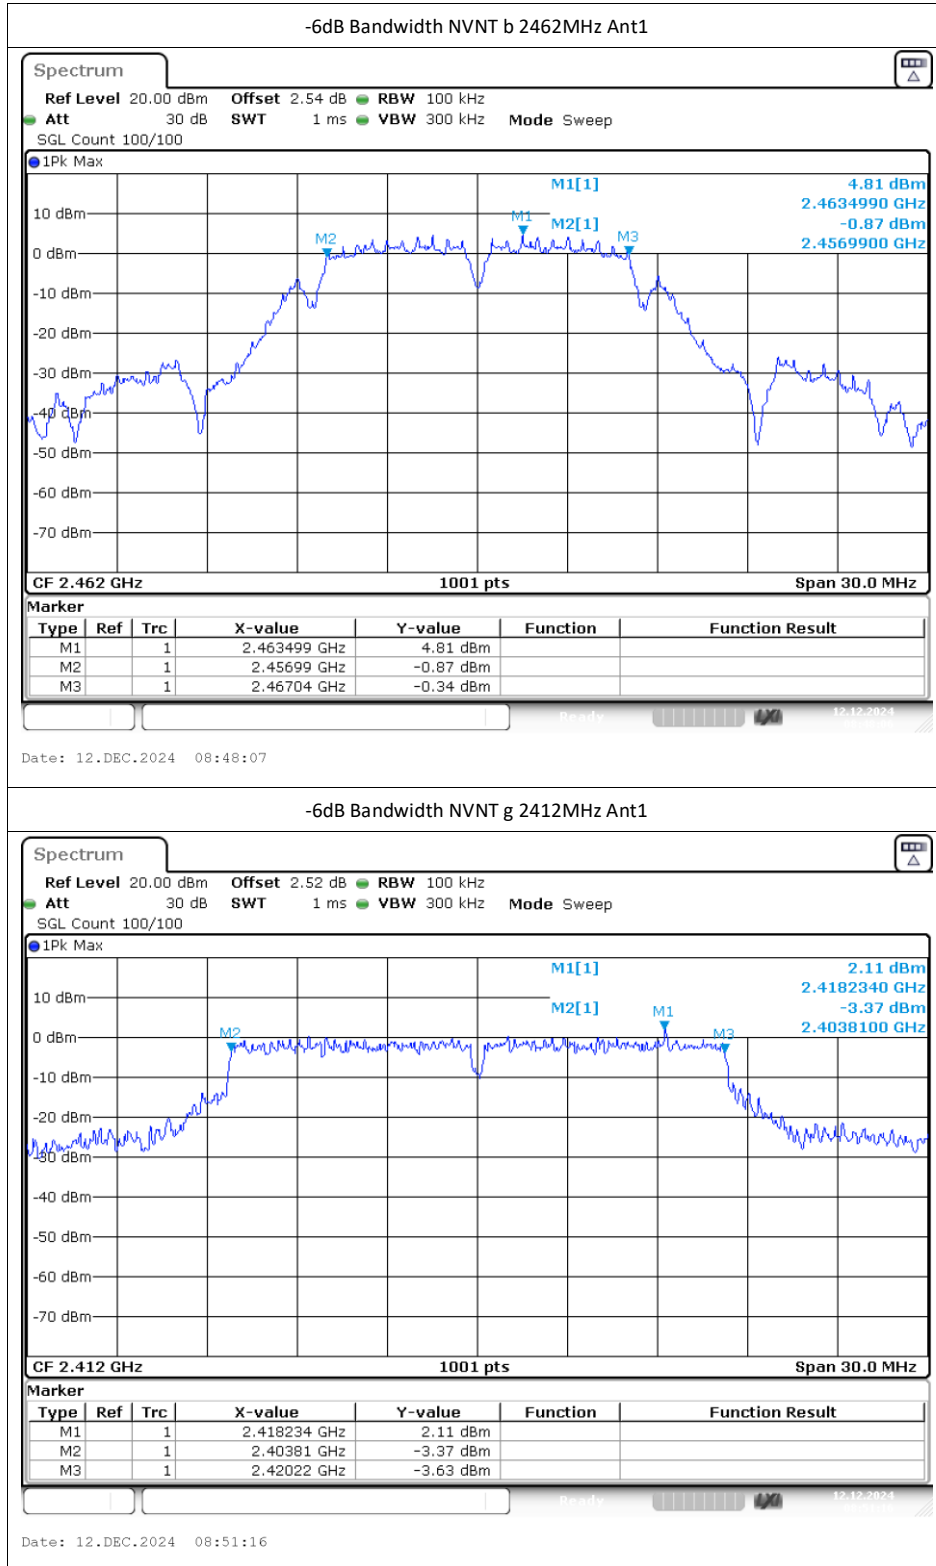

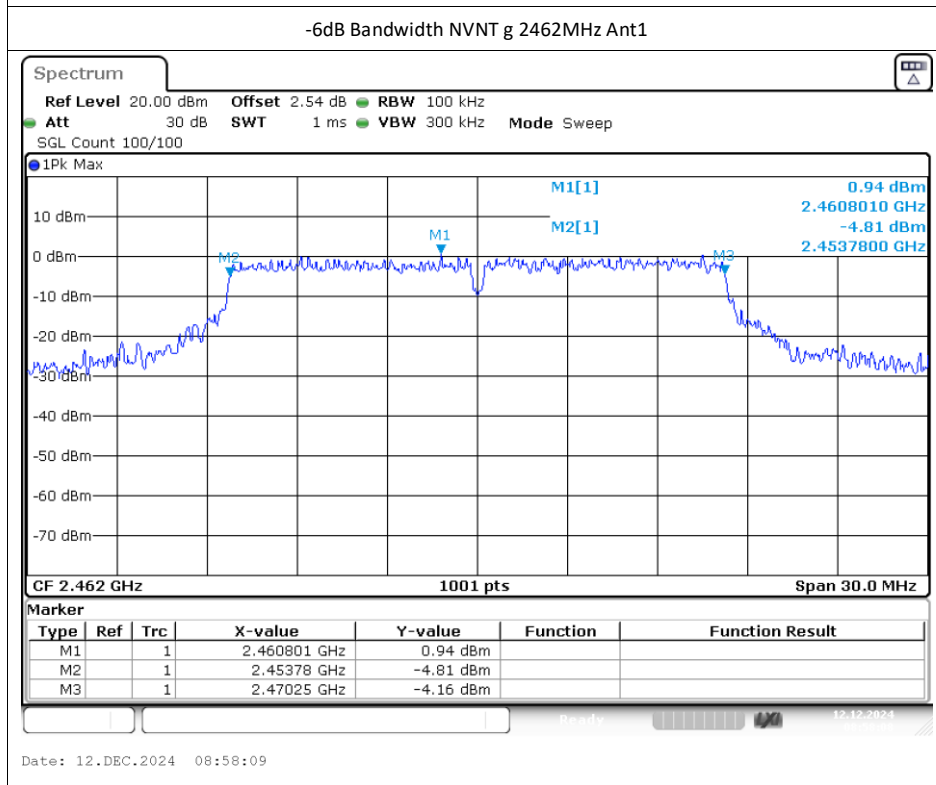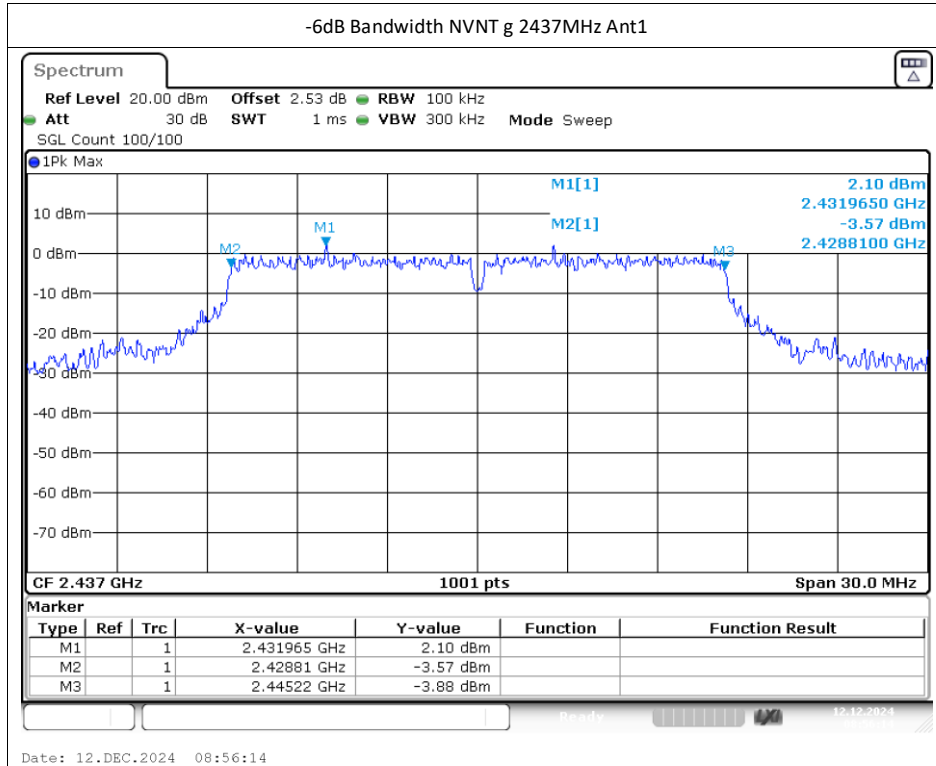


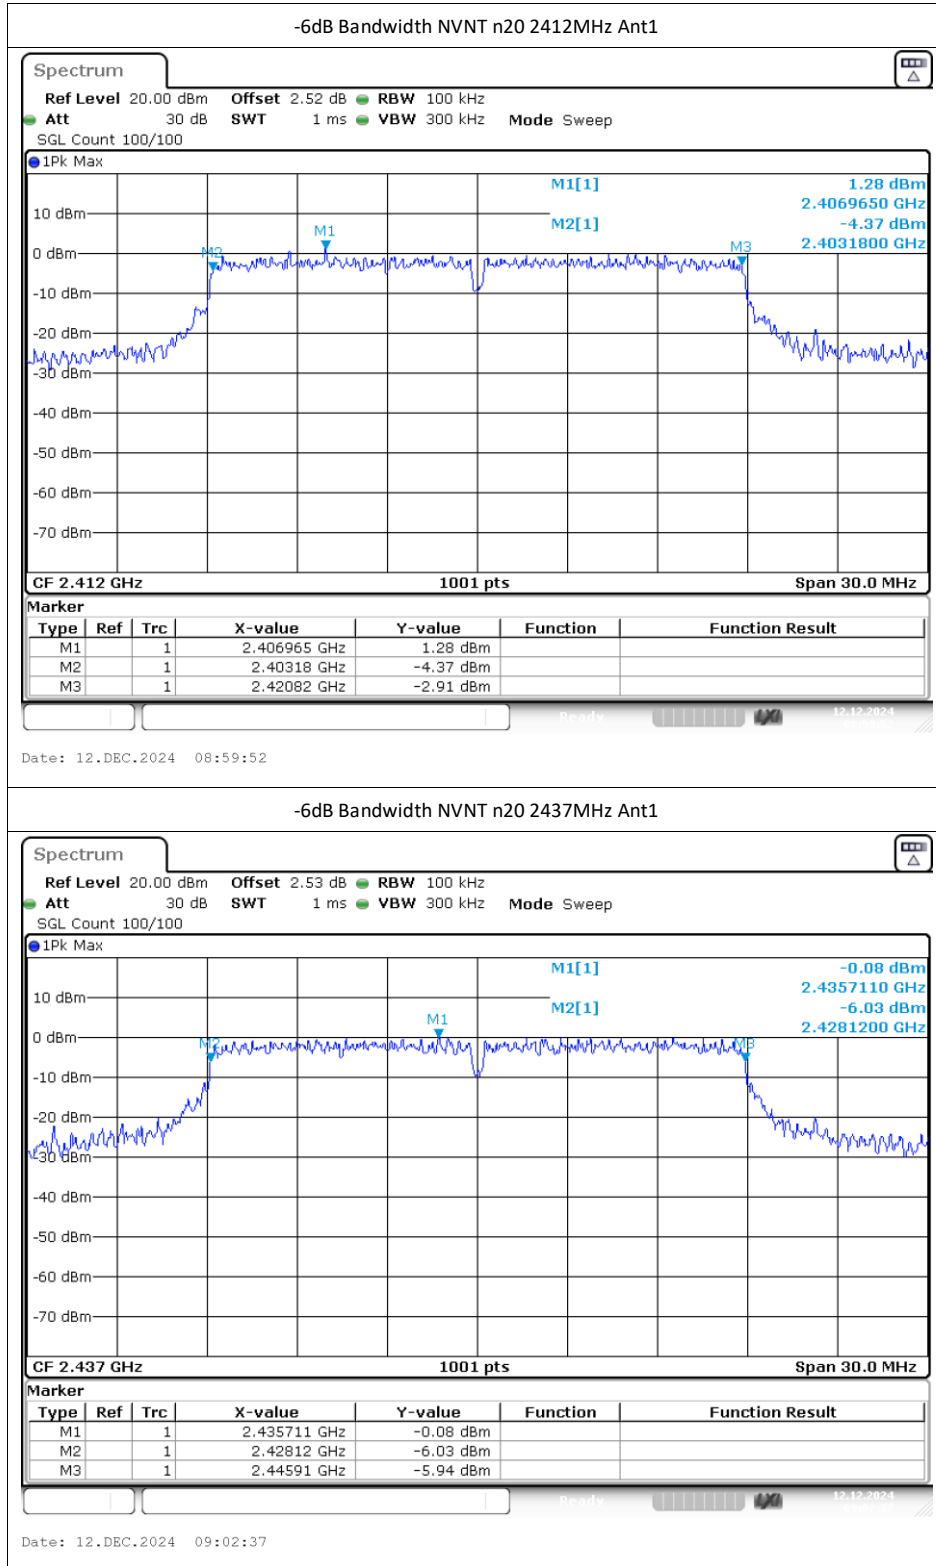


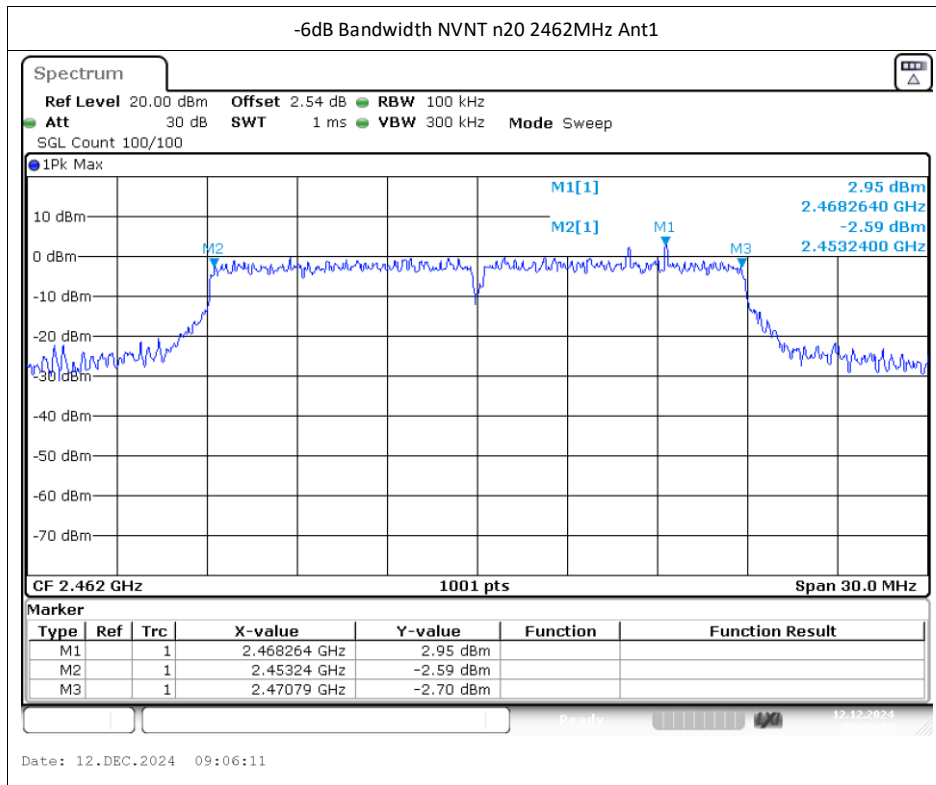



Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.288
NVNT	b	2437	Ant1	12.228
NVNT	b	2462	Ant1	12.228
NVNT	g	2412	Ant1	17.652
NVNT	g	2437	Ant1	17.383
NVNT	g	2462	Ant1	17.383
NVNT	n20	2412	Ant1	18.282
NVNT	n20	2437	Ant1	18.282
NVNT	n20	2462	Ant1	18.222

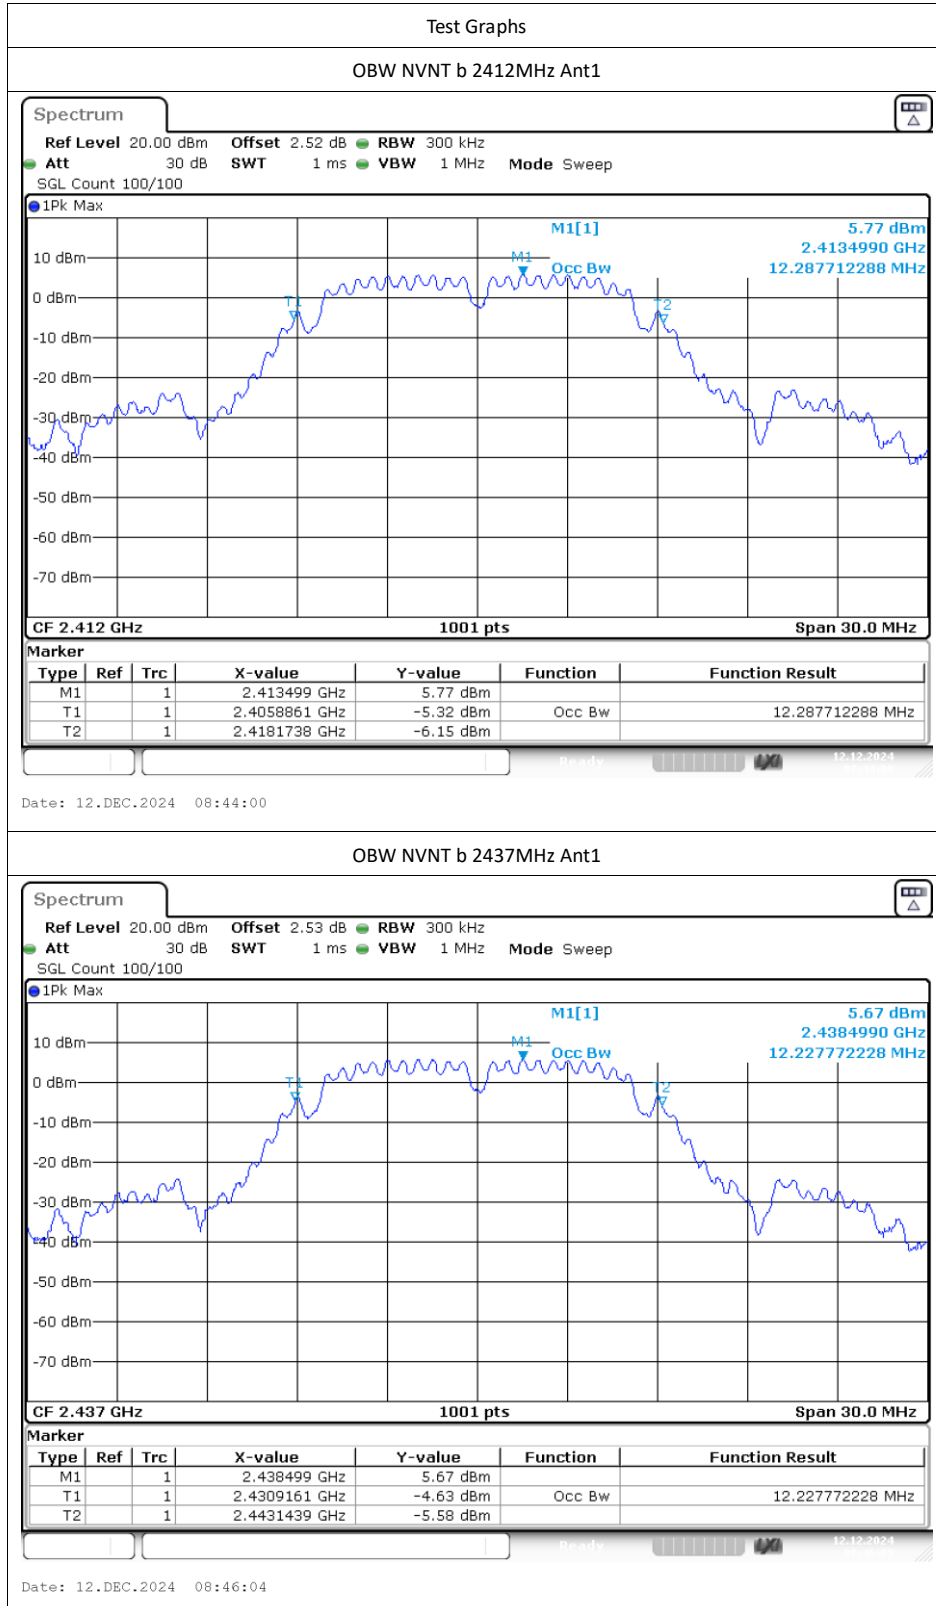

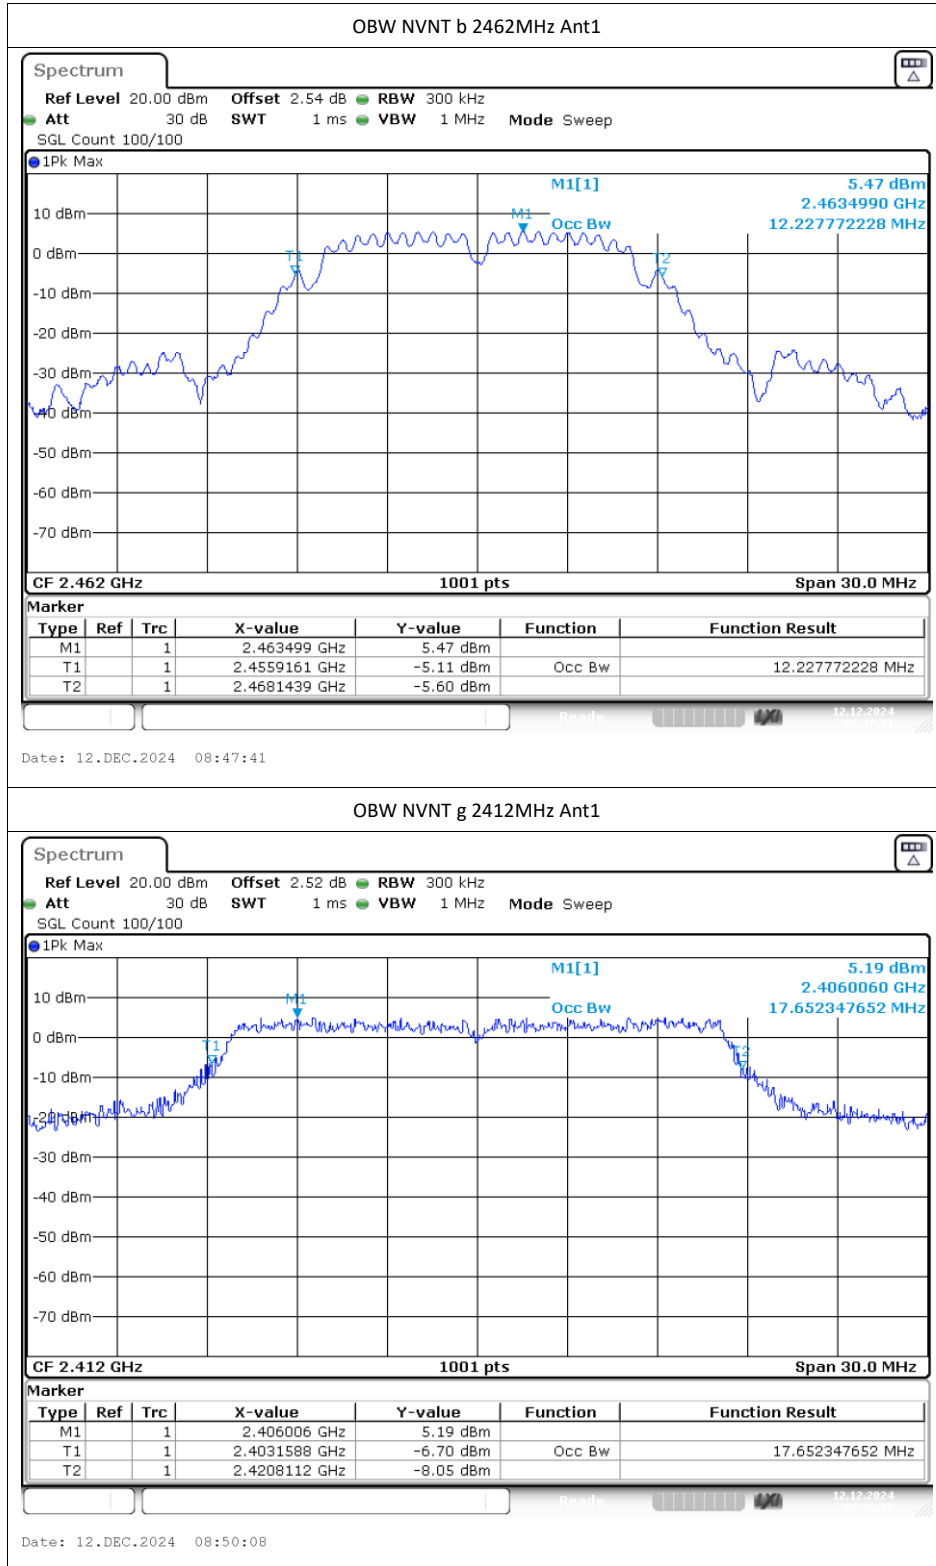

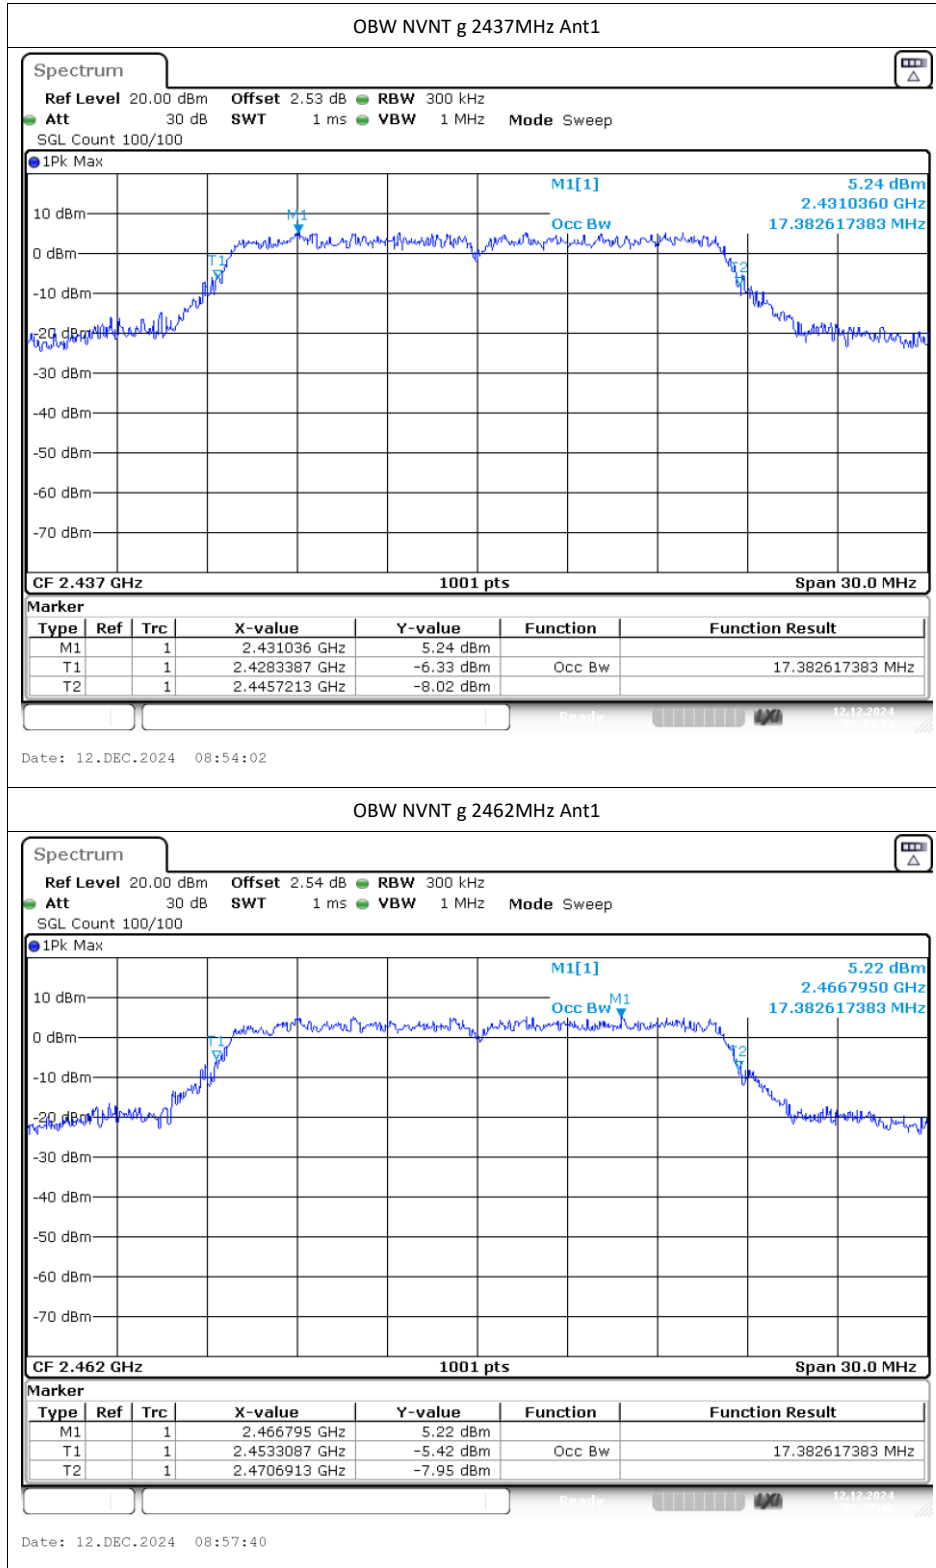


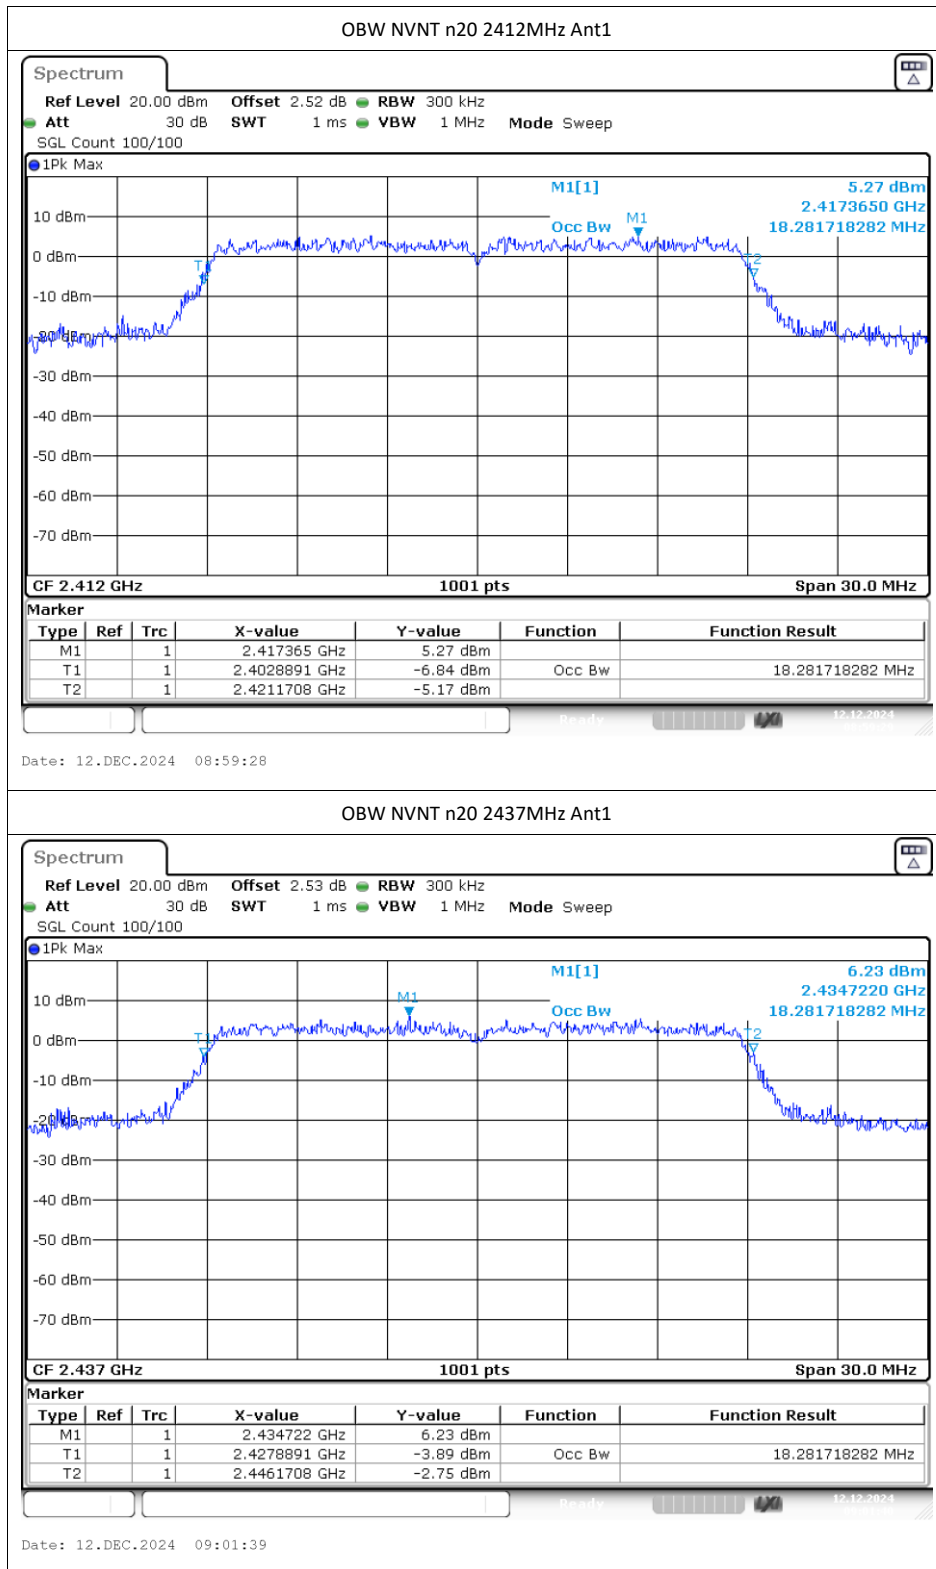


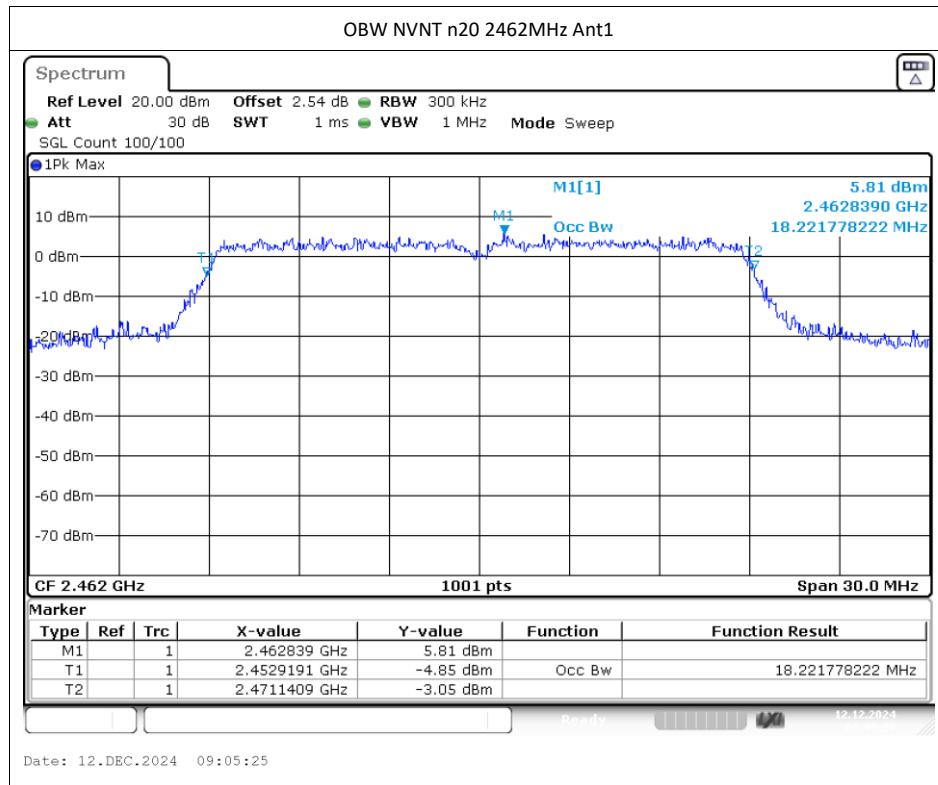



Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-11.28	8	Pass
NVNT	b	2437	Ant1	-10.7	8	Pass
NVNT	b	2462	Ant1	-11.19	8	Pass
NVNT	g	2412	Ant1	-12.49	8	Pass
NVNT	g	2437	Ant1	-13.09	8	Pass
NVNT	g	2462	Ant1	-12.22	8	Pass
NVNT	n20	2412	Ant1	-12.85	8	Pass
NVNT	n20	2437	Ant1	-12.79	8	Pass
NVNT	n20	2462	Ant1	-12.14	8	Pass

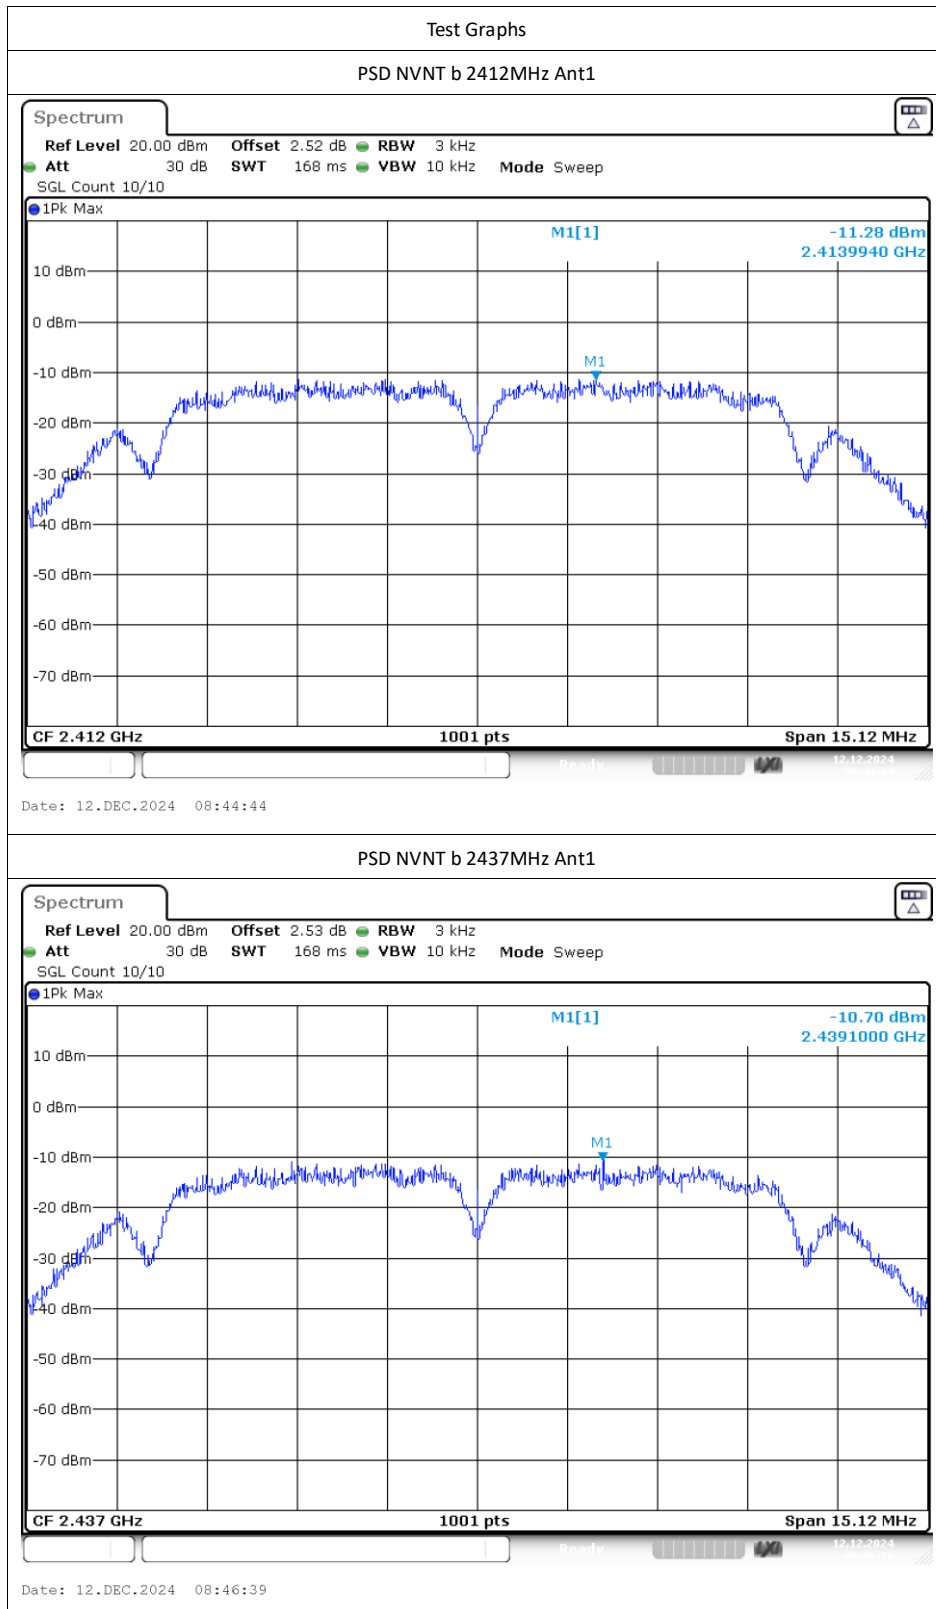

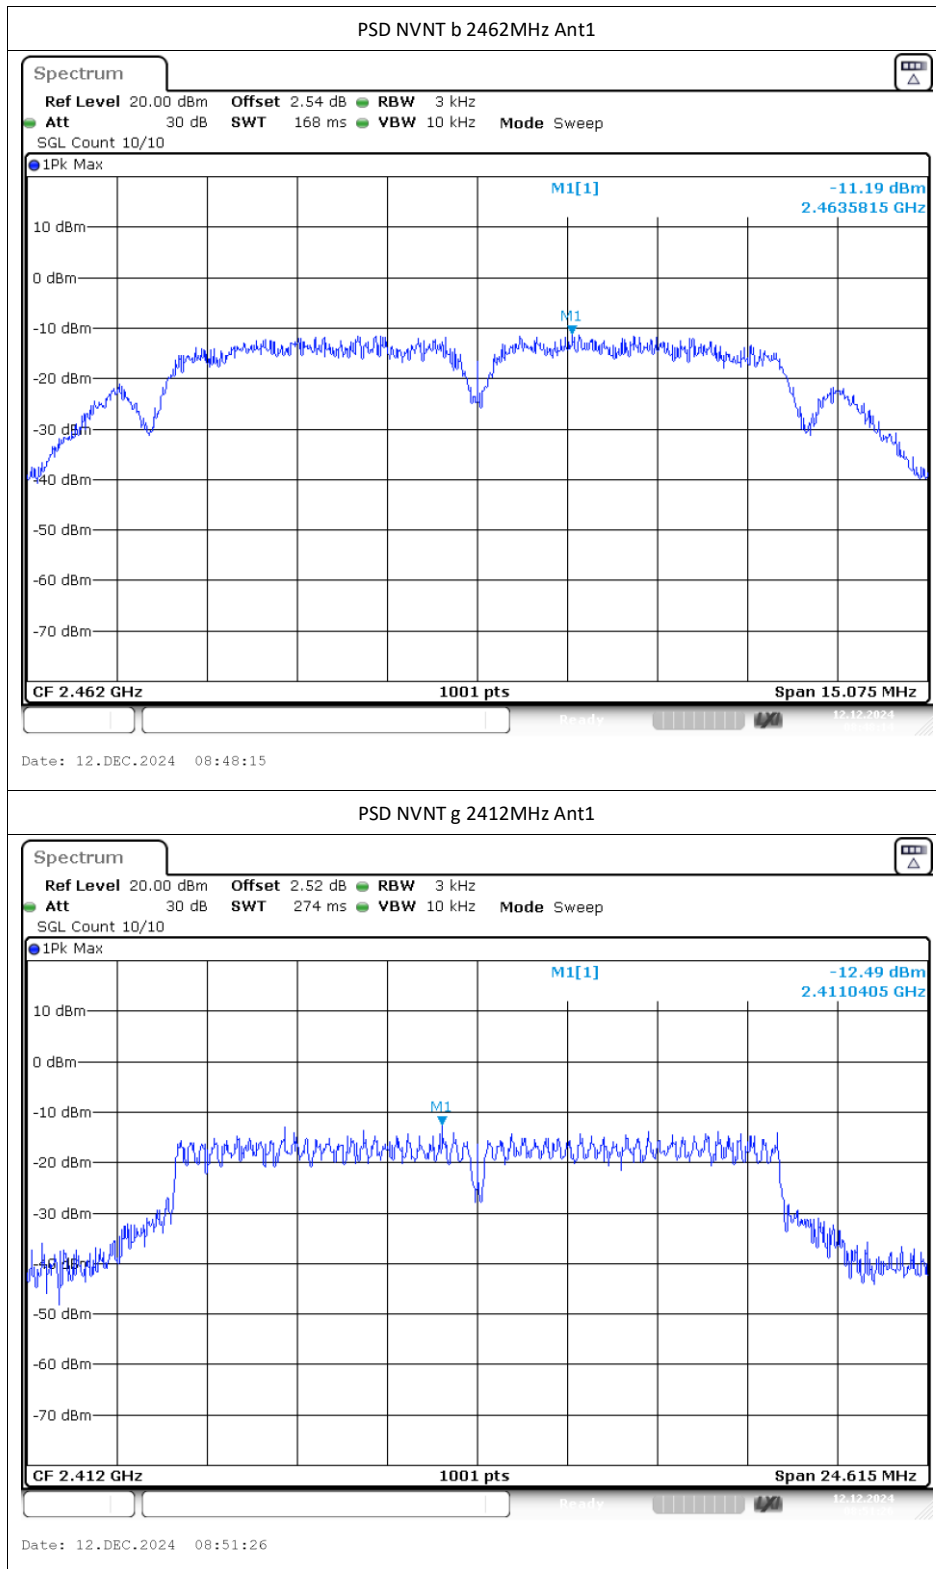

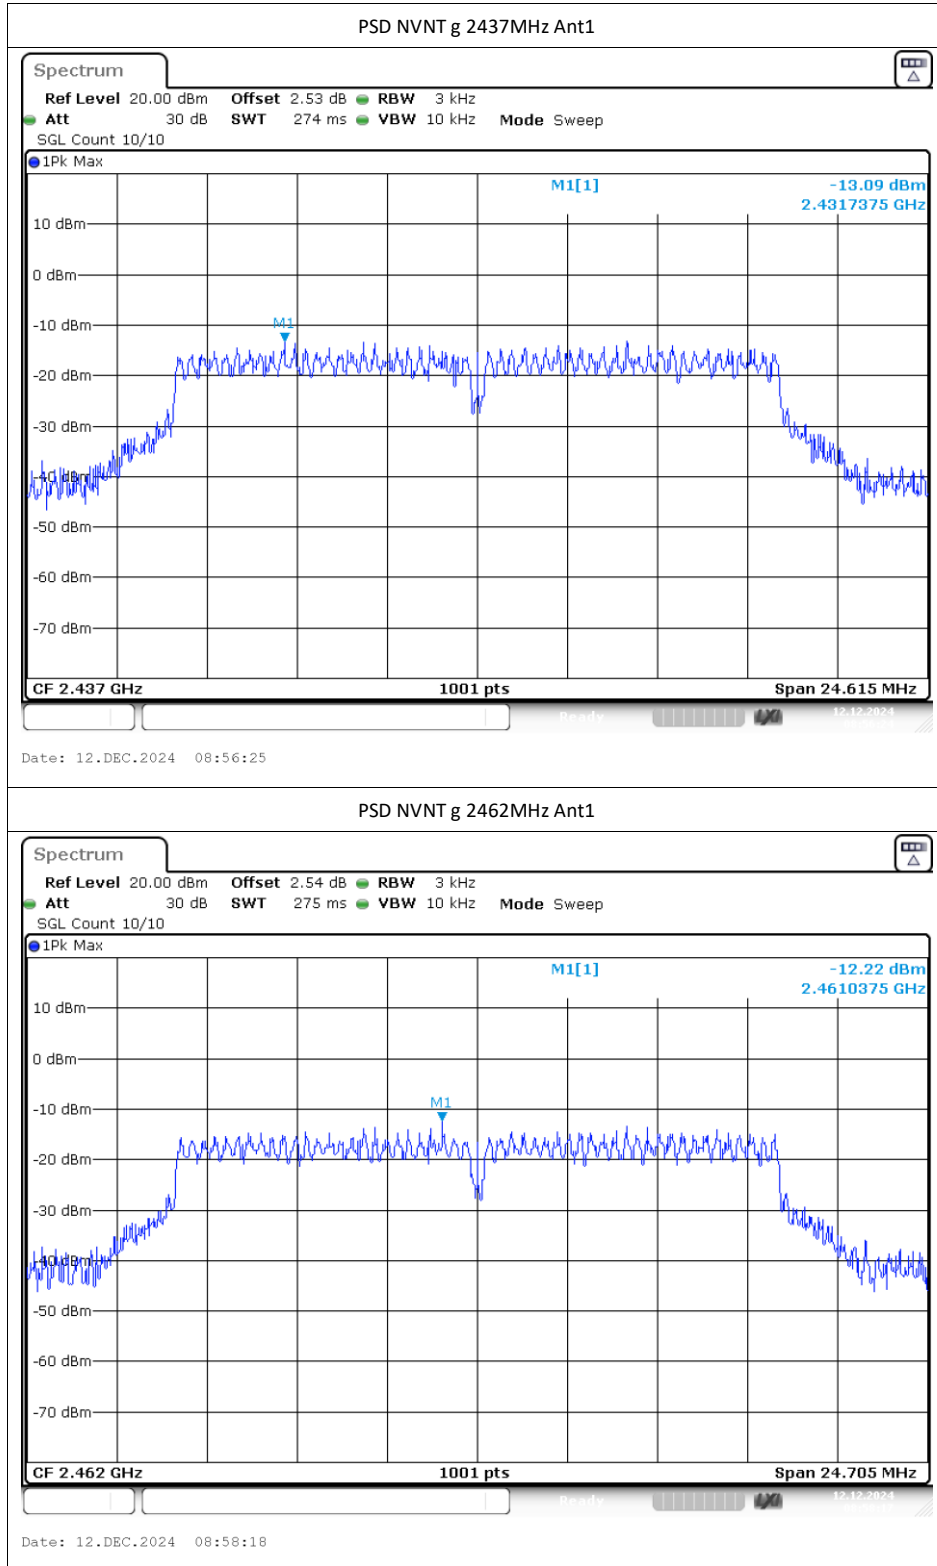


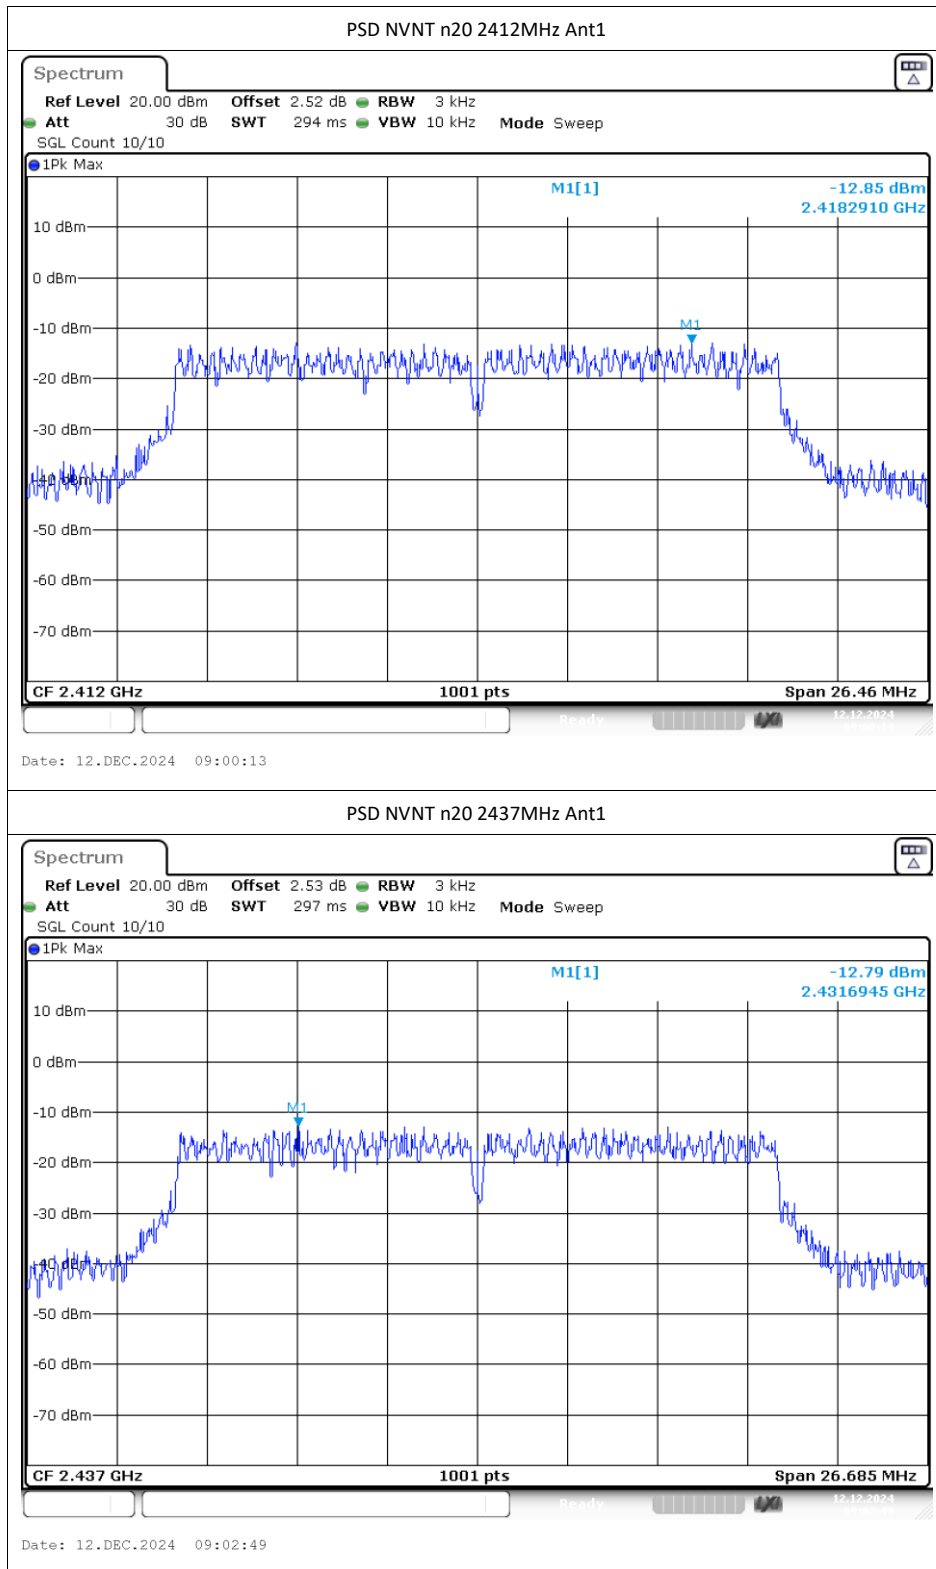


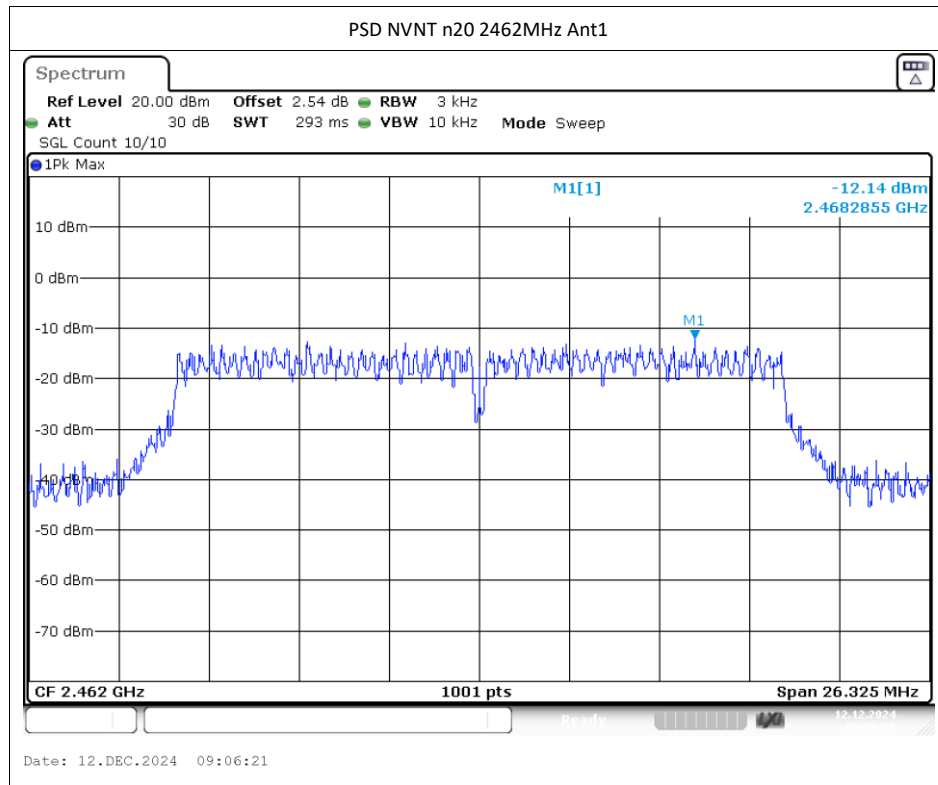



Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-36.02	-20	Pass
NVNT	b	2462	Ant1	-56.61	-20	Pass
NVNT	g	2412	Ant1	-24.21	-20	Pass
NVNT	g	2462	Ant1	-35.86	-20	Pass
NVNT	n20	2412	Ant1	-24.6	-20	Pass
NVNT	n20	2462	Ant1	-34.07	-20	Pass

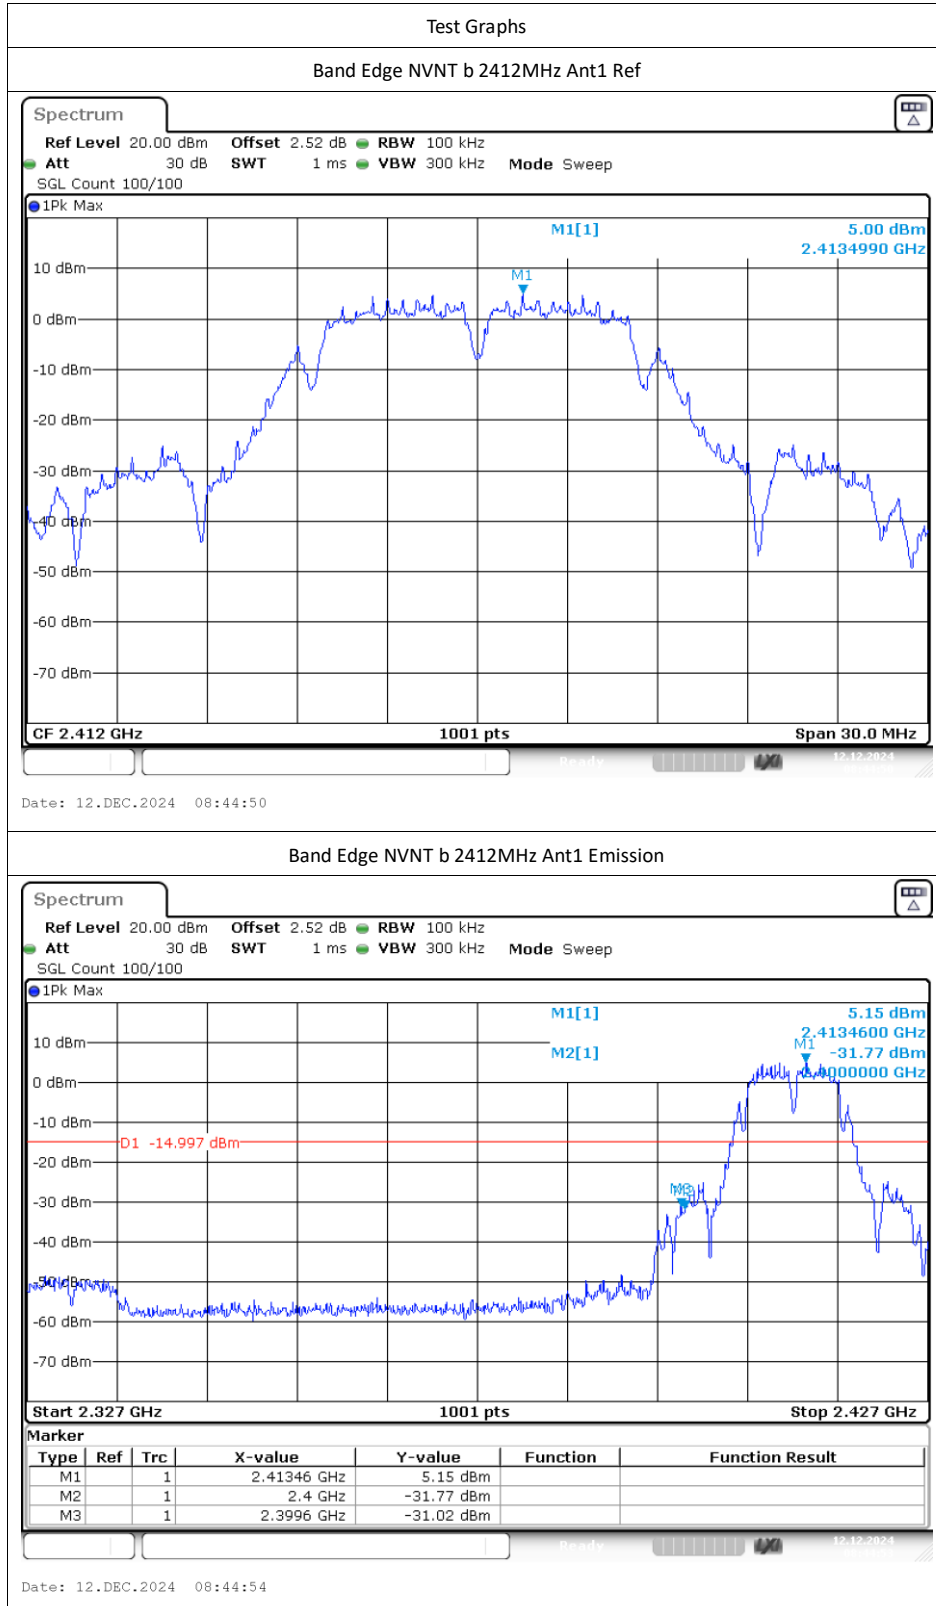


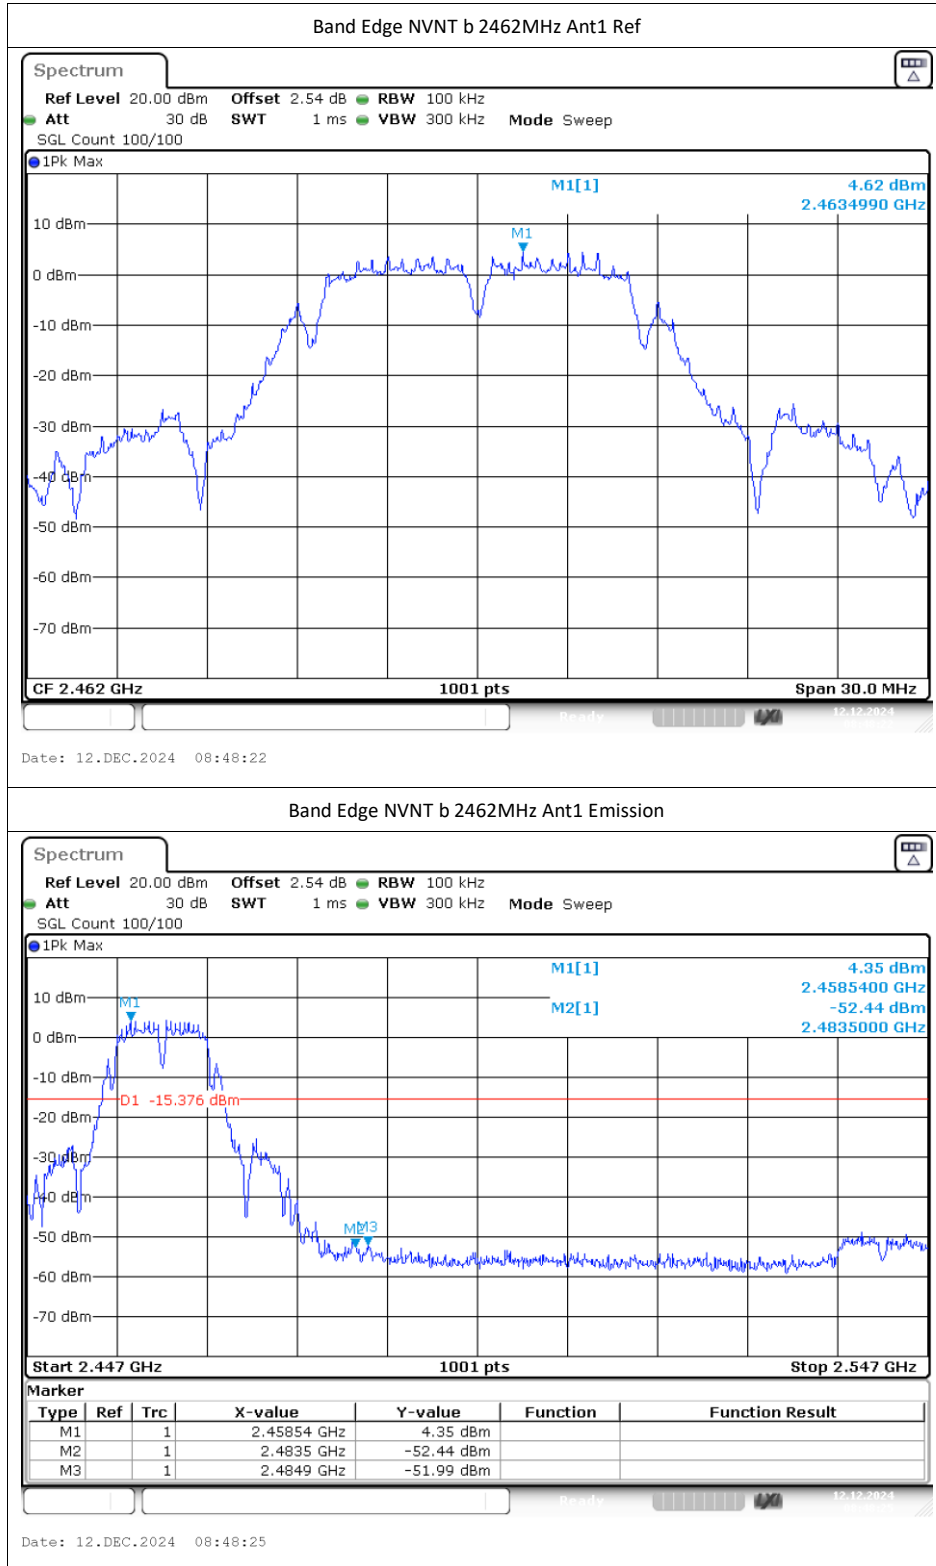

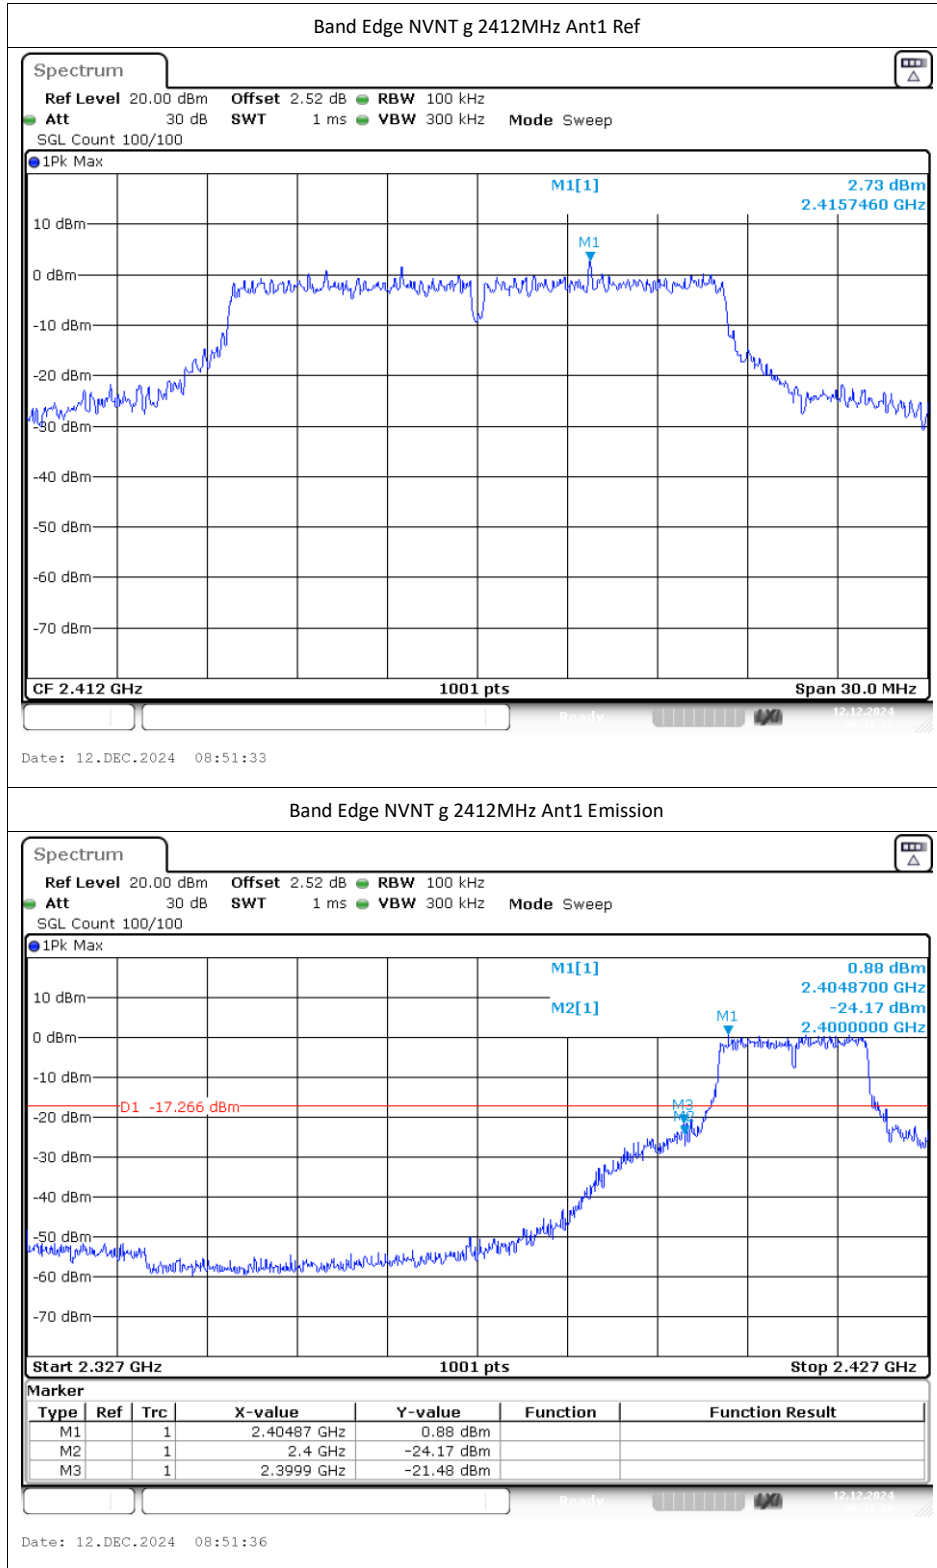

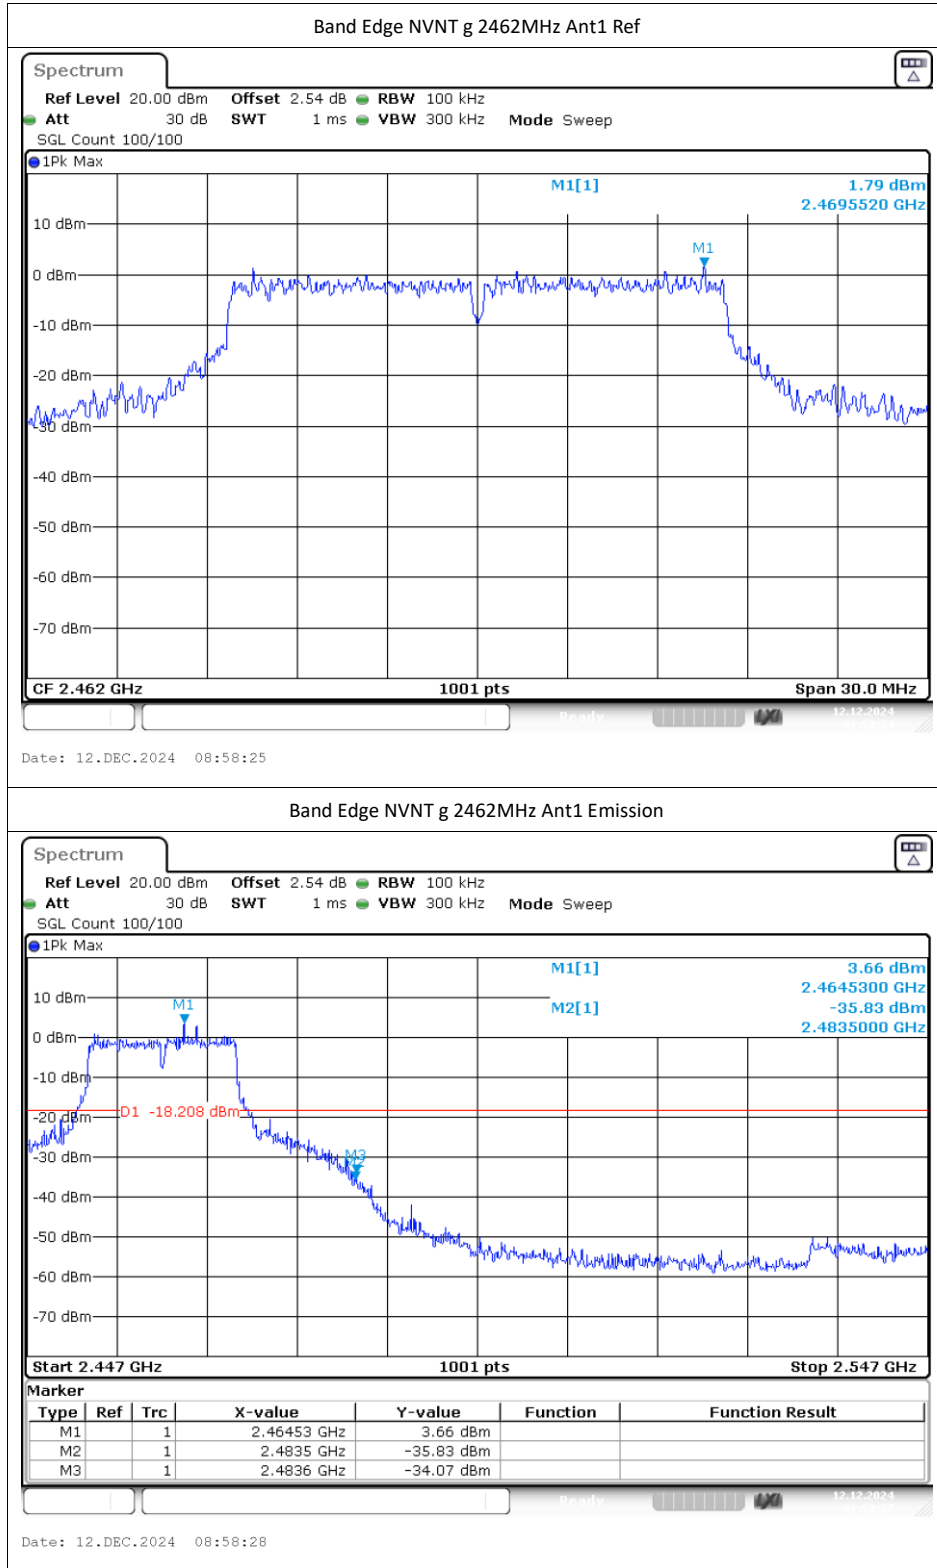

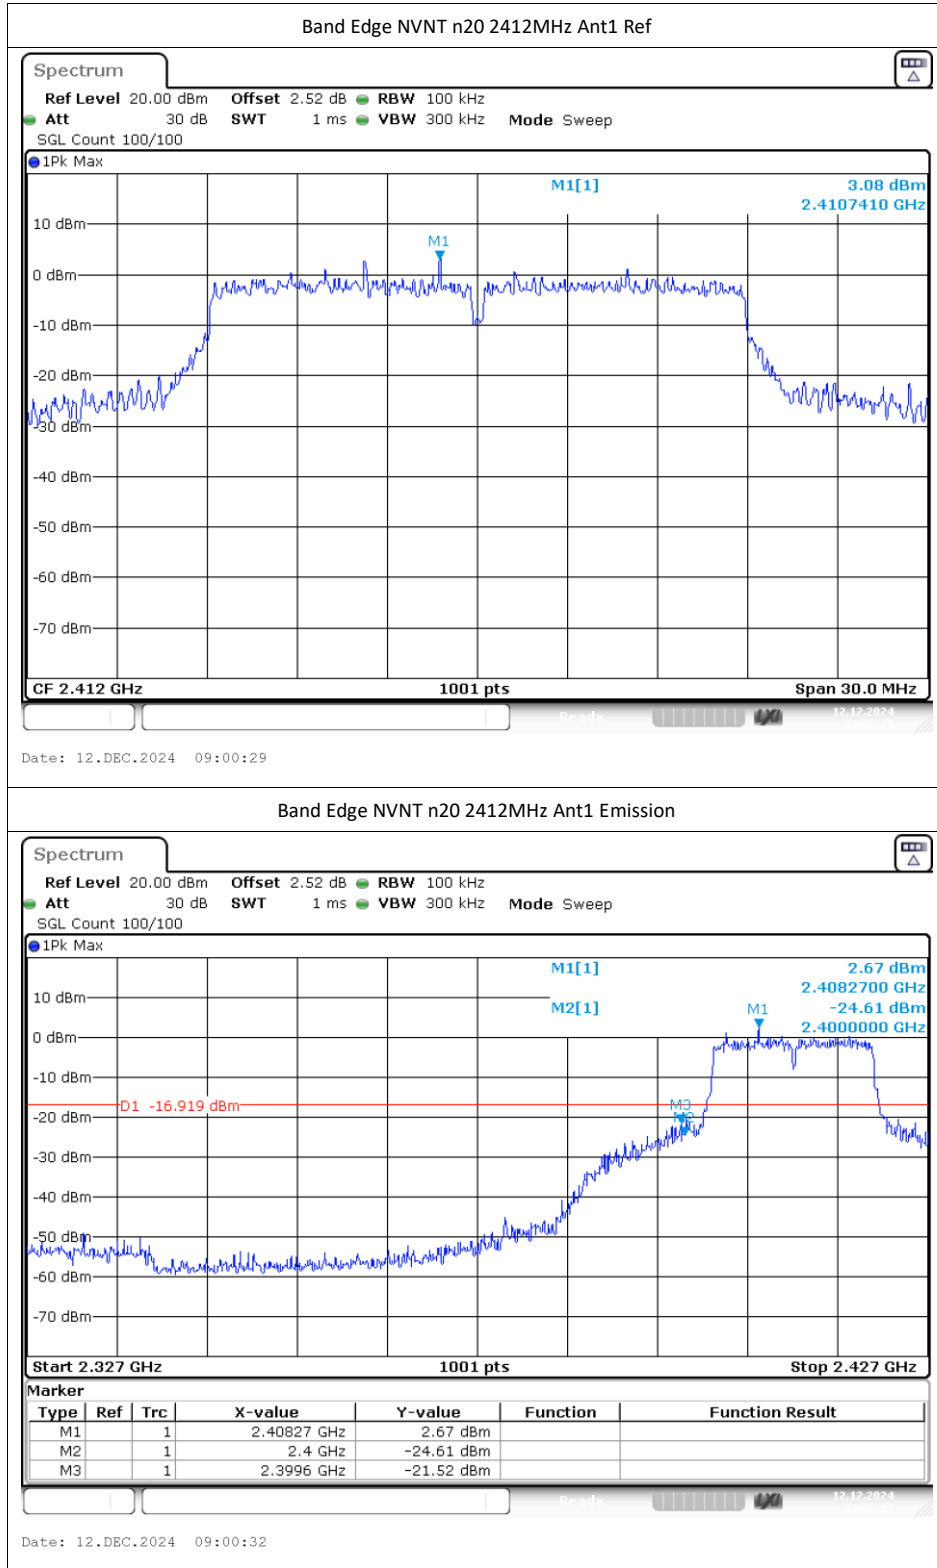

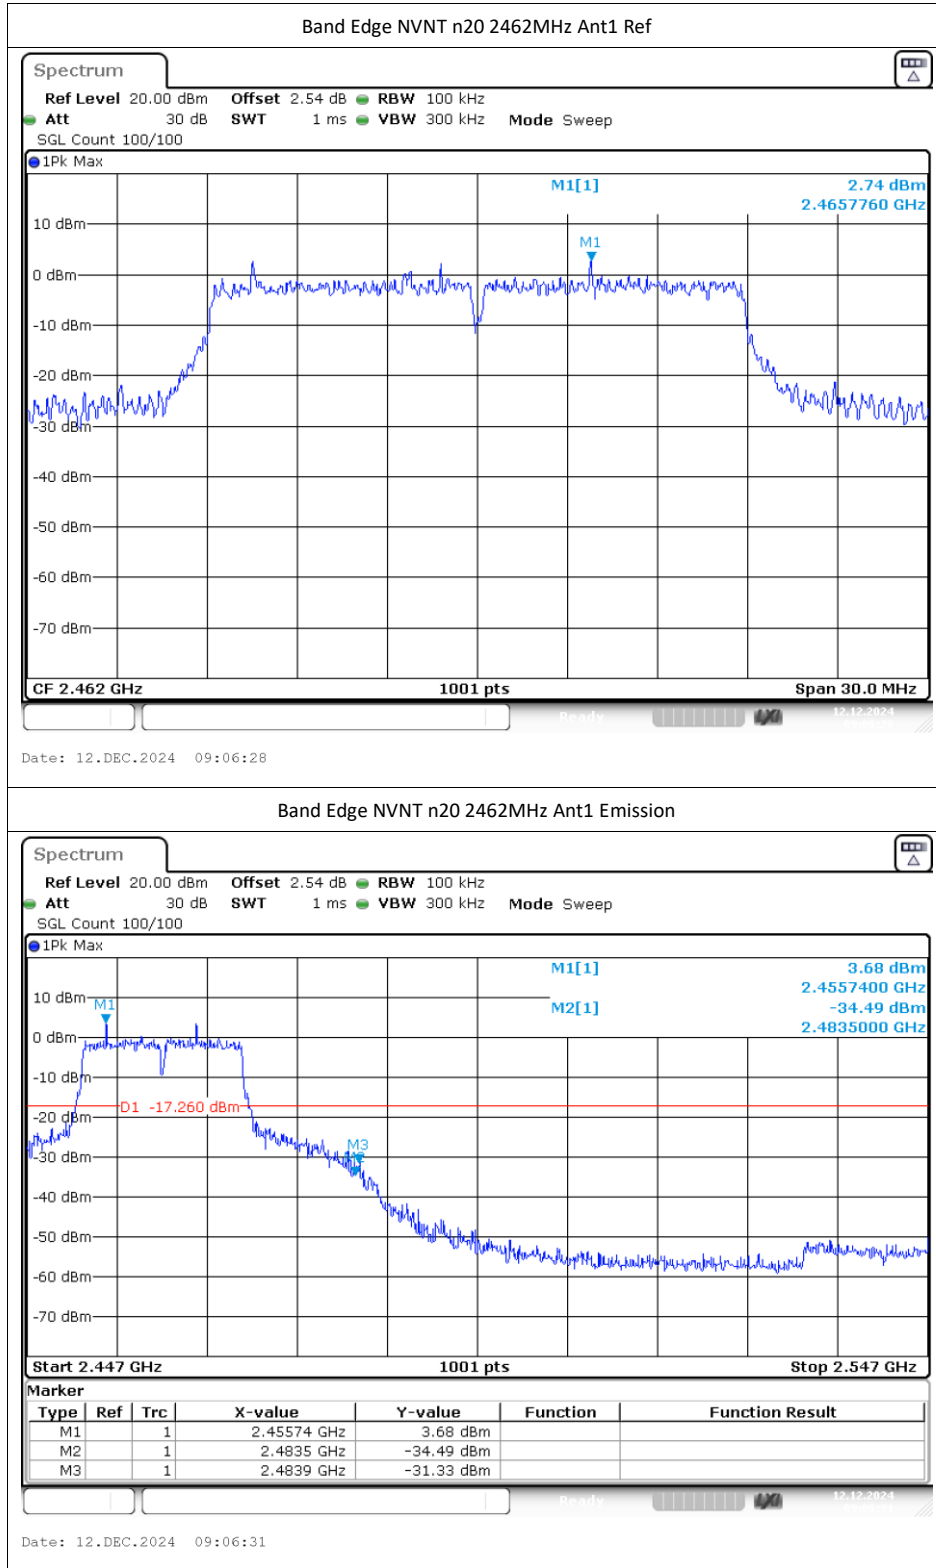

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-36.2	-20	Pass
NVNT	b	2437	Ant1	-33.87	-20	Pass
NVNT	b	2462	Ant1	-33.73	-20	Pass
NVNT	g	2412	Ant1	-44.59	-20	Pass
NVNT	g	2437	Ant1	-45.6	-20	Pass
NVNT	g	2462	Ant1	-42.67	-20	Pass
NVNT	n20	2412	Ant1	-44.56	-20	Pass
NVNT	n20	2437	Ant1	-43.6	-20	Pass
NVNT	n20	2462	Ant1	-44.83	-20	Pass

