




# User Manual Model: GT-05

Tree Stump  
Outdoor Bluetooth Speaker

Specification	Detail
Solar Panel Power	2.2W
18650 Lithium Battery	2400mAh
Speaker	4-inch full-range waterproof speaker with tweeter cup
Speaker Power	4Ω/15W
Play Modes	Bluetooth/TF Music
Audio Sources	Bluetooth, TF card
Bluetooth Version	5.1
Bluetooth Board Power	5W
Bluetooth TWS Pairing Technology	√
TWS Connection Distance	15-20 meters
Playback Time	More than 24 hours on a full charge
Low Battery Voice Prompt	Yes
Timer Function	Number 1-9: timing durations 1-9 hours 0 to cancel
Power Supply Voltage	3.7-5V
Infrared Remote Control Distance	10-15 meters
Waterproof Rating	IP65

## Introduction of Control Panel

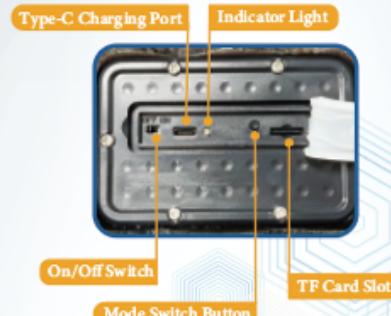

## How to Pair the Two Speakers?



Hold for 3 seconds to pair  
(both speakers must be on, in Bluetooth mode, and not connected to any other devices)



## Infrared Remote Control Speaker



Infrared Remote Control Speaker

\*When using the Infrared Remote Control, make sure to point it directly at the Infrared Receiver on the speaker to ensure proper signal reception and control.

## Instructions for Use

1. **Device Connection:** Before using the speaker, turn on the power switch located on the control panel at the back of the speaker to the ON position. The indicator light will flash blue when the power is on. The speaker has two modes: Bluetooth Mode and TF Music Mode. You can switch between these modes using either the remote control or the control panel. If the TF card is removed, the speaker will default to Bluetooth mode.

2. **Bluetooth Mode:** To pair two independent Bluetooth speakers (TWS), long press the MODE button for three seconds. Ensure that neither speaker is connected to a phone before pairing them with each other. Once paired, long press the MODE button for three seconds again to unpair the Bluetooth connection.

3. **TF Music Mode:** In TF Music Mode, the speaker will automatically play the songs or recordings stored on the TF card inserted in the card slot. Use the remote control to adjust the volume, skip to the next or previous track, or stop playback.

### 4. Remote Control Buttons:

- Red Button: Power ON/OFF switch.
- Mode Button: Mode switch button, toggles between TF Music Mode and Bluetooth Mode.
- Circular Buttons: Used for volume adjustment, skipping to the previous or next track, and pausing/playing music.
- Number Buttons (1-9): Set a timer to play music for a specified number of hours (e.g., "1" represents playing for 1 hour).
- 0: Clears the timer.

5. **Bluetooth Name:** GT-05

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction